



# DS90LV028A 3V、LVDSデュアルCMOS差動入力ライン・レシーバ

## 1 特長

- 400Mbps (200MHz)を超えるスイッチング速度
- 差動スキュー: 50ps (標準値)
- チャネル間スキュー: 0.1ns (標準値)
- 最大伝搬遅延: 2.5ns
- 3.3V電源の設計
- フロースルーのピン配置
- パワーダウン時高インピーダンスのLVDS入力
- 低消費電力の設計(3.3V静的で18mW)
- 既存の5V LVDSネットワークと相互運用可能
- 小振幅(標準値350mV)差動信号レベルを許容
- 開放、短絡、終端の入力フェイルセーフに対応
- ANSI/TIA/EIA-644規格に準拠
- 工業用温度範囲: -40°C~85°C
- SOICおよび省スペースのWSOONパッケージで供給

## 2 アプリケーション

- 多機能プリンタ
- LVDS-LVCMOS間の変換
- ビル・オートメーションとファクトリ・オートメーション
- グリッド・インフラストラクチャ

## 3 概要

DS90LV028AはデュアルCMOS差動ライン・レシーバで、超低消費電力、低ノイズ、高いデータ速度を必要とするアプリケーション用に設計されています。このデバイスは、低電圧差動信号(LVDS)テクノロジーを活用し、400Mbps (200MHz)を超えるデータ速度をサポートするように設計されています。

DS90LV028Aは低電圧(標準値350mV)の差動入力信号を受信し、3V CMOS出力レベルへ変換します。また、レシーバは開放、短絡、終端(100Ω)の入力フェイルセーフもサポートします。すべてのフェイルセーフ条件において、レシーバの出力はHIGHになります。DS90LV028Aにはフロースルー設計が採用されているため、PCBレイアウトが容易です。


DS90LV028Aと、対になるLVDSライン・ドライバは、消費電力の大きいPECL/ECLデバイスの代替として、高速のポイント・ツー・ポイント・インターフェイス・アプリケーションに使用できます。

### 製品情報<sup>(1)</sup>

型番	パッケージ	本体サイズ(公称)
DS90LV028A	SOIC (8)	4.90mm×3.91mm
	WSOON (8)	4.00mm×4.00mm

(1) 提供されているすべてのパッケージについては、巻末の注文情報を参照してください。

### 機能図

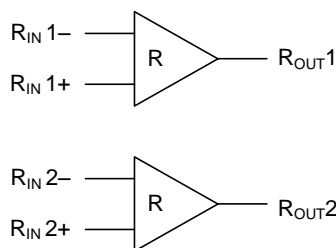

Copyright © 2016, Texas Instruments Incorporated



## 目次

<b>1</b>	<b>特長</b> .....	<b>1</b>	<b>8.3</b>	<b>Feature Description</b> .....	<b>10</b>
<b>2</b>	<b>アプリケーション</b> .....	<b>1</b>	<b>8.4</b>	<b>Device Functional Modes</b> .....	<b>11</b>
<b>3</b>	<b>概要</b> .....	<b>1</b>	<b>9</b>	<b>Application and Implementation</b> .....	<b>12</b>
<b>4</b>	<b>改訂履歴</b> .....	<b>2</b>	<b>9.1</b>	<b>Application Information</b> .....	<b>12</b>
<b>5</b>	<b>Pin Configuration and Functions</b> .....	<b>3</b>	<b>9.2</b>	<b>Typical Application</b> .....	<b>12</b>
<b>6</b>	<b>Specifications</b> .....	<b>4</b>	<b>10</b>	<b>Power Supply Recommendations</b> .....	<b>14</b>
6.1	Absolute Maximum Ratings .....	4	<b>11</b>	<b>Layout</b> .....	<b>14</b>
6.2	ESD Ratings .....	4	11.1	Layout Guidelines .....	14
6.3	Recommended Operating Conditions .....	4	11.2	Layout Examples .....	15
6.4	Thermal Information .....	4	<b>12</b>	<b>デバイスおよびドキュメントのサポート</b> .....	<b>16</b>
6.5	Electrical Characteristics .....	5	12.1	ドキュメントのサポート .....	16
6.6	Switching Characteristics .....	5	12.2	ドキュメントの更新通知を受け取る方法 .....	16
6.7	Typical Characteristics .....	6	12.3	コミュニティ・リソース .....	16
<b>7</b>	<b>Parameter Measurement Information</b> .....	<b>9</b>	12.4	商標 .....	16
<b>8</b>	<b>Detailed Description</b> .....	<b>10</b>	12.5	静電気放電に関する注意事項 .....	16
8.1	Overview .....	10	12.6	Glossary .....	16
8.2	Functional Block Diagram .....	10	<b>13</b>	<b>メカニカル、パッケージ、および注文情報</b> .....	<b>16</b>



## 4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

<b>Revision E (April 2013) から Revision F に変更</b>	<b>Page</b>
<ul style="list-style-type: none"> <li>「ESD定格」の表、「機能説明」セクション、「デバイスの機能モード」セクション、「アプリケーションと実装」セクション、「電源に関する推奨事項」セクション、「レイアウト」セクション、「デバイスおよびドキュメントのサポート」セクション、「メカニカル、パッケージ、および注文情報」セクションを追加 .....</li> <li>Added Thermal Information values .....</li> </ul>	 1 4

<b>Revision D (April 2013) から Revision E に変更</b>	<b>Page</b>
<ul style="list-style-type: none"> <li>ナショナル・セミコンダクターのデータシートのレイアウトをTIフォーマットへ 変更 .....</li> </ul>	1

## 5 Pin Configuration and Functions

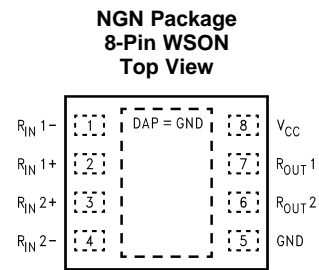

### Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
GND	5	—	Ground pin
R <sub>IN</sub> +	2, 3	I	Noninverting receiver input pin
R <sub>IN</sub> –	1, 4	I	Inverting receiver input pin
R <sub>OUT</sub>	6, 7	O	Receiver output pin
V <sub>CC</sub>	8	—	Power supply pin, 3.3 V ±0.3 V

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
Supply voltage, $V_{CC}$		–0.3	4	V
Input voltage, $R_{IN+}$ , $R_{IN-}$		–0.3	3.9	V
Output voltage, $R_{OUT}$		–0.3	$V_{CC} + 0.3$	V
Maximum package power dissipation at 25°C	D package		1025	mW
	Derate D package		8.2 mW/°C above 25°C	°C
	NGN package		3.3	W
	Derate NGN package		25.6 mW/°C above 25°C	°C
Lead temperature range, soldering (4 s)			260	°C
Junction temperature, $T_J$			150	°C
Storage temperature, $T_{stg}$		–65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$ Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±7000	V
	Machine model (MM) <sup>(2)</sup>	±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) EIAJ, 0  $\Omega$ , 200 pF

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
$V_{CC}$	Supply voltage	3	3.3	3.6	V
	Receiver input voltage	GND		3	V
$T_A$	Operating free-air temperature	–40	25	85	°C

### 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>			DS90LV028A		UNIT
			D (SOIC)	NGN (WSON)	
			8 PINS	8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance		—	35.9	°C/W
	Low-K thermal resistance		212	—	
	High-K thermal resistance		122	—	
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance		69.1	24.2	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance		47.7	13.2	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter		15.2	0.2	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter		47.2	13.3	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance		—	2.9	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

PARAMETER		TEST CONDITIONS	MIN	TYP <sup>(2)</sup>	MAX	UNIT
V <sub>TH</sub>	Differential input high threshold	V <sub>CM</sub> = 1.2 V, 0 V, 3 V, R <sub>IN+</sub> , R <sub>IN-</sub> pins <sup>(3)</sup>			100	mV
V <sub>TL</sub>	Differential input low threshold	V <sub>CM</sub> = 1.2 V, 0 V, 3 V, R <sub>IN+</sub> , R <sub>IN-</sub> pins <sup>(3)</sup>	-100			mV
I <sub>IN</sub>	Input current	V <sub>CC</sub> = 3.6 V or 0 V, R <sub>IN+</sub> , R <sub>IN-</sub> pins	V <sub>IN</sub> = 2.8 V	-10	±1	10
			V <sub>IN</sub> = 0 V	-10	±1	10
		V <sub>CC</sub> = 0 V, V <sub>IN</sub> = 3.6 V, R <sub>IN+</sub> , R <sub>IN-</sub> pins		-20		20
V <sub>OH</sub>	Output high voltage	I <sub>OH</sub> = -0.4 mA, V <sub>ID</sub> = 200 mV, R <sub>OUT</sub> pin	2.7	3.1		V
		I <sub>OH</sub> = -0.4 mA, inputs terminated, R <sub>OUT</sub> pin	2.7	3.1		
		I <sub>OH</sub> = -0.4 mA, inputs shorted, R <sub>OUT</sub> pin	2.7	3.1		
V <sub>OL</sub>	Output low voltage	I <sub>OL</sub> = 2 mA, V <sub>ID</sub> = -200 mV, R <sub>OUT</sub> pin		0.3	0.5	V
I <sub>OS</sub>	Output short-circuit current	V <sub>OUT</sub> = 0 V, R <sub>OUT</sub> pin <sup>(4)</sup>	-15	-50	-100	mA
V <sub>CL</sub>	Input clamp voltage	I <sub>CL</sub> = -18 mA, R <sub>OUT</sub> pin	-1.5	-0.8		V
I <sub>CC</sub>	No load supply current	V <sub>CC</sub> pin, inputs open		5.4	9	mA

- (1) Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground unless otherwise specified (such as V<sub>ID</sub>).
- (2) All typicals are given for: V<sub>CC</sub> = 3.3 V and T<sub>A</sub> = 25°C.
- (3) V<sub>CC</sub> is always higher than R<sub>IN+</sub> and R<sub>IN-</sub> voltage. R<sub>IN+</sub> and R<sub>IN-</sub> are allowed to have voltage range -0.05 V to 3.05 V. V<sub>ID</sub> is not allowed to be greater than 100 mV when V<sub>CM</sub> = 0 V or 3 V.
- (4) Output short circuit current (I<sub>OS</sub>) is specified as magnitude only, minus sign indicates direction only. Only one output must be shorted at a time, do not exceed maximum junction temperature specification.


## 6.6 Switching Characteristics

V<sub>CC</sub> = 3.3 V ±10%, and T<sub>A</sub> = -40°C to 85°C (unless otherwise noted)<sup>(1)(2)</sup>


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PHLD</sub>	Differential propagation delay high to low	C <sub>L</sub> = 15 pF	1	1.6	2.5	ns
t <sub>PLHD</sub>	Differential propagation delay low to high	V <sub>ID</sub> = 200 mV	1	1.7	2.5	ns
t <sub>SKD1</sub>	Differential pulse skew  t <sub>PHLD</sub> - t <sub>PLHD</sub>   <sup>(3)</sup>	See Figure 18 and Figure 19	0	50	400	ps
t <sub>SKD2</sub>	Differential channel-to-channel skew-same device <sup>(4)</sup>		0	0.1	0.5	ns
t <sub>SKD3</sub>	Differential part to part skew <sup>(5)</sup>		0		1	ns
t <sub>SKD4</sub>	Differential part to part skew <sup>(6)</sup>		0		1.5	ns
t <sub>TLH</sub>	Rise Time			325	800	ps
t <sub>THL</sub>	Fall Time			225	800	ps
f <sub>MAX</sub>	Maximum operating frequency <sup>(7)</sup>		200	250		MHz

- (1) C<sub>L</sub> includes probe and jig capacitance.
- (2) Generator waveform for all tests unless otherwise specified: f = 1 MHz, Z<sub>O</sub> = 50 Ω, t<sub>r</sub> and t<sub>f</sub> (0% to 100%) ≤ 3 ns for R<sub>IN-</sub>.
- (3) t<sub>SKD1</sub> is the magnitude difference in differential propagation delay time between the positive-going-edge and the negative-going-edge of the same channel.
- (4) t<sub>SKD2</sub> is the differential channel-to-channel skew of any event on the same device. This specification applies to devices having multiple receivers within the integrated circuit.
- (5) t<sub>SKD3</sub>, part to part skew, is the differential channel-to-channel skew of any event between devices. This specification applies to devices at the same V<sub>CC</sub> and within 5°C of each other within the operating temperature range.
- (6) t<sub>SKD4</sub>, part to part skew, is the differential channel-to-channel skew of any event between devices. This specification applies to devices over the recommended operating temperature and voltage ranges, and across process distribution. t<sub>SKD4</sub> is defined as |Maximum - Minimum| differential propagation delay.
- (7) f<sub>MAX</sub> generator input conditions: t<sub>r</sub> = t<sub>f</sub> < 1 ns (0% to 100%), 50% duty cycle, differential (1.05V to 1.35 peak to peak). Output criteria: 60%/40% duty cycle, V<sub>OL</sub> (max 0.4V), V<sub>OH</sub> (min 2.7V), load = 15 pF (stray plus probes).


## 6.7 Typical Characteristics

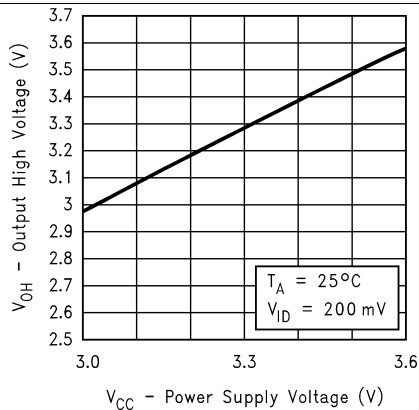


**Figure 1. Output High Voltage vs Power Supply Voltage**

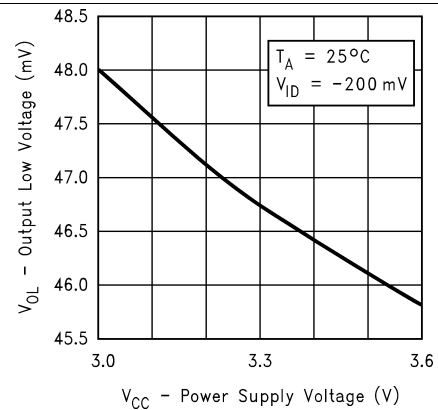


**Figure 2. Output Low Voltage vs Power Supply Voltage**

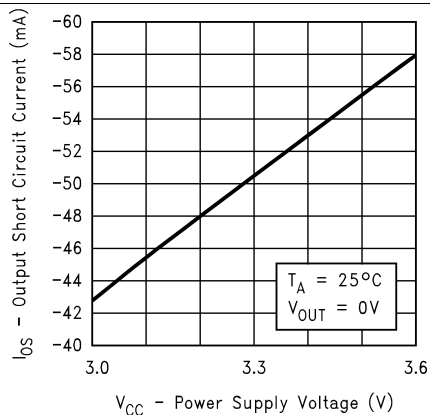


**Figure 3. Output Short Circuit Current vs Power Supply Voltage**

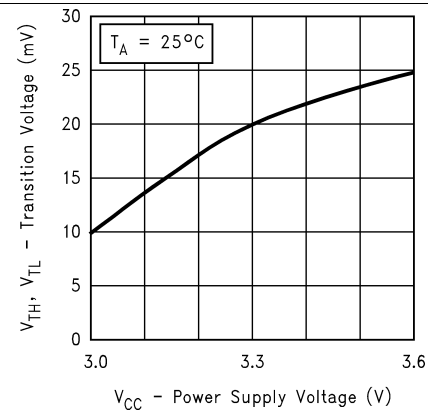

**Figure 4. Differential Transition Voltage vs Power Supply Voltage**

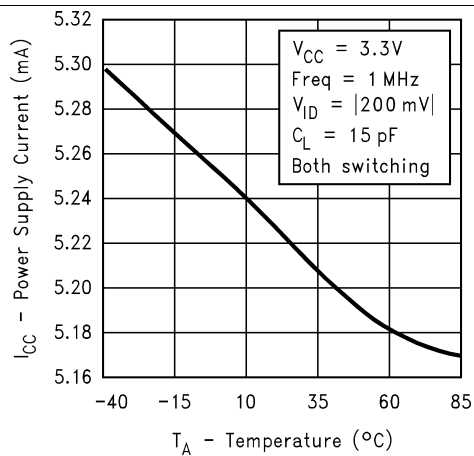


**Figure 5. Power Supply Current vs Ambient Temperature**

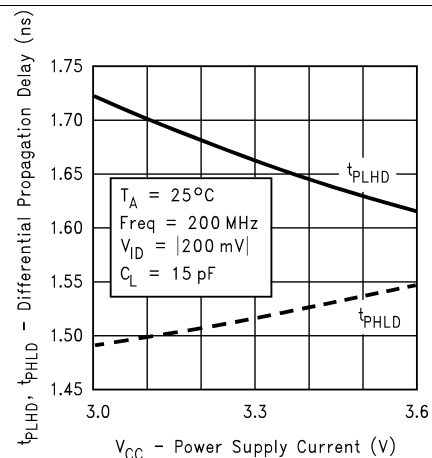


**Figure 6. Differential Propagation Delay vs Power Supply Voltage**


## Typical Characteristics (continued)

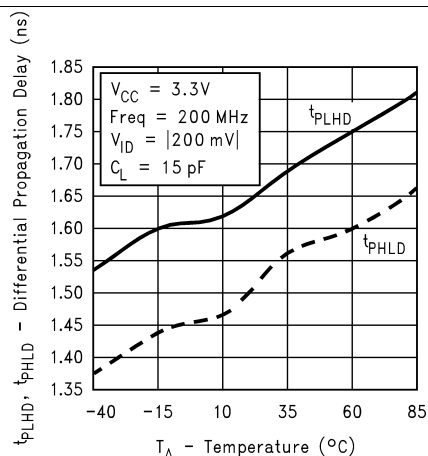


**Figure 7. Differential Propagation Delay vs Ambient Temperature**

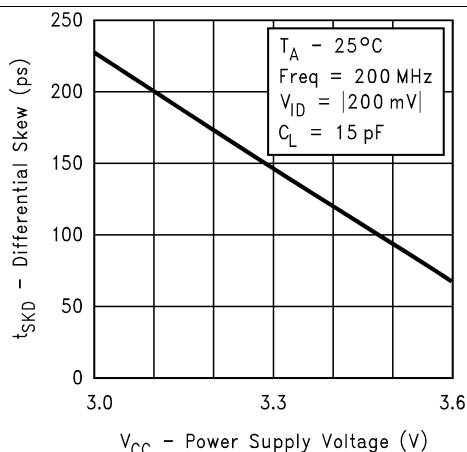


**Figure 8. Differential Skew vs Power Supply Voltage**

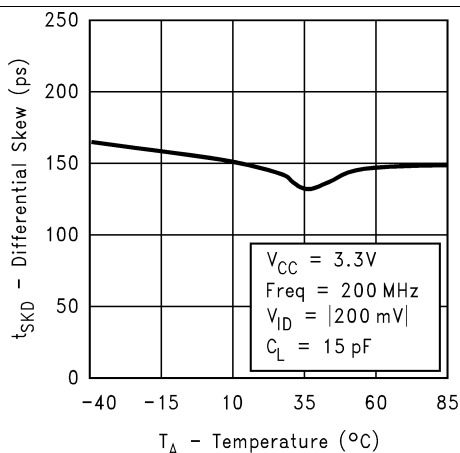


**Figure 9. Differential Skew vs Ambient Temperature**

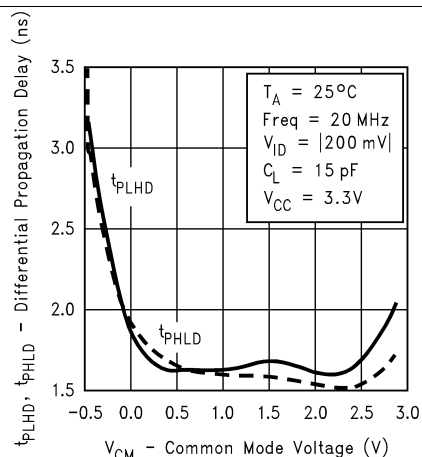






**Figure 10. Differential Propagation Delay vs Common Mode Voltage**

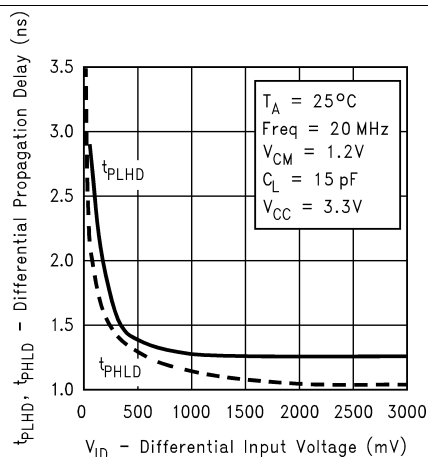


**Figure 11. Differential Propagation Delay vs Differential Input Voltage**

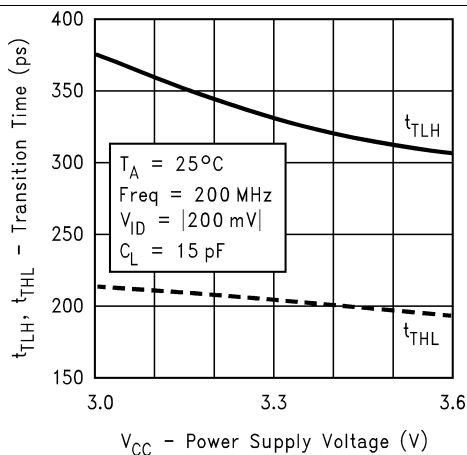


**Figure 12. Transition Time vs Power Supply Voltage**

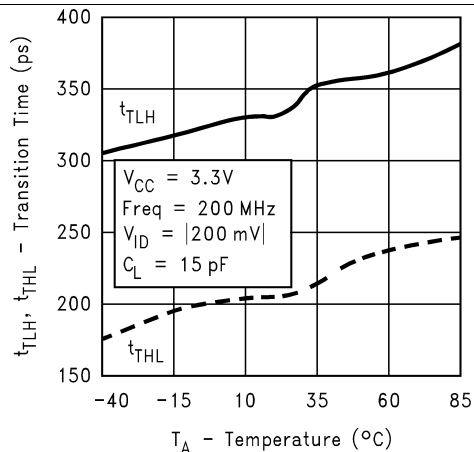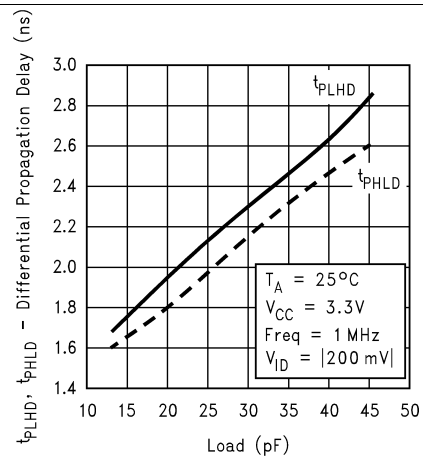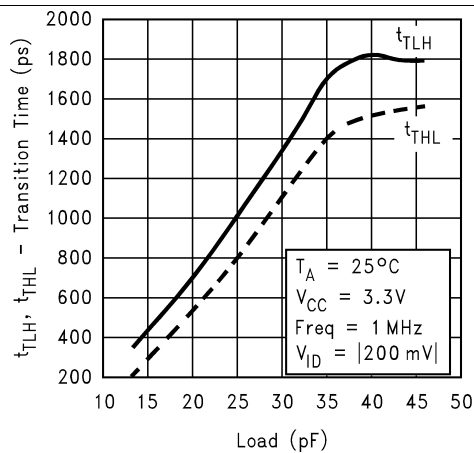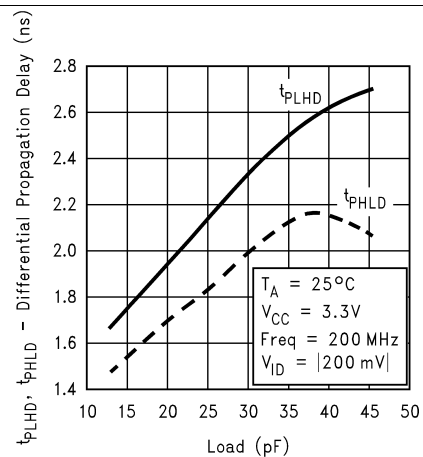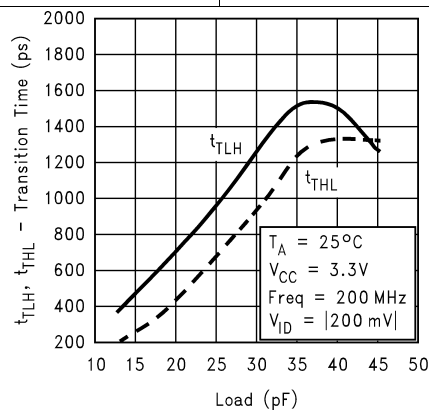**Typical Characteristics (continued)**

**Figure 13. Transition Time vs Ambient Temperature**

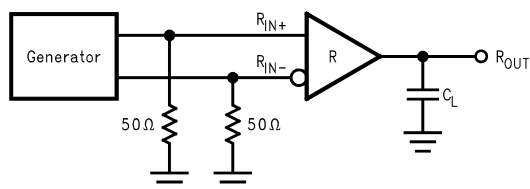**Figure 14. Differential Propagation Delay vs Load**

**Figure 15. Transition Time vs Load**

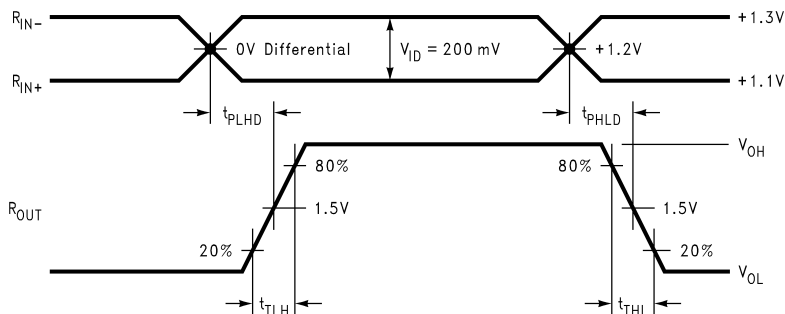**Figure 16. Differential Propagation Delay vs Load**

**Figure 17. Transition Time vs Load**

## 7 Parameter Measurement Information



**Figure 18. Receiver Propagation Delay and Transition Time Test Circuit**




**Figure 19. Receiver Propagation Delay and Transition Time Waveforms**

## 8 Detailed Description

### 8.1 Overview

LVDS drivers and receivers are intended to be primarily used in an uncomplicated point-to-point configuration as is shown in [Figure 20](#). This configuration provides a clean signaling environment for the fast edge rates of the drivers. The receiver is connected to the driver through a balanced media which may be a standard twisted pair cable, a parallel pair cable, or simply PCB traces. Typically, the characteristic impedance of the media is in the range of 100  $\Omega$ . A termination resistor of 100  $\Omega$  (selected to match the media), and is placed as close to the receiver input pins as possible. The termination resistor converts the driver output (current mode) into a voltage that is detected by the receiver. Other configurations are possible such as a multi-receiver configuration, but the effects of a mid-stream connector(s), cable stub(s), and other impedance discontinuities as well as ground shifting, noise margin limits, and total termination loading must be considered.

### 8.2 Functional Block Diagram

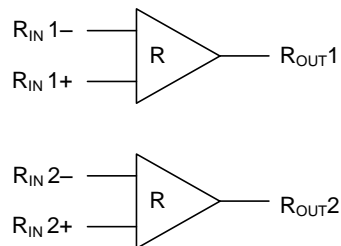

Copyright © 2016, Texas Instruments Incorporated

### 8.3 Feature Description

The DS90LV028A differential line receiver is capable of detecting signals as low as 100 mV, over a  $\pm 1$ -V common mode range centered around 1.2 V. This is related to the driver offset voltage which is typically 1.2 V. The driven signal is centered around this voltage and may shift  $\pm 1$  V around this center point. The  $\pm 1$ -V shifting may be the result of a ground potential difference between the driver's ground reference and the receiver's ground reference, the common mode effects of coupled noise, or a combination of the two. The AC parameters of both receiver input pins are optimized for a recommended operating input voltage range of 0 V to 2.4 V (measured from each pin to ground). The device operates for receiver input voltages up to  $V_{CC}$ , but exceeding  $V_{CC}$  turns on the ESD protection circuitry which clamps the bus voltages.

## Feature Description (continued)

### 8.3.1 Fail-Safe Feature

The LVDS receiver is a high gain, high speed device that amplifies a small differential signal (20 mV) to CMOS logic levels. Due to the high gain and tight threshold of the receiver, take care to prevent noise from appearing as a valid signal.

The internal fail-safe circuitry of the receiver is designed to source or sink a small amount of current, providing fail-safe protection (a stable known state of HIGH output voltage) for floating, terminated or shorted receiver inputs.

1. **Open Input Pins:** The DS90LV028A is a dual receiver device, and if an application requires only 1 receiver, the unused channel inputs must be left OPEN. Do not tie unused receiver inputs to ground or any other voltages. The input is biased by internal high value pull up and pull down resistors to set the output to a HIGH state. This internal circuitry ensures a HIGH, stable output state for open inputs.
2. **Terminated Input:** If the driver is disconnected (cable unplugged), or if the driver is in a power-off condition, the receiver output is again in a HIGH state, even with the end of cable 100Ω termination resistor across the input pins. The unplugged cable can become a floating antenna which can pick up noise. If the cable picks up more than 10 mV of differential noise, the receiver may see the noise as a valid signal and switch. To insure that any noise is seen as common mode and not differential, a balanced interconnect must be used. Twisted pair cable offers better balance than flat ribbon cable.
3. **Shorted Inputs:** If a fault condition occurs that shorts the receiver inputs together, thus resulting in a 0 V differential input voltage, the receiver output remains in a HIGH state. Shorted input fail-safe is not supported across the common mode range of the device (GND to 2.4 V). It is only supported with inputs shorted and no external common mode voltage applied.

External lower value pull up and pull down resistors (for a stronger bias) may be used to boost fail-safe in the presence of higher noise levels. The pull up and pull down resistors must be in the 5-kΩ to 15-kΩ range to minimize loading and waveform distortion to the driver. The common mode bias point must be set to approximately 1.2 V (less than 1.75 V) to be compatible with the internal circuitry. Refer to [AN-1194 Failsafe Biasing of LVDS Interfaces](#) (SNLA051) for more information.

### 8.3.2 Cables and Connectors

When choosing cable and connectors for LVDS it is important to remember:

Use controlled impedance media. The cables and connectors you use must have a matched differential impedance of about 100 Ω. They must not introduce major impedance discontinuities.

Balanced cables (for example, twisted pair) are usually better than unbalanced cables (ribbon cable, simple coax) for noise reduction and signal quality. Balanced cables tend to generate less EMI due to field canceling effects and also tend to pick up electromagnetic radiation a common mode (not differential mode) noise which is rejected by the receiver.

For cable distances < 0.5 M, most cables can be made to work effectively. For distances 0.5 M ≤ d ≤ 10 M, CAT 3 (category 3) twisted pair cable works well, is readily available, and relatively inexpensive.

## 8.4 Device Functional Modes

[Table 1](#) lists the functional modes of the DS90LV028A.

**Table 1. Truth Table**

INPUTS	OUTPUT
$[R_{IN+}] - [R_{IN-}]$	$R_{OUT}$
$V_{ID} \geq 0.1 \text{ V}$	H
$V_{ID} \leq -0.1 \text{ V}$	L
Full fail-safe OPEN/SHORT or Terminated	H

## 9 Application and Implementation


### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The DS90LV028A has a flow-through pinout that allows for easy PCB layout. The LVDS signals on one side of the device easily allows for matching electrical lengths of the differential pair trace lines between the driver and the receiver as well as allowing the trace lines to be close together to couple noise as common mode. Noise isolation is achieved with the LVDS signals on one side of the device and the TTL signals on the other side.

### 9.2 Typical Application

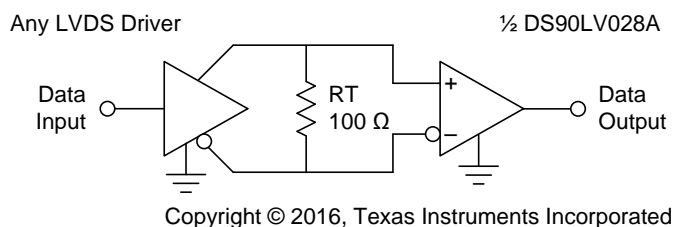

**Figure 20. Point-to-Point Application**

#### 9.2.1 Design Requirements

When using LVDS devices, it is important to remember to specify controlled impedance PCB traces, cable assemblies, and connectors. All components of the transmission media must have a matched differential impedance of about 100 Ω. They must not introduce major impedance discontinuities.

Balanced cables (for example, twisted pair) are usually better than unbalanced cables (ribbon cable) for noise reduction and signal quality. Balanced cables tend to generate less EMI due to field canceling effects and also tend to pick up electromagnetic radiation as common mode (not differential mode) noise which is rejected by the LVDS receiver.

For cable distances  $< 0.5$  M, most cables can be made to work effectively. For distances  $0.5 \text{ M} \leq d \leq 10 \text{ M}$ , CAT5 (Category 5) twisted pair cable works well, is readily available, and relatively inexpensive.

#### 9.2.2 Detailed Design Procedure

##### 9.2.2.1 Probing LVDS Transmission Lines

Always use high impedance ( $>100 \text{ k}\Omega$ ), low capacitance ( $<2 \text{ pF}$ ) scope probes with a wide bandwidth (1 GHz) scope. Improper probing gives deceiving results.

##### 9.2.2.2 Threshold


The LVDS Standard (ANSI/TIA/EIA-644) specifies a maximum threshold of  $\pm 100 \text{ mV}$  for the LVDS receiver. The DS90LV028A supports an enhanced threshold region of  $-100 \text{ mV}$  to  $0 \text{ V}$ . This is useful for fail-safe biasing. The threshold region is shown in the Voltage Transfer Curve (VTC) in [Figure 21](#). The typical DS90LV028A LVDS receiver switches at about  $-35 \text{ mV}$ .

### NOTE

With  $V_{ID} = 0 \text{ V}$ , the output is in a HIGH state. With an external fail-safe bias of  $25 \text{ mV}$  applied, the typical differential noise margin is now the difference from the switch point to the bias point.


## Typical Application (continued)

In the following example, this would be 60 mV of Differential Noise Margin ( $25\text{ mV} - (-35\text{ mV})$ ). With the enhanced threshold region of  $-100\text{ mV}$  to  $0\text{ V}$ , this small external fail-safe biasing of  $25\text{ mV}$  (with respect to  $0\text{ V}$ ) gives a DNM of a comfortable  $60\text{ mV}$ . With the standard threshold region of  $\pm 100\text{ mV}$ , the external fail-safe biasing would require  $25\text{ mV}$  with respect to  $100\text{ mV}$  or  $125\text{ mV}$ , giving a DNM of  $160\text{ mV}$  which is stronger fail-safe biasing than is necessary for the DS90LV028A. If more differential noise margin (DNM) is required, then a stronger fail-safe bias point can be set by changing resistor values.

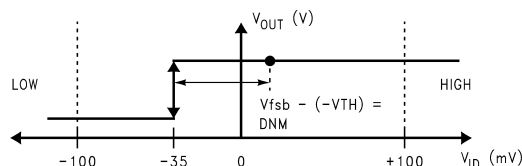

**Figure 21. VTC of the DS90LV028A**

## 9.2.3 Application Curve

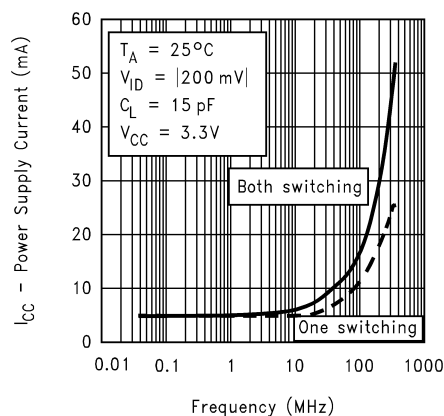

**Figure 22. Power Supply Current vs Frequency**

## 10 Power Supply Recommendations

Bypass capacitors must be used on power pins. TI recommends using high-frequency, ceramic, 0.1- $\mu$ F and 0.01- $\mu$ F capacitors in parallel at the power supply pin with the smallest value capacitor closest to the device supply pin. Additional scattered capacitors over the printed-circuit board improves decoupling. Multiple vias must be used to connect the decoupling capacitors to the power planes. A 10- $\mu$ F, 35-V (or greater) solid tantalum capacitor must be connected at the power entry point on the printed-circuit board between the supply and ground.

## 11 Layout

### 11.1 Layout Guidelines

Use at least 4 PCB board layers (top to bottom): LVDS signals, ground, power, and TTL signals.

Isolate TTL signals from LVDS signals, otherwise the TTL signals may couple onto the LVDS lines. Best practice places TTL and LVDS on different layers which are isolated by a power or ground plane(s).

Keep drivers and receivers as close to the (LVDS port side) connectors as possible.

For PC board considerations for the WSON package, please refer to [AN-1187, Leadless Leadframe Package \(SNOA401\)](#). It is important to note that to optimize signal integrity (minimize jitter and noise coupling), the WSON thermal land pad, which is a metal (normally copper) rectangular region placed under the package as seen in [Figure 23](#), must be attached to ground and match the dimensions of the exposed pad on the PCB (1:1 ratio).

#### 11.1.1 Differential Traces

Use controlled impedance traces which match the differential impedance of your transmission medium (that is, cable) and termination resistor. Run the differential pair trace lines as close together as possible as soon as they leave the IC (stubs must be <10 mm long). This helps eliminate reflections and ensure noise is coupled as common mode. In fact, we have seen that differential signals which are 1mm apart radiate far less noise than traces 3 mm apart because magnetic field cancellation is much better with the closer traces. In addition, noise induced on the differential lines is much more likely to appear as common mode which is rejected by the receiver.

Match electrical lengths between traces to reduce skew. Skew between the signals of a pair means a phase difference between signals which destroys the magnetic field cancellation benefits of differential signals and the EMI result. The velocity of propagation,  $v = c/E$ , where  $c$  (the speed of light) = 0.2997 mm/ps or 0.0118 in/ps. Do not rely solely on the autoroute function for differential traces. Carefully review dimensions to match differential impedance and provide isolation for the differential lines. Minimize the number of vias and other discontinuities on the line.

Avoid 90° turns (these cause impedance discontinuities). Use arcs or 45° bevels.


Within a pair of traces, the distance between the two traces must be minimized to maintain common mode rejection of the receivers. On the printed-circuit board, this distance must remain constant to avoid discontinuities in differential impedance. Minor violations at connection points are allowable.

#### 11.1.2 Termination


Use a termination resistor which best matches the differential impedance or your transmission line. The resistor must be between 90  $\Omega$  and 130  $\Omega$ . Remember that the current mode outputs require the termination resistor to generate the differential voltage. LVDS does not work correctly without resistor termination. Typically, connecting a single resistor across the pair at the receiver end will suffice.

Surface mount 1% to 2% resistors are the best. PCB stubs, component lead, and the distance from the termination to the receiver inputs must be minimized. The distance between the termination resistor and the receiver must be <10 mm (12 mm maximum).

## 11.2 Layout Examples



**Figure 23. WSON Thermal Land Pad and Pin Pads**

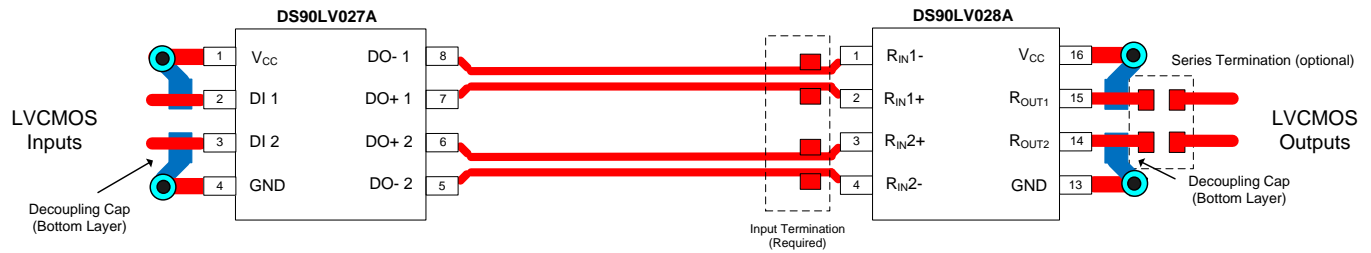

**Figure 24. Simplified DS90LV027A and DS90LV028A Layout**

## 12 デバイスおよびドキュメントのサポート

### 12.1 ドキュメントのサポート

#### 12.1.1 関連資料

関連資料については、以下を参照してください。

- 『LVDSオーナー・マニュアル』(SNLA187)
- 『AN-808、長い伝送ラインとデータ信号の品質』(SNLA028)
- 『AN-977、LVDS信号の品質: アイ・パターンのテスト・レポートを使用するジッタ測定』(SNLA166)
- 『AN-971、LVDSテクノロジーの概要』(SNLA165)
- 『AN-916、ケーブル選択の実践的ガイド』(SNLA219)
- 『AN-805、差動ライン・ドライバの消費電力の計算』(SNOA233)
- 『AN-903、差動終端技法の比較』(SNLA034)
- 『AN-1194、LVDSインターフェイスのフェイルセーフ・バイアス法』(SNLA051)
- 『AN-1187、リードレス・リードフレーム・パッケージ』(SNOA401)

### 12.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](http://ti.com)のデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 12.3 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community.* Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.4 商標

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 12.5 静電気放電に関する注意事項



これらのデバイスは、限定的なESD (静電破壊) 保護機能を内蔵しています。保存時または取り扱い時は、MOSゲートに対する静電破壊を防止するために、リード線同士をショートさせておくか、デバイスを導電フォームに入れる必要があります。

### 12.6 Glossary

[SLYZ022](#) — *TI Glossary.*

This glossary lists and explains terms, acronyms, and definitions.

## 13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。これらの情報は、指定のデバイスに対して提供されている最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">DS90LV028ATLD/NOPB</a>	Active	Production	WSON (NGN)   8	1000   SMALL T&R	Yes	SN	Level-3-260C-168 HR	-40 to 85	LV028AT
DS90LV028ATLD/NOPB.B	Active	Production	WSON (NGN)   8	1000   SMALL T&R	Yes	SN	Level-3-260C-168 HR	-40 to 85	LV028AT
<a href="#">DS90LV028ATM/NOPB</a>	Active	Production	SOIC (D)   8	95   TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 85	90LV0 28ATM
DS90LV028ATM/NOPB.B	Active	Production	SOIC (D)   8	95   TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 85	90LV0 28ATM
<a href="#">DS90LV028ATMX/NOPB</a>	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	90LV0 28ATM
DS90LV028ATMX/NOPB.B	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	90LV0 28ATM

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF DS90LV028A :**

- Automotive : [DS90LV028A-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DS90LV028ATLD/NOPB	WSO	NGN	8	1000	177.8	12.4	4.3	4.3	1.3	8.0	12.0	Q1
DS90LV028ATMX/NOPB	SOIC	D	8	2500	330.0	12.4	6.5	5.4	2.0	8.0	12.0	Q1


## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DS90LV028ATLD/NOPB	WSO	NGN	8	1000	208.0	191.0	35.0
DS90LV028ATMX/NOPB	SOIC	D	8	2500	367.0	367.0	35.0


## TUBE

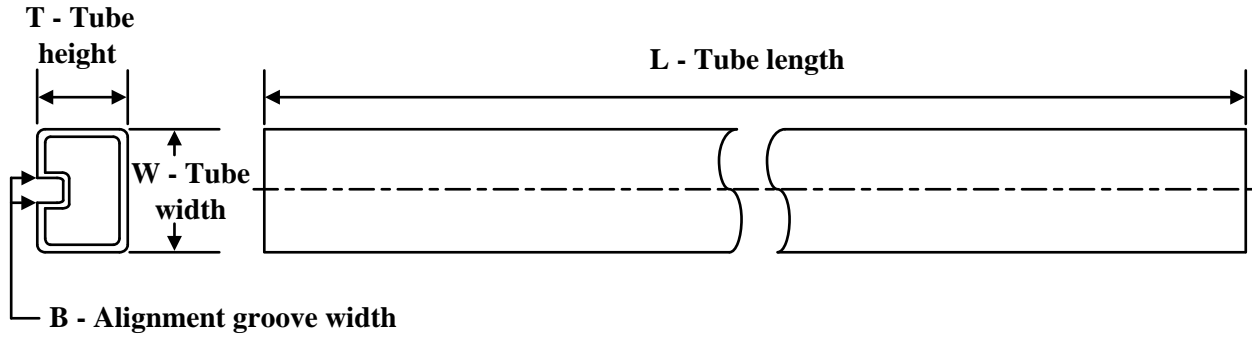

\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
DS90LV028ATM/NOPB	D	SOIC	8	95	495	8	4064	3.05
DS90LV028ATM/NOPB.B	D	SOIC	8	95	495	8	4064	3.05


NGN0008A



# PACKAGE OUTLINE

## WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

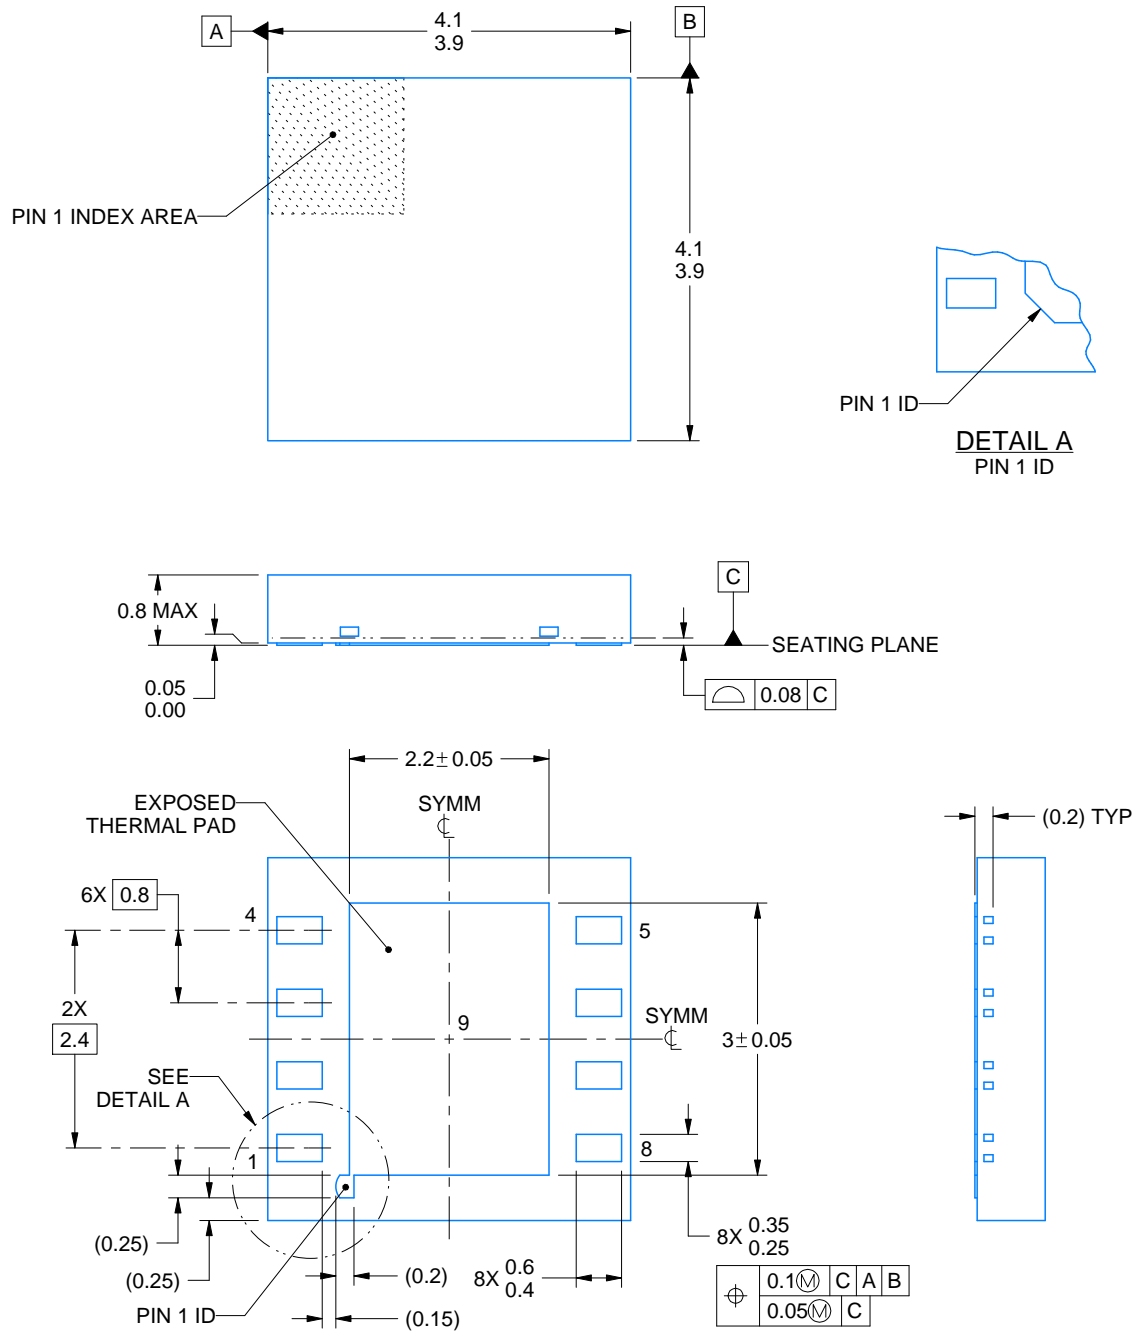

4214794/A 11/2019


### NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


**NGN0008A**

**WSON - 0.8 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

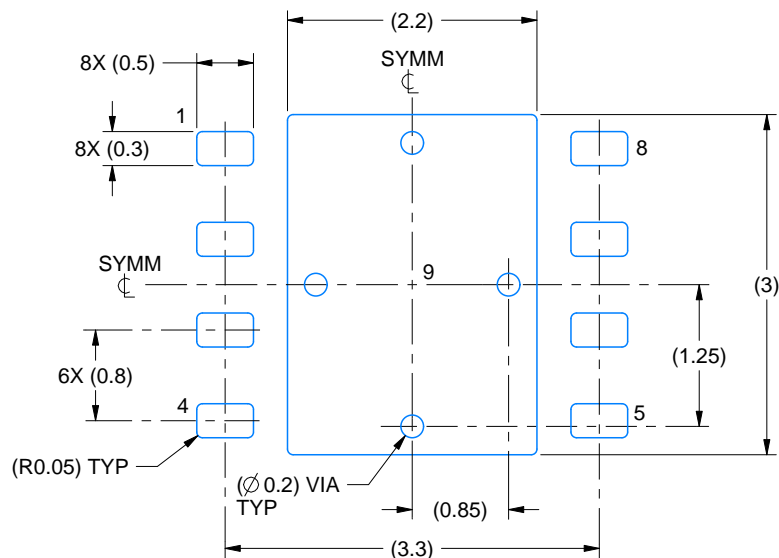

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

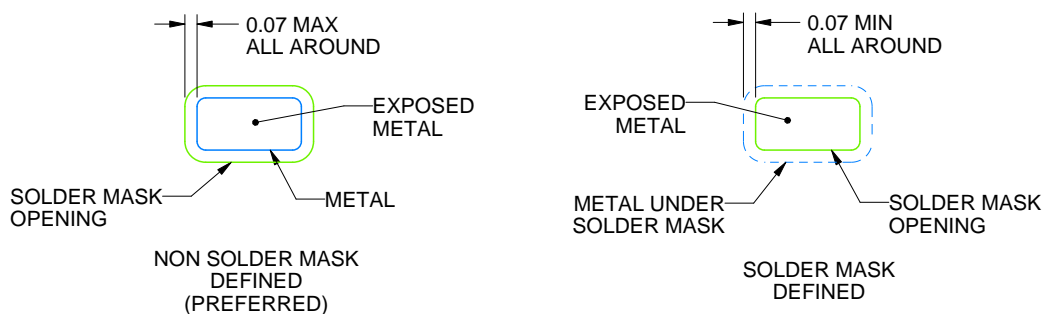

## SOLDER MASK DETAILS

4214794/A 11/2019


NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

**NGN0008A**

**WSON - 0.8 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

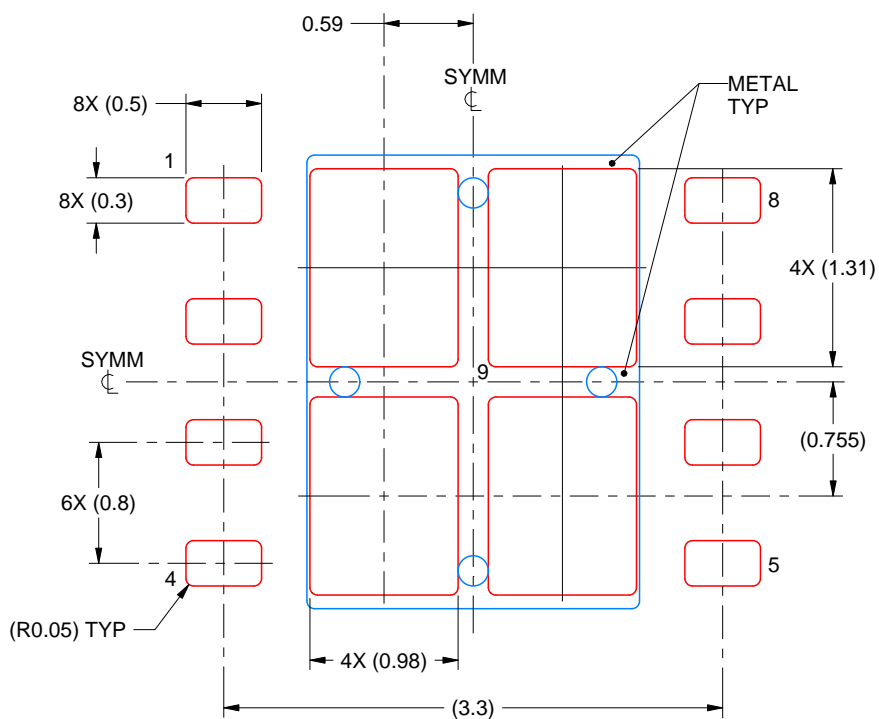


## SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:  
78% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:20X

4214794/A 11/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

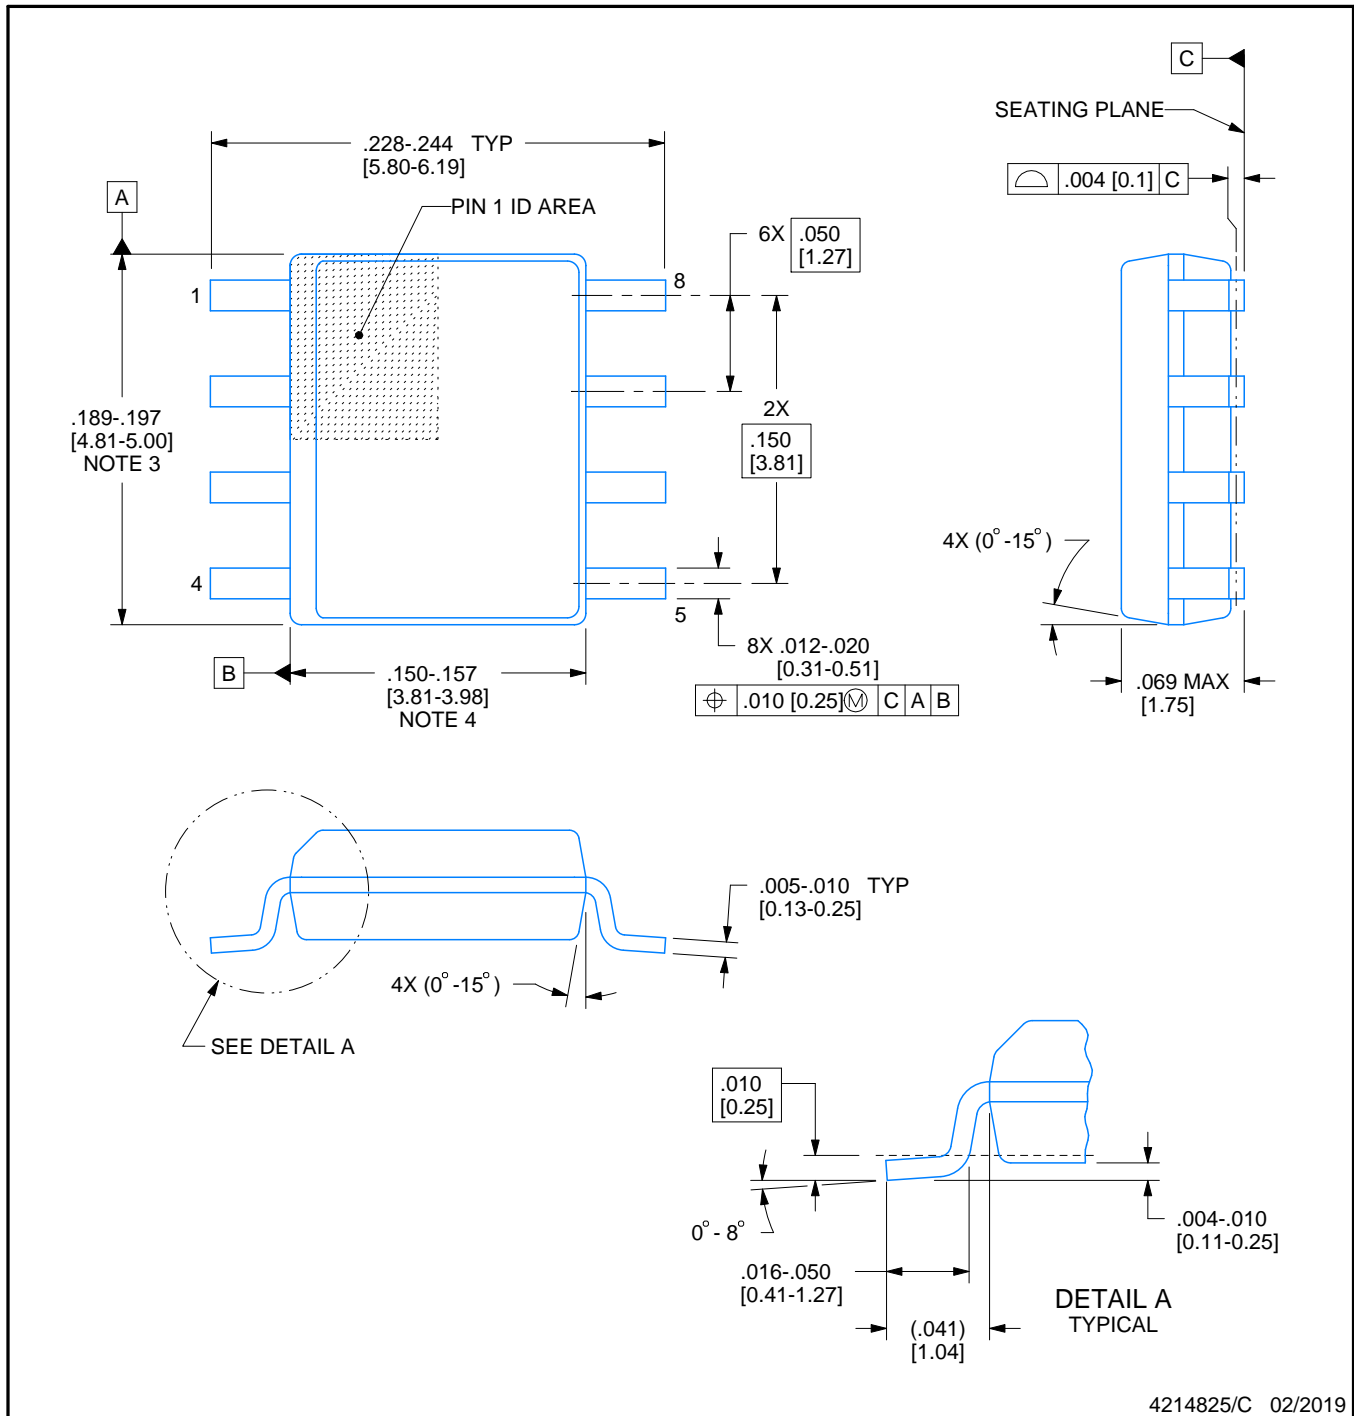

4214825/C 02/2019

## NOTES:


1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT


D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

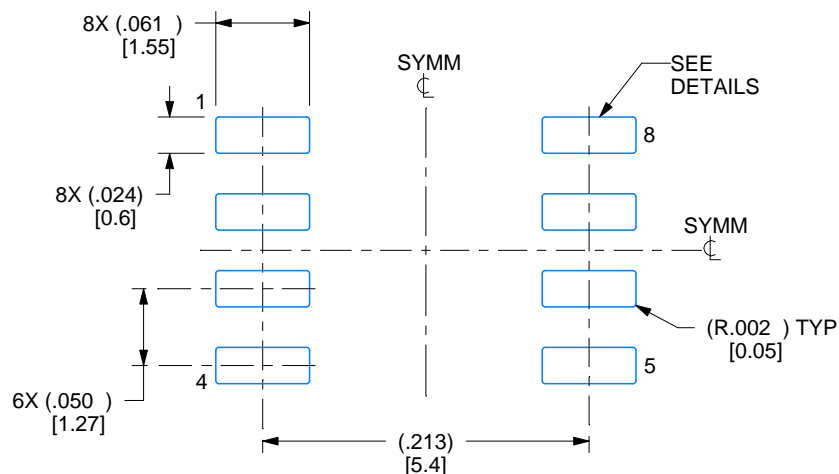

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X

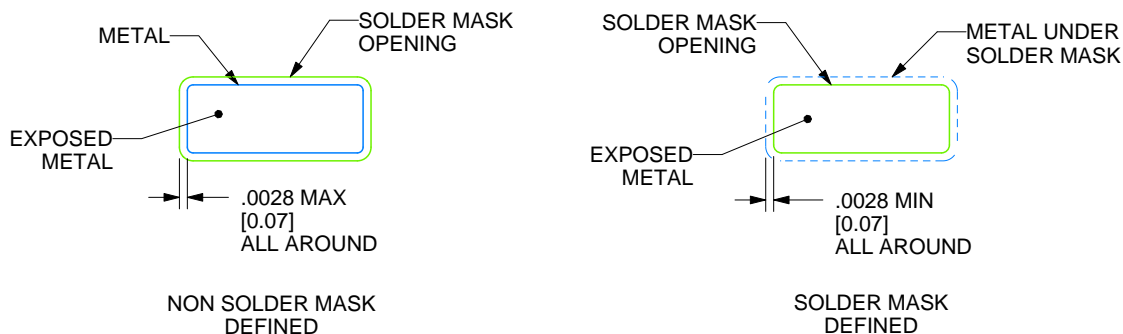

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

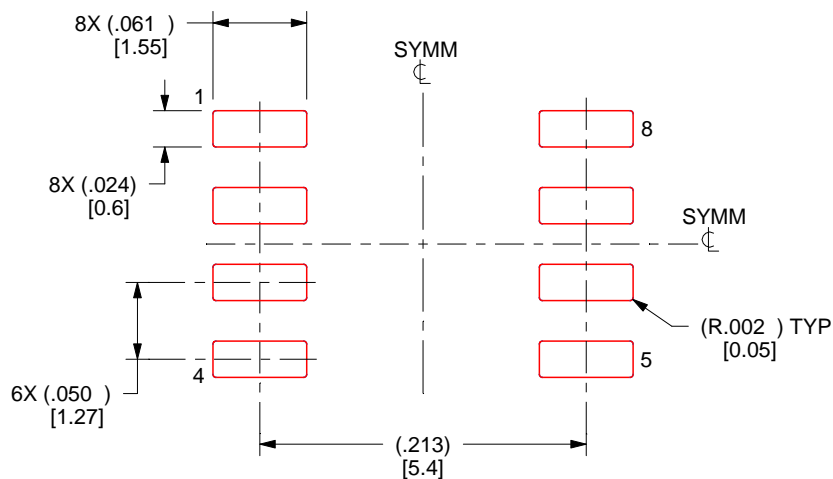

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](https://www.ti.com) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月