

适用于 V_{BUS} 引脚的 TPD1S514x 系列 USB 充电器过压、浪涌和 ESD 保护

1 特性

- 在 V_{BUS_CON} 高达 30V 直流时提供过压保护
- 精密 OVP (容差小于 $\pm 1\%$)
- 低 R_{ON} nFET 开关支持主机和充电模式
- 专用 V_{BUS_POWER} 引脚可在电池耗尽情况下提供灵活的加电选项
- 针对 V_{BUS} 线路的瞬态保护:
 - IEC 61000-4-2 接触放电 $\pm 15kV$
 - IEC 61000-4-2 空气间隙放电 $\pm 15kV$
 - IEC 61000-4-5 开路电压 100V
 - 精密钳位电路将 V_{BUS_SYS} 电压限制为小于 V_{OVP}
- 适应 USB 涌入电流
- 热关断 (TSD) 特性

2 应用

- 手机
- 平板电脑
- 电子书
- 便携式媒体播放器
- 5V、9V 和 12V 电源轨

3 说明

TPD1S514 系列包含适用于 5V、9V 或 12V USB V_{BUS} 线路或其他电源总线的单芯片保护解决方案。此双向 nFET 开关在保护内部系统电路不受任何 V_{BUS_CON} 引脚上过压情况影响的同时, 可确保充电和主机模式下的安全电流流量。在 V_{BUS_CON} 引脚上, 这款器件能够处理高达 30V 直流电压的过压保护。在 $\overline{EN}$ 引脚切换至低位后, TPD1S514 系列中的任何器件均会在通过软启动延迟打开 nFET 之前等待 20ms。


TPD1S514 系列的典型应用接口是 USB 连接器中的 V_{BUS} 线路, 该连接器通常用于手机、平板电脑、电子书和便携式媒体播放器中。TPD1S514 系列还可应用于任何使用 5V、9V、或 12V 电源轨接口的系统中。

器件信息⁽¹⁾


器件名称	封装	封装尺寸 (标称值)
TPD1S514x	WCSP (12)	1.29mm × 1.99mm

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

TPD1S514 系列电路保护方案

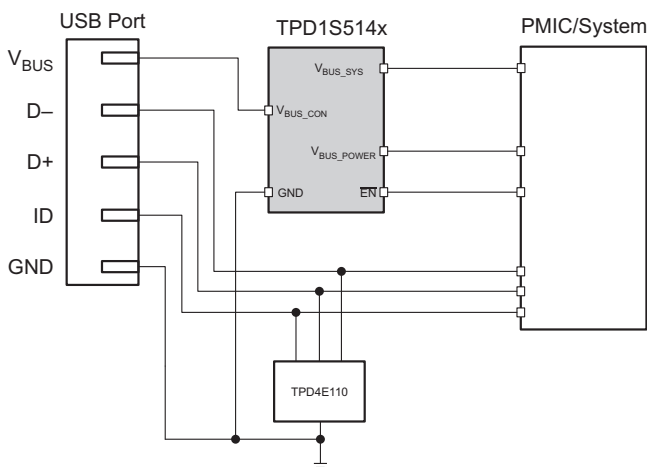

TPD1S514 系列方框图

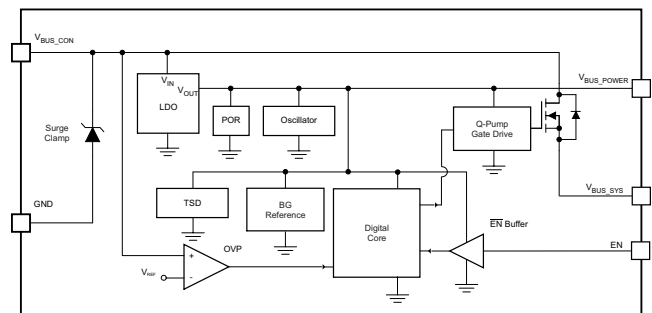

目录

1	特性	1	8	Detailed Description	11
2	应用	1	8.1	Overview	11
3	说明	1	8.2	Functional Block Diagram	11
4	修订历史记录	2	8.3	Feature Description	11
5	Device Comparison Table	3	8.4	Device Functional Modes	13
6	Pin Configuration and Functions	3	9	Application and Implementation	14
7	Specifications	4	9.1	Application Information	14
7.1	Absolute Maximum Ratings	4	9.2	Typical Applications	14
7.2	ESD Ratings	4	10	Power Supply Recommendations	18
7.3	Recommended Operating Conditions	5	11	Layout	19
7.4	Thermal Information	5	11.1	Layout Guidelines	19
7.5	Supply Current Consumption	5	11.2	Layout Example	19
7.6	Electrical Characteristics $\overline{\text{EN}}$ Pin	6	12	器件和文档支持	20
7.7	Thermal Shutdown Feature	6	12.1	社区资源	20
7.8	Electrical Characteristics nFET Switch	6	12.2	商标	20
7.9	Electrical Characteristics OVP Circuit	7	12.3	静电放电警告	20
7.10	Electrical Characteristics $V_{\text{BUS_POWER}}$ Circuit	7	12.4	Glossary	20
7.11	Timing Requirements	8	13	机械、封装和可订购信息	20
7.12	TPD1S514-1 Typical Characteristics	9			

4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

Changes from Revision E (October 2015) to Revision F	Page
• Changed I_{POWER} from 1 mA to 10 mA in the <i>Absolute Maximum Ratings</i> table	4

Changes from Revision D (July 2015) to Revision E	Page
• 删除了 TPD1S514-3 的“预览”状态。	1
• Changed Max value of $I_{\text{VBUS_SLEEP}}$ PARAMETER for TPD1S514-3 (Preview) from 308 μA to 335 μA .	5
• Updated TEST CONDITIONS for $T_{\text{OFF_DELAY}}$ PARAMETER.	8

Changes from Revision C (July 2015) to Revision D	Page
• 已添加 TPD1S514 和 TPD1S514-3（预览）	1

Changes from Revision B (September 2014) to Revision C	Page
• 删除了已预览的 TPD1S514-3 和可编程 特性。	1

Changes from Revision A (July 2014) to Revision B	Page
• 已更改 更改了封装尺寸以修正舍入误差。	1


Changes from Original (April 2014) to Revision A	Page
• 删除了 TPD1S514-2 的“预览”状态。	1
• Updated Device Comparison table.	3
• Updated Electrical Characteristics OVP Circuit table.	7

5 Device Comparison Table

TPD1S514 Family	V _{OV} P (V)			V _{OV} P_HYS (mV)	V _{BUS_POWER} (V) ⁽¹⁾		T_Startup delay (ms) options	T_Soft Start (ms) options
	MIN	TYP	MAX	TYP	MIN	TYP	TYP	TYP
TPD1S514-1	5.9	5.95	5.99	100	4.7	4.95	20	3.5
TPD1S514-2	9.9	9.98	10.05	100	4.7	4.95		
TPD1S514-3	13.5	13.75	14	100	4.7	4.95		
TPD1S514	5.9	5.95	5.99	20	6.2	6.48		

(1) With V_{BUS_CON} > 6.5V. See Sections [V_{BUS_POWER}](#), [TPD1S514-1](#), [TPD1S514-2](#), [TPD1S514-3](#) and [V_{BUS_POWER}](#), [TPD1S514](#) for full description.

6 Pin Configuration and Functions

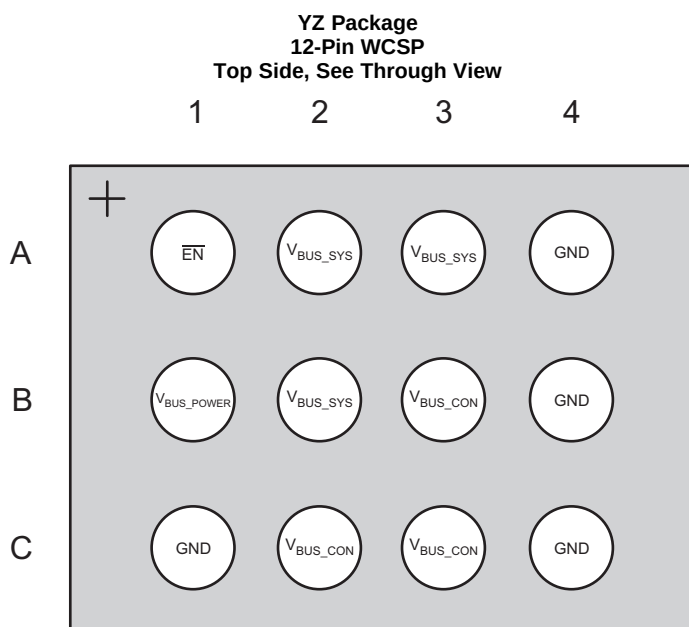

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
$\overline{\text{EN}}$	A1	I	Enable Active-Low Input. Drive $\overline{\text{EN}}$ low to enable the switch. Drive $\overline{\text{EN}}$ high to disable the switch.
V _{BUS_POWER}	B1	O	5-V Power source controlled by V _{BUS_CON} .
V _{BUS_SYS}	A2, A3, B2	I/O	Connect to internal VBUS plane.
V _{BUS_CON}	B3, C2, C3	I/O	Connect to USB connector VBUS pin; IEC 61000-4-2 ESD protection and IEC 61000-4-5 Surge protection.
GND	A4, B4, C1, C4	G	Connect to PCB ground plane.

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾⁽²⁾

			MIN	MAX	UNIT
V _{BUS_CON}	Supply voltage from USB connector		−0.3	30	V
V _{BUS_SYS}	Internal Supply DC voltage Rail on the PCB		−0.3	20	V
I _{BUS}	Continuous input current on V _{BUS_CON} pin ⁽³⁾			3.5	A
I _{OUT}	Continuous output current on V _{BUS_CON} pin ⁽³⁾			3.5	A
I _{PEAK}	Peak Input and Output Current on V _{BUS_CON} , V _{BUS_SYS} pin (10 ms)			8	A
I _{DIODE}	Continuous forward current through the FET body diode			1	A
I _{POWER}	Continuous current through V _{BUS_POWER}			10	mA
V _{EN}	Voltage on Input pin ($\overline{\text{EN}}$)			7	V
V _{BUS_POWER}	Continuous Voltage at V _{BUS_POWER}	TPD1S514-1		See ⁽⁴⁾	V
		TPD1S514-2		See ⁽⁴⁾	
		TPD1S514-3		See ⁽⁴⁾	
		TPD1S514		See ⁽⁴⁾	
	IEC 61000-4-5 open circuit voltage (t _p = 1.2/50 μs)	V _{BUS_CON} pin		100	V
	IEC 61000-4-5 peak pulse current (t _p = 8/20μs)	V _{BUS_CON} pin		30	A
	IEC 61000-4-5 peak pulse power (t _p = 8/20μs)	V _{BUS_CON} pin		900	W
C _{LOAD}	Output load capacitance	V _{BUS_SYS} pin	0.1	100	μF
C _{CON}	Input capacitance	V _{BUS_CON} pin	0.1	50	μF
C _{POW}	V _{BUS_POWER} capacitance	V _{BUS_POWER} pin	0.1	4.7	μF
T _A	Operating free air temperature		−40	85	°C
T _{stg}	Storage temperature		−65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.
- (3) Thermal limits and power dissipation limits must be observed.
- (4) 6.9 V or V_{BUS_CON} + 0.3 V, whichever is smaller.

7.2 ESD Ratings

		VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±500
		IEC 61000-4-2 Contact Discharge	V _{BUS_CON} pin ±15000
		IEC 61000-4-2 Air-gap Discharge	V _{BUS_CON} pin ±15000

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V _{BUS_CON}	Supply voltage from USB connector	TPD1S514-1	3.5	5	5.9	V
		TPD1S514-2	3.5	9	9.9	
		TPD1S514-3	3.5	12	13.5	
		TPD1S514	3.5	5	5.9	
V _{BUS_SYS}	Internal Supply DC voltage Rail on the PCB	TPD1S514-1	3.9	5	5.9	V
		TPD1S514-2	3.9	9	9.9	
		TPD1S514-3	3.9	12	13.5	
		TPD1S514	3.9	5	5.9	
C _{LOAD}	Output load capacitance	V _{BUS_SYS} pin		2.2		μF
C _{CON}	Input capacitance	V _{BUS_CON} pin		1		μF
C _{POWER}	Capacitance on V _{BUS_POWER}	V _{BUS_POWER} pin		1		μF
T _A	Operating free-air temperature		–40		85	°C

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPD1S514 Family	UNIT
		YZ (WCSP)	
		12 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	89	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	0.6	°C/W
R _{θJB}	Junction-to-board thermal resistance	16.3	°C/W
ψ _{JT}	Junction-to-top characterization parameter	2.7	°C/W
ψ _{JB}	Junction-to-board characterization parameter	16.2	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

7.5 Supply Current Consumption

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		DEVICE NAME	TYP	MAX	UNIT
I _{VBUS_SLEEP}	V _{BUS_CON} Operating Current Consumption	Measured at V _{BUS_CON} pin, EN = 5 V	V _{BUS_CON} = 5 V	TPD1S514-1	150	245	μA
			V _{BUS_CON} = 9 V	TPD1S514-2	176	281	
			V _{BUS_CON} = 12 V	TPD1S514-3	195	335	
			V _{BUS_CON} = 5 V	TPD1S514	150	245	
I _{VBUS}		Measured at V _{BUS_CON} pin, EN = 0 V and no load	V _{BUS_CON} = 5 V	TPD1S514-1	228	354	μA
			V _{BUS_CON} = 9 V	TPD1S514-2	250	413	
			V _{BUS_CON} = 12 V	TPD1S514-3	270	456	
			V _{BUS_CON} = 5 V	TPD1S514	228	354	
I _{VBUS_SYS}	V _{BUS_SYS} operating current consumption	Measured at V _{BUS_SYS} pin, V _{BUS_CON} = Hi-Z, EN = 0 V	V _{BUS_SYS} = 5 V	TPD1S514-1	210	354	μA
			V _{BUS_SYS} = 9 V	TPD1S514-2	250	424	
			V _{BUS_SYS} = 12 V	TPD1S514-3	333	461	
			V _{BUS_SYS} = 5 V	TPD1S514	210	354	
I _{HOST_LEAK}	Host mode leakage current	Measured at V _{BUS_SYS} pin, V _{BUS_CON} = Hi-Z, EN = 5 V	V _{BUS_SYS} = 5 V	TPD1S514-1	90	218	μA
			V _{BUS_SYS} = 9 V	TPD1S514-2	290	491	
			V _{BUS_SYS} = 12 V	TPD1S514-3	506	696	
			V _{BUS_SYS} = 5 V	TPD1S514	90	218	

7.6 Electrical Characteristics $\overline{\text{EN}}$ Pin

over operating free-air temperature range (unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{IH}	High-level input voltage	$\overline{\text{EN}}$	$V_{BUS_CON} = 5\text{ V}$	1.2		6	V
V_{IL}	Low-level input voltage	$\overline{\text{EN}}$	$V_{BUS_CON} = 5\text{ V}$	0		0.8	V
I_{IL}	Input leakage current	$\overline{\text{EN}}$	$V_{\overline{\text{EN}}} = 0\text{ V}$, $V_{BUS_CON} = 5\text{ V}$			1	μA
I_{IH}	Input leakage current	$\overline{\text{EN}}$	$V_{\overline{\text{EN}}} = 5\text{ V}$, $V_{BUS_CON} = 5\text{ V}$			10	μA

7.7 Thermal Shutdown Feature

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
T_{SHDN}	Thermal shutdown	$V_{BUS_CON} = 5\text{ V}$, $\overline{\text{EN}} = 0\text{ V}$, Junction temperature decreases from thermal shutdown level until the nFET switch turns off.		145		$^{\circ}\text{C}$
Thermal shutdown hysteresis		$V_{BUS_CON} = 5\text{ V}$, $\overline{\text{EN}} = 0\text{ V}$, Junction temperature decreases from thermal shutdown level until the nFET switch turns on.		25		$^{\circ}\text{C}$

7.8 Electrical Characteristics nFET Switch

 $T = 25^{\circ}\text{C}$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
R_{ON}	Switch ON resistance	$V_{BUS_CON} = 5\text{ V}$, $I_{OUT} = 1\text{ A}$	TPD1S514-1		39	50	$\text{m}\Omega$
		$V_{BUS_CON} = 9\text{ V}$, $I_{OUT} = 1\text{ A}$	TPD1S514-2		39	50	
		$V_{BUS_CON} = 12\text{ V}$, $I_{OUT} = 1\text{ A}$	TPD1S514-3		39	50	
		$V_{BUS_CON} = 5\text{ V}$, $I_{OUT} = 1\text{ A}$	TPD1S514		39	50	

7.9 Electrical Characteristics OVP Circuit

T = 25°C

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
V _{OVP}	Input voltage protection threshold	V _{BUS_CON}	V _{BUS_CON} increasing from 0 V to 20 V	TPD1S514-1	5.90	5.95	5.99	V
				TPD1S514-2	9.9	9.98	10.05	
				TPD1S514-3	13.5	13.75	14	
				TPD1S514	5.90	5.95	5.99	
V _{HYS_OVP}	Hysteresis on OVP	V _{BUS_CON}	V _{BUS_CON} decreasing from 20 V to 0 V	TPD1S514-1	100			mV
				TPD1S514-2	100			
				TPD1S514-3	100			
				TPD1S514	20			
V _{UVLO}	Input under voltage lockout	V _{BUS_CON}	V _{BUS_CON} voltage rising from 0 V to 5 V		2.7	3.1	3.5	V
V _{HYS_UVLO}	Hysteresis on UVLO	V _{BUS_CON}	Difference between rising and falling UVLO thresholds		80			mV
V _{UVLO_FALLING}	Input undervoltage lockout	V _{BUS_CON}	V _{BUS_CON} voltage falling from 5 V to 0 V		2.6	3.0	3.4	V
V _{UVLO_SYS}	V _{BUS_SYS} undervoltage lockout	V _{BUS_SYS}	V _{BUS_SYS} voltage rising from 0 V to 5 V		2.8	3.7	4.3	V
V _{HYS_UVLO_SYS}	V _{BUS_SYS} UVLO Hysteresis	V _{BUS_SYS}	Difference between rising and falling UVLO thresholds on V _{BUS_SYS}		500			mV
V _{UVLO_SYS_FALLING}	V _{BUS_SYS} undervoltage lockout	V _{BUS_SYS}	V _{BUS_SYS} voltage falling from 5 V to 0 V		2.6	3.0	3.4	V

7.10 Electrical Characteristics V_{BUS_POWER} Circuit

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{CLAMP}	Output voltage on V_{BUS_POWER} during OVP	$V_{BUS_CON} = 20\text{ V}$	TPD1S514-1		5.0	5.5	V
			TPD1S514-2		5.0	5.5	
			TPD1S514-3		5.0	5.5	
			TPD1S514		6.48	6.68	
V_{BUS_POWER}	Output voltage on V_{BUS_POWER} during normal operation	$V_{BUS_CON} = 5\text{ V}$, $I_{BUS_POWER} = 1\text{ mA}$;	TPD1S514-1	4.7	4.95		V
			TPD1S514-2	4.7	4.95		
			TPD1S514-3	4.7	4.95		
			TPD1S514	4.7	4.98		
$I_{BUS_POWER_MAX}$	Output current on V_{BUS_POWER}	$V_{BUS_CON} = 5\text{ V} - 15\text{ V}$				3	mA

7.11 Timing Requirements

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
t _{DELAY}	USB charging turn-ON Delay	Measured from $\overline{\text{EN}}$ asserted LOW to nFET begins to Turn ON, excludes soft-start time	TPD1S514-1	20			ms
			TPD1S514-2				
			TPD1S514-3				
			TPD1S514				
t _{SS}	USB charging rise time (soft-start delay)	Force 5 V on VBUS_CON, measured from V _{BUS_SYS} rises from 10% to 90% (with 1 MΩ load/ NO C _{LOAD})	TPD1S514-1	3.5			ms
			TPD1S514-2				
			TPD1S514-3				
			TPD1S514				
t _{OFF_DELAY}	USB charging turn-OFF time	Measured from $\overline{\text{EN}}$ asserted High to V _{BUS_SYS} falling to 10% with R _{LOAD} = 10 Ω and No C _{LOAD} on V _{BUS_SYS}	TPD1S514-1	5.5			μs
			TPD1S514-2				
			TPD1S514-3				
			TPD1S514				
OVER VOLTAGE PROTECTION							
t _{OVP_response}	OVP response time	Measured from OVP Condition to FET Turn OFF ⁽¹⁾				100	ns

(1) Specified by design, not production tested

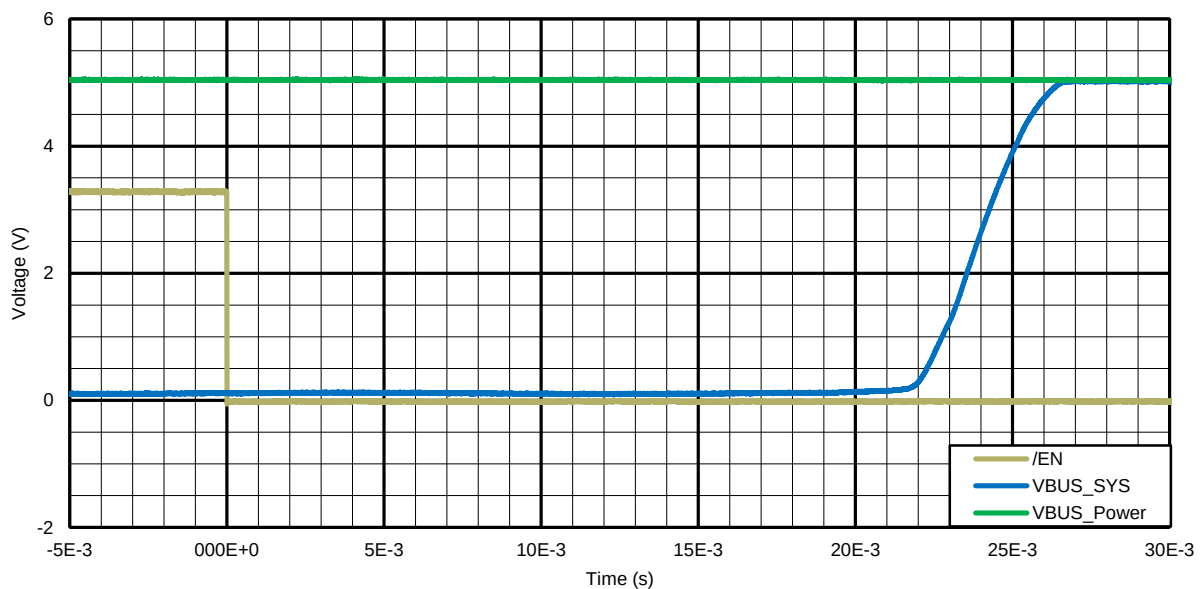


Figure 1. TPD1S514-1 Response to Set $\overline{\text{EN}}$ Low

7.12 TPD1S514-1 Typical Characteristics

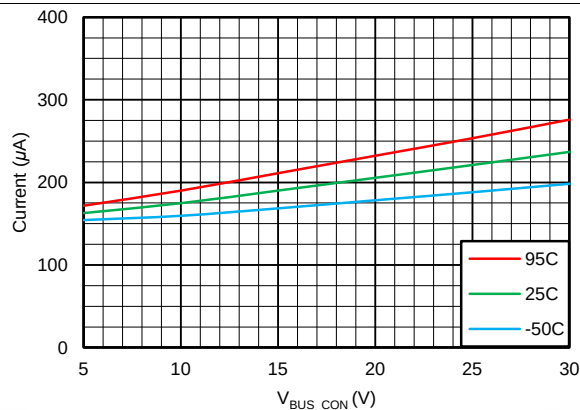


Figure 2. In Supply Current vs Supply Voltage

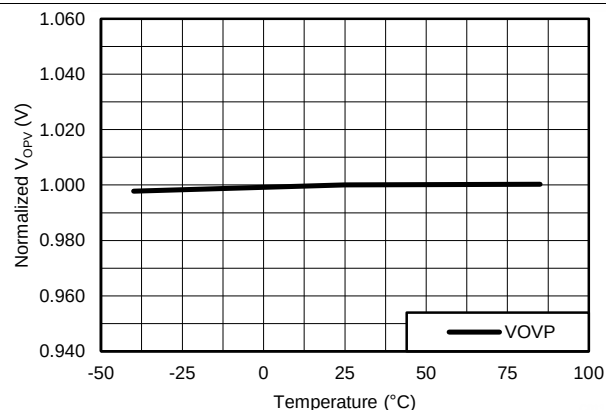


Figure 3. Normalized V_{OVP} vs Temperature

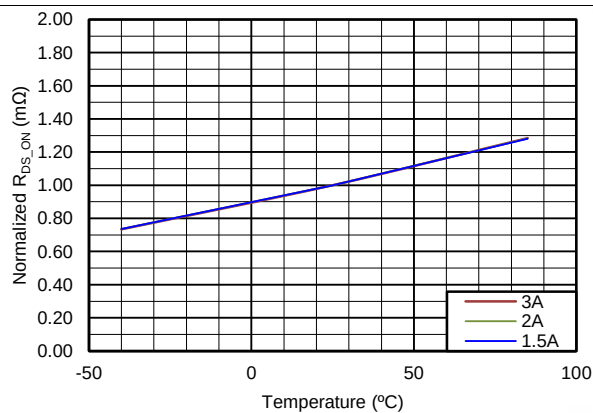


Figure 4. Normalized R_{ON} vs Temperature

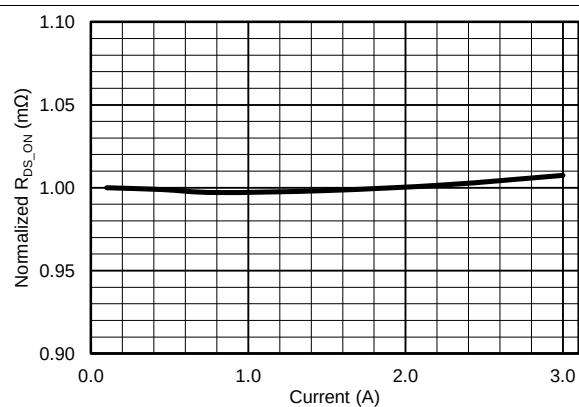


Figure 5. Normalized R_{ON} vs Output

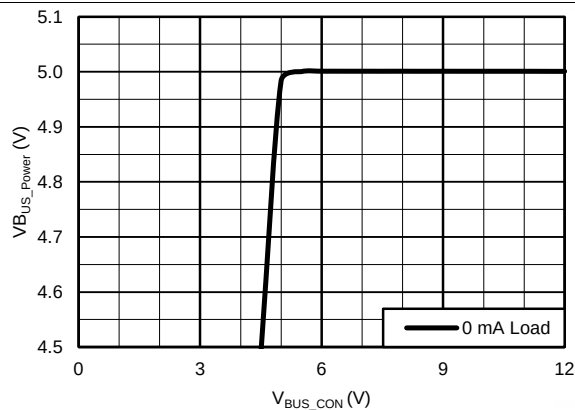


Figure 6. V_{BUS_POWER} vs V_{BUS_CON} With No Load

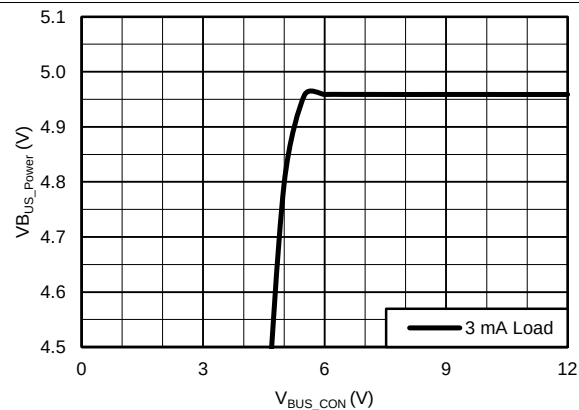


Figure 7. V_{BUS_POWER} vs V_{BUS_CON} With 3 mA Load

TPD1S514-1 Typical Characteristics (continued)

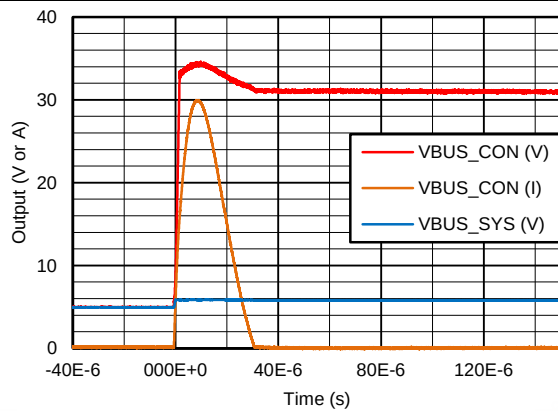


Figure 8. 100 V Surge With Device

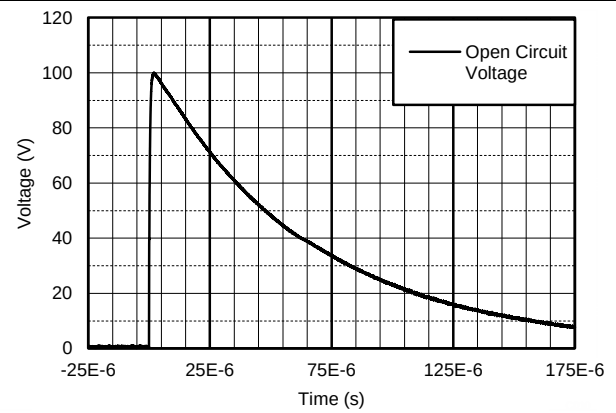


Figure 9. 100 V Surge Without Device

8 Detailed Description


8.1 Overview

The TPD1S514 Family provides single-chip ESD, surge, and over voltage protection solutions for portable USB Charging and Host interfaces. Each device offers over voltage protection at the V_{BUS_CON} pin up to 30-V DC. The TPD1S514 Family offers an ESD and Precision Clamp for the V_{BUS_CON} pin, thus eliminating the need for external TVS clamp circuits in the application.

Each device has an internal oscillator and charge pump which controls turning ON the internal nFET switch. The internal oscillator controls the timers which enable the charge pump. If V_{BUS_CON} is less than V_{OVP} , the internal charge pump is enabled. After a 20 ms internal delay, the charge-pump starts-up, and turns ON the internal nFET switch through a soft start. If at any time V_{BUS_CON} rises above V_{OVP} , the nFET switch is turned OFF within 100 ns.

The TPD1S514 Family of devices also have a V_{BUS_POWER} pin which follows V_{BUS_CON} up to 4.9 V at 3 mA (except for TPD1S514, which follows V_{BUS_CON} up to 6.48 V, after which it is regulated to that voltage) to power the system from V_{BUS_CON} . In the case where the system battery state cannot power the system, voltage from an external charger can be provided to power the system. V_{BUS_POWER} is supplied by an always on LDO regulator supplied by V_{BUS_CON} . V_{BUS_POWER} output voltage remains regulated to 4.9 V (except for TPD1S514, which follows V_{BUS_CON} up to 6.48 V, after which it is regulated to that voltage) at up to 30-V DC on V_{BUS_CON} and during IEC 61000-4-5 surge events of up to 100 V open circuit voltage on V_{BUS_CON} .

8.2 Functional Block Diagram

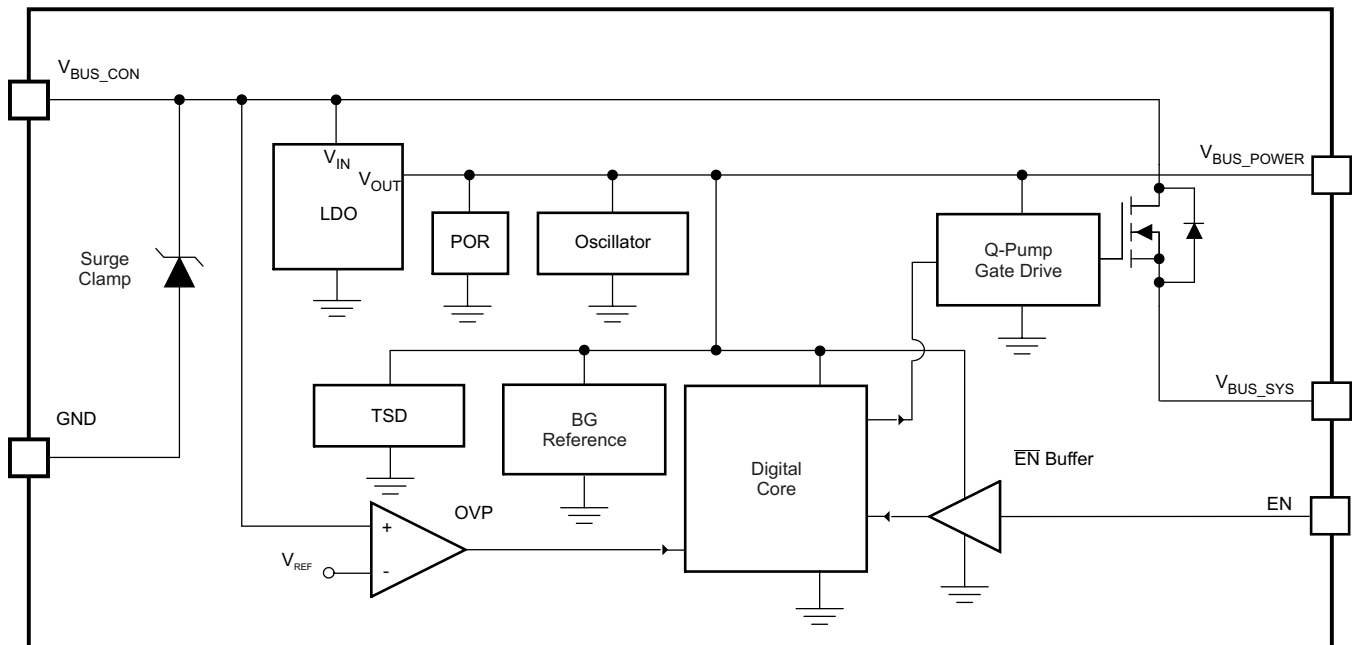

8.3 Feature Description

8.3.1 Over Voltage Protection on V_{BUS_CON} up to 30 V DC

When the V_{BUS_CON} voltage rises above V_{OVP} , the internal nFET switch is turned OFF, removing power from the system side. V_{BUS_CON} can tolerate up to 30-V DC. The response to over voltage is very rapid, with the nFET switch turning off in less than 100 ns. When the V_{BUS_CON} voltage returns back to below $V_{OVP} - V_{HYS_OVP}$, the nFET switch is turned ON again after an internal delay of t_{OVP_RECOV} (t_{DELAY}). This time delay ensures that the V_{BUS_CON} supply has stabilized before turning the switch back on. After t_{OVP_RECOV} , the TPD1S514 Family device turns on the nFET through a soft start. Once the OVP condition is cleared the nFET is turned completely ON.

Feature Description (continued)

8.3.2 Precision OVP (< ±1% Tolerance)

1% OVP trip threshold accuracy allows use of the entire input charging range while protecting sensitive system-side components from over voltage conditions.

8.3.3 Low R_{ON} nFET Switch Supports Host and Charging Mode

The nFET switch has a total on resistance (R_{ON}) of 39 mΩ. This equates to a voltage drop of less than 140 mV when charging at the maximum 3.5 A current level. Such low R_{ON} helps provide maximum potential to the system as provided by an external charger or by the system when in Host Mode.

8.3.4 V_{BUS_POWER} , TPD1S514-1, TPD1S514-2, TPD1S514-3

The V_{BUS_POWER} pin provides up to 3 mA and 5 V for powering the system using V_{BUS_CON} . V_{BUS_POWER} follows V_{BUS_CON} after 3.5 V and up to the regulated 5 V. In the case where the system battery state cannot power the system, voltage from an external charger can power the system. V_{BUS_POWER} is supplied by an always on LDO regulator supplied by V_{BUS_CON} . The V_{BUS_POWER} output voltage remains regulated to 5 V at up to 30-V DC on V_{BUS_CON} and during IEC 61000-4-5 surge events of up to 100 V.

8.3.5 V_{BUS_POWER} , TPD1S514

The V_{BUS_POWER} pin provides up to 3 mA and 6.48 V for powering the system using V_{BUS_CON} . V_{BUS_POWER} follows V_{BUS_CON} after 3.5 V and up to the regulated 6.48 V. In the case where the system battery state cannot power the system, voltage from an external charger can be provided to power the system. V_{BUS_POWER} is supplied by an always on LDO regulator supplied by V_{BUS_CON} . The V_{BUS_POWER} output voltage remains regulated to 6.48 V at up to 30-V DC on V_{BUS_CON} and during IEC 61000-4-5 surge events of up to 100 V.

8.3.6 Powering the System When Battery is Discharged

There are two methods for powering the system under a dead battery condition. Case 1: The $\overline{EN}$ pin can be tied to ground so that the nFET is always ON (when $V_{UVLO} < V_{BUS_CON} < V_{OVP}$) and an external charger can power V_{BUS} . Case 2: If $\overline{EN}$ is controlled by a Power Management Unit (PMIC) or other logic, V_{BUS_POWER} can be used to power the PMIC. In Case 2, once the device is enabled, $t_{DELAY} + t_{SS}$, work together to meet the USB Inrush Current compliance.

8.3.7 ±15 kV IEC 61000-4-2 Level 4 ESD Protection

The V_{BUS_CON} pin can withstand ESD events up to ±15 kV Contact and Air-Gap. An ESD clamp diverts the current to ground.

8.3.8 100 V IEC 61000-4-5 μs Surge Protection

The V_{BUS_CON} pin can withstand surge events up to 100 V open circuit voltage (V_{PP}), or 900 W. A Precision Clamp diverts the current to ground and active circuitry switches OFF the nFET earlier than 100 ns before an over voltage can get through to V_{BUS_SYS} . The ultra-fast response time of the TPD1S514 Family holds the voltage on V_{BUS_SYS} to less than V_{OVP} during surge events of up to 100 V_{PP} .

8.3.9 Startup and OVP Recovery Delay

Upon startup or recovering from an over voltage, the TPD1S514 Family of devices have a built in startup delay. An internal oscillator controls a charge pump to control the delay. Once a manufactured pre-programmed time, t_{DELAY} , has elapsed, the charge pump is enabled which turns ON the nFET. A manufactured pre-programmed soft start, t_{SS} , is used when turning ON the nFET. Once the device is enabled, these start delays, $t_{DELAY} + t_{SS}$, work together to meet the USB Inrush Current compliance.

8.3.10 Thermal Shutdown

The TPD1S514 Family has an over-temperature protection circuit to protect against system faults or improper use. The basic function of the thermal shutdown (TSD) circuit is to sense when the junction temperature has exceeded the absolute maximum rating and shuts down the device until the junction temperature has cooled to a safe level.

8.4 Device Functional Modes

8.4.1 Operation With $V_{BUS_CON} < 3.5\text{ V}$ (Minimum V_{BUS_CON})

The TPD1S514 Family operates normally (nFET ON) with input voltages above 3.5 V. The maximum UVLO voltage is 3.5 V and the device will operate at input voltages above 3.5 V. The typical UVLO voltage is 3.1 V and the device may operate at input voltages above that point. The device may also operate at input voltages as low as 2.7 V, the minimum UVLO. At input voltages between 0.6 V and 1.2 V, the state of output pins may not be controlled internally.

8.4.2 Operation With $V_{BUS_CON} > V_{OVP}$

The TPD1S514 Family operates normally (nFET ON) with input voltages below V_{OVP_min} . The typical OVP voltage is V_{OVP_TYP} and the device may operate at input voltages below that point. The device may also operate at input voltages as high as V_{OVP_MAX} .

Table 1. V_{OVP} Values

DEVICE NAME	V_{OVP}		
	MIN	TYP	MAX
TPD1S514-1	5.9	5.95	5.99
TPD1S514-2	9.9	9.98	10.05
TPD1S514-3	13.5	13.75	14
TPD1S514	5.9	5.95	5.99

8.4.3 OTG Mode

The TPD1S514 Family of devices UVLO and OVP voltages are referenced to V_{BUS_CON} voltage. In OTG mode, V_{BUS_SYS} is driving the V_{BUS_CON} . Under this situation, initially V_{BUS_CON} is powered through the body diode of the nFET by V_{BUS_SYS} . Once the UVLO threshold on V_{BUS_CON} is met, the nFET turns ON. If there is a short to ground on V_{BUS_CON} the OTG supply is expected to limit the current.

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The TPD1S514 Family of devices offer V_{BUS} port protection implementing UVLO and OVP, with an LDO supplied V_{BUS_POWER} pin to regulate an output supply pin of 3 mA at 5 V (except for TPD1S514, which follows V_{BUS_CON} up to 6.48 V, after which it is regulated to that voltage). The V_{BUS_POWER} pin can be used to power the system from an external source on V_{BUS_CON} in case the system's battery state cannot power the system.

9.2 Typical Applications

9.2.1 TPD1S514-1 USB 2.0/3.0 Case 1: Always Enabled

The $\overline{EN}$ pin can be tied to ground so that the nFET is ON when $V_{UVLO} < V_{BUS_CON} < V_{OVP}$ and an external charger can power V_{BUS} . V_{BUS_POWER} should be tied to ground with a 1- μ F capacitor for LDO stability. USB Inrush Current compliance tests will need to be handled by the rest of the system since the start delays t_{DELAY} and t_{SS} implement only after the device changes from disabled to enabled, or after any UVLO or OVP event.

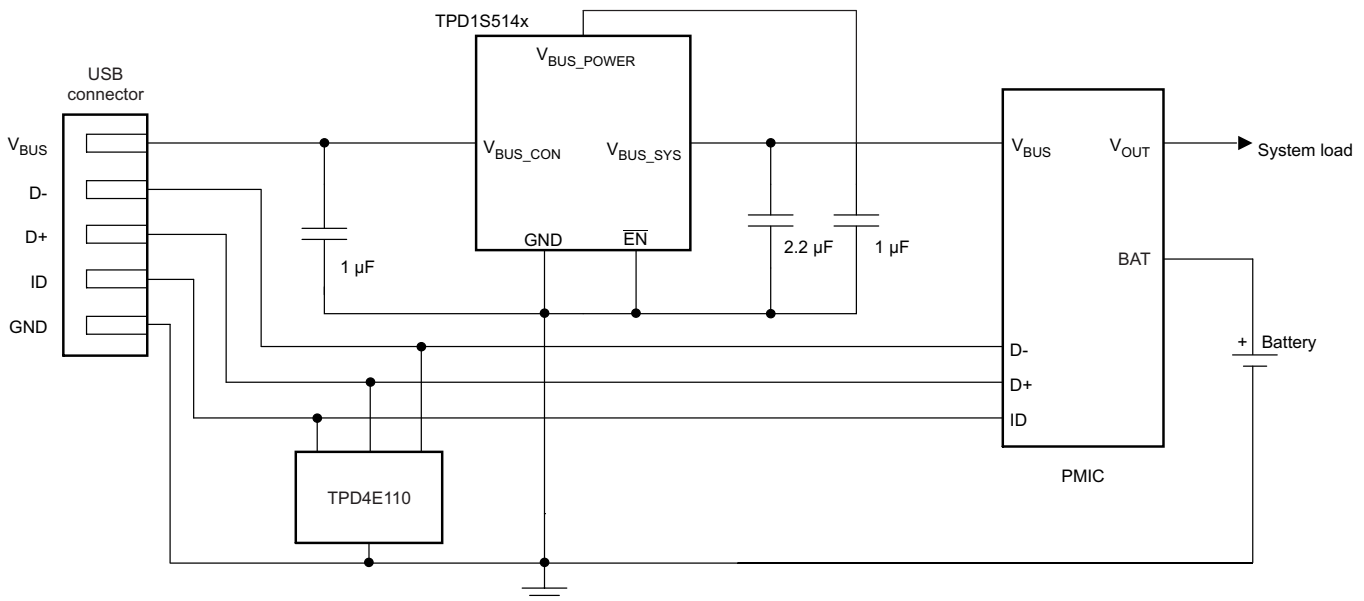


Figure 10. Always on, TPD1S514-1

9.2.1.1 Design Requirements

For this example, use the following input parameters from Table 2.

Table 2. Design Parameters

DESIGN PARAMETERS	EXAMPLE VALUE
Signal range on V_{BUS_CON}	3.5 V – 5.9 V
Signal range on V_{BUS_SYS}	3.9 V – 5.9 V
Signal on $\overline{EN}$	Tie to system ground plane

9.2.1.2 Detailed Design Procedure

To begin the design process the designer needs to know the V_{BUS} voltage range.

9.2.1.2.1 V_{BUS} Voltage Range

The UVLO trip-point is a maximum 3.5 V and the OVP trip-point is a minimum 5.9 V. This provides some headroom for the USB 2.0 specified minimum 4.4 V (Low-power) or 4.75 V (Full-power) and 5.25 V maximum; or the USB 3.0 specified minimum 4.45 V and 5.25 V maximum.

9.2.1.2.2 Discharged Battery

Connecting $\overline{EN}$ to ground sets the part active at all times. OVP and UVLO are always active, even when the system battery is fully discharged. In the case of a discharged system battery, V_{BUS_SYS} can be used to power the system when a source with voltage between V_{UVLO} and V_{OVP} is attached to V_{BUS_CON} .

9.2.1.3 Application Curves

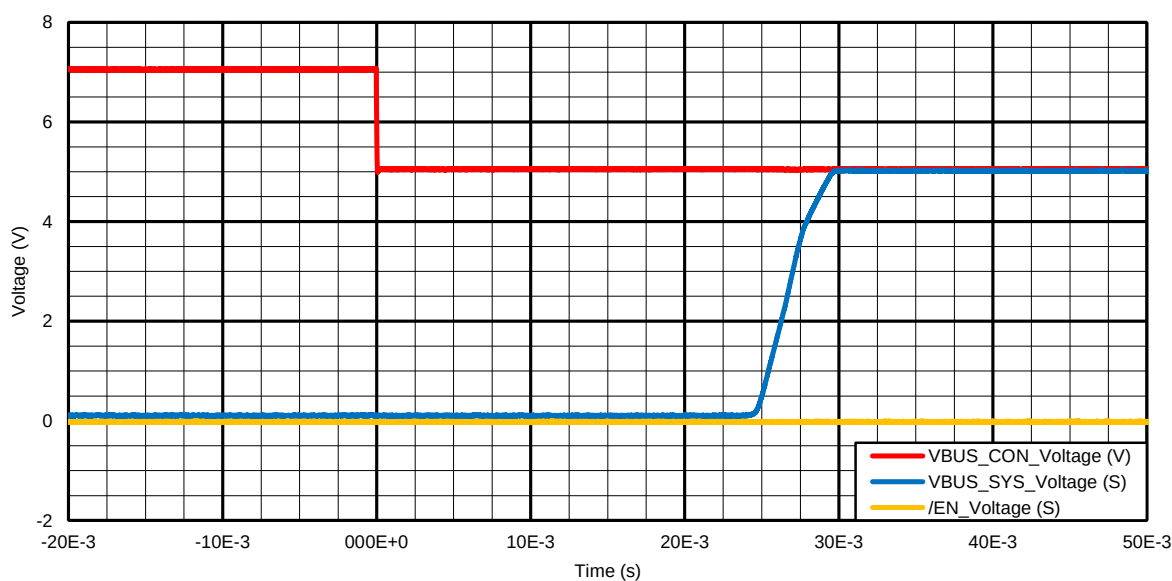


Figure 11. V_{BUS_SYS} Recovery Time From Over Voltage on V_{BUS_CON}

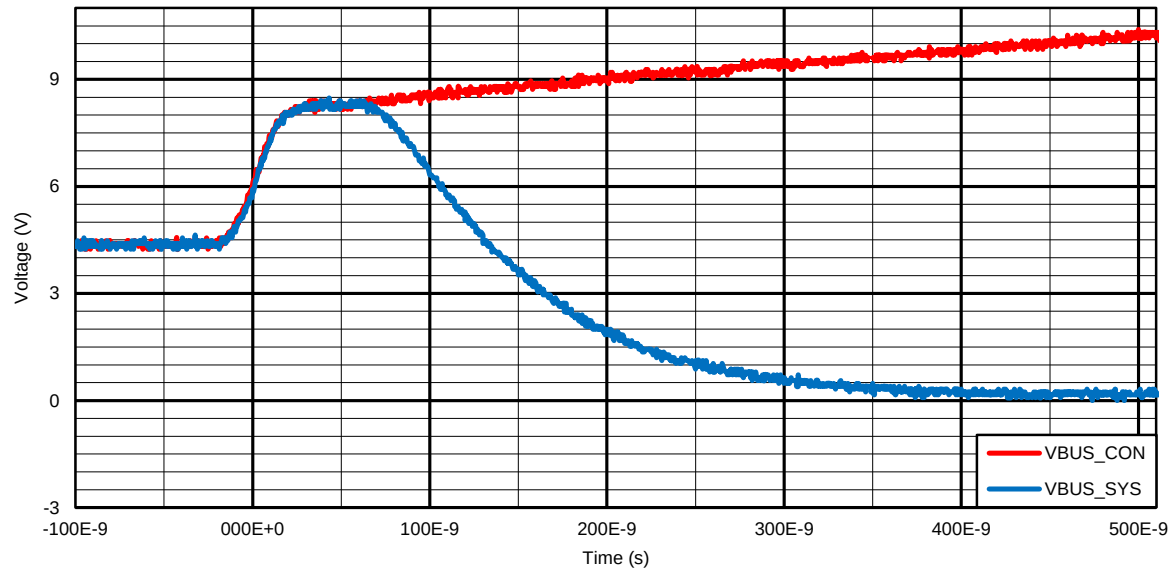


Figure 12. OVP Response

9.2.2 TPD1S514-1 USB 2.0/3.0 Case 2: PMIC Controlled $\overline{\text{EN}}$

The TPD1S514 Family offers more flexibility to system designers to power up the system during a dead battery condition. Refer to Figure 13, the $V_{\text{BUS_POWER}}$ pin supplies 4.95 V and 3 mA to power the PMIC in a dead battery condition. Regardless of $\overline{\text{EN}}$ state, $V_{\text{BUS_POWER}}$ is available to the PMIC. Utilizing this power, the PMIC can enable the TPD1S514 Family of devices when a valid $V_{\text{BUS_CON}}$ voltage is present.

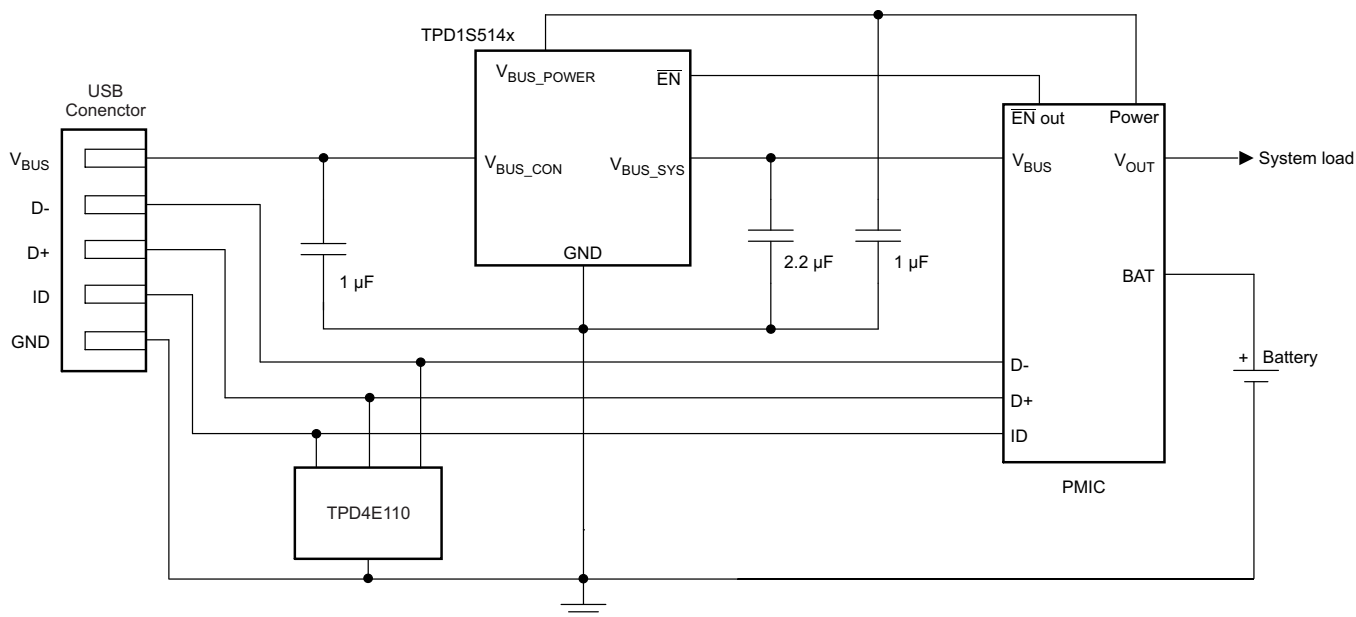


Figure 13. PMIC Controlled $\overline{\text{EN}}$, TPD1S514-1

9.2.2.1 Design Requirements

For this example, use the following table as input parameters:

Table 3. Design Parameters

DESIGN PARAMETERS	EXAMPLE VALUE
Signal range on $V_{\text{BUS_CON}}$	3.5 V – 5.9 V
Signal range on $V_{\text{BUS_SYS}}$	3.9 V – 5.9 V
Drive $\overline{\text{EN}}$ low (enabled)	0 V – 0.8 V
Drive $\overline{\text{EN}}$ high (disabled)	1.2 V – 6.0 V

9.2.2.2 Detailed Design Procedure

To begin the design process, some parameters must be decided upon. The designer needs to know the following:

- V_{BUS} voltage range
- PMIC power requirement

9.2.2.2.1 V_{BUS} Voltage Range

The UVLO trip-point is a maximum 3.5 V and the OVP trip-point is a minimum 5.9 V. This provides some headroom for the USB 2.0 specified minimum 4.4 V (Low-power) or 4.75 V (Full-power) and 5.25 V maximum; or the USB 3.0 specified minimum 4.45 V and 5.25 V maximum.

9.2.2.2.2 PMIC Power Requirement

The $V_{\text{BUS_POWER}}$ pin can source up to 3 mA of current and maintain a minimum 4.8 V, 4.95 V typical. TPD1S514-1 design provides an LDO regulator supplied voltage source which can be used to provide power to a PMIC when its internal battery supplied power is unavailable. When selecting a matching PMIC, ensure its power requirement can be met by the $V_{\text{BUS_POWER}}$ pin if designing for this scenario.

9.2.2.2.3 Discharged Battery

Powering the PMIC from V_{BUS_POWER} allows logic control of the $\overline{EN}$ pin to set TPD1S514-1 active and begin charging the battery and powering up the rest of the system.

9.2.2.3 Application Curve

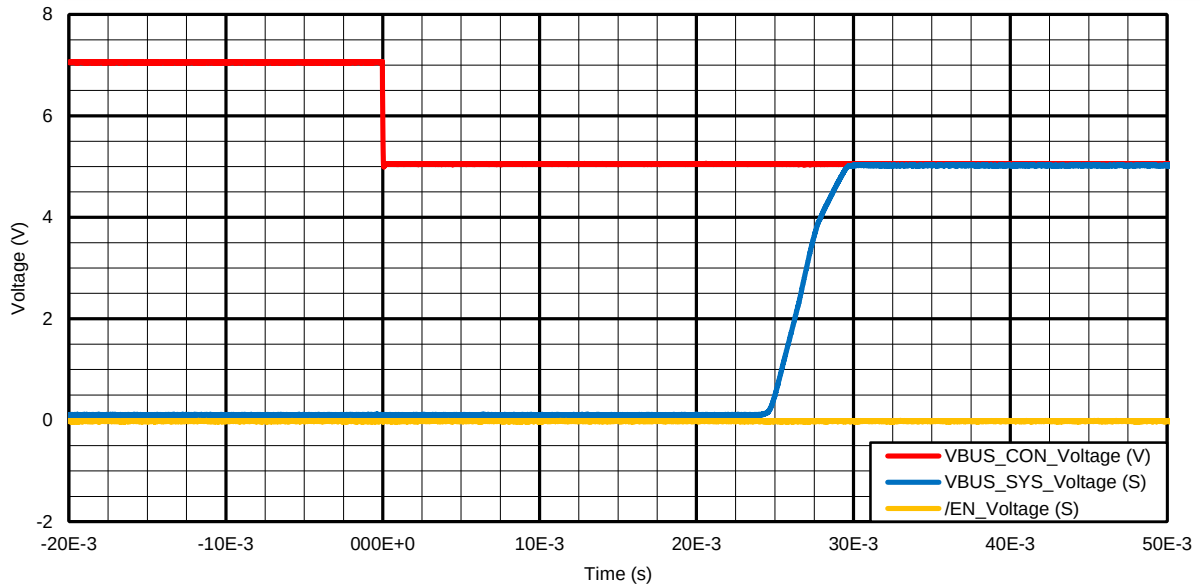


Figure 14. V_{BUS_SYS} Recovery Time From Over Voltage on V_{BUS_CON}

10 Power Supply Recommendations

The TPD1S514 Family is designed to receive power from a USB 3.0 (or lower) V_{BUS} source. It can operate normally (nFET ON) between a minimum 3.5 V and a maximum V_{OVP_MIN} V. Thus, the power supply (with a ripple of V_{RIPPLE}) requirement for the TPD1S514 Family of devices to be able to switch the nFET ON is between $3.5\text{ V} + V_{RIPPLE}$ and $V_{OVP_MIN} - V_{RIPPLE}$, where V_{OVP_MIN} is:

Table 4. V_{OP_MIN} Values


DEVICE NAME	V_{OVP_MIN}
TPD1S514-1	5.90 V
TPD1S514-2	9.9 V
TPD1S514-3	13.5 V
TPD1S514	5.90 V

11 Layout

11.1 Layout Guidelines

- The optimum placement is as close to the connector as possible.
 - EMI during an ESD event can couple from the trace being struck to other nearby unprotected traces, resulting in early system failures.
 - The PCB designer needs to minimize the possibility of EMI coupling by keeping any unprotected traces away from the protected traces which are between the TVS and the connector.
- Route the protected traces as straight as possible.
- Eliminate any sharp corners on the protected traces between the TVS and the connector by using rounded corners with the largest radii possible.
 - Electric fields tend to build up on corners, increasing EMI coupling.

11.2 Layout Example

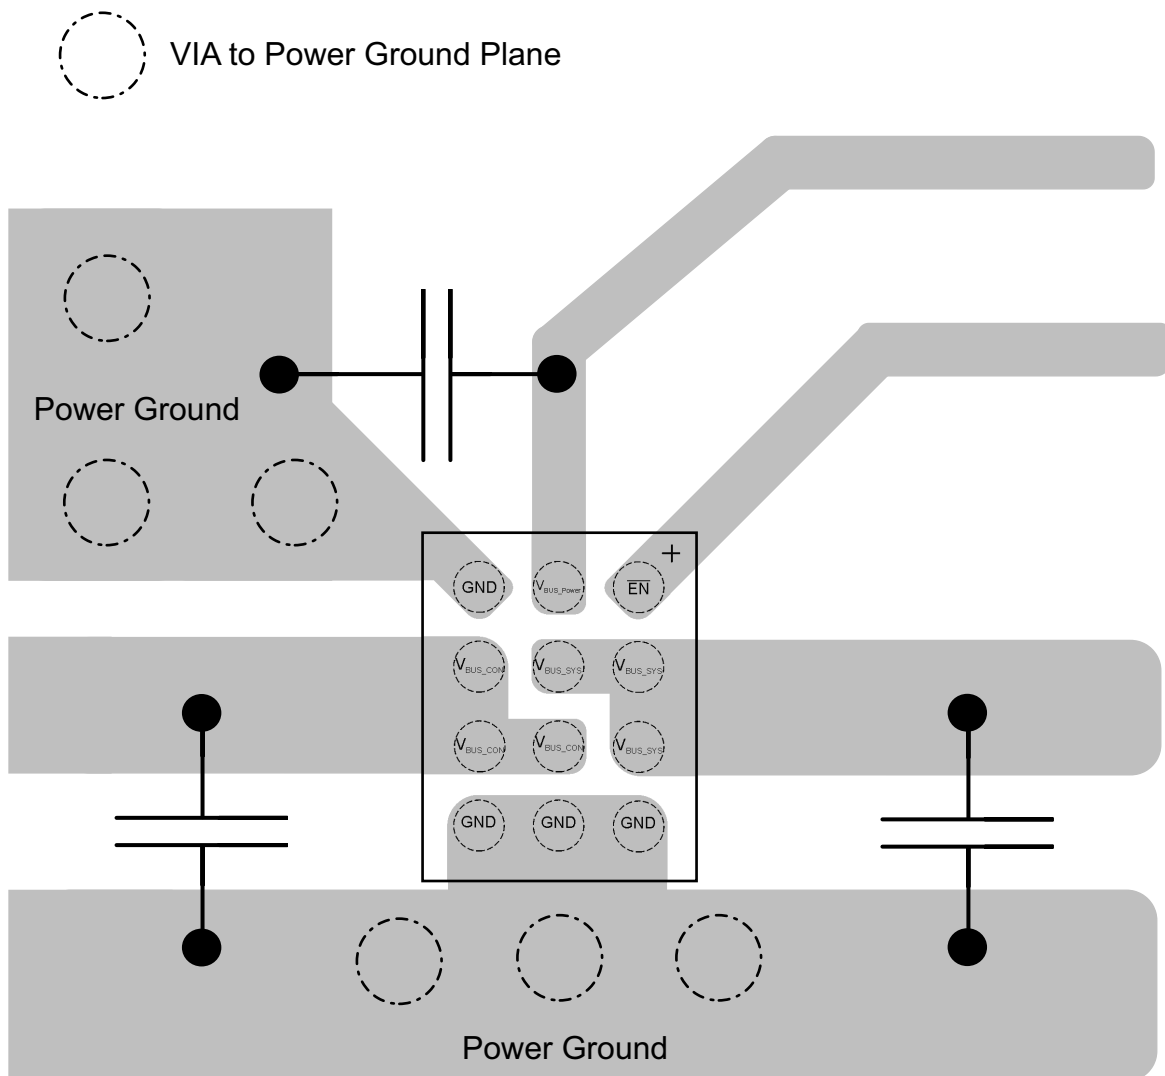

When designing layout for the TPD1S514 Family, note that V_{BUS_CON} and V_{BUS_SYS} pins allow extra wide traces for good power delivery. In the example shown, these pins are routed with 50 mil (1.27 mm) wide traces. Place the V_{BUS_CON} , V_{BUS_SYS} , and V_{BUS_POWER} capacitors as close to the pins as possible. Use external and internal ground planes and stitch them together with VIAs as close to the GND pins of TPD1S514 as possible. This allows for a low impedance path to ground so that the device can properly dissipate any surge or ESD events.

Figure 15. Layout Recommendation

12 器件和文档支持

12.1 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.2 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.3 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

12.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请查阅左侧的导航栏。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPD1S514-1YZR	Active	Production	DSBGA (YZ) 12	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	RH5141
TPD1S514-1YZR.A	Active	Production	DSBGA (YZ) 12	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	RH5141
TPD1S514-2YZR	Active	Production	DSBGA (YZ) 12	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	RH5142
TPD1S514-2YZR.A	Active	Production	DSBGA (YZ) 12	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	RH5142
TPD1S514-3YZR	Active	Production	DSBGA (YZ) 12	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	RH5143
TPD1S514-3YZR.A	Active	Production	DSBGA (YZ) 12	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 85	RH5143

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

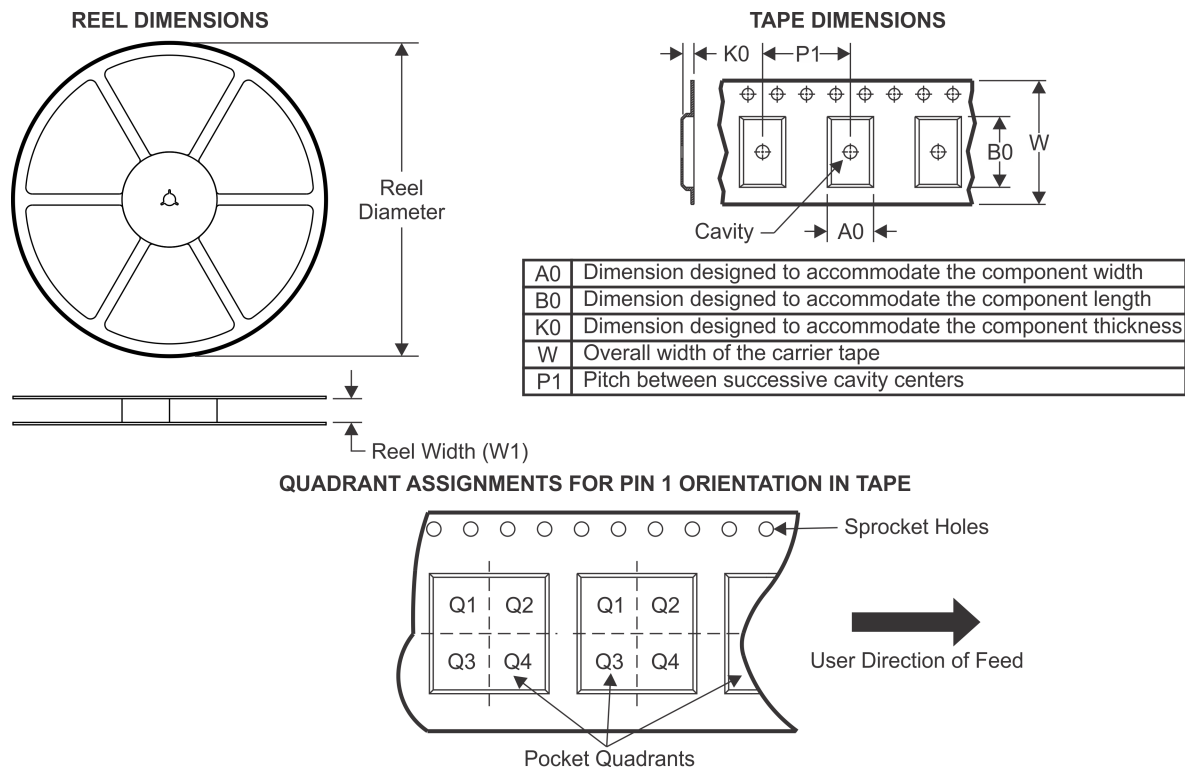TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPD1S514-1YZR	DSBGA	YZ	12	3000	180.0	8.4	1.39	2.09	0.75	4.0	8.0	Q2
TPD1S514-2YZR	DSBGA	YZ	12	3000	180.0	8.4	1.39	2.09	0.75	4.0	8.0	Q2
TPD1S514-3YZR	DSBGA	YZ	12	3000	180.0	8.4	1.39	2.09	0.75	4.0	8.0	Q2

TAPE AND REEL BOX DIMENSIONS

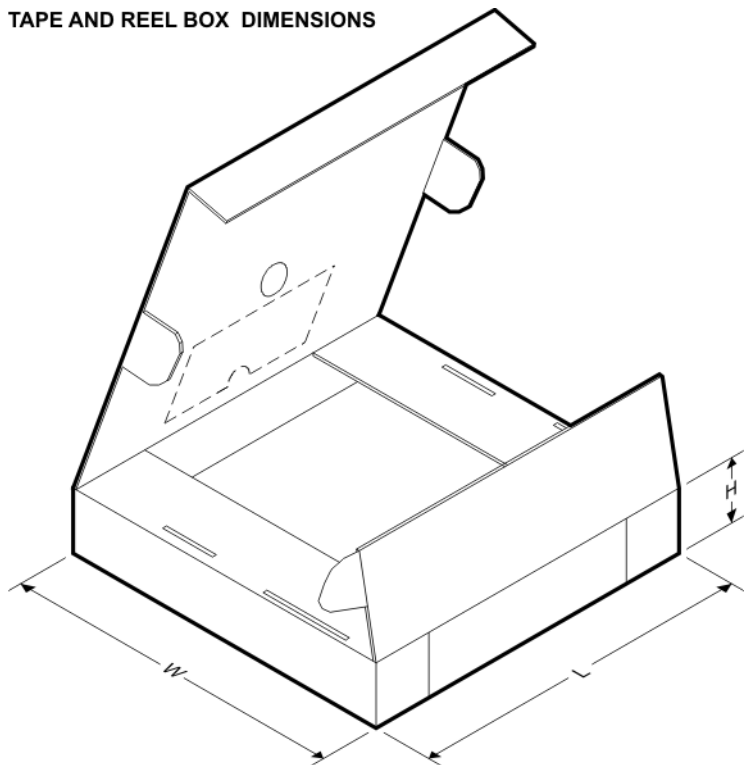

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPD1S514-1YZR	DSBGA	YZ	12	3000	182.0	182.0	20.0
TPD1S514-2YZR	DSBGA	YZ	12	3000	182.0	182.0	20.0
TPD1S514-3YZR	DSBGA	YZ	12	3000	182.0	182.0	20.0

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月