

# TPS2047, TPS2057 TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES


SLVS194 – APRIL 1999

## features

- 135-m $\Omega$  -Maximum (5-V Input) High-Side MOSFET Switch
- 250 mA Continuous Current per Channel
- Independent Short-Circuit and Thermal Protection With Overcurrent Logic Output
- Operating Range . . . 2.7-V to 5.5-V
- Logic-Level Enable Input
- 2.5-ms Typical Rise Time
- Undervoltage Lockout
- 20  $\mu$ A Maximum Standby Supply Current
- Bidirectional Switch
- Available in 16-pin SOIC Package
- Ambient Temperature Range,  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$
- 2-kV Human-Body-Model, 200-V Machine-Model ESD Protection

## typical applications

- Notebook, Desktop and Palmtop PCs
- Monitors, Keyboards, Scanners, and Printers
- Digital Cameras, Phones, and PBXs
- Hot-Insertion Applications

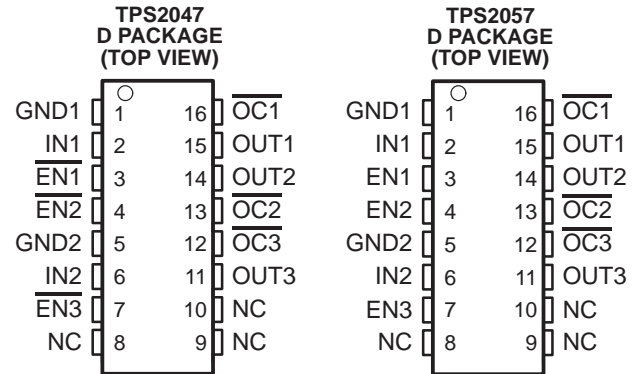

NC – No internal connection

## description

The TPS2047 and TPS2057 triple power-distribution switches are intended for applications where heavy capacitive loads and short circuits are likely. These devices incorporate in single packages three 135-m $\Omega$  N-channel MOSFET high-side power switches for power-distribution systems that require multiple power switches. Each switch is controlled by a logic enable compatible with 5-V and 3-V logic. Gate drive is provided by an internal charge pump that controls the power-switch rise times and fall times to minimize current surges during switching. The charge pump, requiring no external components, allows operation from supplies as low as 2.7 V.

When the output load exceeds the current-limit threshold or a short is present, the TPS2047 and TPS2057 limit the output current to a safe level by switching into a constant-current mode, pulling the overcurrent ( $\overline{\text{OCx}}$ ) logic output low. When continuous heavy overloads and short circuits increase the power dissipation in the switch causing the junction temperature to rise, a thermal protection circuit shuts off the switch in overcurrent to prevent damage. Recovery from a thermal shutdown is automatic once the device has cooled sufficiently. Internal circuitry ensures the switch remains off until valid input voltage is present.

The TPS2047 and TPS2057 are designed to limit at 0.44-A load. These power-distribution switches are available in 16-pin small-outline integrated circuit (SOIC) packages and operate over an ambient temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

## AVAILABLE OPTIONS

| $T_A$   | ENABLE      | RECOMMENDED MAXIMUM<br>CONTINUOUS LOAD CURRENT<br>(A) | TYPICAL SHORT-CIRCUIT<br>CURRENT LIMIT AT $25^{\circ}\text{C}$<br>(A) | PACKAGED DEVICES         |
|---|-------------|---|---|--------------------------|
|   |             |   |   | SOIC<br>(D) <sup>†</sup> |
| $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ | Active low  | 0.25  | 0.44  | TPS2047D                 |
| $-40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ | Active high | 0.25  | 0.44  | TPS2057D                 |

<sup>†</sup> The D package is available taped and reeled. Add an R suffix to device type (e.g., TPS2047DR)



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1999, Texas Instruments Incorporated

# TPS2047, TPS2057

SLVS194 – APRIL 1999

## TPS2047 functional block diagram

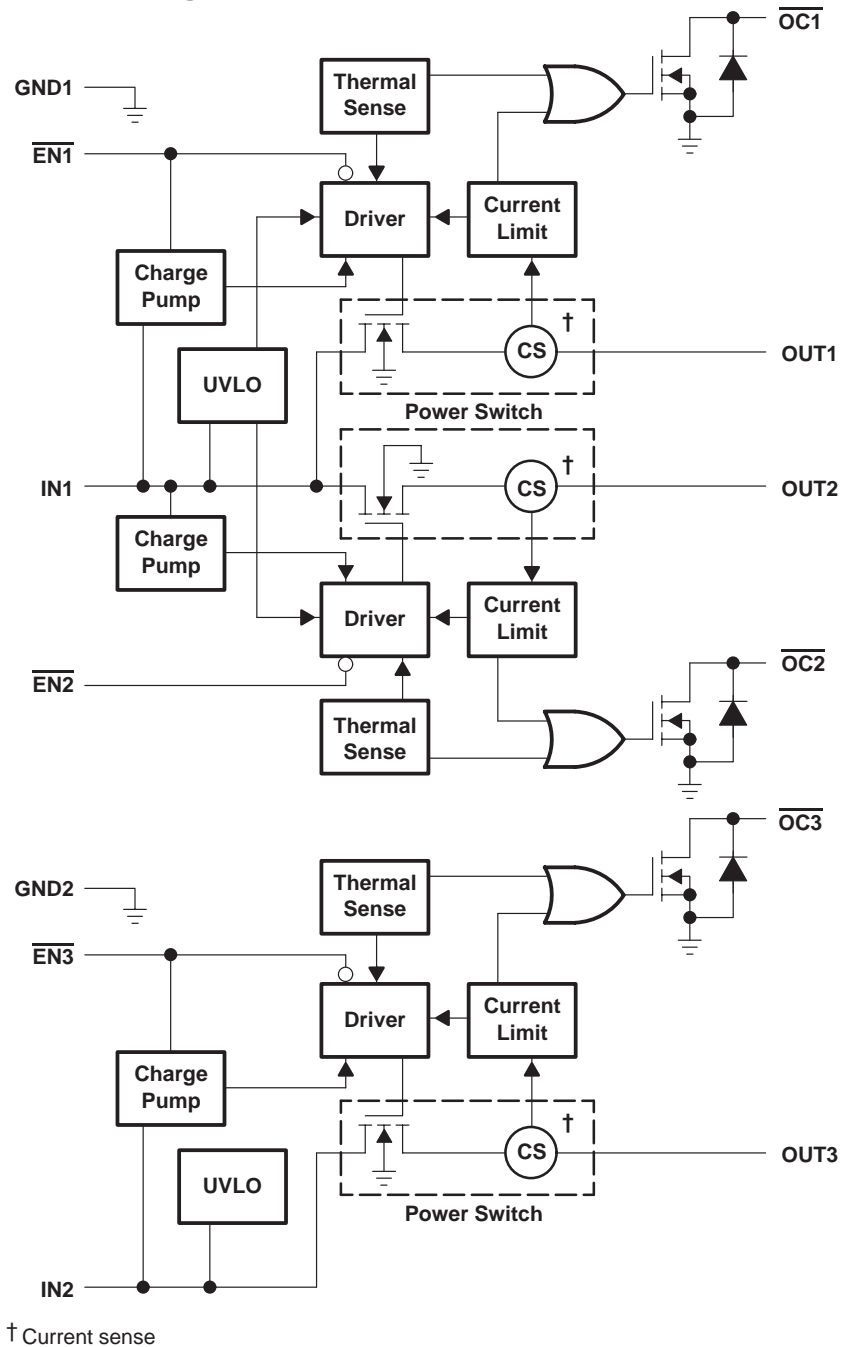

# TPS2047, TPS2057

## TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

### Terminal Functions

| TERMINAL                |          |          | I/O | DESCRIPTION   |
|-------------------------|----------|----------|-----|---|
| NAME                    | NO.      |          |     |   |
|                         | TPS2047  | TPS2057  |     |   |
| $\overline{\text{EN1}}$ | 3        | –        | I   | Enable input. Logic low turns on power switch, IN1-OUT1.  |
| $\overline{\text{EN2}}$ | 4        | –        | I   | Enable input. Logic low turns on power switch, IN1-OUT2.  |
| $\overline{\text{EN3}}$ | 7        | –        | I   | Enable input. Logic low turns on power switch, IN2-OUT3.  |
| EN1                     | –        | 3        | I   | Enable input. Logic high turns on power switch, IN1-OUT1. |
| EN2                     | –        | 4        | I   | Enable input. Logic high turns on power switch, IN1-OUT2. |
| EN3                     | –        | 7        | I   | Enable input. Logic high turns on power switch, IN2-OUT3. |
| GND1                    | 1        | 1        |     | Ground  |
| GND2                    | 5        | 5        |     | Ground  |
| IN1                     | 2        | 2        | I   | Input voltage   |
| IN2                     | 6        | 6        | I   | Input voltage   |
| NC                      | 8, 9, 10 | 8, 9, 10 |     | No connection   |
| $\overline{\text{OC1}}$ | 16       | 16       | O   | Overcurrent. Logic output active low, IN1-OUT1            |
| $\overline{\text{OC2}}$ | 13       | 13       | O   | Overcurrent. Logic output active low, IN1-OUT2            |
| $\overline{\text{OC3}}$ | 12       | 12       | O   | Overcurrent. Logic output active low, IN2-OUT3            |
| OUT1                    | 15       | 15       | O   | Power-switch output, IN1-OUT1                             |
| OUT2                    | 14       | 14       | O   | Power-switch output, IN1-OUT2                             |
| OUT3                    | 11       | 11       | O   | Power-switch output, IN2-OUT3                             |



# TPS2047, TPS2057

## TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

---

### detailed description

#### power switch

The power switch is an N-channel MOSFET with a maximum on-state resistance of 135 m $\Omega$  ( $V_{I(INx)} = 5$  V). Configured as a high-side switch, the power switch prevents current flow from OUTx to INx and INx to OUTx when disabled. The power switch can supply a minimum of 250 mA per switch.

#### charge pump

An internal charge pump supplies power to the driver circuit and provides the necessary voltage to pull the gate of the MOSFET above the source. The charge pump operates from input voltages as low as 2.7 V and requires very little supply current.

#### driver

The driver controls the gate voltage of the power switch. To limit large current surges and reduce the associated electromagnetic interference (EMI) produced, the driver incorporates circuitry that controls the rise times and fall times of the output voltage. The rise and fall times are typically in the 2-ms to 4-ms range.

#### enable ( $\overline{ENx}$ or ENx)

The logic enable disables the power switch and the bias for the charge pump, driver, and other circuitry to reduce the supply current to less than 20  $\mu$ A when a logic high is present on ENx (TPS2047) or a logic low is present on ENx (TPS2057). A logic zero input on  $\overline{ENx}$  or logic high on ENx restores bias to the drive and control circuits and turns the power on. The enable input is compatible with both TTL and CMOS logic levels.

#### overcurrent ( $\overline{OCx}$ )

The  $\overline{OCx}$  open drain output is asserted (active low) when an overcurrent or over temperature condition is encountered. The output will remain asserted until the overcurrent or over temperature condition is removed.

#### current sense

A sense FET monitors the current supplied to the load. The sense FET measures current more efficiently than conventional resistance methods. When an overload or short circuit is encountered, the current-sense circuitry sends a control signal to the driver. The driver in turn reduces the gate voltage and drives the power FET into its saturation region, which switches the output into a constant current mode and holds the current constant while varying the voltage on the load.

#### thermal sense

The TPS2047 and TPS2057 implement a dual-threshold thermal trip to allow fully independent operation of the power distribution switches. In an overcurrent or short-circuit condition the junction temperature rises. When the die temperature rises to approximately 140°C, the internal thermal sense circuitry checks to determine which power switch is in an overcurrent condition and turns off that switch, thus, isolating the fault without interrupting operation of the adjacent power switches. Hysteresis is built into the thermal sense, and after the device has cooled approximately 20 degrees, the switch turns back on. The switch continues to cycle off and on until the fault is removed. The ( $\overline{OCx}$ ) open-drain output is asserted (active low) when overtemperature or overcurrent occurs.

#### undervoltage lockout

A voltage sense circuit monitors the input voltage. When the input voltage is below approximately 2 V, a control signal turns off the power switch.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TPS2047, TPS2057 TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|   |                                |
|---|--------------------------------|
| Input voltage range, $V_{I(INx)}$ (see Note1)                           | –0.3 V to 6 V                  |
| Output voltage range, $V_{O(OUTx)}$ (see Note1)                         | –0.3 V to $V_{I(INx)} + 0.3$ V |
| Input voltage range, $V_{I(ENx)}$ or $V_{I(ENx)}$                       | –0.3 V to 6 V                  |
| Continuous output current, $I_{O(OUTx)}$                                | Internally limited             |
| Continuous total power dissipation                                      | See Dissipation Rating Table   |
| Operating virtual junction temperature range, $T_J$                     | –40°C to 125°C                 |
| Storage temperature range, $T_{stg}$                                    | –65°C to 150°C                 |
| Lead temperature soldering 1,6 mm (1/16 inch) from case for 10 seconds  | 260°C                          |
| Electrostatic discharge (ESD) protection: Human body model MIL-STD-883C | 2 kV                           |
| Machine model   | 0.2 kV                         |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltages are with respect to GND.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING |
|---------|---|---|--|--|
| D       | 725 mW                                      | 5.8 mW/°C   | 464 mW                                   | 377 mW                                   |

## recommended operating conditions

|   | TPS2047 |     | TPS2057 |     | UNIT |
|---|---------|-----|---------|-----|------|
|   | MIN     | MAX | MIN     | MAX |      |
| Input voltage, $V_{I(INx)}$                   | 2.7     | 5.5 | 2.7     | 5.5 | V    |
| Input voltage, $V_{I(ENx)}$ or $V_{I(ENx)}$   | 0       | 5.5 | 0       | 5.5 | V    |
| Continuous output current, $I_{O(OUTx)}$      | 0       | 250 | 0       | 250 | mA   |
| Operating virtual junction temperature, $T_J$ | –40     | 125 | –40     | 125 | °C   |



# TPS2047, TPS2057

## TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

**electrical characteristics over recommended operating junction temperature range,  $V_{I(INx)} = 5.5\text{ V}$ ,  $I_O = \text{rated current}$ ,  $V_{I(ENx)} = 0\text{ V}$ ,  $V_{I(ENx)} = \text{Hi}$  (unless otherwise noted)**

### power switch

| PARAMETER    |  | TEST CONDITIONS†   | TPS2047 |     |     | TPS2057 |     |     | UNIT      |
|--------------|--|--|---------|-----|-----|---------|-----|-----|-----------|
|              |  |  | MIN     | TYP | MAX | MIN     | TYP | MAX |           |
| $r_{DS(on)}$ | Static drain-source on-state resistance, 5-V operation   | $V_{I(INx)} = 5\text{ V}$ , $T_J = 25^\circ\text{C}$ , $I_O = 0.25\text{ A}$                                     |         | 80  | 95  |         | 80  | 95  | $m\Omega$ |
|              |  | $V_{I(INx)} = 5\text{ V}$ , $T_J = 85^\circ\text{C}$ , $I_O = 0.25\text{ A}$                                     |         | 90  | 120 |         | 90  | 120 |           |
|              |  | $V_{I(INx)} = 5\text{ V}$ , $T_J = 125^\circ\text{C}$ , $I_O = 0.25\text{ A}$                                    |         | 100 | 135 |         | 100 | 135 |           |
|              | Static drain-source on-state resistance, 3.3-V operation | $V_{I(INx)} = 3.3\text{ V}$ , $T_J = 25^\circ\text{C}$ , $I_O = 0.25\text{ A}$                                   |         | 85  | 105 |         | 85  | 105 |           |
|              |  | $V_{I(INx)} = 3.3\text{ V}$ , $T_J = 85^\circ\text{C}$ , $I_O = 0.25\text{ A}$                                   |         | 100 | 135 |         | 100 | 135 |           |
|              |  | $V_{I(INx)} = 3.3\text{ V}$ , $T_J = 125^\circ\text{C}$ , $I_O = 0.25\text{ A}$                                  |         | 115 | 150 |         | 115 | 150 |           |
| $t_r$        | Rise time, output  | $V_{I(INx)} = 5.5\text{ V}$ , $T_J = 25^\circ\text{C}$ , $C_L = 1\text{ }\mu\text{F}$ , $R_L = 20\text{ }\Omega$ |         | 2.5 |     |         | 2.5 |     | ms        |
|              |  | $V_{I(INx)} = 2.7\text{ V}$ , $T_J = 25^\circ\text{C}$ , $C_L = 1\text{ }\mu\text{F}$ , $R_L = 20\text{ }\Omega$ |         | 3   |     |         | 3   |     |           |
| $t_f$        | Fall time, output  | $V_{I(INx)} = 5.5\text{ V}$ , $T_J = 25^\circ\text{C}$ , $C_L = 1\text{ }\mu\text{F}$ , $R_L = 20\text{ }\Omega$ |         | 4.4 |     |         | 4.4 |     | ms        |
|              |  | $V_{I(INx)} = 2.7\text{ V}$ , $T_J = 25^\circ\text{C}$ , $C_L = 1\text{ }\mu\text{F}$ , $R_L = 20\text{ }\Omega$ |         | 2.5 |     |         | 2.5 |     |           |

† Pulse-testing techniques maintain junction temperature close to ambient temperature; thermal effects must be taken into account separately.

### enable input $\overline{ENx}$ or $ENx$

| PARAMETER |                          | TEST CONDITIONS  | TPS2047 |     |     | TPS2057 |     |     | UNIT          |
|-----------|--------------------------|--|---------|-----|-----|---------|-----|-----|---------------|
|           |                          |  | MIN     | TYP | MAX | MIN     | TYP | MAX |               |
| $V_{IH}$  | High-level input voltage | $2.7\text{ V} \leq V_{I(INx)} \leq 5.5\text{ V}$               | 2       |     |     | 2       |     |     | V             |
| $V_{IL}$  | Low-level input voltage  | $4.5\text{ V} \leq V_{I(INx)} \leq 5.5\text{ V}$               |         |     | 0.8 |         |     | 0.8 | V             |
|           |                          | $2.7\text{ V} \leq V_{I(INx)} \leq 4.5\text{ V}$               |         |     | 0.4 |         |     | 0.4 |               |
| $I_I$     | Input current            | TPS2047 $V_{I(ENx)} = 0\text{ V}$ or $V_{I(ENx)} = V_{I(INx)}$ | -0.5    |     | 0.5 |         |     |     | $\mu\text{A}$ |
|           |                          | TPS2057 $V_{I(ENx)} = V_{I(INx)}$ or $V_{I(ENx)} = 0\text{ V}$ |         |     |     | -0.5    |     | 0.5 |               |
| $t_{on}$  | Turnon time              | $C_L = 100\text{ }\mu\text{F}$ , $R_L = 20\text{ }\Omega$      |         |     | 20  |         |     | 20  | ms            |
| $t_{off}$ | Turnoff time             | $C_L = 100\text{ }\mu\text{F}$ , $R_L = 20\text{ }\Omega$      |         |     | 40  |         |     | 40  |               |

### current limit

| PARAMETER |                              | TEST CONDITIONS†   | TPS2047 |      |       | TPS2057 |      |       | UNIT |
|-----------|------------------------------|--|---------|------|-------|---------|------|-------|------|
|           |                              |  | MIN     | TYP  | MAX   | MIN     | TYP  | MAX   |      |
| $I_{OS}$  | Short-circuit output current | $V_{I(INx)} = 5\text{ V}$ , OUT connected to GND, Device enable into short circuit | 0.345   | 0.44 | 0.525 | 0.345   | 0.44 | 0.525 | A    |

† Pulse-testing techniques maintain junction temperature close to ambient temperature; thermal effects must be taken into account separately.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# TPS2047, TPS2057 TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

electrical characteristics over recommended operating junction temperature range,  $V_{I(INx)} = 5.5\text{ V}$ ,  $I_O = \text{rated current}$ ,  $V_{I(ENx)} = 0\text{ V}$ ,  $V_{I(ENx)} = \text{Hi}$  (unless otherwise noted) (continued)

## supply current

| PARAMETER                         | TEST CONDITIONS          |  |   |         | TPS2047 |     |      | TPS2057 |     |               | UNIT |
|-----------------------------------|--------------------------|--|---|---------|---------|-----|------|---------|-----|---------------|------|
|                                   |                          |  |   |         | MIN     | TYP | MAX  | MIN     | TYP | MAX           |      |
| Supply current, low-level output  | No Load on OUTx          | $V_{I(\overline{\text{ENx}})} = V_{I(\text{INx})}$ | $T_J = 25^{\circ}\text{C}$                              | TPS2047 | 0.03    | 2   |      |         |     | $\mu\text{A}$ |      |
|                                   |                          |  | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ |         | 20      |     |      |         |     |               |      |
|                                   |                          | $V_{I(\text{ENx})} = 0\text{ V}$                   | $T_J = 25^{\circ}\text{C}$                              | TPS2057 |         |     | 0.03 | 2       |     |               |      |
|                                   |                          |  | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ |         |         |     | 20   |         |     |               |      |
| Supply current, high-level output | No Load on OUTx          | $V_{I(\overline{\text{ENx}})} = 0\text{ V}$        | $T_J = 25^{\circ}\text{C}$                              | TPS2047 | 160     | 200 |      |         |     | $\mu\text{A}$ |      |
|                                   |                          |  | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ |         | 200     |     |      |         |     |               |      |
|                                   |                          | $V_{I(\text{ENx})} = V_{I(\text{INx})}$            | $T_J = 25^{\circ}\text{C}$                              | TPS2057 |         |     | 160  | 200     |     |               |      |
|                                   |                          |  | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ |         |         |     | 200  |         |     |               |      |
| Leakage current                   | OUTx connected to ground | $V_{I(\overline{\text{ENx}})} = V_{I(\text{INx})}$ | $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ | TPS2047 | 200     |     |      |         |     | $\mu\text{A}$ |      |
|                                   |                          | $V_{I(\text{ENx})} = 0\text{ V}$                   |   | TPS2057 |         |     | 200  |         |     |               |      |
| Reverse leakage current           | INx = high impedance     | $V_{I(\overline{\text{ENx}})} = 0\text{ V}$        | $T_J = 25^{\circ}\text{C}$                              | TPS2047 | 0.3     |     |      |         |     | $\mu\text{A}$ |      |
|                                   |                          | $V_{I(\text{ENx})} = \text{Hi}$                    |   | TPS2057 |         |     | 0.3  |         |     |               |      |

## undervoltage lockout

| PARAMETER               | TEST CONDITIONS          | TPS2047 |     |     | TPS2057 |     |     | UNIT |
|-------------------------|--------------------------|---------|-----|-----|---------|-----|-----|------|
|                         |                          | MIN     | TYP | MAX | MIN     | TYP | MAX |      |
| Low-level input voltage |                          | 2       |     | 2.5 | 2       |     | 2.5 | V    |
| Hysteresis              | $T_J = 25^\circ\text{C}$ | 100     |     |     | 100     |     |     | mV   |

## overcurrent $\overline{\text{OCx}}$

| PARAMETER                      | TEST CONDITIONS                                       | TPS2047 |     |     | TPS2057 |     |     | UNIT          |
|--------------------------------|---|---------|-----|-----|---------|-----|-----|---------------|
|                                |   | MIN     | TYP | MAX | MIN     | TYP | MAX |               |
| Sink current <sup>†</sup>      | $V_O = 5\text{ V}$                                    |         |     | 10  |         |     | 10  | mA            |
| Output low voltage             | $I_O = 5\text{ mA}$ , $V_{OL}(\overline{\text{OCx}})$ |         |     | 0.5 |         |     | 0.5 | V             |
| Off-state current <sup>†</sup> | $V_O = 5\text{ V}$ , $V_O = 3.3\text{ V}$             |         |     | 1   |         |     | 1   | $\mu\text{A}$ |

<sup>†</sup> Specified by design, not production tested.

# TPS2047, TPS2057 TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

## PARAMETER MEASUREMENT INFORMATION

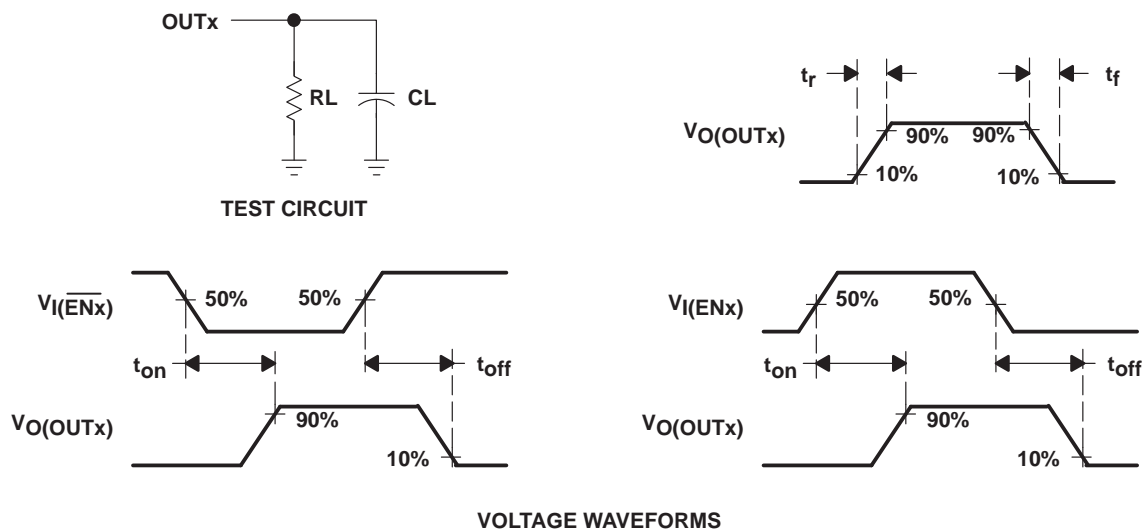


Figure 1. Test Circuit and Voltage Waveforms

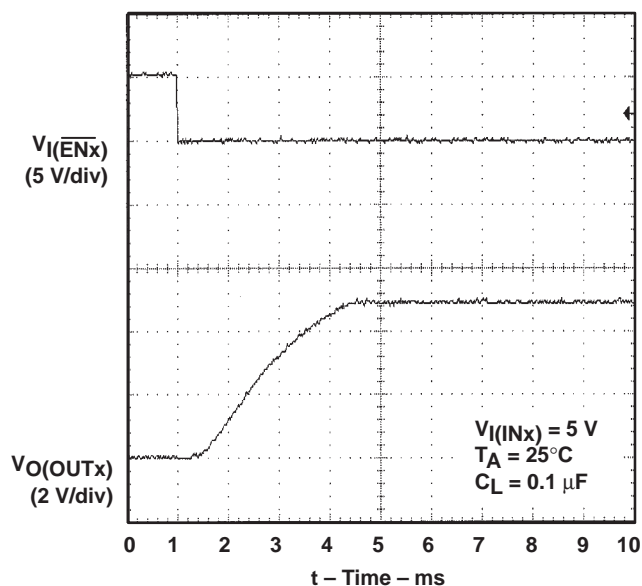


Figure 2. Turnon Delay and Rise Time  
with 0.1- $\mu\text{F}$  Load

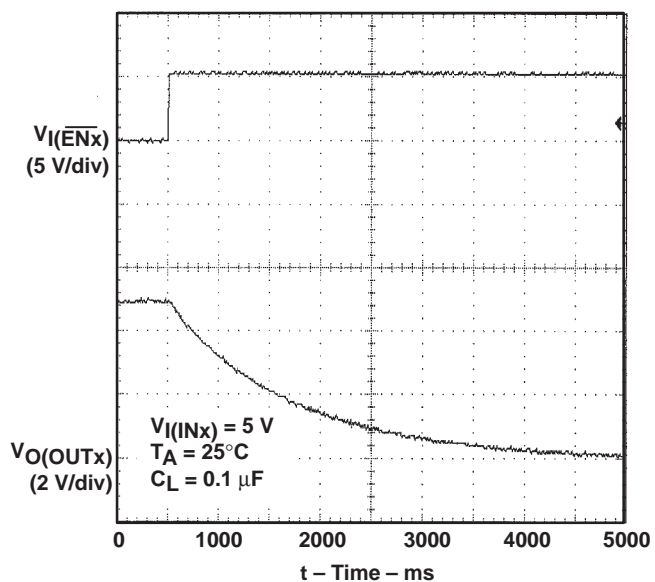


Figure 3. Turnoff Delay and Fall Time  
with 0.1- $\mu\text{F}$  Load



PARAMETER MEASUREMENT INFORMATION

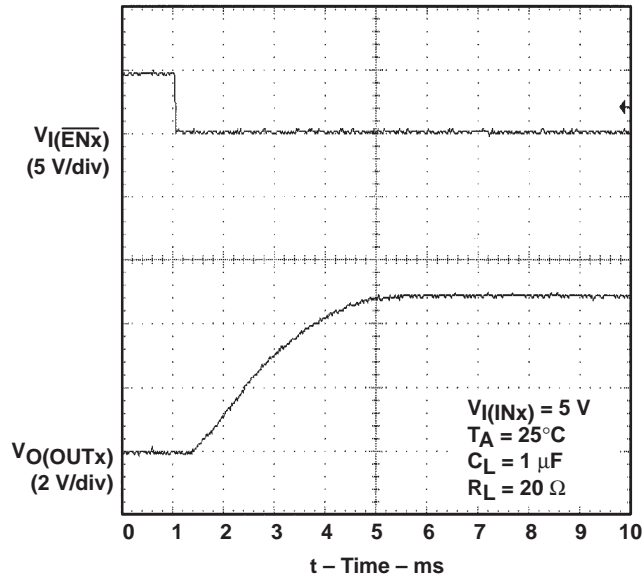


Figure 4. Turnon Delay and Rise Time with 1-μF Load

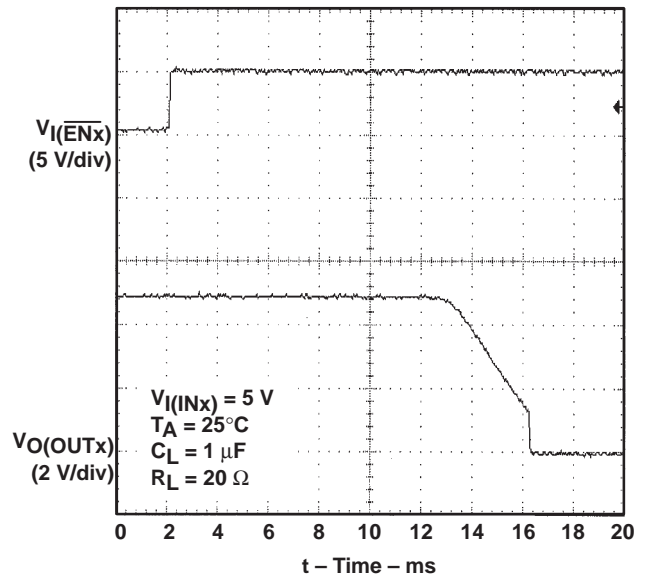


Figure 5. Turnoff Delay and Fall Time with 1-μF Load

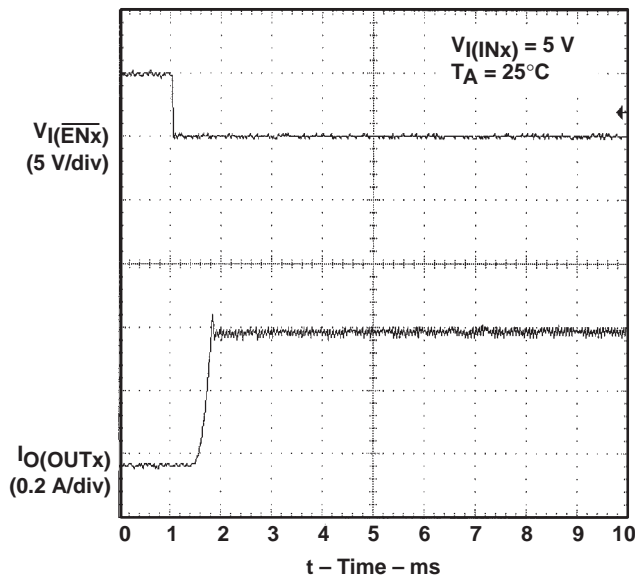


Figure 6. TPS2047, Short-Circuit Current, Device Enabled into Short

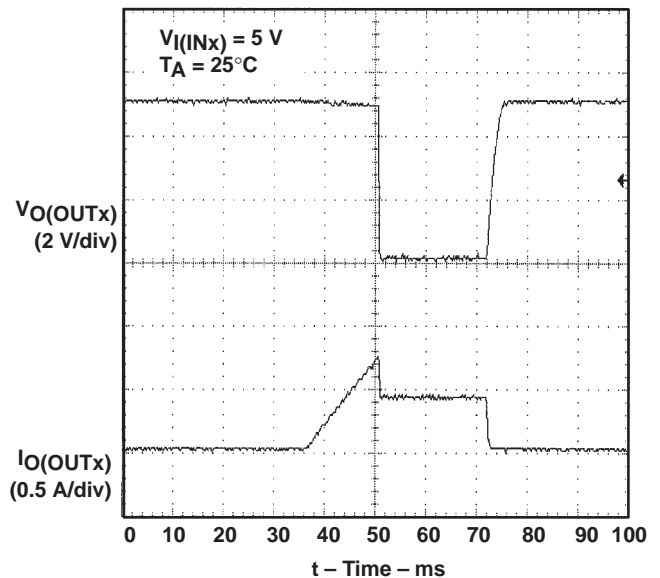


Figure 7. TPS2047, Threshold Trip Current with Ramped Load on Enabled Device

# TPS2047, TPS2057 TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

## PARAMETER MEASUREMENT INFORMATION

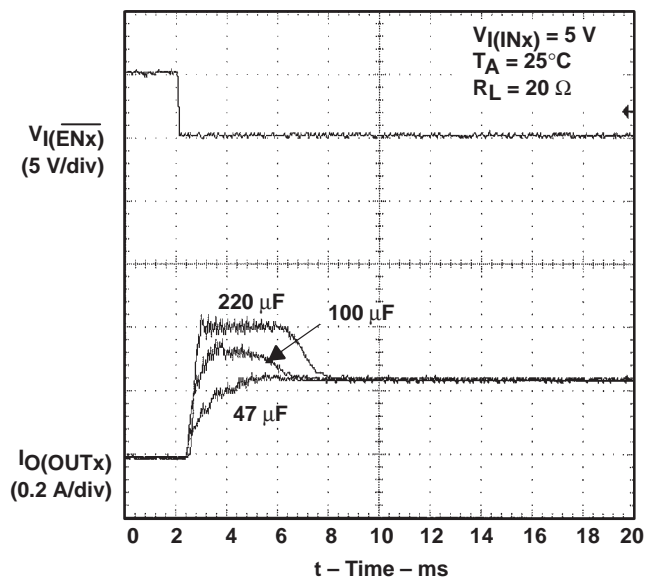


Figure 8. Inrush Current with 220- $\mu\text{F}$ , 100- $\mu\text{F}$  and 47- $\mu\text{F}$  Load Capacitance

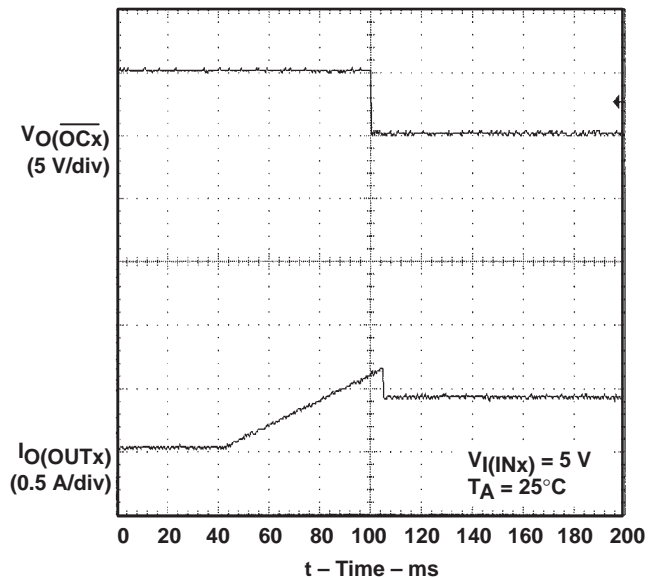


Figure 9. Ramped Load on Enabled Device

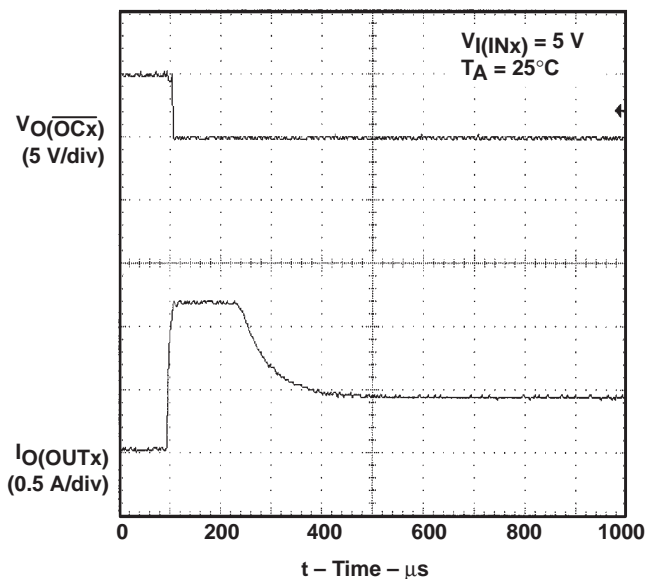


Figure 10. 4- $\Omega$  Load Connected to Enabled Device

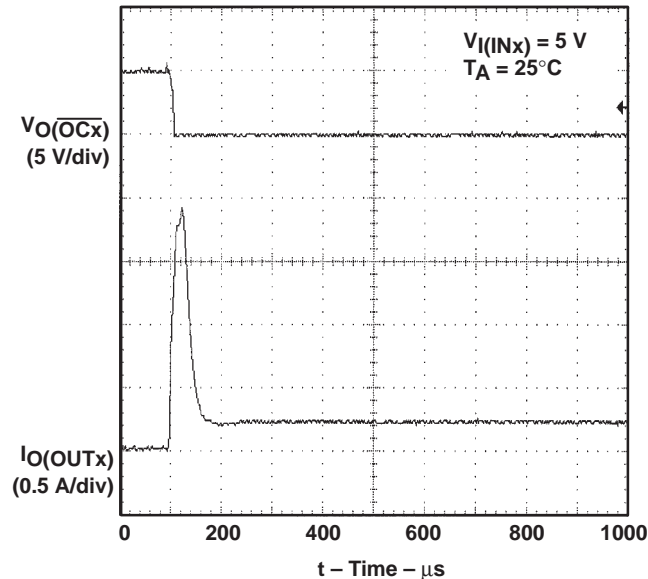


Figure 11. 1- $\Omega$  Load Connected to Enabled Device

TYPICAL CHARACTERISTICS

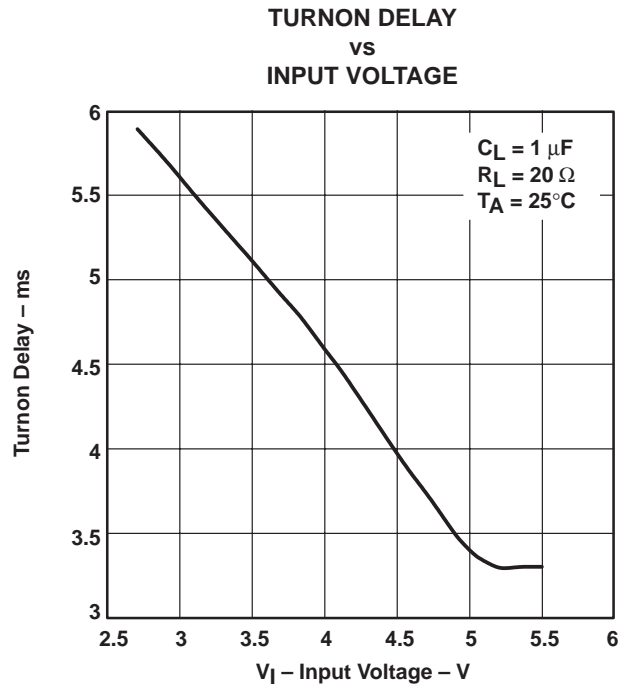


Figure 12

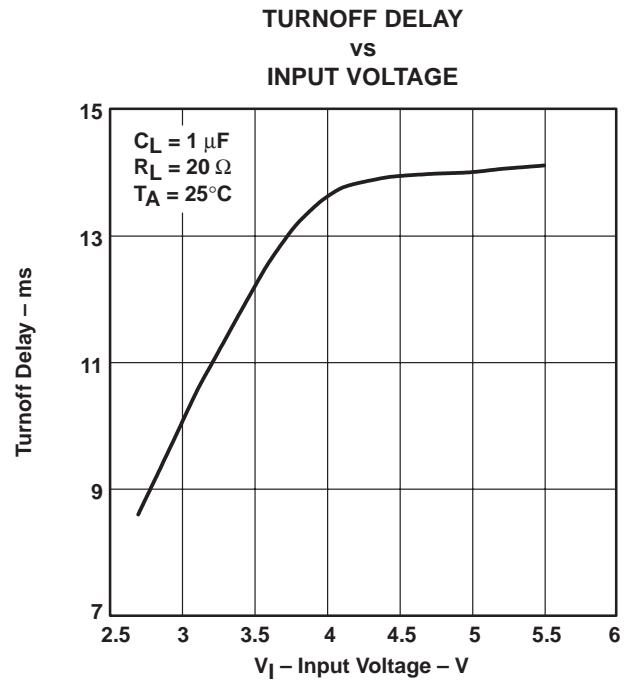


Figure 13

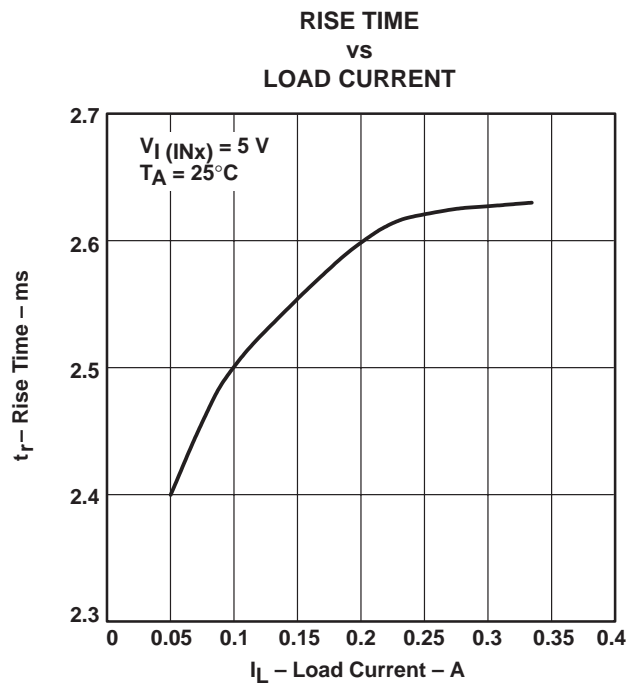


Figure 14

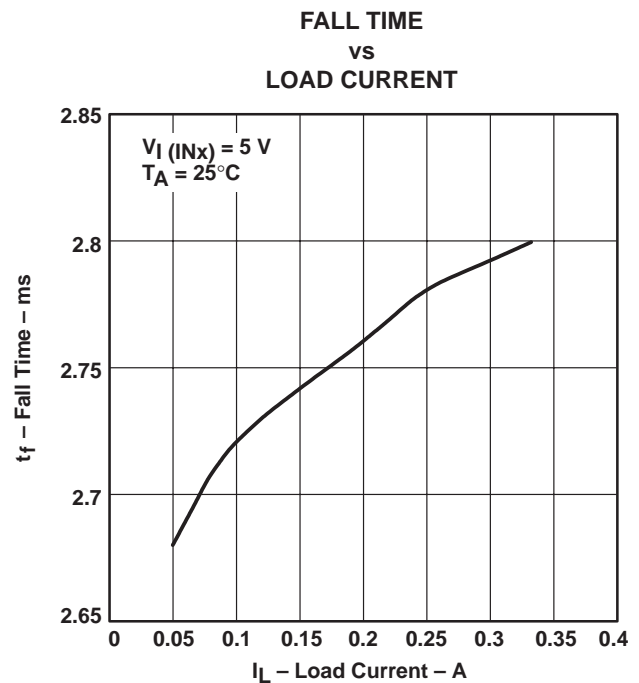


Figure 15

# TPS2047, TPS2057 TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

## TYPICAL CHARACTERISTICS

SUPPLY CURRENT, OUTPUT ENABLED  
vs  
JUNCTION TEMPERATURE

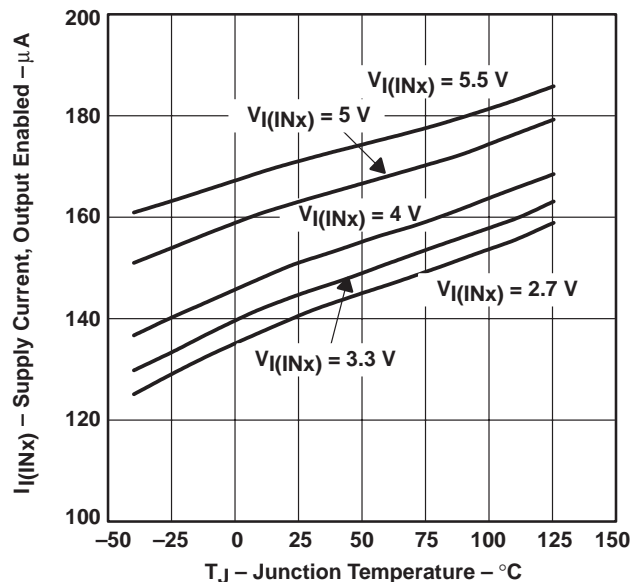


Figure 16

SUPPLY CURRENT, OUTPUT DISABLED  
vs  
JUNCTION TEMPERATURE

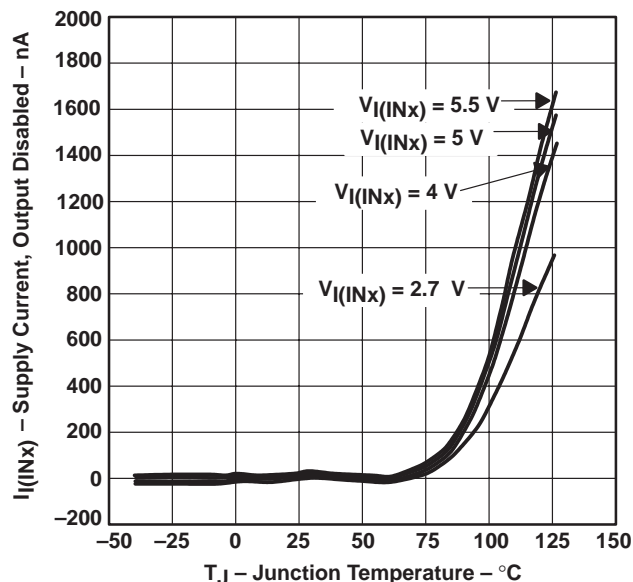


Figure 17

SUPPLY CURRENT, OUTPUT ENABLED  
vs  
INPUT VOLTAGE

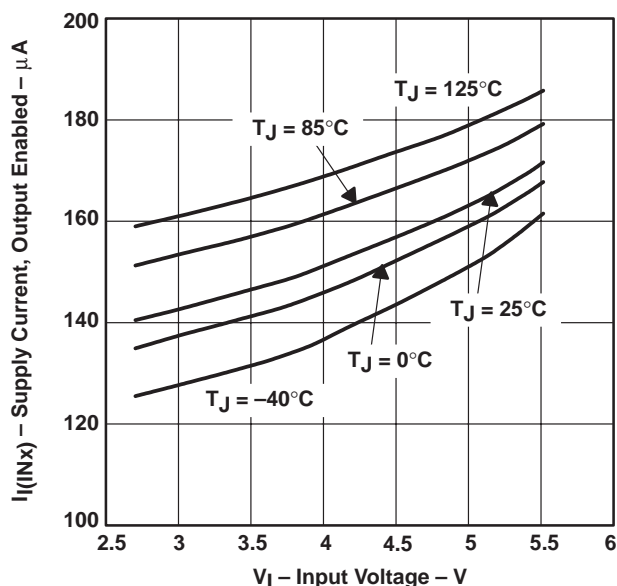


Figure 18

SUPPLY CURRENT, OUTPUT DISABLED  
vs  
INPUT VOLTAGE

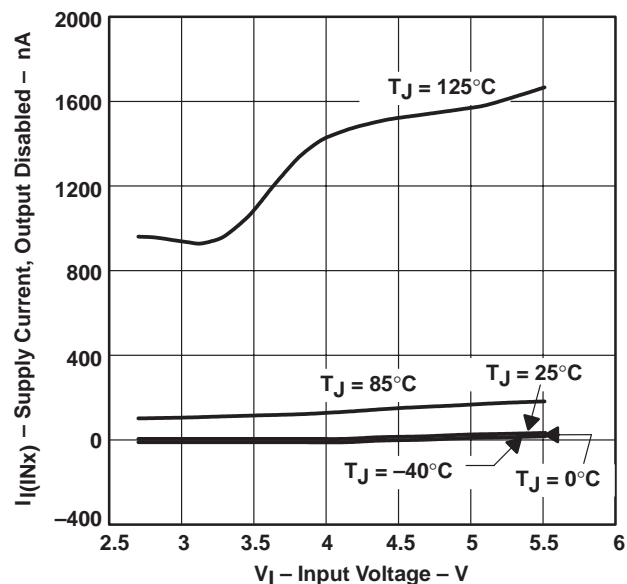


Figure 19

TYPICAL CHARACTERISTICS

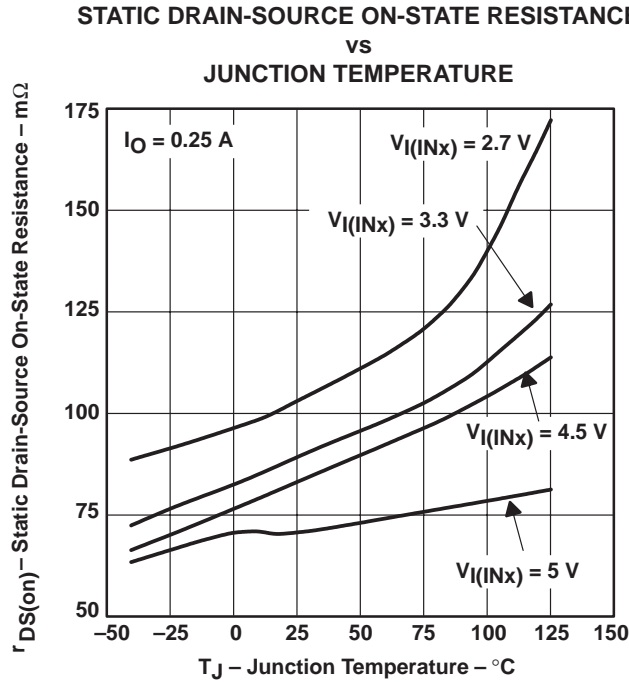


Figure 20

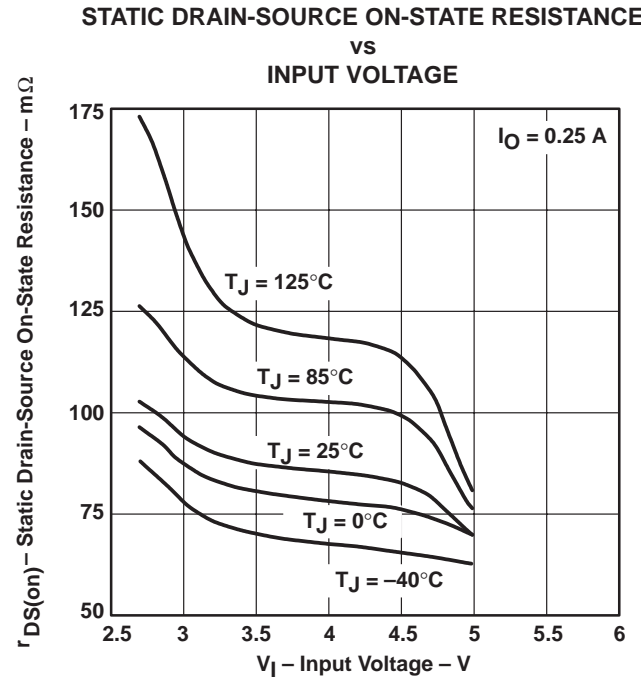


Figure 21

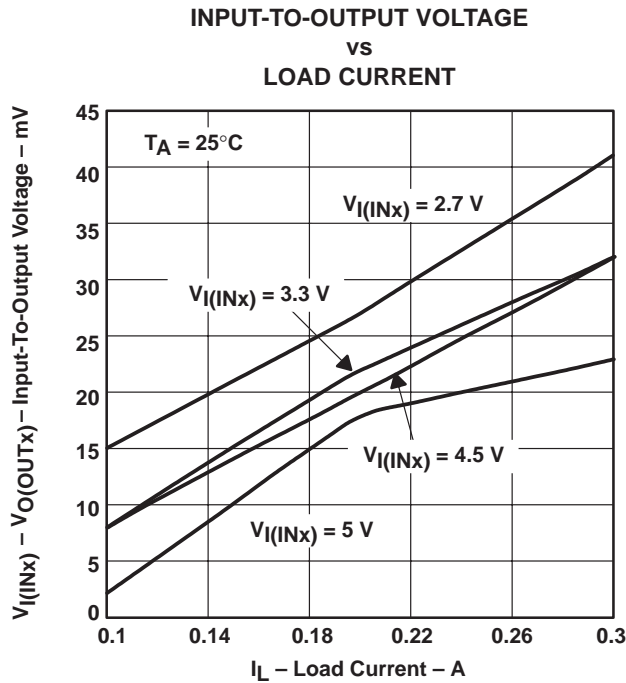


Figure 22

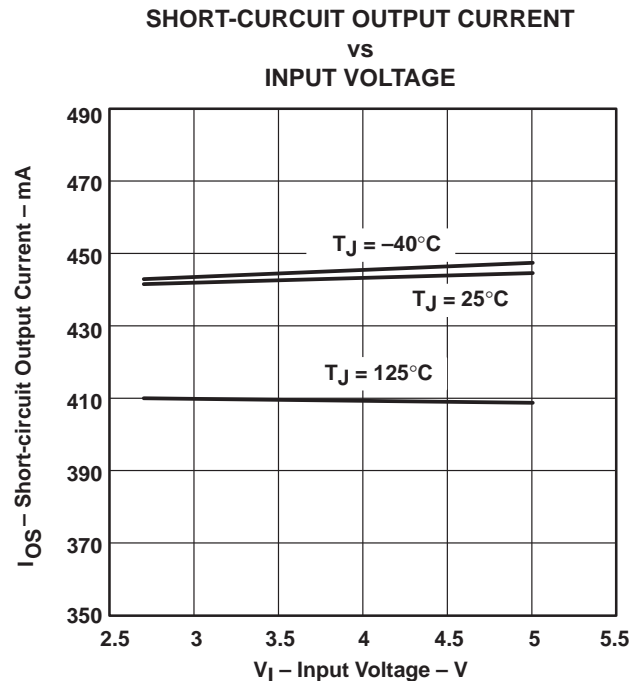


Figure 23

TYPICAL CHARACTERISTICS

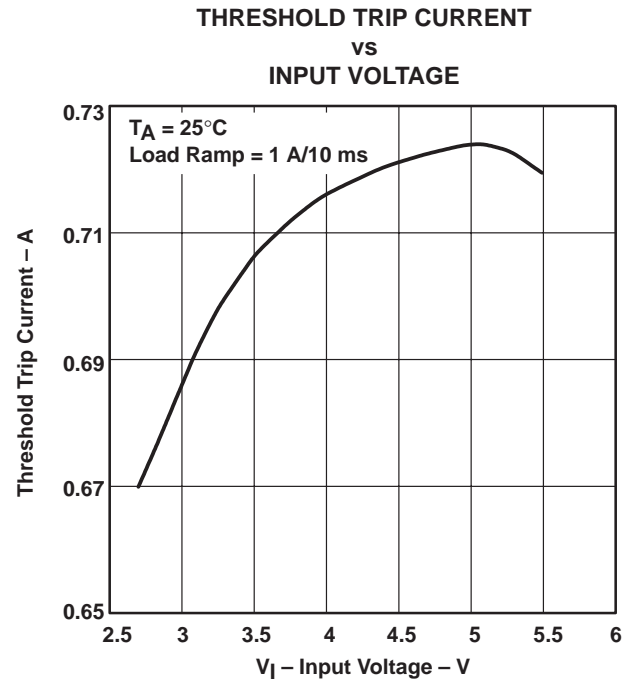


Figure 24

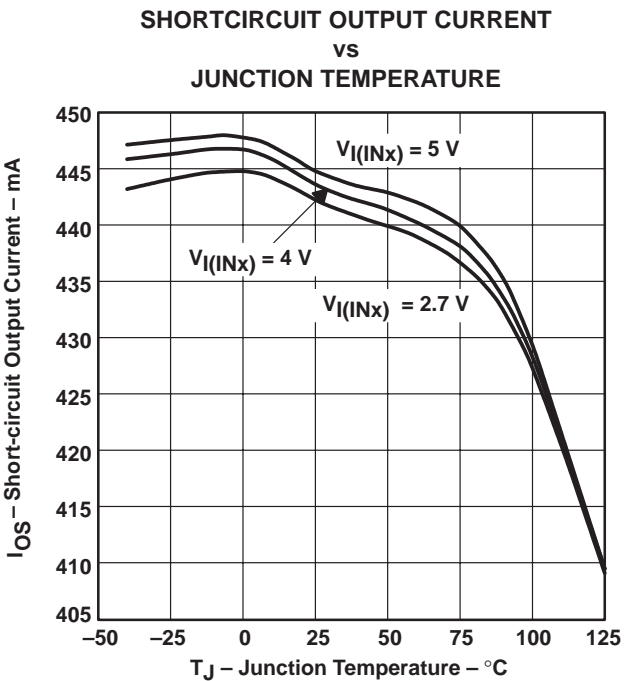


Figure 25

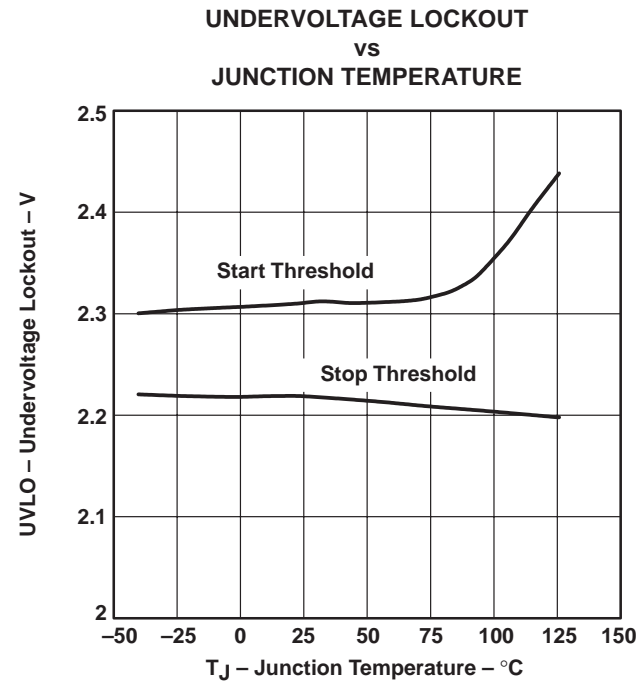


Figure 26

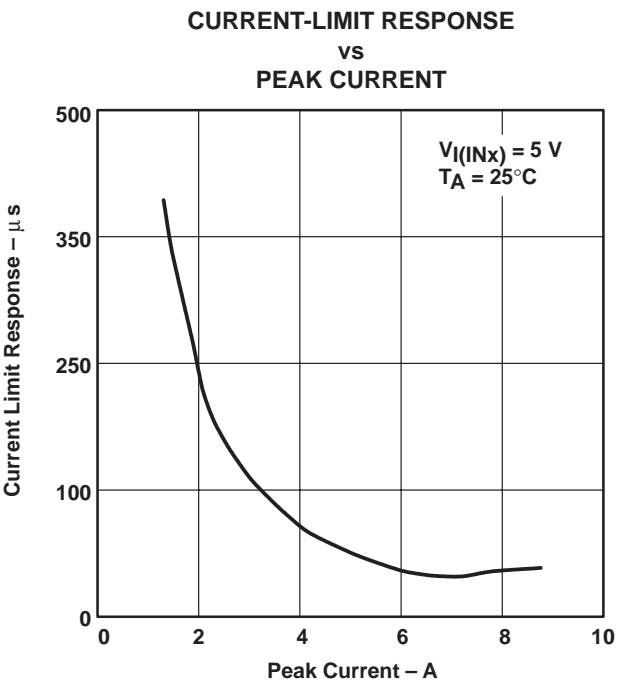


Figure 27

## TYPICAL CHARACTERISTICS

OVERCURRENT ( $\overline{OCx}$ ) RESPONSE TIME  
vs  
PEAK CURRENT

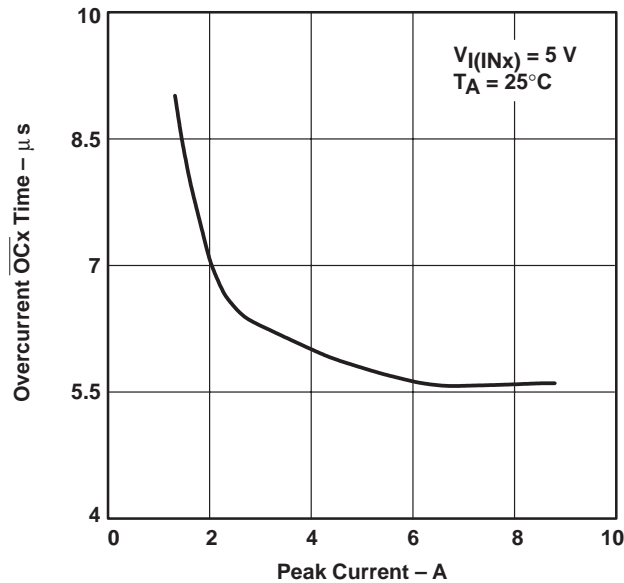


Figure 28

## APPLICATION INFORMATION

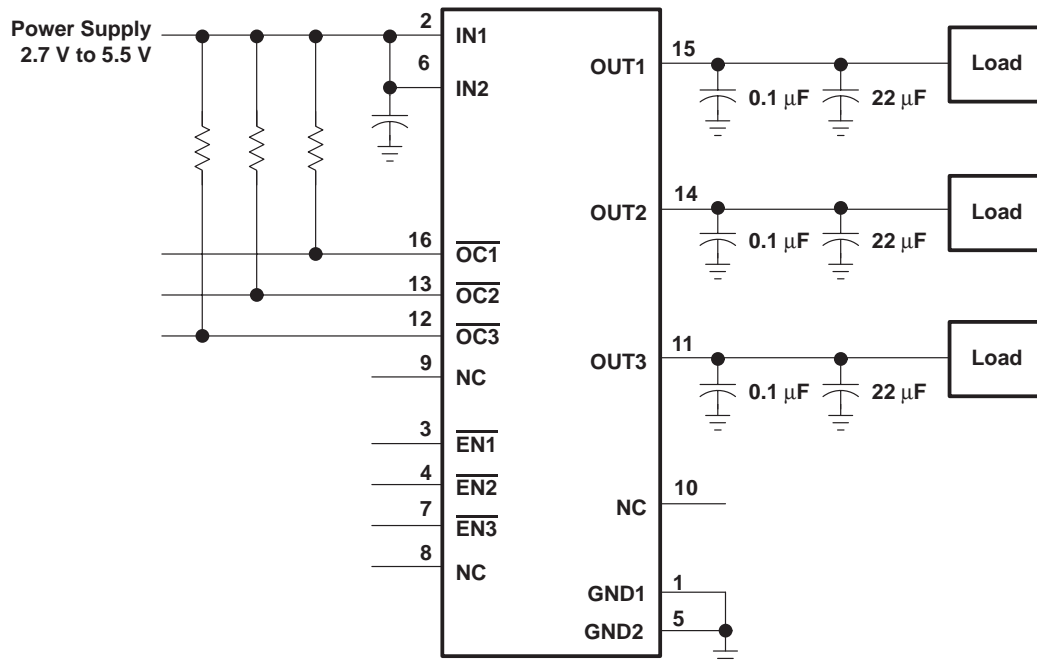


Figure 29. Typical Application

# TPS2047, TPS2057

## TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

---

### APPLICATION INFORMATION

#### power supply considerations

A 0.01- $\mu$ F to 0.1- $\mu$ F ceramic bypass capacitor between IN and GND, close to the device, is recommended. Placing a high-value electrolytic capacitor on the output pin(s) is recommended when the output load is heavy. This precaution reduces power-supply transients that may cause ringing on the input. Additionally, bypassing the output with a 0.01- $\mu$ F to 0.1- $\mu$ F ceramic capacitor improves the immunity of the device to short-circuit transients.

#### overcurrent

A sense FET checks for overcurrent conditions. Unlike current-sense resistors, sense FETs do not increase the series resistance of the current path. When an overcurrent condition is detected, the device maintains a constant output current and reduces the output voltage accordingly. Complete shutdown occurs only if the fault is present long enough to activate thermal limiting.

Three possible overload conditions can occur. In the first condition, the output has been shorted before the device is enabled or before  $V_{I(INX)}$  has been applied (see Figure 6). The TPS2047 and TPS2057 sense the short and immediately switch into a constant-current output.

In the second condition, the short occurs while the device is enabled. At the instant the short occurs, very high currents may flow for a short time before the current-limit circuit can react. After the current-limit circuit has tripped (reached the overcurrent trip threshold) the device switches into constant-current mode.

In the third condition, the load has been gradually increased beyond the recommended operating current. The current is permitted to rise until the current-limit threshold is reached or until the thermal limit of the device is exceeded (see Figure 7). The TPS2047 and TPS2057 are capable of delivering current up to the current-limit threshold without damaging the device. Once the threshold has been reached, the device switches into its constant-current mode.

#### $\overline{OC}$ response

The  $\overline{OC}$  open-drain output is asserted (active low) when an overcurrent or overtemperature condition is encountered. The output will remain asserted until the overcurrent or overtemperature condition is removed. Connecting a heavy capacitive load to an enabled device can cause momentary false overcurrent reporting from the inrush current flowing through the device, charging the downstream capacitor. An RC filter of 500  $\mu$ s (see Figure 30) can be connected to  $\overline{OCx}$  to reduce false overcurrent reporting caused by hot-plug switching events or extremely high capacitive loads. Using low-ESR electrolytic capacitors on the output lowers the inrush current flow through the device during hot-plug events by providing a low impedance energy source, thereby reducing erroneous overcurrent reporting.



## APPLICATION INFORMATION

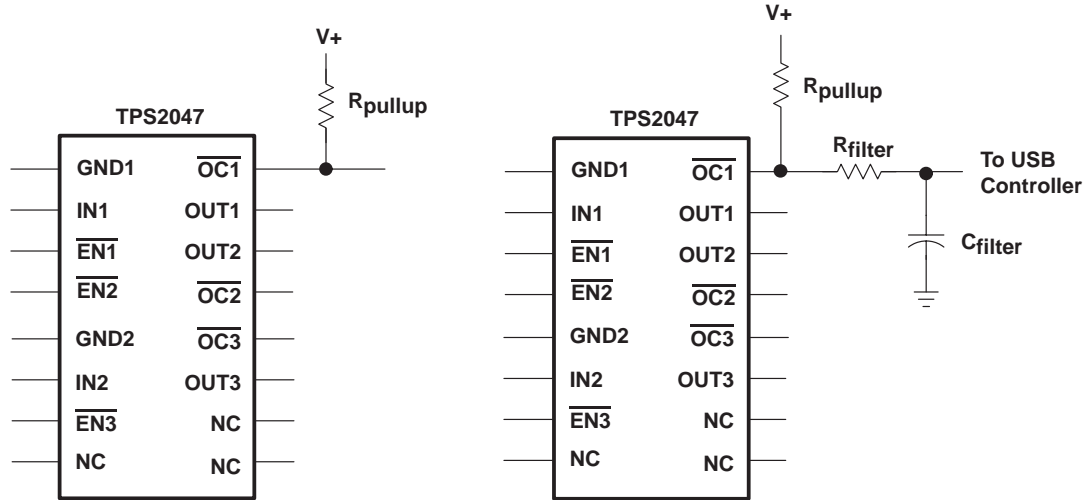


Figure 30. Typical Circuit for  $\overline{OC}$  Pin and RC Filter for Damping Inrush  $\overline{OC}$  Responses

### power dissipation and junction temperature

The low on-resistance on the n-channel MOSFET allows small surface-mount packages, such as SOIC, to pass large currents. The thermal resistances of these packages are high compared to those of power packages; it is good design practice to check power dissipation and junction temperature. The first step is to find  $r_{DS(on)}$  at the input voltage and operating temperature. As an initial estimate, use the highest operating ambient temperature of interest and read  $r_{DS(on)}$  from Figure 21. Next, calculate the power dissipation using:

$$P_D = r_{DS(on)} \times I^2$$

Finally, calculate the junction temperature:

$$T_J = P_D \times R_{\theta JA} + T_A$$

Where:

$T_A$  = Ambient Temperature °C

$R_{\theta JA}$  = Thermal resistance SOIC = 172°C/W

Compare the calculated junction temperature with the initial estimate. If they do not agree within a few degrees, repeat the calculation, using the calculated value as the new estimate. Two or three iterations are generally sufficient to get a reasonable answer.

### APPLICATION INFORMATION

#### thermal protection

Thermal protection prevents damage to the IC when heavy-overload or short-circuit faults are present for extended periods of time. The faults force the TPS2047 and TPS2057 into constant current mode, which causes the voltage across the high-side switch to increase; under short-circuit conditions, the voltage across the switch is equal to the input voltage. The increased dissipation causes the junction temperature to rise to high levels. The protection circuit senses the junction temperature of the switch and shuts it off. Hysteresis is built into the thermal sense circuit, and after the device has cooled approximately 20 degrees, the switch turns back on. The switch continues to cycle in this manner until the load fault or input power is removed.

The TPS2047 and TPS2057 implement a dual thermal trip to allow fully independent operation of the power distribution switches. In an overcurrent or short-circuit condition the junction temperature will rise. Once the die temperature rises to approximately 140°C, the internal thermal sense circuitry checks which power switch is in an overcurrent condition and turns that power switch off, thus isolating the fault without interrupting operation of the adjacent power switch. Should the die temperature exceed the first thermal trip point of 140°C and reach 160°C, both switches turn off. The  $\overline{OC}$  open-drain output is asserted (active low) when overtemperature or overcurrent occurs.

#### undervoltage lockout (UVLO)

An undervoltage lockout ensures that the power switch is in the off state at power up. Whenever the input voltage falls below approximately 2 V, the power switch will be quickly turned off. This facilitates the design of hot-insertion systems where it is not possible to turn off the power switch before input power is removed. The UVLO will also keep the switch from being turned on until the power supply has reached at least 2 V, even if the switch is enabled. Upon reinsertion, the power switch will be turned on with a controlled rise time to reduce EMI and voltage overshoots.

#### Universal Serial Bus (USB) applications

The universal serial bus (USB) interface is a 12-Mb/s, or 1.5-Mb/s, multiplexed serial bus designed for low-to-medium bandwidth PC peripherals (e.g., keyboards, printers, scanners, and mice). The four-wire USB interface is conceived for dynamic attach-detach (hot plug-unplug) of peripherals. Two lines are provided for differential data, and two lines are provided for 5-V power distribution.

USB data is a 3.3-V level signal, but power is distributed at 5 V to allow for voltage drops in cases where power is distributed through more than one hub across long cables. Each function must provide its own regulated 3.3 V from the 5-V input or its own internal power supply.

The USB specification defines the following five classes of devices, each differentiated by power-consumption requirements:

- Hosts/self-powered hubs (SPH)
- Bus-powered hubs (BPH)
- Low-power, bus-powered functions
- High-power, bus-powered functions
- Self-powered functions

Bus-powered hubs distribute data and power to downstream functions. The TPS2047 and TPS2057 can provide power-distribution solutions for many of these classes of devices.

## APPLICATION INFORMATION

### bus-powered hubs

Bus-powered hubs obtain all power from upstream ports and often contain an embedded function. The hubs are required to power up with less than one unit load. The BPH usually has one embedded function, and power is always available to the controller of the hub. If the embedded function and hub require more than 100 mA on power up, the power to the embedded function may need to be kept off until enumeration is completed. This can be accomplished by removing power or by shutting off the clock to the embedded function. Power switching the embedded function is not necessary if the aggregate power draw for the function and controller is less than one unit load. The total current drawn by the bus-powered device is the sum of the current to the controller, the embedded function, and the downstream ports, and it is limited to 500 mA from an upstream port.

### low-power bus-powered functions and high-power bus-powered functions

Both low-power and high-power bus-powered functions obtain all power from upstream ports; low-power functions always draw less than 100 mA, and high-power functions must draw less than 100 mA at power up and can draw up to 500 mA after enumeration. If the load of the function is more than the parallel combination of 44  $\Omega$  and 10  $\mu\text{F}$  at power up, the device must implement inrush current limiting (see Figure 31).

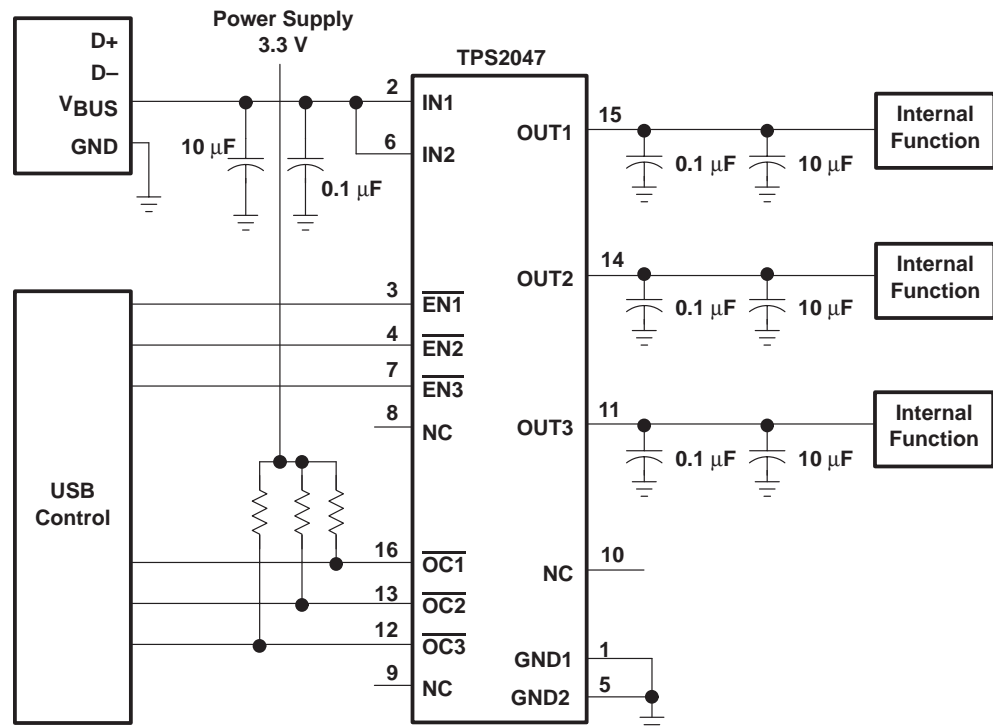


Figure 31. High-Power Bus-Powered Function

## **APPLICATION INFORMATION**


### **USB power-distribution requirements**

USB can be implemented in several ways, and, regardless of the type of USB device being developed, several power distribution features must be implemented.

- Bus-Powered Hubs must:
  - Enable/disable power to downstream ports
  - Power up at <100 mA
  - Limit inrush current (<44  $\Omega$  and 10  $\mu$ F)
- Functions must:
  - Limit inrush currents
  - Power up at <100 mA

The feature set of the TPS2047 and TPS2057 allows them to meet each of these requirements. The integrated current-limiting and overcurrent reporting is required by hosts and self-powered hubs. The logic-level enable and controlled rise times meet the need of both input and output ports on bus-power hubs, as well as the input ports for bus-power functions (see Figure 32).

## APPLICATION INFORMATION

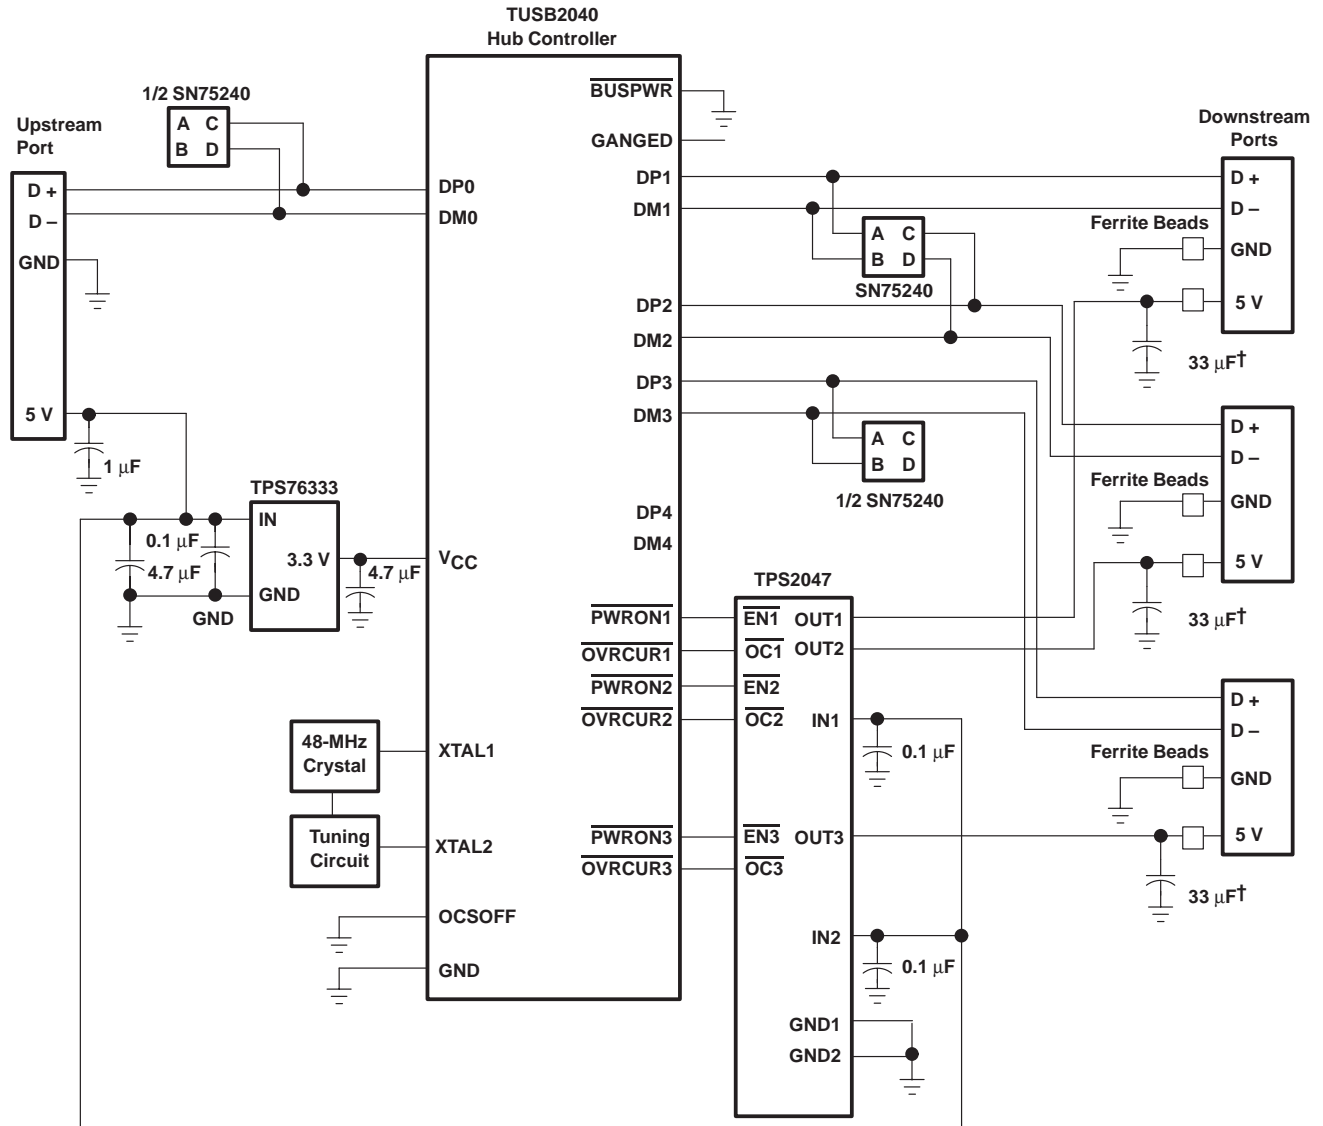

† USB rev 1.1 requires 120 µF per hub.

Figure 32. Bus-Powered Hub Implementation

# TPS2047, TPS2057 TRIPLE CURRENT-LIMITED POWER-DISTRIBUTION SWITCHES

SLVS194 – APRIL 1999

## APPLICATION INFORMATION

### generic hot-plug applications (see Figure 33)

In many applications it may be necessary to remove modules or pc boards while the main unit is still operating. These are considered hot-plug applications. Such implementations require the control of current surges seen by the main power supply and the card being inserted. The most effective way to control these surges is to limit and slowly ramp the current and voltage being applied to the card, similar to the way in which a power supply normally turns on. Due to the controlled rise times and fall times of the TPS2047 and TPS2057, these devices can be used to provide a softer start-up to devices being hot-plugged into a powered system. The UVLO feature of the TPS2047 and TPS2057 also ensures the switch will be off after the card has been removed, and the switch will be off during the next insertion. The UVLO feature guarantees a soft start with a controlled rise time for every insertion of the card or module.

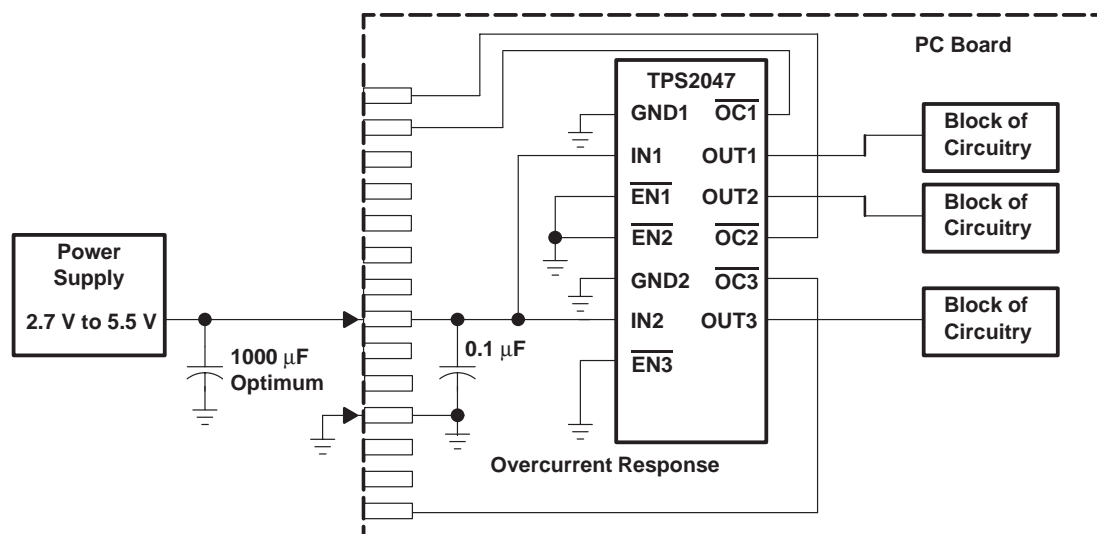


Figure 33. Typical Hot-Plug Implementation

By placing the TPS2047 or TPS2057 between the  $V_{CC}$  input and the rest of the circuitry, the input power will reach these devices first after insertion. The typical rise time of the switch is approximately 2.5 ms, providing a slow voltage ramp at the output of the device. This implementation controls system surge currents and provides a hot-plugging mechanism for any device.

## PACKAGING INFORMATION

| Orderable part number     | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS2057DR</a> | Active        | Production           | SOIC (D)   16  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | TPS2057             |
| TPS2057DR.A               | Active        | Production           | SOIC (D)   16  | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | TPS2057             |
| TPS2057DR.B               | Active        | Production           | SOIC (D)   16  | 2500   LARGE T&R      | -           | Call TI                              | Call TI                           | -40 to 125   |                     |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS2057DR | SOIC         | D               | 16   | 2500 | 330.0              | 16.4               | 6.5     | 10.3    | 2.1     | 8.0     | 16.0   | Q1            |



## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS2057DR | SOIC         | D               | 16   | 2500 | 340.5       | 336.1      | 32.0        |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025