



**LM5122 Boost Converter  
with  
LM5050-1 Reverse Battery Protection**

**TI reference design number: PMP7936 Rev A**

**Input: 4.5V – 42V  
Output: 13.8V @ 10A**

**DC – DC Test Results**

## Table of Contents

1	Circuit Description .....	3
2	Photos .....	3
3	Efficiency .....	6
3.1	LM5122 Boost Efficiency Data .....	7
3.2	LM5122 Boost with LM5050-1 Efficiency Data .....	8
4	Thermal .....	11
4.1	Thermal at 11V Input – 10A Load .....	11
4.2	Thermal at 6V Input – 8A Load .....	12
5	Power Up and Power Down .....	13
5.1	Power Up at 11V Input – No Load .....	13
5.2	Power Down at 11V Input – No Load .....	13
5.3	Power Up at 11V Input – 10A Load .....	14
5.4	Power Down at 11V Input – 10A Load .....	14
5.5	Turn On from UVLO at 11V Input – 10A Load .....	15
5.6	Turn Off from UVLO at 11V Input – 10A Load .....	15
6	Switching Voltages .....	16
6.1	11V Input – No Load .....	16
6.2	11V Input – 10A Load .....	16
6.3	11V Input – 10A Load .....	17
6.4	11V Input – 10A Load .....	17
6.5	6V Input – 8A Load .....	18
6.6	6V Input – 8A Load .....	18
6.7	4.5V Input – 7A Load .....	19
6.8	4.5V Input – 7A Load .....	19
7	Ripple Voltages .....	20
7.1	11V Input – 10A Load .....	20
7.2	11V Input – 10A Load .....	20
7.3	6V Input – 8A Load .....	21
7.4	6V Input – 8A Load .....	21
7.5	4.5V Input – 7A Load .....	22
7.6	4.5V Input – 7A Load .....	22
8	Bypass and Reverse .....	23
8.1	Bypass at 18V Input – 10A Load .....	23
8.2	Bypass at 40V Input – 1A Load .....	23
8.3	Reverse Battery Protection at -18V Input .....	24
9	Transient Response .....	25
9.1	11V Input – 5A Load Step .....	25
9.2	6V Input – 5A Load Step .....	25
9.3	11V to 7V Input Step – 10A Load .....	26
9.4	7V to 11V Input Step – 10A Load .....	26
10	Frequency Response .....	27
10.1	11V Input – 10A Load .....	27
10.2	6V Input – 8A Load .....	27

# PMP7936 Rev A Test Results


## 1 Circuit Description


PMP7936 is a boost converter capable of 138W output power and targeted for automotive applications. This design uses the LM5122 synchronous boost current-mode PWM controller. The circuit will start at a minimum input of 6.5V and has an operating input voltage range of 4.5V to 42V. The output is 13.8V at 8A continuous, 10A peak. The LM5122 incorporates bypass mode operation, so that when  $V_{IN} > 13.8V$ ,  $V_{OUT}$  is approximately equal to  $V_{IN}$ . Reverse battery protection is provided by the LM5050-1 high side OR-ing FET controller.

All tests were performed at room temperature on an open bench.



## 2 Photos

The LM5122 boost circuit was built on PMP7924 Rev A printed circuit board. This is a four layer board with overall dimensions of 4.31 inches x 3.85 inches.

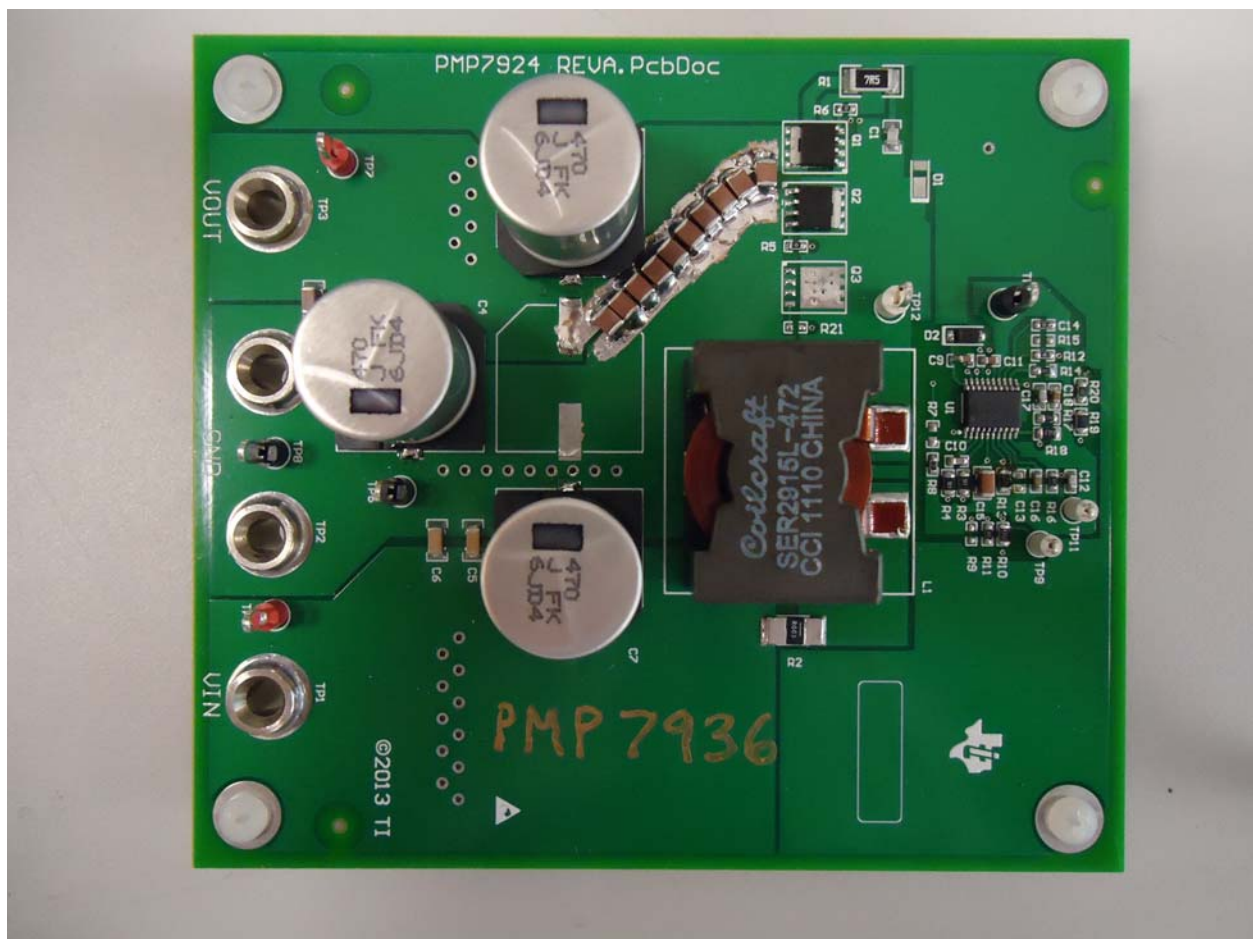


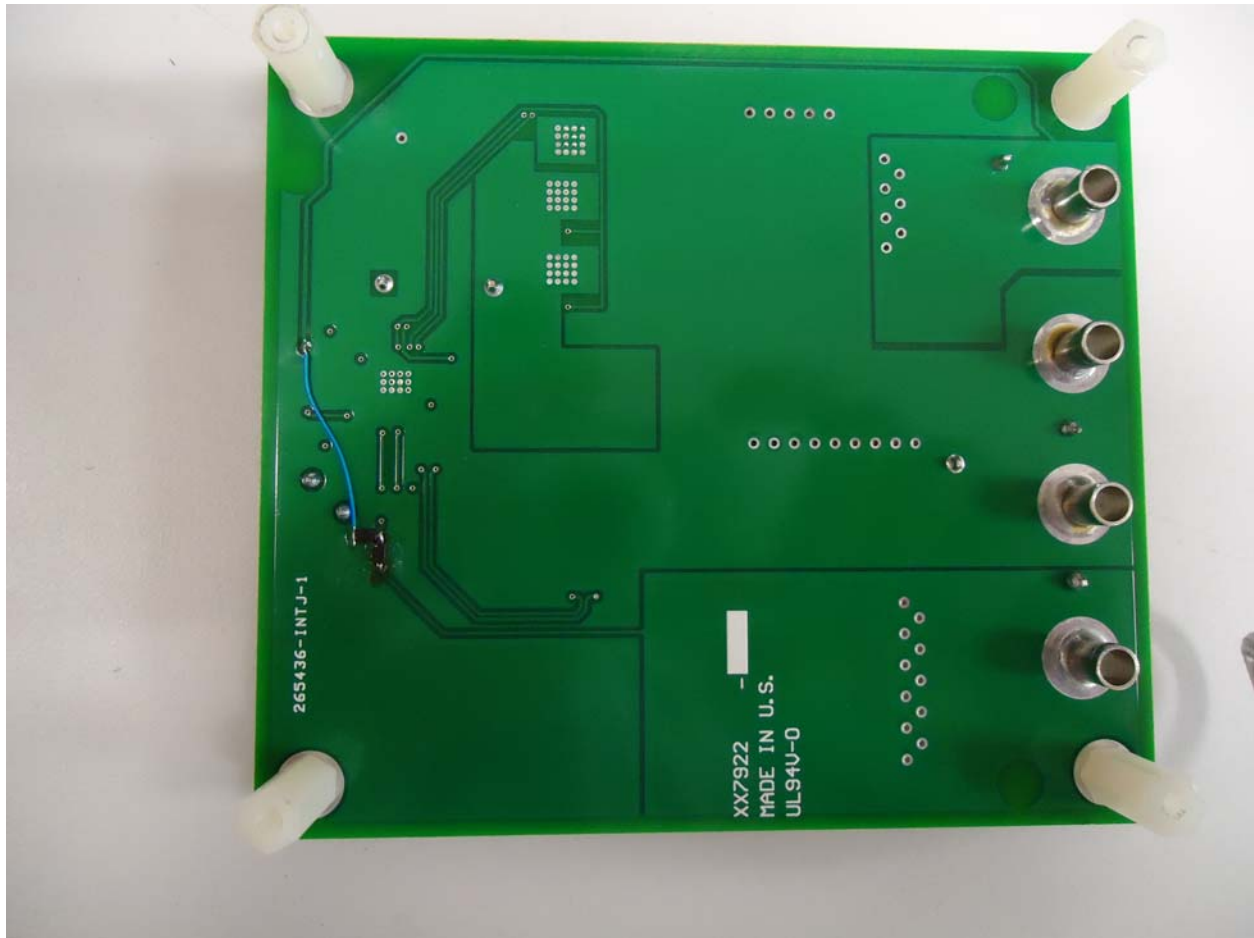


The reverse battery protection circuit was built on the LM5050-1 evaluation board. This is a two layer board with overall dimensions of 1.50 inches x 2.25 inches.

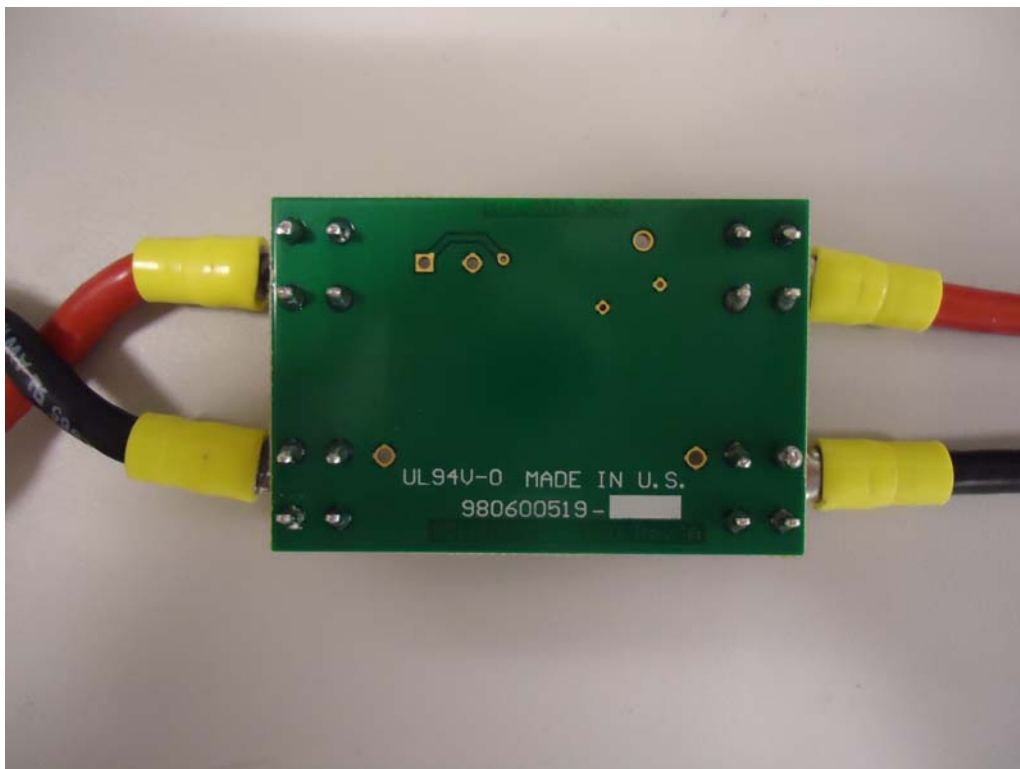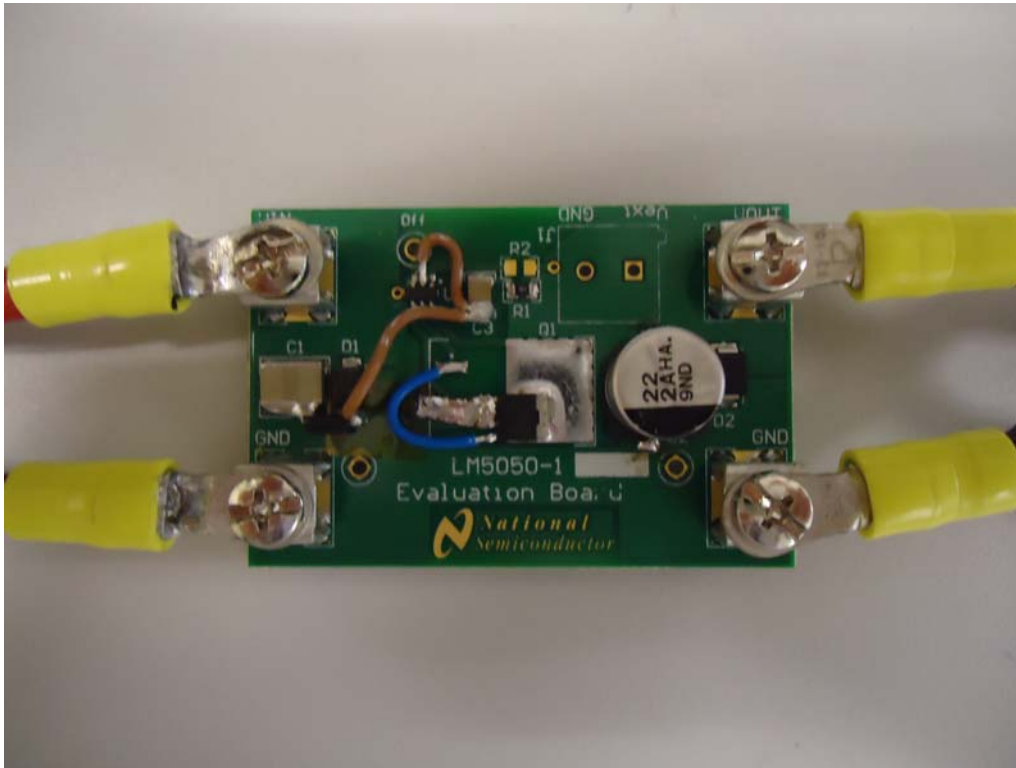

# PMP7936 Rev A Test Results

## 3 Efficiency

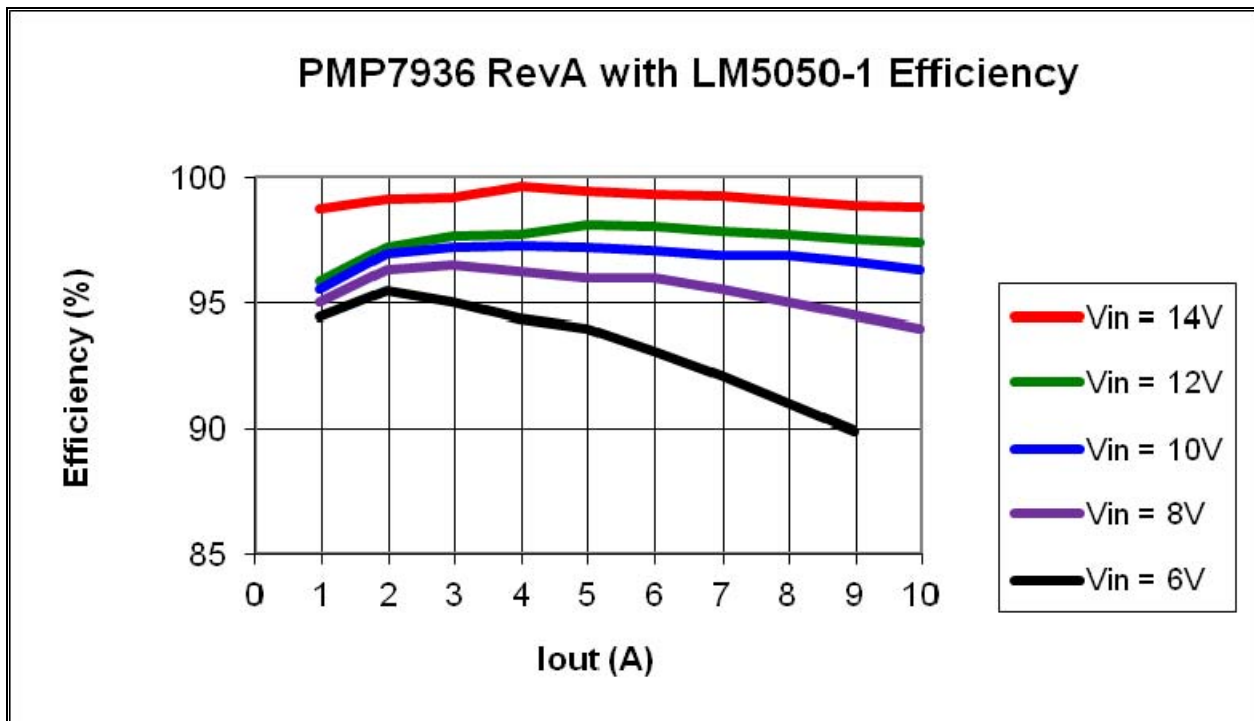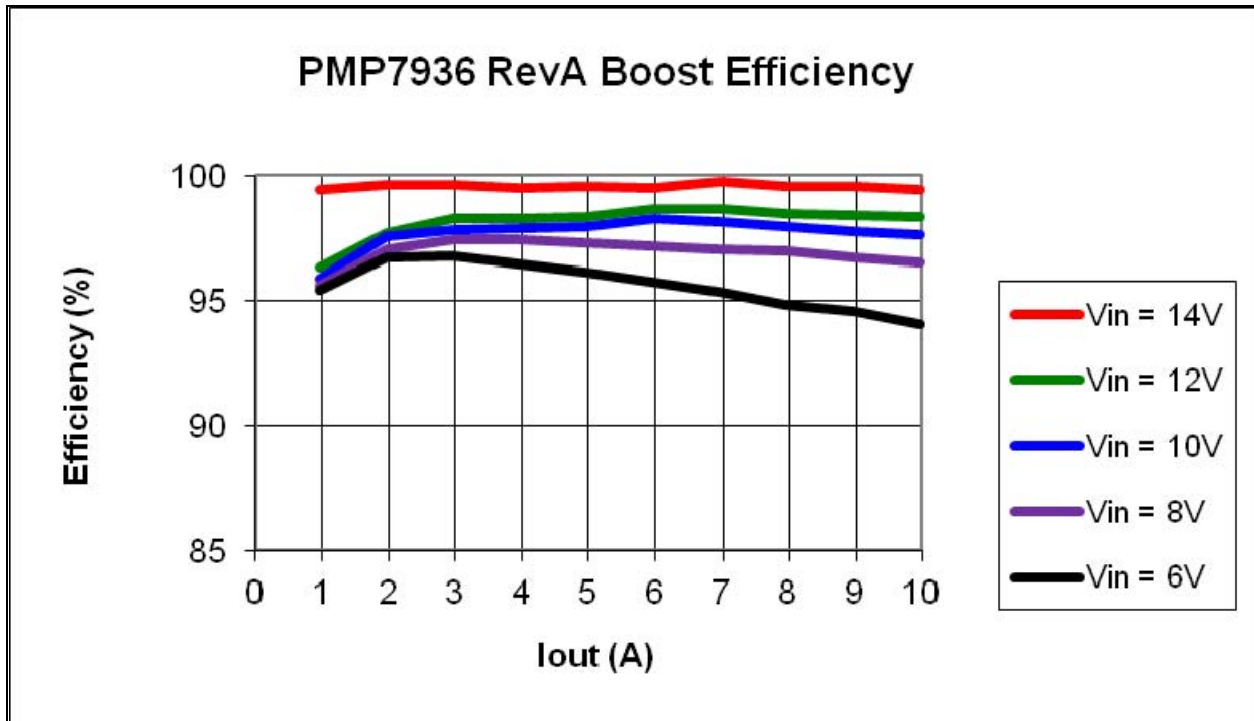

## PMP7936 Rev A Test Results

### 3.1 LM5122 Boost Efficiency Data

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
14.005	0.005	14.005	0.000	0.000	0.07	0.00	0.07
14.005	0.965	13.996	0.960	99.418	13.51	13.44	0.08
14.005	1.965	13.986	1.960	99.610	27.52	27.41	0.11
14.005	2.965	13.976	2.960	99.625	41.52	41.37	0.16
14.005	3.970	13.966	3.960	99.470	55.60	55.31	0.29
14.005	4.965	13.956	4.960	99.550	69.53	69.22	0.31
14.005	5.965	13.946	5.960	99.495	83.54	83.12	0.42
14.005	6.965	13.936	6.980	99.722	97.54	97.27	0.27
14.005	7.970	13.926	7.980	99.561	111.62	111.13	0.49
14.005	8.965	13.916	8.980	99.531	125.55	124.97	0.59
14.005	9.965	13.906	9.980	99.443	139.56	138.78	0.78

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
12.001	0.030	13.785	0.000	0.000	0.36	0.00	0.36
12.001	1.145	13.785	0.960	96.306	13.74	13.23	0.51
12.001	2.305	13.785	1.960	97.673	27.66	27.02	0.64
12.001	3.460	13.785	2.960	98.266	41.52	40.80	0.72
12.001	4.630	13.785	3.960	98.243	55.56	54.59	0.98
12.001	5.795	13.786	4.960	98.322	69.55	68.38	1.17
12.001	6.965	13.786	5.980	98.628	83.59	82.44	1.15
12.001	8.130	13.786	6.980	98.625	97.57	96.23	1.34
12.001	9.310	13.786	7.980	98.463	111.73	110.01	1.72
12.001	10.485	13.786	8.980	98.385	125.83	123.80	2.03
12.001	11.660	13.786	9.980	98.322	139.93	137.58	2.35

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
10.002	0.040	13.785	0.000	0.000	0.40	0.00	0.40
10.002	1.380	13.785	0.960	95.876	13.80	13.23	0.57
10.002	2.770	13.785	1.960	97.521	27.71	27.02	0.69
10.002	4.170	13.785	2.960	97.831	41.71	40.80	0.90
10.002	5.575	13.785	3.960	97.897	55.76	54.59	1.17
10.003	6.980	13.785	4.960	97.927	69.82	68.37	1.45
10.003	8.390	13.786	5.980	98.231	83.93	82.44	1.48
10.002	9.805	13.786	6.980	98.120	98.07	96.23	1.84
10.003	11.230	13.786	7.980	97.933	112.33	110.01	2.32
10.002	12.660	13.786	8.980	97.767	126.63	123.80	2.83
10.003	14.090	13.786	9.980	97.617	140.94	137.58	3.36



Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
8.002	0.050	13.784	0.000	0.000	0.40	0.00	0.40
8.002	1.730	13.785	0.960	95.595	13.84	13.23	0.61
8.002	3.480	13.785	1.960	97.025	27.85	27.02	0.83
8.002	5.235	13.785	2.960	97.405	41.89	40.80	1.09
8.002	7.005	13.785	3.960	97.386	56.05	54.59	1.47
8.002	8.785	13.786	4.960	97.270	70.30	68.38	1.92
8.002	10.570	13.786	5.960	97.143	84.58	82.16	2.42
8.002	12.360	13.786	6.960	97.013	98.90	95.95	2.95
8.002	14.175	13.786	7.980	96.988	113.43	110.01	3.42
8.002	15.995	13.786	8.980	96.723	127.99	123.80	4.19
8.002	17.820	13.786	9.980	96.486	142.60	137.58	5.01

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
6.003	0.070	13.784	0.000	0.000	0.42	0.00	0.42
6.003	2.310	13.785	0.960	95.433	13.87	13.23	0.63
6.003	4.655	13.785	1.960	96.688	27.94	27.02	0.93
6.003	7.025	13.785	2.960	96.757	42.17	40.80	1.37
6.003	9.430	13.786	3.960	96.439	56.61	54.59	2.02
6.003	11.850	13.786	4.960	96.124	71.14	68.38	2.76
6.003	14.295	13.786	5.960	95.749	85.81	82.16	3.65
6.003	16.765	13.786	6.960	95.340	100.64	95.95	4.69
6.003	19.275	13.787	7.960	94.846	115.71	109.74	5.96
6.003	21.815	13.787	8.980	94.542	130.96	123.81	7.15
6.003	24.380	13.787	9.980	94.015	146.35	137.59	8.76

### 3.2 LM5122 Boost with LM5050-1 Efficiency Data

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
14.005	0.005	13.982	0.000	0.000	0.07	0.00	0.07
14.005	0.970	13.966	0.960	98.693	13.58	13.41	0.18
14.005	1.970	13.949	1.960	99.095	27.59	27.34	0.25
14.005	2.970	13.932	2.960	99.144	41.59	41.24	0.36
14.005	3.970	13.915	3.980	99.608	55.60	55.38	0.22
14.005	4.970	13.898	4.980	99.436	69.60	69.21	0.39
14.005	5.970	13.881	5.980	99.281	83.61	83.01	0.60
14.005	6.965	13.864	6.980	99.206	97.54	96.77	0.77
14.005	7.970	13.848	7.980	99.003	111.62	110.51	1.11
14.005	8.970	13.831	8.980	98.868	125.62	124.20	1.42
14.005	9.965	13.814	9.980	98.785	139.56	137.86	1.70



## PMP7936 Rev A Test Results

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
12.002	0.030	13.785	0.000	0.000	0.36	0.00	0.36
12.002	1.150	13.785	0.960	95.880	13.80	13.23	0.57
12.002	2.315	13.785	1.960	97.243	27.78	27.02	0.77
12.002	3.480	13.785	2.960	97.693	41.77	40.80	0.96
12.002	4.655	13.785	3.960	97.708	55.87	54.59	1.28
12.002	5.830	13.785	4.980	98.110	69.97	68.65	1.32
12.002	7.005	13.786	5.980	98.057	84.07	82.44	1.63
12.002	8.190	13.786	6.980	97.894	98.30	96.23	2.07
12.002	9.380	13.786	7.980	97.720	112.58	110.01	2.57
12.001	10.575	13.786	8.980	97.548	126.91	123.80	3.11
12.002	11.770	13.786	9.980	97.395	141.26	137.58	3.68

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
10.003	0.040	13.785	0.000	0.000	0.40	0.00	0.40
10.003	1.385	13.785	0.960	95.521	13.85	13.23	0.62
10.003	2.785	13.785	1.960	96.986	27.86	27.02	0.84
10.003	4.195	13.785	2.960	97.238	41.96	40.80	1.16
10.003	5.610	13.786	3.960	97.284	56.12	54.59	1.52
10.003	7.030	13.786	4.960	97.238	70.32	68.38	1.94
10.002	8.460	13.786	5.960	97.102	84.62	82.16	2.45
10.002	9.900	13.786	6.960	96.900	99.02	95.95	3.07
10.003	11.350	13.786	7.980	96.898	113.53	110.01	3.52
10.003	12.810	13.786	8.980	96.613	128.14	123.80	4.34
10.002	14.280	13.786	9.980	96.328	142.83	137.58	5.24

Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
8.002	0.050	13.785	0.000	0.000	0.40	0.00	0.40
8.002	1.740	13.785	0.960	95.045	13.92	13.23	0.69
8.002	3.505	13.785	1.960	96.333	28.05	27.02	1.03
8.002	5.285	13.785	2.960	96.484	42.29	40.80	1.49
8.002	7.090	13.786	3.960	96.225	56.73	54.59	2.14
8.002	8.900	13.786	4.960	96.013	71.22	68.38	2.84
8.002	10.735	13.786	5.980	95.971	85.90	82.44	3.46
8.002	12.585	13.786	6.980	95.552	100.71	96.23	4.48
8.002	14.470	13.786	7.980	95.011	115.79	110.01	5.78
8.002	16.370	13.786	8.980	94.508	130.99	123.80	7.19
8.002	18.295	13.786	9.980	93.981	146.40	137.58	8.81



## PMP7936 Rev A Test Results

---



Vin (V)	Iin (A)	Vout (V)	Iout (A)	Efficiency (%)	Pin (W)	Pout (W)	Losses (W)
6.003	0.070	13.784	0.000	0.000	0.42	0.00	0.42
6.003	2.335	13.785	0.960	94.411	14.02	13.23	0.78
6.003	4.715	13.785	1.960	95.458	28.30	27.02	1.29
6.004	7.155	13.785	2.960	94.983	42.96	40.80	2.16
6.003	9.635	13.786	3.960	94.387	57.84	54.59	3.25
6.004	12.165	13.786	4.980	93.997	73.04	68.65	4.38
6.004	14.755	13.786	5.980	93.059	88.59	82.44	6.15
6.003	17.410	13.786	6.980	92.072	104.51	96.23	8.29
6.004	20.140	13.787	7.980	90.986	120.92	110.02	10.90
6.004	22.940	13.787	8.980	89.890	137.73	123.81	13.92
6.004	9.965	5.174	9.980	86.306	59.83	51.64	8.19

## 4 Thermal

### 4.1 Thermal at 11V Input – 10A Load

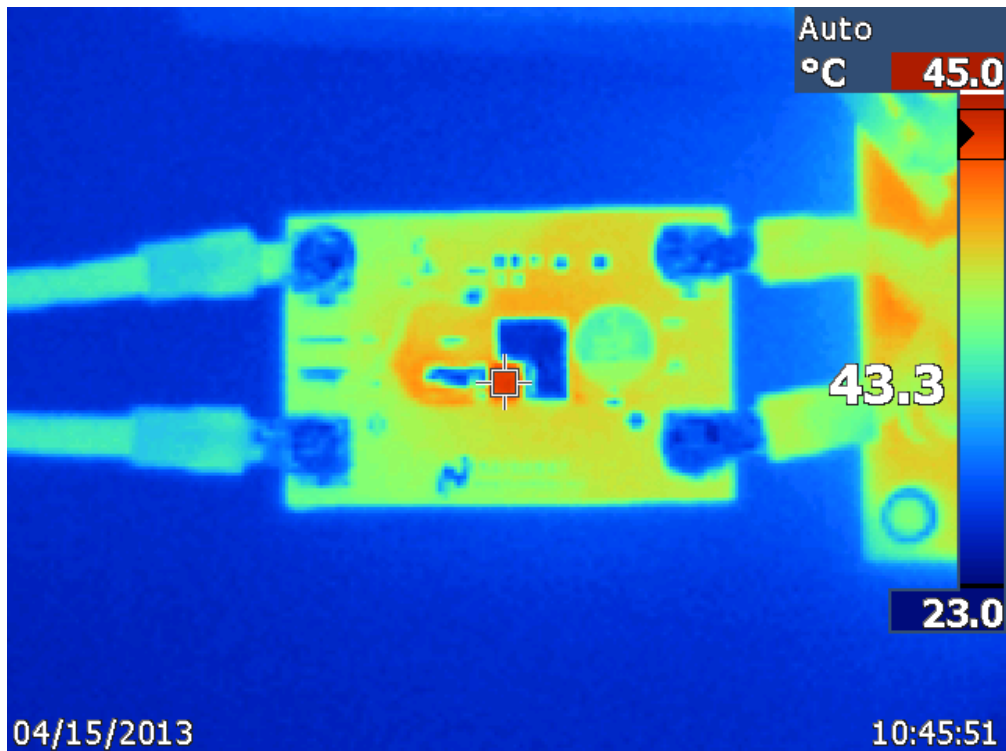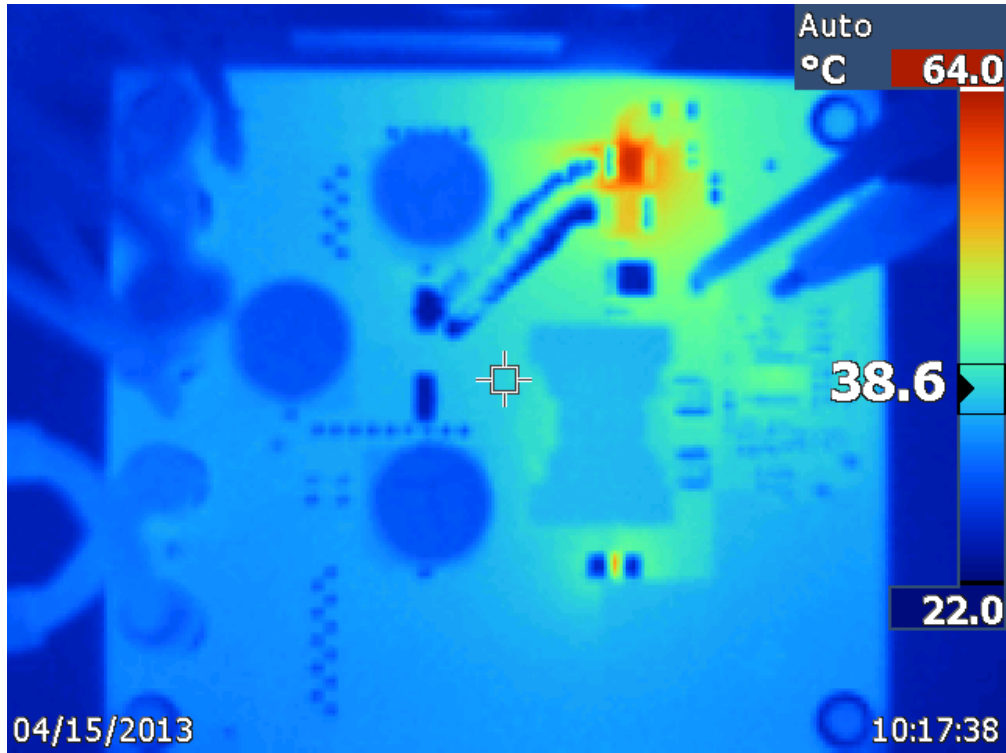


## 4.2 Thermal at 6V Input – 8A Load

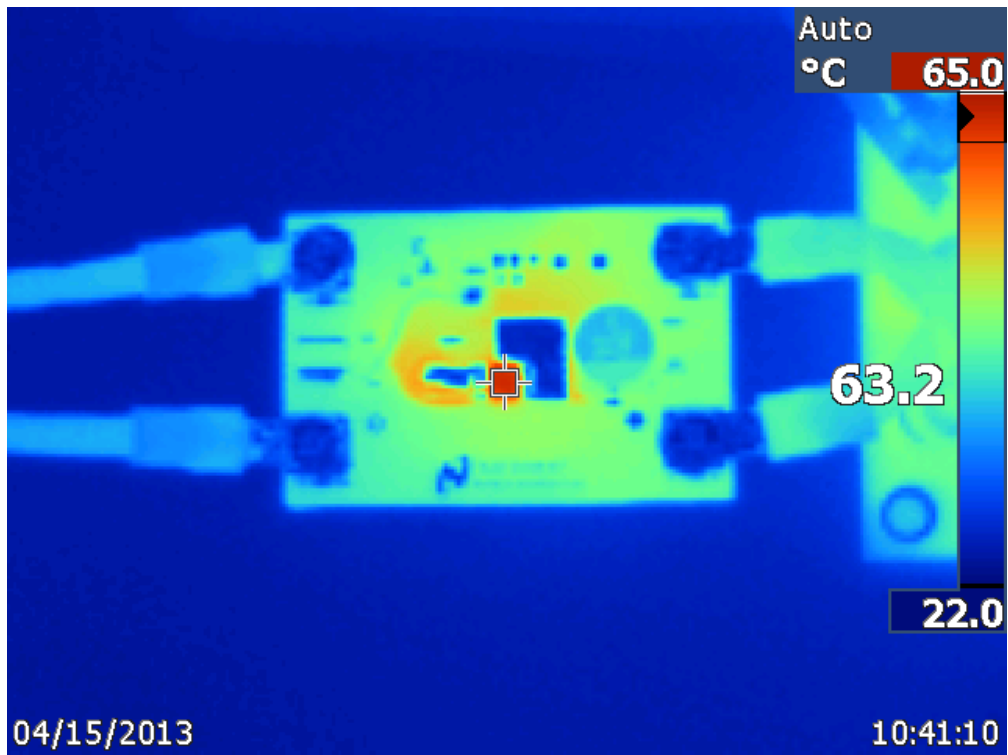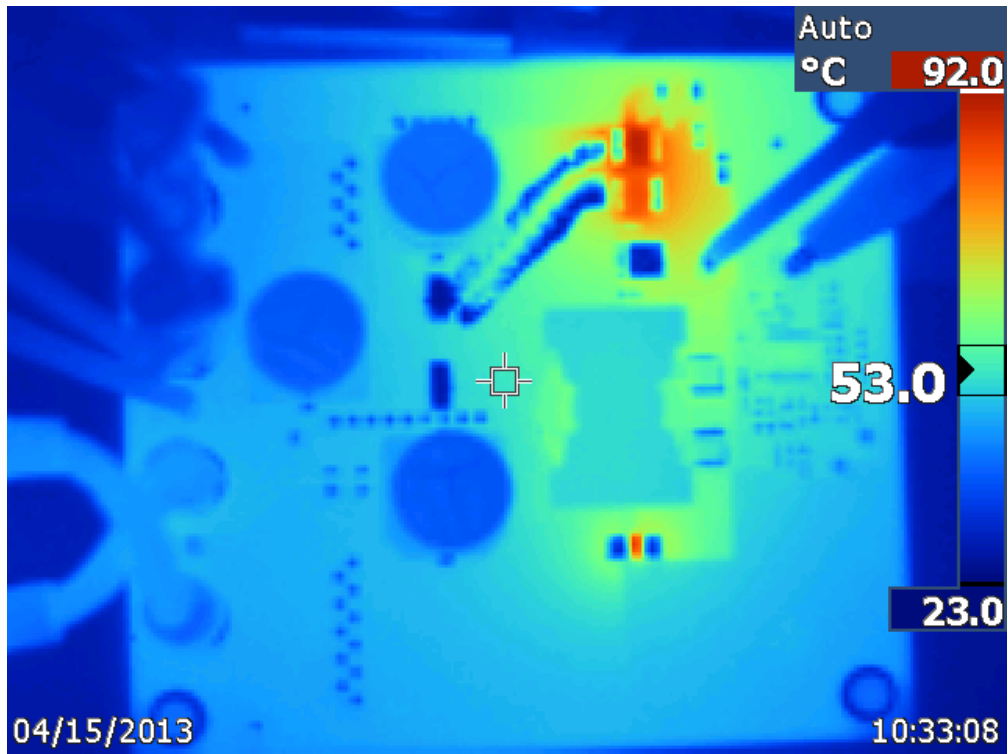


## 5 Power Up and Power Down


### 5.1 Power Up at 11V Input – No Load

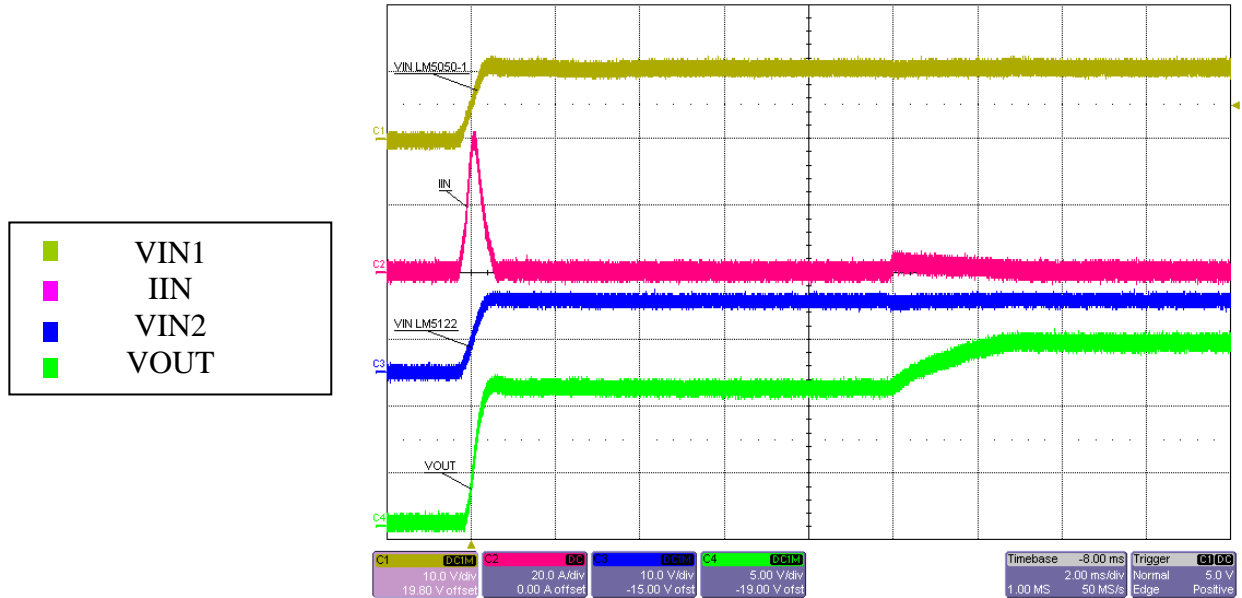


### 5.2 Power Down at 11V Input – No Load

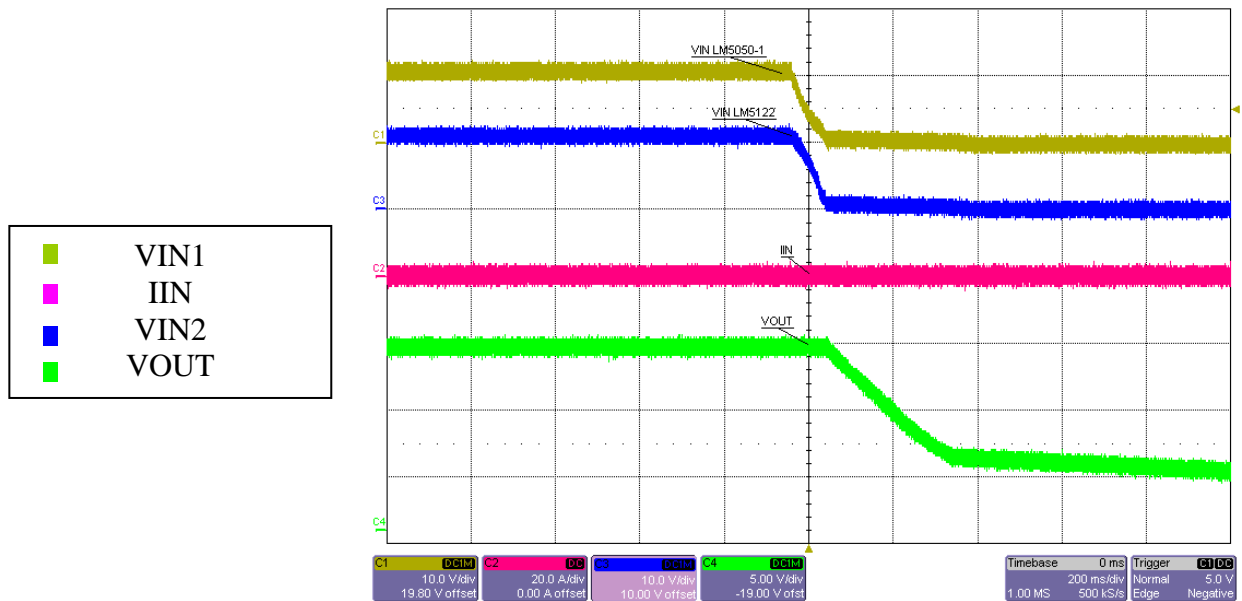


**5.3 Power Up at 11V Input – 10A Load**

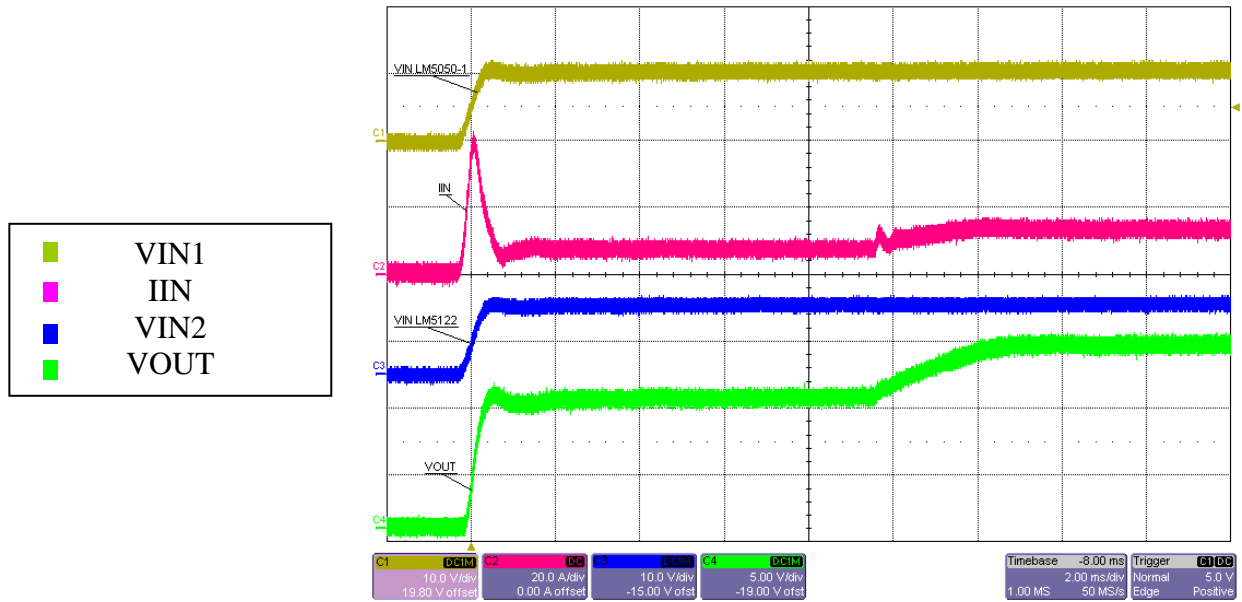


**5.4 Power Down at 11V Input – 10A Load**

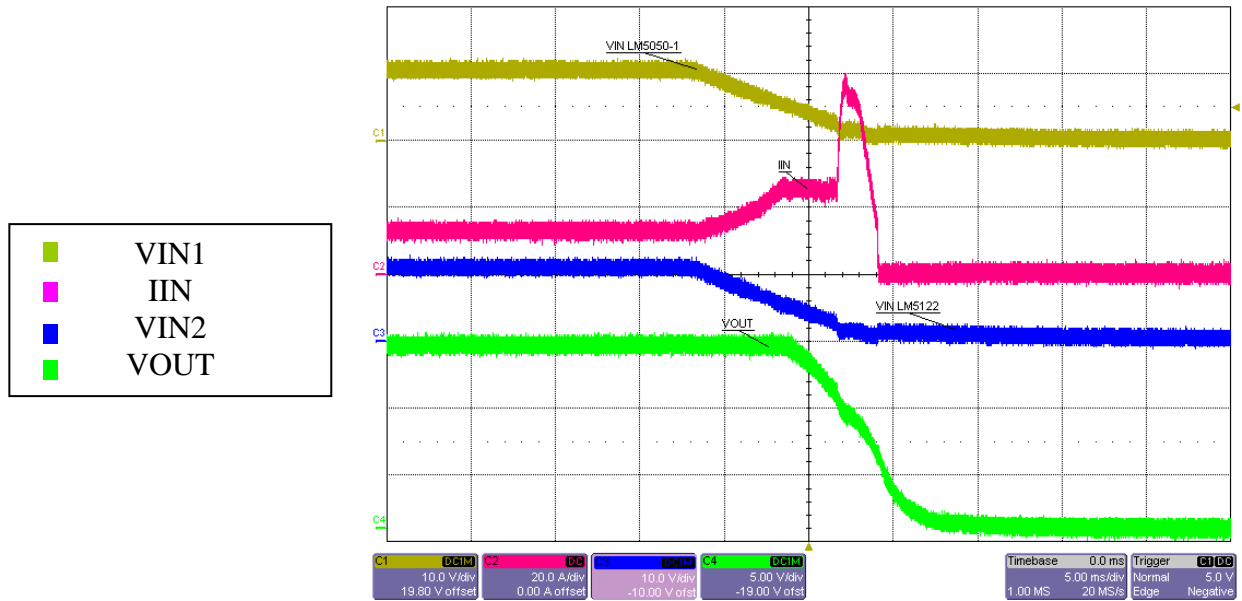

### 5.5 Turn On from UVLO at 11V Input – 10A Load

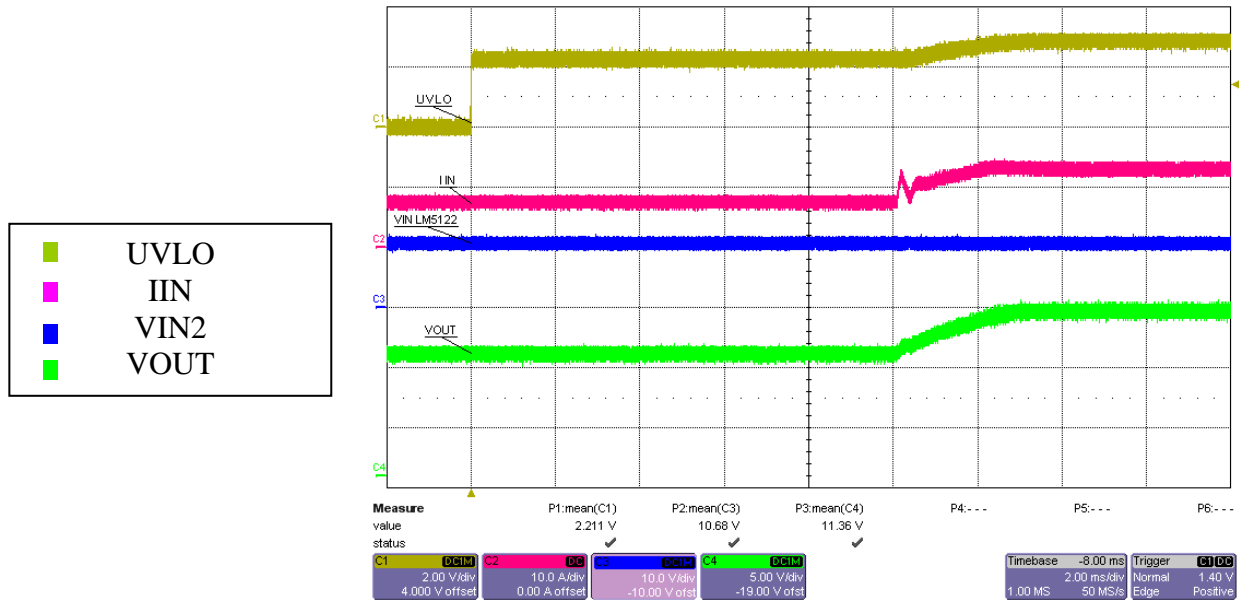


### 5.6 Turn Off from UVLO at 11V Input – 10A Load

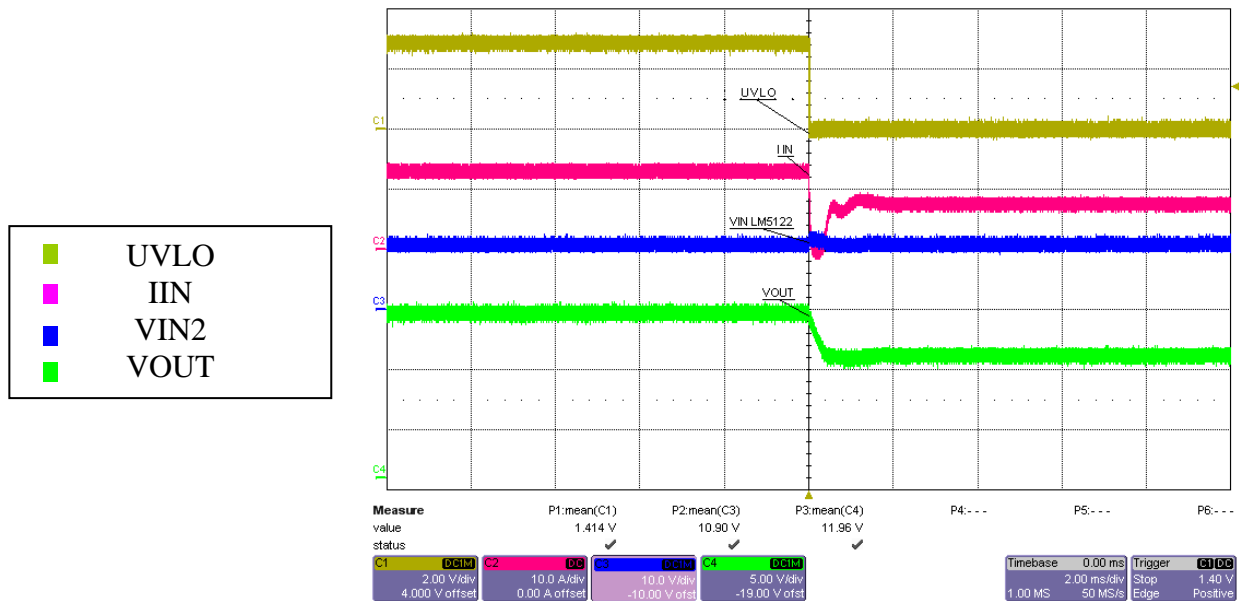




## 6 Switching Voltages



### 6.1 11V Input – No Load

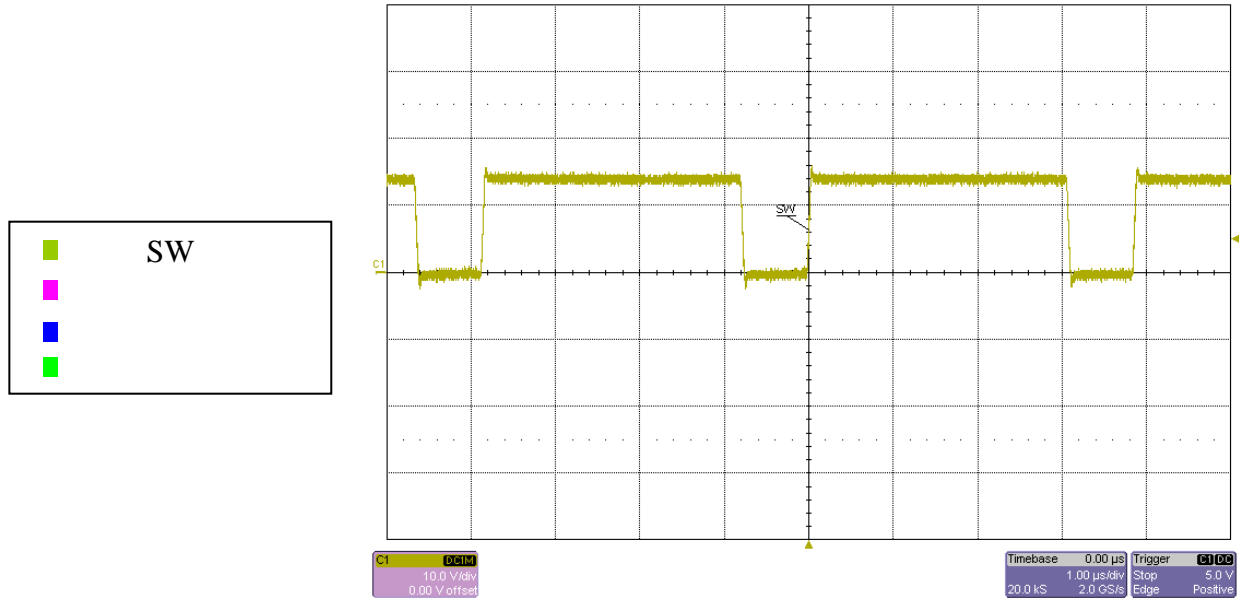



### 6.2 11V Input – 10A Load

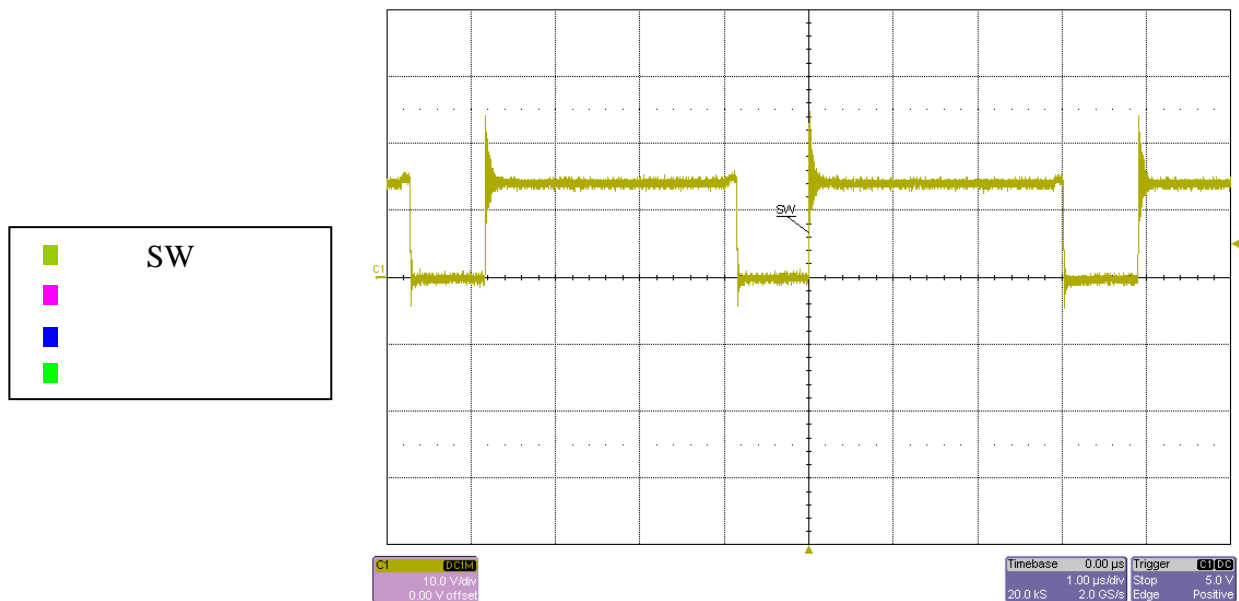



## 6.3 11V Input – 10A Load

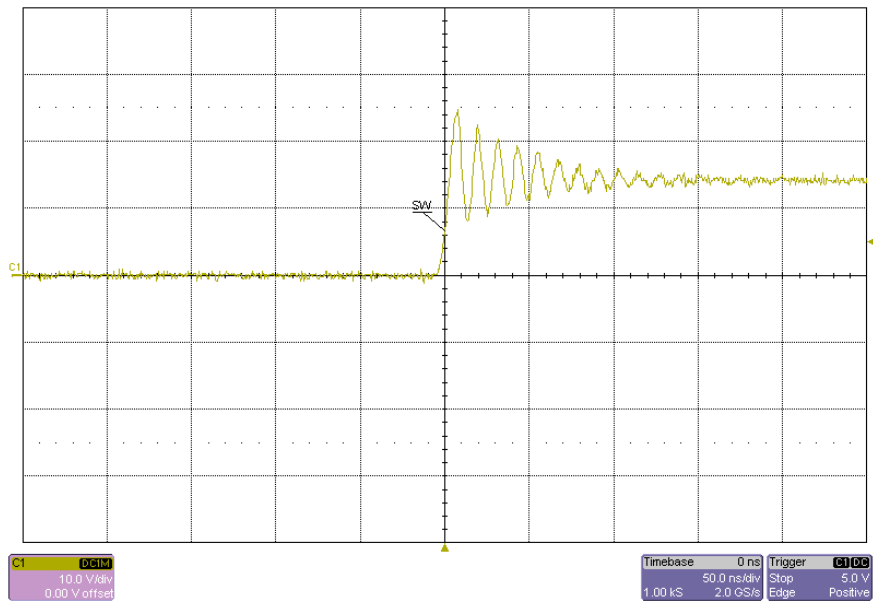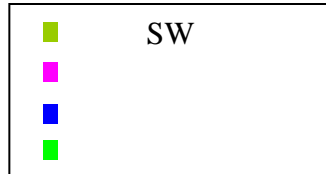



## 6.4 11V Input – 10A Load

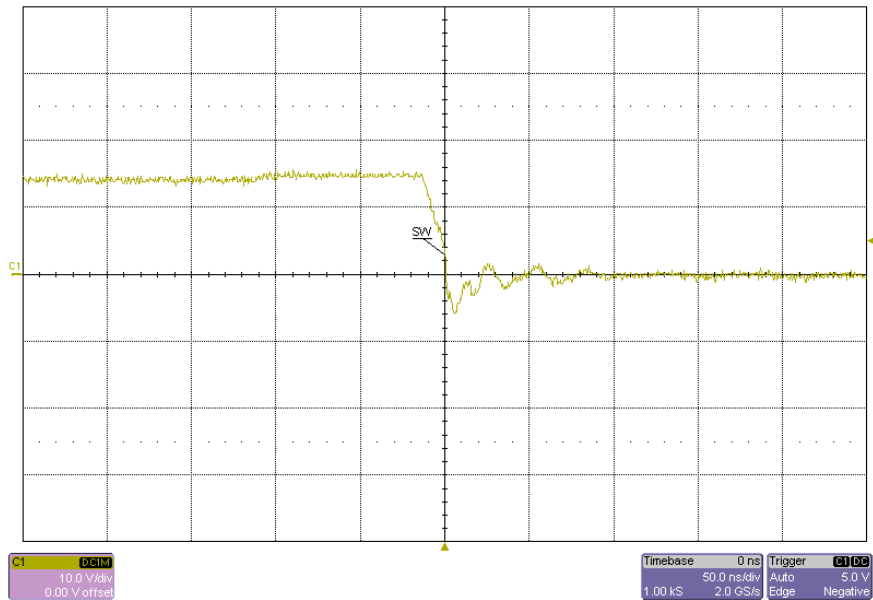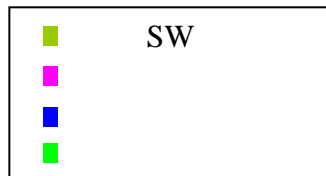



## 6.5 6V Input – 8A Load

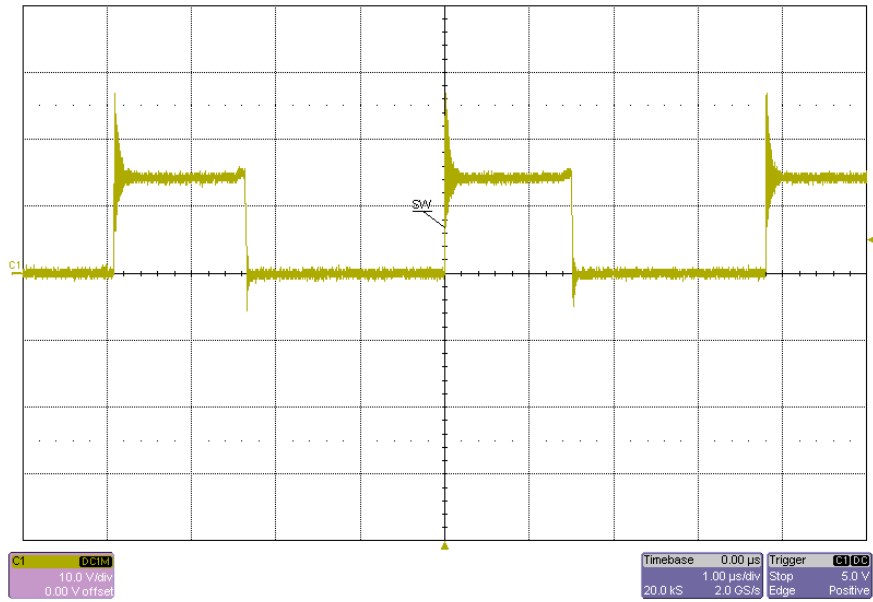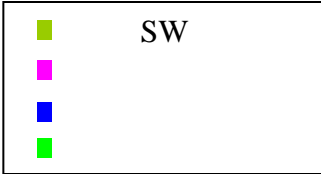



## 6.6 6V Input – 8A Load

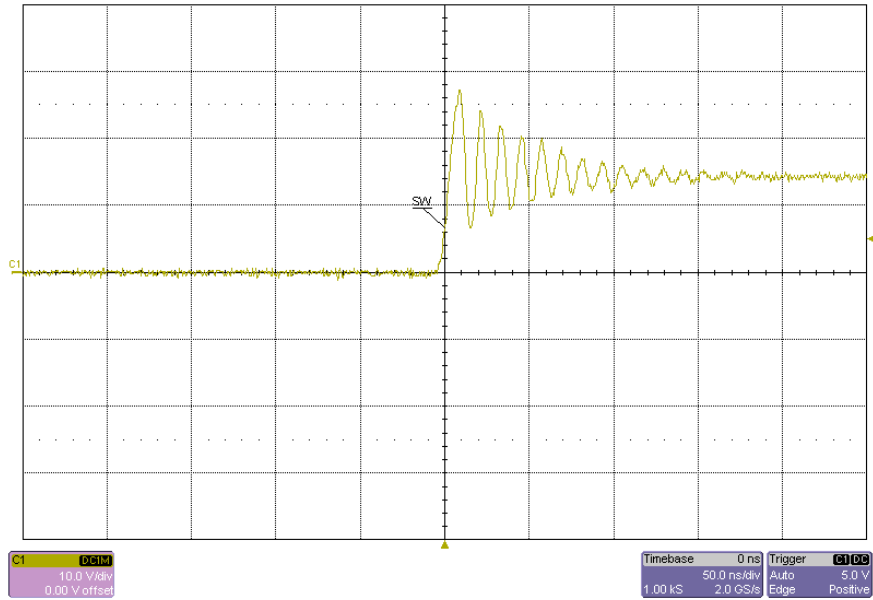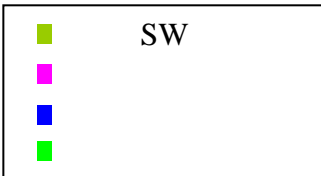

## 6.7 4.5V Input – 7A Load

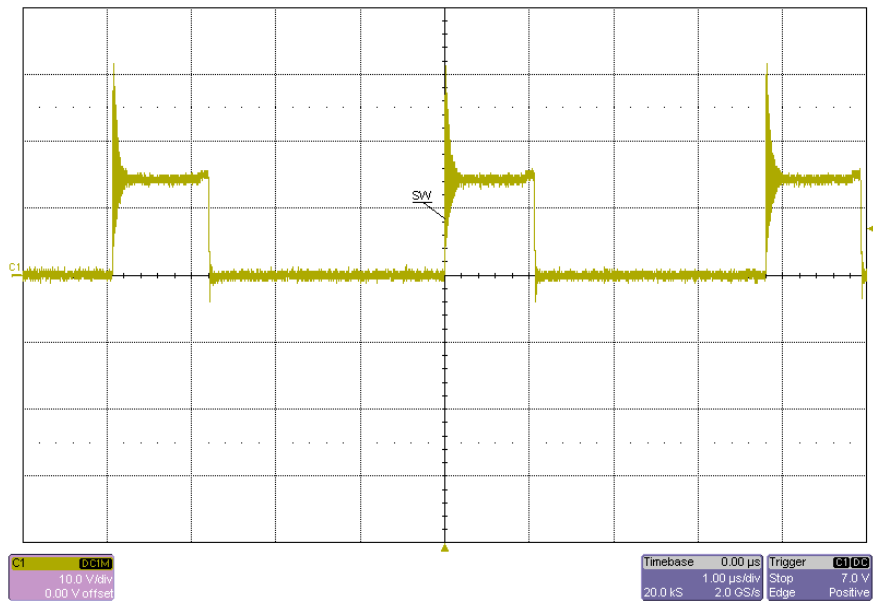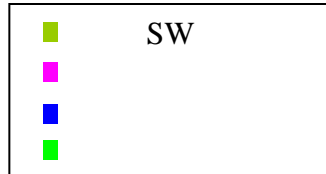


## 6.8 4.5V Input – 7A Load

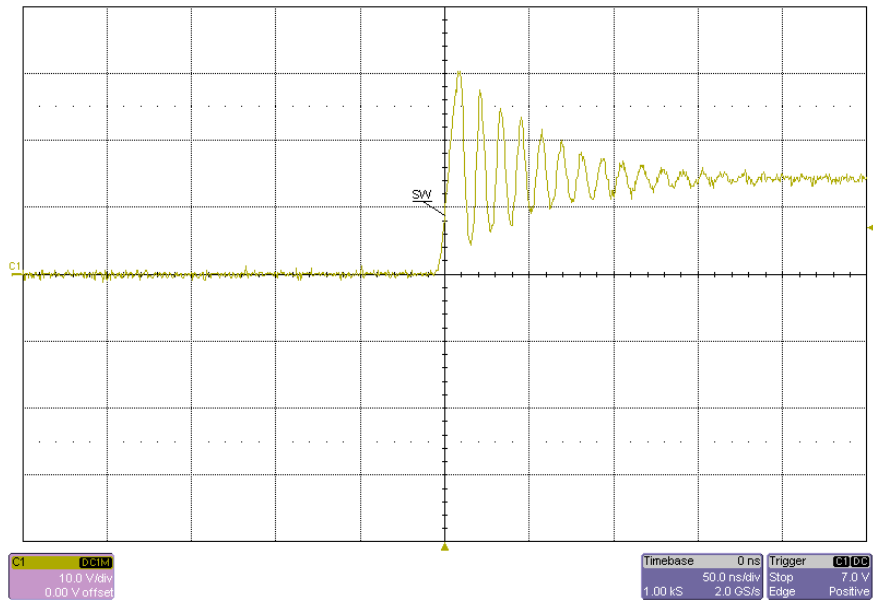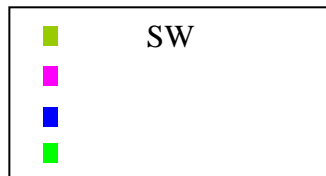


## 7 Ripple Voltages



### 7.1 11V Input – 10A Load

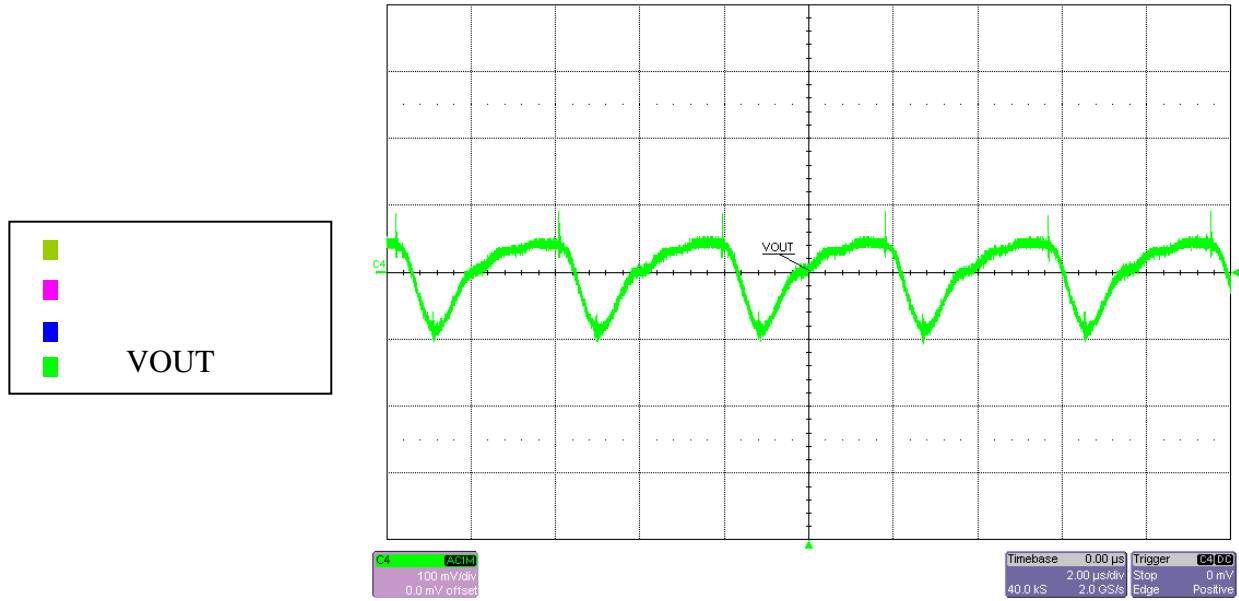



### 7.2 11V Input – 10A Load

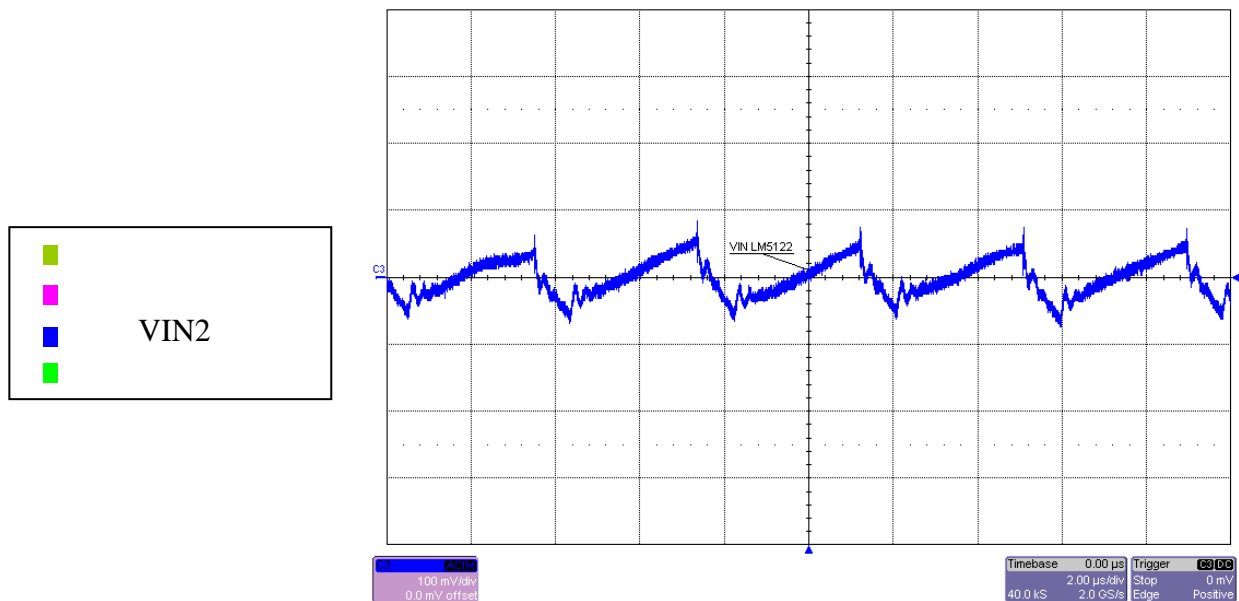



## 7.3 6V Input – 8A Load

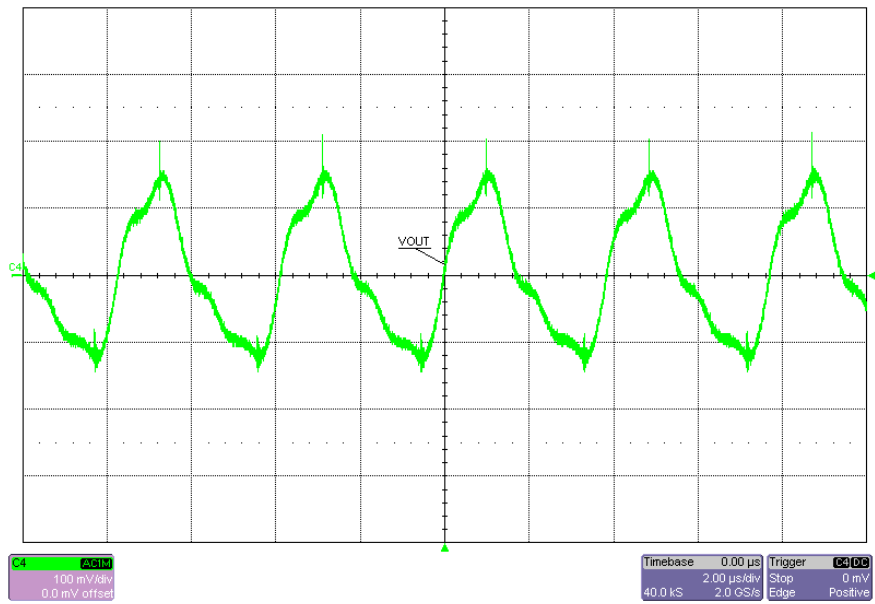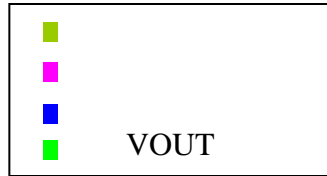



## 7.4 6V Input – 8A Load

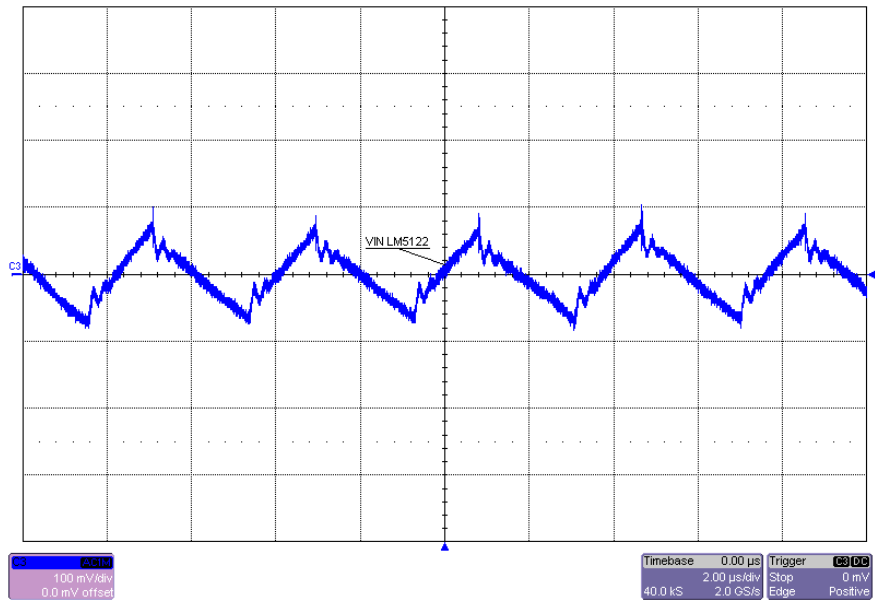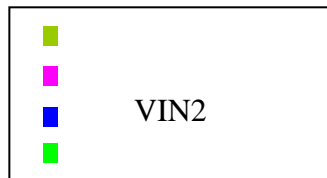

## 7.5 4.5V Input – 7A Load

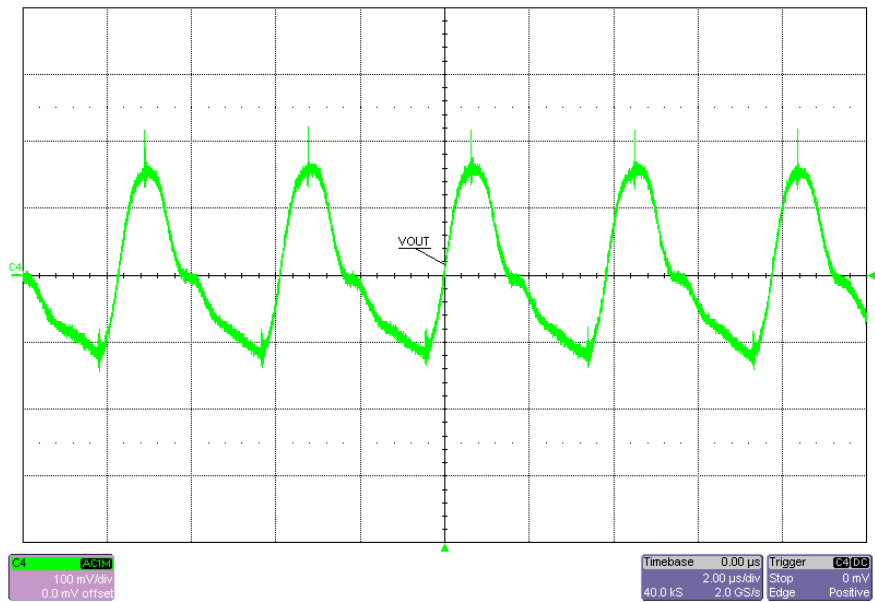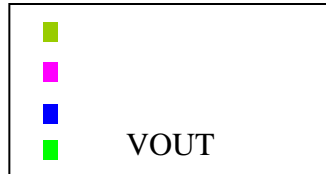

## 7.6 4.5V Input – 7A Load

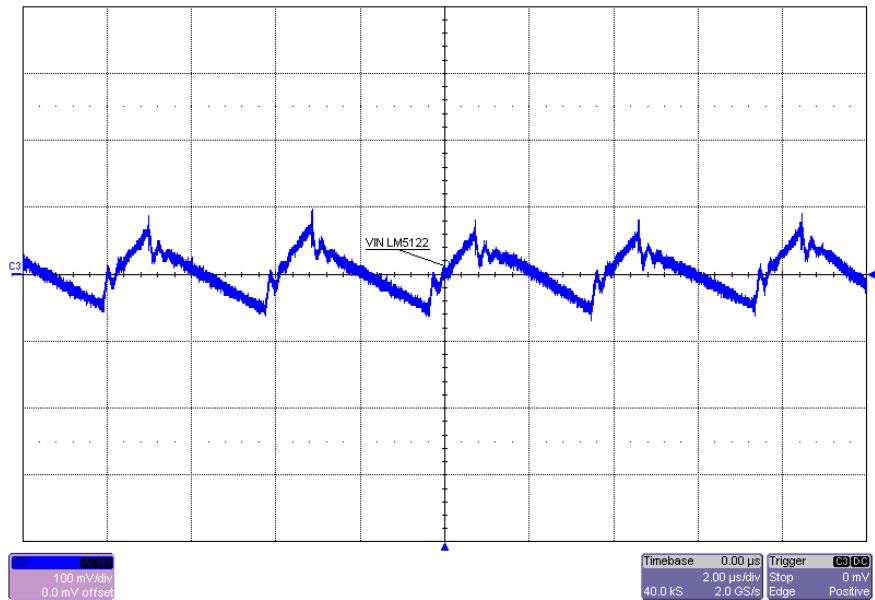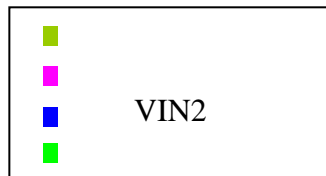




# PMP7936 Rev A Test Results


## 8 Bypass and Reverse

### 8.1 Bypass at 18V Input – 10A Load


VIN LM5050-1 = 18.0V, IIN = 10A, VIN LM5122 = 17.9V, VOUT = 17.8V

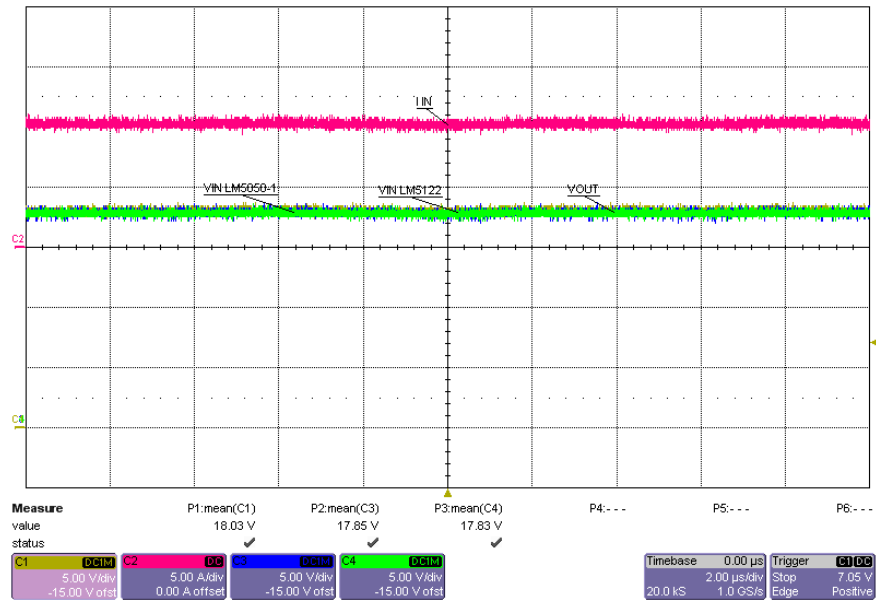

### 8.2 Bypass at 40V Input – 1A Load

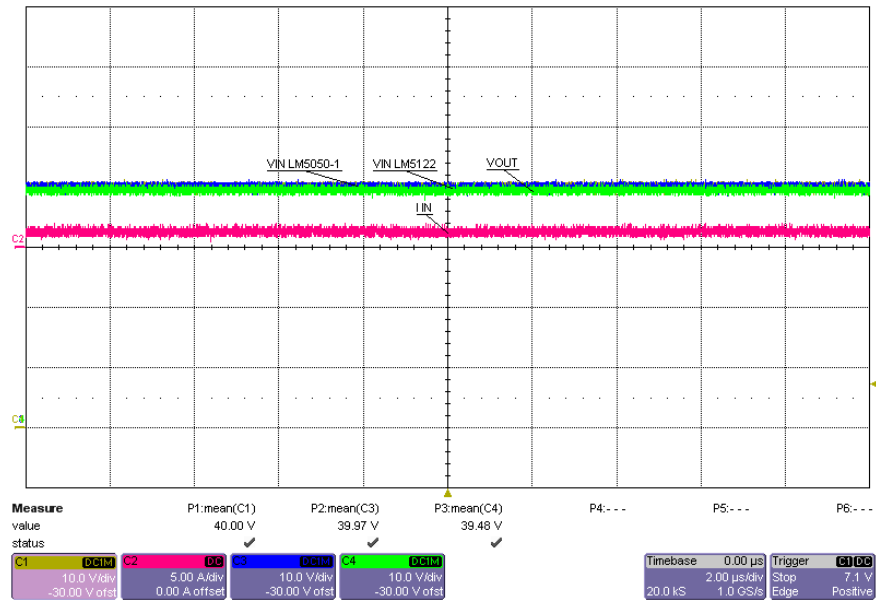


## 8.3 Reverse Battery Protection at -18V Input

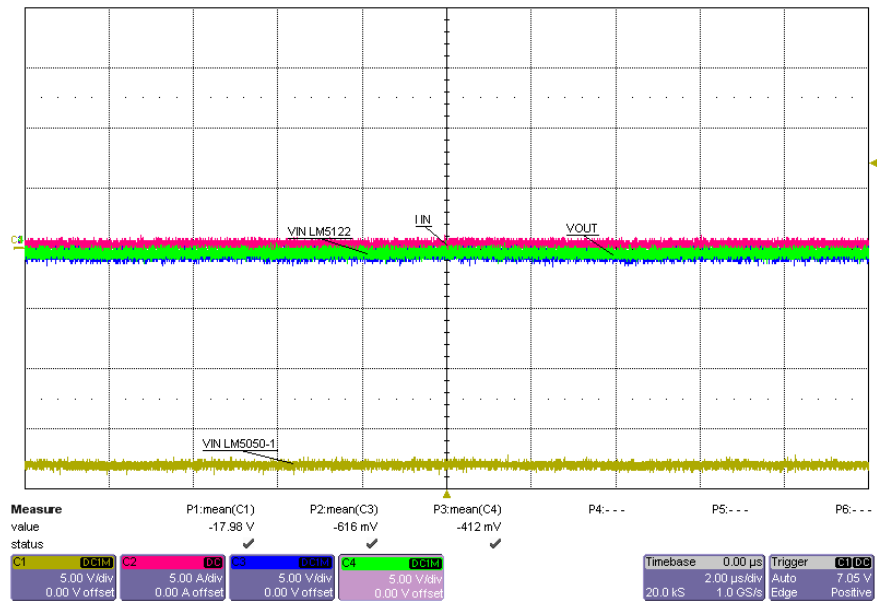


## 9 Transient Response


### 9.1 11V Input – 5A Load Step

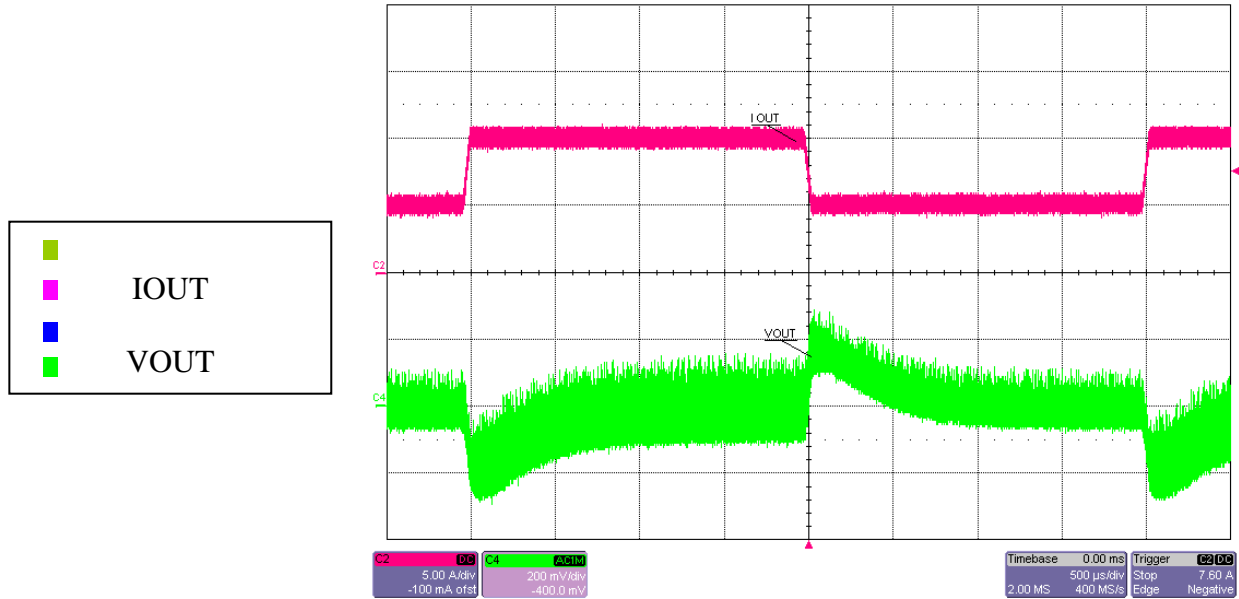


### 9.2 6V Input – 5A Load Step

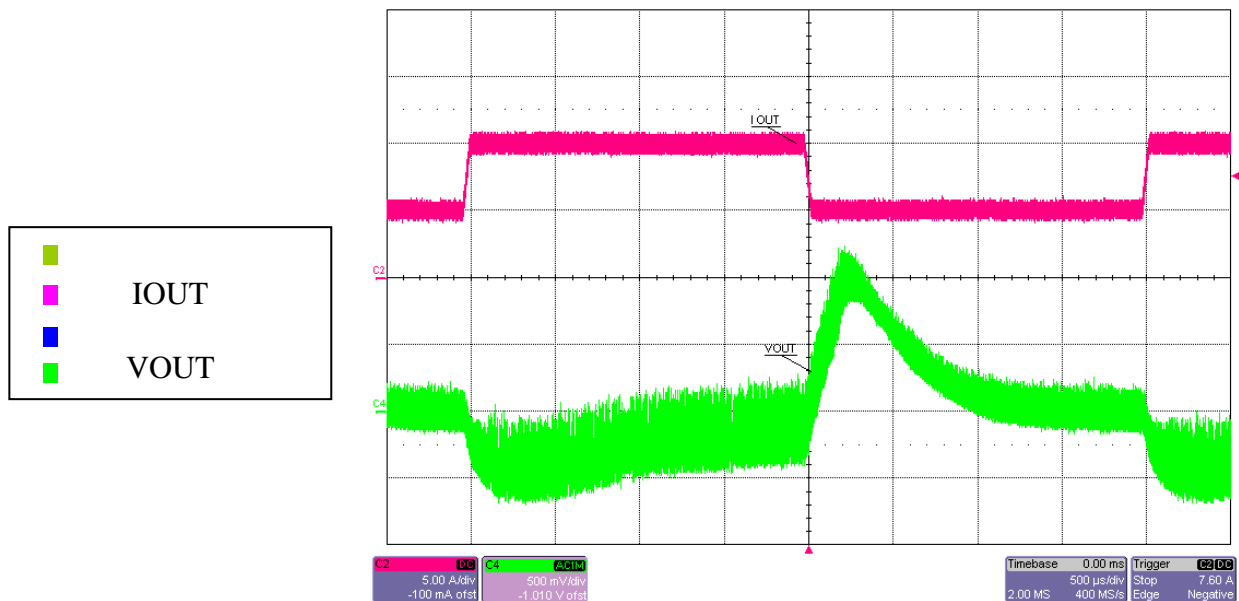

**9.3 11V to 7V Input Step – 10A Load**

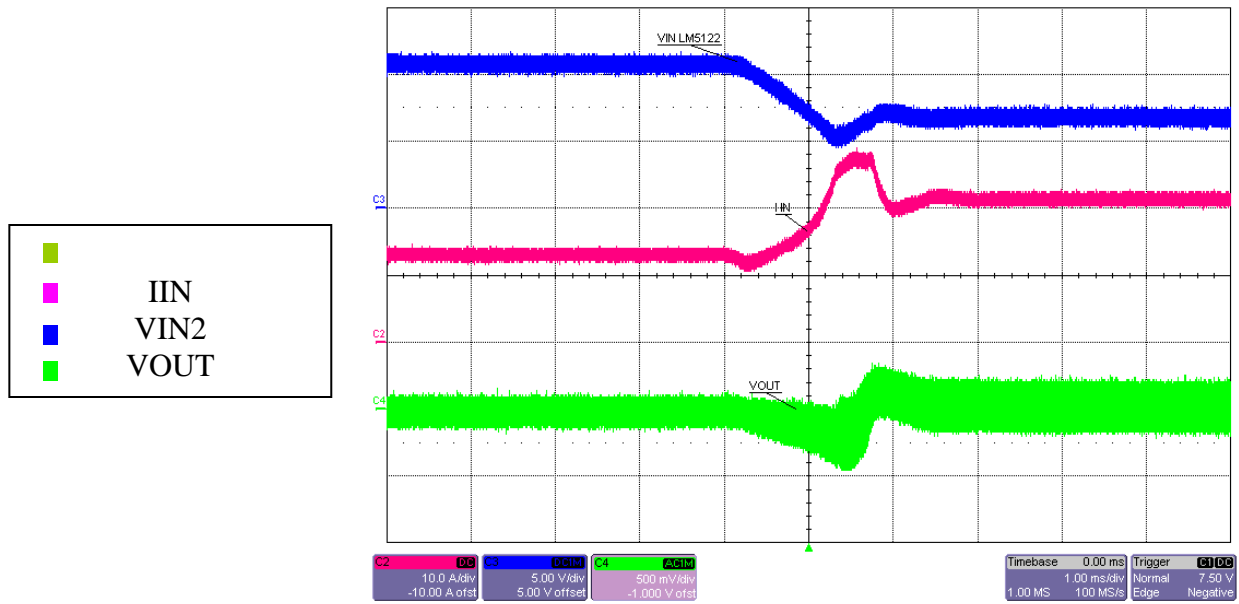


**9.4 7V to 11V Input Step – 10A Load**

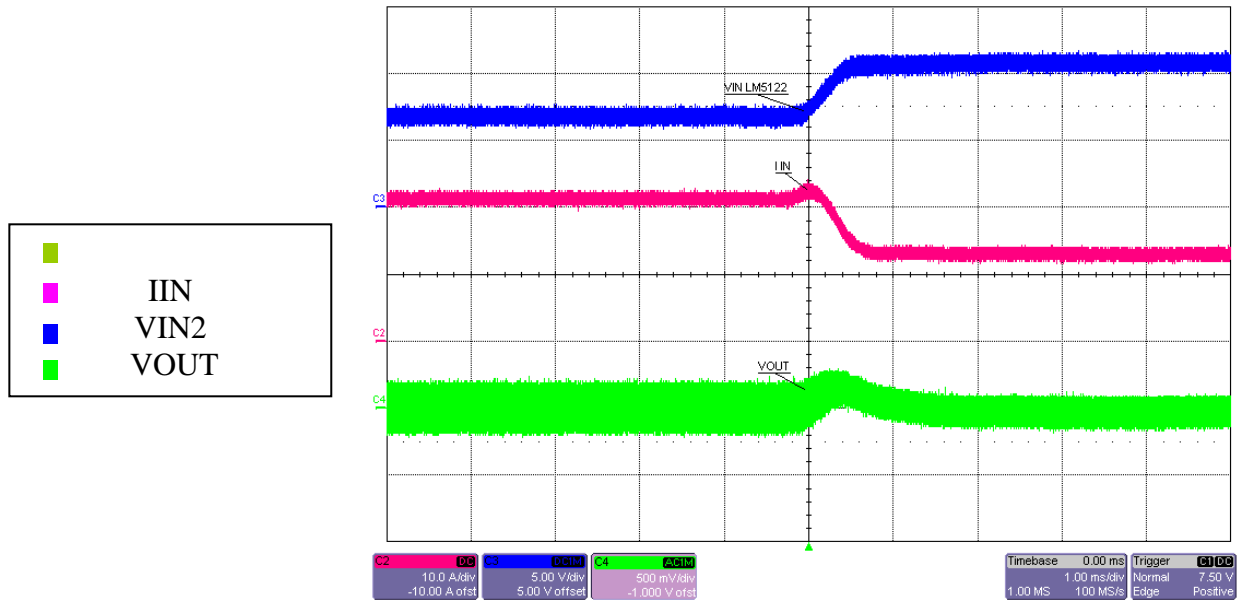


# PMP7936 Rev A Test Results

## 10 Frequency Response

### 10.1 11V Input – 10A Load

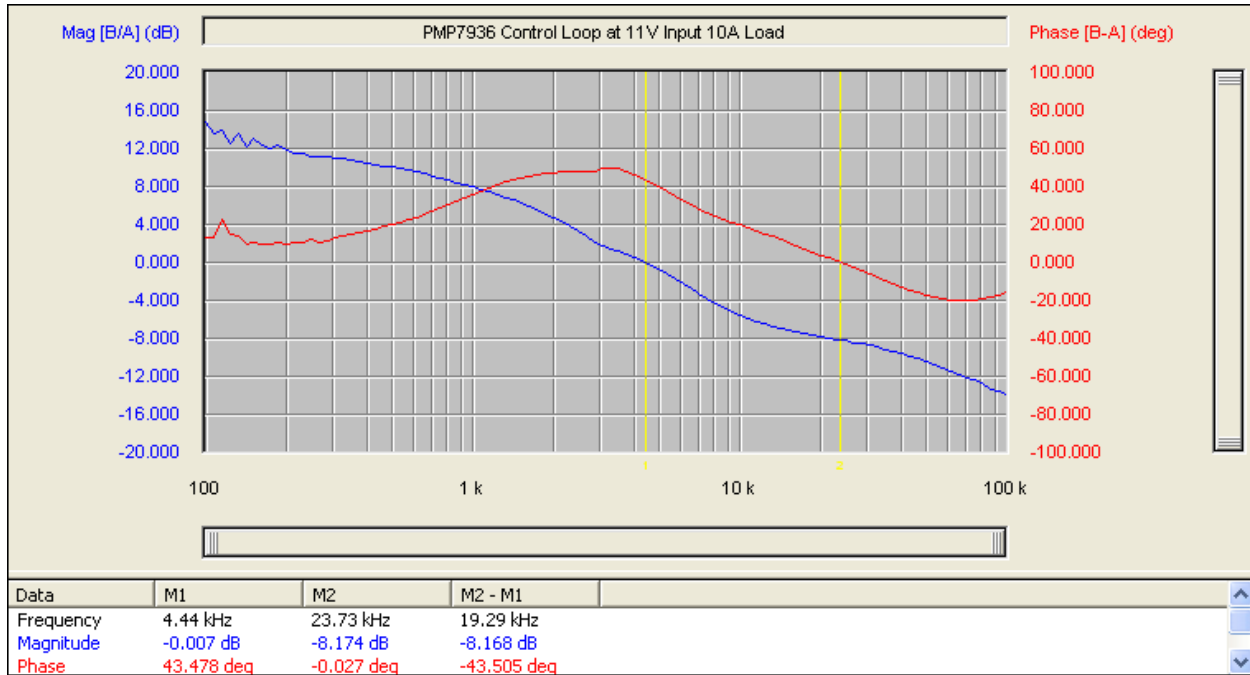

### 10.2 6V Input – 8A Load

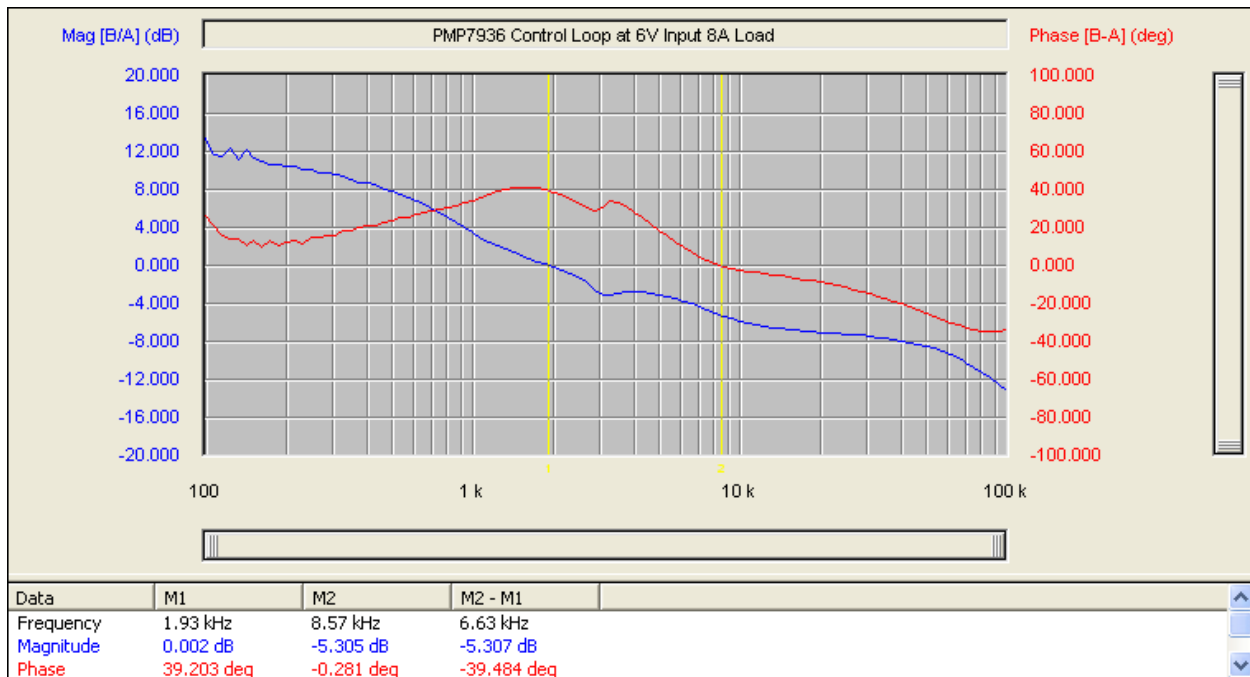

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)