

Evolving automotive gateways for next-generation vehicles



Subbu Venkat
Business Development Manager
Automotive Processors

Texas Instruments

Introduction

Automotive architectures are rapidly evolving with a trend towards semi-autonomous and eventually fully-autonomous vehicles. Automotive manufacturers are also including a variety of features such as smart access, car sharing, predictive maintenance, vehicle tracking, fleet management and over-the-air (OTA) updates to enhance connectivity and in-vehicle communication. These advanced features generate an ever increasing amount of data which need to be processed, by a high-performance processor, and communicated securely and safely across interfaces such as CAN, LIN and higher-speed networks, such as Ethernet. As a result, car manufacturers are reevaluating the architecture of automotive gateway and telematics control unit systems.

The automotive gateway

An automotive gateway is a system whose core function is to safely and securely transfer data within the vehicle. There is potential for several gateways in the vehicle: a centralized gateway and multiple domain gateways.

A centralized gateway in a car safely and securely transfers data between numerous domains, such as the telematics control unit (TCU), powertrain, auto body, infotainment system, digital cockpit and ADAS applications.

A domain gateway (or domain controller) has a similar function but routes data between ECUs within its respective domain.

Centralized gateways typically require more processing performance, interfaces and higher-bandwidth networking protocols than domain gateways. **Figure 1** illustrates how to implement the two types of gateways in a vehicle.

TCU

The TCU is the ECU in vehicles that provides connectivity to the internet and cloud.

Cars connecting to the internet and the cloud are becoming more and more ubiquitous, with

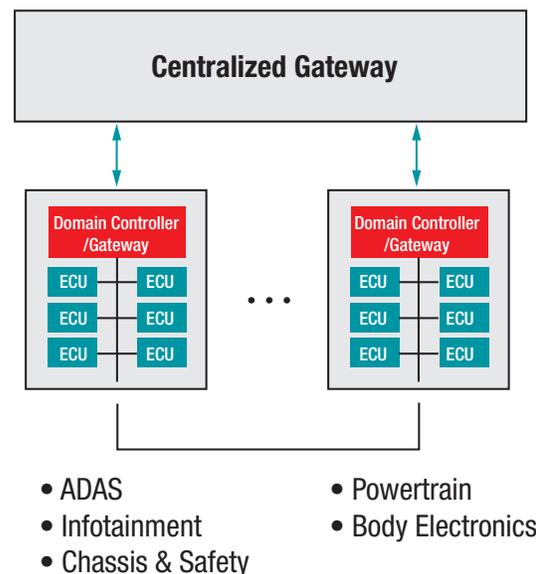


Figure 1. Example SoC architecture, featuring a centralized gateway and two domain gateways.

car manufacturers outfitting vehicles with Wi-Fi[®], Bluetooth[®] and cellular data options.

Such connectivity enables emergency calling (eCall) and access to entertainment and other content online while traveling, along with providing OTA software updates to the digital content in the car.

Newer trends—such as car sharing, replacing key fobs with mobile phone access, fleet management and tracking, insurance providers monitoring driving

habits remotely, and car dealers monitoring vehicle health remotely to schedule preventive maintenance such as oil changes—all require a connection to the internet and cloud.

Another emerging trend toward full autonomy is a vehicle's ability to communicate with entities such as cars, infrastructure (such as traffic lights), or even people. This is aptly known as vehicle-to-vehicle (V2V) and vehicle-to-infrastructure (V2I) and vehicle-to-pedestrians (V2P). Dedicated Short Range Communication (DSRC) or c-V2X connectivity usually facilitates such communication.

In short, Telematics connects the car to the outside world. **Figure 2** illustrates telematics pictorially.

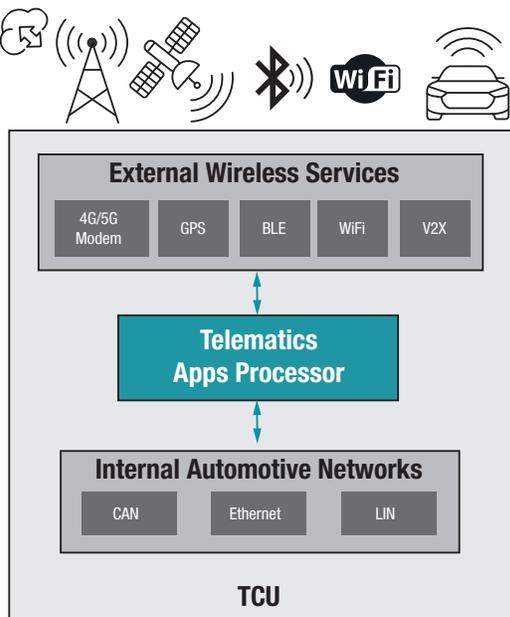


Figure 2. Example of telematics.

Evolving gateway and TCUs require application processors

Automotive gateway processors have traditionally been 32-bit microcontrollers (MCUs) with embedded Flash and supported gateway interfaces that were lower-speed interfaces such as Controller Area Network (CAN), Local Interconnect Network (LIN) and FlexRay™. However, as cars are increasing in

ADAS and connectivity functionality, vehicles have to process and communicate an ever-increasing amount of data securely and safely, at very low latencies, between various domains.

Since interfaces such as CAN-Flexible Data Rate and LIN are not designed to handle vast amounts of data at low latencies, car manufacturers are migrating to an Ethernet TCP/IP-based protocol for handling higher-bandwidth data movement. TCP/IP is attractive because it's a well-established communication protocol in the consumer space, and thus considered less risky than a less-proven protocol.

Since MCUs by themselves may not be able to keep up with the processing requirements of future gateways, higher-performing application processors are replacing or augmenting certain MCU functions to process and route the data of future gateways. Furthermore, as in-vehicle networks migrate to an Ethernet-based network, automotive gateways supported by an application processor can help process and route data between various domains quickly and efficiently.

Connectivity is necessary for OTA updates to refresh entertainment content and other services, such as vehicle/ride sharing apps and remote vehicle access. TCUs have a cellular or Wi-Fi® modem to provide connectivity and an application processor to process data received from the modem. Processing involves decrypting the data, validating the data and routing it to the gateway or to a different domain ECU. In current architectures, the modem and processor are integrated on a single semiconductor device. However, because modem standards are constantly evolving, car manufacturers are moving to an architecture that separates the modem from the processor. Moreover, both automotive gateways and TCUs are migrating to an Ethernet-based network powered by an application processor with high-speed connectivity peripheral support, like

PCIe, and high compute power to process and route data between the various domains.

The advantage of separating the processor from the modem is that the ECU can be quickly migrated to a new modem standard by replacing only the modem, preserving the processor and all associated software running on it.

Safety and security are also gaining importance in automotive gateways and TCUs as cars become more connected and autonomous. A dedicated embedded security processor or subsystem can help protect access to vehicle security keys, enhance communication channels security and ensure that trusted software updates cannot be used as part of a cyberattack. Safety functions are typically implemented in discrete MCUs certified to be safe. But an SoC that integrates both application processors and a safety MCU offers automotive OEMs a lower bill-of-materials (BOM) cost.

Development cost

As discussed in the previous section, gateway and TCU systems are becoming increasingly complex in terms of functionality. This results in a high development cost for car manufacturers. Ideally, this cost would not have to be incurred for every tier/model of a vehicle.

OEMs and Tier-1 suppliers can streamline development costs by working with an automotive processor in the Jacinto™ DRAx family of automotive processors, that provides a scalable and software-compatible platform that can help address the needs of next-generation gateway and TCU systems. Jacinto DRA8x automotive processors help enhance connectivity throughout the vehicle by supporting a variety of high-speed I/O such as

PCIe, USB3.x, and Gigabit Ethernet and traditional automotive peripherals, such as CAN-FD and LIN. These processors are also tailored for use in automotive gateways and include on-chip MCU subsystems to help meet the real-time processing demands and performance required for TCUs, application processors and automotive gateways.

This processor family includes support for several high-level and real-time operating systems in the Processor SDK along with fully compatible and scalable software development kits (SDKs) that enable OEMs to leverage and reuse design efforts among their product lineup, which ultimately results in lower development costs. With unified software, car manufacturers are able to scale costly software R&D investments and deploy software through their entire centralized gateway platform for entry- to premium-level vehicles.

Innovating next-generation gateway systems

The architecture of automotive gateways and TCUs are changing rapidly to efficiently process and move vast amounts of data between the various domains in the car. A scalable SoC with an integrated MCU subsystem, application processors and high-speed I/O functionality would help meet the demands of this new architecture with a reduced system BOM.

Additional resources

- Learn more about [Jacinto DRA8x automotive processors](#) for gateway applications.
- Get more information on [TI solutions and design resources](#) for automotive gateways.
- Download our reference designs for [Automotive Gateways](#) and [TCUs](#).

Important Notice: The products and services of Texas Instruments Incorporated and its subsidiaries described herein are sold subject to TI's standard terms and conditions of sale. Customers are advised to obtain the most current and complete information about TI products and services before placing orders. TI assumes no liability for applications assistance, customer's applications or product designs, software performance, or infringement of patents. The publication of information regarding any other company's products or services does not constitute TI's approval, warranty or endorsement thereof.

The platform bar and Jacinto are trademarks of Texas Instruments. All other trademarks are the property of their respective owners.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated