TEXAS INSTRUMENTS
BQ25616, BQ25616J
ZHCSKP6A – JANUARY 2020 – REVISED FEBRUARY 2022

BQ25616/616J 具有电源路径和 1.2A 升压电流的独立单芯 3.0A 降压电池充电器

1 特性

- 高效 1.5MHz 同步开关模式降压充电器
  - 在 2A 电流（5V 输入）下具有 92% 的充电效率
  - ±0.5% 充电电压调节
  - 通过 VSET 引脚实现的可调节充电电压支持 4.1V、4.2V 和 4.35 V 电压，稳压精度为 ±0.4%
  - 充电电流调节范围为 ±6%
  - 输入电流调节范围为 ±7.5%
  - 支持 JEITA (BQ25616J) 或热/冷 (BQ25616) 温度感应曲线
  - 10 小时充电安全计时器
- 支持 USB On-The-Go (OTG)
  - 具有高达 1.2A 输出的 5V 升压转换器
  - 在 1A 输出下具有 92% 的升压效率
  - 精确的恒定电流 (CC) 限制
  - 高达 500µF 容性负载的软启动
  - 用于轻负载运行的 PFM 模式
- 单个输入，支持 USB 输入以及高电压适配器或无线电源
  - 支持 4V 至 13.5V 输入电压范围，绝对最大输入额定值为 22V
  - 130ns 快速关断输入过压保护，可选的外部 OVPFET 可承受高达 30V 的输入电压
  - 通过 ILIM 引脚实现可编程输入电流限制 (IINDPM)
  - 通过 VINDPM 阈值自动跟踪电池电压，从而实现最大功率
  - 自动检测 USB SDP、CDP、DCP 以及非标准适配器
- 窄 VDC (NVDC) 电源路径管理
  - 无需电池或使用深度放电的电池即可使系统瞬时启动
- 低 R_{DSON} 19.5mΩ BATFET，可更大程度地降低充电损耗和延长电池运行时间
- 在系统待机时具有 9.5µA 的低电池泄漏电流
- 高集成度包括所有 MOSFET、电流感应和环路补偿
- 安全相关认证：
  - 经 IEC 62368-1 CB 认证

2 应用

- 电子销售点 (EPOS)
- 无线扬声器
- 工业、医疗 便携式电子产品

3 说明


BQ25616/616J 是适用于单节锂离子电池和锂聚合物电池、高度集成的 3A 开关模式电池充电管理和系统电源路径管理器件。该解决方案在系统和电池之间高度集成输入反向阻断 FET（RBFET，Q1）、高侧开关 FET（HSFET，Q2）、低侧开关 FET（LSFET，Q3）以及电池 FET（BATFET，Q4）。其低阻抗电源路径对开关模式运行效率进行了优化，缩短了电池充电时间并延长了放电阶段的电池运行时间。

BQ25616/616J 是适用于锂离子电池和锂聚合物电池、高度集成的 3A 开关模式电池充电管理和系统电源路径管理器件。它可为扬声器、工业和医疗便携式设备等各种应用提供快速充电功能和高输入电压。其低阻抗电源路径对开关模式运行效率进行了优化，缩短了电池充电时间并延长了放电阶段的电池运行时间。其输入电压和电流调节可以为电池提供最大的充电功率。

器件信息

器件型号	封装(1)	封装尺寸（标称值）
BQ25616/616J	WQFN (24)	4.00mm × 4.00mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

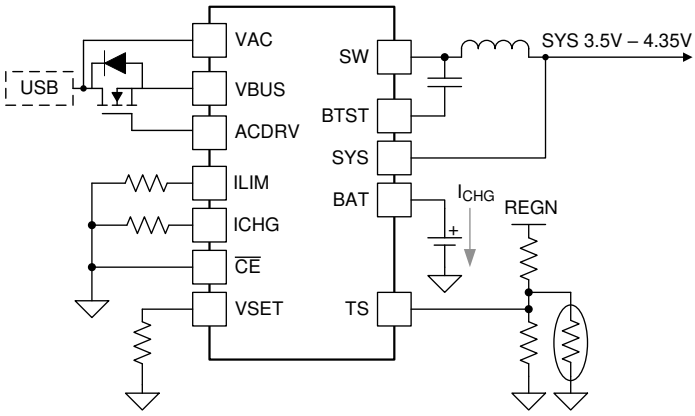

简化版应用

本文档旨在为方便起见，提供有关 TI 产品中文版本的信息，以确认产品的概要。有关适用的官方英文版本的最新信息，请访问 www.ti.com，其内容始终优先。TI 不保证翻译的准确性和有效性。在实际设计之前，请务必参考最新版本的英文版本。

Table of Contents

1 特性 1
2 应用 1
3 说明 1
4 Revision History 2
5 说明 (续) 3
6 Device Comparison Table 4
7 Pin Configuration and Functions 5
8 Specifications 7
8.1 Absolute Maximum Ratings 7
8.2 ESD Ratings 7
8.3 Recommended Operating Conditions 7
8.4 Thermal Information 7
8.5 Electrical Characteristics 8
8.6 Timing Requirements 13
8.7 Typical Characteristics 14
9 Detailed Description 16
9.1 Overview 16
9.2 Functional Block Diagram 16
9.3 Feature Description 17
9.4 Device Functional Modes 28
10 Application and Implementation 29
10.1 Application Information 29
10.2 Typical Applications 29
11 Power Supply Recommendations 37
12 Layout 38
12.1 Layout Guidelines 38
12.2 Layout Example 38
13 Device and Documentation Support 40
13.1 Device Support 40
13.2 Documentation Support 40
13.3 接收文档更新通知 40
13.4 支持资源 40
13.5 Trademarks 40
13.6 Electrostatic Discharge Caution 40
13.7 术语表 40
14 Mechanical, Packaging, and Orderable Information 41

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision * (January 2020) to Revision A (February 2022)	Page
• 将“特性”中的 20 小时充电安全计时器更改为 10 小时充电安全计时器	1
• 添加了“安全相关认证：经 IEC 62368-1 CB 认证	1
• Changed charge safety timer accuracy from 20 hr to 10 hr for BQ25616/J in the Device Comparison Table	4
• Deleted deglitch time and added charge voltage limit in the Device Comparison Table	4
• Changes TS and VAC pin descriptions in 表 7-1	5
• Changed voltage, BAT, SYS (converter not switching) MAX value from 17 V to 7 V in 节 8.1	7
• Added CHARGE OVERCURRENT COMPARATOR (CYCLE-BY-CYCLE) in 节 8.5	8
• Deleted V_{BST_BAT} and added $V_{BATLOWV_OTG}$ in 节 8.5	8
• Deleted numerous test conditions in D+/D- Detection section in 节 8.5	8
• Deleted $I_{BST_OCP_Q1}$ in 节 8.5	8
• Deleted accuracy from t_{TOP_OFF} and CHG_TIMER = 20hr from t_{SAFETY} in 节 8.6	13
• Changed t_{SAFETY} MIN/TYP/MAX values in 节 8.6	13
• Deleted V_{BATREG} = 4.4 V curve from 图 8-3	14
• Changed safety timer from 20 hours to 10 hours in 表 9-4	23
• Changed T2 from 20 to 10 in 图 9-6	25
• Changed 节 9.3.9.5.3	28

Copyright © 2022 Texas Instruments Incorporated

5 说明（续）

该解决方案在系统和电池之间高度集成输入反向阻断 FET（RBFET，Q1）、高侧开关 FET（HSFET，Q2）、低侧开关 FET（LSFET，Q3）以及电池 FET（BATFET、Q4）。它还集成了自举二极管以进行高侧栅极驱动，从而简化系统设计。硬件设置和状态报告为充电解决方案提供了简单的配置。

该器件支持多种输入源，包括标准 USB 主机端口、USB 充电端口、兼容 USB 的高电压适配器和无线电源。该器件符合 USB 2.0 和 USB 3.0 电源规格，具有输入电流和电压调节功能。该器件根据内置 USB 检测通过 D+/D- 引脚设置默认输入电流限值。当器件内置 USB 接口确定输入适配器未知时，器件的输入电流限值是通过 ILIM 引脚设置电阻器值来决定的。

该器件通过单个电感器将降压充电器和升压稳压器集成在一个解决方案中。它通过提供 5V 电压和高达 1.2A 的恒定电流限值，符合 USB On-the-Go (OTG) 运行功率额定值规格。

在应用适配器时，电源路径管理将系统电压调节至稍高于电池电压的水平，但不会降至 3.5V 最小系统电压以下。借助于这个特性，即使在电池电量完全耗尽或者电池被拆除时，系统也能保持运行。当达到输入电流限值或电压限值时，电源路径管理会自动减小充电电流。随着系统负载持续增加，电池开始放电，直到满足系统电源需求。该补充模式可防止输入源过载。

此器件在无需软件控制情况下启动并完成一个充电周期。它感应电池电压并通过三个阶段为电池充电：预充电、恒定电流和恒定电压。在充电周期的末尾，当充电电流低于预设限值并且电池电压高于再充电阈值时，充电器自动终止。如果已完全充电的电池降至再充电阈值以下，则充电器自动启动另一个充电周期。

此充电器提供针对电池充电和系统运行的多种安全特性，其中包括电池负温度系数热敏电阻监视、充电安全性计时器和过压/过流保护。当结温超过 110°C 时，热调节会减小充电电流。STAT 输出报告充电状态和任何故障状况。

Copyright © 2022 Texas Instruments Incorporated

6 Device Comparison Table

	BQ25606	BQ25616	BQ25616J
Quiescent battery current (BAT, SYS, SW)	58 µA	9.5 µA	9.5 µA
VBUS OVP Reaction-time	200 ns	130 ns	130 ns
Input voltage regulation accuracy	±3%	±2%	±2%
TS profile	JEITA	Hot/Cold	JEITA
Charge safety timer accuracy	10 hr	10 hr	10 hr
Charge voltage limit	4.2 V/4.35 V/4.4 V	4.1 V/4.2 V/4.35 V	4.1 V/4.2 V/4.35 V
Battery voltage regulation	±0.5%	±0.4%	±0.4%
ACDRV	No	Yes	Yes

Copyright © 2022 Texas Instruments Incorporated

7 Pin Configuration and Functions

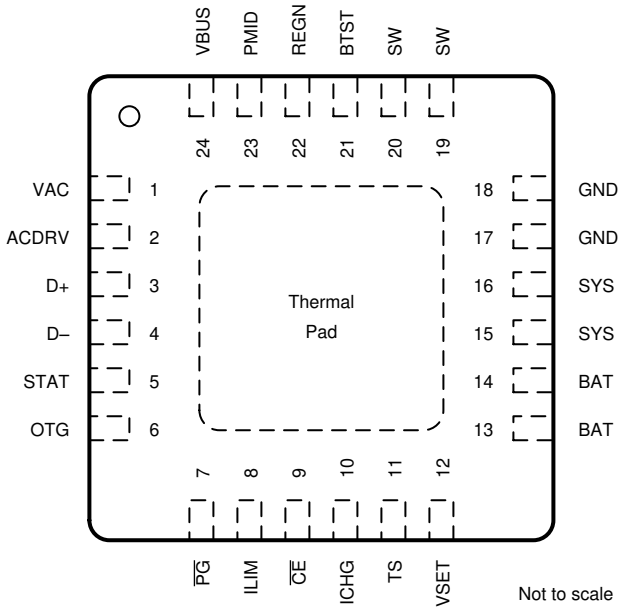


图 7-1. RTW Package 24-Pin WQFN Top View

表 7-1. Pin Functions

PIN		TYPE(1)	DESCRIPTION
NAME	NO.		
ACDRV	2	AO	Charge pump output to drive external N-channel MOSFET (ACFET). It provides 6V voltage above VBUS as gate drive to turn on ACFET when VAC voltage is below ACOV threshold (14.2-V) and above UVLO. Leave ACDRV floating if external OVP is not being used.
BAT	13	P	Battery connection point to the positive terminal of the battery pack. The internal current sensing resistor is connected between SYS and BAT. Connect a 10 µF(2) closely to the BAT pin.
	14		
BTST	21	P	PWM high side driver positive supply. Internally, the BTST is connected to the cathode of the boot-strap diode. Connect the 0.047- µ F bootstrap capacitor(2) from SW to BTST.
$\overline{CE}$	9	DI	Charge enable pin. When this pin is driven LOW, battery charging is enabled.
D+	3	AIO	Positive line of the USB data line pair. D+/D – based USB host/charging port detection. The detection includes data contact detection (DCD), primary and secondary detection in BC1.2 and nonstandard adaptors
D –	4	AIO	Negative line of the USB data line pair. D+/D – based USB host/charging port detection. The detection includes data contact detection (DCD), primary and secondary detection in BC1.2 and nonstandard adaptors
GND	17	P	Power ground and signal ground
	18		
ICHG	10	AI	ICHG pin sets the charge current limit. A resistor is connected from ICHG pin to ground to set charge current limit as ICHG = K_{ICHG}/R_{ICHG}. The acceptable range for charge current is 300 mA – 3000 mA.
ILIM	8	AI	ILIM sets the input current limit when the input adapter is detected as unknown. Otherwise, the input current limit is set by D+/D – detection outcome. A resistor is connected from ILIM pin to ground to set the input current limit as IINDPM = K_{ILIM}/R_{ILIM}. The acceptable range for ILIM current is 500 mA - 3200 mA.
OTG	6	DI	Boost mode enable pin. When this pin is pulled HIGH, boost mode is enabled. OTG pin cannot be floating.
$\overline{PG}$	7	DO	Open drain active low power good indicator. Connect to the pull up rail through 10 k Ω resistor. LOW indicates a good input if the input voltage is between UVLO and ACOV, above SLEEP mode threshold, and input current limit is above 30 mA.

Copyright © 2022 Texas Instruments Incorporated

表 7-1. Pin Functions (continued)

PIN		TYPE(1)	DESCRIPTION
NAME	NO.		
PMID	23	P	Connected to the drain of the reverse blocking MOSFET (RBFET) and the drain of HSFET. Place a 10-µF capacitor(2) on PMID to GND.
REGN	22	P	PWM low side driver positive supply output. Internally, REGN is connected to the anode of the boot-strap diode. Connect a 4.7- µ F (10-V rating) ceramic capacitor(2) from REGN to analog GND. The capacitor should be placed close to the IC.
STAT	5	DO	Open-drain interrupt output. Connect the STAT pin to a logic rail via 10-kΩ resistor. The STAT pin indicates charger status. Charge in progress: LOW Charge complete or charger in SLEEP mode: HIGH Charge suspend (fault response): Blink at 1Hz
SW	19	P	Switching node connecting to output inductor. Internally SW is connected to the source of the n-channel HSFET and the drain of the n-channel LSFET. Connect the 0.047- µ F bootstrap capacitor from SW to BTST.
	20		
SYS	15	P	System output connection point. The internal current sensing resistor is connected between SYS and BAT. Connect a 10 µF (min) capacitor(2) close to the SYS pin.
	16		
TS	11	AI	Battery temperature qualification voltage input. Connect a negative temperature coefficient thermistor (NTC). Program temperature window with a resistor divider from REGN to TS to GND. Charge and boost mode suspend when TS pin voltage is out of range. When TS pin is not used, connect a 10-kΩ resistor from REGN to TS and a 10-kΩ resistor from TS to GND. It is recommended to use a 103AT-2 thermistor. BQ25616 supports hot/cold profile and BQ25616J supports JEITA profile.
VAC	1	P	Charger input voltage sensing. Optional external n-channel ACFET is placed between VAC and VBUS. When VAC voltage is below ACOV threshold (14.2-V) and above UVLO, ACFET turns on to connect VAC to VBUS, and power up the charger IC. Connect VAC and VBUS if ACFET is not to be used.
VBUS	24	P	Charger input voltage. The internal n-channel reverse block MOSFET (RBFET) is connected between VBUS and PMID with VBUS on source. Place a 1-uF ceramic capacitor(2) from VBUS to GND and place it as close as possible to the device.
VSET	12	AI	VSET pin sets default battery charge voltage . Program battery regulation voltage with a resistor pull-down from VSET to GND. R_{VSET} > 50kΩ (float pin) = 4.208 V R_{VSET} < 500Ω (short to GND) = 4.352 V 5kΩ < R_{VSET} < 25kΩ = 4.100 V
Thermal Pad	—	P	Ground reference for the device that is also the thermal pad used to conduct heat from the device. This connection serves two purposes. The first purpose is to provide an electrical ground connection for the device. The second purpose is to provide a low thermal-impedance path from the device die to the PCB. This pad should be tied externally to a ground plane.

(1) AI = Analog input, AO = Analog Output, AIO = Analog input Output, DI = Digital input, DO = Digital Output, DIO = Digital input Output, P = Power
(2) All capacitors are ceramic unless otherwise specified

Copyright © 2022 Texas Instruments Incorporated

8 Specifications

8.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
Voltage	VAC (converter not switching)	–2	30	V
Voltage	VBUS (converter not switching)	-2	22	V
Voltage	PMID (converter not switching)	–0.3	22	V
Voltage	SW	–0.3	16	V
Voltage	BAT, SYS (converter not switching)	–0.3	7	V
Voltage	BTST	–0.3	22	V
Voltage	ACDRV	–0.3	40	V
Voltage	D+. D-, STAT, OTG, $\overline{PG}$, ILIM, $\overline{CE}$, ICHG, TS, VSET	–0.3	7	V
Output Sink Current	STAT, $\overline{PG}$		6	mA
T_J	Junction temperature	–40	150	°C
T_{stg}	Storage temperature	–55	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

8.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1)	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins(2)	±250	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

8.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{VBUS}	Input voltage	4		13.5	V
V_{BAT}	Battery voltage			4.35	V
I_{VBUS}	Input current			3.2	A
I_{SW}	Output current (SW)			3.2	A
I_{BAT}	Fast charging current			3	A
	RMS discharge current			6	A
T_A	Ambient temperature	–40		85	°C

8.4 Thermal Information

THERMAL METRIC(1)		BQ25616/BQ25616J RTW (WQFN) 24 Pins	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance (JEDEC(1))	31.9	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	27	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	9.2	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.4	°C/W

Copyright © 2022 Texas Instruments Incorporated

8.4 Thermal Information (continued)

THERMAL METRIC(1)		BQ25616/BQ25616J RTW (WQFN) 24 Pins	UNIT
Ψ_{JB}	Junction-to-board characterization parameter	9.2	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	2.8	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

8.5 Electrical Characteristics

$V_{VBUS_UVLOZ} < V_{VBUS} < V_{VBUS_OV}$ and $V_{VBUS} > V_{BAT} + V_{SLEEP}$, T_J = -40°C to +125°C, and T_J = 25°C for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
QUIESCENT CURRENTS						
I_{Q_BAT}	Quiescent battery current (BAT, SYS, SW)	VBAT = 4.5V, VBUS floating or VBUS = 0V - 5V, SCL, SDA = 0V or 1.8V, T_J < 85 °C, BATFET on.		9.5	15	µA
I_{VBUS}	Input current (VBUS) in buck mode when converter is switching	VBUS=5V, charge disabled, converter switching, ISYS = 0A		2.3		mA
I_{BST}	Quiescent battery current (BAT, SYS, SW) in boost mode when converter is switching	VBAT = 4.5V, VBUS = 4.9V, boost mode enabled, converter switching, I_{VBUS} = 0A		2.4		mA
VBUS / VBAT SUPPLY						
V_{VBUS_OP}	VBUS operating range		4		13.5	V
V_{VAC_UVLOZ}	VAC rising for ACFET turnon, no battery	VAC rising		3.55	3.85	V
V_{VAC_UVLO}	VAC falling for ACFET turnoff, no battery	VAC falling		3.25	3.55	V
V_{ACDRV}	External ACFET gate drive voltage with minimum 8nF CGS			10		V
V_{VBUS_UVLOZ}	VBUS rising for active bias, no battery	VBUS rising		3.3	3.7	V
V_{VBUS_UVLO}	VBUS falling to turnoff bias, no battery	VBUS falling		3	3.3	V
$V_{VBUS_PRESENT}$	VBUS to enable REGN	VBUS rising		3.65	3.9	V
$V_{VBUS_PRESENTZ}$	VBUS to disable REGN	VBUS falling		3.15	3.4	V
V_{SLEEP}	Enter Sleep mode threshold	VBUS falling, VBUS - VBAT, VBAT = 4V	15	60	110	mV
V_{SLEEPZ}	Exit Sleep mode threshold	VBUS rising, VBUS - VBAT, VBAT = 4V	115	220	340	mV
V_{ACOV}	VAC overvoltage rising threshold to turnoff ACFET and switching	VAC rising	13.5	14.2	14.85	V
	VAC overvoltage falling threshold to turnon ACFET and switching	VAC falling,	13	13.9	14.5	V
V_{BAT_UVLOZ}	BAT voltage for active bias, no VBUS	VBAT rising	2.5			V
V_{BAT_DPLZ}	BAT depletion rising threshold to turn on BATFET	VBAT rising	2.35		2.8	V
V_{BAT_DPL}	BAT depletion falling threshold to turn off BATFET	VBAT falling	2.18		2.62	V
$V_{POORSRC}$	Bad adapter detection threshold	VBUS falling	3.75	3.9	4.0	V
POWER PATH MANAGEMENT						
V_{SYS_MIN}	Typical minimum system regulation voltage	VBAT=3.2V < SYS_MIN = 3.5V, ISYS = 0A	3.5	3.65		V
V_{SYS_OVP}	System overvoltage threshold	VREG = 4.35V, Charge disabled, ISYS = 0A		4.7		V

Copyright © 2022 Texas Instruments Incorporated

8.5 Electrical Characteristics (continued)

V_{VBUS_UVLOZ} < V_{VBUS} < V_{VBUS_OV} and V_{VBUS} > V_{BAT} + V_{SLEEP}, T_J = -40°C to +125°C, and T_J = 25°C for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
R_{ON_RBFET}	Blocking FET on-resistance			45		mΩ
R_{ON_HSFET}	High-side switching FET on-resistance			62		mΩ
R_{ON_LSFET}	Low-side switching FET on-resistance			71		mΩ
V_{BATFET_FWD}	BATFET forward voltage in supplement mode	BAT discharge current 10mA, converter running		30		mV
BATTERY CHARGER						
V_{REG_ACC}	Charge voltage accuracy	VREG = 4.1V, R_{VSET}=10kΩ, T_J = 0°C - 85°C	4.0836	4.1	4.1164	V
		VREG = 4.2V, R_{VSET}>50kΩ, T_J = 0°C - 85°C	4.1832	4.2	4.2168	V
		VREG = 4.35V, R_{VSET}<500Ω, T_J = 0°C - 85°C	4.3326	4.35	4.3674	V
I_{CHG_RANGE}	Typical charge current regulation range		0		3	A
K_{ICHG}	ICHG pin setting ratio	ICHG=K_{ICHG}/R_{ICHG}, VBAT = 3.1V, T_J = –40°C - 85°C	639	677	715	AxΩ
		ICHG=K_{ICHG}/R_{ICHG}, VBAT = 3.8V, T_J = –40°C - 85°C	639	677	715	AxΩ
I_{CHG_ACC}	Fast charge current regulation accuracy	R_{ICHG} = 1100 Ω, VBAT = 3.1V or 3.8V, T_J = –40°C - 85°C	0.516	0.615	0.715	A
		R_{ICHG} = 562 Ω, VBAT = 3.1V or 3.8V, T_J = –40°C - 85°C	1.14	1.205	1.28	A
		R_{ICHG} = 372 Ω, VBAT = 3.1V or 3.8V, T_J = –40°C - 85°C	1.715	1.82	1.89	A
I_{PRECHG_RATIO}	Precharge current accuracy	As percentage of ICHG, VBAT = 2.6V		5		%
I_{PRECHG_ACC}	Precharge current accuracy	R_{ICHG} = 1100 Ω, VBAT = 2.6V, T_J = –40°C - 85°C	21	30	38	mA
		R_{ICHG} = 562 Ω, VBAT = 2.6V, T_J = –40°C - 85°C	48	60	67	mA
		R_{ICHG} = 372 Ω, VBAT = 2.6V, T_J = –40°C - 85°C	76	90	97	mA
I_{TERM_RATIO}	Termination current accuracy	As percentage of ICHG, VBAT = 4.35V, (char, all codes)		5		%
I_{TERM_ACC}	Termination current accuracy	R_{ICHG} = 1100 Ω, VBAT = 4.35V, T_J = 0°C - 85°C	9	31	57	mA
		R_{ICHG} = 562 Ω, VBAT = 4.35V, T_J = 0°C - 85°C	36	60	85	mA
		R_{ICHG} = 372 Ω, VBAT = 4.35V, T_J = 0°C - 85°C	56	91	126	mA
V_{BAT_SHORTZ}	Battery short voltage rising threshold to start pre-charge	VBAT rising	2.13	2.25	2.35	V
V_{BAT_SHORT}	Battery short voltage falling threshold to stop pre-charge	VBAT falling	1.85	2	2.15	V
I_{BAT_SHORT}	Battery short trickle charging current	VBAT < V_{BAT_SHORTZ}	70	90	110	mA
$V_{BATLOWV}$	Battery LOWV rising threshold to start fast-charge	VBAT rising	3	3.12	3.24	V
	Battery LOWV falling threshold to stop fast-charge	VBAT falling	2.7	2.8	2.9	V
V_{RECHG}	Battery recharge threshold	VBAT falling	90	100	150	mV

Copyright © 2022 Texas Instruments Incorporated

8.5 Electrical Characteristics (continued)

$V_{VBUS_UVLOZ} < V_{VBUS} < V_{VBUS_OV}$ and $V_{VBUS} > V_{BAT} + V_{SLEEP}$, T_J = -40°C to +125°C, and T_J = 25°C for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{SYS_LOAD}	System discharge load current during SYSOVP			30		mA
R_{ON_BATFET}	Battery FET on-resistance	T_J = -40°C - 85°C		19.5	26	mΩ
		T_J = -40°C - 125°C		19.5	30	mΩ
BATTERY OVERVOLTAGE PROTECTION						
V_{BAT_OVP}	Battery overvoltage rising threshold	VBAT rising, as percentage of VREG	103	104	105	%
	Battery overvoltage falling threshold	VBAT falling, as percentage of VREG	101	102	103	%
INPUT VOLTAGE / CURRENT REGULATION						
V_{INDPM_ACC}	Typical input voltage regulation accuracy		4.171	4.3	4.429	V
V_{INDPM_TRACK}	VINDPM threshold to track battery voltage	VBAT = 4.35V	4.45	4.55	4.74	V
I_{INDPM_ACC}	Input current regulation accuracy	IINDPM = 500mA (T_J=-40°C - 85°C)	450	465	500	mA
I_{INDPM_ACC}	Input current regulation accuracy	IINDPM = 900mA (T_J=-40°C-85°C)	750	835	900	mA
I_{INDPM_ACC}	Input current regulation accuracy	IINDPM = 1500mA (T_J=-40°C-85°C)	1300	1390	1500	mA
K_{ILIM}	ILIM pin setting ratio		459	478	500	A x Ω
D+ / D- DETECTION						
V_{DP_SRC}	D+ line source voltage		500	600	700	mV
I_{DP_SRC}	D+ line data contact detect current source	VD+ = 200 mV	7	10	14	µA
I_{DP_SINK}	D+ line sink current	VD+ = 500 mV	50	100	150	µA
$V_{DP_DAT_REF}$	D+ line data detect voltage	D+ pin Rising	250		400	mV
$V_{DP_LGC_LOW}$	D+ line logic low.	D+ pin Rising			800	mV
R_{DP_DWN}	D+ line pull-down resistance	VD+ = 500 mV	14.25		24.8	kΩ
I_{D+_LKG}	Leakage current into D+ line	Pull up to 1.8 V	–1		1	µA
V_{DM_SRC}	D- line source voltage		500	600	700	mV
I_{DM_SINK}	D- line sink current	VD- = 500 mV	50	100	150	µA
$V_{DM_DAT_REF}$	D- line data detect voltage	D- pin Rising	250		400	mV
R_{DM_DWN}	D- line pull-down resistance	VD- = 500 mV	14.25		24.8	kΩ
I_{D-_LKG}	Leakage current into D- line	Pull up to 1.8 V	–1		1	µA
$V_{D+_2p8_hi}$	D+ High comparator threshold for 2.8V detection	D+ pin rising	2.85	3	3.1	V
$V_{D+_2p8_lo}$	D+ Low comparator threshold for 2.8V detection	D+ pin rising	2.35	2.45	2.55	V
V_{D+_2p8}	D+ comparator threshold for non-standard adapter		2.55		2.85	V
$V_{D-_2p8_hi}$	D- High comparator threshold for 2.8V detection	D- pin rising	2.85	3	3.1	V
$V_{D-_2p8_lo}$	D- Low comparator threshold for 2.8V detection	D- pin rising	2.35	2.45	2.55	V
V_{D-_2p8}	D- comparator threshold for non-standard adapter		2.55		2.85	V
$V_{D+_2p0_hi}$	D+ High comparator threshold for 2.0V detection	D+ pin rising	2.15	2.25	2.35	V
$V_{D+_2p0_lo}$	D+ Low comparator threshold for 2.0V detection	D+ pin rising	1.6	1.7	1.85	V

Copyright © 2022 Texas Instruments Incorporated

8.5 Electrical Characteristics (continued)

V_{VBUS_UVLOZ} < V_{VBUS} < V_{VBUS_OV} and V_{VBUS} > V_{BAT} + V_{SLEEP}, T_J = -40°C to +125°C, and T_J = 25°C for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{D+_2p0}	D+ comparator threshold for non-standard adapter		1.85		2.15	V
$V_{D-_2p0_hi}$	D- High comparator threshold for 2.0V detection	D- pin rising	2.15	2.25	2.35	V
$V_{D-_2p0_lo}$	D- Low comparator threshold for 2.0V detection	D- pin rising	1.6	1.7	1.85	V
V_{D-_2p0}	D- comparator threshold for non-standard adapter		1.85		2.15	V
$V_{D+_1p2_hi}$	D+ High comparator threshold for 1.2V detection	D+ pin rising	1.35	1.5	1.6	V
$V_{D+_1p2_lo}$	D+ Low comparator threshold for 1.2V detection	D+ pin rising	0.85	0.95	1.05	V
V_{D+_1p2}	D+ comparator threshold for non-standard adapter		1.05		1.35	V
$V_{D-_1p2_hi}$	D- High comparator threshold for 1.2V detection	D- pin rising	1.35	1.5	1.6	V
$V_{D-_1p2_lo}$	D- Low comparator threshold for 1.2V detection	D- pin rising	0.85	0.95	1.05	V
V_{D-_1p2}	D- comparator threshold for non-standard adapter		1.05		1.35	V
THERMAL REGULATION AND THERMAL SHUTDOWN						
T_{REG}	Junction temperature regulation accuracy			110		°C
T_{SHUT}	Thermal Shutdown Rising threshold	Temperature Increasing		150		°C
	Thermal Shutdown Falling threshold	Temperature Decreasing		130		°C
CHARGE MODE THERMISTOR COMPARATOR (JEITA 616J or HOT/COLD 616)						
$V_{T1_RISE\%}$	TS pin voltage rising threshold, Charge suspended above this voltage.	As Percentage to REGN (0°C w/ 103AT)	72.4	73.3	74.2	%
$V_{T1_FALL\%}$	TS pin voltage falling threshold. Charge re-enabled to 20% of ICHG and VREG below this voltage.	As Percentage to REGN	71.5	72	72.5	%
$V_{T2_RISE\ \%}$	TS pin voltage rising threshold, Charge back to 20% of ICHG and VREG above this voltage (616J).	As Percentage to REGN (10°C w/ 103AT)	67.75	68.25	68.75	%
$V_{T2_FALL\%}$	TS pin voltage falling threshold. Charge back to ICHG and VREG below this voltage (616J)	As Percentage to REGN	66.45	66.95	67.45	%
$V_{T3_FALL\%}$	TS pin voltage falling threshold. Charge back to ICHG and VREG below this voltage (616J)	As Percentage to REGN (45°C w/ 103AT)	44.25	44.75	45.25	%
$V_{T3_RISE\%}$	TS pin voltage rising threshold. Charge back to ICHG and VREG above this voltage. (616J)	As Percentage to REGN	45.55	46.05	46.55	%
$V_{T5_FALL\%}$	TS pin voltage falling threshold, charge suspended below this voltage.	As Percentage to REGN (60°C w/ 103AT)	33.7	34.2	35.1	%
$V_{T5_RISE\%}$	TS pin voltage rising threshold. Charge back to ICHG and 4.1V above this voltage.	As Percentage to REGN	35	35.5	36	%
$V_{T1_RISE_HC\%}$	TS pin voltage rising threshold. Charge suspended above this voltage. (616)	As Percentage to REGN (0°C w/ 103AT)	72.4	73.3	74.2	%

Copyright © 2022 Texas Instruments Incorporated

8.5 Electrical Characteristics (continued)

V_{VBUS_UVLOZ} < V_{VBUS} < V_{VBUS_OV} and V_{VBUS} > V_{BAT} + V_{SLEEP}, T_J = -40°C to +125°C, and T_J = 25°C for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{T1_FALL_HC\%}$	TS pin voltage falling threshold. Charge back to ICHG and VREG below this voltage. (616)	As Percentage to REGN	71	72	73	%
$V_{T3_FALL_HC\%}$	TS pin voltage falling threshold. Charge suspended below this voltage. (616)	As Percentage to REGN (45°C w/ 103AT)	44.25	44.75	45.25	%
$V_{T3_RISE_HC\%}$	TS pin voltage rising threshold. Charge back to ICHG and VREG above this voltage. (616)	As Percentage to REGN	45.55	46.05	46.55	%
BOOST MODE THERMISTOR COMPARATOR (HOT/COLD)						
$V_{BCOLD_RISE\%}$	TS pin voltage rising threshold, boost mode is suspended above this voltage.	As Percentage to REGN (– 19.5°C w/ 103AT)	79.5	80	80.5	%
$V_{BCOLD_FALL\%}$	TS pin voltage falling threshold	As Percentage to REGN (0°C w/ 103AT)		72		%
$V_{BHOT_FALL\%}$	TS pin voltage threshold. boost mode is suspended below this voltage.	As Percentage to REGN, (64°C w/ 103AT)	30.2	31.2	32.2	%
$V_{BHOT_RISE\%}$	TS pin voltage rising threshold	As Percentage to REGN, (45°C w/ 103AT)		44		%
CHARGE OVERCURRENT COMPARATOR (CYCLE-BY-CYCLE)						
I_{HSFET_OCP}	HSFET cycle-by-cycle overcurrent threshold		5.2		8.0	A
SWITCHING CONVERTER						
F_{SW}	PWM switching frequency	Oscillator frequency	1.32	1.5	1.68	MHz
D_{MAX}	Maximum PWM Duty Cycle			97		%
BOOST MODE CONVERTER						
$V_{BATLOWV_OTG}$	Battery voltage exiting boost mode	V_{VBAT} falling	2.6	2.8	2.9	V
	Battery voltage entering boost mode	V_{VBAT} rising	2.9	3.0	3.15	V
V_{BST_ACC}	Boost mode voltage regulation accuracy	IVBUS = 0A, BOOST_V = 5V	4.85	5	5.15	V
I_{BST_ACC}	Boost mode current regulation accuracy		1.2	1.4	1.6	A
$I_{SYS_OCP_Q4}$	Boost mode battery discharge current clamp on BATFET Q4		9	10		A
REGN LDO						
V_{REGN}	REGN LDO output voltage	V_{VBUS} = 5V, I_{REGN} = 20mA	4.58	4.7	4.8	V
		V_{VBUS} = 9V, I_{REGN} = 20mA	5.6	6	6.5	V
I_{REGN}	REGN LDO current limit	V_{VBUS} = 5V, V_{REGN} = 3.8V	50			mA
LOGIC INPUT PIN						
V_{IH}	Input high threshold level (/CE)		1.3			V
V_{IL}	Input low threshold level (/CE)				0.4	V
I_{IN_BIAS}	High-level leakage current (/CE)	Pull up rail 1.8V			1	µA
LOGIC OUTPUT PIN						
V_{OL}	Output low threshold level (STAT, /PG)	Sink current = 5mA			0.4	V
I_{OUT_BIAS}	High-level leakage current (STAT, /PG)	Pull up rail 1.8V			1	µA


Copyright © 2022 Texas Instruments Incorporated

8.6 Timing Requirements

		MIN	NOM	MAX	UNIT
VBUS / VBAT POWER UP					
$t_{POORSRC}$	Bad adapter detection duration		30		ms
$t_{POORSRC_RETRY}$	Bad adapter detection retry wait time		2		s
BATTERY CHARGER					
t_{TERM_DGL}	Deglitch time for charge termination		30		ms
t_{RECHG_DGL}	Deglitch time for recharge threshold		30		ms
t_{TOP_OFF}	Typical top-off timer		30		min
t_{SAFETY}	Charge safety timer accuracy	8	10	12	hr


Copyright © 2022 Texas Instruments Incorporated

8.7 Typical Characteristics

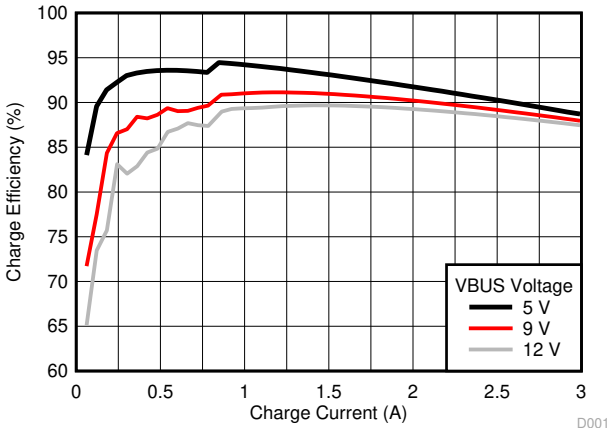

f_{SW} = 1.5 MHz　　Inductor DCR = 18 mΩ
V_{BAT} = 3.8 V

图 8-1. Charge Efficiency vs. Charge Current

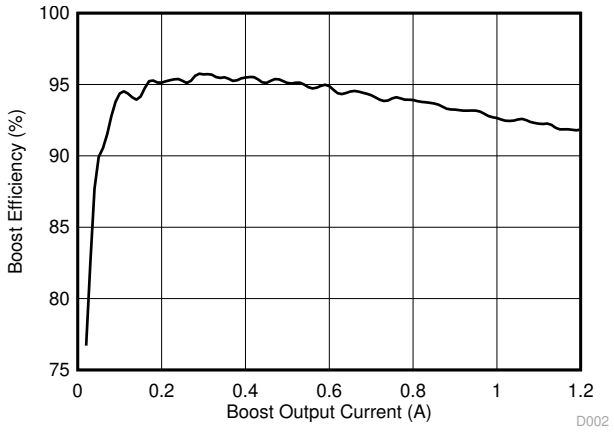

V_{OTG} = 5.0 V　　inductor DCR = 18 mΩ
V_{BAT} = 3.8 V

图 8-2. Efficiency vs. OTG Current



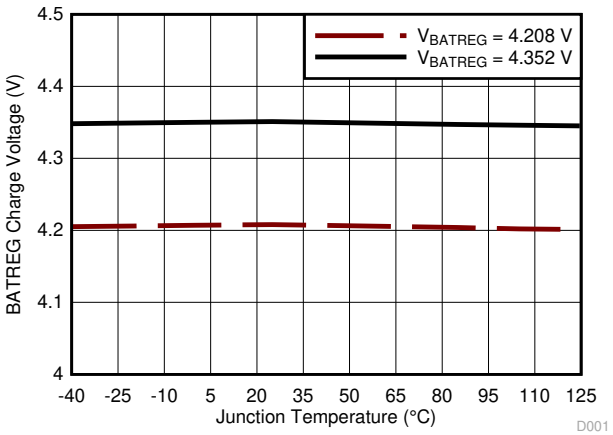


图 8-3. BATREG Charge Voltage vs. Junction Temperature

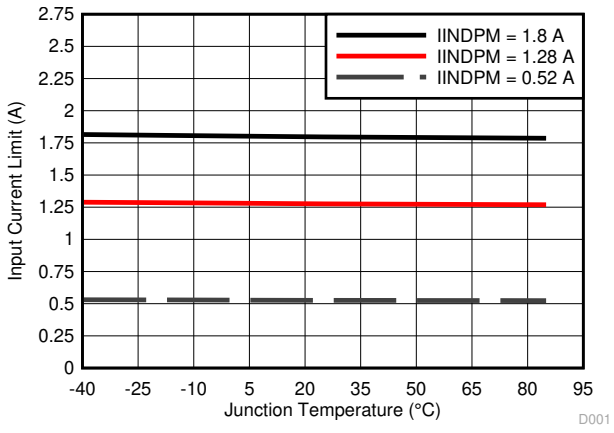


V_{VBUS} = 5 V

图 8-4. Input Current Limit vs. Junction Temperature

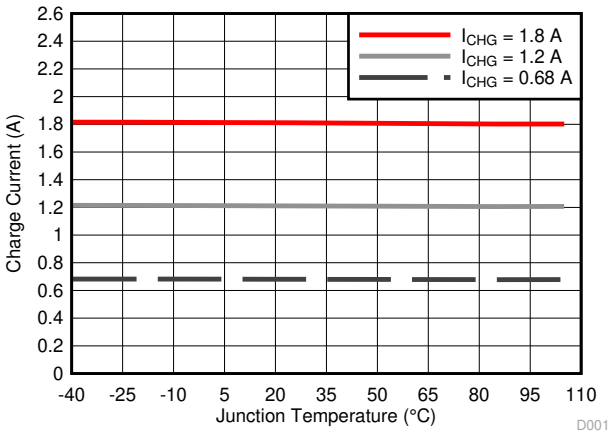

V_{VBUS} = 5 V　　V_{BAT} = 3.8 V

图 8-5. Charge Current vs. Junction Temperature

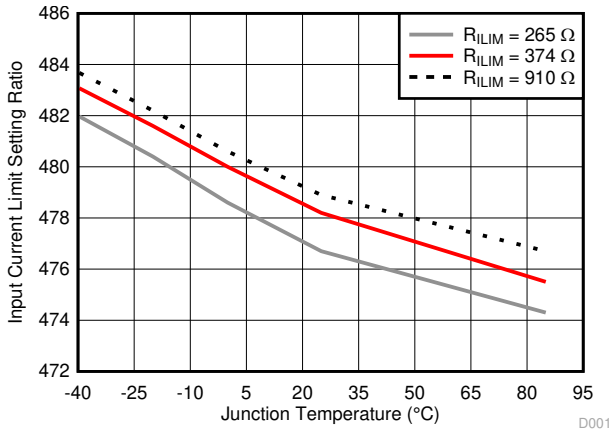


V_{VBUS} = 5 V　　V_{BAT} = 3.8 V

图 8-6. Input Current Limit Setting Ratio vs. Junction Temperature

Copyright © 2022 Texas Instruments Incorporated

8.7 Typical Characteristics (continued)

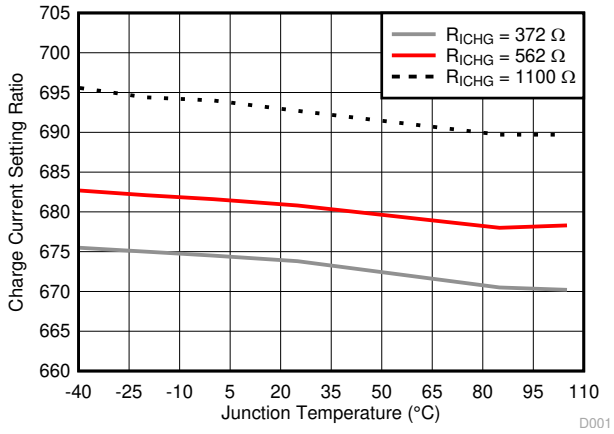

V_{VBUS} = 5 V

V_{BAT} = 3.8 V


图 8-7. Charge Current Setting Ratio vs. Junction Temperature

9 Detailed Description

9.1 Overview

The BQ25616/616J device is a highly integrated 3.0-A switch-mode battery charger for single cell Li-ion and Li-polymer battery. It includes an input reverse-blocking FET (RBFET, Q1), high-side switching FET (HSFET, Q2), low-side switching FET (LSFET, Q3), and battery FET (BATFET, Q4), and bootstrap diode for the high-side gate drive.

9.2 Functional Block Diagram

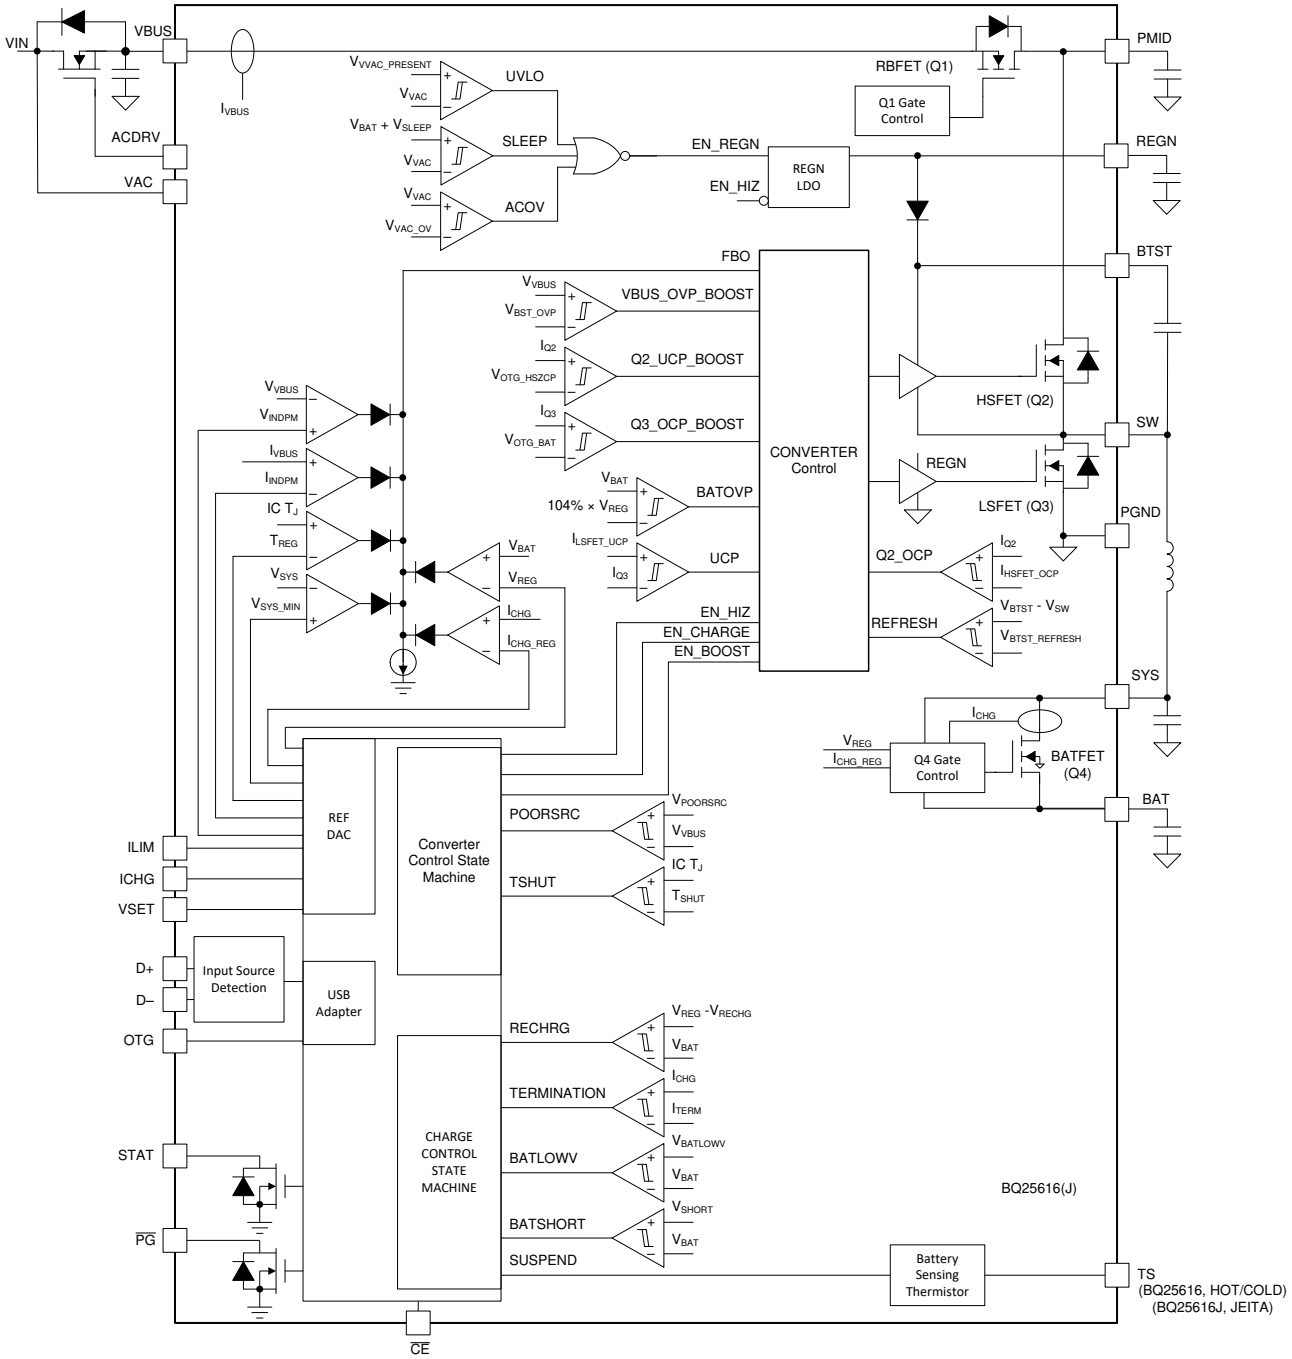

Copyright © 2022 Texas Instruments Incorporated

9.3 Feature Description

9.3.1 Power-On-Reset (POR)

The device powers internal bias circuits from the higher voltage of VBUS and BAT. When V_{VBUS} rises above V_{VBUS_UVLOZ} or V_{BAT} rises above V_{BAT_UVLOZ}, the sleep comparator, battery depletion comparator, and BATFET driver are active.

9.3.2 Device Power Up From Battery Without Input Source

If only the battery is present and the voltage is above depletion threshold ($V_{BAT\ _DPLZ}$), the BATFET turns on and connects the battery to the system. The REGN stays off to minimize the quiescent current. The low R_{DSON} of BATFET and the low quiescent current on BAT minimize the conduction loss and maximize the battery run time.

The device always monitors the discharge current through the BATFET. When the system is overloaded or shorted ($I_{BAT} > I_{SYS_OCP_Q4}$), the device turns off BATFET immediately until the input source plugs in again.

9.3.3 Power Up From Input Source

When an input source is plugged in, the device checks the input source voltage to turn on the REGN LDO and all the bias circuits. It detects and sets the input current limit before the buck converter is started. The power-up sequence from input source is as listed:

1. Power Up ACFET, see 节 9.3.3.1 (optional)
2. Power Up REGN LDO, see 节 9.3.3.2
3. Poor Source Qualification, see 节 9.3.3.3
4. Input Source Type Detection is based on D+/D – to set default input current limit (IINDPM threshold), see 节 9.3.3.4
5. Input Voltage Limit Threshold Setting (VINDPM threshold), see 节 9.3.3.5
6. Power Up Converter, see 节 9.3.3.6

9.3.3.1 Power Up ACFET


The external ACFET provides an additional layer of voltage protection for the device. During input surge up to 30 V, the charger turns off ACFET and converter with 130-ns response time to disconnect VBUS from VAC. If users don't need ACFET, they shall connect VAC to VBUS and keep ACDRV pin floating. The ACFET is enabled when all the below conditions are valid.

The ACFET is enabled when all the below conditions are valid.

- $V_{VAC_PRESENT} < V_{VAC} < V_{ACOV}$.
- After t_{DEB} (15 ms typ) delay is completed

If one of the above conditions is not valid, ACFET keeps off. The battery powers the system If it is present.

Copyright © 2022 Texas Instruments Incorporated

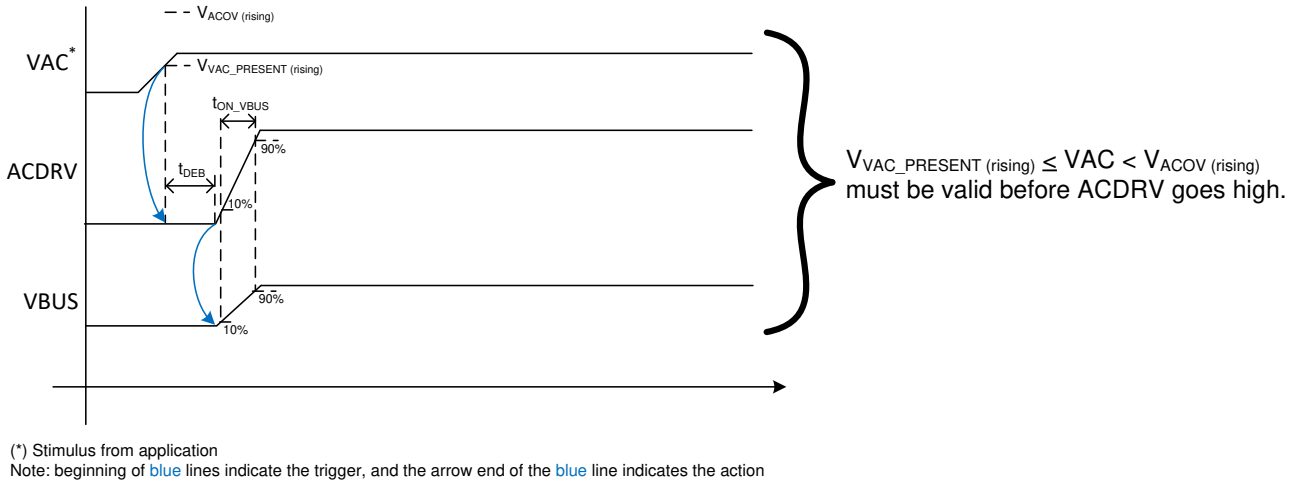

(*) Stimulus from application
Note: beginning of blue lines indicate the trigger, and the arrow end of the blue line indicates the action

图 9-1. ACFET Startup Control

9.3.3.2 Power Up REGN LDO

The REGN LDO supplies internal bias circuits as well as the HSFET and LSFET gate drive. It also provides the bias rail to TS external resistors. The pull-up rail of STAT can be connected to REGN as well. The REGN LDO is enabled when all the below conditions are valid:

- V_{VBUS} > V_{VBUS_UVLOZ}
- In buck mode, ACFET turns on, V_{VBUS} > V_{BAT} + V_{SLEEPZ}
- In boost mode, V_{VBUS} < V_{BAT} + V_{SLEEPZ}
- After 220-ms delay is completed

During high impedance mode , REGN LDO turns off. The battery powers up the system.

9.3.3.3 Poor Source Qualification

After the REGN LDO powers up, the device starts to check current capability of the input source. The first step is poor source detection.

- VBUS voltage above $V_{POORSRC}$ when pulling I_{BADSRC} (typical 30 mA)

If the device fails the poor source detection, it repeats poor source qualification every 2 seconds.

9.3.3.4 Input Source Type Detection (IINDPM Threshold)

After poor source detection, the device runs input source detection through D+/D– lines . The D+/D– detection follows the USB Battery Charging Specification 1.2 (BC1.2) to detect standard (SDP/CDP/DCP) and non-standard adapters through USB D+/D– lines.

9.3.3.4.1 D+/D– Detection Sets Input Current Limit

The device contains a D+/D– based input source detection to set the input current limit when a 5-V adapter is plugged-in. The D+/D– detection includes standard USB BC1.2 and non-standard adapters. When an input source is plugged in, the device starts standard USB BC1.2 detection. The USB BC1.2 is capable of identifying Standard Downstream Port (SDP), Charging Downstream Port (CDP) and Dedicated Charging Port (DCP). The non-standard detection is used to distinguish vendor specific adapters (Apple and Samsung) based on their unique dividers on the D+/D– pins. If an adapter is detected as DCP, the input current limit is set at 2.4-A. If an adapter is detected as unknown, the input current limit is set by ILIM pin .

The D+/D– automatically runs when adapter plugs in. The D+/D– detection contains three steps, DCD (Data Contact Detection), primary detection, and secondary detection.

Copyright © 2022 Texas Instruments Incorporated

DCD (Data Contact Detection) uses a current source to detect when the D+/D – pins have made contact during an attach event. The protocol for data contact detect is as follows:

- Detect VBUS present and VBUS_GD (pass poor source detection)
- Turn on D+ I_{DP_SRC} and the D – pull-down resistor R_{DM_DWN} for 13 ms
- If the USB connector is properly attached, the D+ line goes from HIGH to LOW, wait up to 0.5 sec. When the DCD timer of 0.5 sec is expired, the non-standard adapter detection is applied to set the input current limit.
- Turn off I_{DP_SRC} and disconnect R_{DM_DWN}

The primary detection is used to distinguish between USB host (Standard Down Stream Port, or SDP) and different type of charging ports (Charging Down Stream Port, or CDP, and Dedicated Charging Port, or DCP). The protocol for primary detection is as follows:

- Turn on V_{DP_SRC} on D+ and I_{DM_Sink} on D – for 40 ms
- If portable device is attached to a USB host (SDP), the D – is below V_{REF_DAT}. Otherwise, it is attached to either CDP or DCP.
- Turn off V_{DP_SRC} and I_{DM_Sink}

The secondary detection is used to distinguish two types of charging ports (CDP and DCP). The protocol for secondary detection is as follows:

- Turn on V_{DM_SRC} on D- and I_{DP_Sink} on D+ for 40 ms
- If portable device is attached to a Charging Downstream Port (CDP), the D+ is below V_{DAT_REF}. Otherwise, it is attached to DCP.
- Turn off V_{DM_SRC} and I_{DP_Sink}

Most of the time, a CDP requires the portable device (such as smart phone, tablet) to send back an enumeration within 2.5 seconds of CDP plug-in. Otherwise, the port will power cycle back to SDP even the D+/D – detection indicates CDP.

表 9-1. Non-Standard Adapter Detection

NON-STANDARD ADAPTER	D+ THRESHOLD	D – THRESHOLD	INPUT CURRENT LIMIT (A)
Divider 1	V_{D+} within $V_{D+/D-_2p8}$	V_{D-} within $V_{D+/D-_2p0}$	2.1
Divider 2	V_{D+} within $V_{D+/D-_1p2}$	V_{D-} within $V_{D+/D-_1p2}$	2
Divider 3	V_{D+} within $V_{D+/D-_2p0}$	V_{D-} within $V_{D+/D-_2p8}$	1
Divider 4	V_{D+} within $V_{D+/D-_2p8}$	V_{D-} within $V_{D+/D-_2p8}$	2.4

表 9-2. Input Current Limit Setting from D+/D – Detection

D+/D – DETECTION	INPUT CURRENT LIMIT (IINDPM)
USB CDP	1.5 A
USB DCP	2.4 A
Divider 1	2.1 A
Divider 2	2.0 A
Divider 3	1.0 A
Divider 4	2.4 A
Unknown 5-V Adapter	Set by ILIM pin

9.3.3.5 Input Voltage Limit Threshold Setting (VINDPM Threshold)

The device has two modes to set the VINDPM threshold.

- Fixed VINDPM threshold. VINDPM is set at 4.3 V.
- VINDPM threshold tracks the battery voltage to optimize the converter headroom between input and output. The actual input voltage limit is the higher of the VINDPM setting (4.3-V) and V_{BAT} + 200 mV.

Copyright © 2022 Texas Instruments Incorporated

9.3.3.6 Power Up Converter in Buck Mode

After the input current limit is set, the converter is enabled and the HSFET and LSFET start switching. The system voltage is powered from the converter instead of the battery. If battery charging is disabled, the BATFET turns off. Otherwise, the BATFET stays on to charge the battery.

The device provides soft start when the system rail is ramping up. When the system rail is below V_{BAT_SHORT}, the input current is limited to 200 mA . The system load should be appropriately planned not to exceed the 200-mA IINDPM limit. After the system rises above V_{BAT_SHORTZ}, the device input current limit is the value set the by ILIM pin .

As a battery charger, the device deploys a highly efficient 1.5-MHz step-down switching regulator. The fixed frequency oscillator keeps tight control of the switching frequency under all conditions of input voltage, battery voltage, charge current, and temperature simplifying output filter design.

The converter supports PFM operation by default for fast transient response during system voltage regulation and better light load efficiency.

9.3.4 Boost Mode Operation From Battery

The device supports boost converter operation to deliver power from the battery to other portable devices through a USB port. The output voltage is regulated at 5 V and output current is up to 1.2 A with constant current regulation.

Boost operation is enabled if the conditions below are valid:

1. OTG pin HIGH
2. VBUS less than V_{BAT} + V_{SLEEP} (in sleep mode) before converter starts.
3. Voltage at TS (thermistor) pin, as a percentage of V_{REGN}, is within acceptable range ($V_{BHOT_RISE\%}$ < $V_{TS\%}$ < $V_{BCOLD_FALL\%}$)
4. After 30-ms delay from boost mode enable .
5. Not in any fault such as $I_{SYS_OCP_Q4}$, TSHUT, ACOV or VBUS OV.

The converter supports PFM operation at light load in Boost mode.

9.3.5 Standalone Charger

The BQ25616/616J is a standalone device without host control. Any change on $\overline{CE}$, ICHG and ILIM pins will cause a real time internal reference change. Charging is enabled or disabled via the $\overline{CE}$ pin. D+/D – and ILIM pins control the input current limit settings. D+/D – detection and VSET pin setting only takes effect upon adapter plug-in.

Charge current must be programmed to a value within a range of 300 mA to 3000 mA with a pull-down resistor on the ICHG pin. The charge current is set as:

$$I_{ICHG} = K_{ICHG}/R_{ICHG} \quad (1)$$

Input current limit must be programmed to a value within a range of 500 mA to 3200 mA with a pull-down resistor on the ILIM pin. The input current limit is set as:

$$I_{IINDPM} = K_{ILIM}/R_{ILIM} \quad (2)$$

The battery regulation voltage is programmed with a pull-down resistor on the VSET pin as follows:

- R_{VSET} > 50 kΩ (float pin): V_{REG} = 4.20 V
- R_{VSET} < 500 Ω (short pin): V_{REG} = 4.35 V
- 5kΩ < R_{VSET} < 25 kΩ: V_{REG} = 4.10 V

表 9-3. Standalone Device Configuration

	BQ25616/616J
USB OTG	5 V/1.2 A

Copyright © 2022 Texas Instruments Incorporated

表 9-3. Standalone Device Configuration (continued)

	BQ25616/616J
USB Detection	D+/D –
VINDPM	4.3 V and V_{BAT} + 200 mV
VBUS Operating Range	4 V - 13.5 V
V_{REG}	VSET pin (4.20 V, 4.35 V, or 4.10 V)
Safety Timer	10 hr fast charge
Pre-charge Timer	2 hr
I_{PRECHG}	5% of I_{CHG}
I_{TERM}	5% of I_{CHG}
Charging Temperature Profile	JEITA 0-60°C (BQ25616J), Hot/Cold 0-45°C (BQ25616)
OTG Temperature Profile	– 20°C to +60°C

If a fault is detected, the STAT pin will blink at 1 Hz. STAT pin will stop blinking when the fault goes away. All faults will be reset upon adapter re-connection. A boost mode fault will be cleared either by adapter re-connection or toggling of the OTG pin.

9.3.6 Power Path Management

The device accommodates a wide range of input sources such as USB, wall adapter, or car charger. The device provides automatic power path selection to supply the system (SYS) from the input source (VBUS), battery (BAT), or both.

9.3.6.1 Narrow VDC Architecture

When the battery is below the minimum system voltage setting, the BATFET operates in linear mode (LDO mode), and the system is typically 180 mV above the minimum system voltage setting. As the battery voltage rises above the minimum system voltage, the BATFET is fully on and the voltage difference between the system and battery is the V_{DS} of the BATFET.

When battery charging is disabled and above the minimum system voltage setting or charging is terminated, the system is always regulated at typically 50 mV above the battery voltage.

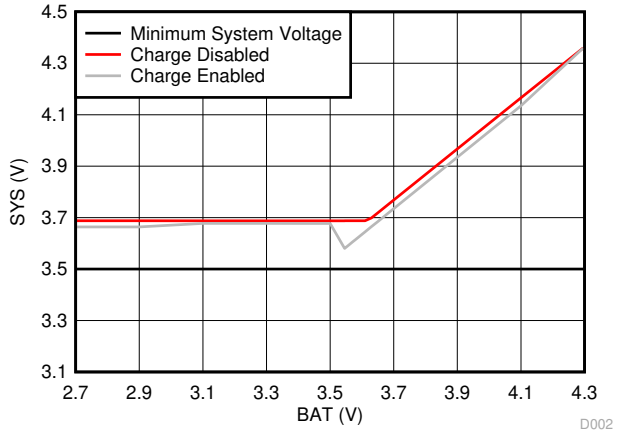


图 9-2. System Voltage vs Battery Voltage

9.3.6.2 Dynamic Power Management

To meet the maximum current limit in the USB specification and avoid overloading the adapter, the device features Dynamic Power Management (DPM), which continuously monitors the input current and input voltage. When input source is overloaded, either the current exceeds the input current limit (IINDPM) or the voltage falls

Copyright © 2022 Texas Instruments Incorporated

below the input voltage limit (VINDPM). The device then reduces the charge current until the input current falls below the input current limit or the input voltage rises above the input voltage limit.

When the charge current is reduced to zero, but the input source is still overloaded, the system voltage starts to drop. Once the system voltage falls below the battery voltage, the device automatically enters the supplement mode where the BATFET turns on and the battery starts discharging so that the system is supported from both the input source and battery.

图 9-3 shows the DPM response with 9-V/1.2-A adapter, 3.2-V battery, 2.8-A charge current and 3.5-V minimum system voltage setting.

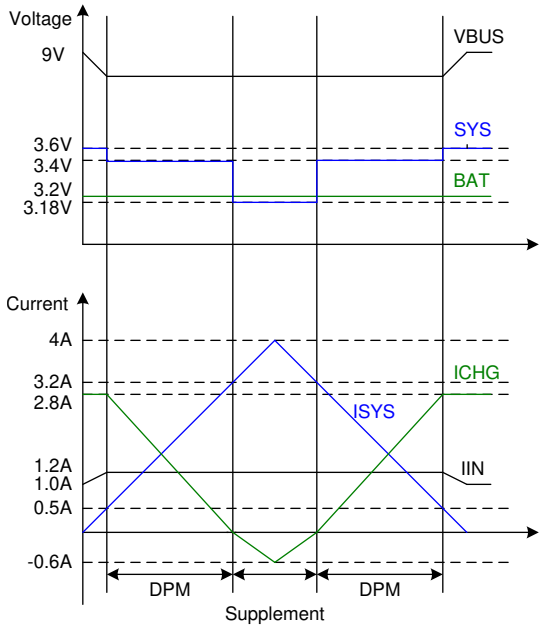


图 9-3. DPM Response

9.3.6.3 Supplement Mode

When the system voltage falls below the battery voltage, the BATFET turns on and the BATFET gate is regulated so that the minimum BATFET V_{DS} stays at 30 mV when the current is low. This prevents oscillation from entering and exiting the supplement mode.

As the discharge current increases, the BATFET gate is regulated with a higher voltage to reduce R_{DSON} until the BATFET is in full conduction. At this point onwards, the BATFET V_{DS} linearly increases with discharge current. 图 9-4 shows the V-I curve of the BATFET gate regulation operation. The BATFET turns off to exit supplement mode when the battery is below battery depletion threshold.

Copyright © 2022 Texas Instruments Incorporated

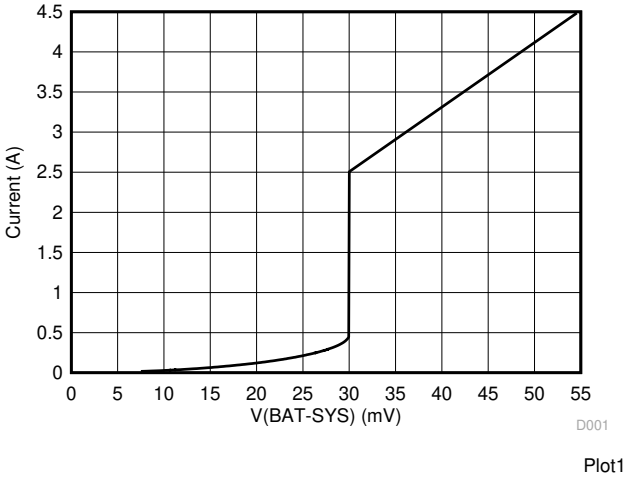


图 9-4. BAFET V-I Curve

9.3.7 Battery Charging Management

The device charges a 1-cell Li-ion battery with up to 3.0-A charge current for a high capacity tablet battery. The 19.5-mΩ BATFET improves charging efficiency and minimizes the voltage drop during discharging.

9.3.7.1 Autonomous Charging Cycle

When battery charging is enabled ($\overline{CE}$ pin is LOW), the device autonomously completes a charging cycle. The device default charging parameters are listed in 表 9-4.

表 9-4. Charging Parameter Default Settings

DEFAULT MODE	BQ25616/616J
Charging voltage	VSET pin, 4.10 V/4.20 V/4.35 V
Charging current	I_{CHG} pin
Pre-charge current	5% of I_{CHG}
Termination current	5% of I_{CHG}
Temperature profile	JEITA (BQ25616J), Hot/Cold (BQ25616)
Safety timer	10 hours

A new charge cycle starts when the following conditions are valid:

- Converter starts
- Battery charging is enabled ($\overline{CE}$ is low)
- No thermistor fault on TS.
- No safety timer fault

The device automatically terminates the charging cycle when the charging current is below the termination threshold, the battery voltage is above the recharge threshold, and the device is not in DPM mode or thermal regulation. When a fully charged battery is discharged below recharge threshold, the device automatically starts a new charging cycle. After the charge is done, a toggle of the $\overline{CE}$ pin initiates a new charging cycle. Adapter removal and replug will also restart a charging cycle.

The STAT output indicates charging status: charging (LOW), charging complete or charge disable (HIGH), or charging fault (blinking).

Copyright © 2022 Texas Instruments Incorporated

9.3.7.2 Battery Charging Profile

The device charges the battery in five phases: battery short, preconditioning, constant current, constant voltage, and top-off trickle charging. At the beginning of a charging cycle, the device checks the battery voltage and regulates current and voltage accordingly.

表 9-5. Charging Current Setting

V_{BAT}	CHARGING CURRENT	DEFAULT SETTING
< 2.2 V	I_{BAT_SHORT}	100 mA
2.2 V to 3 V	I_{PRECHG}	5% of ICHG pin setting
> 3 V	I_{CHG}	ICHG pin setting

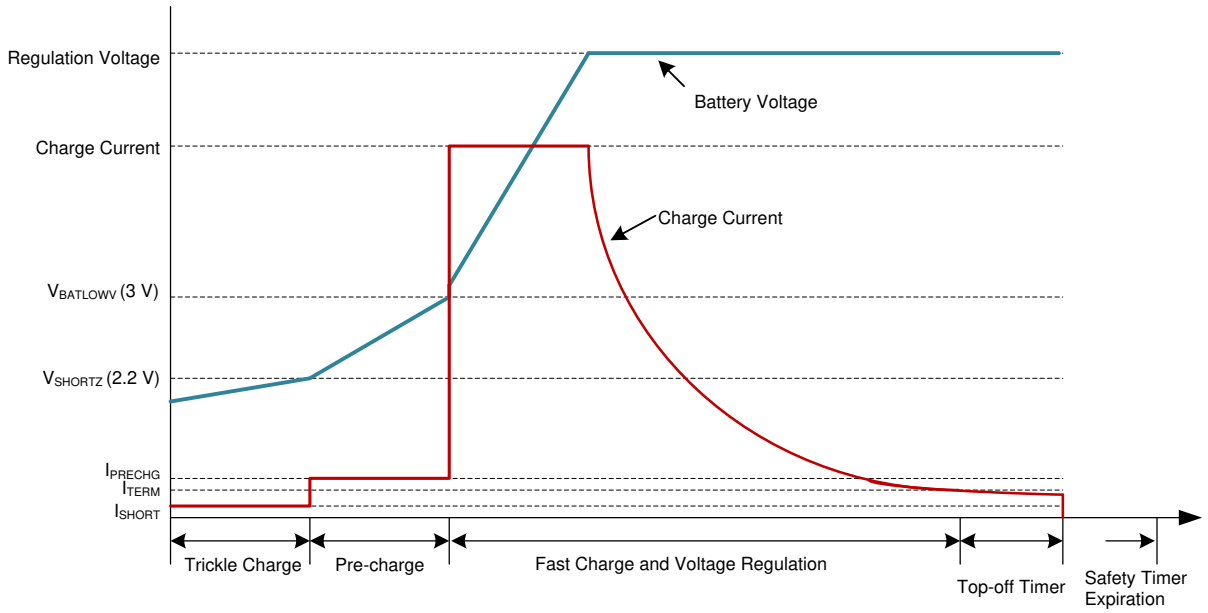


图 9-5. Battery Charging Profile

9.3.7.3 Charging Termination

The device terminates a charge cycle when the battery voltage is above the recharge threshold, and the current is below termination current. After the charging cycle has completed, the BATFET turns off. STAT is asserted HIGH to indicate charging is done. The converter keeps running to power the system, and BATFET can turn on again to engage 节 9.3.6.3.

If the device is in IINDPM/VINDPM regulation, or thermal regulation, the actual charging current will be less than the termination value. In this case, termination is temporarily disabled.

When termination occurs, the STAT pin goes HIGH.

The top-off timer is reset at one of the following conditions:

1. Charge disable to enable
2. Charger enters termination

9.3.7.4 Thermistor Qualification

The device provides a single thermistor input for battery temperature monitoring.

Copyright © 2022 Texas Instruments Incorporated

9.3.7.4.1 JEITA Guideline Compliance During Charging Mode (BQ25616J)

To improve the safety of charging Li-ion batteries, the JEITA guideline was released on April 20, 2007. The guideline emphasized the importance of avoiding a high charge current and high charge voltage at certain low and high temperature ranges.

To initiate a charge cycle, the voltage on TS pin, as a percentage of V_{REGN}, must be within the $V_{T1_FALL\%}$ to $V_{T5_RISE\%}$ thresholds. If the TS voltage percentage exceeds the T1-T5 range, the controller suspends charging, a TS fault is reported and waits until the battery temperature is within the T1-T5 range.

At cool temperature (T1-T2), JEITA recommends the charge current to be reduced to 20% of I_{CHG}. At warm temperature (T3-T5), JEITA recommends charge voltage less than 4.1 V.

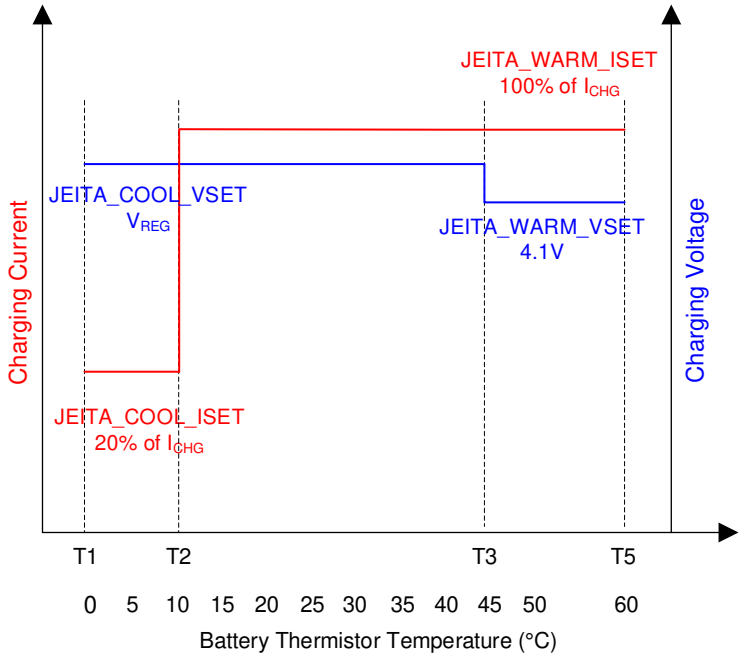


图 9-6. JEITA Profile (BQ25616J)

方程式 3 through 方程式 4 describe how to calculate resistor divider values on the TS pin.

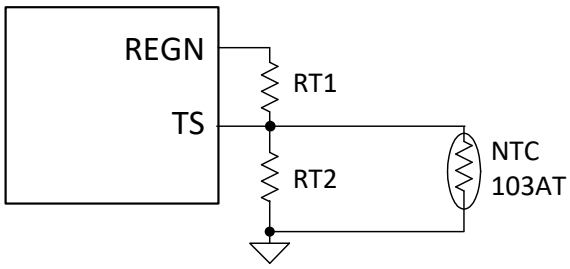


图 9-7. TS Pin Resistor Network

$$RT1 = \frac{\frac{1}{V_{T1}\%} - 1}{\frac{1}{R_{T2}} + \frac{1}{R_{NTC,T1}}} \quad (3)$$

$$RT2 = \frac{R_{NTC,T1} \times R_{NTC,T5} \times \left(\frac{1}{V_{T5}\%} - \frac{1}{V_{T1}\%}\right)}{R_{NTC,T1} \times \left(\frac{1}{V_{T1}\%} - 1\right) - R_{NTC,T5} \times \left(\frac{1}{V_{T5}\%} - 1\right)} \quad (4)$$

In the equations above, $R_{NTC, T1}$ is the NTC thermistor resistance value at temperature T1 and $R_{NTC, T5}$ is the NTC thermistor resistance value at temperature T5. Selecting a 0°C to 60°C range for a Li-ion or Li-polymer battery then:

- $R_{NTC,T1}$ = 27.28 kΩ (0°C)
- $R_{NTC,T5}$ = 3.02 kΩ (60°C)
- RT1 = 5.3 kΩ
- RT2 = 31.14 kΩ

9.3.7.4.2 Hot/Cold Temperature Window During Charging Mode (BQ25616)

The BQ25616 provides simple Hot/Cold window T1-T3 with V_{REG} and I_{CHG} set on the pins. When RT1 is 5.3 KΩ and RT2 is 31.14 KΩ, T1 is 0°C and T3 is 45°C.

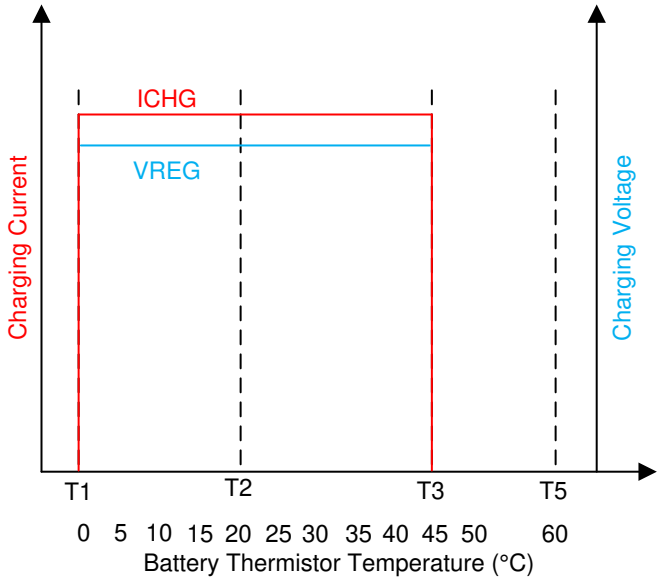


图 9-8. Hot/Cold Profile (BQ25616)

9.3.7.4.3 Boost Mode Thermistor Monitor During Battery Discharge Mode

For battery protection during Boost mode, the device monitors battery temperature to be within the V_{BCOLD} and V_{BHOT} thresholds. When RT1 is 5.3 kΩ and RT2 is 31.14 kΩ, T_{BCOLD} default is -19.5°C and T_{BHOT} default is 64°C. When the temperature is outside of the temperature thresholds, Boost mode is suspended.

9.3.7.5 Charging Safety Timer

The device has a built-in safety timer to prevent an extended charging cycle due to abnormal battery conditions. The safety timer is 2 hours when the battery is below the $V_{BATLOWV}$ threshold and 10 hours when the battery is

Copyright © 2022 Texas Instruments Incorporated

higher than the $V_{BATLOWV}$ threshold. When the safety timer expires, the STAT pin is blinking at 1 Hz to report a safety timer expiration fault.

During IINDPM/VINDPM regulation, or thermal regulation, the safety timer counts at a half clock rate, because the actual charge current is likely below the setting. For example, if the charger is in input current regulation throughout the whole charging cycle, and the safety time is set to 10 hours, the safety timer will expire in 20 hours.

During faults of BAT_FAULT, NTC_FAULT that lead to charging suspend, the safety timer is suspended as well. Once the fault goes away, the timer resumes. If the user stops the current charging cycle, and starts it again, the timer gets reset (toggle of $\overline{CE}$ pin).

9.3.8 Status Outputs ($\overline{PG}$, STAT)

9.3.8.1 Power Good Indicator ($\overline{PG}$ Pin)

The $\overline{PG}$ pin goes LOW to indicate a good input source when:

- V_{VBUS} above V_{VBUS_UVLO}
- V_{VBUS} above battery (not in sleep)
- V_{VBUS} below V_{ACOV} threshold
- V_{VBUS} above $V_{POORSRC}$ (typical 3.8 V) when I_{BADSRC} (typical 30 mA) current is applied (not a poor source)
- Completed 节 9.3.3.4

9.3.8.2 Charging Status Indicator (STAT)

The device indicates the charging state on the open drain STAT pin. The STAT pin can drive an LED.

表 9-6. STAT Pin State

CHARGING STATE	STAT INDICATOR
Charging in progress (including recharge)	LOW
Charging termination (top off timer may be running)	HIGH
Sleep mode, charge disable, Boost mode	HIGH
Charge suspend (input overvoltage, TS fault, safety timer fault, or system overvoltage)	Blinking at 1 Hz

9.3.9 Protections

9.3.9.1 Input Current Limit

The device's ILIM pin is to program maximum input current when D+/D – detection identifies an unknown adaptor plugged in. The maximum input current is set by a resistor from ILIM pin to ground as:

$$I_{INDPM} = \frac{K_{ILIM}}{R_{ILIM}} \quad (5)$$

9.3.9.2 Voltage and Current Monitoring in Buck Mode

9.3.9.2.1 Input Overvoltage Protection (ACOV)

This device integrates the functionality of an overvoltage protector. The device can be paired with an external N-channel FET to block input voltages in excess of the VBUS rating. For correct operation, connect the cathode of the body diode to the VAC node. Back-to-back body diodes between VAC and VBUS are not recommended and will prevent correct operation. The input voltage is sensed via the VAC pin and the ACDRV pin is used to control the external FET gate for protection. The default OVP threshold is 14.2 V. The ACOV circuit has a reaction time of 130 ns (typical) to turn off the external ACFET. Note that turning off the external ACFET takes longer and depends on its gate capacitance. In addition to turning off the external ACFET, an ACOV event immediately stops converter switching whether in buck or Boost mode. The device automatically resumes normal operation once the input voltage drops back below the OVP threshold. During ACOV, REGN LDO is on, and the device does not enter HIZ mode.

Copyright © 2022 Texas Instruments Incorporated

9.3.9.2.2 System Overvoltage Protection (SYSOVP)

The charger device clamps the system voltage during a load transient so that the components connected to the system are not damaged due to high voltage. The V_{SYS_OVP} threshold is about 300 mV above battery regulation voltage when battery charging is terminated. Upon SYSOVP, the converter stops switching immediately to clamp the overshoot. The charger pulls 30-mA I_{SYS_LOAD} discharge current to bring down the system voltage.

9.3.9.3 Voltage and Current Monitoring in Boost Mode

9.3.9.3.1 Boost Mode Overvoltage Protection

When PMID voltage rises above the regulation target and exceeds V_{BST_OVP}, the device stops switching immediately and the device exits Boost mode after the Boost mode OVP lasts for 12 ms. Meanwhile, if VAC (and VBUS when shorted to VAC) voltage exceeds V_{ACOV}, the device exits Boost mode as well.

9.3.9.4 Thermal Regulation and Thermal Shutdown

9.3.9.4.1 Thermal Protection in Buck Mode

Besides the battery temperature monitor on the TS pin, the device monitors the internal junction temperature T_J to avoid overheating the chip and limits the IC junction temperature in buck mode. When the internal junction temperature exceeds the thermal regulation limit (110°C), the device lowers down the charge current. During thermal regulation, the actual charging current is usually below the programmed battery charging current. Therefore, termination is disabled, the safety timer runs at half the clock rate.

Additionally, the device has thermal shutdown to turn off the converter and the BATFET when the IC surface temperature exceeds T_{SHUT} 150°C. The BATFET and converter are enabled to recover when IC temperature is 130°C.

9.3.9.4.2 Thermal Protection in Boost Mode

Besides the battery temperature monitor on the TS pin, the device monitors the internal junction temperature to provide thermal shutdown during Boost mode. When the IC junction temperature exceeds T_{SHUT} 150°C, Boost mode is disabled . When the IC junction temperature is below 145°C, the host can re-enable Boost mode.

9.3.9.5 Battery Protection

9.3.9.5.1 Battery Overvoltage Protection (BATOVP)

The battery overvoltage limit is clamped at 4% above battery regulation voltage. When battery overvoltage occurs, the charger device immediately stops switching.

9.3.9.5.2 Battery Overdischarge Protection

When the battery is discharged below $V_{BAT_DPL_FALL}$, the BATFET latches off to protect the battery from overdischarge. To recover from overdischarge latch-off, an input source plug-in is required at VAC/VBUS.

9.3.9.5.3 System Overcurrent Protection

When the system is shorted or significantly overloaded (I_{BAT} > I_{BATOP}) and the current exceeds BATFET overcurrent limit, the BATFET latched off. The BATFET latch can be reset with VBUS plug-in.

9.4 Device Functional Modes

The BQ25616/616J is a standalone device and therefore does not have I^2C functions.

Copyright © 2022 Texas Instruments Incorporated

10 Application and Implementation

备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客 户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

10.1 Application Information

A typical application consists of the device configured as a stand-alone power path management device and a single cell battery charger for Li-ion and Li-polymer batteries used in a wide range of smart phones and other portable devices. It integrates an input reverse-block FET (RBFET, Q1), high-side switching FET (HSFET, Q2), low-side switching FET (LSFET, Q3), and battery FET (BATFET Q4) between the system and battery. The device also integrates a bootstrap diode for the high-side gate drive.

External ACFET is optional. When external OVP is not used, short the VBUS and VAC pins and allow the ACDRV pin to float.

10.2 Typical Applications

10.2.1 BQ25616/616J Application without External OVP

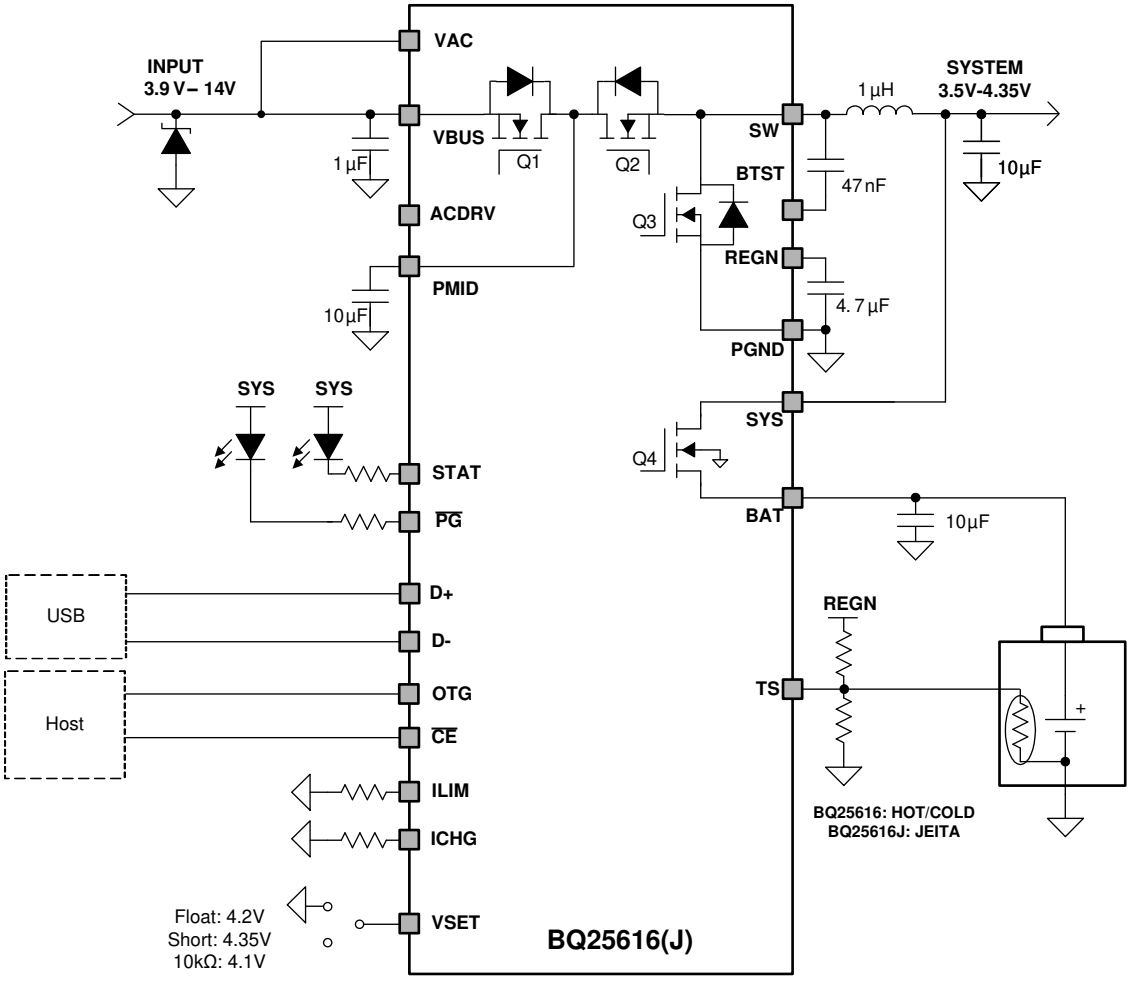


图 10-1. BQ25616/616J Application Diagram without External OVP

10.2.1.1 Design Requirements

For this design example, use the parameters shown in the table below.

表 10-1. Design Parameters

PARAMETER	VALUE
V_{VBUS} voltage range	4-V to 13.5-V
Input current limit (D+/D – Detection)	2.4-A
Fast charge current limit (ICHG pin)	ICHG pin
Minimum system voltage	3.5-V
Battery regulation voltage (VSET pin)	4.2-V

10.2.1.2 Detailed Design Procedure

10.2.1.2.1 Inductor Selection

The 1.5-MHz switching frequency allows the use of small inductor and capacitor values to maintain an inductor saturation current higher than the charging current (I_{CHG}) plus half the ripple current (I_{RIPPLE}):

$$I_{SAT} \geq I_{CHG} + (1/2)\, I_{RIPPLE} \tag{6}$$

The inductor ripple current depends on the input voltage (V_{VBUS}), the duty cycle ($D = V_{BAT}/V_{VBUS}$), the switching frequency (f_S) and the inductance (L).

$$I_{RIPPLE} = \frac{V_{IN} \times D \times (1 - D)}{fs \times L} \tag{7}$$

The maximum inductor ripple current occurs when the duty cycle (D) is 0.5 or approximately 0.5. Usually inductor ripple is designed in the range between 20% and 40% maximum charging current as a trade-off between inductor size and efficiency for a practical design.

10.2.1.2.2 Input Capacitor and Resistor

Design input capacitance to provide enough ripple current rating to absorb input switching ripple current. The worst case RMS ripple current is half of the charging current when duty cycle is 0.5. If the converter does not operate at 50% duty cycle, then the worst case capacitor RMS current I_{CIN} occurs where the duty cycle is closest to 50% and can be estimated using 方程式 8.

$$I_{CIN} = I_{CHG} \times \sqrt{D \times (1 - D)} \tag{8}$$

Low ESR ceramic capacitor such as X7R or X5R is preferred for input decoupling capacitor and should be placed to the drain of the high-side MOSFET and source of the low-side MOSFET as close as possible. Voltage rating of the capacitor must be higher than normal input voltage level. A rating of 25-V or higher capacitor is preferred for 12-V input voltage. Capacitance of minimum 10 μF is suggested for typical of 3-A charging current.

During high current output over 700 mA in boost mode, a 10 kΩ pull-down resistor on VBUS is recommended to keep VBUS low in case Q1 RBFET leakage gets high.

10.2.1.2.3 Output Capacitor

Ensure that the output capacitance has enough ripple current rating to absorb the output switching ripple current. 方程式 9 shows the output capacitor RMS current I_{COUT} calculation.

$$I_{COUT} = \frac{I_{RIPPLE}}{2 \times \sqrt{3}} \approx 0.29 \times I_{RIPPLE} \tag{9}$$

The output capacitor voltage ripple can be calculated as follows:


Copyright © 2022 Texas Instruments Incorporated

$$\Delta V_O = \frac{V_{OUT}}{8LCfs^2}\left(1 - \frac{V_{OUT}}{V_{IN}}\right) \quad (10)$$

At certain input and output voltage and switching frequency, the voltage ripple can be reduced by increasing the output filter LC.


The charger device has internal loop compensation optimized for >10-μF ceramic output capacitance. The preferred ceramic capacitor is 10-V rating, X7R or X5R.

10.2.1.3 Application Curves

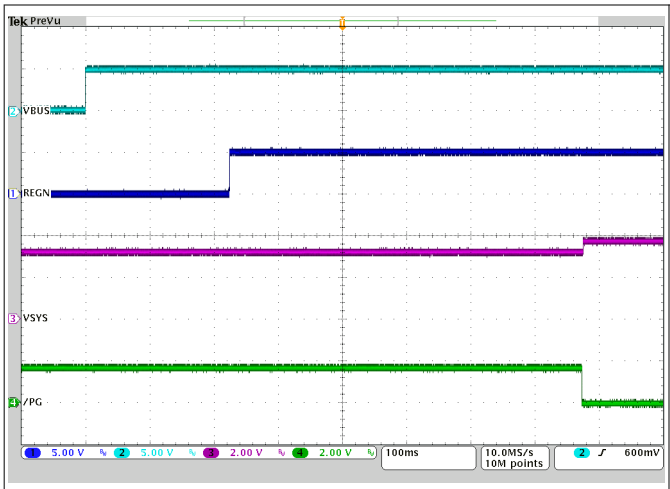


V_{VBUS} = 5 V V_{VBAT} = 3.2 V

图 10-2. Power-Up with Charge Disabled

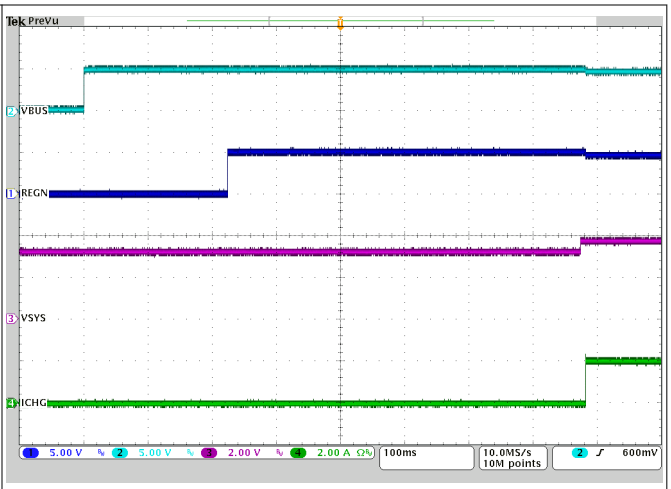


V_{VBUS} = 5 V V_{VBAT} = 3.2 V
I_{CHG} = 2 A

图 10-3. Power-Up with Charge Enabled

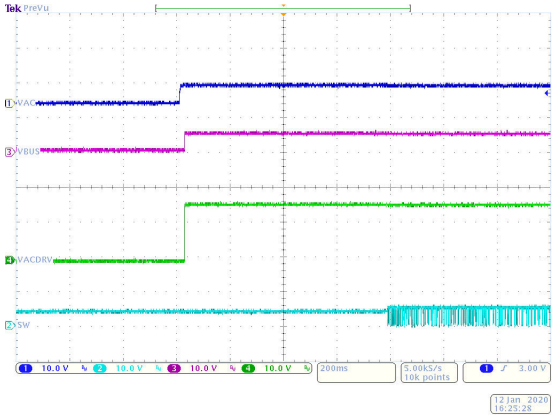

V_{VBUS} = 5 V V_{VBAT} = 3.2 V


图 10-4. OVPFET Turn-on during Power-Up

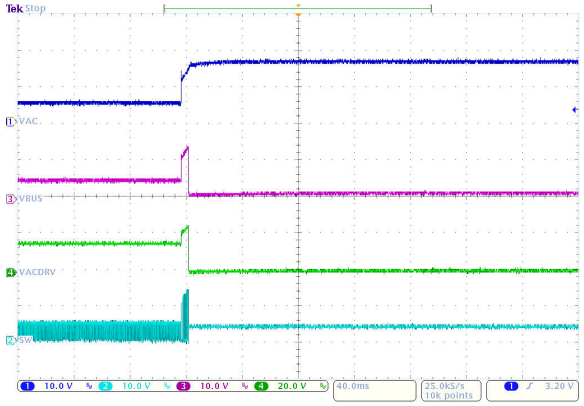

V_{VBUS} = 5 V to 17V V_{VBAT} = 3.2 V


图 10-5. OVPFET Turn-off during Input OVP

Copyright © 2022 Texas Instruments Incorporated

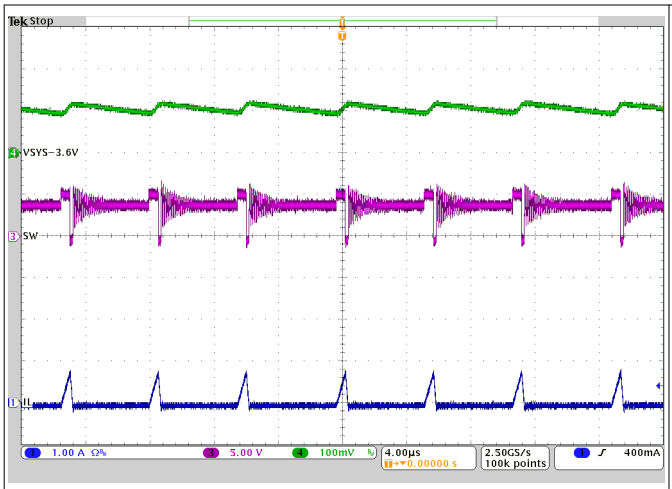


V_{VBUS} = 5 V
I_{SYS} = 50 mA Charge Disabled

图 10-6. PFM Switching in Buck Mode

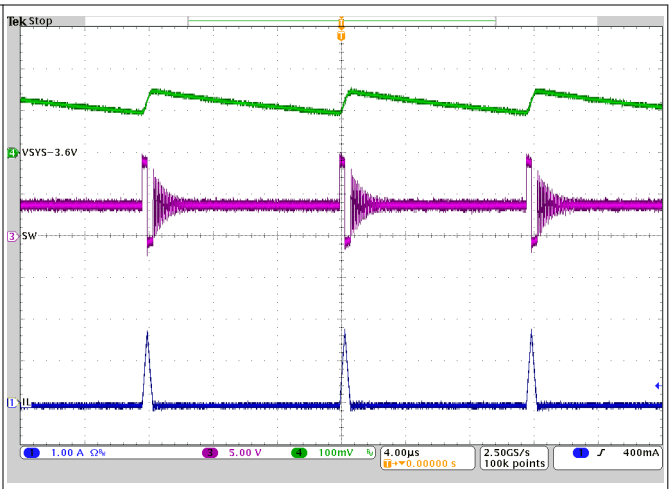


V_{VBUS} = 9 V
I_{SYS} = 50 mA Charge Disabled

图 10-7. PFM Switching in Buck Mode

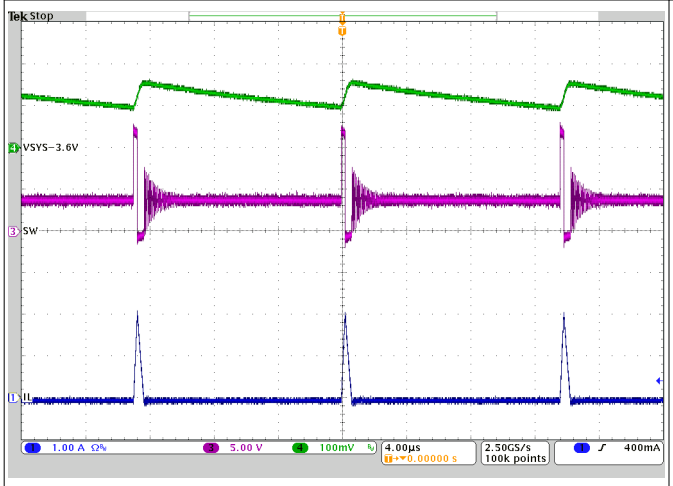

V_{VBUS} = 12 V
I_{SYS} = 50 mA Charge Disabled


图 10-8. PFM Switching in Buck Mode

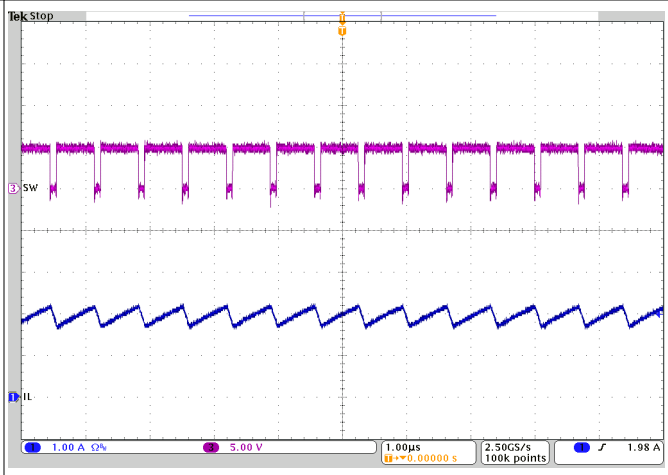

V_{VBUS} = 5 V V_{VBAT} = 3.8 V
I_{CHG} = 2 A


图 10-9. PWM Switching in Buck Mode

Copyright © 2022 Texas Instruments Incorporated

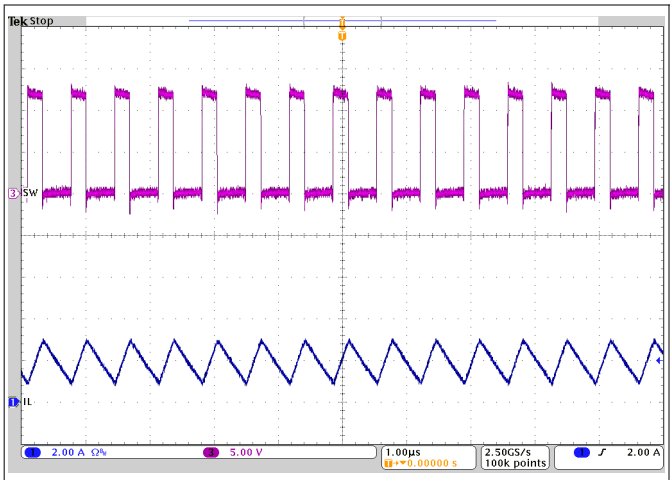

V_{VBUS} = 12 V V_{VBAT} = 3.8 V
I_{CHG} = 2 A

图 10-10. PWM Switching in Buck mode

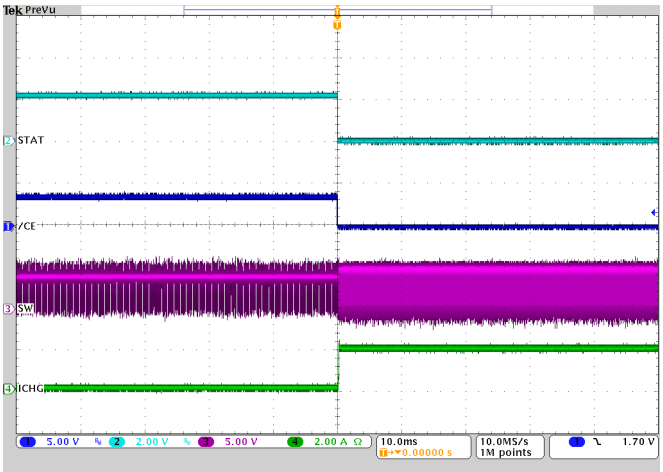


V_{VBUS} = 5 V V_{VBAT} = 3.2 V
I_{CHG} = 2 A

图 10-11. Charge Enable




V_{VBUS} = 5 V V_{VBAT} = 3.2 V
I_{CHG} = 2 A

图 10-12. Charge Disable

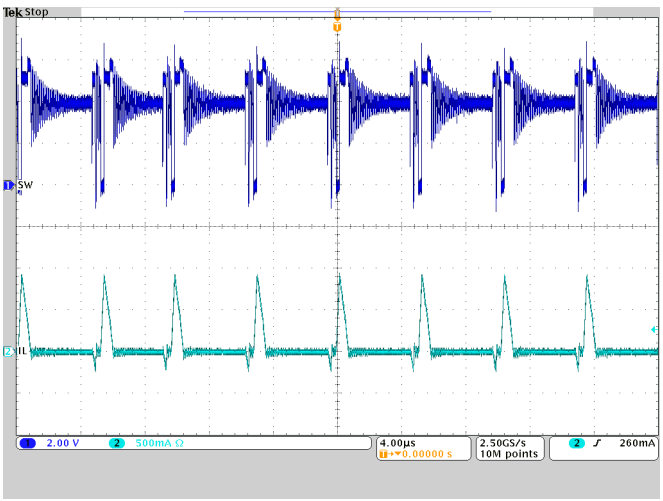


V_{VBAT} = 4 V
I_{LOAD}= 50 mA PFM Enabled

图 10-13. OTG Switching

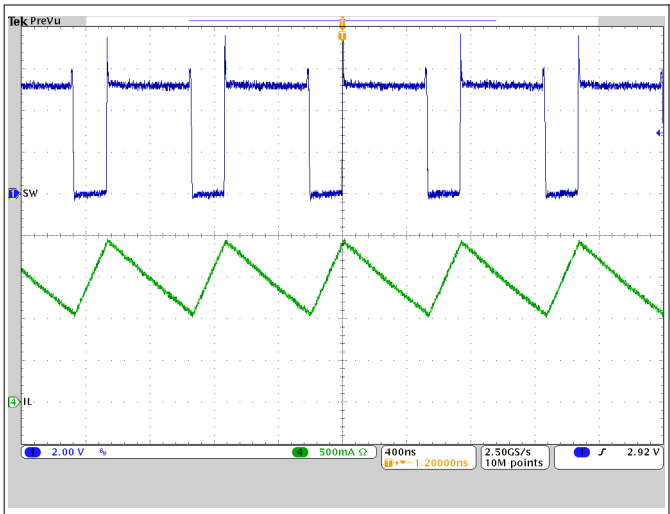


V_{VBAT} = 4 V
I_{LOAD}= 1 A
PFM Enabled

图 10-14. OTG Switching

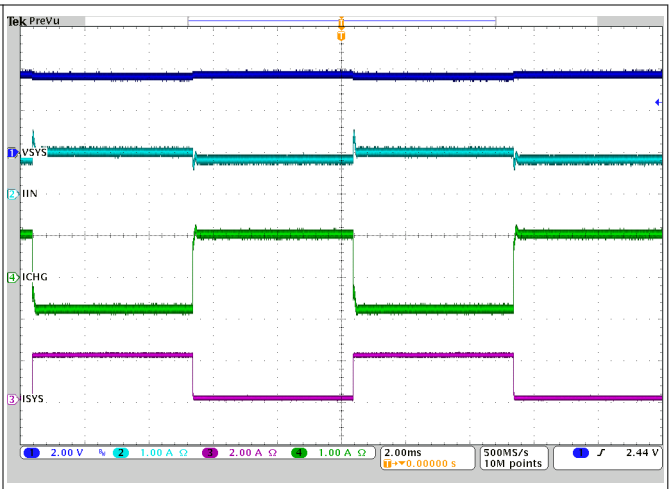


V_{VBUS} = 5 V
I_{SYS} from 0 A to 2 A
V_{BAT} = 3.7 V
I_{INDPM} = 1 A
I_{CHG} = 1 A

图 10-15. System Load Transient

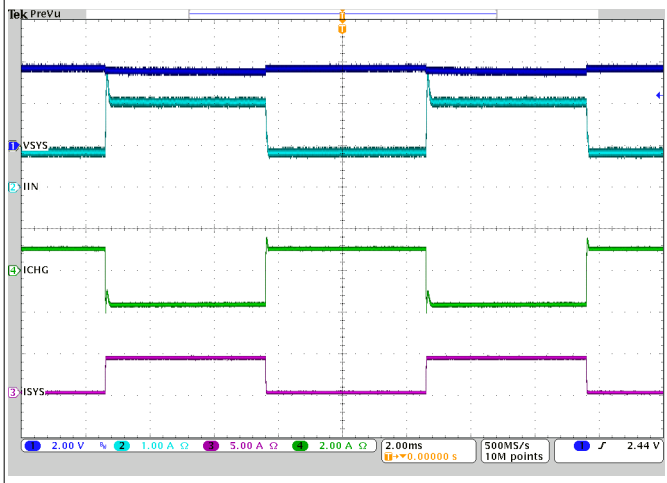

V_{VBUS} = 5 V
I_{SYS} from 0 A to 4 A
V_{BAT} = 3.7 V
I_{INDPM} = 2 A
I_{CHG} = 1 A

图 10-16. System Load Transient

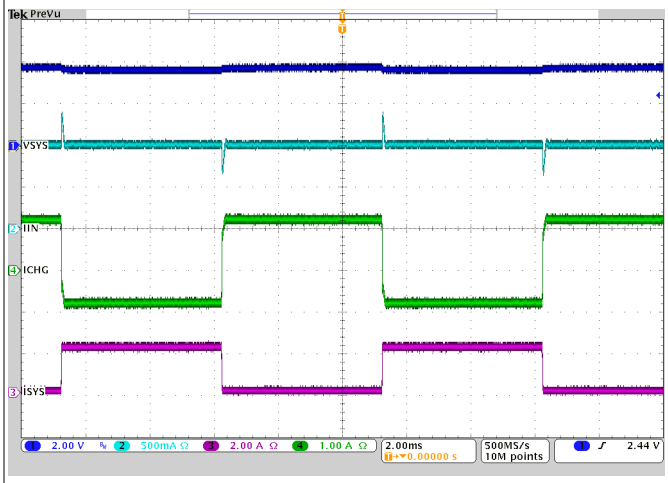

V_{VBUS} = 5 V
I_{SYS} from 0 A to 2 A
V_{BAT} = 3.7 V
I_{INDPM} = 1 A
I_{CHG} = 2 A


图 10-17. System Load Transient

Copyright © 2022 Texas Instruments Incorporated




V_{VBUS} = 5 V
I_{SYS} from 0 A to 4 A
V_{BAT} = 3.7 V
I_{INDPM} = 1 A
I_{CHG} = 2 A

图 10-18. System Load Transient

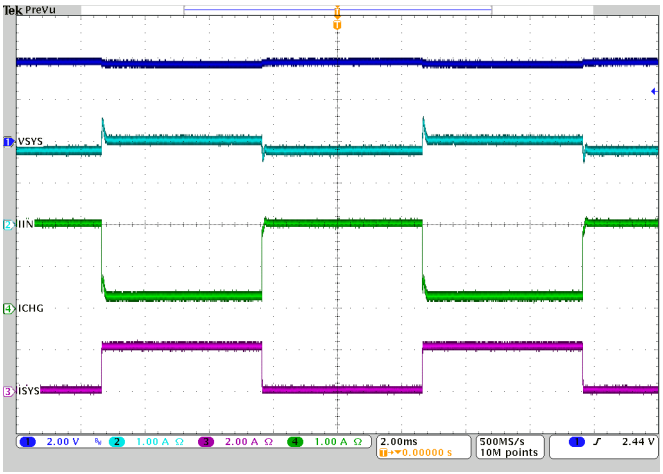


V_{VBUS} = 5 V
I_{SYS} from 0 A to 2 A
V_{BAT} = 3.7 V
I_{INDPM} = 2 A
I_{CHG} = 2 A

图 10-19. System Load Transient

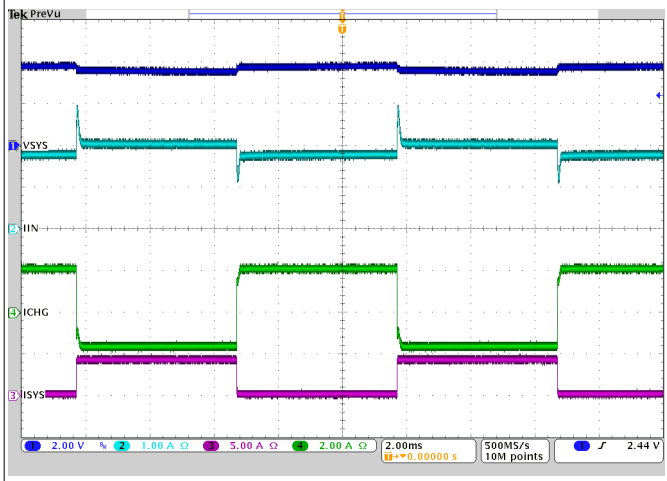

V_{VBUS} = 5 V
I_{SYS} from 0 A to 4 A
V_{BAT} = 3.7 V
I_{INDPM} = 2 A
I_{CHG} = 2 A

图 10-20. System Load Transient

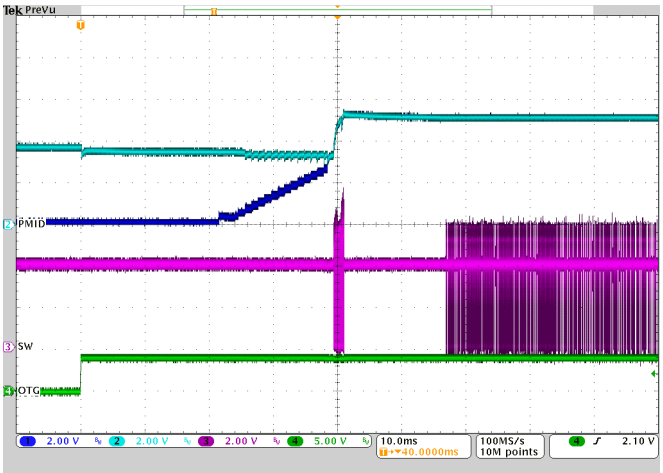

V_{BAT} = 3.8 V
C_{LOAD} = 470 µF

图 10-21. OTG Start-Up

10.2.2 BQ25616/616J Application with External OVP

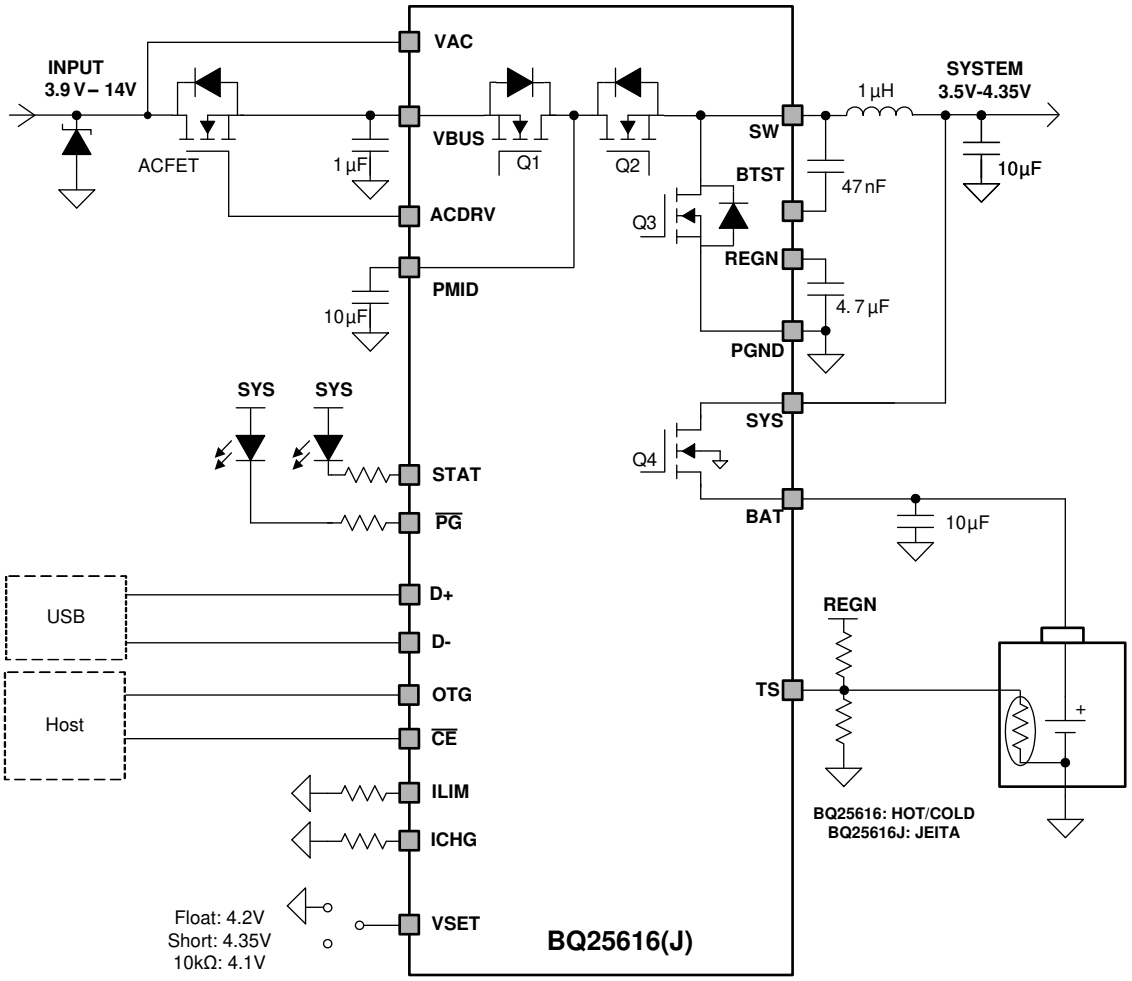


图 10-22. BQ25616/616J Application Diagram with External OVP

10.2.2.1 Design Requirements

Refer to 节 10.2.1.1 for design requirements.

10.2.2.2 Detailed Design Procedure

Refer to 节 10.2.1.2 for detailed design procedure.

10.2.2.3 Application Curves

Refer to 节 10.2.1.3 for application curves.

Copyright © 2022 Texas Instruments Incorporated

11 Power Supply Recommendations

In order to provide an output voltage on SYS, the battery charger requires a power supply between 4 V and 13.5 V input with at least a 100-mA current rating connected to VBUS and a single-cell Li-ion battery with battery voltage greater than V_{BAT_UVLOZ} connected to BAT. The source current rating needs to be at least 3 A in order for the buck converter of the charger to provide maximum output power to SYS.

Copyright © 2022 Texas Instruments Incorporated

12 Layout

12.1 Layout Guidelines

The switching node rise and fall times should be minimized for minimum switching loss. Proper layout of the components to minimize the high frequency current path loop (see 图 12-1) is important to prevent electrical and magnetic field radiation and high frequency resonant problems. Follow this specific order carefully to achieve the proper layout.

1. Place an input capacitor as close as possible to the PMID pin and GND pin connections and use the shortest copper trace connection or GND plane. Add a 1-nF small size (such as 0402 or 0201) decoupling cap for the high frequency noise filter and EMI improvement.
2. Place the inductor input pin as close as possible to SW pin. Minimize the copper area of this trace to lower electrical and magnetic field radiation but make the trace wide enough to carry the charging current. Do not use multiple layers in parallel for this connection. Minimize parasitic capacitance from this area to any other trace or plane.
3. Put the output capacitor near to the inductor and the device. Ground connections need to be tied to the IC ground with a short copper trace connection or GND plane.
4. Route the analog ground separately from power ground. Connect the analog ground and connect power ground separately. Connect the analog ground and power ground together using the thermal pad as the single ground connection point. Or use a 0-Ω resistor to tie the analog ground to power ground.
5. Use a single ground connection to tie the charger power ground to the charger analog ground just beneath the device. Use ground copper pour but avoid power pins to reduce inductive and capacitive noise coupling.
6. Place the decoupling capacitors next to the IC pins and make the trace connection as short as possible.
7. It is critical that the exposed thermal pad on the backside of the device package be soldered to the PCB ground. Ensure that there are sufficient thermal vias directly under the IC, connecting to the ground plane on the other layers.
8. Ensure that the number and sizes of vias allow enough copper for a given current path.

See the *BQ25618 BMS024 Evaluation Module User's Guide* and *BQ25619 BMS025 Evaluation Module EVM User's Guide* for the recommended component placement with trace and via locations. For the VQFN information, refer to *Quad Flatpack No-Lead Logic Packages Application Report* and *QFN and SON PCB Attachment Application Report*.

12.2 Layout Example

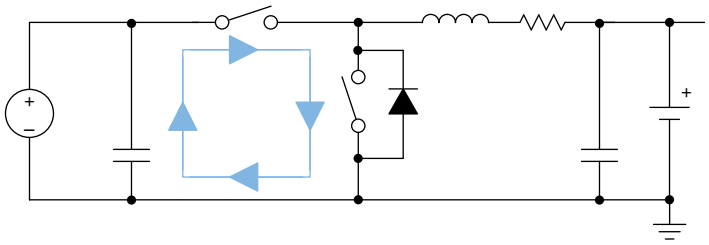


图 12-1. High Frequency Current Path

Copyright © 2022 Texas Instruments Incorporated

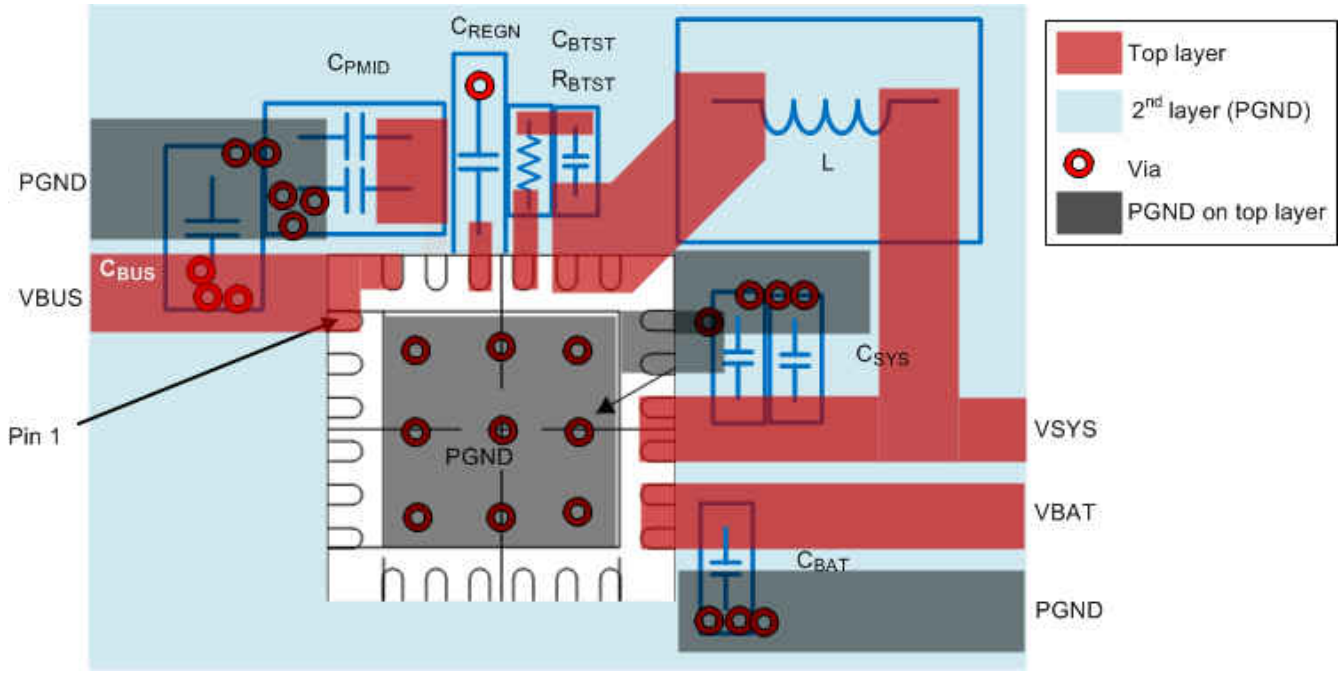


图 12-2. Layout Example

13 Device and Documentation Support

13.1 Device Support

13.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

13.2 Documentation Support

13.2.1 Related Documentation

For related documentation see the following:

- *BQ25619 BMS025 Evaluation Module User's Guide*
- *BQ25618 BMS024 Evaluation Module User's Guide*

13.3 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 *订阅更新* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

13.4 支持资源

TI E2E™ 支持论坛是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

13.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.
所有商标均为其各自所有者的财产。

13.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

13.7 术语表

TI 术语表	本术语表列出并解释了术语、首字母缩略词和定义。

Copyright © 2022 Texas Instruments Incorporated

14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2022 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
BQ25616JRTWR	Active	Production	WQFN (RTW) | 24	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ 25616J
BQ25616JRTWR.A	Active	Production	WQFN (RTW) | 24	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ 25616J
BQ25616JRTWT	Active	Production	WQFN (RTW) | 24	250 | SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ 25616J
BQ25616JRTWT.A	Active	Production	WQFN (RTW) | 24	250 | SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ 25616J
BQ25616RTWR	Active	Production	WQFN (RTW) | 24	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25616
BQ25616RTWR.A	Active	Production	WQFN (RTW) | 24	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25616
BQ25616RTWT	Active	Production	WQFN (RTW) | 24	250 | SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25616
BQ25616RTWT.A	Active	Production	WQFN (RTW) | 24	250 | SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BQ25616

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

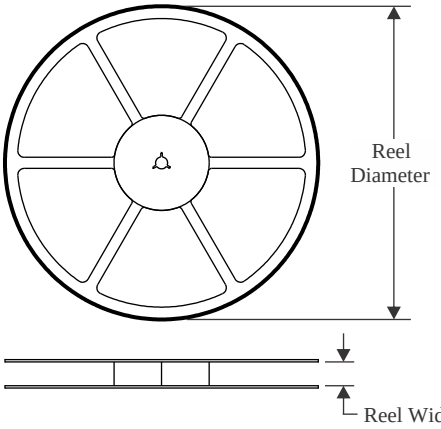


TAPE DIMENSIONS

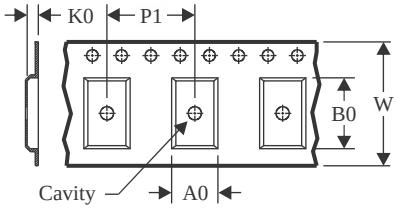

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

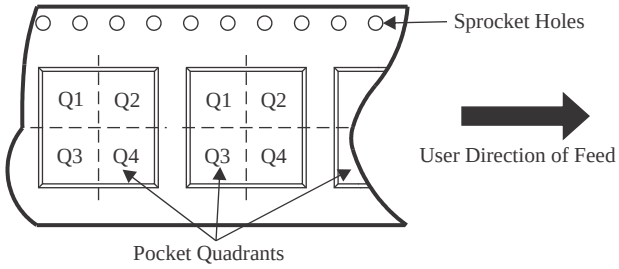

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
BQ25616JRTWR	WQFN	RTW	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
BQ25616JRTWT	WQFN	RTW	24	250	180.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
BQ25616RTWR	WQFN	RTW	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
BQ25616RTWT	WQFN	RTW	24	250	180.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

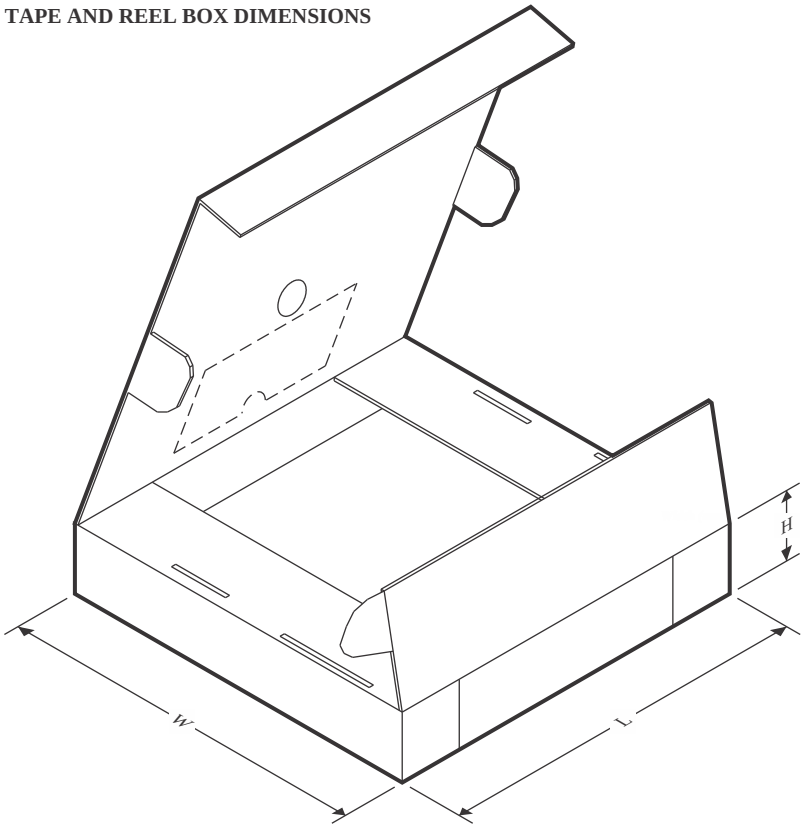

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
BQ25616JRTWR	WQFN	RTW	24	3000	360.0	360.0	36.0
BQ25616JRTWT	WQFN	RTW	24	250	210.0	185.0	35.0
BQ25616RTWR	WQFN	RTW	24	3000	360.0	360.0	36.0
BQ25616RTWT	WQFN	RTW	24	250	210.0	185.0	35.0

GENERIC PACKAGE VIEW


RTW 24

WQFN - 0.8 mm max height

4 x 4, 0.5 mm pitch


PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

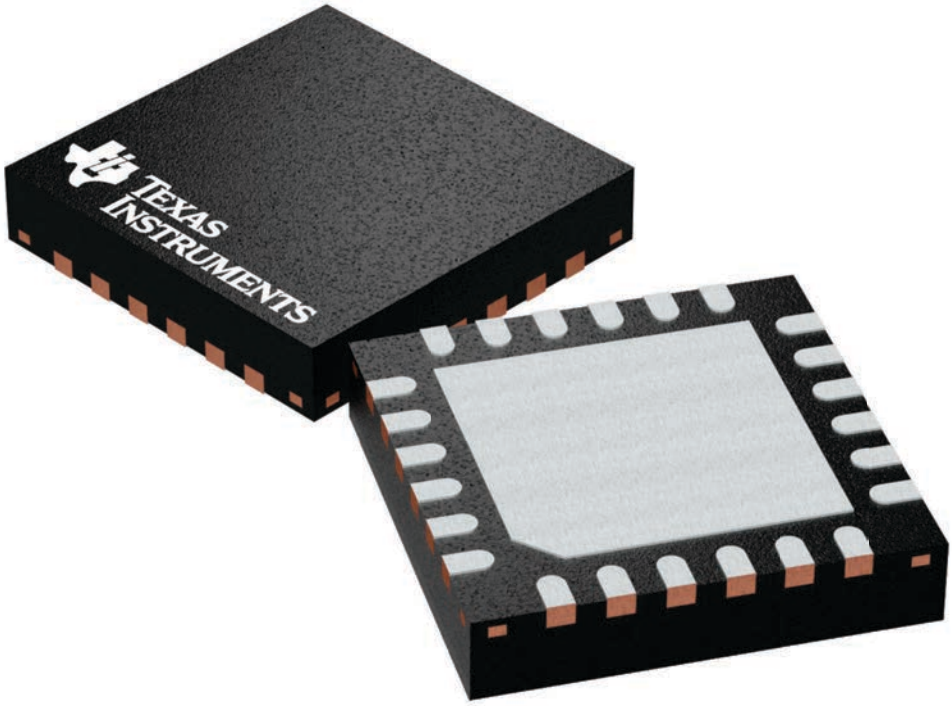

4224801/A

RTW (S–PWQFN–N24) PLASTIC QUAD FLATPACK NO–LEAD

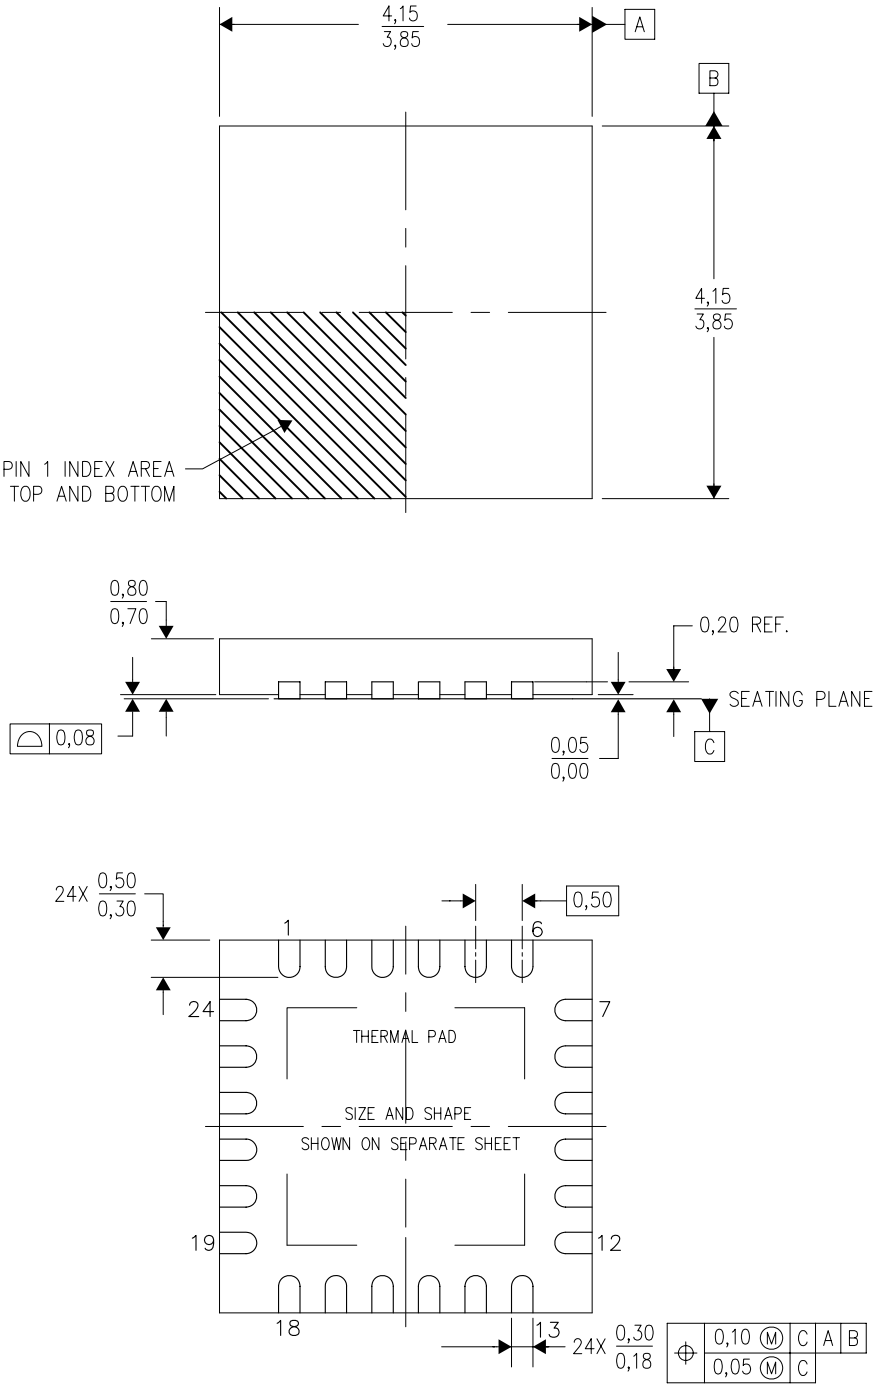

NOTES:
A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M–1994.
B. This drawing is subject to change without notice.
C. Quad Flatpack, No–Leads (QFN) package configuration.
D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
F. Falls within JEDEC MO–220.


RTW (S–PWQFN–N24) PLASTIC QUAD FLATPACK NO–LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No–Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

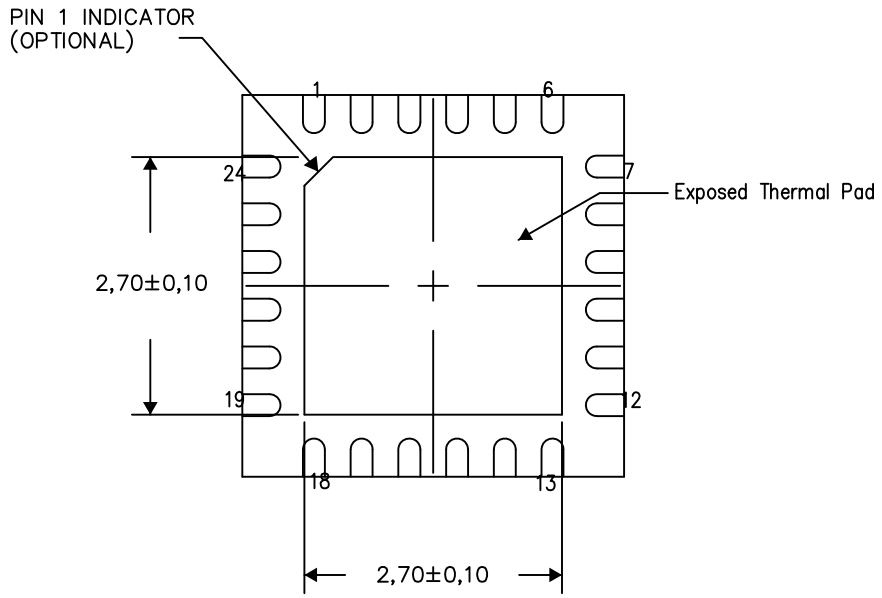


Bottom View

Exposed Thermal Pad Dimensions

4206249–5/P 05/15

NOTES: A. All linear dimensions are in millimeters

RTW (S–PWQFN–N24) PLASTIC QUAD FLATPACK NO–LEAD

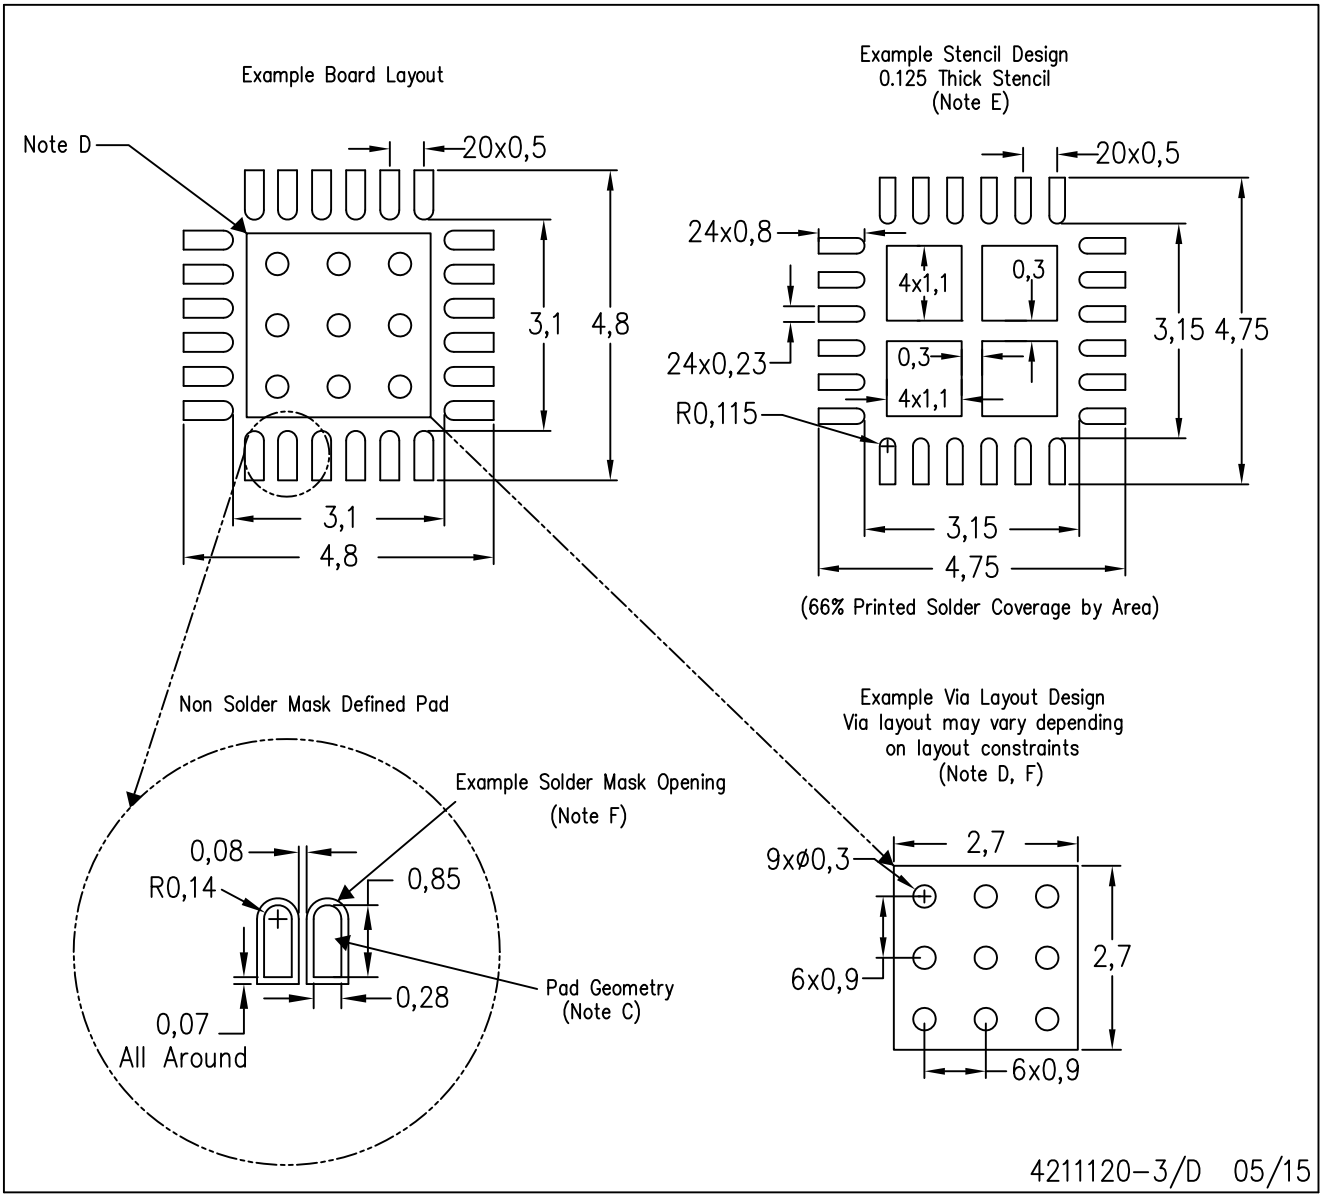

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat–Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <http://www.ti.com>.
E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
F. Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 TI 销售条款)、TI 通用质量指南 或 ti.com 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。 除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月