

SN65HVD63 AISG® 开关键控同轴调制解调器收发器

1 特性

- 3V 至 5.5V 电源范围
- 1.6V 至 5.5V 独立逻辑电源
- -15dBm 至 +5dBm 接收器宽输入动态范围
- 可在 0dBm 至 6dBm 范围内调节驱动器为同轴电缆提供的功率
- AISG® 符合 V2.0 的输出辐射配置文件同时符合即将推行的 AISG V3.0 规范
- 低功耗待机模式
- 针对 RS-485 总线仲裁的方向控制输出
- 支持最高达 115kbps 的信号传输速率
- 集成有源带通滤波器的中心频率为 2.176MHz
- 16 引脚 3mm × 3mm 超薄型四方扁平无引线 (VQFN) 封装

2 应用

- AISG - 针对天线线路器件的接口
- 塔顶放大器 (TMA)
- 普通调制解调器 (Modem) 接口

3 说明

SN65HVD63 收发器对逻辑 (基带) 接口和适用于长同轴介质的频率之间的信号进行调制和解调，以便无线设备之间进行有线数据传输。

SN65HVD63 器件是一款集成 AISG 收发器，旨在满足即将推行的“天线接口标准组织 v3.0 规范”的要求。

SN65HVD63 接收器集成了一个有源带通滤波器，这样即使存在寄生频率组件仍然能够解调信号。该滤波器的中心频率为 2.176MHz。

发送器支持在 +0dBm 至 6dBm 的范围内调节为 50Ω 同轴电缆提供的输出功率。SN65HVD63 发送器符合 AISG 标准针对发射频谱的要求。


该器件提供的方向控制输出使得对 RS-485 接口的总线仲裁更加便捷。该器件为晶振集成了一个振荡器输入，并且接受到振荡器的标准时钟输入。

器件信息⁽¹⁾

| 器件型号 | 封装 | 封装尺寸 (标称值) |
|-----------|-----------|-----------------|
| SN65HVD63 | VQFN (16) | 3.00mm × 3.00mm |

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

框图

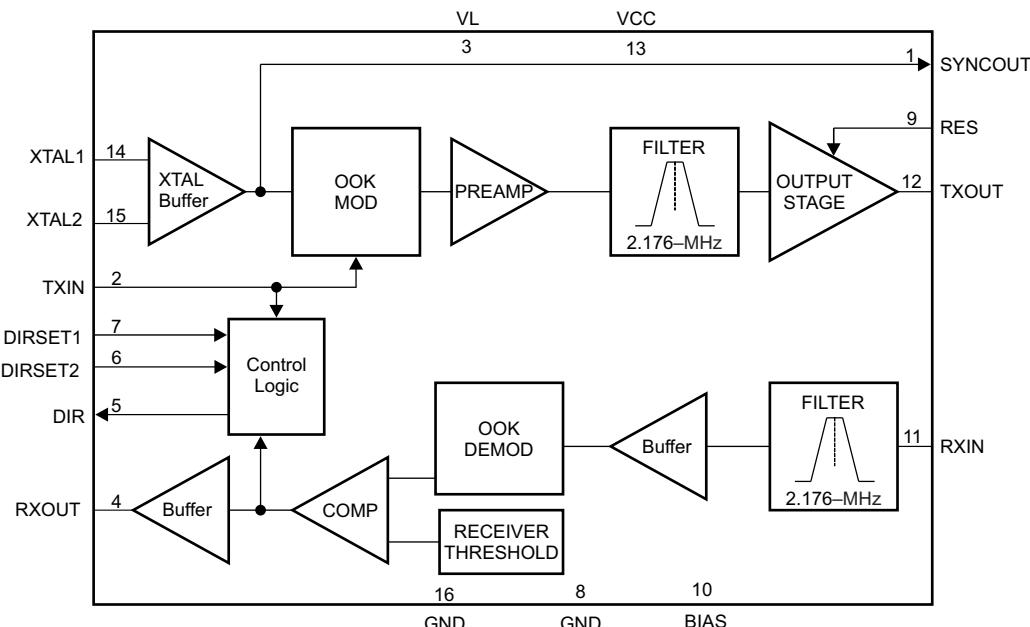

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

English Data Sheet: SLLSEO3

目录

| | | | | | |
|-----|-----------------------------------|----|------|--------------------------------|----|
| 1 | 特性 | 1 | 9.2 | Functional Block Diagram | 12 |
| 2 | 应用 | 1 | 9.3 | Feature Description | 12 |
| 3 | 说明 | 1 | 9.4 | Device Functional Modes | 13 |
| 4 | 修订历史记录 | 2 | 10 | Application and Implementation | 15 |
| 5 | Device Comparison Table | 3 | 10.1 | Application Information | 15 |
| 6 | Pin Configuration and Functions | 3 | 10.2 | Typical Application | 16 |
| 7 | Specifications | 4 | 11 | Power Supply Recommendations | 18 |
| 7.1 | Absolute Maximum Ratings | 4 | 12 | Layout | 18 |
| 7.2 | ESD Ratings | 4 | 12.1 | Layout Guidelines | 18 |
| 7.3 | Recommended Operating Conditions | 4 | 12.2 | Layout Example | 18 |
| 7.4 | Thermal Information | 4 | 13 | 器件和文档支持 | 19 |
| 7.5 | Electrical Characteristics | 6 | 13.1 | 相关文档 | 19 |
| 7.6 | Switching Characteristics | 7 | 13.2 | 社区资源 | 19 |
| 7.7 | Typical Characteristics | 8 | 13.3 | 商标 | 19 |
| 8 | Parameter Measurement Information | 11 | 13.4 | 静电放电警告 | 19 |
| 9 | Detailed Description | 12 | 13.5 | Glossary | 19 |
| 9.1 | Overview | 12 | 14 | 机械、封装和可订购信息 | 19 |

4 修订历史记录


| 日期 | 修订版本 | 注释 |
|------------|------|-------|
| 2015 年 7 月 | * | 首次发布。 |

5 Device Comparison Table

| PART NUMBER | STANDARD SUPPORTED | SPURIOUS FREQUENCY RANGE | MAXIMUM LEVEL |
|-------------|--------------------|--------------------------|---------------------------------|
| SN65HVD62 | AISG 2.0 | ≤ 1.1 MHz | 2 dBm (793 mV _{PP}) |
| | | ≤ 4.17 MHz | 2 dBm (793 mV _{PP}) |
| SN65HVD63 | AISG 3.0 | ≤ 1.35 MHz | -13 dBm (142 mV _{PP}) |
| | | ≤ 3.5 MHz | -13 dBm (142 mV _{PP}) |

6 Pin Configuration and Functions

RGT Package
16-Pin VQFN With Exposed Thermal Pad
Top View

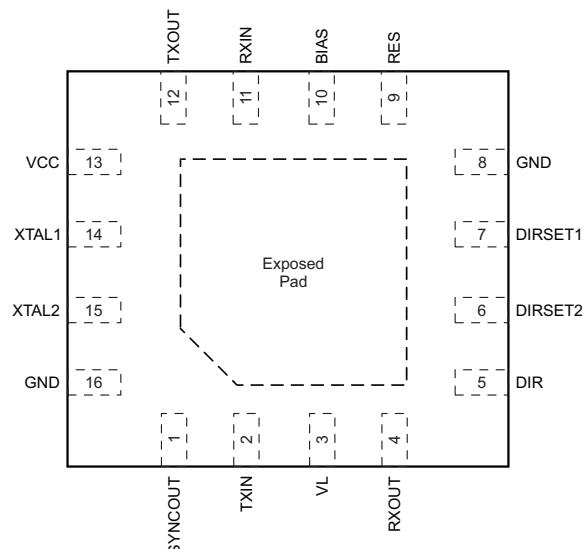

Pin Functions

| PIN | | | DESCRIPTION |
|-----------------|-----|------|--|
| NAME | NO. | TYPE | |
| BIAS | 10 | O | Bias voltage output for setting driver output power by external resistors |
| DIR | 5 | O | Direction control output signal for bus arbitration |
| DIRSET1 | 7 | — | DIRSET1 and DIRSET2: Bits to set the duration of DIR |
| DIRSET2 | 6 | — | DIRSET[2:1]: [L:L] = 9.6 kbps; [L:H] = 38.4 kbps; [H:L] = 115 kbps; [H:H] = standby mode |
| GND | 8 | — | Ground |
| | 16 | — | |
| RES | 9 | P | Input voltage to adjust driver output power that is set by external resistors from BIAS pin to GND |
| RXIN | 11 | I | Modulated input signal to the receiver |
| RXOUT | 4 | O | Digital data bit stream from receiver |
| SYNCOUT | 1 | O | Open-drain output to synchronize other devices to the 4x-carrier oscillator at XTAL1 and XTAL2 |
| TXIN | 2 | I | Digital data bit stream to driver |
| TXOUT | 12 | O | Modulated output signal from the driver |
| V _{CC} | 13 | P | Analog supply voltage for the device |
| VL | 3 | P | Logic supply voltage for the device |
| XTAL1 | 14 | I/O | I/O pins of the crystal oscillator. Connect a 4 × f _C crystal between these pins or connect XTAL1 to an 8.704-MHz clock and connect XTAL2 to GND. |
| XTAL2 | 15 | — | |
| EP | — | — | Exposed pad. Connection to ground plane is recommended for best thermal conduction. |

7 Specifications

7.1 Absolute Maximum Ratings⁽¹⁾

| | MIN | MAX | UNIT |
|---|------------------------------------|----------------|------|
| Supply voltage, V_{CC} and V_L | -0.5 | 6 | V |
| Voltage at coax pins | -0.5 | 6 | V |
| Voltage at logic pins | -0.3 | $V_{VL} + 0.3$ | V |
| Logic output current | -20 | 20 | mA |
| TXOUT output current | Internally limited | | |
| SYNCOOUT output current | Internally limited | | |
| Junction temperature, T_J | 170 | | °C |
| Continuous total power dissipation | See the <i>Thermal Information</i> | | °C |
| Storage temperature, T_{stg} ⁽²⁾ | -65 | 150 | °C |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) Applicable before the device is installed in the final product.

7.2 ESD Ratings

| | VALUE | UNIT | |
|-------------------------------------|---|-------|---|
| $V_{(ESD)}$ Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±2000 | V |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

| | MIN | NOM | MAX | UNIT |
|--|--|--------------|--------------|------|
| V_{CC} Analog supply voltage | 3 | 5.5 | V | |
| V_L Logic supply voltage | 1.6 | 5.5 | V | |
| $V_{I(pp)}$ Input signal amplitude at RXIN | 1.12 | | | Vpp |
| V_{IH} High-level input voltage | TXIN, DIRSET1, DIRSET2 | 70% V_L | V_L | V |
| | XTAL1, XTAL2 | 70% V_{CC} | V_{CC} | |
| V_{IL} Low-level input voltage | TXIN, DIRSET1, DIRSET2 | 0 | 30% V_L | V |
| | XTAL1, XTAL2 | 0 | 30% V_{CC} | |
| $1/t_{UI}$ Data signaling rate | 9.6 | 115 | kbps | |
| F_{osc} Oscillator frequency | -30 ppm | 8.704 | 30 ppm | MHz |
| Z_{LOAD} Load impedance between TXOUT to RXIN | 50 | | | Ω |
| | Load impedance between RXIN and GND at f_C (channel) | | | Ω |
| R_1 Bias resistor between BIAS and RES | 4.1 | | | kΩ |
| R_2 Bias resistor between RES and GND | 10 | | | kΩ |
| R_{SYNC} Pullup resistor between SYNCOUT and V_{CC} | 1 | | | kΩ |
| V_{RES} Voltage at RES pin | 0.7 | 1.5 | V | |
| C_C Coupling capacitance between RXIN and coax (channel) | 220 | | | nF |
| C_{BIAS} Capacitance between BIAS and GND | 1 | | | μF |
| T_A Operating free-air temperature | -40 | 105 | °C | |
| T_J Junction temperature | -40 | 125 | °C | |

7.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | VQFN | UNIT |
|--|------------|------|
| | RGT16 Pins | |
| $R_{θJA}$ Junction-to-ambient thermal resistance | 49.4 | °C/W |

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

Thermal Information (接下页)

| THERMAL METRIC ⁽¹⁾ | | VQFN | UNIT |
|-------------------------------|--|------------|------|
| | | RGT16 Pins | |
| $R_{\theta JCtop}$ | Junction-to-case (top) thermal resistance | 64.2 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 22.9 | °C/W |
| Ψ_{JT} | Junction-to-top characterization parameter | 1.7 | °C/W |
| Ψ_{JB} | Junction-to-board characterization parameter | 22.9 | °C/W |
| $R_{\theta JCbot}$ | Junction-to-case (bottom) thermal resistance | 25 | °C/W |

7.5 Electrical Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------|--|--|------------------------------------|-----------|-----|----------|
| POWER SUPPLY | | | | | | |
| I_{CC} | Supply current | DIRSET1 = L DIRSET2 = H | TXIN = L (active) | 28 | 33 | mA |
| | | | TXIN = H (quiescent) | 25 | 31 | |
| | | | TXIN = 115 kbps, 50% duty cycle | 27 | 33 | |
| | | DIRSET1 = H, DIRSET2 = H (standby) | | 12 | 17 | |
| I_{VL} | Logic supply current | TXIN = H, RXIN = DC input | | | 50 | μA |
| PSRR | Receiver power supply rejection ratio | $V_{TXIN} = V_L$ | 45 | 60 | | dB |
| LOGIC PINS | | | | | | |
| V_{OH} | High-level logic output voltage (RXOUT, DIR) | $I_{OH} = -4 \text{ mA}$ for $V_L > 2.4 \text{ V}$, $I_{OH} = -2 \text{ mA}$ for $V_L < 2.4 \text{ V}$ | 90% V_{VL} | | | V |
| V_{OL} | Low-level logic output voltage (RXOUT, DIR) | $I_{OL} = 4 \text{ mA}$ for $V_L > 2.4 \text{ V}$, $I_{OL} = 2 \text{ mA}$ for $V_L < 2.4 \text{ V}$ | | 10% V_V | | V |
| COAX DRIVER | | | | | | |
| $V_{O(PP)}$ | Peak-to-peak output voltage at device pin TXOUT (see 图 19) | $V_{RES} = 1.5 \text{ V}$ (Maximum setting) | 2.24 | 2.5 | | V_{PP} |
| | | $V_{RES} = 0.7 \text{ V}$ (Minimum setting) | | 1.17 | 1.3 | |
| $V_{O(PP)}$ | Peak-to-peak voltage at coax out (see 图 19) | $V_{RES} = 1.5 \text{ V}$ | 5 | 6 | | dBm |
| | | $V_{RES} = 0.7 \text{ V}$ | | -0.6 | 0.3 | |
| $V_{O(OFF)}$ | Off-state output voltage | At TXOUT | | | 1 | mVpp |
| | | At coax out | | | -60 | dBm |
| Output emissions | | Coupled to coaxial cable with characteristic impedance of 50Ω , as shown in 图 1 ⁽¹⁾⁽²⁾ | | | | N/A |
| f_O | Output frequency | | | 2.176 | | MHz |
| Δf | Output frequency variation | | -100 | | 100 | ppm |
| Z_O | Output impedance | At 100 kHz | | 0.03 | | Ω |
| | | At 10 MHz | | 3.5 | | |
| $ I_{os} $ | Short-circuit output current | TXOUT is also protected by a thermal shutdown circuit during short-circuit faults | 300 | 450 | | mA |
| COAX RECEIVER | | | | | | |
| V_{IT} | Input threshold | $f_{IN} = 2.176 \text{ MHz}$ | 79 | 112 | 158 | mVPP |
| | | | -18 | -15 | -12 | dBm |
| Z_{IN} | Input impedance | $f = f_O$ | 11 | 21 | | kΩ |
| RECEIVER FILTER | | | | | | |
| f_{PB} | Passband | $VRXIN = 1.12V_{PP_P}$ | 1.1 | 4.17 | | MHz |
| f_{REJ} | Receiver rejection range | 2.176-MHz carrier amplitude of 112.4 mV_{PP} , frequency band of spurious components with 800 mVPP allowed. | 1.1 | 4.17 | | MHz |
| $t_{noise\ filter}$ | Receiver noise filter time (slow bit rate) | DIRSET for 9.6 kbps | | 4 | | μs |
| | Receiver noise filter time (fast bit rate) | DIRSET for > 9.6 kbps | | 2 | | μs |
| XTAL AND SYNC | | | | | | |
| I_I | Input leakage current | XTAL1, XTAL2, $0V < V_{IN} < V_{CC}$ | -15 | 15 | | μA |
| V_{OL} | Output low voltage | SYNCOUT, with $1-k\Omega$ resistor from SYNCOUT to V_{CC} | | | 0.4 | V |

(1) Specified by design with a recommended 470-pF capacitor between RXIN and GND. Measurements above 150 MHz are determined by setup.

(2) Conforms to AISG spectrum emissions mask, 3GPP TS 25.461, see [图 21](#).

7.6 Switching Characteristics

over recommended operating conditions (unless otherwise noted)

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---------------------------------|--|-----|------|-----|---------|
| t_{pAQ}, t_{pQA} | Coax driver propagation delay See 图 19 | | | 5 | μs |
| t_r, t_f | Coax receiver output rise/fall time $C_L = 15 \text{ pF}, R_L = 1 \text{ k}\Omega$; see 图 19 | | | 20 | ns |
| t_{PHL}, t_{PLH} | Receiver propagation delay See 图 20 | | | 5.5 | μs |
| Coax receiver output duty cycle | $V_{RXIN(ON)} = 630 \text{ mVpp}, V_{RXIN(OFF)} < 5 \text{ mVpp}$, 50% duty cycle | 40% | 60% | | |
| | $V_{RXIN(ON)} = 200 \text{ mVpp}, V_{RXIN(OFF)} < 5 \text{ mVpp}$, 50% duty cycle | 40% | 60% | | |
| t_{DIR} | DIRSET2 = GND or OPEN, DIRSET1 = GND or OPEN | | 1667 | | μs |
| | DIRSET2 = GND, DIRSET1 = VL | | 417 | | |
| | DIRSET2 = VL, DIRSET1 = VL | | 137 | | |
| t_{DIRSKW} | Direction control skew (DIR to RXOUT) | | 270 | | ns |
| t_{dis} | Standby disable delay 300 mV _{PP} at 2.176 MHz on RXIN | | 2 | | ms |
| t_{en} | Standby enable delay 300 mV _{PP} at 2.176 MHz on RXIN | | 2 | | ms |

7.7 Typical Characteristics

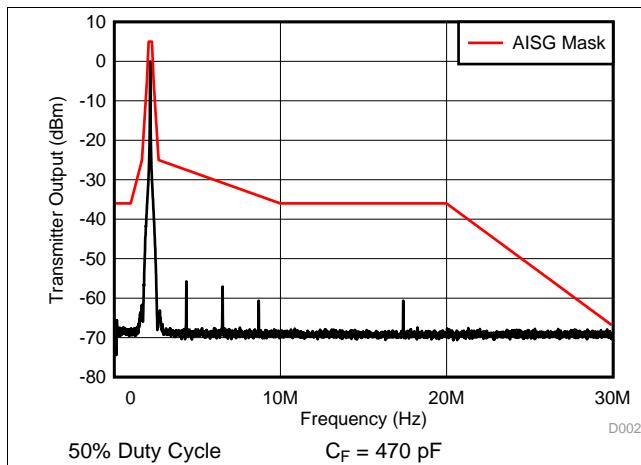


图 1. Low-Frequency Emissions Spectrum
With 9.6-kbps Signaling Rate

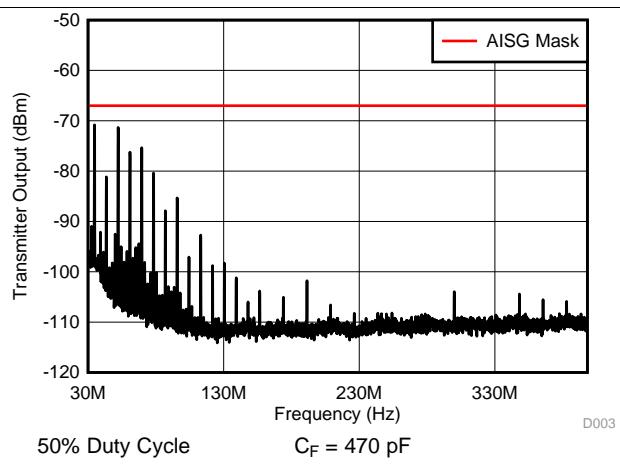


图 2. High-Frequency Emissions Spectrum
With 9.6-kbps Signaling Rate

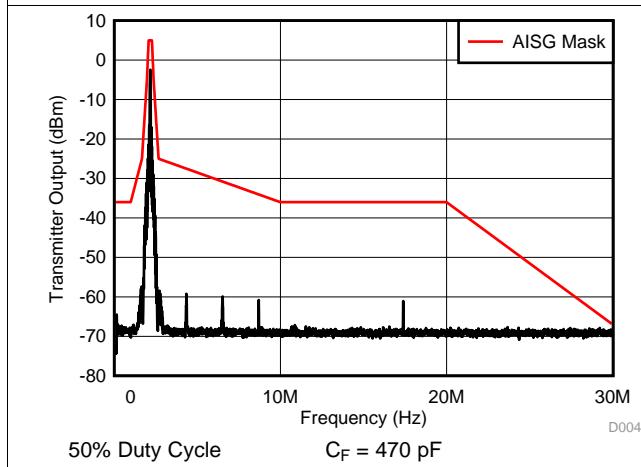


图 3. Low-Frequency Emissions Spectrum
With 38.4-kbps Signaling Rate

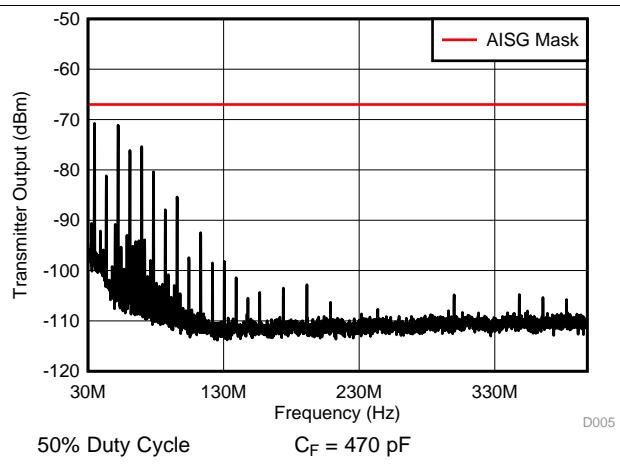


图 4. High-Frequency Emissions Spectrum
With 38.4-kbps Signaling Rate

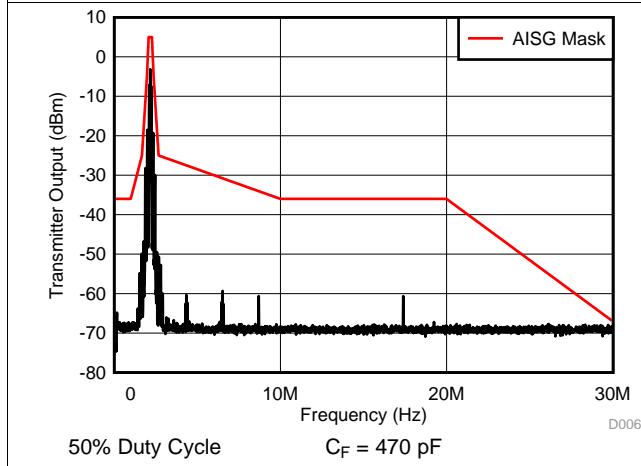


图 5. Low-Frequency Emissions Spectrum
With 115.2-kbps Signaling Rate

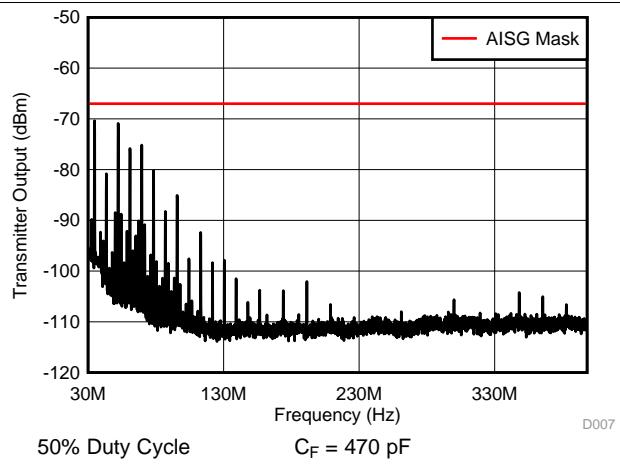


图 6. High-Frequency Emissions Spectrum
With 115.2-kbps Signaling Rate

Typical Characteristics (接下页)

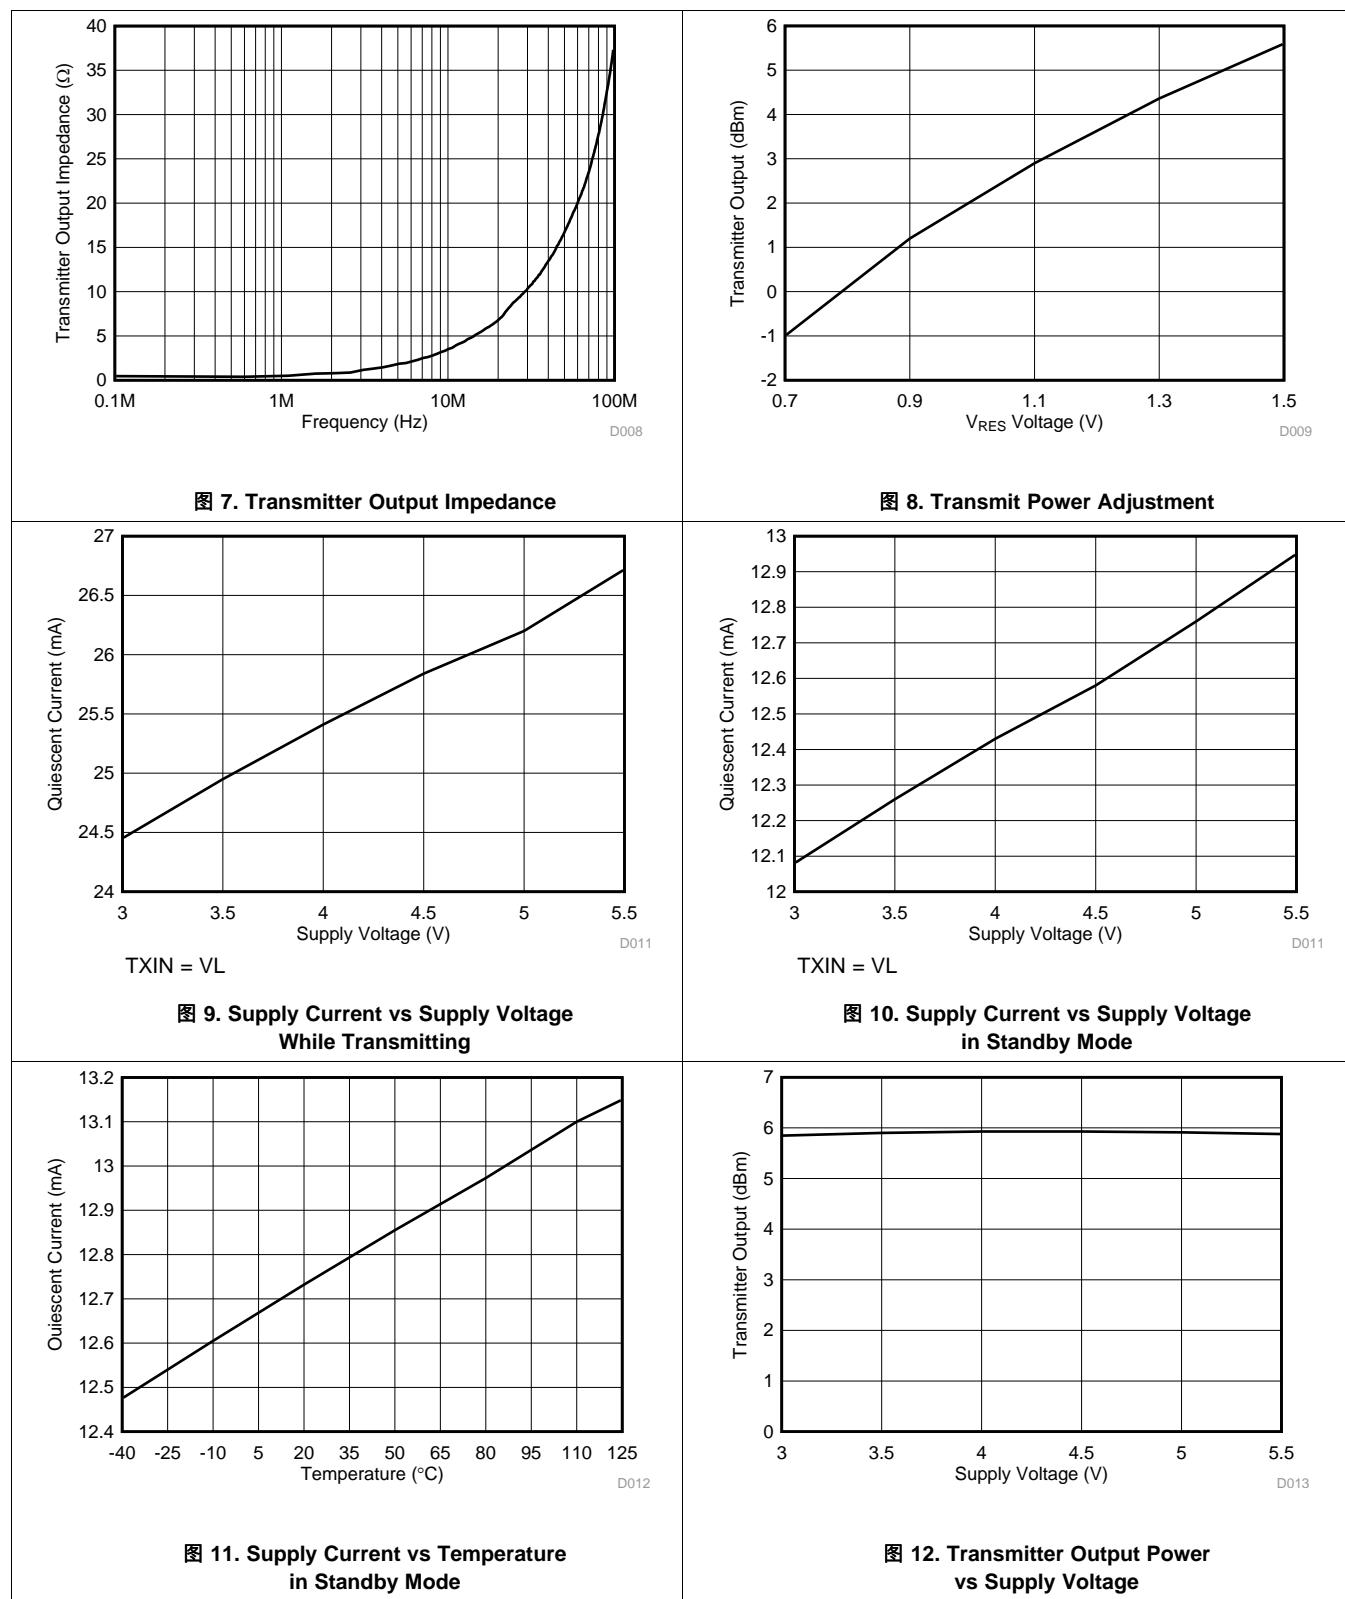


图 7. Transmitter Output Impedance

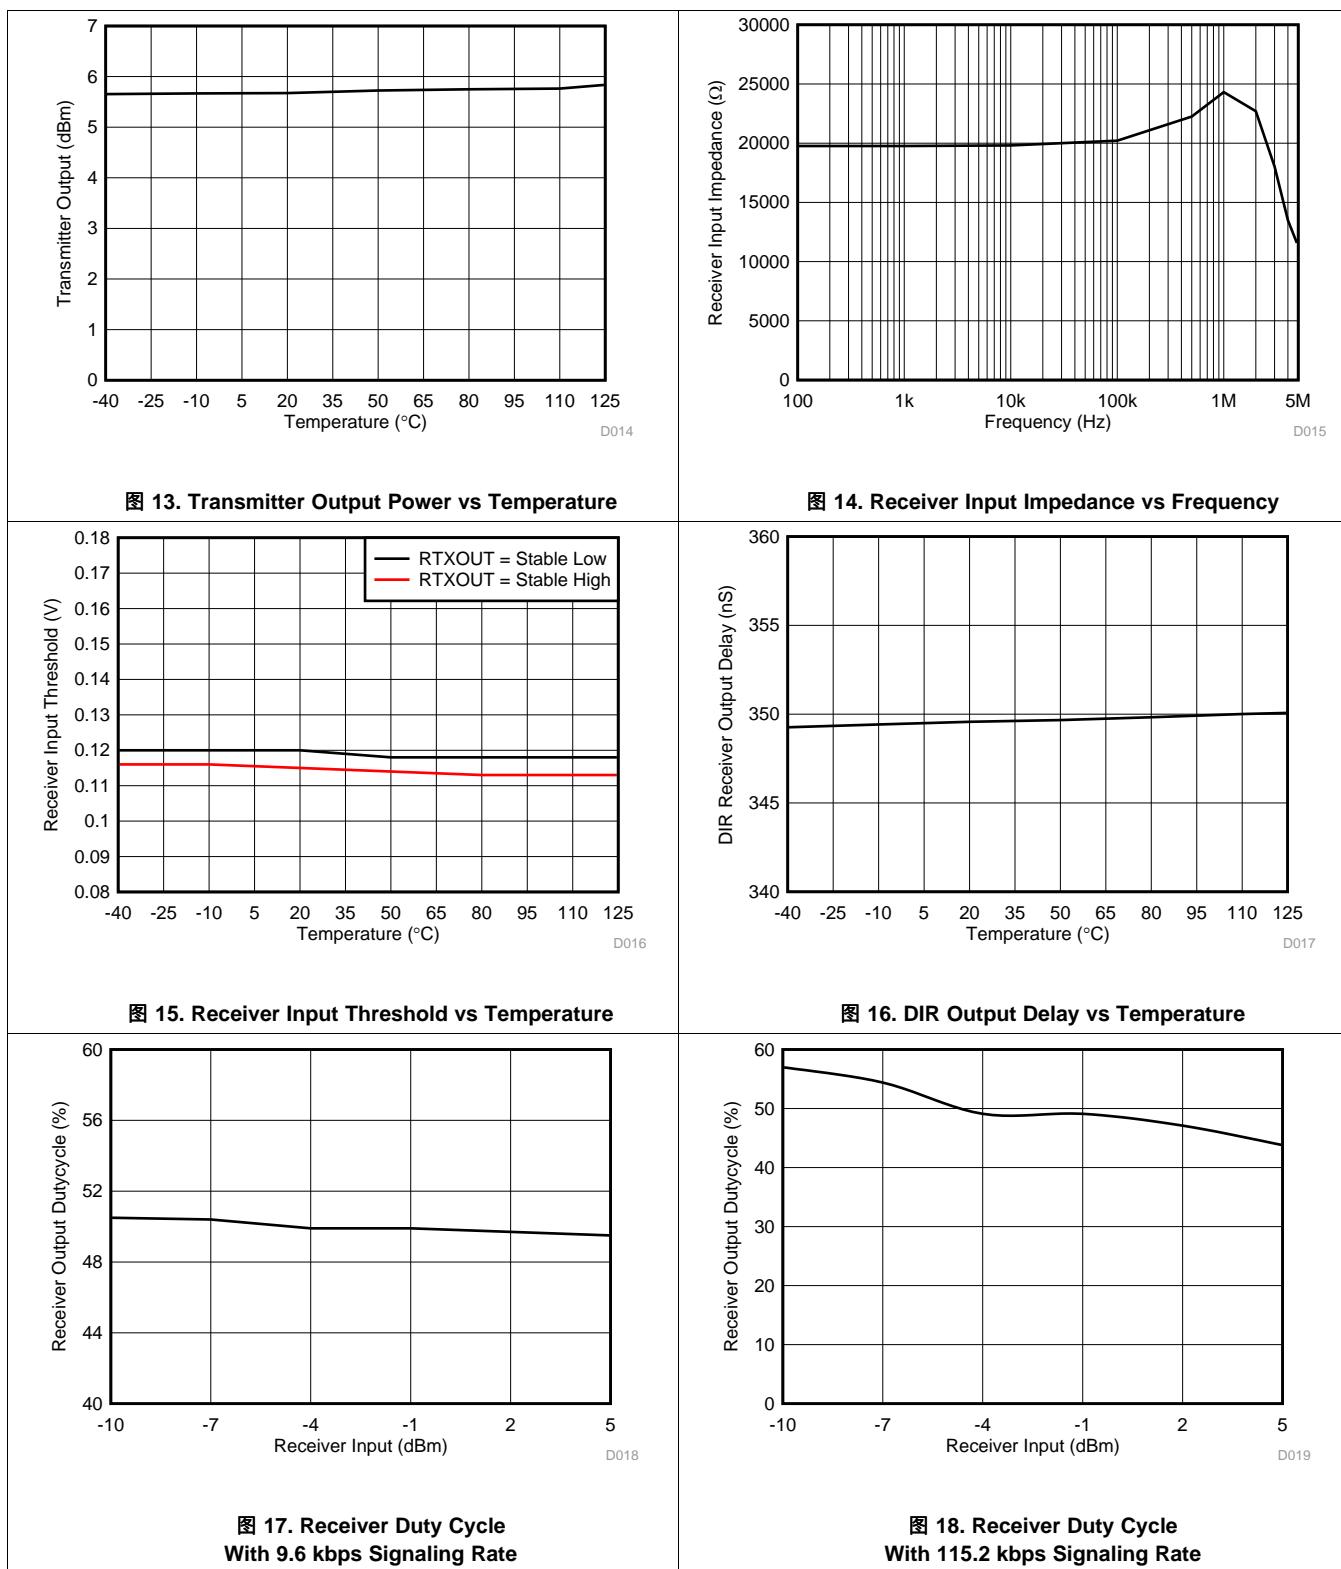
图 8. Transmit Power Adjustment

图 9. Supply Current vs Supply Voltage While Transmitting

图 10. Supply Current vs Supply Voltage in Standby Mode

图 11. Supply Current vs Temperature in Standby Mode

图 12. Transmitter Output Power vs Supply Voltage

Typical Characteristics (接下页)

图 13. Transmitter Output Power vs Temperature
图 14. Receiver Input Impedance vs Frequency
图 15. Receiver Input Threshold vs Temperature
图 16. DIR Output Delay vs Temperature
**图 17. Receiver Duty Cycle
With 9.6 kbps Signaling Rate**
**图 18. Receiver Duty Cycle
With 115.2 kbps Signaling Rate**

8 Parameter Measurement Information

Signal generator rate is 115 kbps, 50% duty cycle. Rise and fall times are less than 6 ns, and nominal output levels are 0 V and 3 V. Coupling capacitor, C_C , is 220 nF.

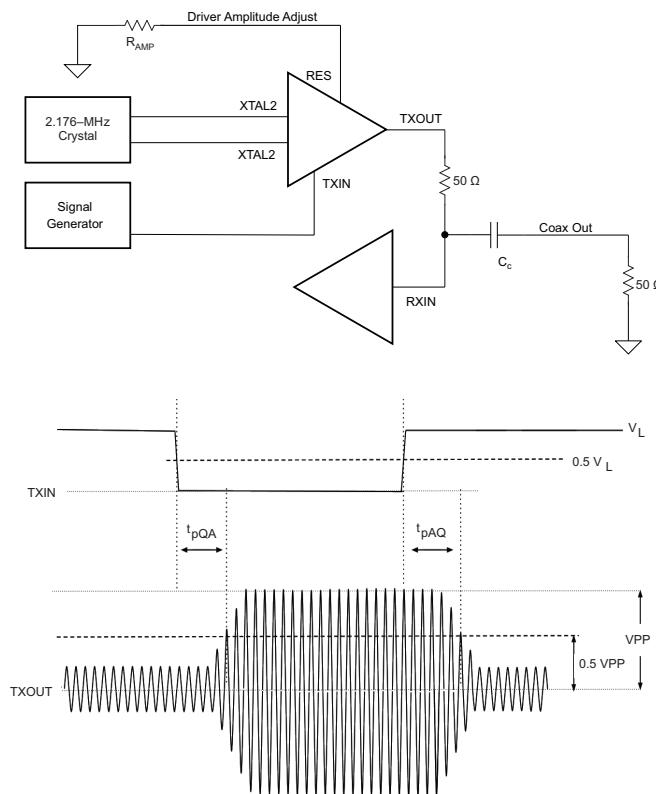


图 19. Measurement of Modem Driver Output Voltage With 50- Ω Loads

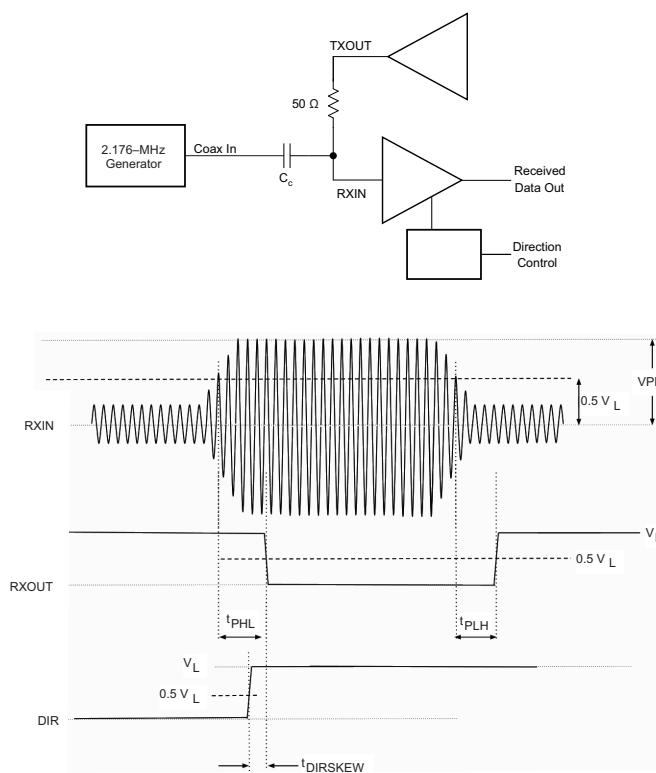


图 20. Measurement of Modem Receiver Propagation Delays

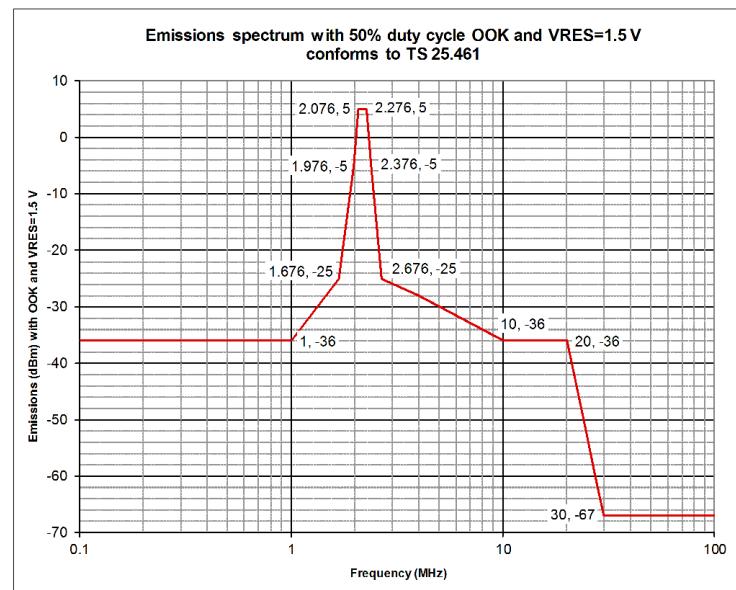



图 21. AISG Emissions Template

9 Detailed Description

9.1 Overview

The SN65HVD63 transceiver modulates and demodulates signals between the logic (baseband) and a frequency suitable for long coaxial media. The SN65HVD63 device is an integrated AISG transceiver designed to meet the requirements of the upcoming Antenna Interface Standards Group v3.0 specification. The SN65HVD63 receiver integrates an active bandpass filter to enable demodulation of signals even in the presence of spurious frequency components. The filter has a 2.176-MHz center frequency. The transmitter supports adjustable output power levels from 0 dBm to 6 dBm delivered to the 50- Ω coax cable. The SN65HVD63 transmitter is compliant with the spectrum emission requirement provided by the AISG standard. A direction control output facilitates bus arbitration for an RS-485 interface. This device integrates an oscillator input for a crystal, and also accepts standard clock inputs to the oscillator.

9.2 Functional Block Diagram

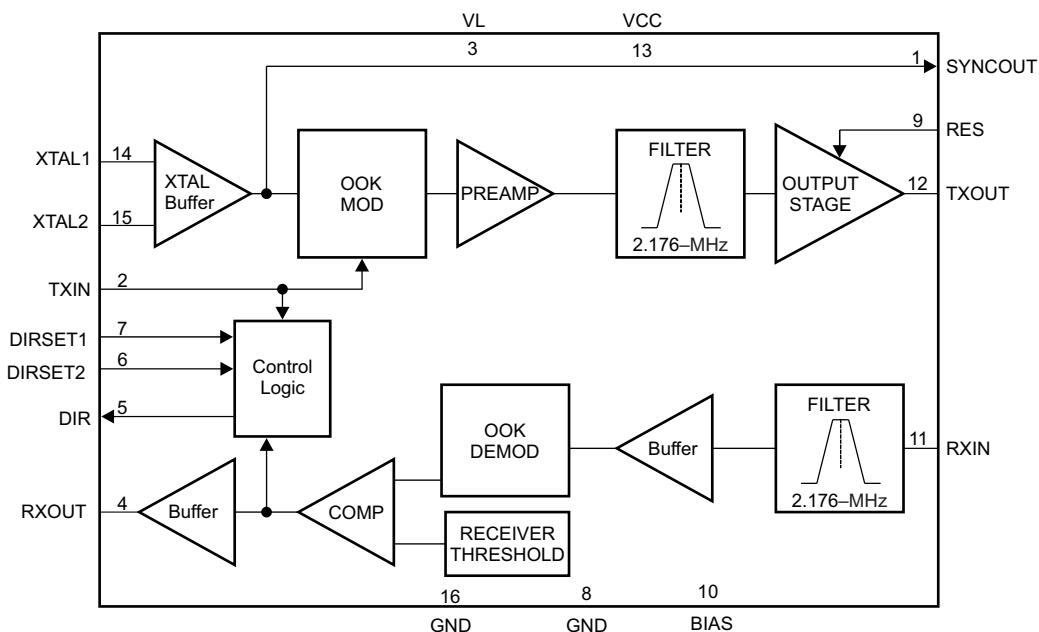

9.3 Feature Description

9.3.1 Coaxial Interface

The SN65HVD63 transceiver enables the transfer of data between radio equipment by modulating baseband data to a carrier frequency of 2.176 MHz (per the AISG standard). The transmitter output amplitude can be configured from 0 dBm to 6 dBm in order to communicate over a variety of different links, and the output emissions spectrum is designed to be compliant to AISG limits. The receiver features an active bandpass filter circuit that helps to separate the carrier frequency data from other spurious frequency components.

9.3.2 Reference Input

The 2.176-MHz modulation frequency is derived from an input reference that is nominally 8.704 MHz. The input reference can come either from a crystal or from an oscillator circuit with a tolerance of up to 30 ppm.

9.3.3 RS-485 Direction Control

To facilitate bus arbitration of an RS-485 interface, the SN65HVD63 provides a direction control output that can be used to control the enable/disable controls of an RS-485 transceiver. The direction control output automatically toggles based on activity present on the coaxial input interface, and has an adjustable time constant (controlled by the DIRSET1 and DIRSET2 pins) in order to accommodate various signaling rates.

9.4 Device Functional Modes

If DIRSET1 and DIRSET2 are in a logic high state, the device will be in standby mode. While in standby mode, the receiver functions normally, detecting carrier frequency activity on the RXIN pin and setting the RXOUT state. The transmitter circuits are not active in standby mode, thus the TXOUT pin is idle regardless of the logic state of TXIN. The supply current in standby mode is significantly reduced, allowing power savings when the node is not transmitting.

When not in standby mode, the default power-on state is idle. When in idle mode, RXOUT is high, and TXOUT is quiet. The device transitions to receive mode when a valid modulated signal is detected on the RXIN line or the device transitions to transmit mode when TXIN goes low. The device stays in either receive or transmit mode until DIR time-out (nominal 16 bit times) after the last activity on RXOUT or TXIN.

When in receive mode:

- RXOUT responds to all valid modulated signals on RXIN, whether from the local transmitter, a remote transmitter, or long noise burst.
- TXOUT responds to TXIN, generating 2.176-MHz signals on TXOUT when TXIN is low, and TXOUT is quiet when TXIN is high. (In normal operation, TXIN is expected to remain high when the device is in receive mode.)
- The device stays in receive mode until 16 bit times after the last rising edge on RXOUT, caused by valid modulated signal on the RXIN line.

When in transmit mode:

- RXOUT stays high, regardless of the input signal on RXIN.
- TXOUT responds to TXIN, generating 2.176-MHz signals on TXOUT when TXIN is low, and TXOUT is quiet when TXIN is high.
- The device stays in transmit mode until 16 bit times after TXIN goes high.

表 1 shows the driver functions. 表 2 shows the receiver functions. 图 22 shows the transitions between each state.

表 1. Driver Function Table

| TXIN ⁽¹⁾ | [DIRSET1, DIRSET2] | TXOUT | COMMENT |
|---------------------|-----------------------|-----------------------------------|-------------------|
| H | [L,L], [L,H] or [H,L] | < 1 mV _{PP} at 2.176 MHz | Driver not active |
| L | | V _{OPP} at 2.176 MHz | Driver active |
| X | [H,H] | < 1 mV _{PP} at 2.176 MHz | Standby mode |

(1) H = High, L = Low, X = Indeterminate

表 2. Receiver and DIR Function Table

| RXIN ⁽¹⁾ | RXOUT | DIR | COMMENT (see 图 22) |
|--|-------|-----|--|
| IDLE mode (not transmitting or receiving) | | | |
| < V _{IT} at 2.176 MHz for longer than DIR time-out | H | L | No outgoing or incoming signal |
| RECEIVE mode (not already transmitting) | | | |
| < V _{IT} at 2.176 MHz for less than t _{DIR} time-out | H | H | Incoming 1 bit, DIR stays HIGH for DIR time-out |
| > V _{IT} at 2.176 MHz for longer than t _{noise filter} | L | H | Incoming 0 bit, DIR output is HIGH |
| TRANSMIT mode (not already receiving) | | | |
| X | H | L | Outgoing message, DIR stays LOW for DIR time-out |

(1) H = High, L = Low, X = Indeterminate

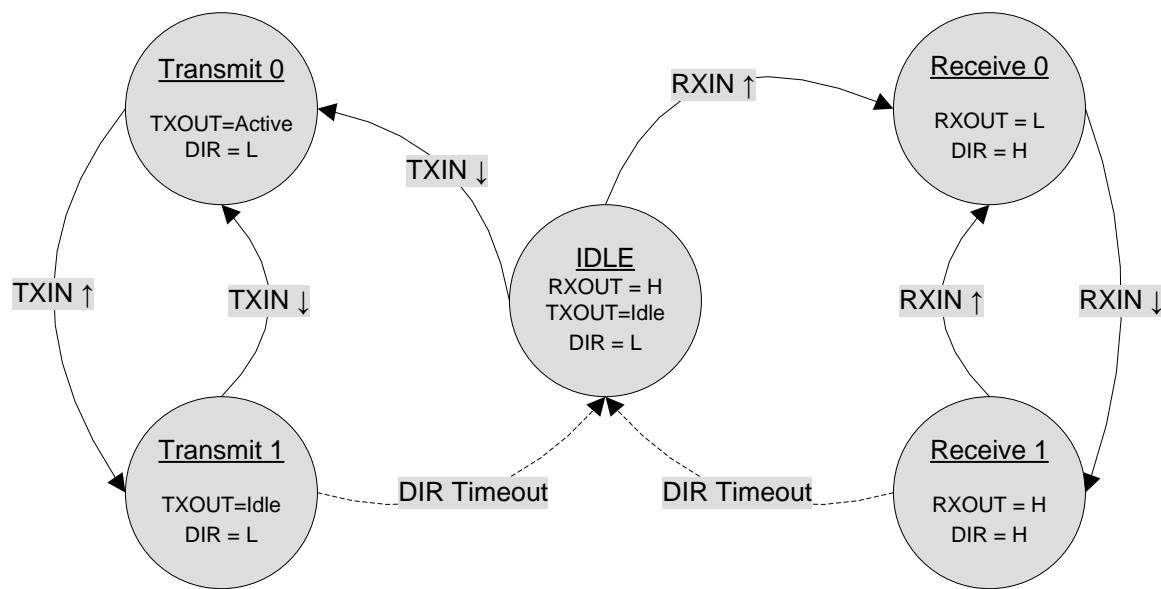


图 22. State Transition Diagram

10 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

10.1 Application Information

10.1.1 Driver Amplitude Adjust

The SN65HVD63 device can provide up to 2.5 V of peak-to-peak output signal at the TXOUT pin to compensate for potential loss within the external filter, cable, connections, and termination. External resistors are used to set the amplitude of the modulated driver output signal. Resistors connected across RES and BIAS set the output amplitude. The maximum peak-to-peak voltage at TXOUT is 2.5 V, corresponding to 6 dBm on the coaxial cable. The TXOUT voltage level can be adjusted by choice of resistors to set the voltage at the RES pin, according to the following equation:

$$V_{TXOUT} (V_{PP}) = (2.5 V_{PP} \times V_{RES} (V)) / 1.5 V V_{RES} (V) = 1.5 V \times R2 / (R1 + R2) \quad (1)$$

The voltage at the RES pin should be from 0.7 V to 1.5 V. Connect RES directly to the BIAS ($R1 = 0 \Omega$) for maximum output level of 2.5 V_{PP}. This gives a minimum voltage level at TXOUT of 1.2 V_{PP}, corresponding to about 0 dBm at the coaxial cable. A 1- μ F capacitor should be connected between the BIAS pin and GND. To obtain a nominal power level of 3 dBm at the feeder cable as the AISG standard requires, use $R1 = 4.1 \text{ k}\Omega$ and $R2 = 10 \text{ k}\Omega$ that provide 1.78 V_{PP} at TXOUT.

10.1.2 Direction Control

In many applications the mast-top modem that receives data from the base distributes the received data through an RS-485 network to several mast-top devices. When the mast-top modem receives the first logic 0 bit (active modulated signal) it takes control of the mast-top RS-485 network by asserting the direction control signal. The duration of the direction control assertion should be optimized to pass a complete message of length B bits at the known signaling rate ($1/t_{BIT}$) before relinquishing control of the mast-top RS-485 network. For example, if the messages are 10 bits in length ($B=10$) and the signaling rate is 9600 bits per second ($t_{BIT} = 0.104 \text{ ms}$) then a positive pulse of duration 1.7 ms is sufficient (with margin to allow for network propagation delays) to enable the mast-top RS-485 drivers to distribute each received message. [图 23](#) shows the assertion of direction control.

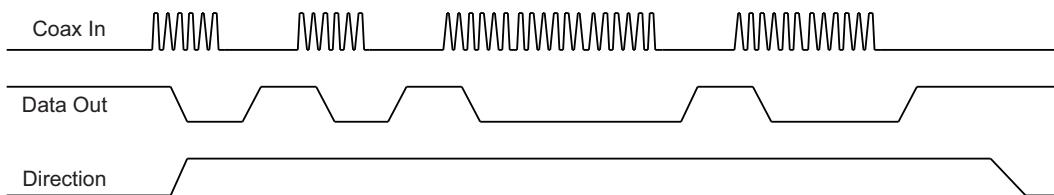


图 23. Assertion of Direction Control

10.1.3 Direction Control Time Constant

The time constant for the direction control function can be set by the control mode pins, DIRSET1 and DIRSET2. These pins should be set to correspond to the desired data rate. With no external connections to the control mode pins, the internal time constant is set to the maximum value, corresponding to the minimum data rate.

Application Information (接下页)

10.1.4 Conversion Between dBm and Peak-to-Peak Voltage

$$dBm = 20 \times \text{LOG10} [\text{Volts-pp} / \text{SQRT}(0.008 \times Z_0)] = 20 \times \text{LOG10} [VPP / 0.63] \text{ for } Z_0 = 50 \Omega \quad (2)$$

$$VPP = \text{SQRT}(0.008 \times Z_0) \times 10^{(dBm/20)} = 0.63 \times 10^{(dBm/20)} \text{ for } Z_0 = 50 \Omega \quad (3)$$

表 3 shows conversions between dBm and peak-to-peak voltage with a 50- Ω load, for various levels of interest including reference levels from the 3GPP TS 25.461 Technical Specification.

表 3. Conversions Between dBm and Peak-to-Peak Voltage

| SIGNAL ON COAX | dBm | V _{PP} |
|---------------------------------|-----|-----------------|
| Maximum Driver ON Signal | 5 | 1.12 |
| Nominal Driver ON Signal | 3 | 0.89 |
| Minimum Driver ON Signal | 1 | 0.71 |
| AISG Maximum Receiver Threshold | -12 | 0.16 |
| Nominal Receiver Threshold | -15 | 0.11 |
| Minimum Receiver Threshold | -18 | 0.08 |
| Maximum Driver OFF Signal | -40 | 0.006 |

10.2 Typical Application

The AISG On-Off Keying (OOK) interface allows for command, control, and diagnostic information to be communicated between a base station and the corresponding tower-mounted antennae. 图 24 shows a typical application.

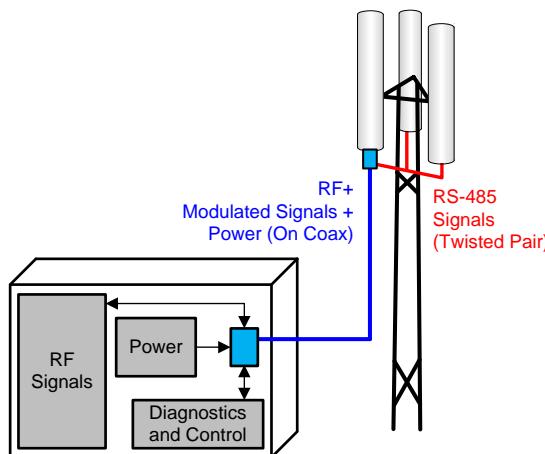


图 24. Typical AISG Application

10.2.1 Design Requirements

An AISG transceiver is used to convert between digital logic-level signals and RF signals. The AISG standard requires an RF carrier frequency of 2.176 MHz with 100-ppm accuracy. The output signal of the driver, when active, should be from 1 dBm to 5 dBm. The receiver must be designed such that the input threshold is from -18 dBm to -12 dBm.

10.2.2 Detailed Design Procedure

To ensure accuracy of the carrier frequency, an input reference frequency equal to four times the carrier (that is, 8.704 MHz) should be connected to the XTAL1 or XTAL2 inputs. This signal can come from a crystal (connected between XTAL1 and XTAL2) or from a PLL/clock generator circuit (connected to XTAL1 with XTAL2 grounded). The frequency accuracy must be within 100 ppm.

Typical Application (接下页)

The driver output power level of the SN65HVD63 device can be adjusted through use of the RES pin. To align with AISG requirements, a nominal power level of 3 dBm should be configured by connecting a 4.1-k Ω resistor between RES and BIAS and a 10-k Ω resistor between RES and GND. [图 25](#) shows an example schematic.

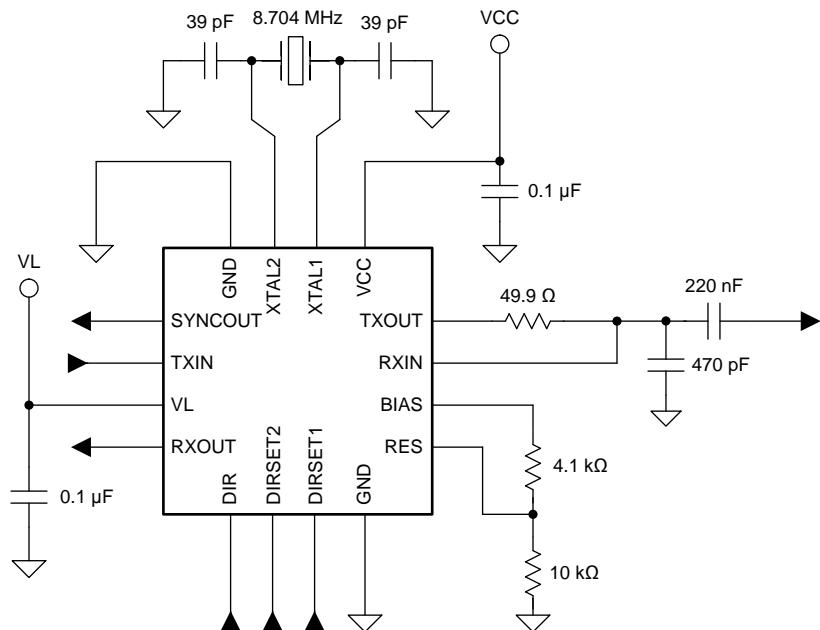


图 25. SN65HVD63 Schematic

10.2.3 Application Curve

[图 26](#) shows the application curve for the SN65HVD63 device.

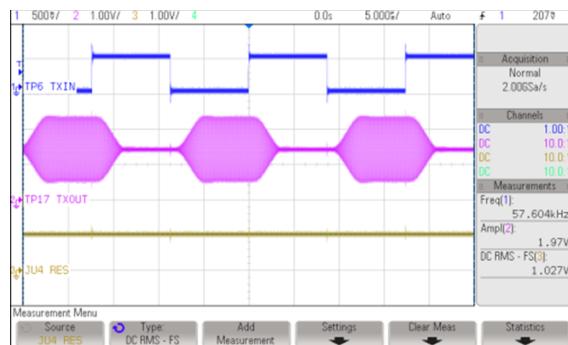


图 26. SN65HVD63 Application Curve

11 Power Supply Recommendations

The SN65HVD63 device has two power supply pins: V_{CC} , which provides power to the analog circuitry, and VL , which is a logic supply. V_{CC} should be operated from 3 V to 5.5 V, while VL can range from 1.6 V to 5.5 V to interface to different logic levels. Power supply decoupling capacitances of at least 0.1 μ F should be placed as close as possible to each power supply pin.

12 Layout

12.1 Layout Guidelines

Best practices for high-speed PCB design should be observed because the coax interface to the SN65HVD63 device operates at RF. The RF signaling traces should have a controlled characteristic impedance that is well-matched to the coaxial line. A continuous reference plane should be used to avoid impedance discontinuities. Power and ground distribution should be done through planes rather than traces to decrease series resistance and increase the effective decoupling capacitance on the power rails.

12.2 Layout Example

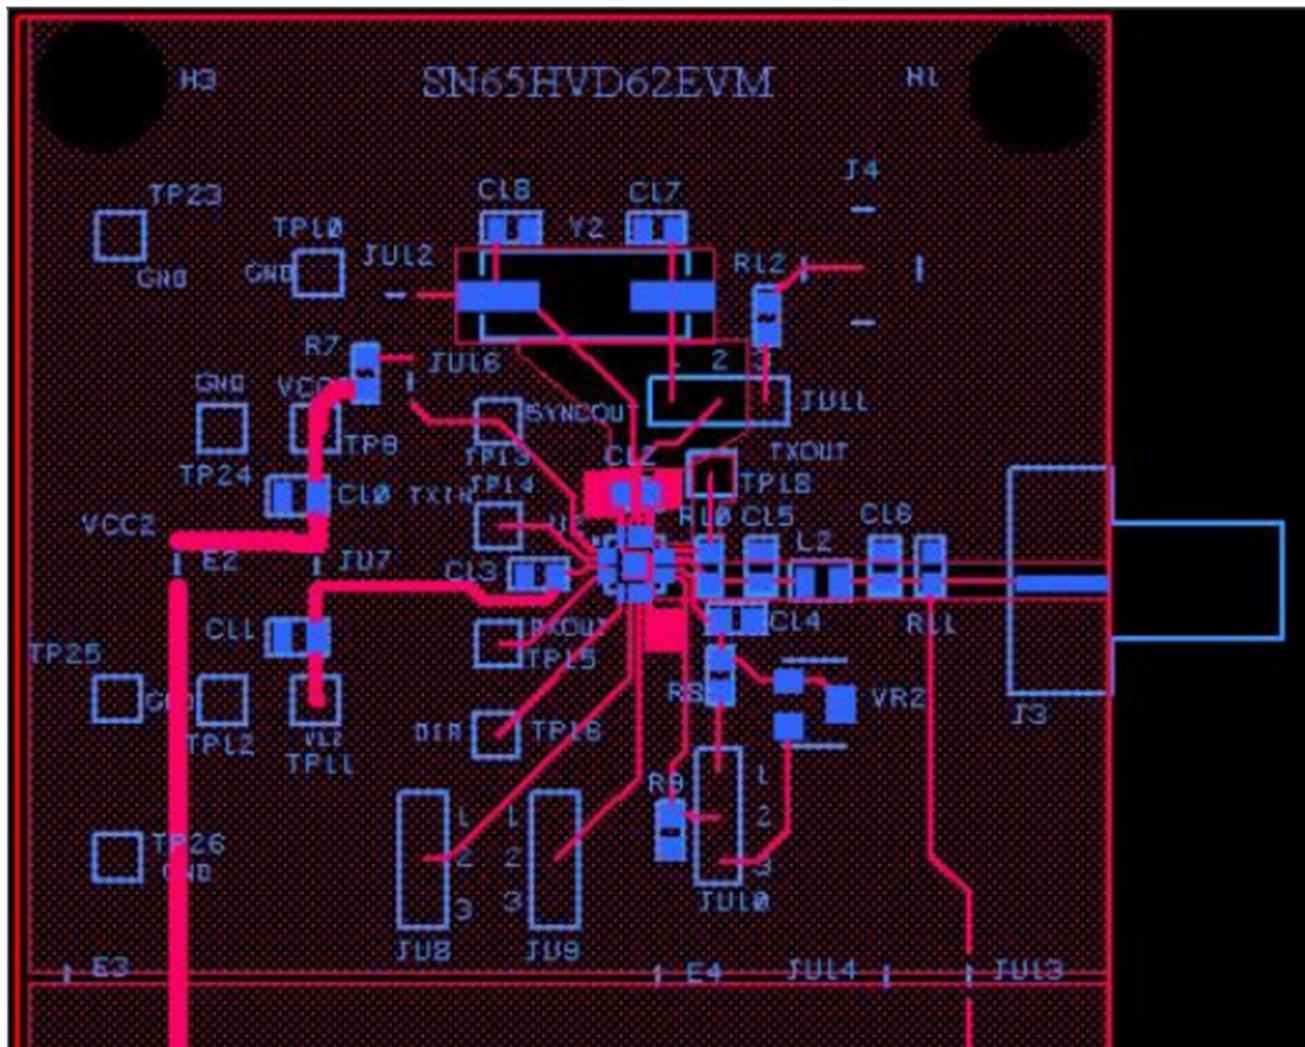


图 27. SN65HVD63 Layout

13 器件和文档支持

13.1 相关文档

[《天线线路器件的控制接口》](#)，天线接口标准标准组织，标准编号 AISG v2.0

13.2 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community.* Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

13.3 商标

E2E is a trademark of Texas Instruments.

AISG is a registered trademark of Antenna Interface Standards Group, Ltd.

All other trademarks are the property of their respective owners.

13.4 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

13.5 Glossary

[SLYZ022 — TI Glossary.](#)

This glossary lists and explains terms, acronyms, and definitions.

14 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。这些信息是针对指定器件可提供的最新数据。这些数据会在无通知且不对本文档进行修订的情况下发生改变。欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| SN65HVD63RGTR | Active | Production | VQFN (RGT) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | HVD63 |
| SN65HVD63RGTR.A | Active | Production | VQFN (RGT) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | HVD63 |
| SN65HVD63RGTRG4 | Active | Production | VQFN (RGT) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | HVD63 |
| SN65HVD63RGTRG4.A | Active | Production | VQFN (RGT) 16 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | HVD63 |
| SN65HVD63RGTT | Active | Production | VQFN (RGT) 16 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | HVD63 |
| SN65HVD63RGTT.A | Active | Production | VQFN (RGT) 16 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | HVD63 |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

GENERIC PACKAGE VIEW

RGT 16

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

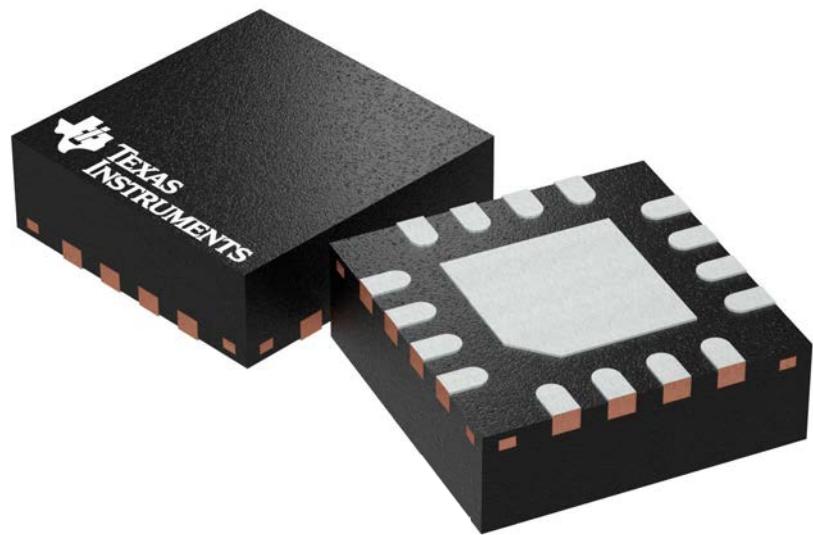

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4203495/I


RGT0016A



PACKAGE OUTLINE

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

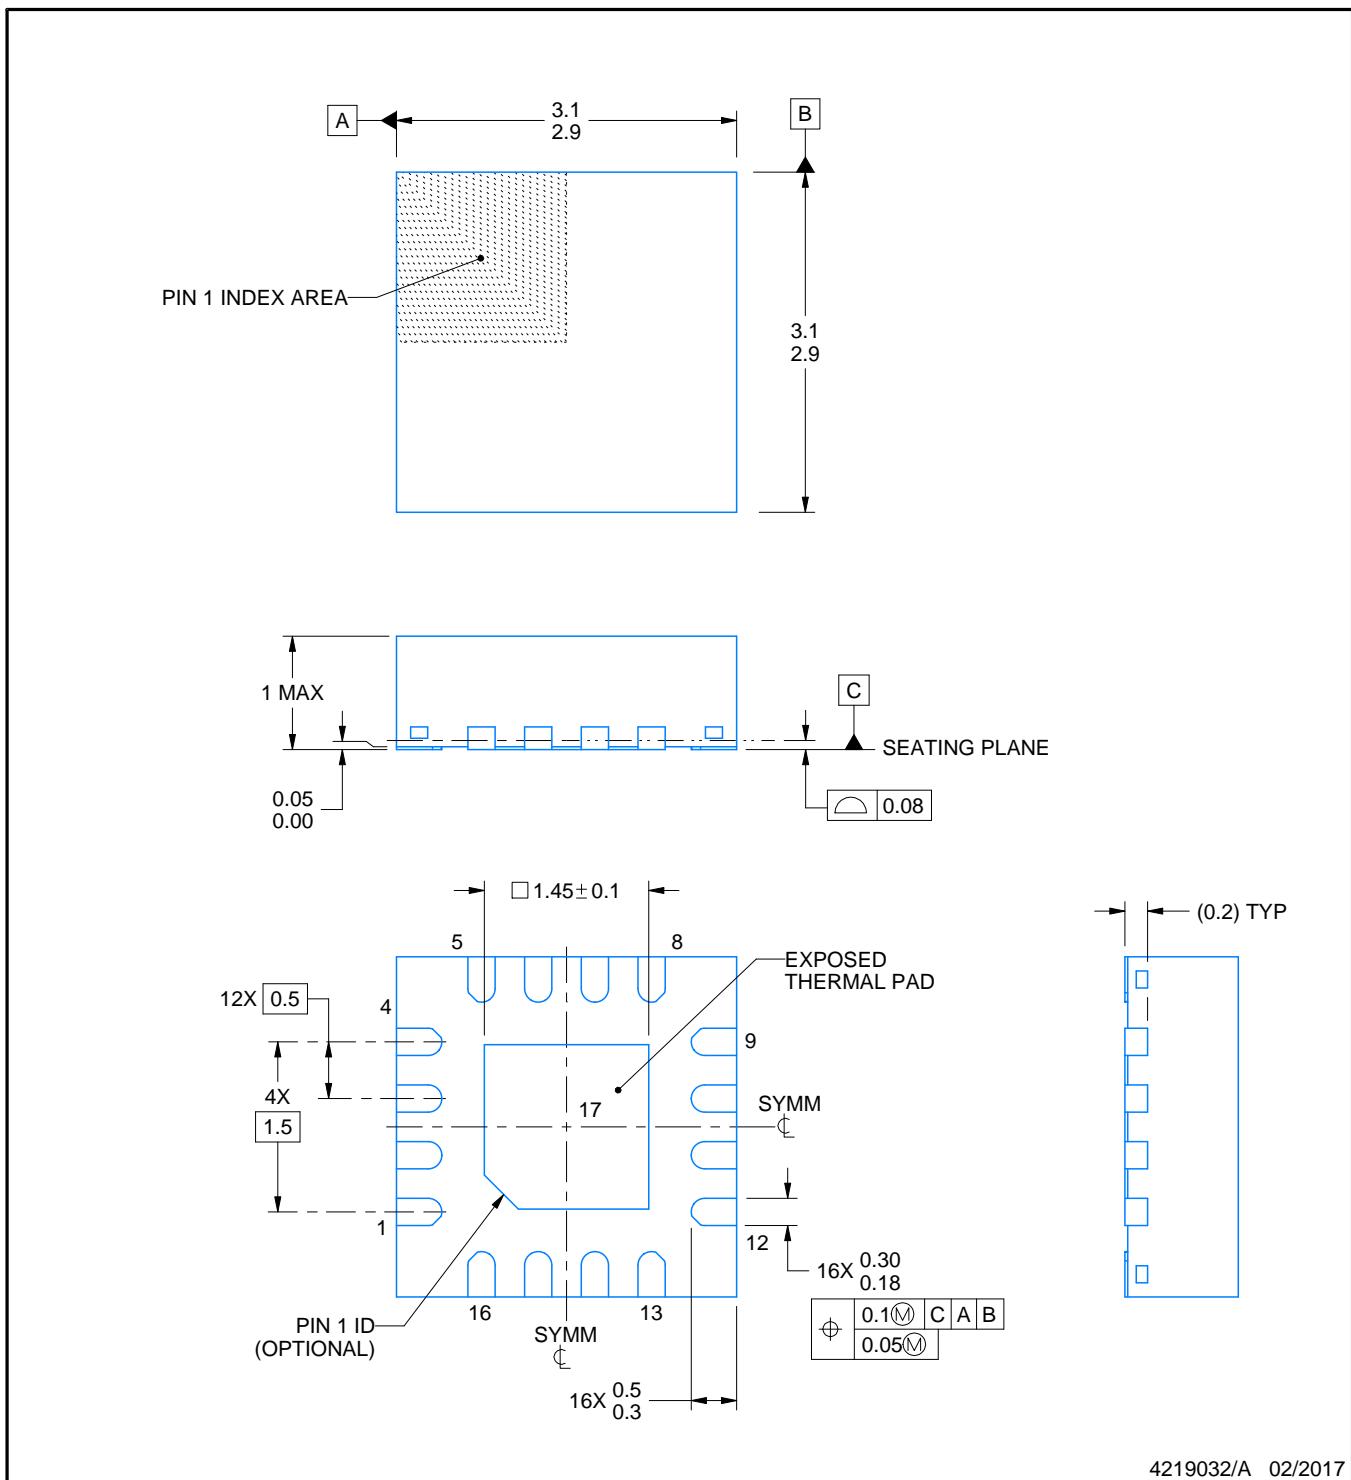

4219032/A 02/2017

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.
4. Reference JEDEC registration MO-220

EXAMPLE BOARD LAYOUT


RGT0016A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

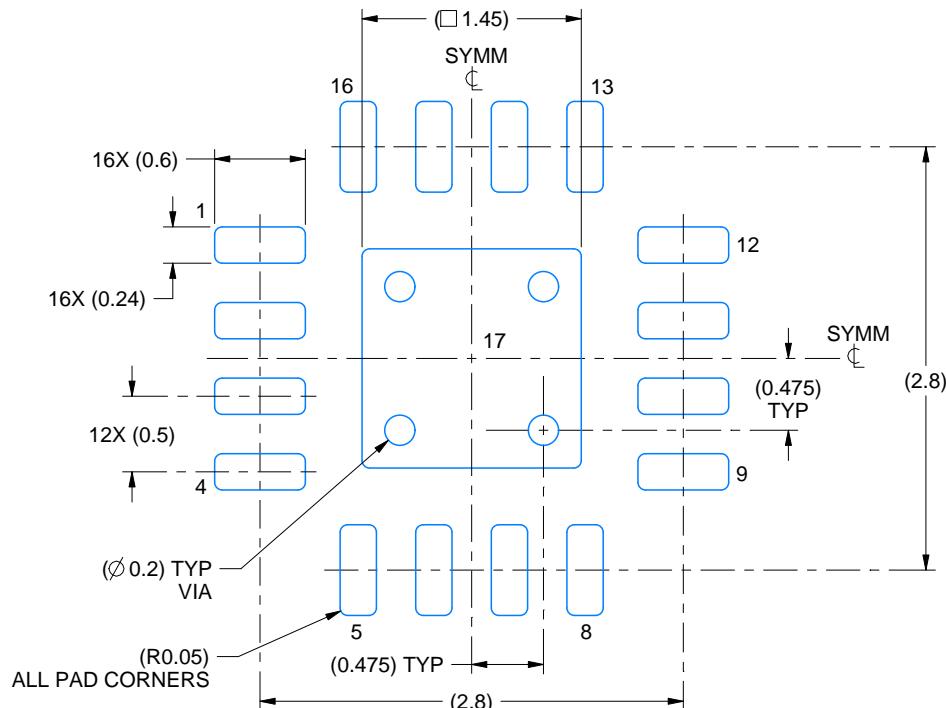

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

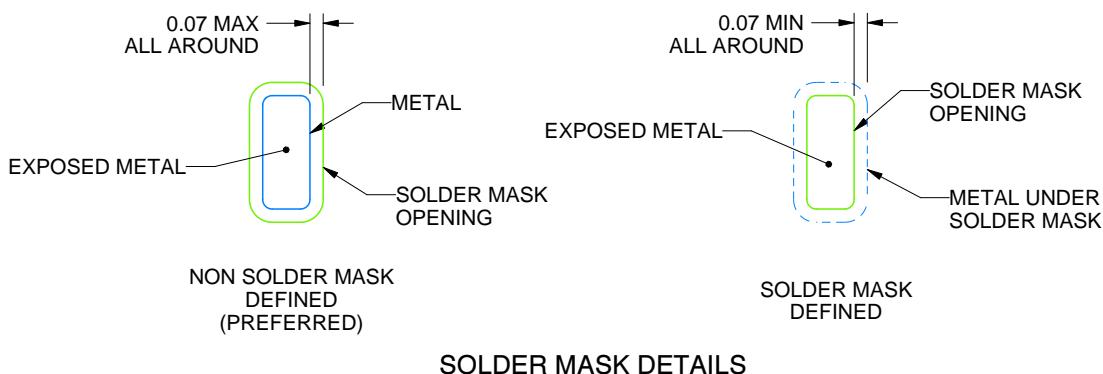

4219032/A 02/2017

NOTES: (continued)


5. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
6. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RGT0016A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

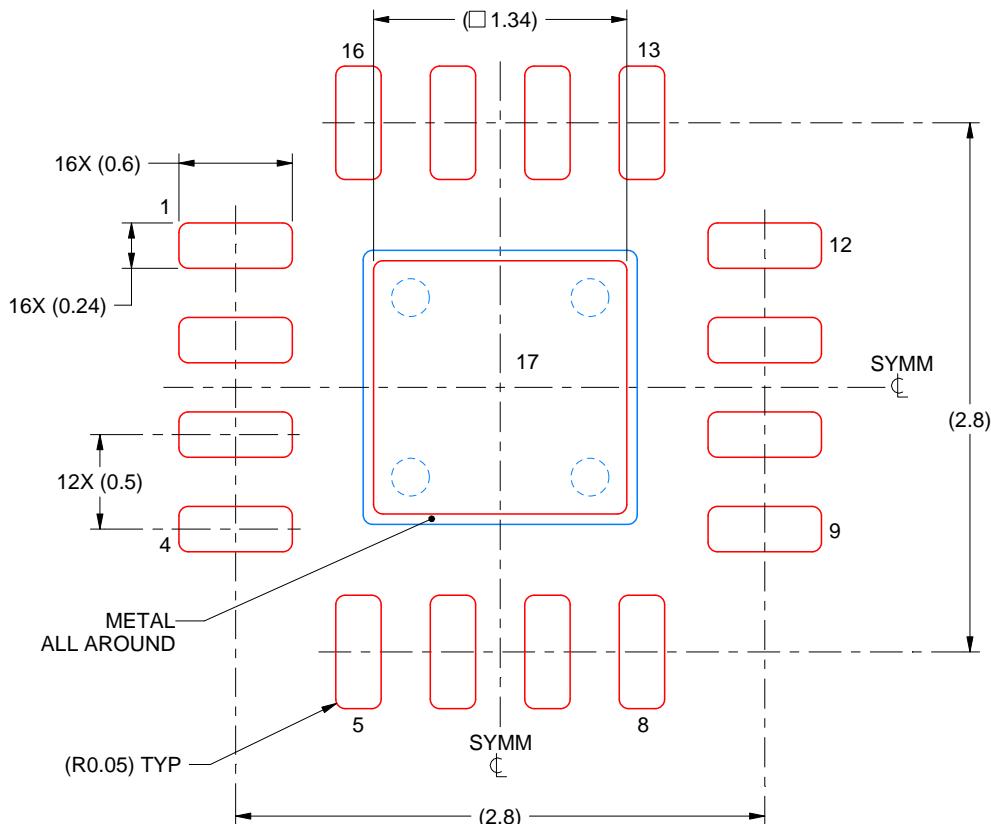

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 17:
86% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4219032/A 02/2017

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月