TEXAS INSTRUMENTS
TPS74701-Q1
ZHCSN52D – APRIL 2010 – REVISED DECEMBER 2023

TPS74701-Q1 具有可编程软启动功能的汽车类 500mA 低压降线性稳压器

1 特性

- 符合面向汽车应用的 AEC-Q100 标准：
  - 温度等级 1：–40°C 至 +125°C，T_A
- V_{OUT} 范围：0.8V 至 3.6V
- V_{IN} 范围：0.8V 至 5.5V
- V_{BIAS} 范围：2.7V 至 5.5V
- 低压降：500mA 下的典型值为 20mV，V_{BIAS} = 5V
- 电源正常 (PG) 输出可实现电源监视或为其他电源提供时序信号
- 线路、负载和温度范围内的精度为 0.95%
- 可编程软启动可提供线性电压启动
- V_{BIAS} 支持低 V_{IN} 运行，具有良好的瞬态响应
- 与 ≥ 2.2 µ F 的任何输出电容器一起工作时可保持稳定
- 采用小型 3mm × 3mm 10 引脚 VSON 封装

2 应用

- 汽车音响主机
- 信息娱乐系统与仪表组
- 远程信息处理控制单元
- 前置摄像头和后置摄像头

3 说明

TPS74701-Q1 低压降 (LDO) 线性稳压器可面向多种应用提供易于使用的稳健型电源管理解决方案。用户可编程软启动通过减少容性浪涌电流，最大限度地减少了输入电源上的应力，并且单调启动旨在为多种不同类型的处理器和 ASIC 供电。借助使能输入和电源正常输出，可通过外部稳压器轻松进行时序控制，因此可为各种具有特殊启动要求的应用配置满足其时序要求的解决方案。

该器件还具有高精度的参考电压电路和误差放大器，可在整个负载、线路、温度和过程范围内提供 0.95% 精度。该器件在使用大于或等于 2.2µF 的任何类型的电容器时均能保持稳定，并完全符合 AEC-Q100 标准。

封装信息

器件型号	封装(1)	封装尺寸(2)
TPS74701-Q1	DRC（VSON，10）	3mm × 3mm

(1) 如需更多信息，请参阅*机械、封装和可订购信息*。
(2) 封装尺寸（长 x 宽）为标称值，并包括引脚（如适用）。

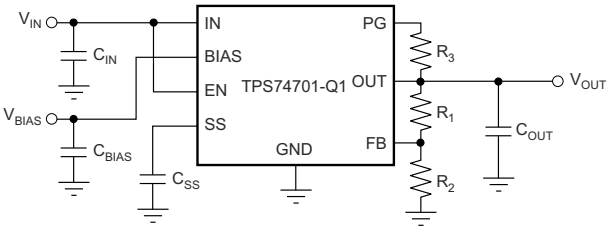

典型应用电路（可调节）

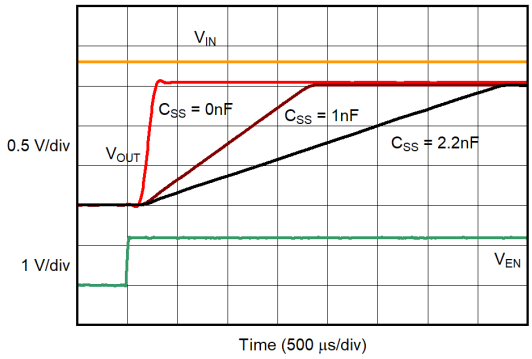

导通响应

本资源的原文使用英文撰写。 为方便起见，TI 提供了译文；由于翻译过程中可能使用了自动化工具，TI 不保证译文的准确性。 为确认准确性，请务必访问 ti.com 参考最新的英文版本（控制文档）。

Table of Contents

1 特性.....1
2 应用.....1
3 说明.....1
4 Pin Configuration and Functions.....3
5 Specifications.....4
5.1 Absolute Maximum Ratings.....4
5.2 ESD Ratings.....4
5.3 Recommended Operating Conditions.....4
5.4 Thermal Information.....5
5.5 Electrical Characteristics.....6
5.6 Typical Characteristics: I_{OUT} = 50 mA.....8
5.7 Typical Characteristics: V_{EN} = V_{IN} = 1.8 V, V_{OUT} = 1.5 V.....13
6 Detailed Description.....15
6.1 Overview.....15
6.2 Functional Block Diagram.....15
6.3 Feature Description.....15
6.4 Device Functional Modes.....18
7 Application and Implementation.....19
7.1 Application Information.....19
7.2 Typical Application.....19
7.3 Power Supply Recommendations.....22
7.4 Layout.....22
8 Device and Documentation Support.....27
8.1 Device Support.....27
8.2 接收文档更新通知.....27
8.3 支持资源.....27
8.4 Trademarks.....27
8.5 静电放电警告.....27
8.6 术语表.....27
9 Revision History.....28
10 Mechanical, Packaging, and Orderable Information.....28

Copyright © 2023 Texas Instruments Incorporated

4 Pin Configuration and Functions

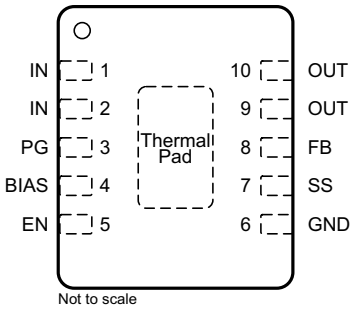

图 4-1. DRC Package, 10-Pin VSON (Top View)

表 4-1. Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
BIAS	4	I	Bias pin. Input voltage for error amplifier, reference, and internal control circuits.
EN	5	I	Enable pin. Driving this pin high enables the regulator. Driving this pin low puts the regulator into shutdown mode. This pin must not be left unconnected.
FB	8	I	Feedback pin. The feedback connection to the center tap of an external resistor divider network that sets the output voltage. This pin must not be left floating.
GND	6	—	Ground pin.
IN	1, 2	I	Input pin. This pin supplies the input voltage to the device. For best transient response and to minimize input impedance, use the recommended value or larger capacitor from IN to GND, as listed in the *Recommended Operating Conditions* table. Place the input capacitors as close as possible to the IN and GND pins of the device.
OUT	9, 10	O	Output pin. Regulated output voltage, a small capacitor (total typical capacitance ⩾ 2.2 µF, ceramic) is needed from this pin to ground to assure stability. Place the output capacitors as close as possible to the OUT and GND pins of the device.
PG	3	O	Power-good pin. This pin is an open-drain, active-high output that indicates the status of V_{OUT}; see the *Power Good* section for additional information.
SS	7	—	Soft-start pin. A capacitor connected on this pin to ground sets the start-up time. If this pin is left unconnected, the regulator output soft-start ramp time is typically 200 µs; see the *Programmable Soft-Start* section for further information.
Thermal Pad	—	—	Connect the pad to GND for the best possible thermal performance.

Copyright © 2023 Texas Instruments Incorporated

5 Specifications

5.1 Absolute Maximum Ratings

over operating temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
V_{IN}, V_{BIAS}	Input voltage	–0.3	6	V
V_{EN}	Enable voltage	–0.3	6	V
V_{PG}	Power good voltage	–0.3	6	V
I_{PG}	PG sink current	0	1.5	mA
V_{SS}	Soft-start voltage	–0.3	6	V
V_{FB}	Feedback voltage	–0.3	6	V
V_{OUT}	Output voltage	–0.3	V_{IN} + 0.3(2)	V
I_{OUT}	Output current	Internally limited		
I_{CL}	Output short-circuit duration	Indefinite		
P_{DISS}	Continuous total power dissipation	See Thermal Information		
T_J, T_{stg}	Junction temperature	–40	150	°C
	Storage temperature	–55	150	

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) The absolute maximum rating is VIN + 0.3 V or 6.0 V, whichever is smaller.

5.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per AEC Q100-002(1)	±2000	V
		Charged device model (CDM), per AEC specification Q100-011	±500	

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{IN}	Input supply voltage	V_{OUT} + V_{DO} (V_{IN})	V_{OUT} + 0.3	5.5	V
V_{EN}	Enable supply voltage		V_{IN}	5.5	V
V_{BIAS} (1)	Bias supply voltage	V_{OUT} + V_{DO} (V_{BIAS})(2)	V_{OUT} + 1.6(2)	5.5	V
V_{OUT}	Output voltage	0.8		3.3	V
I_{OUT}	Output current	0		500	mA
C_{OUT}	Output capacitor	2.2			µF
C_{IN} (3)	Input capacitor	1			µF
C_{BIAS}	Bias capacitor	0.1	1		µF
T_J	Operating junction temperature	–40		150	℃

(1) BIAS supply is required when V_{IN} is below V_{OUT} + 1.62 V.
(2) V_{BIAS} has a minimum voltage of 2.7 V or V_{OUT} + V_{DO} (V_{BIAS}), whichever is higher.
(3) If V_{IN} and V_{BIAS} are connected to the same supply, the recommended minimum capacitor for the supply is 4.7 µF.

Copyright © 2023 Texas Instruments Incorporated

5.4 Thermal Information

THERMAL METRIC[1]		TPS74701-Q1		UNIT
		DRC (VSON)	DRC (VSON)[2]	
		10 PINS	10 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	41.5	47.2	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	78	63.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	N/A	19.5	°C/W
ψ_{JT}	Junction-to-top characterization parameter	0.7	4.2	°C/W
ψ_{JB}	Junction-to-board characterization parameter	11.3	19.4	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	6.6	3.3	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC package thermal metrics application note.
(2) New chip.

Copyright © 2023 Texas Instruments Incorporated

5.5 Electrical Characteristics

at V_{EN} = 1.1 V, V_{IN} = V_{OUT} + 0.3 V, C_{BIAS} = 0.1 µF, C_{IN} = C_{OUT} = 10 µF, C_{NR} = 1 nF, I_{OUT} = 50 mA, V_{BIAS} = 5.0 V, and T_J = –40°C to 125°C (Legacy Chip) and T_J = –40°C to 150°C (New Chip), (unless otherwise noted); typical values are at T_J = 25°C

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{REF}	Internal reference (Adj.)	T_A = +25°C	0.796	0.8	0.804	V
V_{OUT}	Output voltage range	V_{IN} = 5 V, I_{OUT} = 0.5 A	V_{REF}		3.6	V
	Accuracy(1)	2.97 V ≤ V_{BIAS} ≤ 5.5 V, 50 mA ≤ I_{OUT} ≤ 0.5 A (Legacy Chip)	–2	±0.5	2	%
		2.97 V ≤ V_{BIAS} ≤ 5.5 V, 50 mA ≤ I_{OUT} ≤ 0.5 A (New Chip)	–1.25	±0.3	1.25	
ΔV_{OUT} (ΔV_{IN})	Line regulation	$V_{OUT(nom)}$ + 0.3 ≤ V_{IN} ≤ 5.5 V (Legacy Chip)		0.03		%/V
		$V_{OUT(nom)}$ + 0.3 ≤ V_{IN} ≤ 5.5 V (New Chip)		0.001		
ΔV_{OUT} (ΔI_{OUT})	Load regulation	50 mA ≤ I_{OUT} ≤ 0.5 A (Legacy Chip)		0.09		%/A
		50 mA ≤ I_{OUT} ≤ 0.5 A (New Chip)		0.11		
V_{DO}	V_{IN} dropout voltage(2)	I_{OUT} = 0.5 A, V_{BIAS} – $V_{OUT(nom)}$ ≥ 1.62 V (Legacy Chip)(3)		50	120	mV
		I_{OUT} = 0.5 A, V_{BIAS} – $V_{OUT(nom)}$ ≥ 1.62 V (New Chip)(3)		20	40	
	V_{BIAS} dropout voltage(2)	I_{OUT} = 0.5 A, V_{IN} = V_{BIAS} (Legacy Chip)		1.31	1.39	V
		I_{OUT} = 0.5 A, V_{IN} = V_{BIAS} (New Chip)		1.1	1.3	
I_{CL}	Output current limit	V_{OUT} = 80% × $V_{OUT(nom)}$ (Legacy Chip)	800		1350	mA
		V_{OUT} = 80% × $V_{OUT(nom)}$ (New Chip)	800		1350	
I_{BIAS}	BIAS pin current	(Legacy Chip)		1	2	mA
		(New Chip)		1	1.2	
I_{SHDN}	Shutdown supply current (I_{GND})	V_{EN} ≤ 0.4 V (Legacy Chip)		1	50	µA
		V_{EN} ≤ 0.4 V (New Chip)		1	10	
I_{FB}	Feedback pin current	(Legacy Chip)	–1	0.15	1	µA
		(New Chip)	–30	0.15	30	nA
PSRR	Power-supply rejection (V_{IN} to V_{OUT})	1 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (Legacy Chip)		60		dB
		1 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (New Chip)		76		
		300 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (Legacy Chip)		30		
		300 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (New CHip)		50		
	Power-supply rejection (V_{BIAS} to V_{OUT})	1 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (Legacy Chip)		50		
		1 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (New Chip)		59		
		300 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (Legacy Chip)		30		
		300 kHz, I_{OUT} = 0.5 A, V_{IN} = 1.8 V, V_{OUT} = 1.5 V (New Chip)		49		
V_n	Output noise voltage	BW = 100 Hz to 100 kHz, I_{OUT} = 0.5 A, C_{SS} = 1 nF (Legacy Device)		25 × V_{OUT}		µVrms
		BW = 100 Hz to 100 kHz, I_{OUT} = 0.5 A, C_{SS} = 1 nF (New Chip)		20 × V_{OUT}		

Copyright © 2023 Texas Instruments Incorporated

5.5 Electrical Characteristics（续）

at V_{EN} = 1.1 V, V_{IN} = V_{OUT} + 0.3 V, C_{BIAS} = 0.1 μF, C_{IN} = C_{OUT} = 10 μF, C_{NR} = 1 nF, I_{OUT} = 50 mA, V_{BIAS} = 5.0 V, and T_J = –40°C to 125°C (Legacy Chip) and T_J = –40°C to 150°C (New Chip), (unless otherwise noted); typical values are at T_J = 25°C

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{STR}	Minimum startup time	R_{LOAD} for I_{OUT} = 0.5 A, C_{SS} = open (Legacy Device)		200		μs
		R_{LOAD} for I_{OUT} = 0.5 A, C_{SS} = open (New Chip)		250		
I_{SS}	Soft-start charging current	V_{SS} = 0.4 V (Legacy Chip)		440		nA
		V_{SS} = 0.4 V (New Chip)		530		
$V_{EN(hi)}$	Enable input high level		1.1		5.5	V
$V_{EN(lo)}$	Enable input low level		0		0.4	V
$V_{EN(hys)}$	Enable pin hysteresis	(Legacy Chip)		50		mV
		(New Chip)		55		
$V_{EN(dg)}$	Enable pin deglitch time			20		μs
I_{EN}	Enable pin current	V_{EN} = 5 V (Legacy Chip)		0.1	1	μA
		V_{EN} = 5 V (New Chip)		0.1	0.3	
V_{IT}	PG trip threshold	V_{OUT} decreasing	85	90	94	$\%V_{OUT}$
V_{HYS}	PG trip hysteresis			3		$\%V_{OUT}$
$V_{PG(lo)}$	PG output low voltage	I_{PG} = 1 mA (sinking), V_{OUT} < V_{IT} (Legacy Chip)			0.3	V
		I_{PG} = 1 mA (sinking), V_{OUT} < V_{IT} (New Chip)			0.125	
$I_{PG(lkg)}$	PG leakage current	V_{PG} = 5.25 V, V_{OUT} > V_{IT} (Legacy Chip)		0.1	1	μA
		V_{PG} = 5.25 V, V_{OUT} > V_{IT} (New Chip)		0.1	0.05	
T_{SD}	Thermal shutdown temperature	Shutdown, temperature increasing		165		℃
		Reset, temperature decreasing		140		

(1) Adjustable devices tested at 0.8 V; resistor tolerance is not taken into account.
(2) Dropout is defined as the voltage from V_{IN} to V_{OUT} when V_{OUT} is 3% below nominal.
(3) 1.62 V is a test condition of this device and can be adjusted by referring to Figure 5-29.

Copyright © 2023 Texas Instruments Incorporated

5.6 Typical Characteristics: I_{OUT} = 50 mA

at T_J = 25°C, V_{IN} = $V_{OUT(TYP)}$ + 0.3 V, V_{BIAS} = 5 V, I_{OUT} = 50 mA, V_{EN} = V_{IN}, C_{IN} = 1 µF, C_{BIAS} = 4.7 µF, and C_{OUT} = 10 µF (unless otherwise noted)

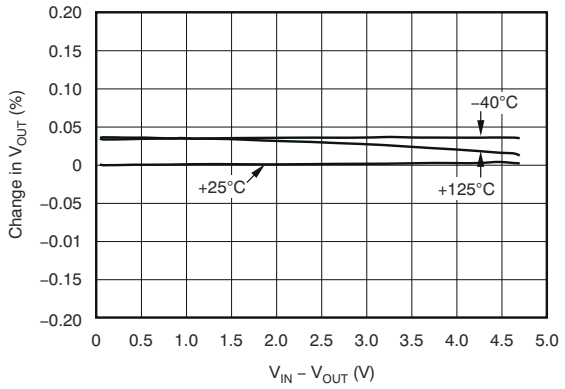

Legacy chip

图 5-1. V_{IN} Line Regulation

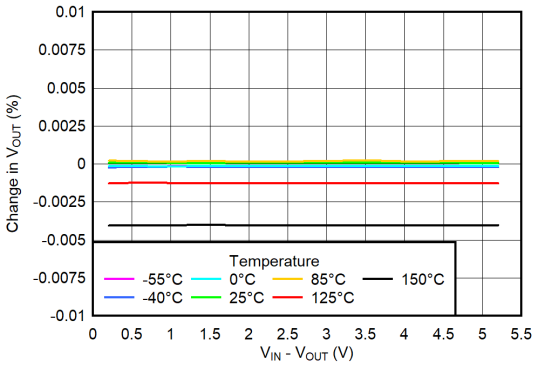

New chip

图 5-2. V_{IN} Line Regulation

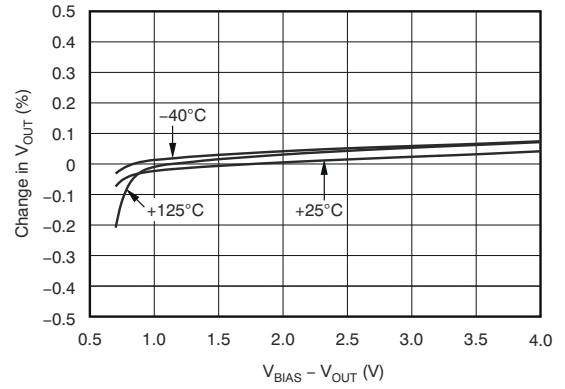

Legacy chip

图 5-3. V_{BIAS} Line Regulation

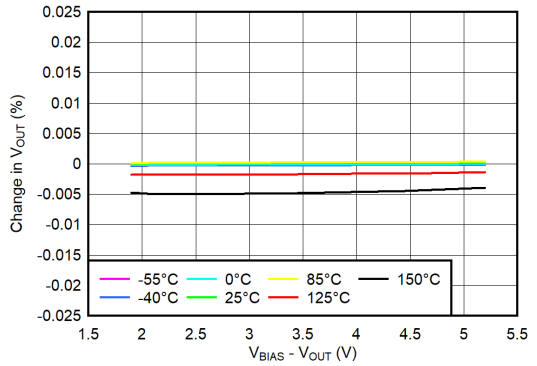

New chip

图 5-4. V_{BIAS} Line Regulation

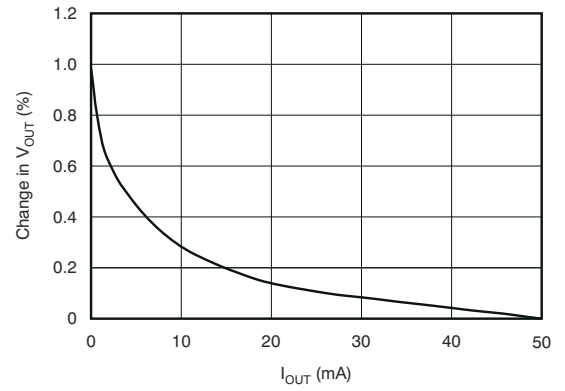

Legacy chip

图 5-5. Load Regulation at Light Load

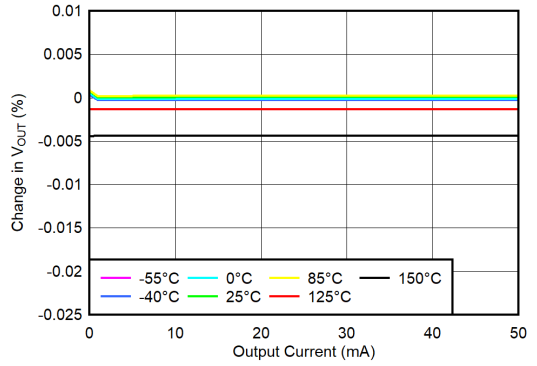

New chip

图 5-6. Load Regulation at Light Load

Copyright © 2023 Texas Instruments Incorporated

5.6 Typical Characteristics: I_{OUT} = 50 mA (continued)

at T_J = 25°C, V_{IN} = $V_{OUT(TYP)}$ + 0.3 V, V_{BIAS} = 5 V, I_{OUT} = 50 mA, V_{EN} = V_{IN}, C_{IN} = 1 µF, C_{BIAS} = 4.7 µF, and C_{OUT} = 10 µF (unless otherwise noted)

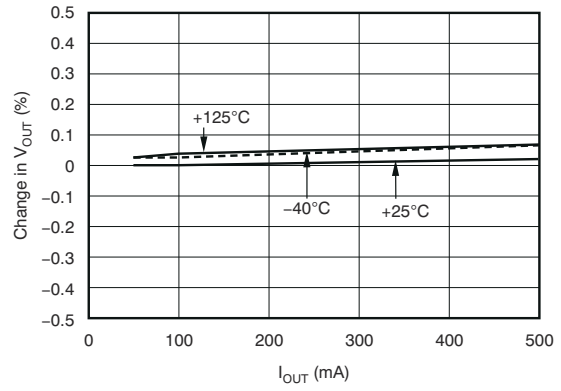

Legacy chip

图 5-7. Load Regulation

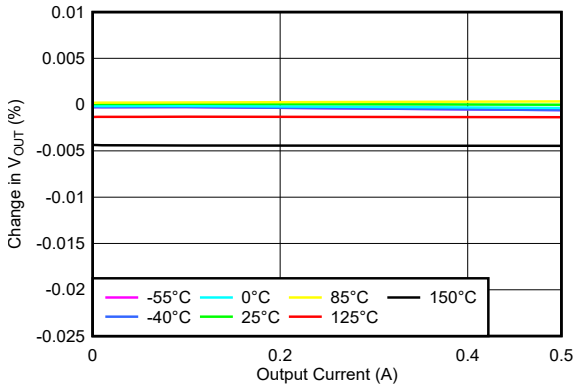

New chip

图 5-8. Load Regulation

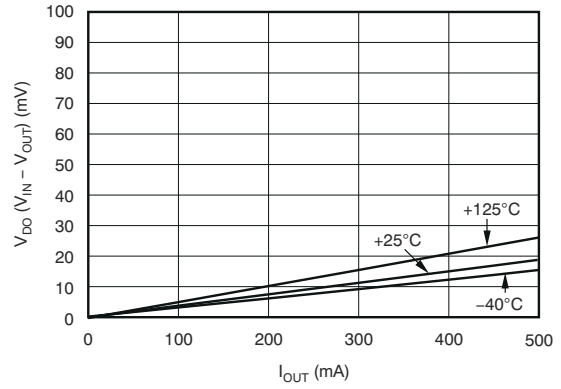

Legacy chip

图 5-9. Dropout Voltage vs I_{OUT} and Temperature (T_J)

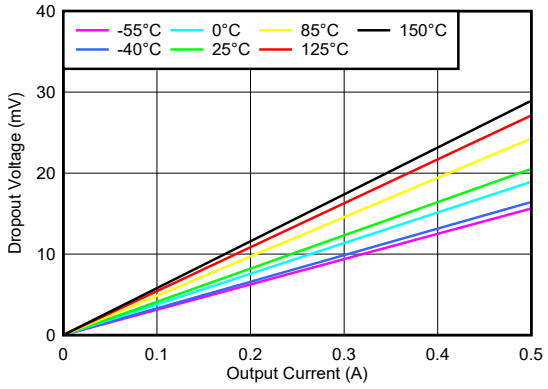

New chip

图 5-10. V_{IN} Dropout Voltage vs I_{OUT} and Temperature (T_J)

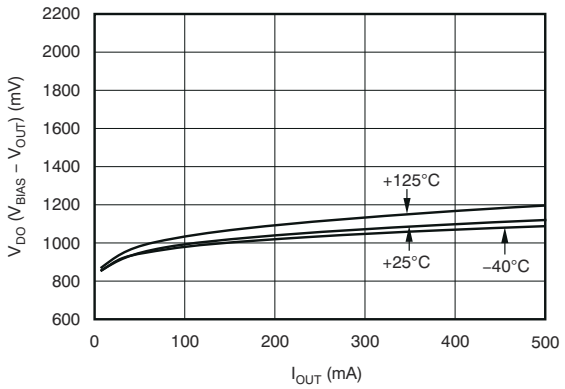

Legacy chip

图 5-11. V_{BIAS} Dropout Voltage vs I_{OUT} and Temperature (T_J)

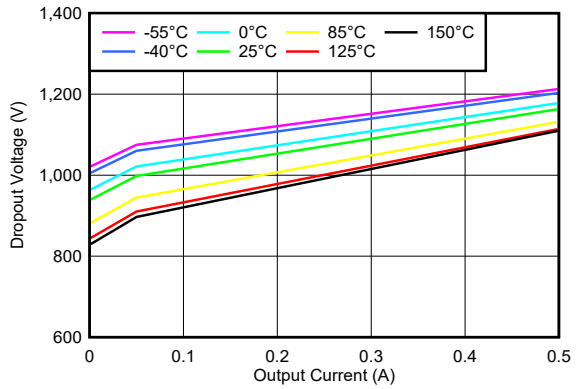

New chip

图 5-12. V_{BIAS} Dropout Voltage vs I_{OUT} and Temperature (T_J)

Copyright © 2023 Texas Instruments Incorporated

5.6 Typical Characteristics: I_{OUT} = 50 mA (continued)

at T_J = 25°C, V_{IN} = $V_{OUT(TYP)}$ + 0.3 V, V_{BIAS} = 5 V, I_{OUT} = 50 mA, V_{EN} = V_{IN}, C_{IN} = 1 μF, C_{BIAS} = 4.7 μF, and C_{OUT} = 10 μF (unless otherwise noted)

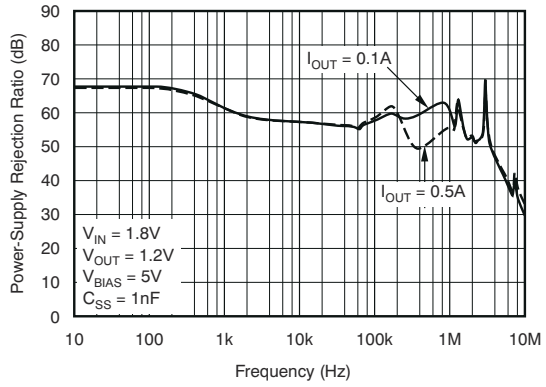

Legacy chip

图 5-13. V_{BIAS} PSRR vs Frequency

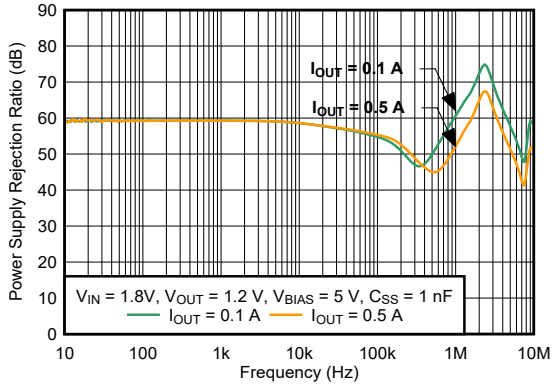

New chip

图 5-14. V_{BIAS} PSRR vs Frequency

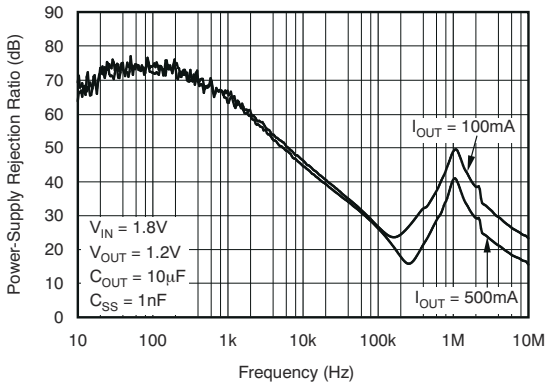

Legacy chip

图 5-15. V_{IN} PSRR vs Frequency

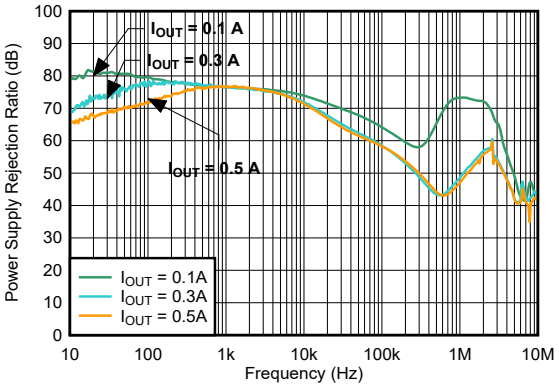

New chip

图 5-16. V_{IN} PSRR vs Frequency

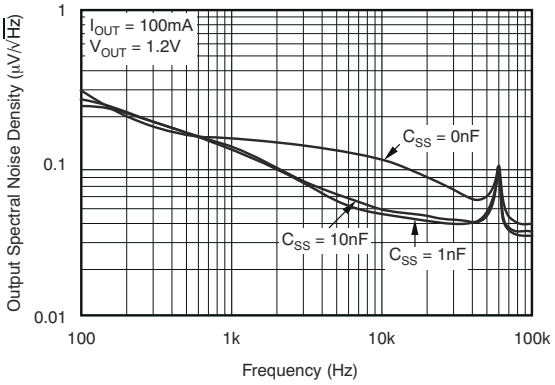

Legacy chip

图 5-17. Noise Spectral Density

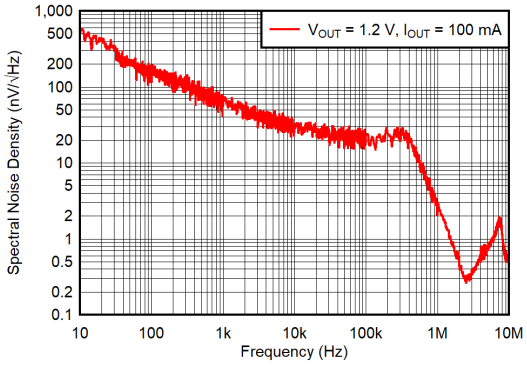

New chip

图 5-18. Noise Spectral Density

Copyright © 2023 Texas Instruments Incorporated

5.6 Typical Characteristics: I_{OUT} = 50 mA (continued)

at T_J = 25°C, V_{IN} = $V_{OUT(TYP)}$ + 0.3 V, V_{BIAS} = 5 V, I_{OUT} = 50 mA, V_{EN} = V_{IN}, C_{IN} = 1 µF, C_{BIAS} = 4.7 µF, and C_{OUT} = 10 µF (unless otherwise noted)

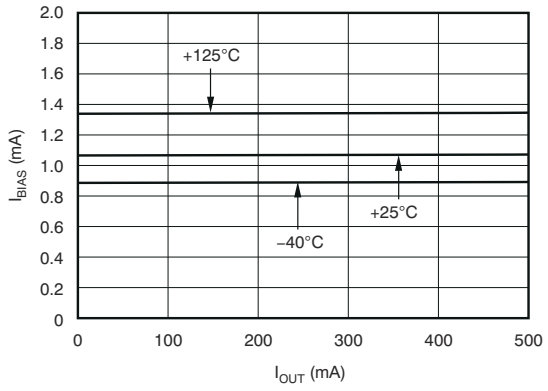

Legacy chip

图 5-19. BIAS Pin Current vs I_{OUT} and Temperature (T_J)

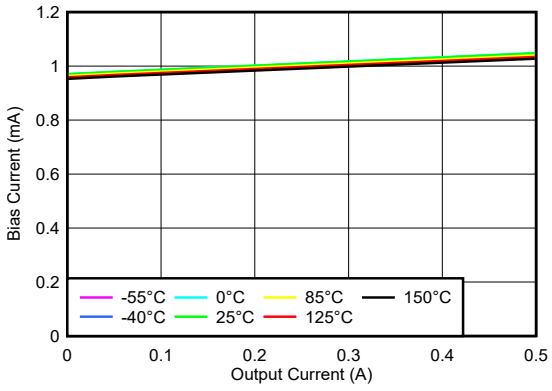

New chip

图 5-20. BIAS Pin Current vs Output Current and Temperature (T_J)

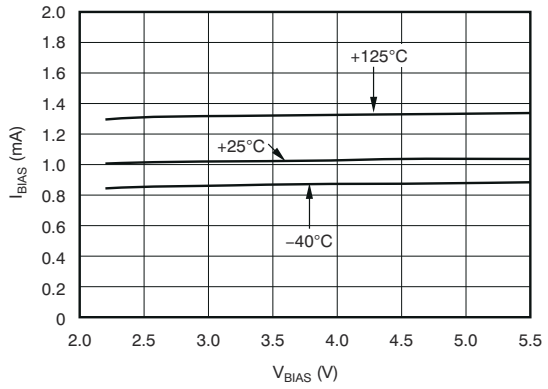

Legacy chip

图 5-21. BIAS Pin Current vs V_{BIAS} and Temperature (T_J)

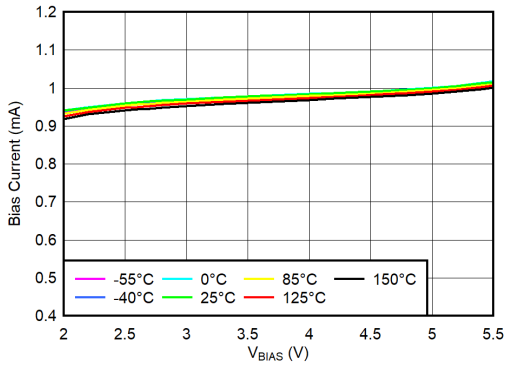

New chip

图 5-22. BIAS Pin Current vs V_{BIAS} and Temperature (T_J)

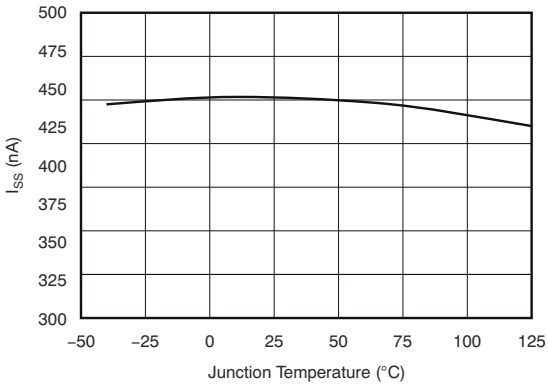

Legacy chip

图 5-23. Soft-Start Charging Current (I_{SS}) vs Temperature (T_J)

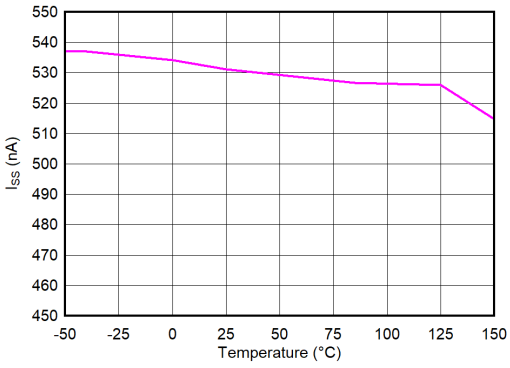

New chip

图 5-24. Soft-Start Charging Current (I_{SS}) vs Temperature (T_J)

Copyright © 2023 Texas Instruments Incorporated

5.6 Typical Characteristics: I_{OUT} = 50 mA (continued)

at T_J = 25°C, V_{IN} = $V_{OUT(TYP)}$ + 0.3 V, V_{BIAS} = 5 V, I_{OUT} = 50 mA, V_{EN} = V_{IN}, C_{IN} = 1 μF, C_{BIAS} = 4.7 μF, and C_{OUT} = 10 μF (unless otherwise noted)

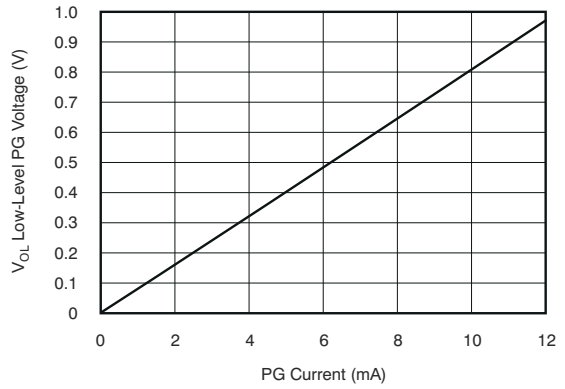

Legacy chip

图 5-25. Low-Level PG Voltage vs Current

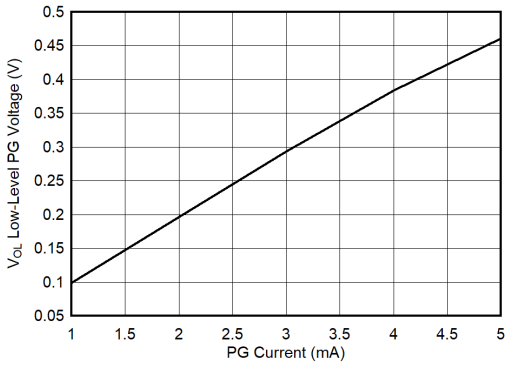

New chip

图 5-26. Low-Level PG Voltage vs Current

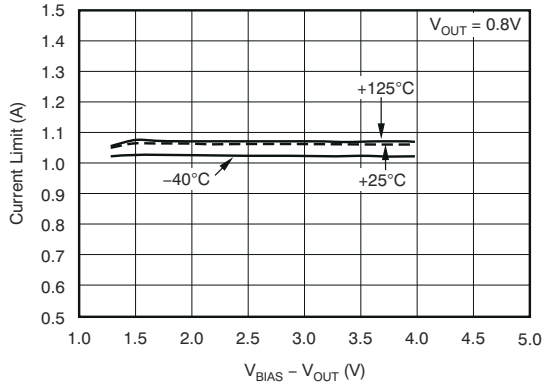

Legacy chip

图 5-27. Current Limit vs (V_{BIAS} – V_{OUT})

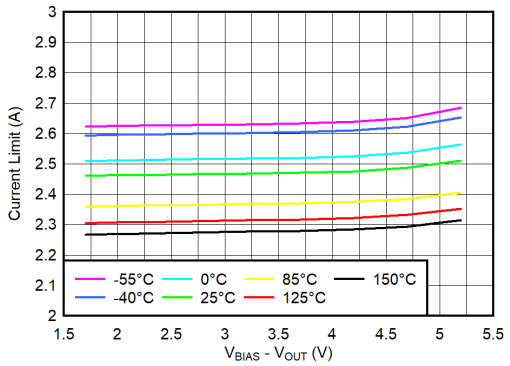

New chip

图 5-28. Current Limit vs (V_{BIAS} – V_{OUT})

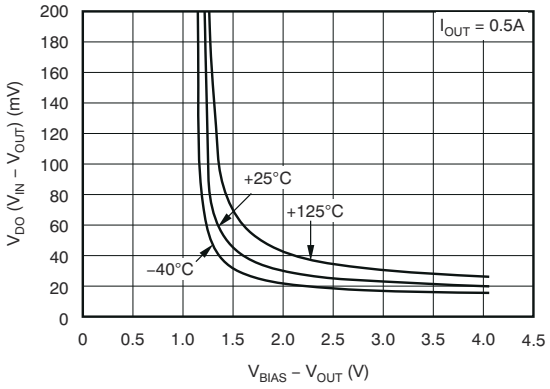

图 5-29. Dropout Voltage vs (V_{BIAS} – V_{OUT}) and Temperature (T_J)

Copyright © 2023 Texas Instruments Incorporated

5.7 Typical Characteristics: V_{EN} = V_{IN} = 1.8 V, V_{OUT} = 1.5 V

at T_J = 25°C, V_{IN} = $V_{OUT(TYP)}$ + 0.3 V, V_{BIAS} = 5 V, I_{OUT} = 50 mA, V_{EN} = V_{IN} = 1.8 V, V_{OUT} = 1.5 V, C_{IN} = 1 μF, C_{BIAS} = 4.7 μF, and C_{OUT} = 10 μF (unless otherwise noted)

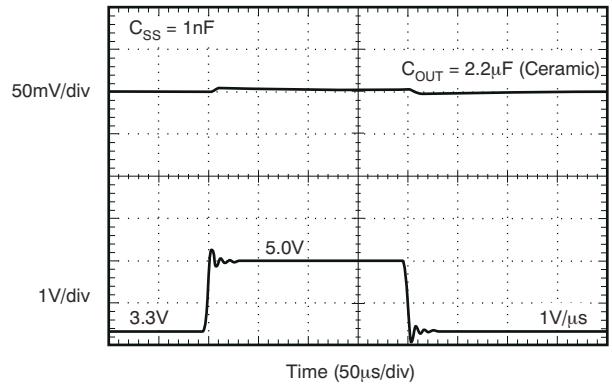

Legacy chip

图 5-30. V_{BIAS} Line Transient

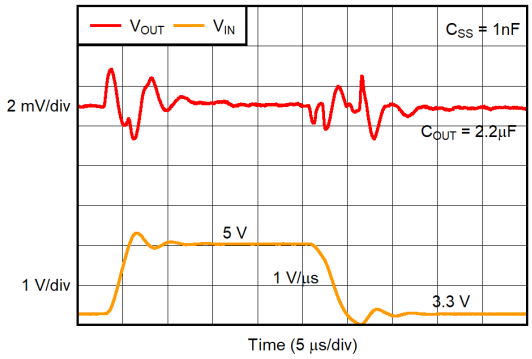

New chip

图 5-31. V_{BIAS} Line Transient

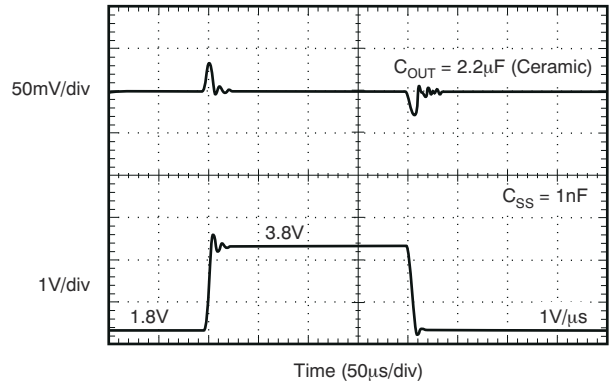

Legacy chip

图 5-32. V_{IN} Line Transient

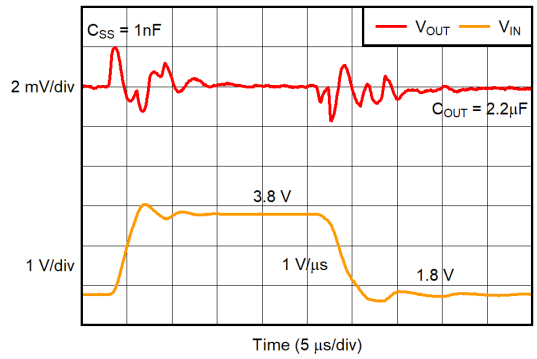

New chip

图 5-33. V_{IN} Line Transient

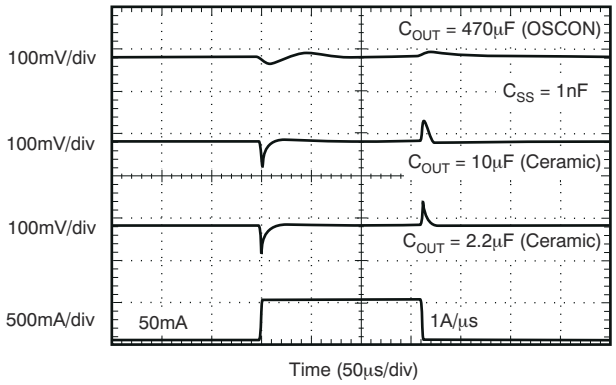

Legacy chip

图 5-34. Output Load Transient Response

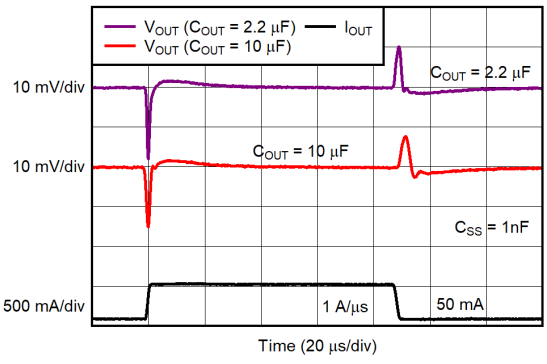

New chip

图 5-35. Output Load Transient Response

Copyright © 2023 Texas Instruments Incorporated

5.7 Typical Characteristics: V_{EN} = V_{IN} = 1.8 V, V_{OUT} = 1.5 V (continued)

at T_J = 25°C, V_{IN} = $V_{OUT(TYP)}$ + 0.3 V, V_{BIAS} = 5 V, I_{OUT} = 50 mA, V_{EN} = V_{IN} = 1.8 V, V_{OUT} = 1.5 V, C_{IN} = 1 μF, C_{BIAS} = 4.7 μF, and C_{OUT} = 10 μF (unless otherwise noted)

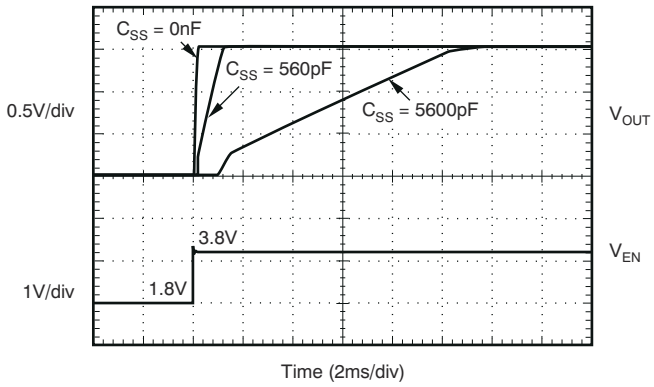

Legacy chip

图 5-36. Turn-On Response

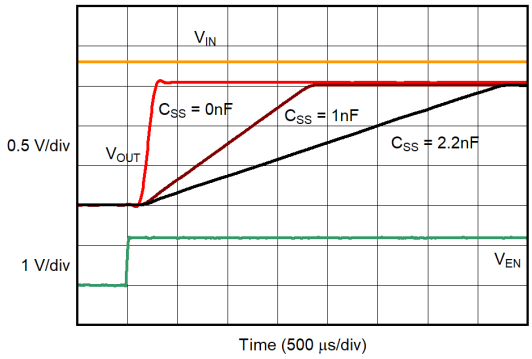

New chip

图 5-37. Turn-On Response

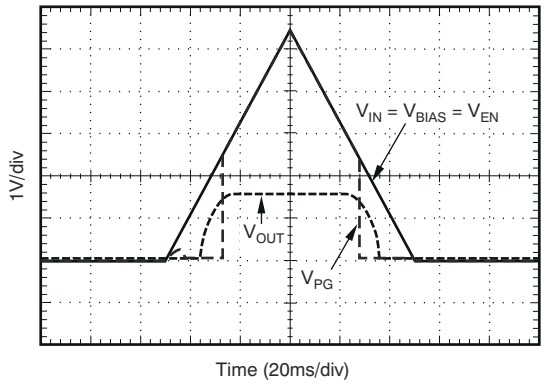

Legacy chip

图 5-38. Power-Up and Power-Down

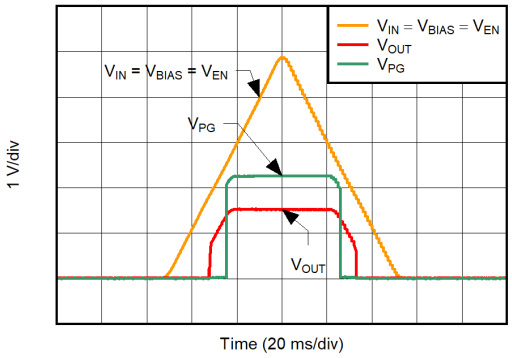

New chip

图 5-39. Power-Up and Power-Down

Copyright © 2023 Texas Instruments Incorporated

6 Detailed Description

6.1 Overview

The TPS74701-Q1 is a low-dropout regulator that features soft-start capability. This regulator use a low current bias input to power all internal control circuitry, allowing the NMOS pass transistor to regulate very low input and output voltages.

The use of an NMOS-pass transistor offers several critical advantages for many applications. Unlike a PMOS topology device, the output capacitor has little effect on loop stability. This architecture allows the TPS74701 to be stable with any capacitor type of value 2.2 µF or greater. Transient response is also superior to PMOS topologies, particularly for low VIN applications.

The TPS74701-Q1 features a programmable voltage-controlled soft-start circuit that provides a smooth, monotonic start-up and limits start-up inrush currents that may be caused by large capacitive loads. A power-good (PG) output is available to allow supply monitoring and sequencing of other supplies. An enable (EN) pin with hysteresis and deglitch allows slow-ramping signals to be used for sequencing the device. The low VIN and VOUT capability allows for inexpensive, easy-to-design, and efficient linear regulation between the multiple supply voltages often present in processor-intensive systems.

6.2 Functional Block Diagram

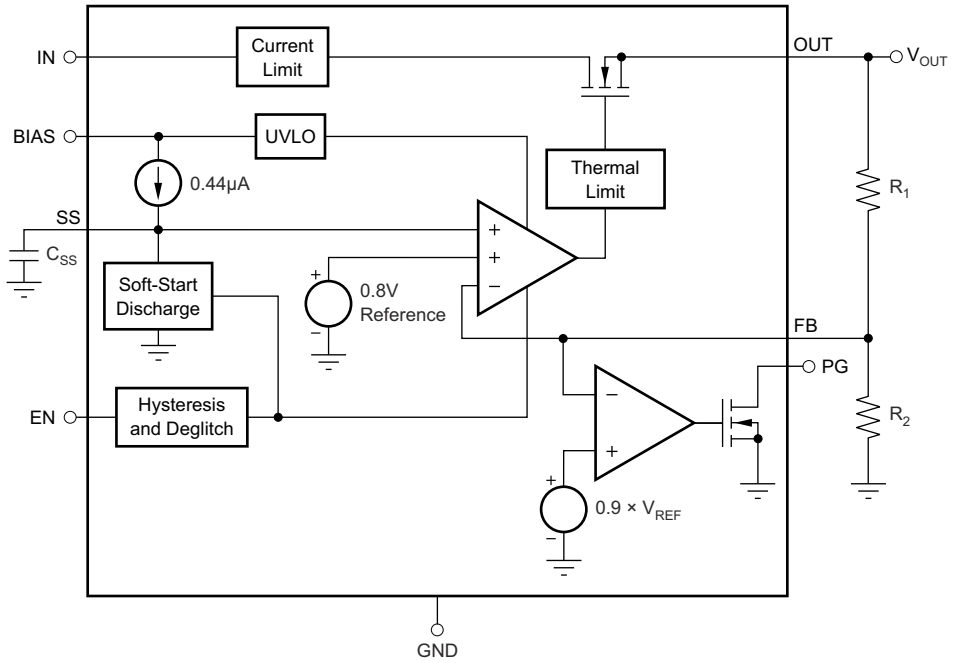

6.3 Feature Description

6.3.1 Transient Response

The TPS74701-Q1 is designed to have excellent transient response for most applications with a small amount of output capacitance. In some cases, the transient response can be limited by the transient response of the input supply. This limitation is especially true in applications where the difference between the input and output is less than 300 mV. In this case, adding additional input capacitance improves the transient response much more than just adding additional output capacitance does. With a solid input supply, adding additional output capacitance reduces undershoot and overshoot during a transient event; see 图 5-34 and 图 5-34. Because the TPS74701-Q1 is stable with output capacitors as low as 2.2 µF, many applications can then need very little capacitance at the LDO output. For these applications, local bypass capacitance for the powered device can be sufficient to meet the transient requirements of the application. This design reduces the total solution cost by avoiding the need to use expensive, high-value capacitors at the LDO output.

Copyright © 2023 Texas Instruments Incorporated

6.3.2 Dropout Voltage

The TPS74701-Q1 offers very low dropout performance, making the device designed for high-current, low V_{IN}, low V_{OUT} applications. The low dropout of the TPS74701-Q1 allows the device to be used in place of a DC/DC converter and still achieve good efficiency. This feature provides designers with the power architecture for their applications to achieve the smallest, simplest, and lowest cost solution.

There are two different specifications for dropout voltage with the TPS74701-Q1. The first specification (shown in 图 6-1) is referred to as *V_{IN} dropout* and is used when an external bias voltage is applied to achieve low dropout. This specification assumes that V_{BIAS} is at least 1.62 V above V_{OUT}, which is the case for V_{BIAS} when powered by a 3.3-V rail with 5% tolerance and with V_{OUT} = 1.5 V. If V_{BIAS} is higher than V_{OUT} + 1.62 V, V_{IN} dropout is less than specified.

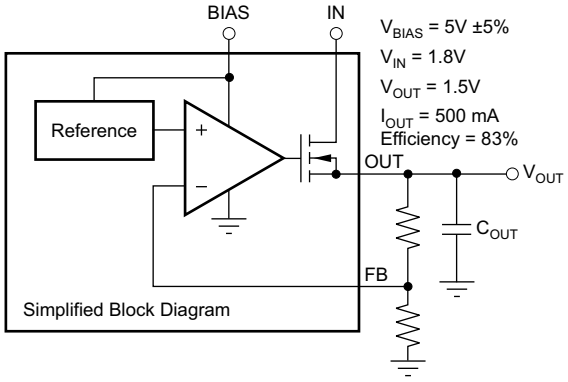

图 6-1. Typical Application of the TPS74701-Q1 Using an Auxiliary Bias Rail

The second specification (shown in 图 6-2) is referred to as *V_{BIAS} dropout* and applies to applications where IN and BIAS are tied together. This option allows the device to be used in applications where an auxiliary bias voltage is not available or low dropout is not required. Dropout is limited by BIAS in these applications because V_{BIAS} provides the gate drive to the pass transistor; therefore, V_{BIAS} must be 1.39 V above V_{OUT} for the legacy chip or 1.3 V for the new chip[1]. Because of this usage, IN and BIAS tied together easily consume huge power. Pay attention not to exceed the power rating of the device package.

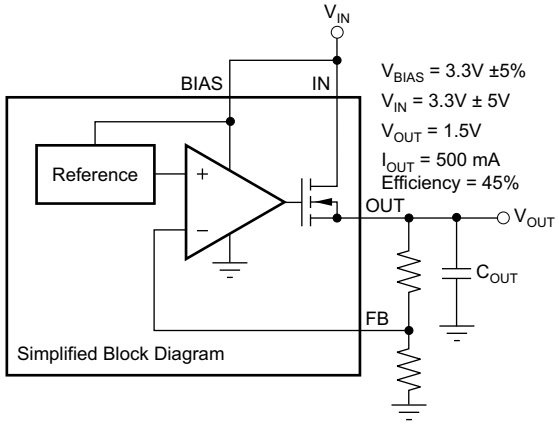

图 6-2. Typical Application of the TPS74701-Q1 Without an Auxiliary Bias Rail

[1] See the *Device Nomenclature* and *Electrical Characteristics* for more information regarding the legacy chip and new chip

Copyright © 2023 Texas Instruments Incorporated

6.3.3 Output Noise

The TPS74701-Q1 provides low output noise when a soft-start capacitor is used. When the device reaches the end of the soft-start cycle, the soft-start capacitor serves as a filter for the internal reference. By using a 0.001-µF soft-start capacitor, the output noise is reduced by half and is typically 30 μV_{RMS} for a 1.2-V output (10 Hz to 100 kHz) for the legacy chip and 24 μV_{RMS} for a 1.2-V output (10 Hz to 100 kHz) with the new chip. Further increasing C_{SS} has little effect on noise. Because most of the output noise is generated by the internal reference, the noise is a function of the set output voltage. The RMS noise with a 0.001-µF soft-start capacitor is given in the following equations:

$$V_N = 25\left(\frac{\mu V_{RMS}}{V}\right) \times V_{OUT}\left(V\right) \text{(Legacy Chip)} \quad (1)$$

$$V_N = 20\left(\frac{\mu V_{RMS}}{V}\right) \times V_{OUT}\left(V\right) \text{(New Chip)} \quad (2)$$

The low output noise of the TPS74701-Q1 makes the device a good choice for powering transceivers, PLLs, or other noise-sensitive circuitry.

6.3.4 Enable and Shutdown

The enable (EN) pin is active high and is compatible with standard digital signaling levels. V_{EN} below 0.4 V turns the regulator off, while V_{EN} above 1.1 V turns the regulator on. Unlike many regulators, the enable circuitry has hysteresis and deglitching for use with relatively slowly ramping analog signals. This configuration allows the TPS74701-Q1 to be enabled by connecting the output of another supply to the EN pin. The enable circuitry typically has 50 mV of hysteresis and a deglitch circuit to help avoid on and off cycling as a result of small glitches in the V_{EN} signal.

The enable threshold is typically 0.8 V and varies with temperature and process variations. Temperature variation is approximately –1 mV/°C; process variation accounts for most of the rest of the variation to the 0.4-V and 1.1-V limits. If precise turn-on timing is required, a fast rise-time signal must be used to enable the TPS74701-Q1.

If not used, EN can be connected to either IN or BIAS. If EN is connected to IN, connect this pin as close as possible to the largest capacitance on the input to prevent voltage droops on that line from triggering the enable circuit.

6.3.5 Power Good

The power-good (PG) pin is an open-drain output and can be connected to any 5.5 V or lower rail through an external pullup resistor. This pin requires at least 1.1 V on V_{BIAS} to have a valid output. The PG output is high-impedance when V_{OUT} is greater than V_{IT} + V_{HYS}. If V_{OUT} drops below V_{IT} or if V_{BIAS} drops below 1.9 V, the open-drain output turns on and pulls the PG output low. The PG pin also asserts when the device is disabled. The recommended operating condition of the PG pin sink current is up to 1 mA, so the pullup resistor for PG must be in the range of 10 kΩ to 1 MΩ. If output voltage monitoring is not needed, the PG pin can be left floating.

6.3.6 Internal Current Limit

The TPS74701-Q1 features a factory-trimmed, accurate current limit that is flat over temperature and supply voltage. The current limit allows the device to supply surges of up to 1 A and maintain regulation. The current limit responds in approximately 10 µs to reduce the current during a short-circuit fault.

The internal current limit protection circuitry of the TPS74701-Q1 is designed to protect against overload conditions. This circuitry is not intended to allow operation above the rated current of the device. Continuously running the TPS74701-Q1 above the rated current degrades device reliability.

Copyright © 2023 Texas Instruments Incorporated

6.3.7 Thermal Protection

Thermal protection disables the output when the junction temperature rises to approximately 160°C, allowing the device to cool. When the junction temperature cools to approximately 140°C, the output circuitry is enabled. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit can cycle on and off. This cycling limits the dissipation of the regulator, protecting the regulator from damage as a result of overheating.

Activation of the thermal protection circuit indicates excessive power dissipation or inadequate heat sinking. For reliable operation, limit junction temperature to 125°C maximum. To estimate the margin of safety in a complete design (including heat sink), increase the ambient temperature until thermal protection is triggered; use worst-case loads and signal conditions. For good reliability, thermal protection must trigger at least 40°C above the maximum expected ambient condition of the application. This condition produces a worst-case junction temperature of 125°C at the highest expected ambient temperature and worst-case load.

The internal protection circuitry of the TPS74701-Q1 is designed to protect against overload conditions. This circuitry is not intended to replace proper heat sinking. Continuously running the TPS74701-Q1 into thermal shutdown degrades device reliability.

6.4 Device Functional Modes

6.4.1 Normal Operation

The device regulates to the nominal output voltage under the following conditions:

- The input voltage and bias voltage are both at least at the respective minimum specifications
- The enable voltage has previously exceeded the enable rising threshold voltage and has not decreased below the enable falling threshold
- The output current is less than the current limit
- The device junction temperature is less than the maximum specified junction temperature

6.4.2 Dropout Operation

If the input voltage is lower than the nominal output voltage plus the specified dropout voltage, but all other conditions are met for normal operation, the device operates in dropout mode. In this condition, the output voltage is the same as the input voltage minus the dropout voltage. The transient performance of the device is significantly degraded because the pass transistor is in a triode state and no longer controls the current through the LDO. Line or load transients in dropout can result in large output voltage deviations.

6.4.3 Disabled

The device is disabled under the following conditions:

- The input or bias voltages are below the respective minimum specifications.
- The enable voltage is less than the enable falling threshold voltage or has not yet exceeded the enable rising threshold.
- The device junction temperature is greater than the thermal shutdown temperature.

表 6-1 shows the conditions that lead to the different modes of operation.

表 6-1. Device Functional Mode Comparison

OPERATING MODE	PARAMETER				
	V_{IN}	V_{EN}	V_{BIAS}	I_{OUT}	T_J
Normal mode	$V_{IN} > V_{OUT(nom)} + V_{DO}$ (VIN)	$V_{EN} > V_{EN, HI}$	$V_{BIAS} \geqslant V_{OUT} + 1.39$ V	$I_{OUT} < I_{CL}$	$T_J < 125°C$
Dropout mode	$V_{IN} < V_{OUT(nom)} + V_{DO}$ (VIN)	$V_{EN} > V_{EN, HI}$	$V_{BIAS} < V_{OUT} + 1.39$ V	—	$T_J < 125°C$
Disabled mode (any true condition the device)	$V_{IN} < V_{IN(min)}$	$V_{EN} < V_{EN, LO}$	$V_{BIAS} < V_{BIAS(min)}$	—	$T_J > 165°C$

Copyright © 2023 Texas Instruments Incorporated

7 Application and Implementation

备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客 户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

7.1 Application Information

The TPS74701-Q1 is a 500-mA low-dropout regulator with soft-start function integrated. Based on the end-application, different output voltage could be achieved with different values of external components.

7.2 Typical Application

图 7-1 shows the typical application circuit for the TPS74701-Q1 adjustable output device.

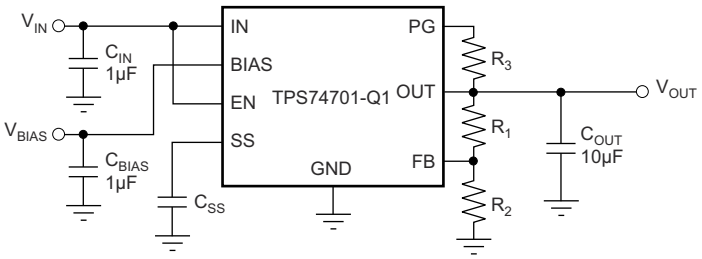

$$V_{OUT} = 0.8 \times \left(1 + \frac{R_1}{R_2}\right)$$

图 7-1. Typical Application Circuit for the TPS74701-Q1

R_1 and R_2 can be calculated for any output voltage using the formula shown in 图 7-1. See 表 7-2 for sample resistor values of common output voltages. To achieve the maximum accuracy specifications, R_2 must be less than or equal to 4.99 kΩ.

7.2.1 Design Requirements

For this design example, use the parameters in 表 7-1.

表 7-1. Design Parameters

PARAMETER	EXAMPLE VALUE
Input voltage	1.8 V ± 10%
Output voltage	1.5 V ± 3%
Enable voltage	1.8 V ± 10%
BIAS voltage	3.3 V ± 10%
Output current	500 mA
Output capacitor	10 µF
Start-up time	<2 ms

7.2.2 Detailed Design Procedure

1. Select R_1 and R_2 based on the required output voltage. 表 7-2 gives example calculations for many common output voltages.
2. Select C_{SS} to be the highest capacitance while still achieving the desired start-up time. 表 7-3 gives examples of this calculation. 图 7-3 gives examples of turn-on response with different C_{SS} capacitor value.

Copyright © 2023 Texas Instruments Incorporated

3. Select a minimum of a 2.2-µF ceramic output capacitor. Increased output capacitance helps the output load transient response. 图 7-4 gives examples of the load transient response with different output capacitor values and types.

7.2.2.1 Input, Output, and Bias Capacitor Requirements

The device is designed to be stable for all available types and values of output capacitors greater than or equal to 2.2 µF. The device is also stable with multiple capacitors in parallel, which can be of any type or value.

The capacitance required on the IN and BIAS pins strongly depends on the input supply source impedance. To counteract any inductance in the input, the minimum recommended capacitor for V_{IN} and V_{BIAS} is 1 µF. If V_{IN} and V_{BIAS} are connected to the same supply, the recommended minimum capacitor for V_{BIAS} is 4.7 µF. Good-quality, low-ESR capacitors must be used on the input; ceramic X5R and X7R capacitors are preferred. These capacitors must be placed as close the pins as possible for optimum performance.

表 7-2. Standard 1% Resistor Values for Programming the Output Voltage(1)

R_1 (kΩ)	R_2 (kΩ)	V_{OUT} (V)
Short	Open	0.8
0.619	4.99	0.9
1.13	4.53	1
1.37	4.42	1.05
1.87	4.99	1.1
2.49	4.99	1.2
4.12	4.75	1.5
3.57	2.87	1.8
3.57	1.69	2.5
3.57	1.15	3.3

(1) $$V_{OUT} = 0.8\,x\left(1 + \frac{R_1}{R_2}\right).$$

表 7-3. Standard Capacitor Values for Programming the Soft-Start Time(1)

C_{SS}	SOFT-START TIME (Legacy Chip)	SOFT-START TIME (New Chip)
Open	0.1 ms	0.25 ms
270 pF	0.5 ms	0.4 ms
560 pF	1 ms	0.8 ms
2.7 nF	5 ms	4.1 ms
5.6 nF	10 ms	8.5 ms
0.01 µF	18 ms	15 ms

(1) $$t_{SS}(s) = \frac{0.8 \times C_{SS}(F)}{I_{SS}(A)}$$

7.2.2.2 Programmable Soft-Start

The TPS74701-Q1 features a programmable, monotonic, voltage-controlled soft-start that is set with an external capacitor (C_{SS}). This feature is important for many applications because this capacitor eliminates power-up initialization problems when powering FPGAs, DSPs, or other processors. The controlled voltage ramp of the output also reduces peak inrush current during start-up, minimizing start-up transient events to the input power bus.

To achieve a linear and monotonic soft start, the TPS74701-Q1 error amplifier tracks the voltage ramp of the external soft-start capacitor until the voltage exceeds the internal reference. The soft-start ramp time depends on the soft-start charging current (I_{SS}), soft-start capacitance (C_{SS}), and the internal reference voltage (V_{REF}), and can be calculated using 方程式 3:

Copyright © 2023 Texas Instruments Incorporated

$$t_{SS} = \frac{(V_{REF} \times C_{SS})}{I_{SS}} \quad (3)$$

If large output capacitors are used, the device current limit (I_{CL}) and the output capacitor can set the start-up time. In this case, the start-up time is given by 方程式 4:

$$t_{SSCL} = \frac{(V_{OUT(NOM)} \times C_{OUT})}{I_{CL(MIN)}} \quad (4)$$

where:

- $V_{OUT(NOM)}$ is the nominal output voltage
- C_{OUT} is the output capacitance
- $I_{CL(MIN)}$ is the minimum current limit for the device

In applications where monotonic start-up is required, the soft-start time given by 方程式 3 must be set greater than 方程式 4.

The maximum recommended soft-start capacitor is 0.015 µF. Larger soft-start capacitors can be used and do not damage the device; however, the soft-start capacitor discharge circuit can possibly be unable to fully discharge the soft-start capacitor when enabled. Soft-start capacitors larger than 0.015 µF can be a problem in applications where the enable pin must be rapidly pulsed and still require the device to soft-start from ground. C_{SS} must be low-leakage; X7R, X5R, or C0G dielectric materials are preferred. See 表 7-3 for suggested soft-start capacitor values.

7.2.2.3 Sequencing Requirements

V_{IN}, V_{BIAS}, and V_{EN} can be sequenced in any order without causing damage to the device. However, for the soft-start function to work as intended, certain sequencing rules must be applied. Connecting EN to IN is acceptable for most applications, as long as V_{IN} is greater than 1.1 V and the ramp rate of V_{IN} and V_{BIAS} is faster than the set soft-start ramp rate. If the ramp rate of the input sources is slower than the set soft-start time, the output tracks the slower supply minus the dropout voltage until reaching the set output voltage. If EN is connected to BIAS, the device soft-starts as programmed, provided that V_{IN} is present before V_{BIAS}. If V_{BIAS} and V_{EN} are present before V_{IN} is applied and the set soft-start time has expired, then V_{OUT} tracks V_{IN}. If the soft-start time has not expired, the output tracks V_{IN} until V_{OUT} reaches the value set by the charging soft-start capacitor. 图 7-2 shows the use of an RC delay circuit to hold off V_{EN} until V_{BIAS} has ramped. This technique can also be used to drive EN from V_{IN}. An external control signal can also be used to enable the device after V_{IN} and V_{BIAS} are present.

备注

When V_{BIAS} and V_{EN} are present and V_{IN} is not supplied, this device outputs approximately 50 µA of current from OUT. Although this condition does not cause any damage to the device, the output current can charge up the OUT node if total resistance between OUT and GND (including external feedback resistors) is greater than 10 kΩ.

Copyright © 2023 Texas Instruments Incorporated

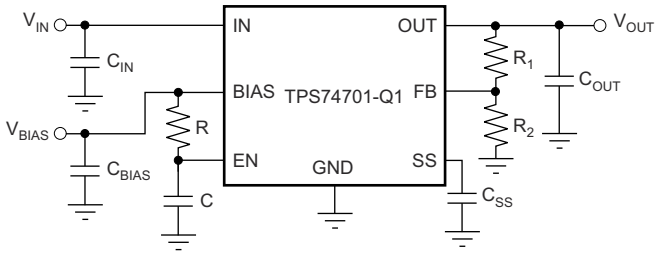

图 7-2. Soft-Start Delay Using an RC Circuit to Enable the Device

7.2.3 Application Curves

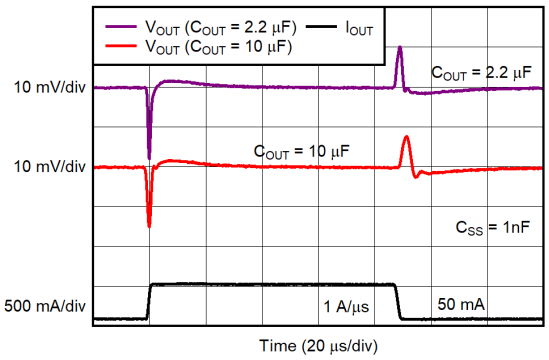

图 7-3. Output Load Transient Response

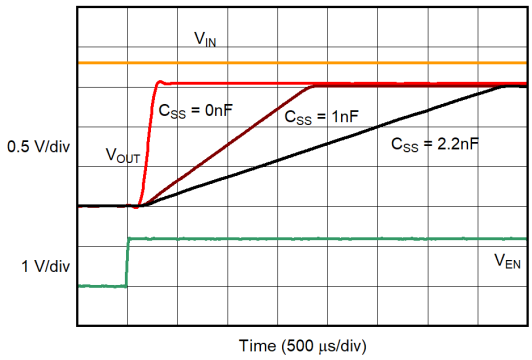

图 7-4. Turn-On Response

7.3 Power Supply Recommendations

The TPS74701-Q1 is designed to operate from an input voltage up to 5.5 V, provided the bias rail is at least 1.39 V higher than the input supply and dropout requirements are met. The bias rail and the input supply must both provide adequate headroom and current for the device to operate normally.

Connect a low-output impedance power supply directly to the IN pin of the TPS74701. This supply must have at least 1 µF of capacitance near the IN pin for optimal performance. A supply with similar requirements must also be connected directly to the bias rail with a separate 1 µF or larger capacitor. If the IN pin is tied to the bias pin, a minimum 4.7 µF of capacitance is needed for performance. To increase the overall PSRR of the solution at higher frequencies, use a pi-filter or ferrite bead before the input capacitor.

7.4 Layout

7.4.1 Layout Guidelines

7.4.1.1 Layout Recommendations and Power Dissipation

An optimal layout can greatly improve transient performance, PSRR, and noise. To minimize the voltage drop on the input of the device during load transients, the capacitance on IN and BIAS must be connected as close as possible to the device. This capacitance also minimizes the effects of parasitic inductance and resistance of the input source and can, therefore, improve stability. To achieve optimal transient performance and accuracy, the top side of R_1 in 图 7-1 must be connected as close as possible to the load. If BIAS is connected to IN, connect BIAS as close to the sense point of the input supply as possible. This connection minimizes the voltage drop on BIAS during transient conditions and can improve the turn-on response.

Knowing the device power dissipation and proper sizing of the thermal plane that is connected to the thermal pad is critical to avoiding thermal shutdown and to provide reliable operation. Power dissipation of the device depends on input voltage and load conditions and can be calculated using 方程式 5:

Copyright © 2023 Texas Instruments Incorporated

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} \quad (5)$$

Power dissipation can be minimized and greater efficiency can be achieved by using the lowest possible input voltage necessary to achieve the required output voltage regulation.

The primary conduction path for heat is through the exposed pad to the printed circuit board (PCB). The pad can be connected to ground or be left floating; however, the pad must be attached to an appropriate amount of copper PCB area to make sure the device does not overheat. The maximum junction-to-ambient thermal resistance depends on the maximum ambient temperature, maximum device junction temperature, and power dissipation of the device and can be calculated using 方程式 6:

$$R_{\theta JA} = \frac{(150°C - T_A)}{P_D} \quad (6)$$

Knowing the maximum $R_{\theta JA}$, the minimum amount of PCB copper area needed for appropriate heat sinking can be estimated using 图 7-5.

图 7-5 shows the variation of $R_{\theta JA}$ as a function of ground plane copper area in the board. This figure is intended only as a guideline to demonstrate the effects of heat spreading in the ground plane and is not intended to be used to estimate actual thermal performance in real application environments.

备注

When the device is mounted on an application PCB, use Ψ_{JT} and Ψ_{JB}, as explained in the *Estimating Junction Temperature* section.

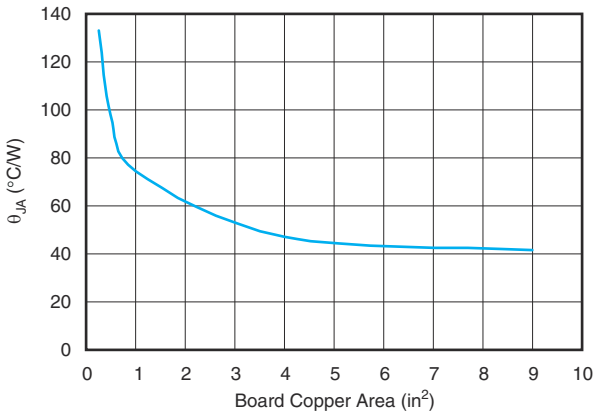

$R_{\theta JA}$ value at board size of 9 in^2 (that is, 3-in × 3-in) is a JEDEC standard.

图 7-5. $R_{\theta JA}$ vs Board Size

7.4.1.2 Estimating Junction Temperature

Using the thermal metrics Ψ_{JT} and Ψ_{JB}, as shown in the *Thermal Information* table, the junction temperature can be estimated with corresponding formulas (given in 方程式 7). For backwards compatibility, an older *$R_{\theta JC}$,Top* parameter is listed as well.

$$\Psi_{JT}: \quad T_J = T_T + \Psi_{JT} \bullet P_D$$
$$\Psi_{JB}: \quad T_J = T_B + \Psi_{JB} \bullet P_D \quad (7)$$

Copyright © 2023 Texas Instruments Incorporated

Where P_D is the power dissipation shown by 方程式 7, T_T is the temperature at the center-top of the device package, and T_B is the PCB temperature measured 1 mm away from the device package *on the PCB surface* (see 图 7-7).

备注

Both T_T and T_B can be measured on actual application boards using a thermo-gun (an infrared thermometer).

For more information about measuring T_T and T_B, see the *Using New Thermal Metrics* application note, available for download at www.ti.com.

In reference to 图 7-6, the new thermal metrics (Ψ_{JT} and Ψ_{JB}) have very little dependency on board size. That is, using Ψ_{JT} or Ψ_{JB} with 方程式 7 is a good way to estimate T_J by simply measuring T_T or T_B, regardless of the application board size.

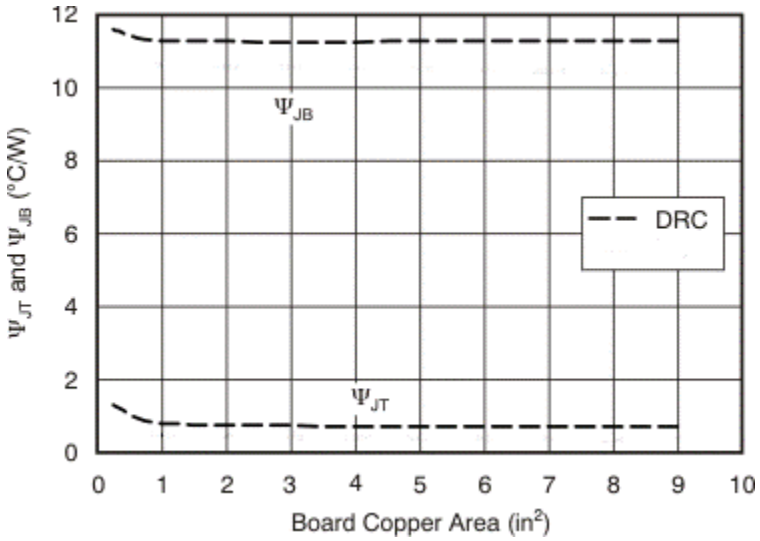

图 7-6. Ψ_{JT} and Ψ_{JB} vs Board Size

For a more detailed discussion of why TI does not recommend using $R_{\theta JC(top)}$ to determine thermal characteristics, see the *Using New Thermal Metrics* application note, available for download at www.ti.com. For further information, see the *Semiconductor and IC Package Thermal Metrics* application note, also available on the TI website.

Copyright © 2023 Texas Instruments Incorporated

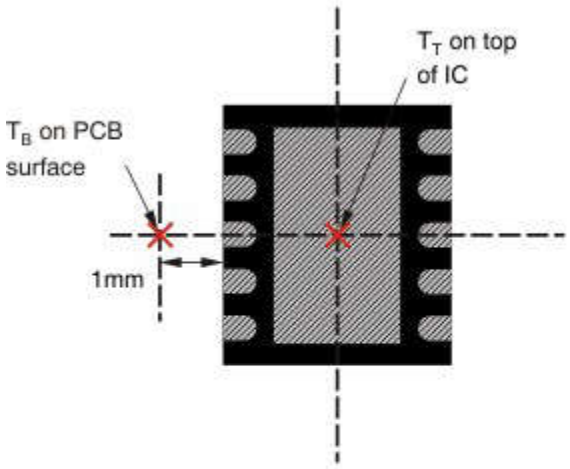

(a) Example DRC (SON) Package Measurement

A. T_T is measured at the center of both the X- and Y-dimensional axes.
B. T_B is measured *below* the package lead on the PCB surface.

图 7-7. Measuring Points for T_T and T_B

7.4.2 Layout Example

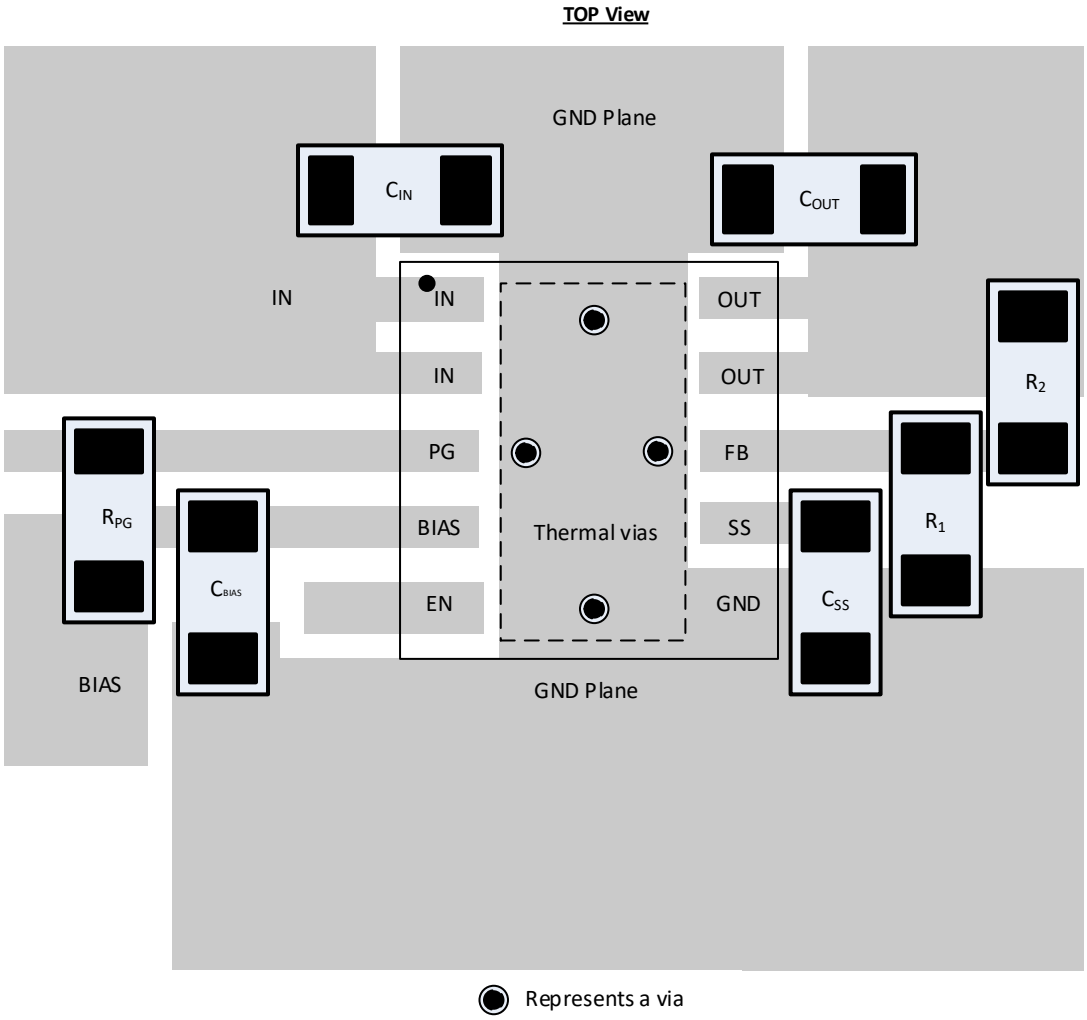

图 7-8. Layout Example: DRC Package

Copyright © 2023 Texas Instruments Incorporated

8 Device and Documentation Support

8.1 Device Support

8.1.1 Development Support

For development support, see the following:

- Texas Instruments, *TPS74801-Q1 1.5 A Low-Dropout Linear Regulator with Programmable Soft-Start* data sheet
- Texas Instruments, *TI PCB Thermal Calculator*

8.1.2 Device Nomenclature

表 8-1. Device Nomenclature

PRODUCT(1)	DESCRIPTION
TPS74701**QyyyzM3Q1**	**Q** indicates that this device is a grade-1 device in accordance with the AEC-Q100 standard. **yyy** is the package designator. **z** is the package quantity. **M3** is a suffix designator for devices that only use the latest manufacturing flow (CSO: RFB). Devices without this suffix can ship with the legacy chip (CSO: DLN) or the new chip (CSO: RFB). The reel packaging label provides CSO information to distinguish which chip is used. Device performance for new and legacy chips is denoted throughout the document. **Q1** indicates that this device is an automotive grade (AEC-Q100) device.

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or visit the device product folder on www.ti.com.

8.2 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击*通知* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

8.3 支持资源

TI E2E™ 中文支持论坛是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的使用条款。

8.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
所有商标均为其各自所有者的财产。

8.5 静电放电警告

静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

8.6 术语表

TI 术语表　　本术语表列出并解释了术语、首字母缩略词和定义。

Copyright © 2023 Texas Instruments Incorporated

9 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision C (October 2023) to Revision D (December 2023)	Page
• 通篇添加了器件措辞以区分旧芯片和新芯片信息	1
• 更新了导通响应图以显示新芯片性能	1
• Changed *Typical Characteristics* sections to show legacy chip and new chip data side by side and deleted V_{IN} *Dropout Voltage vs* V_{BIAS}-V_{OUT} curves	8
• Added soft-start time for new chip in *Standard Capacitor Values for Programming the Soft-Start Time* table.	20
• Changed *Device Nomenclature* section.	27

Changes from Revision B (September 2016) to Revision C (October 2023)	Page
• *更新了整个文档中的表格、图和交叉参考的编号格式*	1
• 向文档添加了 M3 器件	1
• 更改了特定于汽车的*特性* 要点	1
• 更改了 V_{IN} *范围*、*低压降*、*精度* 和*封装 特性* 要点：删除了 V_{IN} *范围* 要点中的*超低*，将*低压降* 要点中的“50mV”更改为“20mV”，将*精度*要点中的“2%”更改为“0.95%”，并删除了封装要点中的 × *1mm*	1
• 更改了*应用* 部分	1
• 更改了*说明* 部分	1
• Changed *Description* column of *Pin Functions* table.	3
• Changed *Typical Characteristics* and added new *Typical Characteristics* sections.	8
• Changed footnote for *Standard Capacitor Values for Programming the Soft-Start Time* table.	20
• Changed *Layout* section.	22
• Added *Device Nomenclature* section.	27

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2023 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS74701QDRCRM3Q1	Active	Production	VSON (DRC) | 10	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	PAE
TPS74701QDRCRM3Q1.A	Active	Production	VSON (DRC) | 10	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 150	PAE
TPS74701QDRCRQ1	Active	Production	VSON (DRC) | 10	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	PAE
TPS74701QDRCRQ1.A	Active	Production	VSON (DRC) | 10	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	PAE

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS74701-Q1 :

- Catalog : TPS74701

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

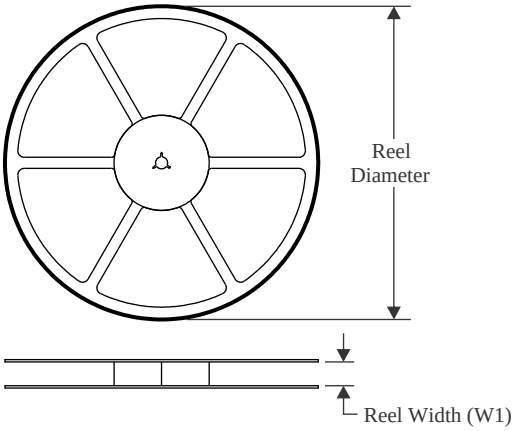

TAPE DIMENSIONS

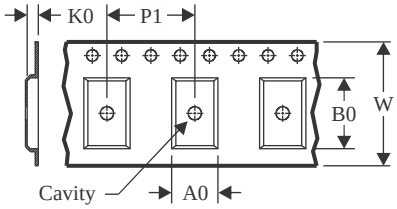

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

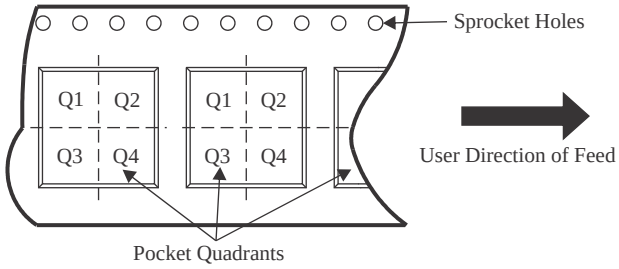

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS74701QDRCRM3Q1	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
TPS74701QDRCRQ1	VSON	DRC	10	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

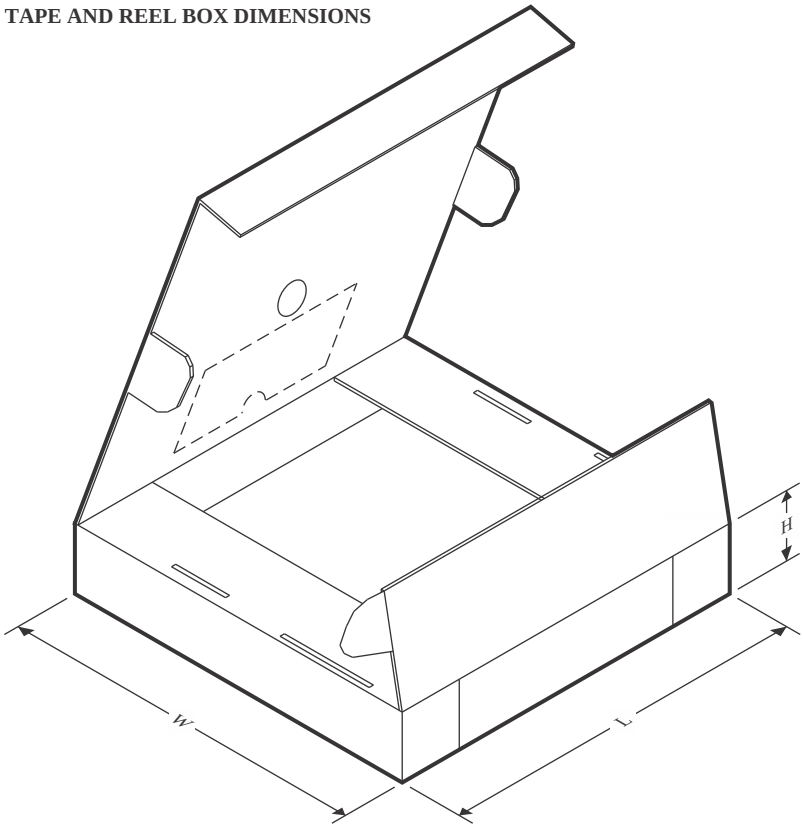

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS74701QDRCRM3Q1	VSON	DRC	10	3000	367.0	367.0	35.0
TPS74701QDRCRQ1	VSON	DRC	10	3000	367.0	367.0	35.0

GENERIC PACKAGE VIEW

DRC 10

VSON - 1 mm max height

3 x 3, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

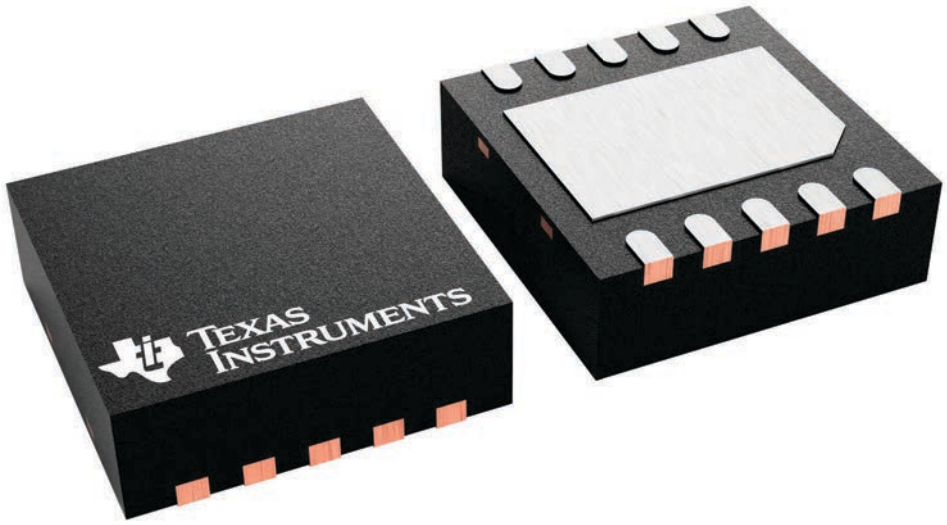

4226193/A

DRC0010J

PACKAGE OUTLINE

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

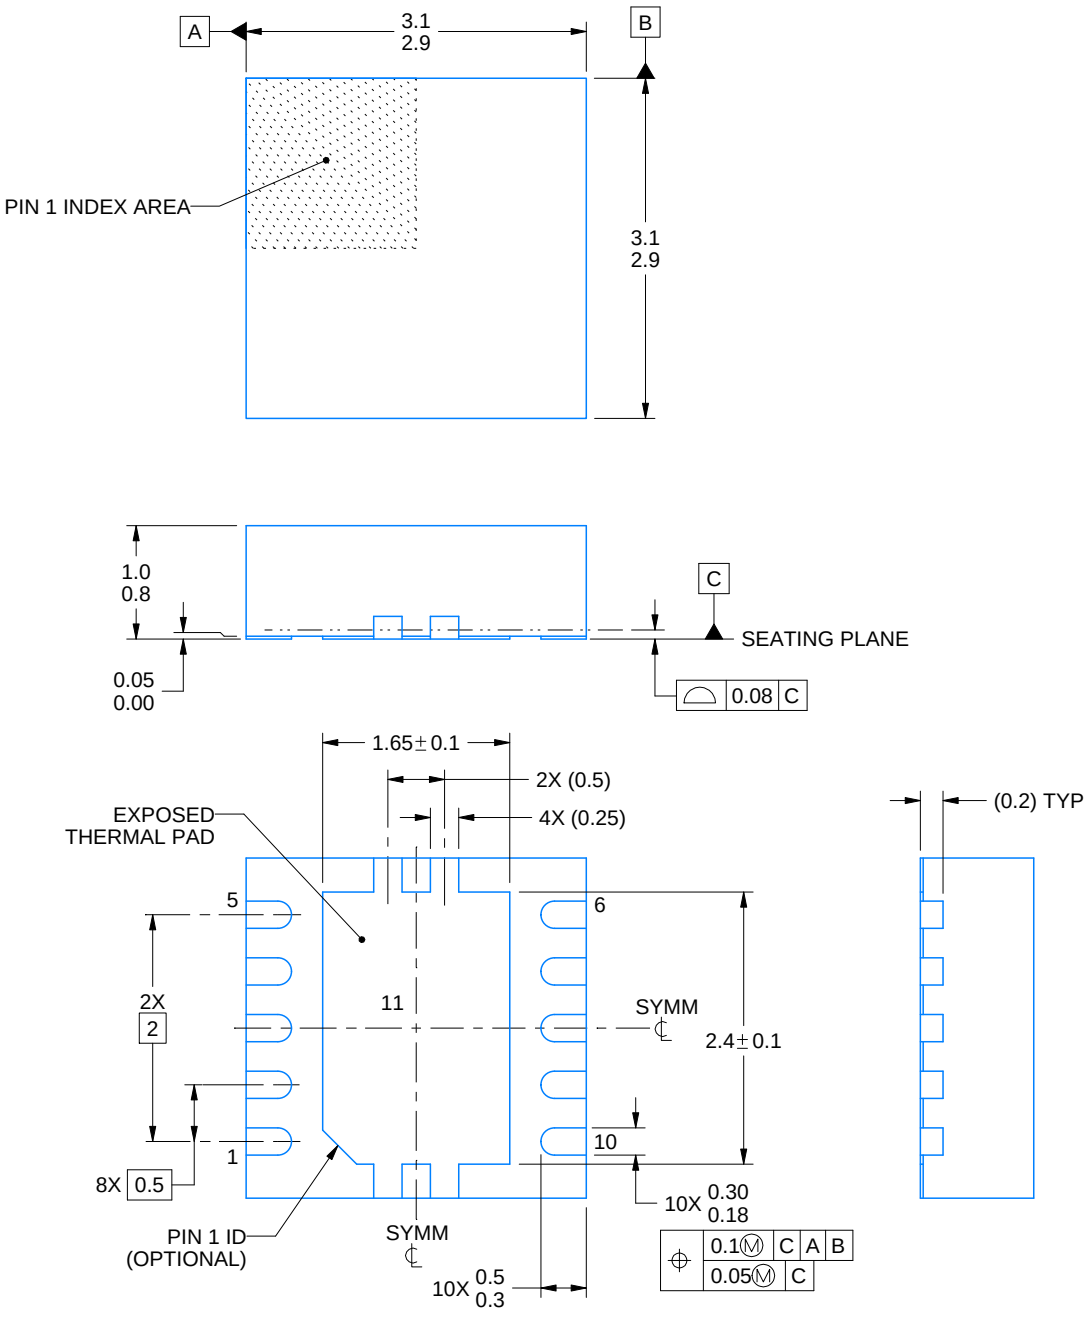

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

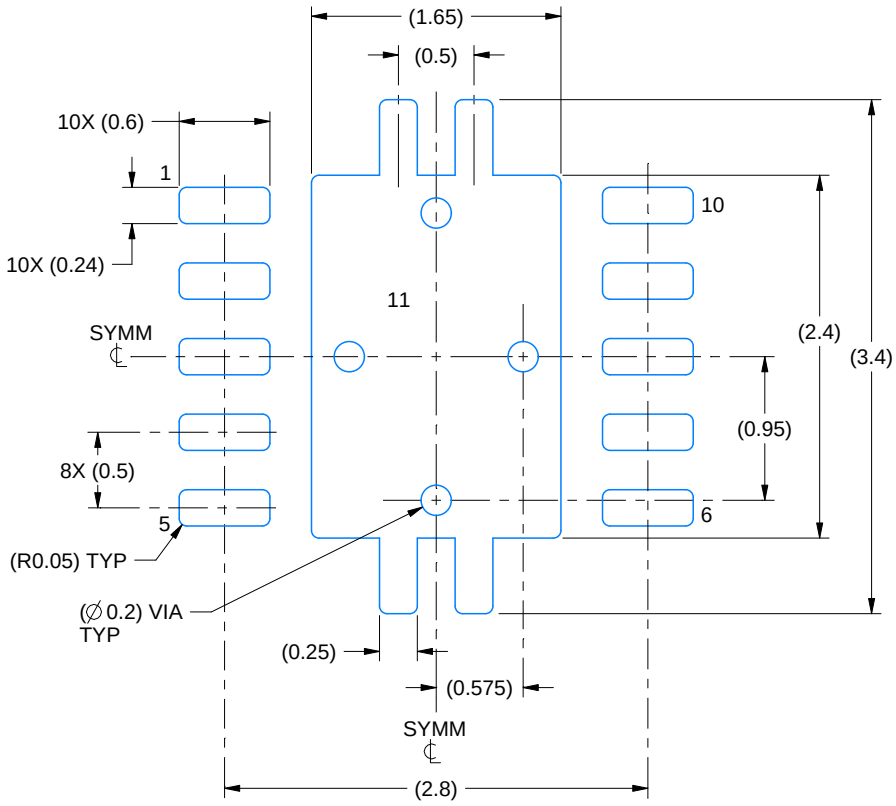

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

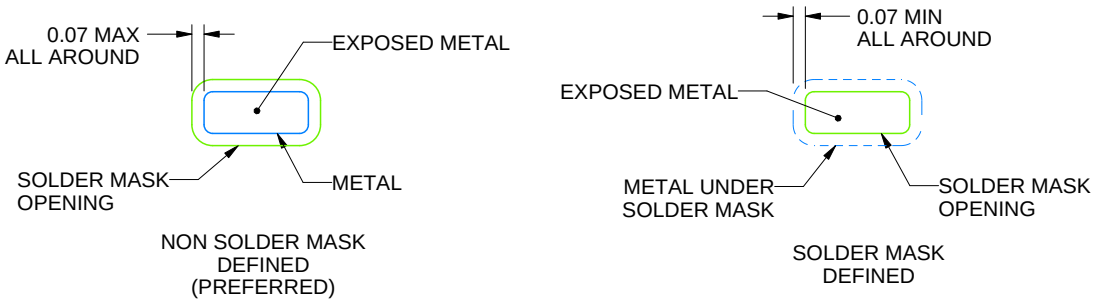

SOLDER MASK DETAILS

4218878/B 07/2018

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

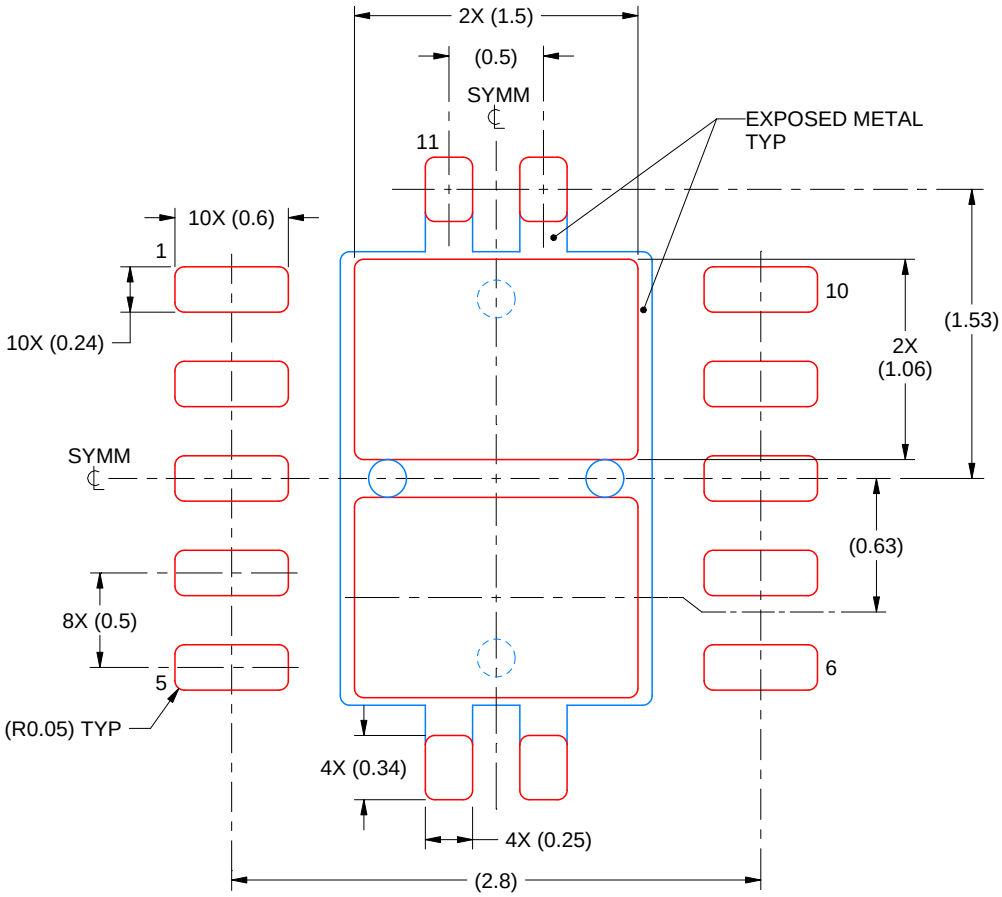

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11:
80% PRINTED SOLDER COVERAGE BY AREA
SCALE:25X

4218878/B 07/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 TI 销售条款)、TI 通用质量指南 或 ti.com 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。 除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月