

## 16 位、4 通道 CCD/CMOS 传感器 具有定时发生器的模拟前端

查询样品: [VSP5610](#), [VSP5611](#), [VSP5612](#)

### 特性

- 四通道 **CCD/CMOS** 信号: **2 通道、4 通道或 4 通道** (可选)
- 电源: 仅限 **3.3V** (典型值)  
(内置 **LDO**, **3.3V** 至 **1.8V**)
- 最大转换速率:
  - **VSP5610: 35 MSPS**
  - **VSP5611: 50 MSPS**
  - **VSP5612: 70 MSPS**
- **16 位分辨率**
- **CDS/SH** (可选)
- 最大输入信号范围: **2.0V**
- 模拟和数字混合增益:
  - 模拟增益: **3/64-V/V** 步骤中为 **0.5V/V** 至 **3.5V/V**
  - 数字增益: **1/256-V/V** 步骤中为 **1V/V** 至 **2V/V**
- 偏移校正 **DAC**: **±250mV**、**8 位**
- 标准 **LVDS/CMOS** 可选输出:
  - **LVDS**:
    - 数据通道: **2 通道、3 通道**
    - 时钟通道: **1 通道**
    - **8 位/7 位串行器** (可选)
  - **CMOS**: **4 位 × 4、8 位 × 2**
- 定时发生器:
  - 快速传输时钟: **八个信号**
  - 慢速传输时钟: **六个信号**
- 定时调节分辨率: **t<sub>MCLK</sub>/48**
- 输入钳位/输入参考级别内部/外部 (可选)
- 参考 **DAC**: **0.5V、1.1V、1.5V、2V**
- **SPI™**: 三线串行
- **GPIO**: 四端口

### 应用

- 复印机
- 传真机
- 扫描仪

### 说明

VSP5610/11/12 为高速、高性能 16 位模数转换器 (ADC), 具有四个独立的采样电路通道, 用于多路输出充电耦合设备 (CCD) 及互补金属氧化物半导体 (CMOS) 系列传感器。传感器的像素数据由采样/保持 (SH) 或相关双采样 (CDS) 电路采样, 然后由 ADC 转化为数字数据。数据输出在低电压差动信号 (LVDS) 或 CMOS 模式下可选。

VSP5610/11/12 包括一个可编程增益, 支持亮度引起的像素级反射。集成数模转换器 (DAC) 可用于调节模拟输入信号的偏移级别。此外, 定时发生器 (TG) 和一些控制传感器运行的器件集成。

VSP5610/11/12 使用 1.65V 至 1.95V 用于内核电压, 3.0V 至 3.6V 用于 I/O。内核电压由内置低压降稳压器 (LDO) 提供。



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SPI is a trademark of Motorola.

All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011, Texas Instruments Incorporated  
English Data Sheet: [SBES021](#)



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### PACKAGE/ORDERING INFORMATION<sup>(1)</sup>

PRODUCT	PACKAGE-LEAD	PACKAGE DESIGNATOR	SPECIFIED TEMPERATURE RANGE	PACKAGE MARKING	ORDERING NUMBER	TRANSPORT MEDIA
VSP5610	QFN-56	RSH	0°C to +85°C	VSP5610	VSP5610RSHR	Tape and Reel
VSP5611	QFN-56	RSH	0°C to +85°C	VSP5611	VSP5611RSHR	Tape and Reel
VSP5612	QFN-56	RSH	0°C to +85°C	VSP5612	VSP5612RSHR	Tape and Reel

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or visit the device product folder at [www.ti.com](http://www.ti.com).

### ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

Over operating free-air temperature range, unless otherwise noted.

	VSP5610, VSP5611, VSP5612	UNIT
Supply voltage: VDD, DVDD_IO, LVDD	4.0	V
Supply voltage difference: VDD, DVDD_IO, LVDD	±0.6	V
Ground voltage difference: VSS, DVSS, LVSS	±0.1	V
Digital voltage input	−0.3 to DVDD_IO + 0.3	V
Analog voltage input	−0.3 to VDD + 0.3	V
Digital input current	±10	mA
Analog input current	±10	mA
Ambient temperature under bias	−40 to +125	°C
Storage temperature	−55 to +150	°C
Junction temperature	+150	°C
Package temperature (IR reflow, peak)	+260	°C

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### RECOMMENDED OPERATING CONDITIONS

		MIN	NOM	MAX	UNIT
LDO and analog I/O power-supply voltage	VDD	3.0	3.3	3.6	V
Digital power-supply voltage	DVDD_IO	3.0	3.3	3.6	V
LVDS/CMOS power-supply voltage	LVDD	3.0	3.3	3.6	V
Supply voltage difference	VDD, DVDD_IO, LVDD	−0.3		0.3	V
Digital input logic family		Low-voltage CMOS			
Master clock frequency (MCLK)	VSP5610	1		11.66	MHz
	VSP5611	1		16.66	MHz
	VSP5612	1		23.33	MHz
Serial I/O clock frequency (SCLK)				10	MHz
Operating free-air temperature		0		+85	°C

## ELECTRICAL CHARACTERISTICS: VSP5610

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 8.75 MHz, and four-channel mode, unless otherwise noted.

PARAMETER		TEST CONDITIONS	VSP5610			UNIT
			MIN	TYP	MAX	
ANALOG INPUT						
Allowable input voltage			0		VDD	V
Full-scale range		Gain = 1 V/V		1		V <sub>PP</sub>
Input capacitor				5		pF
DIGITAL INPUT						
Positive-going threshold	V <sub>T+</sub>			DVDD_IO × 0.7		V
Negative-going threshold	V <sub>T–</sub>		DVDD_IO × 0.3			V
Hysteresis (V <sub>T+</sub> – V <sub>T–</sub> )	ΔV <sub>T</sub>		DVDD_IO × 0.13			V
Input current	I <sub>IN</sub>				±1	μA
Input capacitor				5		pF
DIGITAL OUTPUT						
High-level output voltage	V <sub>OH</sub>	I <sub>OH</sub> = –2 mA	DVDD_IO – 0.45			V
		I <sub>OH</sub> = –4 mA	DVDD_IO – 0.50			V
		I <sub>OH</sub> = –8 mA	DVDD_IO – 0.50			V
Low-level output voltage	V <sub>OL</sub>	I <sub>OL</sub> = 2 mA			0.35	V
		I <sub>OL</sub> = 4 mA			0.50	V
		I <sub>OL</sub> = 8 mA			0.65	V
TG output timing skew		XP1, XP2, XP3, XP4	–1		1	ns
		Other signals	–2		2	ns
CMOS data output bit rate					80	MHz
LVDS DRIVER (TA, TB, TC, TCLK)						
Differential steady-state output voltage adjustment range	V <sub>OD</sub>	R <sub>L</sub> = 100 Ω	300	350	400	mV
Differential steady-state output adjustment step	V <sub>OD</sub>		3			Steps
Differential steady-state output voltage tolerance	V <sub>OD</sub>		–30		30	%
Change in the steady-state differential output voltage magnitude between opposite binary states	Δ V <sub>OD</sub>				35	mV
Steady-state common-mode output voltage	V <sub>OC(SS)</sub>	R <sub>L</sub> = 100 Ω	1.125		1.375	V
Peak-to-peak common-mode output voltage	V <sub>OC(PP)</sub>			80	150	mV
Short-circuit output current	I <sub>OS</sub>	V <sub>O</sub> = 0 V (V <sub>O</sub> = TA, TB, TC, TCLK)		–6	±24	mA
Hi-Z output current	I <sub>OZ</sub>	V <sub>O</sub> = 0 V to LVDD (V <sub>O</sub> = TA, TB, TC, TCLK)			±10	μA
Transition time, differential output voltage	t <sub>LR</sub> /t <sub>LF</sub>			0.75	1.5	ns
TCLK clock rate			8		35	MHz
LVDS RECEIVER (RCLK)						
Positive-going differential input threshold voltage	V <sub>IT+</sub>				100	mV
Negative-going differential input threshold voltage	V <sub>IT–</sub>		–100			mV
RCLK clock rate			1		11.66	MHz

**ELECTRICAL CHARACTERISTICS: VSP5610 (continued)**

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 8.75 MHz, and four-channel mode, unless otherwise noted.

PARAMETER	TEST CONDITIONS	VSP5610			UNIT	
		MIN	TYP	MAX		
POWER SUPPLY						
LDO and analog I/O supply voltage	VDD	3.0	3.3	3.6	V	
Digital I/O supply voltage	DVDD_IO	3.0	3.3	3.6	V	
LVDS/CMOS supply voltage	LVDD	3.0	3.3	3.6	V	
LDO and analog I/O current	VDD	74.9			mA	
Digital I/O current	DVDD_IO	Load = 10 pF			3.8	mA
CMOS current	LVDD	10			mA	
LVDS current	LVDD	Three-pair data, one-pair clock			24	mA
Power consumption	LVDS, three-pair		339		mW	
	CMOS output		317		mW	
	Standby mode (MCLK = 0 MHz)		15		mW	
TEMPERATURE RANGE						
Operation temperature	T <sub>A</sub>	0		+85	°C	
Thermal resistor (junction-to-air)	θ <sub>JA</sub>	PCB (50 mm × 50 mm, four-layer), 0 lfm airflow		29	°C/W	
Thermal resistor (junction-to-case)	θ <sub>JC</sub>			24	°C/W	
DLL, PLL						
MCLK input frequency	f <sub>MCLK</sub>	1		11.66	MHz	
MCLK modulated frequency	MCLK > 5 MHz		35		kHz	
MCLK modulated amplitude			–3.5		0	%
DLL tap number			48		Taps	
Maximum DLL and PLL lock-up time	MCLK = 1 MHz		10		ms	
TRANSFER CHARACTERISTICS						
Channels		2		4	Channels	
Resolution		16			Bits	
Conversion rate	LVDS, two- and three-channel mode		1	11.66	MHz/Ch	
	LVDS, four-channel mode		1	8.75	MHz/Ch	
	CMOS 8-bit × 2, two-channel mode		1	11.66	MHz/Ch	
	CMOS 4-bit × 4, two-channel mode		1	10	MHz/Ch	
	CMOS 8-bit × 2, three-channel mode		1	11.66	MHz/Ch	
	CMOS 4-bit × 4, three-channel mode		1	6.7	MHz/Ch	
	CMOS 8-bit × 2, four-channel mode		1	8.75	MHz/Ch	
	CMOS 4-bit × 4, four-channel mode		1	5	MHz/Ch	
Maximum differential nonlinearity	Gain = 1 V/V, 12-bit		±0.5		LSB	
Maximum integral nonlinearity	Gain = 1 V/V, 12-bit		±2		LSB	
No missing codes			Specified			
Signal-to-noise ratio	SNR	Gain = 1 V/V		72 <sup>(1)</sup>	76	dB
Analog channel crosstalk	Gain = 1 V/V, 12-bit, full-scale step		±3		LSB	
Total absolute gain error			–10		10	%

(1) Specified by design.

## ELECTRICAL CHARACTERISTICS: VSP5610 (continued)

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 8.75 MHz, and four-channel mode, unless otherwise noted.

PARAMETER	TEST CONDITIONS	VSP5610			UNIT
		MIN	TYP	MAX	
ANALOG PROGRAMMABLE GAIN (APG)					
Gain range	APG_x	0.5		3.5	V/V
Gain step			63		Steps
Gain relative error	Basis gain = 1 V/V	−10		10	%
Gain monotonicity	Only APG_x		Specified		
DIGITAL PROGRAMMABLE GAIN (DPG)					
Gain range	DPG_x	1.0		2.0	V/V
Gain step			255		Steps
Gain monotonicity	Only DPG_x		Specified		
AIN REFERENCE LEVEL (REF_AIN)					
Internal DAC output	V_RINT	Setting code = 2		0.5	V
		Setting code = 3		1.1	V
		Setting code = 0 (default)		1.5	V
		Setting code = 1		2.0	V
Internal DAC output tolerance	V_RINT	−10		10	%
Internal DAC output temperature drift	V_RINT	T_A = 0°C to +85°C <sup>(2)</sup>	−2	2	%
External reference range	V_REXT	0.5		VDD − 0.9	V
INPUT CLAMP					
Clamp level	V_CLP	Internal reference level clamp		V_RINT	V
		External reference level clamp		V_REXT	V
		Fixed level clamp		2.2	V
Clamp-on resistance	R_CLP		500		Ω
OFFSET DAC					
Resolution			8		Bits
Output range			±250		mV
Setting tolerance		−10		10	%
Temperature drift	T_A = 0°C to +85°C <sup>(2)</sup>	−2		2	%

(2) Specified by design.

**ELECTRICAL CHARACTERISTICS: VSP5611**

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 12.5 MHz, and four-channel mode, unless otherwise noted.

PARAMETER		TEST CONDITIONS	VSP5611			UNIT
			MIN	TYP	MAX	
ANALOG INPUT						
Allowable input voltage			0		VDD	V
Full-scale range		Gain = 1 V/V		1		V <sub>PP</sub>
Input capacitor				5		pF
DIGITAL INPUT						
Positive-going threshold	V <sub>T+</sub>		DVDD_IO × 0.7			V
Negative-going threshold	V <sub>T–</sub>		DVDD_IO × 0.3			V
Hysteresis (V <sub>T+</sub> – V <sub>T–</sub> )	ΔV <sub>T</sub>		DVDD_IO × 0.13			V
Input current	I <sub>IN</sub>				±1	μA
Input capacitor				5		pF
DIGITAL OUTPUT						
High-level output voltage	V <sub>OH</sub>	I <sub>OH</sub> = –2 mA	DVDD_IO – 0.45			V
		I <sub>OH</sub> = –4 mA	DVDD_IO – 0.50			V
		I <sub>OH</sub> = –8 mA	DVDD_IO – 0.50			V
Low-level output voltage	V <sub>OL</sub>	I <sub>OL</sub> = 2 mA	0.35			V
		I <sub>OL</sub> = 4 mA	0.50			V
		I <sub>OL</sub> = 8 mA	0.65			V
TG output timing skew		XP1, XP2, XP3, XP4	–1		1	ns
		Other signals	–2		2	ns
CMOS data output bit rate					80	MHz
LVDS DRIVER (TA, TB, TC, TCLK)						
Differential steady-state output voltage adjustment range	V <sub>OD</sub>	R <sub>L</sub> = 100 Ω	300	350	400	mV
Differential steady-state output adjustment step	V <sub>OD</sub>			3		Steps
Differential steady-state output voltage tolerance	V <sub>OD</sub>		–30		30	%
Change in the steady-state differential output voltage magnitude between opposite binary states	Δ V <sub>OD</sub>				35	mV
Steady-state common-mode output voltage	V <sub>OC(SS)</sub>	R <sub>L</sub> = 100 Ω	1.125		1.375	V
Peak-to-peak common-mode output voltage	V <sub>OC(PP)</sub>			80	150	mV
Short-circuit output current	I <sub>OS</sub>	V <sub>O</sub> = 0 V (V <sub>O</sub> = TA, TB, TC, TCLK)		–6	±24	mA
Hi-Z output current	I <sub>OZ</sub>	V <sub>O</sub> = 0 V to LVDD (V <sub>O</sub> = TA, TB, TC, TCLK)			±10	μA
Transition time, differential output voltage	t <sub>LR</sub> /t <sub>LF</sub>			0.75	1.5	ns
TCLK clock rate			8		50	MHz
LVDS RECEIVER (RCLK)						
Positive-going differential input threshold voltage	V <sub>IT+</sub>				100	mV
Negative-going differential input threshold voltage	V <sub>IT–</sub>		–100			mV
RCLK clock rate			1		16.66	MHz

**ELECTRICAL CHARACTERISTICS: VSP5611 (continued)**

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 12.5 MHz, and four-channel mode, unless otherwise noted.

PARAMETER	TEST CONDITIONS	VSP5611			UNIT
		MIN	TYP	MAX	
POWER SUPPLY					
LDO and analog I/O supply voltage	VDD	3.0	3.3	3.6	V
Digital I/O supply voltage	DVDD_IO	3.0	3.3	3.6	V
LVDS/CMOS supply voltage	LVDD	3.0	3.3	3.6	V
LDO and analog I/O current	VDD		99.6		mA
Digital I/O current	DVDD_IO	Load = 10 pF		5.4	mA
CMOS current	LVDD		10		mA
LVDS current	LVDD	Three-pair data, one-pair clock		24	mA
Power consumption		LVDS, three-pair		426	mW
		CMOS output		398	mW
		Standby mode (MCLK = 0 MHz)		15	mW
TEMPERATURE RANGE					
Operation temperature	T <sub>A</sub>	0		+85	°C
Thermal resistor (junction-to-air)	θ <sub>JA</sub>	PCB (50 mm × 50 mm, four-layer), 0 lfm airflow		29	°C/W
Thermal resistor (junction-to-case)	θ <sub>JC</sub>		24		°C/W
DLL, PLL					
MCLK input frequency	f <sub>MCLK</sub>	1		16.66	MHz
MCLK modulated frequency	MCLK > 5 MHz			35	kHz
MCLK modulated amplitude		–3.5		0	%
DLL tap number			48		Taps
Maximum DLL and PLL lock-up time	MCLK = 1 MHz		10		ms
TRANSFER CHARACTERISTICS					
Channel		2		4	Channels
Resolution			16		Bits
Conversion rate	LVDS, two- and three-channel mode		1	16.66	MHz/Ch
	LVDS, four-channel mode		1	12.5	MHz/Ch
	CMOS 8-bit × 2, two-channel mode		1	16.66	MHz/Ch
	CMOS 4-bit × 4, two-channel mode		1	10	MHz/Ch
	CMOS 8-bit × 2, three-channel mode		1	13.3	MHz/Ch
	CMOS 4-bit × 4, three-channel mode		1	6.7	MHz/Ch
	CMOS 8-bit × 2, four-channel mode		1	10	MHz/Ch
	CMOS 4-bit × 4, four-channel mode		1	5	MHz/Ch
Maximum differential nonlinearity	Gain = 1 V/V, 12-bit		±0.5		LSB
Maximum integral nonlinearity	Gain = 1 V/V, 12-bit		±2		LSB
No missing codes			Specified		
Signal-to-noise ratio	SNR	Gain = 1 V/V		72 <sup>(1)</sup>	dB
Analog channel crosstalk	Gain = 1 V/V, 12-bit, full-scale step		±6.5		LSB
Total absolute gain error		–10		10	%

(1) Specified by design.

**ELECTRICAL CHARACTERISTICS: VSP5611 (continued)**

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 12.5 MHz, and four-channel mode, unless otherwise noted.

PARAMETER		TEST CONDITIONS	VSP5611			UNIT
			MIN	TYP	MAX	
ANALOG PROGRAMMABLE GAIN (APG)						
Gain range	APG_x		0.5		3.5	V/V
Gain step				63		Steps
Gain relative error		Basis gain = 1 V/V	−10		10	%
Gain monotonicity		Only APG_x		Specified		
DIGITAL PROGRAMMABLE GAIN (DPG)						
Gain range	DPG_x		1.0		2.0	V/V
Gain step				255		Steps
Gain monotonicity		Only DPG_x		Specified		
AIN REFERENCE LEVEL (REF_AIN)						
Internal DAC output	V <sub>RINT</sub>	Setting code = 2		0.5		V
		Setting code = 3		1.1		V
		Setting code = 0 (default)		1.5		V
		Setting code = 1		2.0		V
Internal DAC output tolerance	V <sub>RINT</sub>		−10		10	%
Internal DAC output temperature drift	V <sub>RINT</sub>	T <sub>A</sub> = 0°C to +85°C <sup>(2)</sup>	−2		2	%
External reference range	V <sub>REXT</sub>		0.5		VDD − 0.9	V
INPUT CLAMP						
Clamp level	V <sub>CLP</sub>	Internal reference level clamp		V <sub>RINT</sub>		V
		External reference level clamp		V <sub>REXT</sub>		V
		Fixed level clamp		2.2		V
Clamp-on resistance	R <sub>CLP</sub>			500		Ω
OFFSET DAC						
Resolution				8		Bits
Output range				±250		mV
Setting tolerance			−10		10	%
Temperature drift		T <sub>A</sub> = 0°C to +85°C <sup>(2)</sup>	−2		2	%

(2) Specified by design.



## ELECTRICAL CHARACTERISTICS: VSP5612

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 17.5 MHz, and four-channel mode, unless otherwise noted.

PARAMETER		TEST CONDITIONS	VSP5612			UNIT
			MIN	TYP	MAX	
ANALOG INPUT						
Allowable input voltage			0		VDD	V
Full-scale range		Gain = 1 V/V		1		V <sub>PP</sub>
Input capacitor				5		pF
DIGITAL INPUT						
Positive-going threshold	V <sub>T+</sub>			DVDD_IO × 0.7		V
Negative-going threshold	V <sub>T–</sub>		DVDD_IO × 0.3			V
Hysteresis (V <sub>T+</sub> – V <sub>T–</sub> )	ΔV <sub>T</sub>		DVDD_IO × 0.13			V
Input current	I <sub>IN</sub>				±1	μA
Input capacitor				5		pF
DIGITAL OUTPUT						
High-level output voltage	V <sub>OH</sub>	I <sub>OH</sub> = –2 mA	DVDD_IO – 0.45			V
		I <sub>OH</sub> = –4 mA	DVDD_IO – 0.50			V
		I <sub>OH</sub> = –8 mA	DVDD_IO – 0.50			V
Low-level output voltage	V <sub>OL</sub>	I <sub>OL</sub> = 2 mA			0.35	V
		I <sub>OL</sub> = 4 mA			0.50	V
		I <sub>OL</sub> = 8 mA			0.65	V
TG output timing skew		XP1, XP2, XP3, XP4	–1		1	ns
		Other signals	–2		2	ns
CMOS data output bit rate					80	MHz
LVDS DRIVER (TA, TB, TC, TCLK)						
Differential steady-state output voltage adjustment range	V <sub>OD</sub>	R <sub>L</sub> = 100 Ω	300	350	400	mV
Differential steady-state output adjustment step	V <sub>OD</sub>		3			Steps
Differential steady-state output voltage tolerance	V <sub>OD</sub>		–30		30	%
Change in the steady-state differential output voltage magnitude between opposite binary states	Δ V <sub>OD</sub>				35	mV
Steady-state common-mode output voltage	V <sub>OC(SS)</sub>	R <sub>L</sub> = 100 Ω	1.125		1.375	V
Peak-to-peak common-mode output voltage	V <sub>OC(PP)</sub>			80	150	mV
Short-circuit output current	I <sub>OS</sub>	V <sub>O</sub> = 0 V (V <sub>O</sub> = TA, TB, TC, TCLK)		–6	±24	mA
Hi-Z output current	I <sub>OZ</sub>	V <sub>O</sub> = 0 V to LVDD (V <sub>O</sub> = TA, TB, TC, TCLK)			±10	μA
Transition time, differential output voltage	t <sub>LR</sub> /t <sub>LF</sub>			0.75	1.5	ns
TCLK clock rate			8		70	MHz
LVDS RECEIVER (RCLK)						
Positive-going differential input threshold voltage	V <sub>IT+</sub>				100	mV
Negative-going differential input threshold voltage	V <sub>IT–</sub>		–100			mV
RCLK clock rate			1		23.33	MHz

**ELECTRICAL CHARACTERISTICS: VSP5612 (continued)**

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 17.5 MHz, and four-channel mode, unless otherwise noted.

PARAMETER	TEST CONDITIONS	VSP5612			UNIT	
		MIN	TYP	MAX		
POWER SUPPLY						
LDO and analog I/O supply voltage	VDD		3.0	3.3	3.6	V
Digital I/O supply voltage	DVDD_IO		3.0	3.3	3.6	V
LVDS/CMOS supply voltage	LVDD		3.0	3.3	3.6	V
LDO and analog I/O current	VDD			133		mA
Digital I/O current	DVDD_IO	Load = 10 pF		7.5		mA
CMOS current	LVDD			10		mA
LVDS current	LVDD	Three-pair data, one-pair clock		24		mA
Power consumption		LVDS, three-pair		542		mW
		CMOS output		507		mW
		Standby mode (MCLK = 0 MHz)		15		mW
TEMPERATURE RANGE						
Operation temperature	T <sub>A</sub>		0		+85	°C
Thermal resistor (junction-to-air)	θ <sub>JA</sub>	PCB (50 mm × 50 mm, four-layer), 0 lfm airflow		29		°C/W
Thermal resistor (junction-to-case)	θ <sub>JC</sub>			24		°C/W
DLL, PLL						
MCLK input frequency	f <sub>MCLK</sub>		1		23.33	MHz
MCLK modulated frequency		MCLK > 5 MHz			35	kHz
MCLK modulated amplitude			–3.5		0	%
DLL tap number				48		Taps
Maximum DLL and PLL lock-up time		MCLK = 1 MHz		10		ms
TRANSFER CHARACTERISTICS						
Channel			2		4	Channels
Resolution				16		Bits
Conversion rate		LVDS, two- and three-channel mode	1		23.33	MHz/Ch
		LVDS, four-channel mode	1		17.5	MHz/Ch
		CMOS 8-bit × 2, two-channel mode	1		20	MHz/Ch
		CMOS 4-bit × 4, two-channel mode	1		10	MHz/Ch
		CMOS 8-bit × 2, three-channel mode	1		13.3	MHz/Ch
		CMOS 4-bit × 4, three-channel mode	1		6.7	MHz/Ch
		CMOS 8-bit × 2, four-channel mode	1		10	MHz/Ch
		CMOS 4-bit × 4, four-channel mode	1		5	MHz/Ch
Maximum differential nonlinearity		Gain = 1 V/V, 12-bit		±0.5		LSB
Maximum integral nonlinearity		Gain = 1 V/V, 12-bit		±2		LSB
No missing codes				Specified		
Signal-to-noise ratio	SNR	Gain = 1 V/V	72 <sup>(1)</sup>	75		dB
Analog channel crosstalk		Gain = 1 V/V, 12-bit, full-scale step		±15		LSB
Total absolute gain error			–10		10	%

(1) Specified by design.

## ELECTRICAL CHARACTERISTICS: VSP5612 (continued)

All specifications at  $T_A = +25^\circ\text{C}$ , supply voltage = +3.3 V, conversion rate = 17.5 MHz, and four-channel mode, unless otherwise noted.

PARAMETER	TEST CONDITIONS	VSP5612			UNIT
		MIN	TYP	MAX	
ANALOG PROGRAMMABLE GAIN (APG)					
Gain range	APG_x	0.5		3.5	V/V
Gain step			63		Steps
Gain relative error	Basis gain = 1 V/V	−10		10	%
Gain monotonicity	Only APG_x		Specified		
DIGITAL PROGRAMMABLE GAIN (DPG)					
Gain range	DPG_x	1.0		2.0	V/V
Gain step			255		Steps
Gain monotonicity	Only DPG_x		Specified		
AIN REFERENCE LEVEL (REF_AIN)					
Internal DAC output	V <sub>RINT</sub>	Setting code = 2	0.5		V
		Setting code = 3	1.1		V
		Setting code = 0 (default)	1.5		V
		Setting code = 1	2.0		V
Internal DAC output tolerance	V <sub>RINT</sub>	−10		10	%
Internal DAC output temperature drift	V <sub>RINT</sub>	T <sub>A</sub> = 0°C to +85°C <sup>(2)</sup>	−2	2	%
External reference range	V <sub>REXT</sub>	0.5		VDD − 0.9	V
INPUT CLAMP					
Clamp level	V <sub>CLP</sub>	Internal reference level clamp	V <sub>RINT</sub>		V
		External reference level clamp	V <sub>REXT</sub>		V
		Fixed level clamp	2.2		V
Clamp-on resistance	R <sub>CLP</sub>		500		Ω
OFFSET DAC					
Resolution			8		Bits
Output range			±250		mV
Setting tolerance		−10		10	%
Temperature drift		T <sub>A</sub> = 0°C to +85°C <sup>(2)</sup>	−2	2	%

(2) Specified by design.

## THERMAL INFORMATION

THERMAL METRIC <sup>(1)</sup>		VSP561xRSH	UNITS
		RSH	
		56 PINS	
$\theta_{\text{JA}}$	Junction-to-ambient thermal resistance	25.8	$^\circ\text{C/W}$
$\theta_{\text{JCTop}}$	Junction-to-case (top) thermal resistance	13.2	
$\theta_{\text{JB}}$	Junction-to-board thermal resistance	3.5	
$\psi_{\text{JT}}$	Junction-to-top characterization parameter	0.2	
$\psi_{\text{JB}}$	Junction-to-board characterization parameter	3.5	
$\theta_{\text{JCbott}}$	Junction-to-case (bottom) thermal resistance	0.4	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## PARAMETERIC MEASUREMENT INFORMATION

## Analog Input Specification (AIN1, AIN2, AIN3, AIN4)

The analog input specification has two signal inputs: negative and positive. These inputs are shown in [Figure 1a](#) and [Figure 1b](#), respectively.

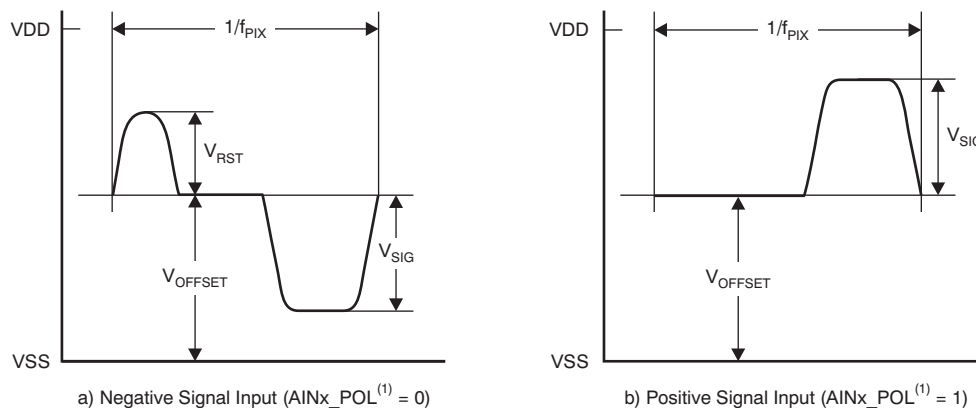


Figure 1. Analog Input Definition


Table 1. Timing Characteristics for [Figure 1](#)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input pixel rate	VSP5610	1		11.66	MHz/Ch
	VSP5611	1		16.66	MHz/Ch
	VSP5612	1		23.33	MHz/Ch
Signal range	Negative (AINx_POL <sup>(1)</sup> = 0)			V <sub>OFFSET</sub>	V
	Positive (AINx_POL <sup>(1)</sup> = 1)			VDD – V <sub>OFFSET</sub>	V
Maximum full-scale range	V <sub>SIG</sub> Gain = 0.5 V/V	1.8	2	2.2	V
Reset field through noise range	V <sub>RST</sub>	–V <sub>OFFSET</sub>	VDD – V <sub>OFFSET</sub>		V
Offset level	Fixed level clamp mode (REF_SEL = 0)		2.2		V
	Internal reference level clamp mode (REF_SEL = 1)		V <sub>RINT</sub>		V
	External reference level clamp mode (REF_SEL = 2)		V <sub>REXT</sub>		V

(1) AINx\_POL = Analog input polarity setting register (x = 1, 2, 3, and 4).

## LVDS Output Voltage Specification

The test load and voltage definition for the LVDS outputs are shown in [Figure 2](#).

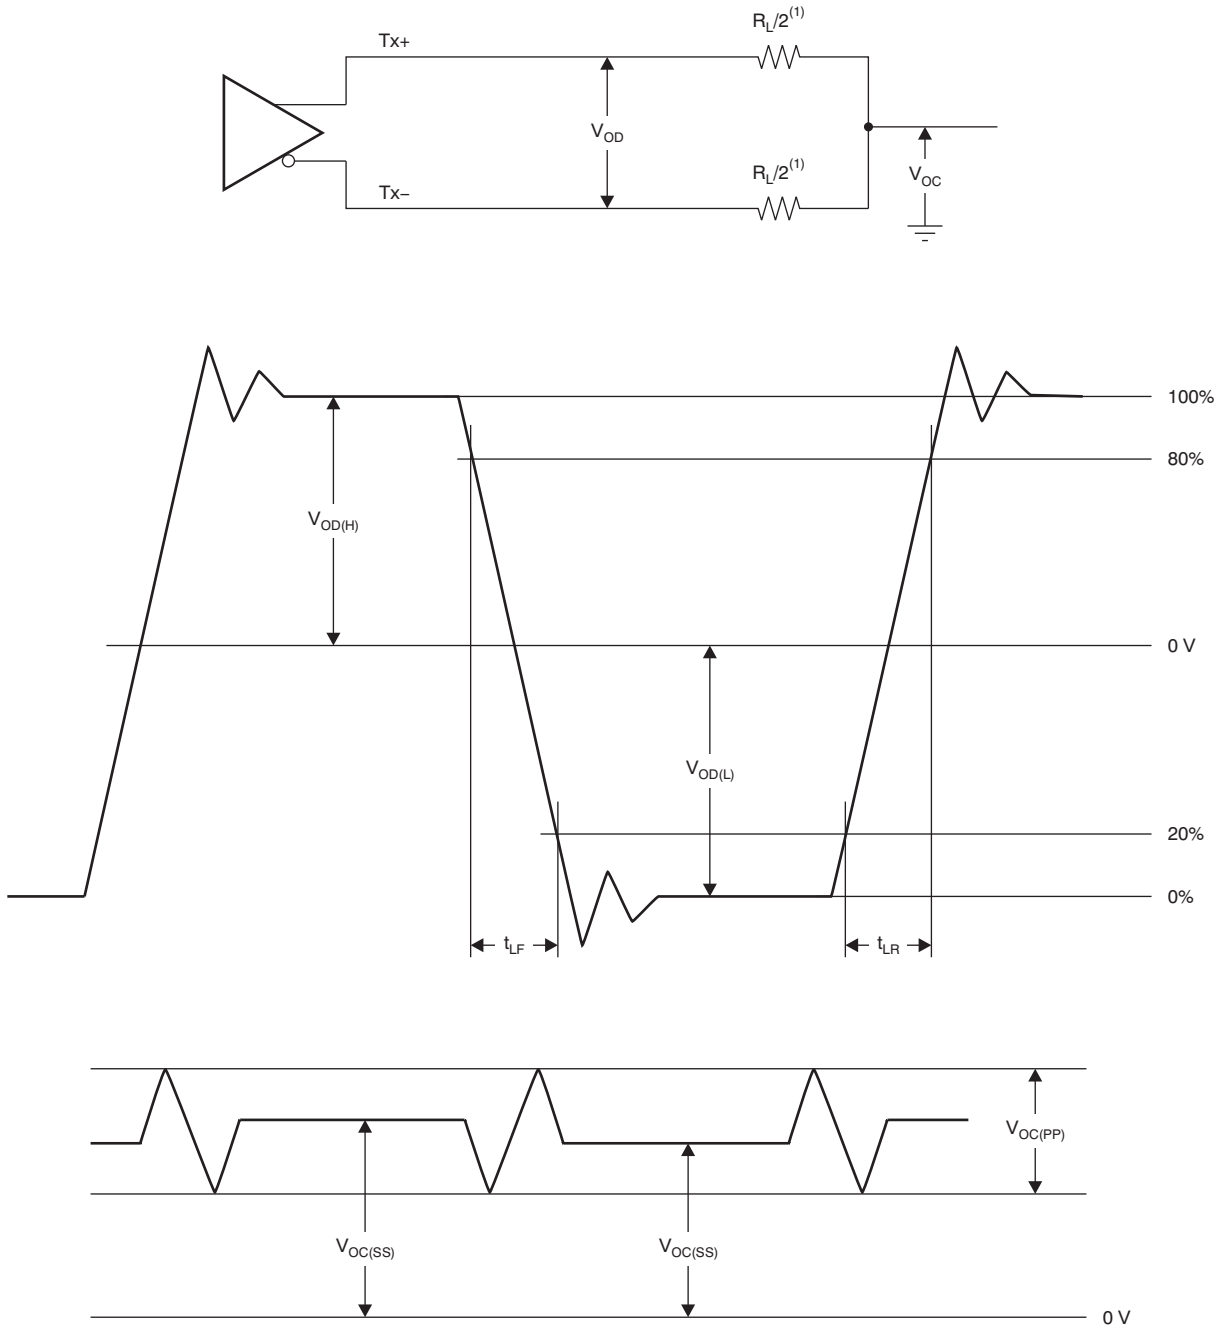


(1)  $R_L/2 = 49.9 \, \Omega \pm 1\%$

**Figure 2. Test Load and Voltage Definition for LVDS Outputs**

## PIN CONFIGURATION

### RSH PACKAGE QFN-56 (TOP VIEW)

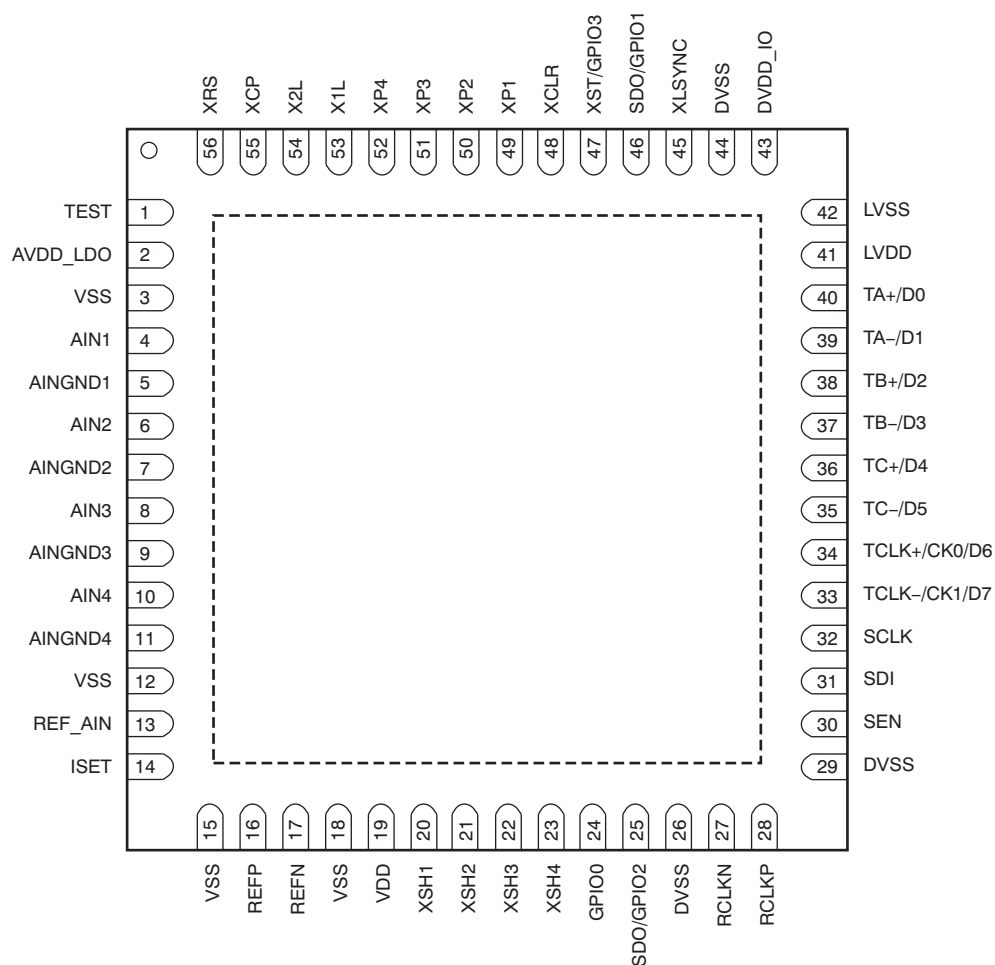

## PIN ASSIGNMENTS

PIN NUMBER	PIN NAME	TYPE <sup>(1)</sup>	DESCRIPTION
1	TEST	DI3.3	Internal test pin; connect to DGND
2	AVDD_LDO	AP1.8	Analog core power voltage output; not connected, open
3	VSS	AGND	LDO and analog I/O ground
4	AIN1	AI3.3	First channel analog signal input <sup>(2)</sup>
5	AINGND1	AI3.3	First channel analog signal ground <sup>(2)</sup>
6	AIN2	AI3.3	Second channel analog signal input <sup>(2)</sup>
7	AINGND2	AI3.3	Second channel analog signal ground <sup>(2)</sup>
8	AIN3	AI3.3	Third channel analog signal input <sup>(2)</sup>
9	AINGND3	AI3.3	Third channel analog signal ground <sup>(2)</sup>
10	AIN4	AI3.3	Fourth channel analog signal input <sup>(2)</sup>
11	AINGND4	AI3.3	Fourth channel analog signal ground <sup>(2)</sup>
12	VSS	AGND	LDO and analog I/O ground
13	REF_AIN	AI3.3/AO3.3	REF_DAC_IN 0 = Analog signal reference output (default) 1 = Analog signal reference input
14	ISSET	LVO1.8	Internal reference voltage output; bypass to ground with a 10-kΩ ±1% resistor
15	VSS	AGND	LDO and analog I/O ground
16	REFP	AO1.8	Positive reference; bypass to AGND with a 0.1-μF capacitor
17	REFN	AO1.8	Negative reference; bypass to AGND with a 0.1-μF capacitor
18	VSS	AGND	LDO and analog I/O ground
19	VDD	AP3.3	LDO and analog I/O power supply
20	XSH1	DO3.3	Sensor shift gate output 1
21	XSH2	DO3.3	Sensor shift gate output 2
22	XSH3	DO3.3	Sensor shift gate output 3
23	XSH4	DO3.3	Sensor shift gate output 4
24	GPIO0	DIO3.3	GPIO0_SEL 0 = GPIO0, general-purpose input port 0 (default) (In case of input, internal pull-down resistor) 1 = GPO0, general-purpose output port 0
25	SDO/GPIO2	DIO3.3	GPIO2_SDO_SEL 0 = GPIO2, general-purpose input port 2 (default) (In case of input, internal pull-down resistor) 1 = GPO2, general-purpose output port 2 2 = Reserved 3 = SDO, serial I/F data output
26	DVSS	DGND	Digital ground
27	RCLKN	LVI3.3	LVDS clock input
28	RCLKP	LVI3.3	CMOS master clock input/positive LVDS clock input
29	DVSS	DGND	Digital ground
30	SEN	DI3.3	Serial I/F enable; active low, internal pull-up resistor
31	SDI	DIO3.3	SDI_BUFF_CTRL 0 = Serial I/F data input 1 = Serial I/F data input/output (Internal pull-down resistor)
32	SCLK	DI3.3	Serial I/F clock (internal pull-down resistor)
33	TCLK-/CK1/ D7	LVO3.3	Negative LVDS clock output/Clock output 1/Data output bit 7
34	TCLK+/CK0/ D6	LVO3.3	Positive LVDS clock output/Clock output 0/Data output bit 6

- (1) AP3.3 = 3.3-V analog power supply; AP1.8 = 1.8-V analog power supply; AGND = analog ground; GND = ground; AO3.3 = 3.3-V analog output; AO1.8 = 1.8-V analog output; AI3.3 = 3.3-V analog input; DP3.3 = 3.3-V digital power supply; DP1.8 = 1.8-V digital power supply; DGND = digital ground; DO3.3 = 3.3-V digital output; DI3.3 = 3.3-V digital input; DIO3.3 = 3.3-V digital I/O; LVP3.3 = 3.3-V LVDS power supply; LVGND = LVDS ground; LVO3.3 = 3.3-V LVDS output; LVI3.3 = 3.3-V LVDS input; and LVO = 3.3-V LVDS output.
- (2) If these pins are unused, they can be opened or decoupled to GND with a decoupling capacitor.

**PIN ASSIGNMENTS (continued)**

<b>PIN NUMBER</b>	<b>PIN NAME</b>	<b>TYPE<sup>(1)</sup></b>	<b>DESCRIPTION</b>
35	TC-/D5	LVO3.3	Negative TC channel LVDS data output/Data output bit 5
36	TC+/D4	LVO3.3	Positive TC channel LVDS data output/Data output bit 4
37	TB-/D3	LVO3.3	Negative TB channel LVDS data output/Data output bit 3
38	TB+/D2	LVO3.3	Positive TB channel LVDS data output/Data output bit 2
39	TA-/D1	LVO3.3	Negative TA channel LVDS data output/Data output bit 1
40	TA+/D0	LVO3.3	Positive TA channel LVDS data output/Data output bit 0
41	LVDD	LVP3.3	LVDS/CMOS output power supply
42	LVSS	LVGND	LVDS/CMOS output ground
43	DVDD_IO	DP3.3	Digital I/O power supply
44	DVSS	DGND	Digital ground
45	XLSYNC	DIO3.3	XLSYNC_SEL 0 = Internal line synchronous signal output (default) (In case of input, internal pull-down resistor) 1 = External line synchronous signal input. Polarity is set by the XLSYNC_POL register (default is active high).
46	SDO/GPIO1	DIO3.3	GPIO1_SDO_SEL 0 = GPI1, general-purpose input port 1 (default) (In case of input, internal pull-down resistor) 1 = GPO1, general-purpose output port 1 2 = Reserved, internal test input 3 = SDO, serial I/F data output
47	XST/GPIO3	DIO3.3	GPIO3_XST_SEL 0 = GPI3, general-purpose input port 3 (default) (In case of input, internal pull-down resistor) 1 = GPO3, general-purpose output port 3 2 = Reserved, internal test input 3 = XST, storage pulse output
48	XCLR	DO3.3	Sensor clear gate output
49	XP1	DO3.3	Fast transfer clock output $\phi$ 1
50	XP2	DO3.3	Fast transfer clock output $\phi$ 2
51	XP3	DO3.3	Fast transfer clock output $\phi$ 3
52	XP4	DO3.3	Fast transfer clock output $\phi$ 4
53	X1L	DO3.3	Fast transfer clock output 1L
54	X2L	DO3.3	Fast transfer clock output 2L
55	XCP	DO3.3	Clamp gate clock output
56	XRS	DO3.3	Reset gate clock output



## FUNCTIONAL BLOCK DIAGRAM

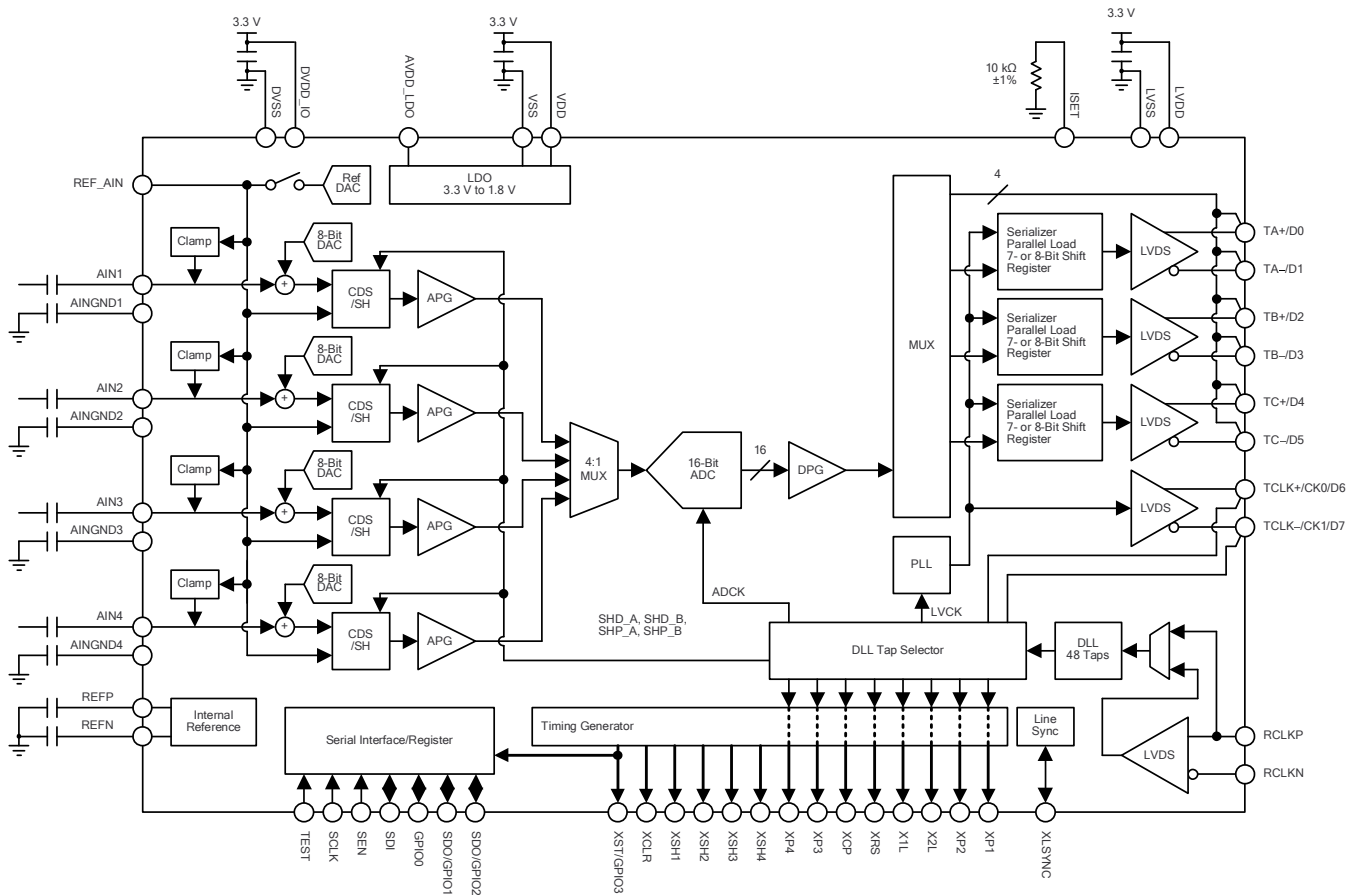


Figure 3. VSP5610/11/12 Block Diagram

## SYSTEM OVERVIEW

### INTRODUCTION

The VSP5610/11/12 are analog front-end (AFE) devices for CCD and CMOS line image sensor applications such as copiers, facsimile machines, etc. The VSP5610/11/12 each provide four independent data processing channels.

The data from each image sensor channel are sampled and held by either the SH or CDS circuit and are then converted into digital data by an ADC. The digital data for each channel are later converted into serial data that can be output in either LVDS mode or CMOS mode.

### AFE BLOCK

### ANALOG SIGNAL INPUT

These devices have four channels that can be used as analog input ports for an image sensor. In addition to the four-channel input, this AFE device also supports three-channel and two-channel inputs. [Table 2](#) shows the register settings required to select the different channel modes.

**Table 2. Analog Input Channel Mode Selection**

MODE	AIN_CH_SEL	AIN1	AIN2	AIN3	AIN4
Two-channel	2	Active	Standby	Active	Standby
Three-channel	1	Active	Active	Active	Standby
Four-channel	0	Active	Active	Active	Active

Each analog input supports CDS and simple SH circuits to accommodate CCD and CMOS image sensors. The sampling mode can be selected independently for each channel by configuring the internal registers. As shown in [Table 3](#), if AINx\_SH\_CDS is set to '0', then the corresponding channel operates in CDS mode.

**Table 3. CDS/SH Mode Selection**

AINx_SH_CDS <sup>(1)</sup>	SH/CDS
0	CDS
1	SH

(1) AINx\_POL = Analog input polarity setting register (x = 1, 2, 3, and 4).

In addition, these devices also support independent selection of the input signal polarity for each channel. Input signal polarity can be set using the AINx\_POL register, where x = 1, 2, 3, or 4. The input signal range and polarity are defined in the [Analog Input Specification](#) section.

### Correlated Double Sampler (CDS) Mode (AINx\_SH\_CDS = 0)

CDS mode is designed to accommodate inputs from the CCD sensor. The output signal of a CCD image sensor is sampled twice during one pixel period. First, the reference interval is sampled by the SHP pulse, then the data interval is sampled by the SHD pulse. Subtracting these two samples provides the video information of the pixel as well as removes any noise common to both intervals. Thus, CDS plays an important role in reducing the reset noise and other low-frequency noises that are present on the CCD output signal. Figure 4 shows a diagram of CDS mode.


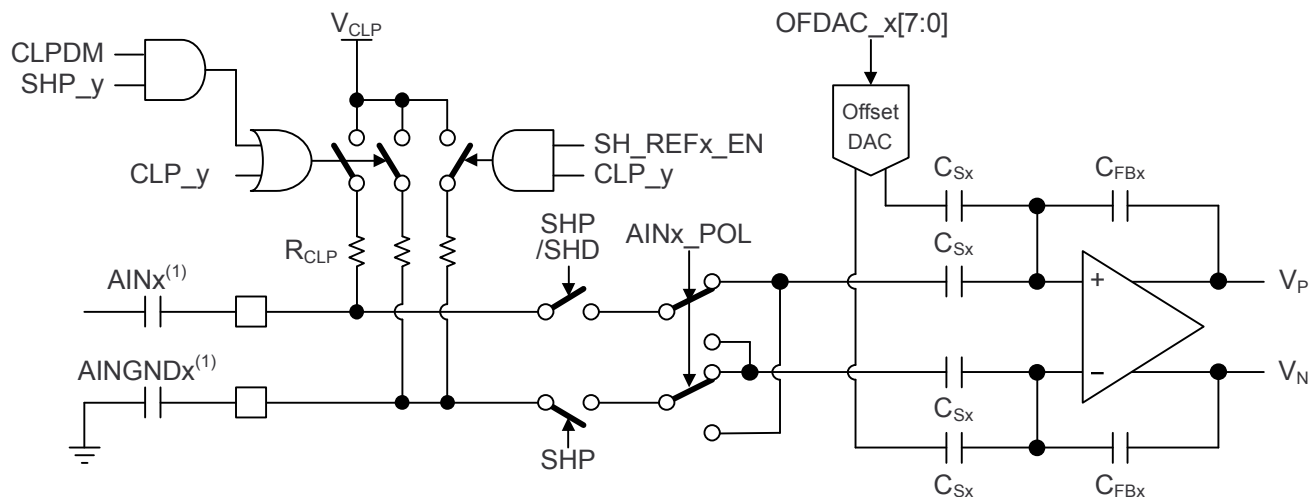


Figure 4. CDS Mode Input Circuit for CCD Signal

### Sample Hold (SH) Mode (AINx\_SH\_CDS = 1)

SH mode supports CCD and CMOS sensors. For the CCD sensor, the sensor signal pedestal level is clamped to the  $V_{CLP}$  level using an internal clamp circuit. SH samples only once during a pixel period. The SHD pulse is used to sample the CCD signal data interval. After sampling, the SH circuit takes the difference of the data and  $V_{CLP}$  levels to extract the video information.

For the CMOS input, the input clamp function should be set according to the requirements. If the sensor output is within the allowable input range, an ac-coupling capacitor for analog input may not be needed. When the sensor signal is directly input to the AFE, the SH circuit requires a reference voltage to set the black level. To use  $V_{CLP}$  as a reference, SH\_REFx\_EN should be enabled and AINGNDx then opened or coupled to GND with a capacitor. To use an external reference, it can be input to AINGNDx with sensor signals connected to AINx. Figure 5 shows a diagram of the SH mode.

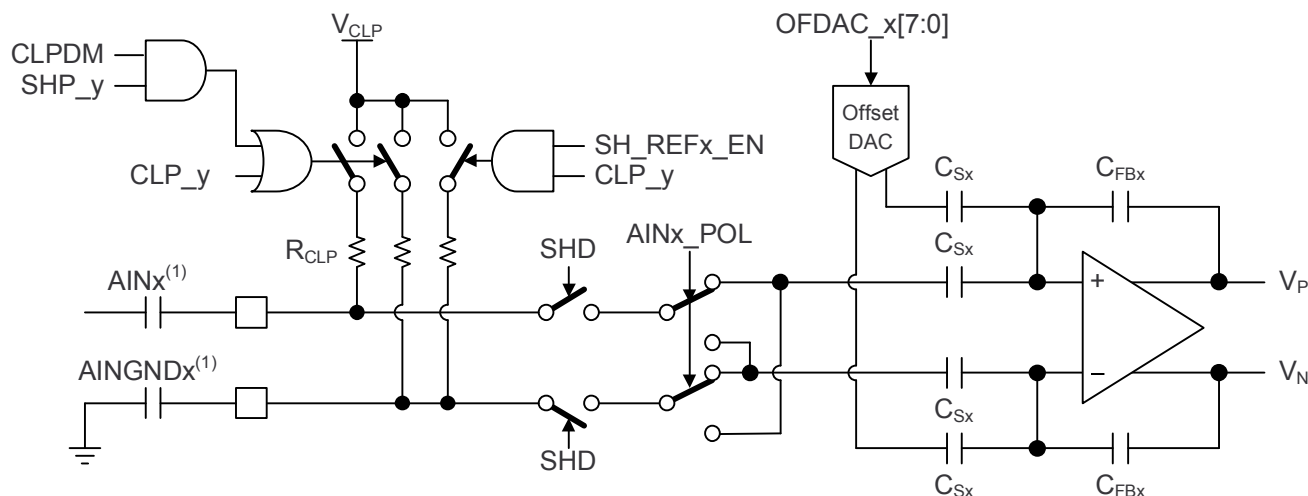

(1) Under some conditions, the sensor signal can be directly input to the AFE without requiring an external capacitor.

(2) In SH mode, the SHP clock should be programmed so that it does not overlap the SHD clock.

**Figure 5. SH Mode Input Circuit for CCD or CMOS Signal**

### INPUT CLAMP AND SENSOR REFERENCE

The CCD output signal has a large dc offset that may exceed the input range of the AFE input circuit. Therefore, this output signal is ac-coupled to the AFE through a capacitor, and the internal dc level is set to the clamp voltage ( $V_{CLP}$ ) by an internal clamp circuit. The VSP5610/11/12 provide three modes for clamp operation: pixel clamp, line clamp, and not clamped. These modes are shown in Table 4. The clamp mode can be set independently for each channel by configuring the AINx\_CLP\_SEL register.

**Table 4. Clamp Mode Selection**

CLAMP MODE	MODE SETTING	CLAMP ACTIVE CONDITION AND SETTING			
	AINx_CLP_SEL <sup>(1)</sup>	CDS/SH	CLP_y <sup>(2)</sup>	CLPDM AND SHP_y <sup>(2)</sup>	SH_REF_EN
Pixel clamp	0 (default)	CDS/SH	Active	Active	Off
Line clamp	1	CDS/SH	—	Active	Off
Not clamped	2	Only SH	—	—	On
	3	Only SH	—	—	Off


(1) AINx\_CLP\_SEL (x = 1, 2, 3, and 4).

(2) y = A and B.

In pixel clamp mode, CLP\_A/B is used for clamping. The input signal is clamped to  $V_{CLP}$  via the CLP\_A/B pulse during each pixel period, as shown in Figure 6a. Because the ac-coupling capacitor is charged on a pixel-to-pixel basis, the clamp level droop can be controlled by the clamp pulse width.

In line clamp mode, SHP\_A/B is used for clamping when CLPDM is active, as shown in Figure 6b. The input signal is clamped only in the CLPDM period within one line cycle of the sensor. The signal is clamped in this method because the charge leaks the least from the coupling capacitor during the CLPDM period. Accordingly, because there may be a large droop in the clamp level, this device does not support line clamp in the SH mode.

The *not-clamped* mode is mainly used in for a CMOS sensor input. If the sensor signal is directly connected to the AFE, this mode should be configured without an ac-coupling capacitor at the input port. This mode has two options to select a reference for the sensor black level: internal reference and external input. In the internal reference option, the internal reference ( $V_{CLP}$ ) is used with  $AINx\_CLP\_SEL = 2$ . In the external input option, the external input is used from AINGNDx with  $AINx\_CLP\_SEL = 3$ .

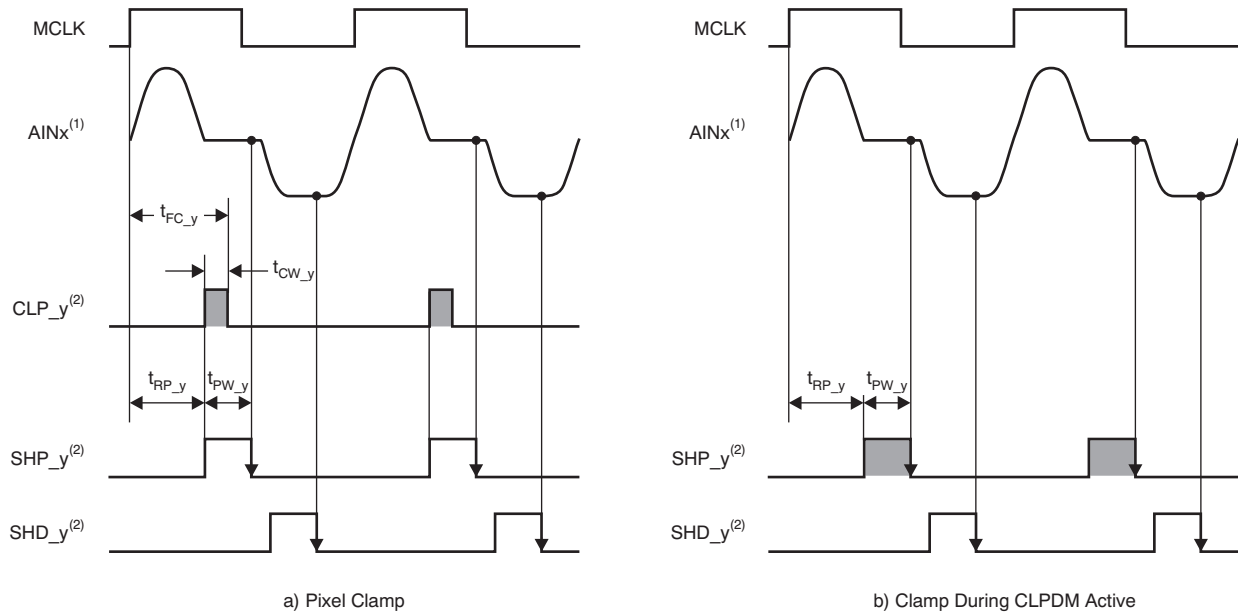


(1) x = AIN channel number, x = 1, 2, 3, and 4.

(2) y = Group code of sample pulse signals. When x = 1 or 2, y = A. When x = 3 or 4, y = B.

**Figure 6. Input Clamp Function**

As shown in Figure 7, the internal  $V_{CLP}$  node provides the clamp reference voltage. As for the clamp level, it is possible to select three reference voltage modes by setting the  $AINx\_REF\_SEL$  register. The first mode provides a fixed 2.2 V, the second mode provides selectable outputs (0.5 V, 1.1 V, 1.5 V, and 2.0 V) of an internal DAC, and the third mode allows an external input from the  $REF\_AIN$  pin to be used as the clamp reference. This  $REF\_AIN$  pin is bidirectional and also acts as an output of the internal DAC. Table 5 shows the relationship between the register and clamp level. Table 6 shows the DAC configuration.

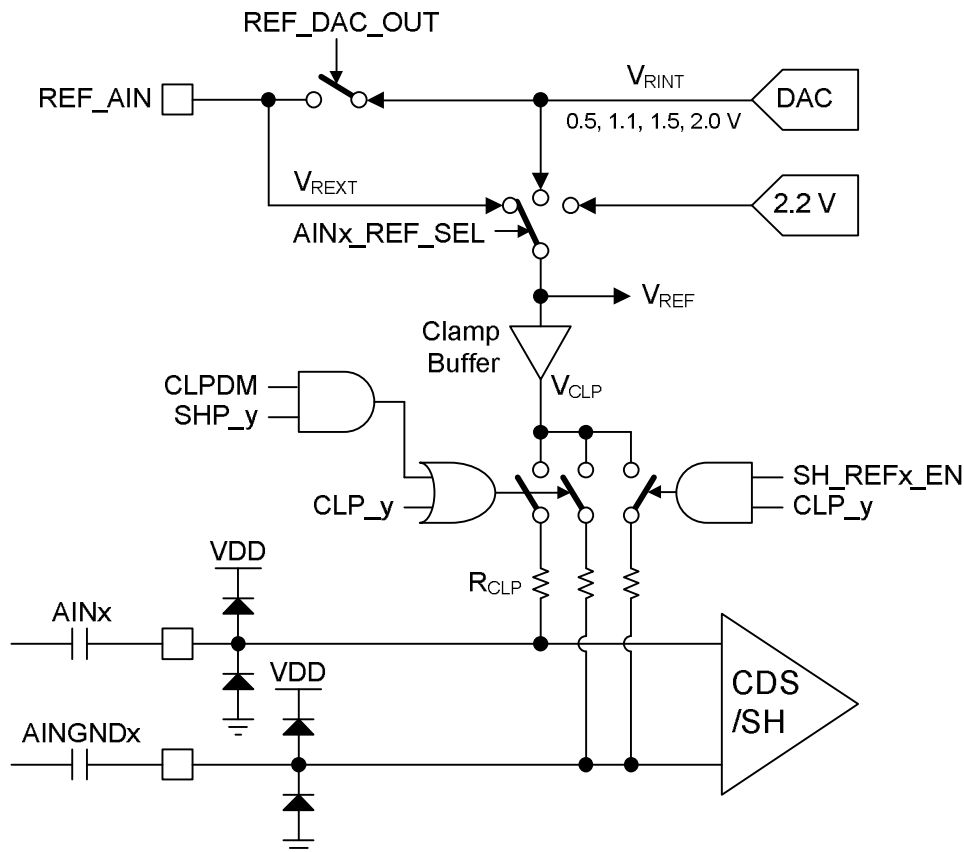

(1) If the sensor signal is directly input to the AFE, the external capacitor should not be connected.

**Figure 7.  $V_{CLP}$  Block Diagram**

**Table 5. Clamp Level Selection**


MODE SETTING $AINx\_REF\_SEL[1:0]$ <sup>(1)</sup>	CLAMP LEVEL	
0	2.2 V	
1	$V_{RINT}$	Reference DAC (0.5 V, 1.1 V, 1.5 V, and 2.0 V)
2	$V_{REXT}$	$REF\_AIN$ external input

(1)  $AINx\_CLP\_SEL$  (x = 1, 2, 3, and 4).

**Table 6.  $V_{RINT}$  Voltage Selection**

SETTING CODE $VRINT\_SEL$	REF DAC $V_{RINT}$ (V)
2	0.5
3	1.1
0	1.5 (default)
1	2.0

If line clamp mode is used, the CLPDM period should be configured by the internal registers. The CLPDM period is determined with reference to the line cycle signal for the sensor (LS). Thus, the start and end of CLPDM are each defined as the number of pixels from the LS falling edge. Because CLPDM is used as the clamp period, it should be assigned for the interval of any dummy or optical black pixels. [Figure 8](#) shows the relationship between LS and CLPDM.

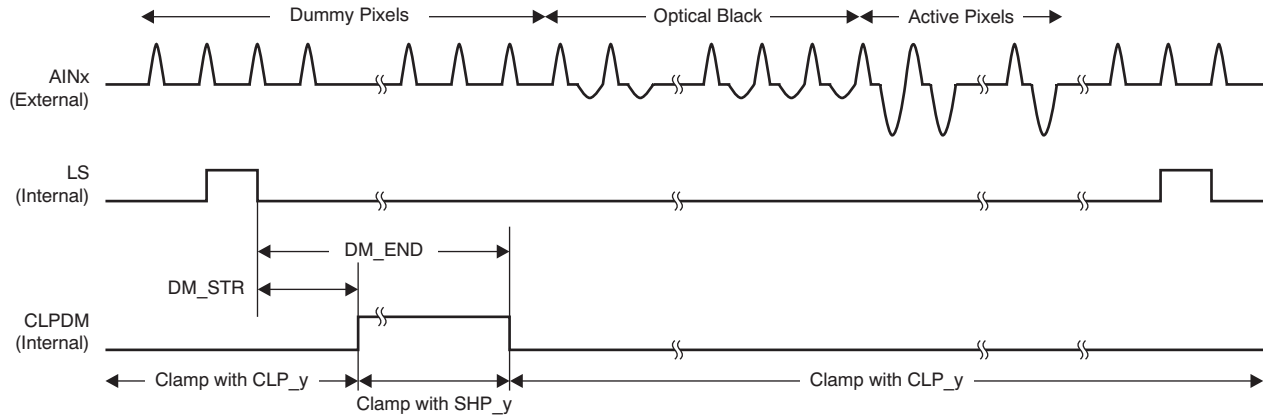

**Figure 8. Line Clamp Period Setting**

## Pixel Clamp Period Setting

In pixel clamp mode, without CLPDM, the sensor signal is clamped with CLP\_A and CLP\_B pulses. CLP\_A corresponds to AIN1 and AIN2; CLP\_B corresponds to AIN3 and AIN4. The start of these pulses is synchronized with the SHP\_y rising edge (where y = A or B). There are two options to configure the end position: first, to automatically set the pulse width to 50% that of SHP\_y; and second, to manually configure the end position using an internal register. Figure 9 and Figure 10 illustrate the details of the clamp pulse function in automatic and manual modes, respectively.

### Automatic Mode (CLP\_TF\_AT\_DIS = 0)

Figure 9 shows the automatic mode when CLP\_TF\_AT\_DIS is '0'.

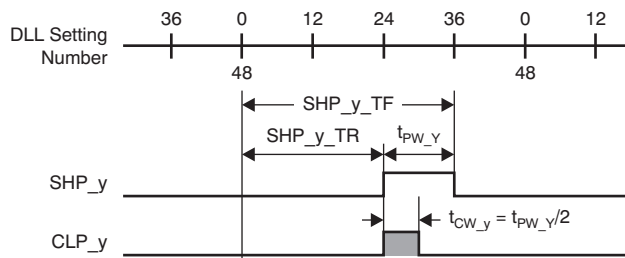


Figure 9. Automatic Mode

### Manual Mode (CLP\_TF\_AT\_DIS = 1)

Figure 10 shows the manual mode when CLP\_TF\_AT\_DIS is '1'.


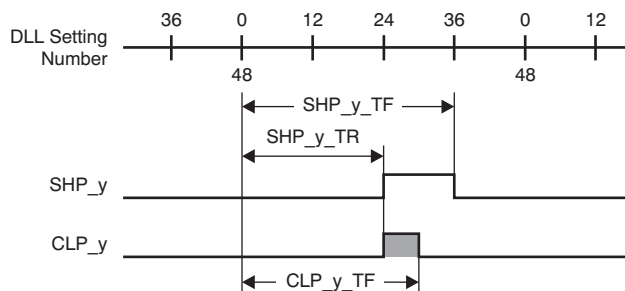


Figure 10. Manual Mode



In pixel clamp mode when CLPDM is active, the sensor signal is clamped with SHP\_y. Therefore, the pixel clamp operation is closely related with the status of CLPDM. The condition of CLPDM should be properly defined with the internal registers. Because CLPDM is always high during a default condition after reset or power up, the status of CLPDM should be defined according to this sequence. Furthermore, the CLPDM status should be defined in the second step of the flowchart shown in Figure 11 for either configuration. All other user-dependent settings, except XLSYNC\_SEL and EN\_OUT of the software reset sequence, are described in Figure 11.

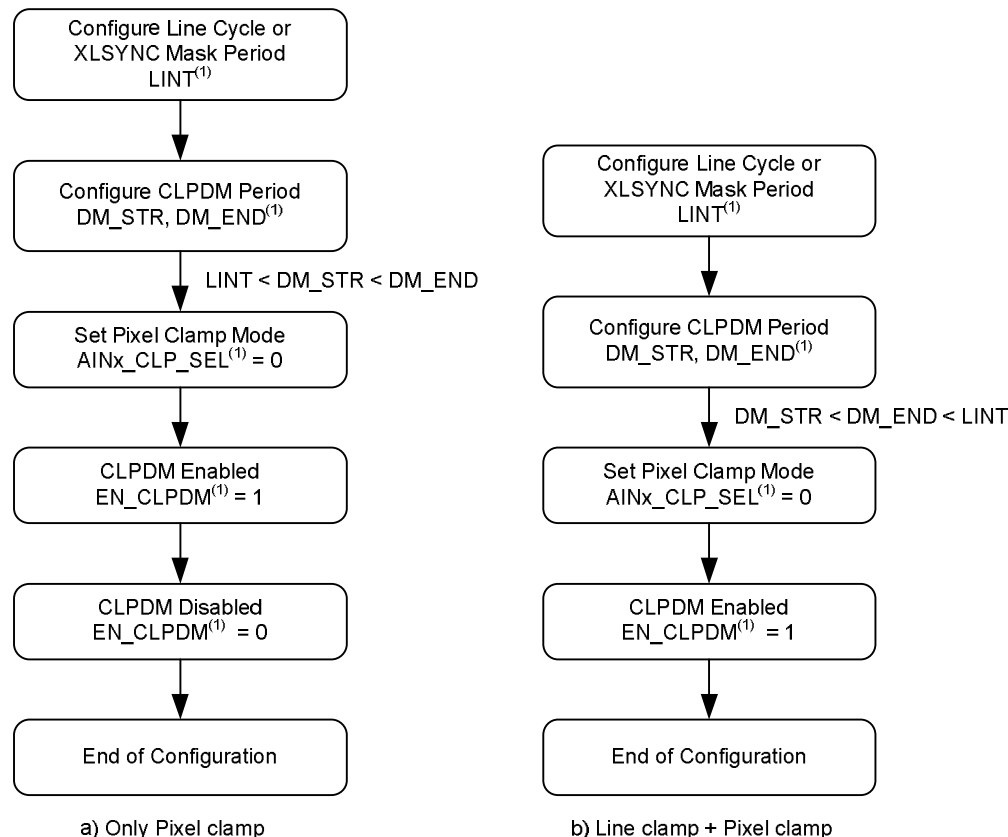

(1) Internal registers: AINx\_CLP\_SEL = addresses 16 and 17; LINT = address 7; DM\_STR = address 8; DM\_END = address 9; and EN\_CLPDM = address 399, bit 1.

**Figure 11. Configuration Sequence for Pixel Clamp**

## ANALOG PROGRAMMABLE GAIN (APG)

The SH output can be amplified using programmable analog gain. This gain can be set from 0.5 V/V to 3.5 V/V with a step size of 3/64 V/V.

The gain setting can be controlled by an internal register (APG\_x). Equation 1 shows the relationship between the setting code and gain. The gain of each of the four channels can be set independently using different registers. Note that the black pixel level may possibly change as a result of the change in the gain; therefore, the appropriate timing of the gain change should be used to avoid degradation in image quality. Figure 12 shows analog gain as a function of gain control code in terms of V/V. Figure 13 shows the maximum allowed input signal as a function of gain control code.

$$\text{APG (V/V)} = \frac{3}{63} \times \text{Code} + 0.5 \quad (\text{Code} = 0 \text{ LSB to } 63 \text{ LSB}) \quad (1)$$

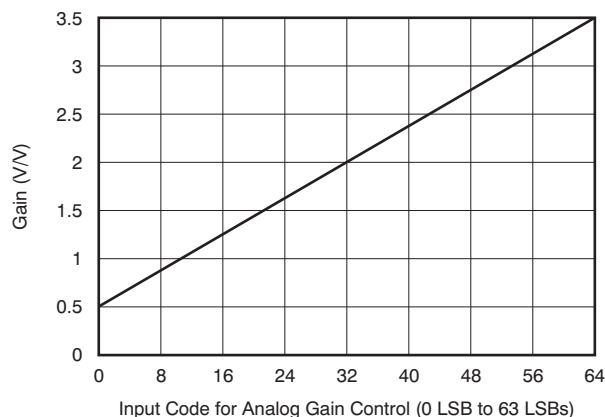


Figure 12. Analog Gain vs Setting Code

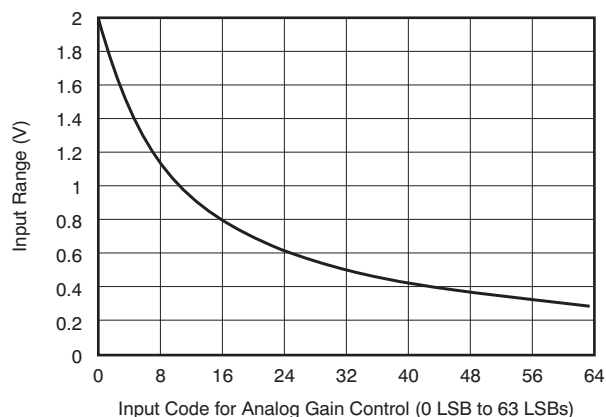


Figure 13. Input Range vs Analog Gain Setting Code

## DIGITAL PROGRAMMABLE GAIN (DPG)

The VSP5610/11/12 provide a maximum digital gain of 2 V/V. The total gain is fixed by the combination of CDS/SH analog gain (APG) and digital gain (DPG). DPG is controlled by an 8-bit internal register (DPG\_x) that can set the gain from 1 V/V to 2 V/V, as defined by Equation 2. This register is included in each of the four channels, so the gain of each channel can be set independently.

Figure 14 shows the relationship between the digital gain and register code. Note that the default value is 1 V/V.

$$\text{DPG (V/V)} = \frac{1}{256} \times \text{Code} + 1 \quad (\text{Code} = 0 \text{ LSB to } 255 \text{ LSB}) \quad (2)$$

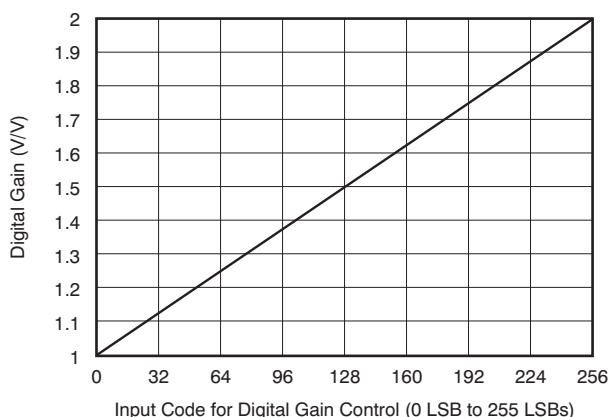


Figure 14. Digital Gain Setting Code

## ADC

The ADC output format is selectable as twos complement or offset binary by configuring a register. [Table 7](#) shows the relationship between register setting and condition.

**Table 7. ADC Data Format Configuration**

ADC_DAT_FRM	MODE
0 (default)	Twos complement
1	Offset binary

## OFFSET DAC

The VSP5610/11/12 have an independent DAC in each channel for offset level correction of the input signal. The correction range is  $\pm 250$  mV and resolution is 8 bits. The DAC output voltage can be set by register settings. [Table 8](#) and [Figure 15](#) show the relationship between the output and setting codes. The setting code is defined in twos complement format. The DAC output offset voltage in millivolts as a function of the register setting is given in [Equation 3](#).

**Table 8. Offset DAC Setting Code**

SETTING CODE OFDAC_x[7:0] <sup>(1)</sup>	OUTPUT (mV)
7Fh	248.05
7Eh	246.09
...	...
01h	1.95
00h	0
FFh	–1.95
...	...
81h	–248.05
80h	–250.00


(1) x = 1, 2, 3, and 4.

$$\text{DAC Output (mV)} = \frac{250}{128} \times \text{OFDAC\_x}[7:0]$$

where:

x = 1, 2, 3, and 4

(3)

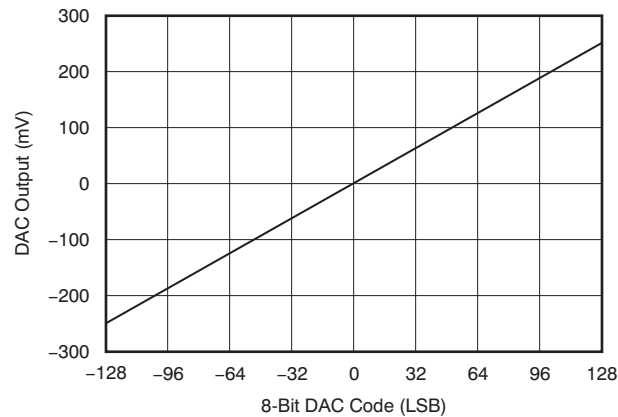

**Figure 15. Offset DAC Setting Code vs Output Voltage**

## TIMING GENERATOR (TG)

The image sensor timing generator (TG) is incorporated into these devices. The TG provides six signals that function as slow transfer clocks and eight signals that function as fast transfer clocks. In addition, the fast clock signals can also be used as slow clock signals. The TG signals are synchronized with LS (which is the image sensor line cycle) and are completely controlled by the internal registers. Because the TG output is locked under the default setting, EN\_OUT (address 2, bit 10) should be set to '1' to enable the outputs.

### LINE SYNCHRONOUS FUNCTION

The VSP5610/11/12 have two modes for synchronizing the sensor line cycle: internal line (Figure 16) and external line synchronous mode (Figure 17). In internal line synchronous mode, the line cycle signal (LS) is generated after a certain number of MCLK cycles that are counted by an internal counter (PIX\_CNT). The number of MCLK cycles is determined by the LINT[19:0] register; the counter clears after LS is generated. The active LS period is equal to one MCLK cycle period.

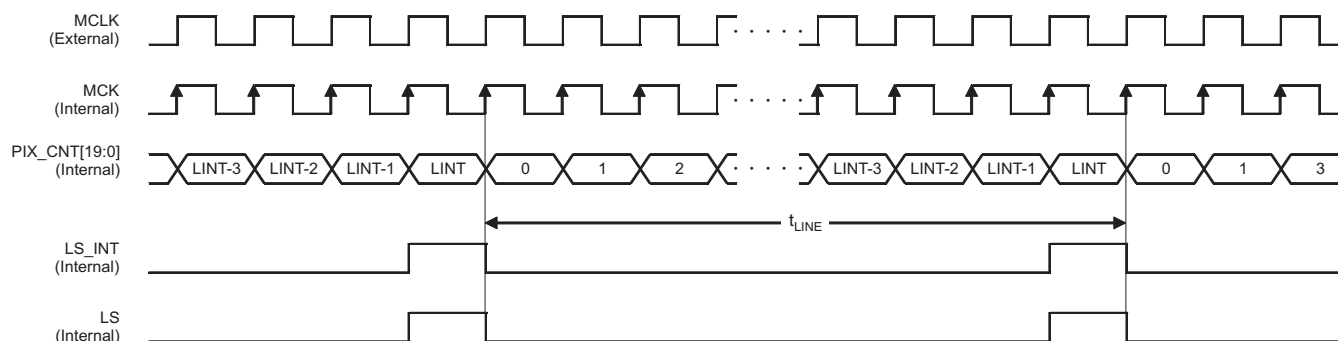


Figure 16. Internal Line Synchronous Mode (XLSYNC\_SEL = 1)

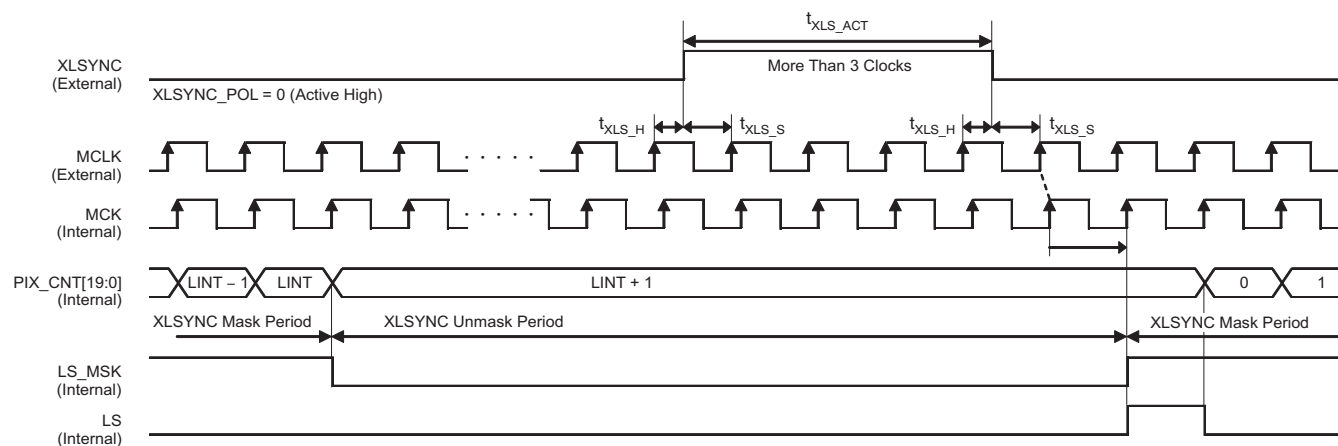


Figure 17. External Line Synchronous Mode (XLSYNC\_SEL = 0, default)

Table 9. Timing Requirements for Figure 16 and Figure 17

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
$t_{LINE}$	Line cycle period setting	3	LINT + 1	$2^{20} - 1$	Clocks
$t_{XLS\_ACT}$	XLSYNC active period	3			Clocks
$t_{XLS\_S}$	XLSYNC setup to MCLK	10			ns
$t_{XLS\_H}$	XLSYNC hold to MCLK	10			ns

The other mode is the external line synchronous mode which requires an external signal (XLSYNC). In this mode, if the logic circuit detects an active XLSYNC period for more than three MCLK cycles, the internal line synchronous signal (LS) is generated. This mode has a function that mask XLSYNC in order to avoid noise interference. The duration of the XLSYNC mask can be set by the LINT[19:0] register, which is also used in the internal line synchronous mode.

The two line synchronous modes and the polarity can be selected by the XLSYNC\_SEL and XLSYNC\_POL registers, respectively. The default settings are external mode and active high polarity. XLSYNC can be used to output some internal signals. Table 10 shows the register settings required to select the desired output signals.

PIX\_CNT can be automatically reset by LS\_CNT\_RST (which is an internal register). Before performing this function, a software reset must be executed in order set RST\_ALL to '1'. If LS\_CNT\_RST is set to '1' after a software reset, the pixel counter is then held at '0'. To make the counter active, LS\_CNT\_RST should return to '0'.

**Table 10. XLSYNC Output Signal (XLSYNC\_SEL = 1)**

REGISTER SETTING XLSYNC_OUT	OUTPUT SIGNAL
0	LS
1	CLPDM
2	Reserved
3	Reserved

## **SLOW TRANSFER CLOCK SETTING (XST, XSHn, XCLR)**

XST, XSHn (where n = 1 to 4), and XCLR are slow transfer clocks that can be configured by setting the initial polarity and toggle points. As shown in Table 11, the predetermined number of toggle points is different for each signal. Because the two toggles generate one pulse, the number of pulses is half the number of toggles.

**Table 11. Toggle Number and Generated Pulse**

SIGNAL	TOGGLE	PULSE
XST	8	4
XSHn	16	8
XCLR	48	24

Each toggle position is defined by a register that is exclusive for each signal. The toggle position is synchronized with LS and the gap between the toggle position and the LS falling edge. The LS falling edge is defined in terms of  $t_{MCLK}$ , the cycle period of MCLK. This gap is set by register settings and is defined by Equation 4:

$$t = (Xn\_T(k) + 1) \times t_{MCLK}$$

where:


$n = ST, SHn, CLR$

$k = 0 \text{ to } 7 \text{ (XST)}; k = 0 \text{ to } 15 \text{ (XSHn)}; k = 0 \text{ to } 47 \text{ (XCLR)}$

$Xn\_T(k)$  is less than LINT and is the register value of the toggle setting

(4)

The toggle for each signal can be disabled with register settings. To make the toggle active,  $Xn\_TGL\_EN$  should be set to '1'. However, because XST shares a pin with GPIO3, pin function should be configured with the GPIO3\_XST\_SEL register. Figure 18 shows the configuration regarding the slow transfer clock.

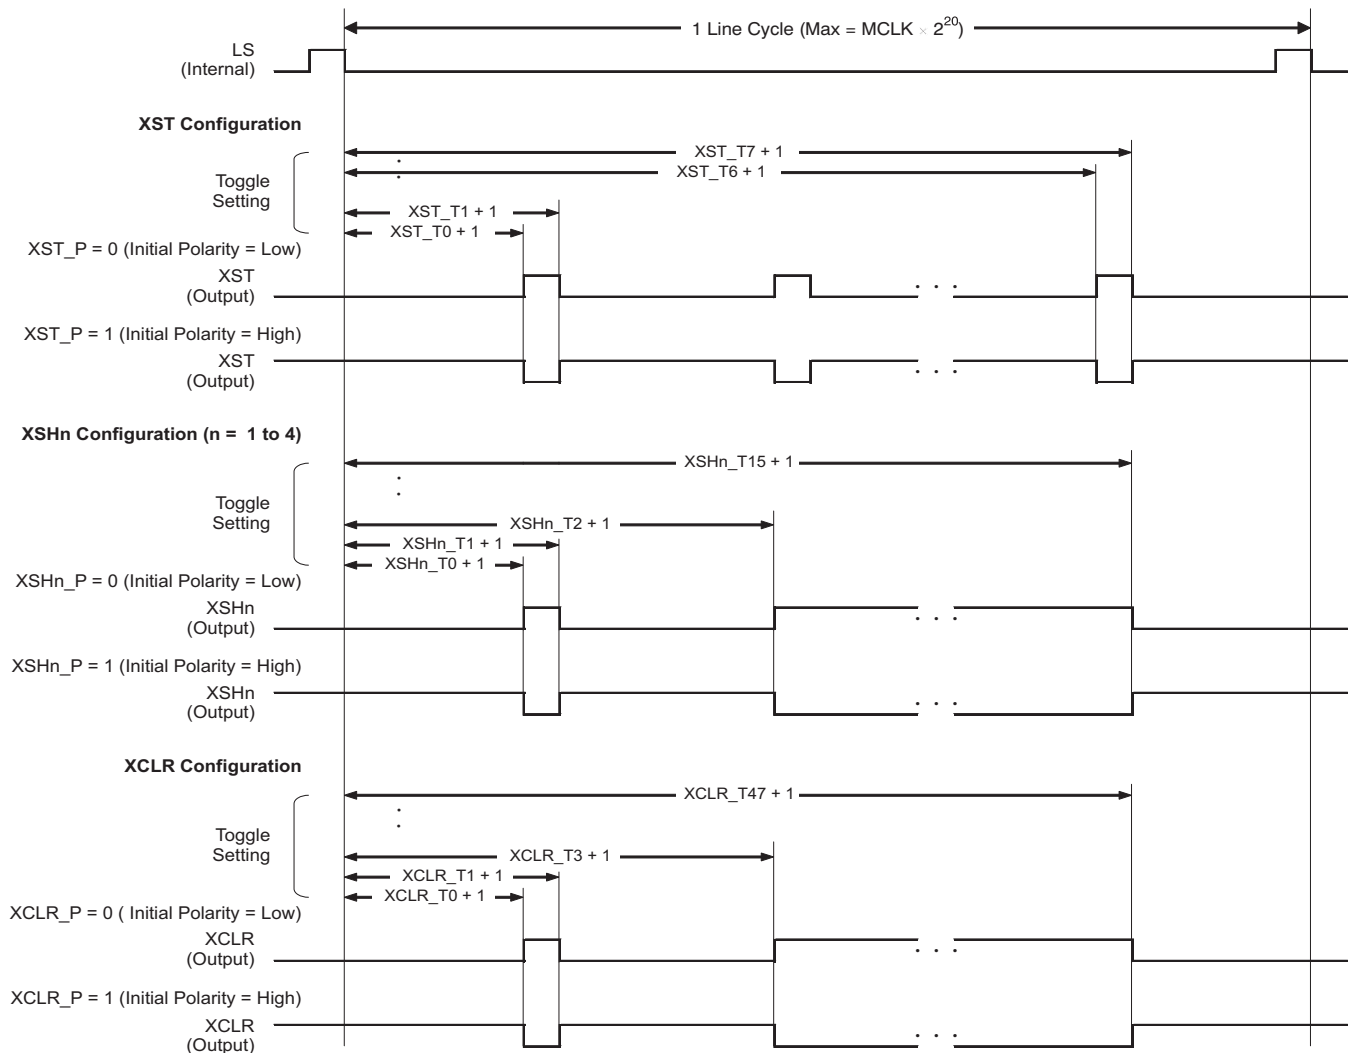

- (1) If  $Xn\_Tn$  is set to '0', the toggle position is ignored (except for  $Xn\_T0$ ).
- (2) The period between the toggle position and LS falling edge =  $(Xn\_T(k) + 1) \times t_{MCLK}$ .
- (3) The following requirement must be satisfied:  $Xn\_T(k) < Xn\_T(k + 1)$ .
- (4) The signal is set to the desired polarity settings at the falling edge of LS.

**Figure 18. Slow Transfer Gate Signal Setting for XST, XSHn, and XCLR**

## FAST TRANSFER CLOCK PULSE SETTING

XP1/2, X1L, X2L, XRS, XCP, and XP3/4 are fast transfer clock signals with rising and falling edges that are configurable via register settings. Figure 19 shows the block diagram of the fast clock configuration. In Figure 19, the *DLL Tap Selector* is used to select both the rising and the falling edges of each signal from among 48 tap positions.

The XP2 clock signal is an inverse of XP1 and shares rising and falling edge settings. Similarly, XP4 is an inverse of XP3 and likewise shares rising and falling edge settings. The other signals have individual configuration registers for setting the position of both edges.

In addition, it is possible to change the clock rate of each signal with register settings. The clock rate is based on the frequency of MCLK. XP1 and XP2 can select x1, x2, or x4 modes with common settings. XP3 and XP4 can also select x1, x2, or x4 modes with common settings. The other signals can choose between the x1 and x2 rate settings.

Note that two independent sets of registers are available to set the clock rate, the clock rising edge, and the clock falling edge for operation in x1-mode and x2-mode.

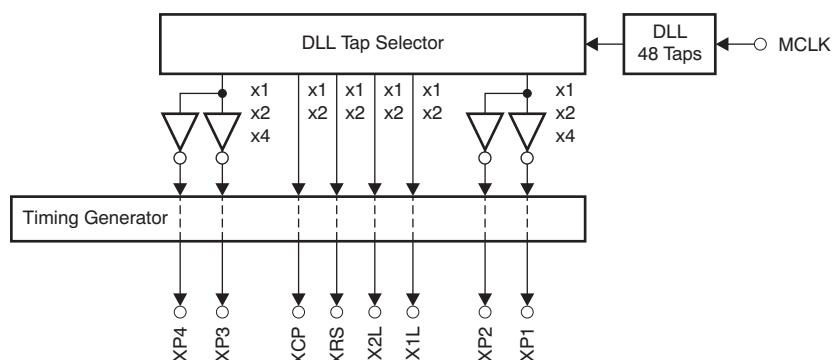


Figure 19. Fast Transfer Clock Pulse Generator

## Fast Transfer Clock Pulse Timing

This section describes the timing of the fast transfer clock pulse for XRS (Figure 20), XCP (Figure 21), XP1 and XP2 (Figure 22), XP3 and XP4 (Figure 23), and X1L and X2L (Figure 24).


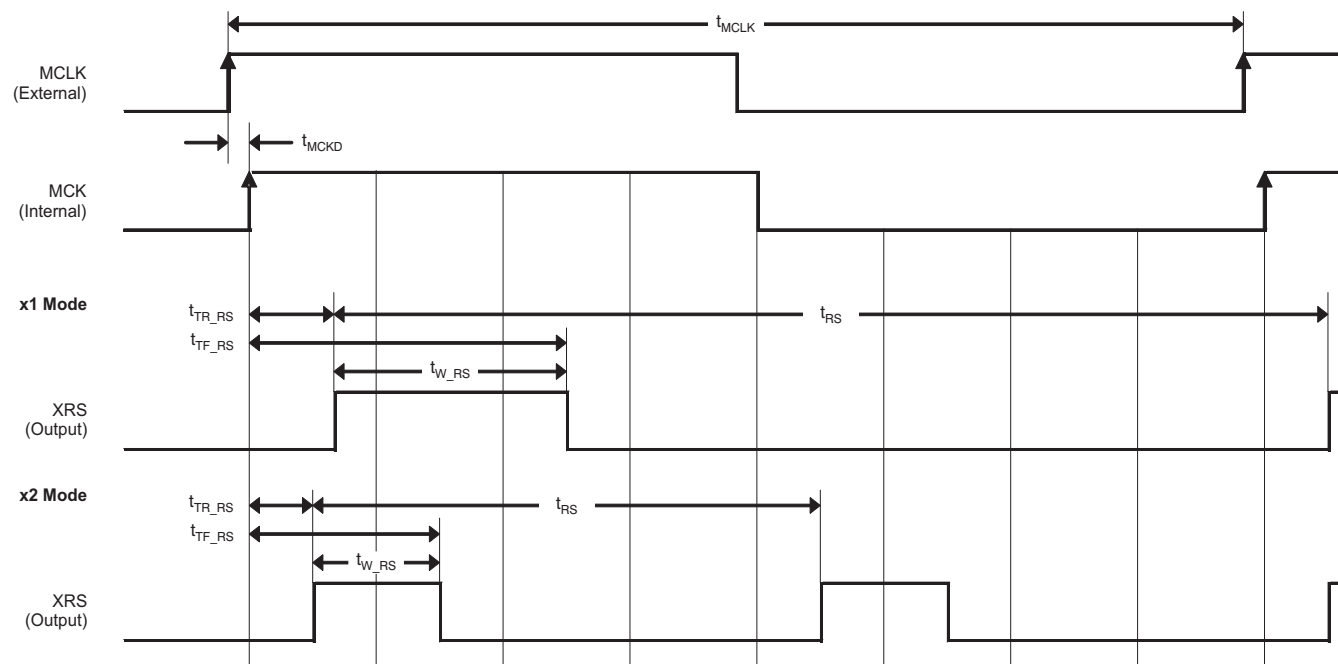


Figure 20. XRS Fast Transfer Clock Pulse Setting

Table 12. Timing Requirements for Figure 20

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{MCLK}$	MCLK frequency	VSP5610	1	11.66	MHz
		VSP5611	1	16.66	MHz
		VSP5612	1	23.33	MHz
$t_{MCLK}$	MCLK period		$1/f_{MCLK}$		ns
$t_{MCKD}$	MCLK to MCK delay		2		ns
$t_{RS}$	XRS period	x1 mode	$t_{MCLK}$		ns
		x2 mode	$t_{MCLK} \times 1/2$		ns
$t_{TR\_RS}$	XRS rising edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$	ns
		x2 mode	0	$t_{MCLK} \times 23/24$	ns
$t_{TF\_RS}$	XRS falling edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$	ns
		x2 mode	0	$t_{MCLK} \times 23/24$	ns
$t_{W\_RS}$	XRS pulse width	x1 mode	2	$t_{MCLK} - 2$	ns
		x2 mode	2	$t_{MCLK} \times 1/2 - 2$	ns



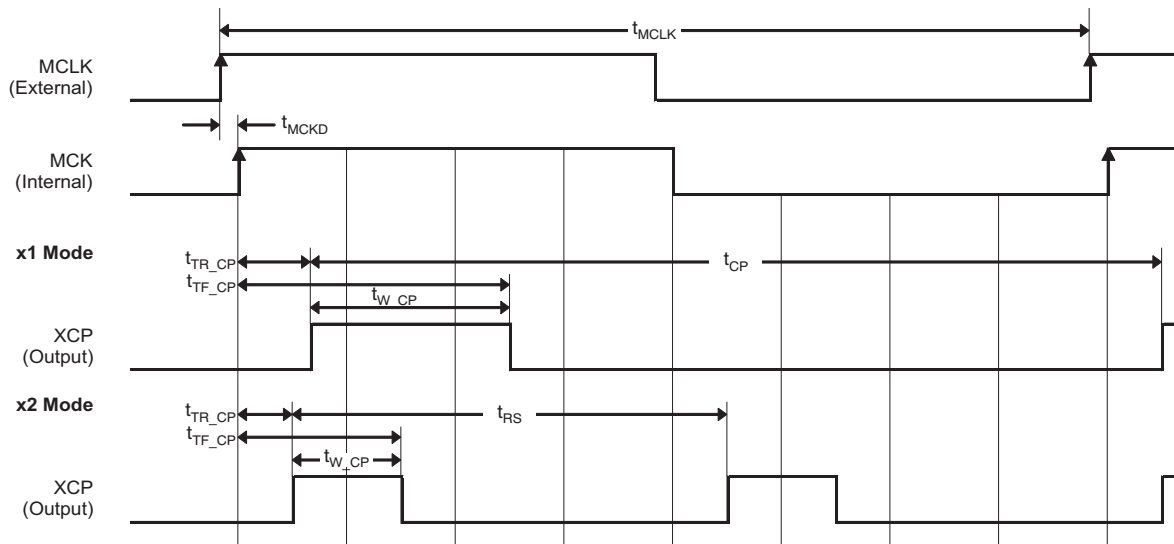

**Figure 21. XCP Fast Transfer Clock Pulse Setting**

**Table 13. Timing Requirements for Figure 21**

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{MCLK}$	MCLK frequency	VSP5610	1		11.66	MHz
		VSP5611	1		16.66	MHz
		VSP5612	1		23.33	MHz
$t_{MCLK}$	MCLK period			$1/f_{MCLK}$		ns
$t_{MCKD}$	MCLK to MCK delay			2		ns
$t_{CP}$	XCP period	x1 mode		$t_{MCLK}$		ns
		x2 mode		$t_{MCLK} \times 1/2$		ns
$t_{TR\_CP}$	XCP rising edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$		ns
		x2 mode	0	$t_{MCLK} \times 23/24$		ns
$t_{TF\_CP}$	XCP falling edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$		ns
		x2 mode	0	$t_{MCLK} \times 23/24$		ns
$t_{W\_CP}$	XCP pulse width	x1 mode	2	$t_{MCLK} - 2$		ns
		x2 mode	2	$t_{MCLK} \times 1/2 - 2$		ns

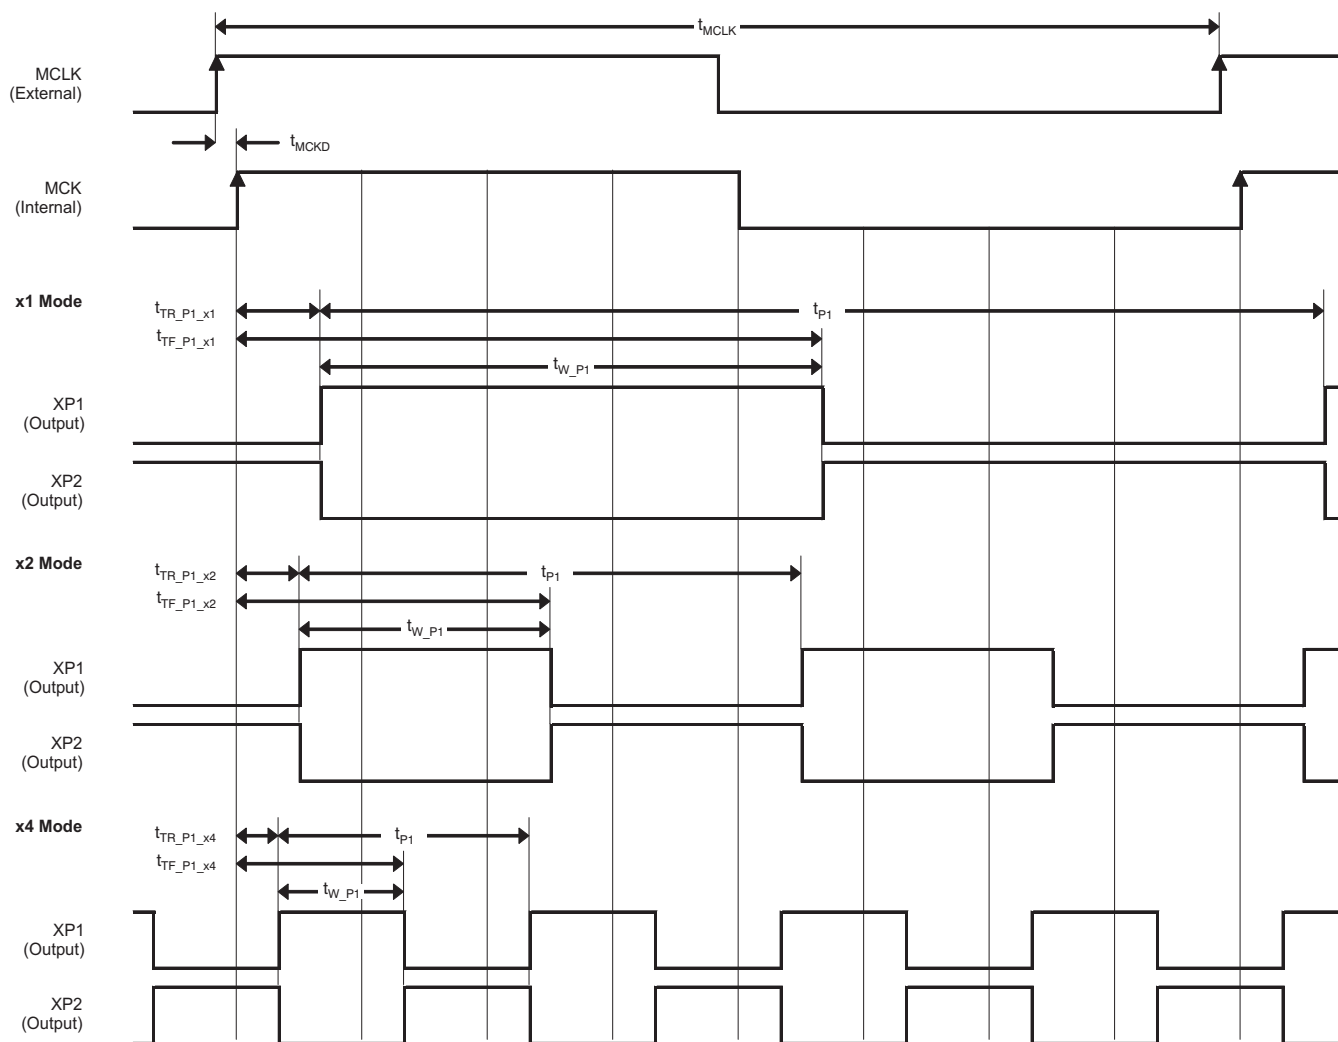


Figure 22. XP1 and XP2 Fast Transfer Clock Pulse Setting

**Table 14. Timing Requirements for Figure 22**

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{MCLK}$	MCLK frequency	VSP5610	1		11.66	MHz
		VSP5611	1		16.66	MHz
		VSP5612	1		23.33	MHz
$t_{MCLK}$	MCLK period			$1/f_{MCLK}$		ns
$t_{MCKD}$	MCLK to MCK delay			2		ns
$t_{Pn}$	XP1, XP2 period	x1 mode		$t_{MCLK}$		ns
		x2 mode		$t_{MCLK} \times 1/2$		ns
		x4 mode		$t_{MCLK} \times 1/4$		ns
$t_{TR\_P\_x1}$	XP1, XP2 rising edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$		ns
$t_{TR\_P\_x2}$		x2 mode	0	$t_{MCLK} \times 23/24$		ns
$t_{TR\_P\_x3}$		x4 mode	0	$t_{MCLK} \times 11/12$		ns
$t_{TF\_P\_x1}$	XP1, XP2 falling edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$		ns
$t_{TF\_P\_x2}$		x2 mode	0	$t_{MCLK} \times 23/24$		ns
$t_{TF\_P\_x3}$		x4 mode	0	$t_{MCLK} \times 11/12$		ns
$t_{W\_P1}$	XP1, XP2 pulse width	x1 mode	2	$t_{MCLK} - 2$		ns
		x2 mode	2	$t_{MCLK} \times 1/2 - 2$		ns
		x4 mode	2	$t_{MCLK} \times 1/4 - 2$		ns


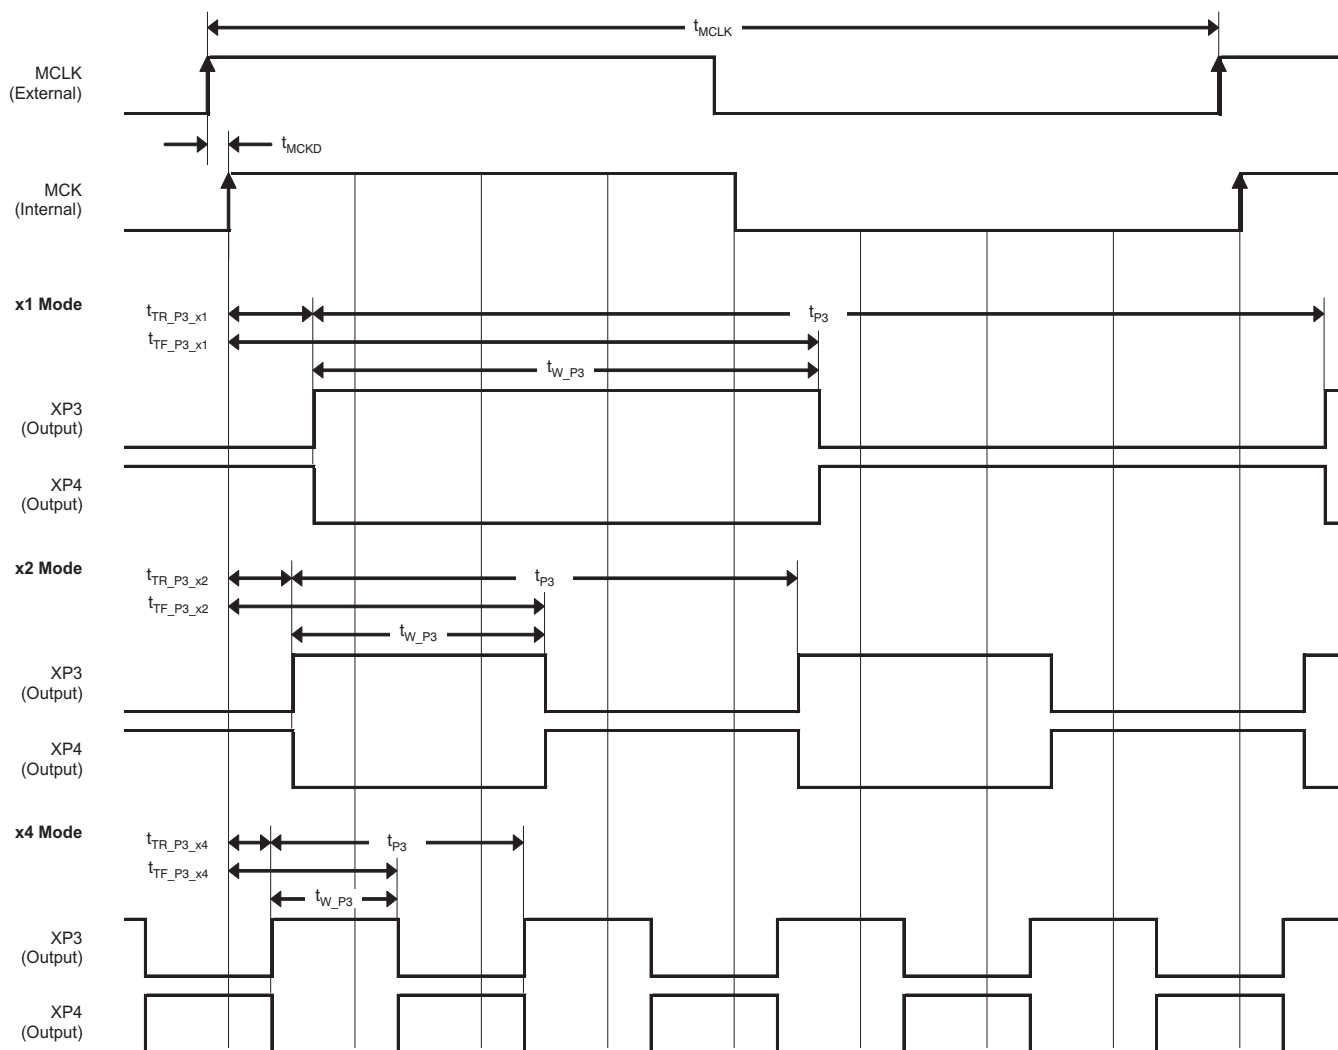


Figure 23. XP3 and XP4 Fast Transfer Clock Pulse Setting

**Table 15. Timing Requirements for Figure 23**

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{MCLK}$	MCLK frequency	VSP5610	1		11.66	MHz
		VSP5611	1		16.66	MHz
		VSP5612	1		23.33	MHz
$t_{MCLK}$	MCLK period			$1/f_{MCLK}$		ns
$t_{MCKD}$	MCLK to MCK delay			2		ns
$t_{P3}$	XP3, XP4 period	x1 mode		$t_{MCLK}$		ns
		x2 mode		$t_{MCLK} \times 1/2$		ns
		x4 mode		$t_{MCLK} \times 1/4$		ns
$t_{TR\_P3\_x1}$	XP3, XP4 rising edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$		ns
$t_{TR\_P3\_x2}$		x2 mode	0	$t_{MCLK} \times 23/24$		ns
$t_{TR\_P3\_x3}$		x4 mode	0	$t_{MCLK} \times 11/12$		ns
$t_{TF\_P3\_x1}$	XP3, XP4 falling edge delay from MCK	x1 mode	0	$t_{MCLK} \times 47/48$		ns
$t_{TF\_P3\_x2}$		x2 mode	0	$t_{MCLK} \times 23/24$		ns
$t_{TF\_P3\_x3}$		x4 mode	0	$t_{MCLK} \times 11/12$		ns
$t_{W\_P3}$	XP3, XP4 pulse width	x1 mode	2	$t_{MCLK} - 2$		ns
		x2 mode	2	$t_{MCLK} \times 1/2 - 2$		ns
		x4 mode	2	$t_{MCLK} \times 1/4 - 2$		ns

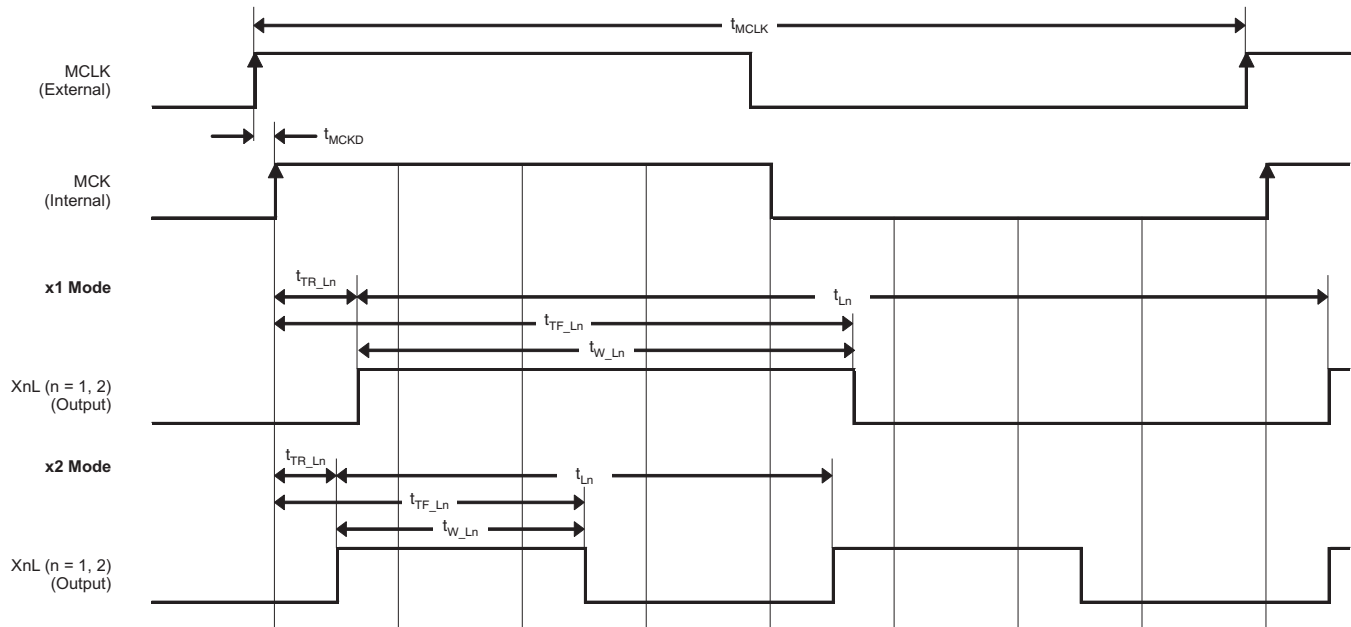

**Figure 24. X1L and X2L Fast Transfer Clock Pulse Setting**

**Table 16. Timing Requirements for Figure 24**


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$f_{MCLK}$	MCLK frequency	VSP5610	1	11.66	MHz
		VSP5611	1	16.66	MHz
		VSP5612	1	23.33	MHz
$t_{MCLK}$	MCLK period		$1/f_{MCLK}$		ns
$t_{MCKD}$	MCLK to MCK delay		2		ns
$t_{Ln}$	XLn period (n = 1,2)	x1 mode	$t_{MCLK}$		ns
		x2 mode	$t_{MCLK} \times 1/2$		ns
$t_{TR\_Ln}$	XLn rising edge delay from MCK (n = 1,2)	x1 mode	0	$t_{MCLK} \times 47/48$	ns
		x2 mode	0	$t_{MCLK} \times 23/24$	ns
$t_{TF\_Ln}$	XLn falling edge delay from MCK (n = 1,2)	x1 mode	0	$t_{MCLK} \times 47/48$	ns
		x2 mode	0	$t_{MCLK} \times 23/24$	ns
$t_{W\_Ln}$	XLn pulse width (n = 1,2)	x1 mode	2	$t_{MCLK} - 2$	ns
		x2 mode	2	$t_{MCLK} \times 1/2 - 2$	ns

## SERIAL INTERFACE

All device functions and settings are controlled through the serial interface. The serial interface consists of three signals (SCLK, SEN, and SDI) for register writing, and a fourth signal (SDO) for readback. SDO shares the terminal with the GPIO signal; thus, a register setting is required to activate the SDO function. Other signals are assigned to individual terminals.

Serial data are composed of 30 bits total, as shown in Figure 25. 10 bits are assigned for the register address and 20 bits for register data. The input serial data at SDI are sequentially stored in a shift register at the SCLK rising edge. Data shift operation is performed at the SCLK rising edges with SEN low. All 30 input data bits are loaded to a parallel latch in an internal register at the rising edge of SEN.


This device has two modes: read and write. The mode selection can be made via the SPL\_RW internal register, located at bit 0 of address 0. SPL\_RW = 0 implies a write mode and SPL\_RW = 1 implies read mode.

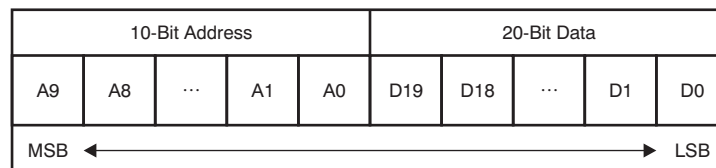

**Figure 25. Serial I/F Data Format**

### WRITE MODE (SPL\_RW = 0, Default)

Normally, one serial interface command is sent by one address and data combination. The address should be sent MSB first. Data are stored into the respective register, as indicated by the address. If the serial data at the end of the data stream are less than 30 bits, the last incomplete serial data are discarded. Figure 26 shows the SPI signal flow while in write mode.

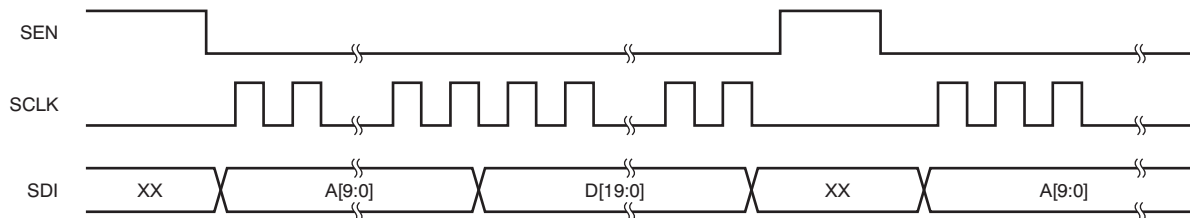


**Figure 26. SPI Signal Flow of Write Mode**


## READ MODE (SPI\_RW = 1)

In read mode, two types of connections are possible between the AFE and external systems such as an ASIC or CPU. One connection is the four-wire connection in which the SDI and SDO pins are separately connected to the system as shown in [Figure 27a](#).


The other connection is a three-wire connection in which only the SDI pin is connected to the bidirectional I/O port of the external system, as shown in [Figure 27b](#). In this case, SDI\_BUFF\_CTRL should be set to '1' to create an SPI bidirectional port. The bit flow of the four-wire connection is shown in [Figure 28](#). The bit flow of the three-wire connection is shown in [Figure 29](#). As shown in [Figure 29](#), SDI changes from an input to an output at the SCLK falling edge after the end of the A[9:0] input. Because the SDI port is always in pull down mode, the external pull down resistance is unnecessary.

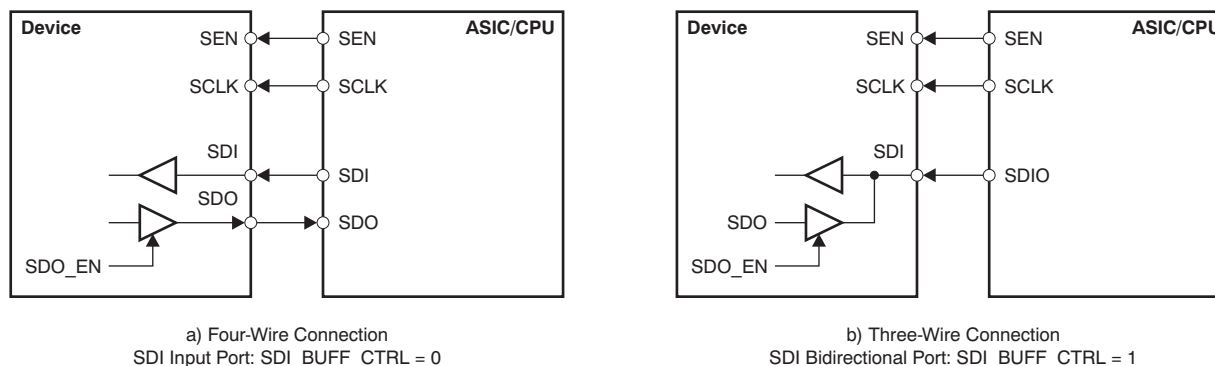

**Figure 27. SPI Connection Between AFE and System**

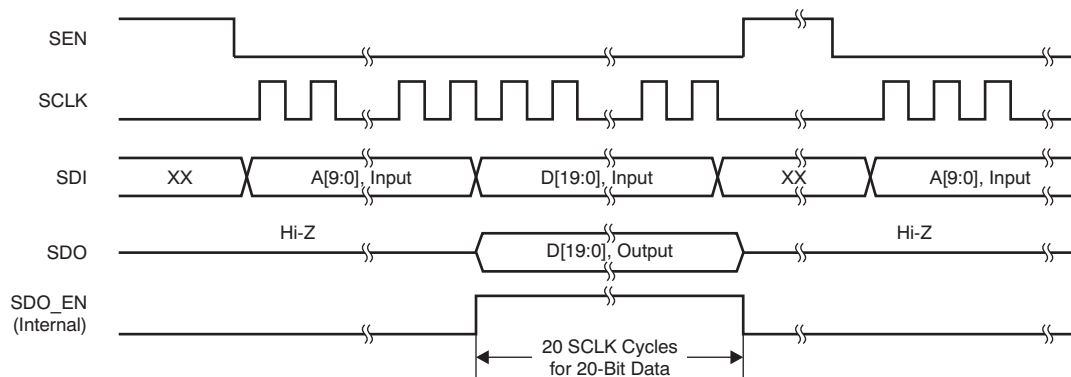

**Figure 28. SPI Signal Flow of Read Mode for Four-Wire Connection**

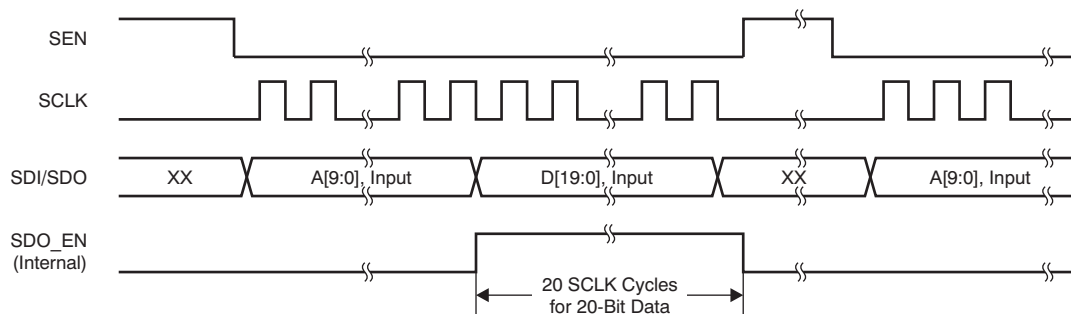

**Figure 29. SPI Signal Flow of Read Mode for Three-Wire Connection**



## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">VSP5610RSHR</a>	Active	Production	VQFN (RSH)   56	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	0 to 85	VSP 5610
VSP5610RSHR.A	Active	Production	VQFN (RSH)   56	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	0 to 85	VSP 5610
<a href="#">VSP5611RSHR</a>	Active	Production	VQFN (RSH)   56	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	0 to 85	VSP 5611
VSP5611RSHR.A	Active	Production	VQFN (RSH)   56	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	0 to 85	VSP 5611
<a href="#">VSP5612RSHR</a>	Active	Production	VQFN (RSH)   56	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	0 to 85	VSP 5612
VSP5612RSHR.A	Active	Production	VQFN (RSH)   56	2500   LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	0 to 85	VSP 5612

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**RSH 56**

**GENERIC PACKAGE VIEW**

**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

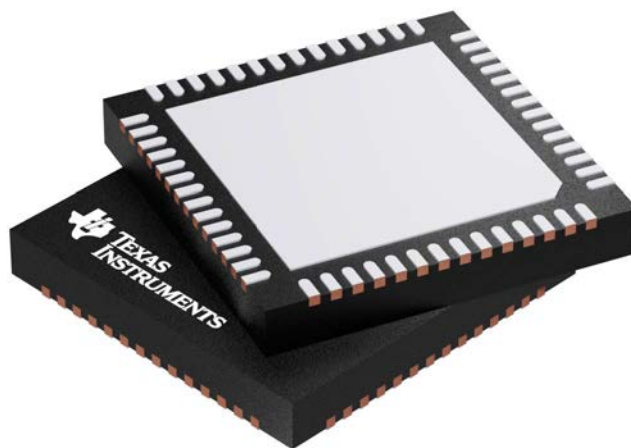


Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4207513/D

RSH (S-PVQFN-N56)

PLASTIC QUAD FLATPACK NO-LEAD

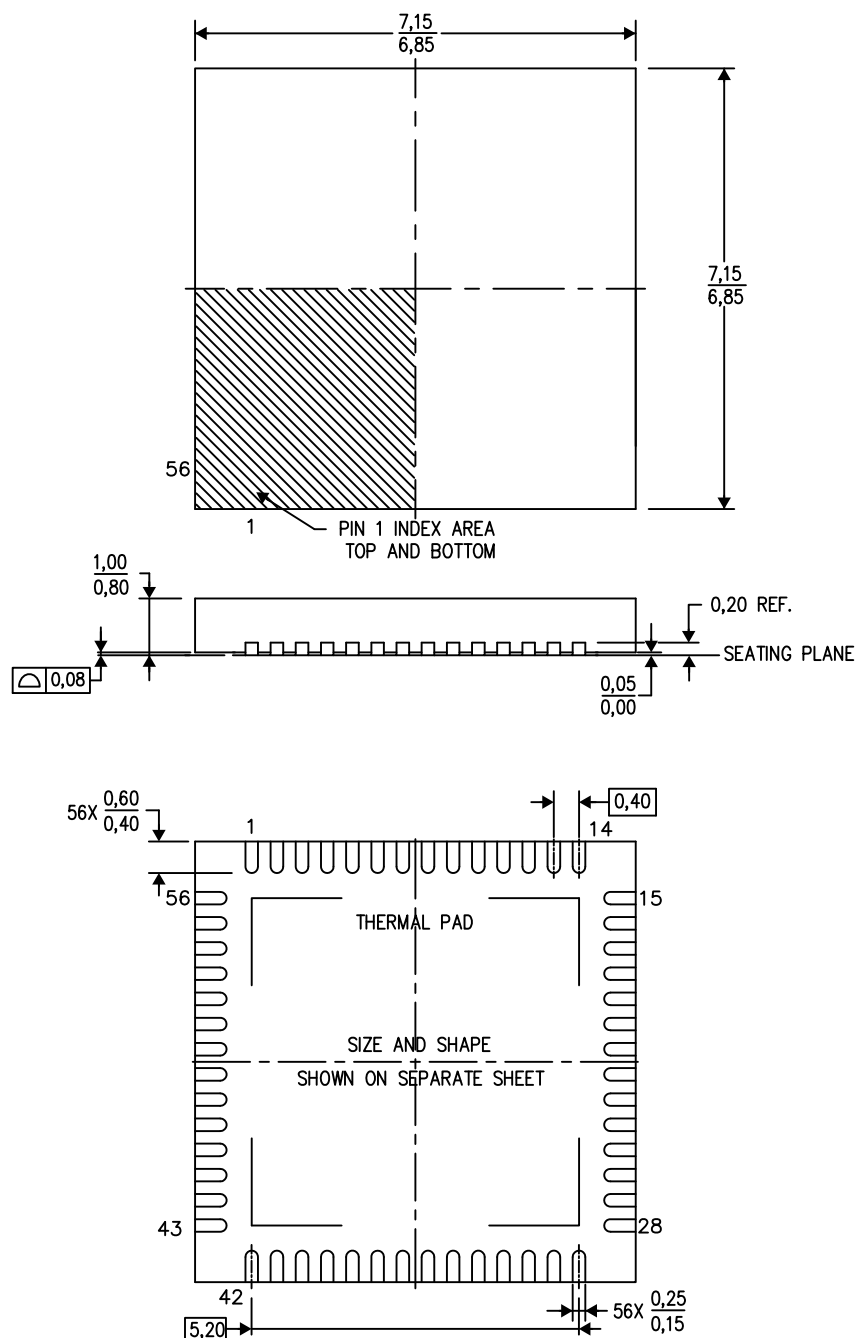

4207513/C 03/13

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Quad Flatpack, No-leads (QFN) package configuration.
  - D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
  - E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.

RSH (S-PVQFN-N56)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

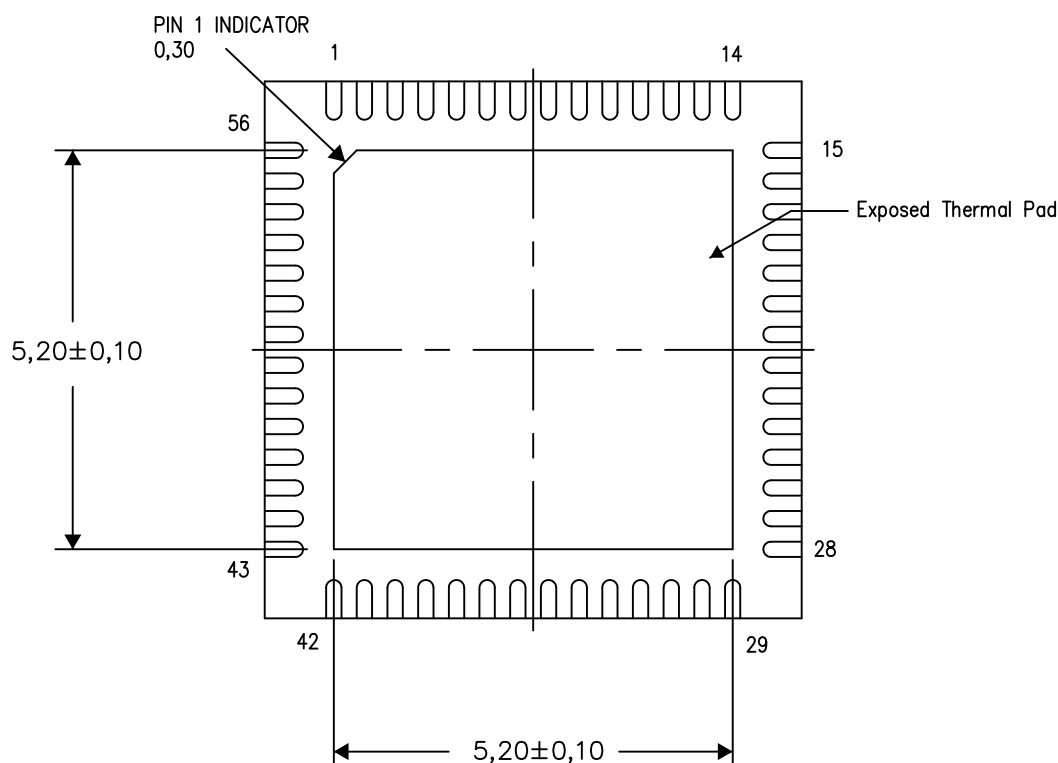

Bottom View


Exposed Thermal Pad Dimensions

4207553-2/1 07/13

NOTE: All linear dimensions are in millimeters

RSH (S-PVQFN-N56)

PLASTIC QUAD FLATPACK NO-LEAD

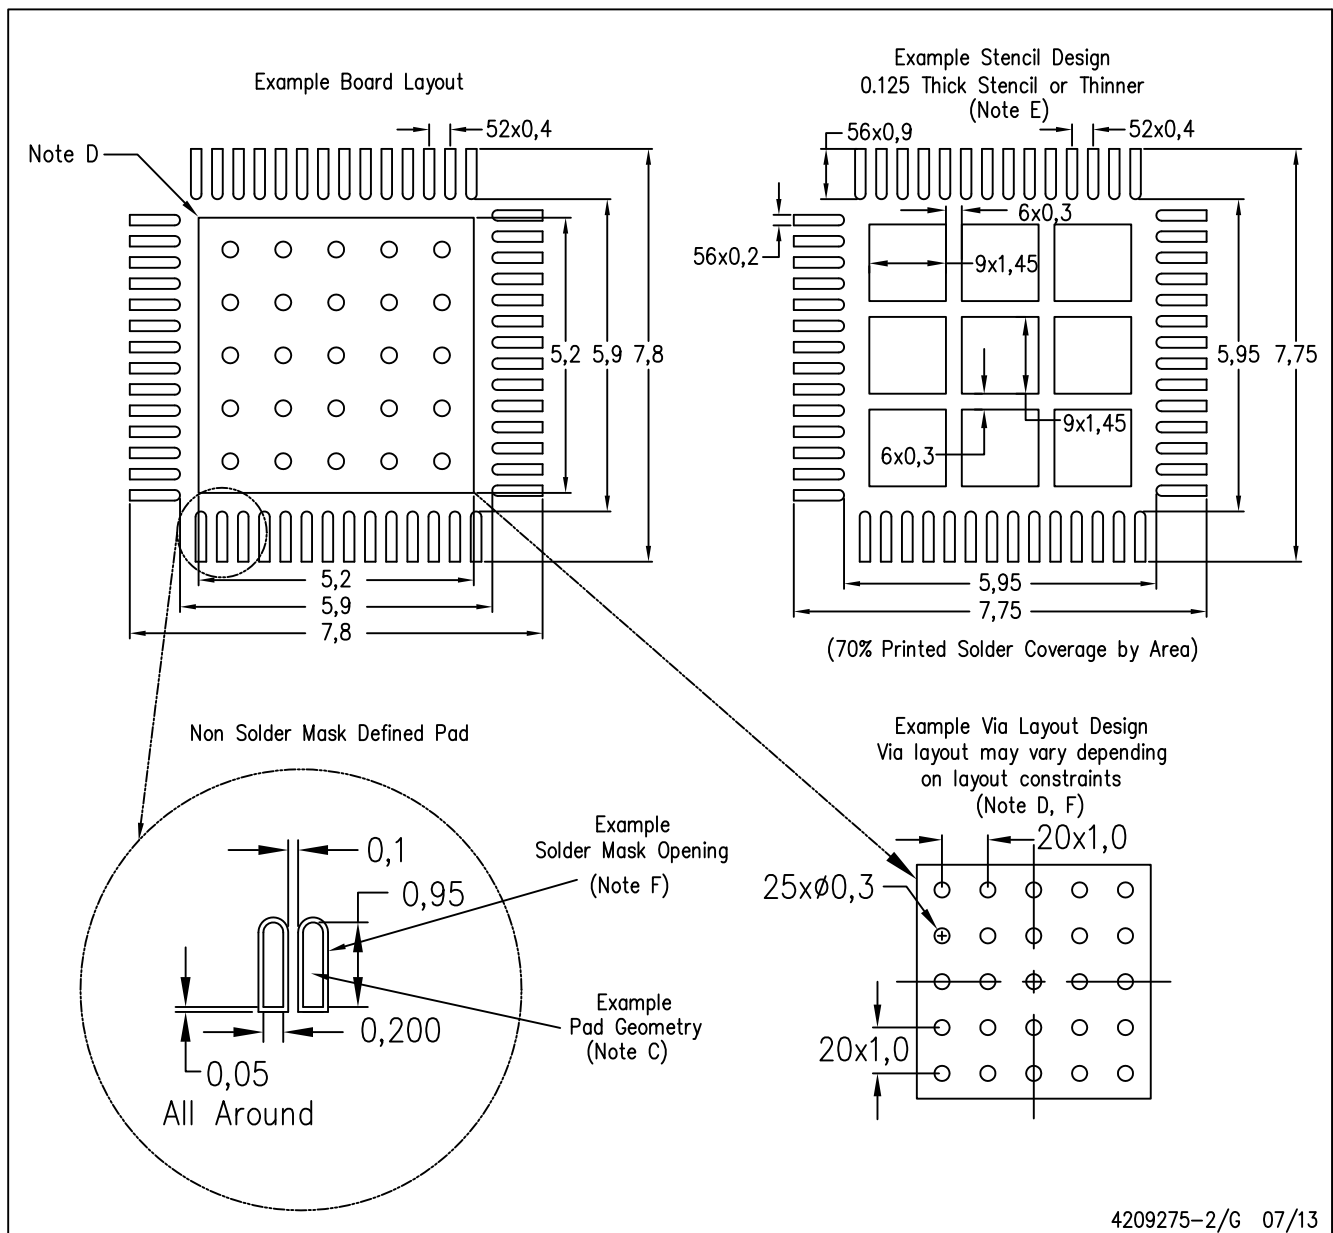

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Publication IPC-7351 is recommended for alternate designs.
  - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
  - Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月