

# TLV841 Small Size Nano-Power Voltage Supervisor in WCSP Package

## 1 Features

Designed for high performance:

- Nano quiescent current: 125nA (typical)
- High threshold accuracy:  $\pm 0.5\%$  (typical)
- Built-in precision hysteresis ( $V_{HYS}$ ): 5% (typical)

Designed for a wide range of applications:


- Operating voltage range: 0.7V to 5.5V
- Adjustable threshold voltage: 0.505V (typical)
- Fixed ( $V_{IT.}$ ) voltage: 0.8V to 4.9V in 0.1V steps
- Separate SENSE pin (TLV841S)
- Active-low manual reset ( $\overline{MR}$ ) (TLV841M)
- Push-button monitoring for TLV841 (S/M variants)
- Reset time delay ( $t_D$ ): Capacitor-based programmable (TLV841C)
  - Minimum time delay: 40 $\mu$ s (typical) without capacitor
- Reset time delay ( $t_D$ ): Fixed time delay options (TLV841M and TLV841S)
  - 40 $\mu$ s, 2ms, 10ms, 30ms, 50ms, 80ms, 100ms, 150ms, 200ms
- Temperature range:  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$

Multiple output topologies, package type:

- TLV841xxDL: open-drain, active-low ( $\overline{\text{RESET}}$ )
- TLV841xxPL: push-pull, active-low ( $\overline{\text{RESET}}$ )
- TLV841xxDH: open-drain, active-high (RESET)
- TLV841xxPH: push-pull, active-high (RESET)
- Package: 0.73mm  $\times$  0.73mm DSBGA

## 2 Applications

- [Personal electronics including wearables and hearing devices](#)
- [Home theater and entertainment](#)
- [Electronic point of sale](#)
- [Grid infrastructure](#)
- [Data center and enterprise computing](#)

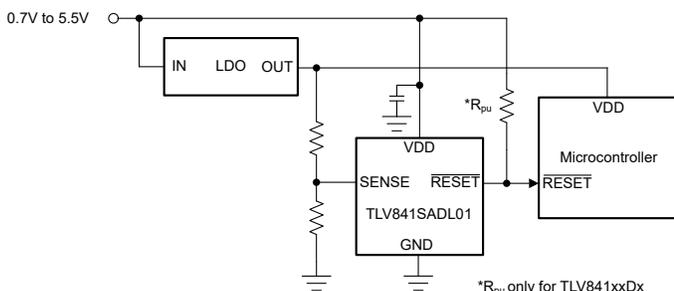

Typical Application Circuit

## 3 Description


TLV841 is a nano power, precision voltage supervisor with  $\pm 0.5\%$  threshold accuracy in an ultra-small DSBGA package. The TLV841 offers three pinout variants (S, M, C) to provide many unique options in the smallest package size. Built-in hysteresis along with fixed or programmable (TLV841C) reset delay prevent false reset signals when monitoring a voltage rail or push button signals. The separate VDD and SENSE (TLV841S) pins allow for the redundancy sought by high-reliability systems. SENSE is decoupled from VDD and can monitor rail voltages other than VDD or can be used as a push-button input. TLV841M offers a separate manual reset ( $\overline{MR}$ ) pin to force a reset condition with an external signal or be used as a push button input. TLV841M can be setup for VDD and  $\overline{MR}$  pin monitoring to create a simple two-channel supervisor.

TLV841 offers precision performance, low power consumption, and best in-class features in the smallest compact form factor is focused for wide range battery powered applications such as personal and consumer products. Optional use of external resistors are supported by the high impedance input of the SENSE pin. TLV841S offers fixed reset delay timing options with no need of an external capacitor. TLV841C allows programmable reset time delay including a minimum delay when the CT pin is left floating. TLV841 operates over a temperature range of  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$  ( $T_A$ ).

### Package Information

PART NUMBER	PACKAGE (1)	PACKAGE SIZE(2)
TLV841	YBH (DSBGA, 4)	0.73mm $\times$ 0.73mm

- (1) For package details, see the mechanical drawing addendum at the end of the data sheet.
- (2) The package size (length  $\times$  width) is a nominal value and includes pins, where applicable.

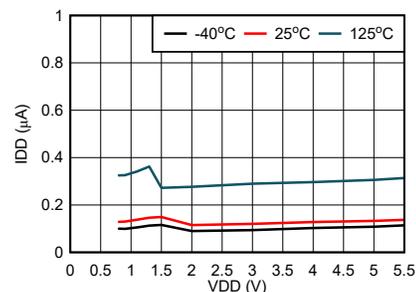

Typical Supply Current




## Table of Contents

<b>1 Features</b> .....	1	7.4 Device Functional Modes.....	19
<b>2 Applications</b> .....	1	<b>8 Application and Implementation</b> .....	20
<b>3 Description</b> .....	1	8.1 Application Information.....	20
<b>4 Device Comparison</b> .....	3	8.2 Typical Application.....	20
<b>5 Pin Configuration and Functions</b> .....	4	8.3 Power Supply Recommendations.....	22
<b>6 Specifications</b> .....	6	8.4 Layout.....	22
6.1 Absolute Maximum Ratings.....	6	<b>9 Device and Documentation Support</b> .....	24
6.2 ESD Ratings .....	6	9.1 Device Nomenclature.....	24
6.3 Recommended Operating Conditions.....	6	9.2 Documentation Support.....	24
6.4 Thermal Information.....	7	9.3 Receiving Notification of Documentation Updates....	24
6.5 Electrical Characteristics.....	8	9.4 Support Resources.....	24
6.6 Timing Requirements.....	10	9.5 Trademarks.....	25
6.7 Timing Diagrams .....	11	9.6 Electrostatic Discharge Caution.....	25
6.8 Typical Characteristics.....	13	9.7 Glossary.....	25
<b>7 Detailed Description</b> .....	14	<b>10 Revision History</b> .....	25
7.1 Overview.....	14	<b>11 Mechanical, Packaging, and Orderable Information</b> .....	25
7.2 Functional Block Diagram.....	14		
7.3 Feature Description.....	14		

## 4 Device Comparison

Figure 4-1 shows the device naming nomenclature to compare the different device variants. See Table 9-1 for a more detailed explanation. Please contact Texas Instruments for availability of variant options.

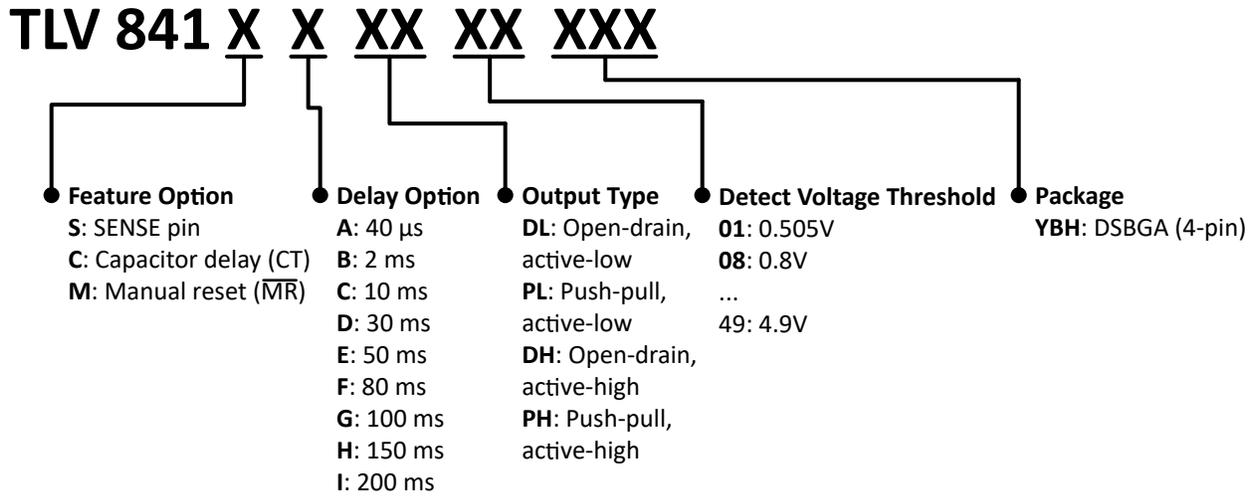

**Figure 4-1. Device Naming Nomenclature**

## 5 Pin Configuration and Functions




Figure 5-1. YBH 4-Pin DSBGA Package (TLV841S) Top View




Figure 5-2. YBH 4-Pin DSBGA Package (TLV841C) Top View




Figure 5-3. YBH 4-Pin DSBGA Package (TLV841M) Top View

Table 5-1. Pin Functions

PIN NO.	PIN			TYPE <sup>(1)</sup>	DESCRIPTION
	TLV841S	TLV841C	TLV841M		
A1	RESET	RESET	RESET	O	<b>Active-Low Output Reset Signal for TLV841xxxL:</b> This pin is driven logic low when VDD and SENSE voltage falls below the negative voltage threshold ( $V_{IT-}$ ) or when the MR voltage falls below the logic low threshold. RESET remains logic low (asserted) until MR is above the logic high threshold or for the duration of the delay time period ( $t_D$ ) after VDD or SENSE voltage rises above $V_{IT-} + V_{HYS}$
A1	RESET	RESET	RESET	O	<b>Active-High Output Reset Signal for TLV841xxxH:</b> This pin is driven logic high when VDD or SENSE voltage falls below the negative voltage threshold ( $V_{IT-}$ ) or when the MR voltage falls below the logic low threshold. RESET remains logic high (asserted) until MR is above the logic high threshold or for the duration of the delay time period ( $t_D$ ) after VDD or SENSE voltage rises above $V_{IT-} + V_{HYS}$
A2	VDD	VDD	VDD	I	<b>Input Supply Voltage:</b> The VDD pin connects to the power supply to power the device. TLV841C and TLV841M monitor VDD voltage. TLV841S monitors SENSE only. Good analog design practice recommends placing a minimum 0.1 $\mu$ F ceramic capacitor as near as possible to the VDD pin.
B1	SENSE	–	–	I	<b>SENSE pin:</b> This pin is connected to the voltage to be monitored. When the voltage on SENSE falls below the negative threshold voltage $V_{IT-}$ , reset asserts. When the voltage on SENSE rises above the positive threshold voltage ( $V_{IT-} + V_{HYS}$ ), reset deasserts. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance.
B1	–	CT	–	I	<b>Capacitor Time Delay Pin:</b> The CT pin offers a user-programmable reset deassert delay time. Connect an external capacitor on this pin to adjust time delay. When not in use leave pin floating for the smallest fixed time delay.
B1	–	–	MR	I	<b>Manual Reset:</b> Pull this pin to a logic low to assert a reset signal in the RESET output pin (RESET signal for DL and PL option). After MR pin is left floating or pulls to logic high, the RESET output deasserts to the nominal state after the reset delay time ( $t_D$ ) expires. <b>If unused, the pin can be left floating or connected to VDD.</b>

**Table 5-1. Pin Functions (continued)**

PIN				TYPE <sup>(1)</sup>	DESCRIPTION
PIN NO.	TLV841S	TLV841C	TLV841M		
B2	GND	GND	GND	–	Ground

(1) I = input, O = output

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range, unless otherwise noted<sup>(1)</sup>

		MIN	MAX	UNIT
Voltage	VDD, SENSE (TLV841S)	-0.3	6	V
Voltage	CT (TLV841C), MR (TLV841M), RESET (TLV841xxPx), RESET (TLV841xxPx)	-0.3	V <sub>DD</sub> +0.3 <sup>(3)</sup>	V
	RESET (TLV841xxDx), RESET (TLV841xxDx)	-0.3	6	
Current	RESET, RESET		±20	mA
Operating ambient temperature <sup>(2)</sup>	T <sub>A</sub>	-40	125	°C
Storage temperature	T <sub>stg</sub>	-65	150	

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) As a result of the low dissipated power in this device, it is assumed that T<sub>J</sub> = T<sub>A</sub>.
- (3) The absolute maximum rating is (V<sub>DD</sub> + 0.3)V or 6V, whichever is smaller

### 6.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	± 2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	± 750	

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
Voltage	VDD (TLV841C, TLV841M)	0.7		5.5	V
	VDD (TLV841S)	0.85		5.5	
	VDD (TLV841xxPH)	1		5.5	
	SENSE	0		5.5	
	MR <sup>(1)</sup> , CT	0		V <sub>DD</sub>	
	RESET(TLV841xxPL), RESET (TLV841xxPH)	0		V <sub>DD</sub>	
	RESET(TLV841xxDL), RESET (TLV841xxDH)	0		5.5	
Current	RESET, RESET	-5		5	mA
T <sub>A</sub>	Operating free air temperature	-40		125	°C
C <sub>CT</sub>	CT pin capacitor range	0		10	μF

- (1) If the logic signal driving MR is less than V<sub>DD</sub>, then additional current flows into VDD and out of MR. MR pin voltage must not be higher than V<sub>DD</sub>.

## 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TLV841	UNIT
		YBH (WCSP)	
		4 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	180.8	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	1.8	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	58.0	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	0.9	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	58.0	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application note.

## 6.5 Electrical Characteristics

At  $V_{DDMIN} \leq V_{DD} \leq 5.5V$ ,  $CT = \overline{MR} = \text{Open}$ ,  $\overline{RESET}/\text{RESET}$  pull-up resistor  $R_{pull-up}^{(3)} = 100k\Omega$  to  $V_{DD}$ , output reset load  $C_{LOAD} = 10pF$  and over the operating free-air temperature range  $-40^{\circ}C$  to  $125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = 25^{\circ}C$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT	
<b>COMMON PARAMETERS</b>								
$V_{ADJ-VIT-}$	Negative-going input threshold for TLV841Sxxx01 ADJ version				0.505		V	
$V_{IT-}$	Negative-going input threshold range Fixed threshold version <sup>(1)</sup>				0.8	4.9	V	
$V_{IT-ACC}$	Negative-going input threshold accuracy	$V_{IT-} = 0.505V$ (TLV841Sxx01) or $0.8V$ to $1.7V$ (Fixed threshold)		-2.5	$\pm 0.5$	2.5	%	
		$V_{IT-} = 1.8V$ to $4.9V$ (Fixed threshold)		-2	$\pm 0.5$	2		
$V_{HYS}$	Hysteresis on $V_{IT-}$ pin	$V_{IT-} = 0.505V$ and $0.8V$		3	5	8	%	
		$V_{IT-} = 0.9V$ to $4.9V$		3	5	7		
$V_{POR}$	Power on reset voltage <sup>(2)</sup>	TLV841xxxLxx	$V_{OL(MAX)} = 300mV$ $I_{RESET(Sink)} = 15\mu A$			700	mV	
		TLV841xxxHxx	$V_{OH(MIN)} = 0.8V_{DD}$ $I_{RESET(Source)} = 15\mu A$			900		
$V_{OL}$	Low level output voltage	$V_{DD} = 0.85V$ $I_{RESET(Sink)} = 15\mu A$ $I_{RESET(Sink)} = 15\mu A$				300	mV	
		$V_{DD} = 3.3V$ $I_{RESET(Sink)} = 2mA$ $I_{RESET(Sink)} = 2mA$				300	mV	
		$V_{DD} = 5.5V$ $I_{RESET(Sink)} = 2mA$ $I_{RESET(Sink)} = 2mA$				300	mV	
$V_{OH}$	High level output voltage	$V_{DD} = 1V$ $I_{RESET(Source)} = 15\mu A$ $I_{RESET(Source)} = 15\mu A$		$0.8V_{DD}$			V	
		$V_{DD} = 1.8V$ $I_{RESET(Source)} = 500\mu A$ $I_{RESET(Source)} = 500\mu A$		$0.8V_{DD}$			V	
		$V_{DD} \geq 3.3V$ $I_{RESET(Source)} = 2mA$ $I_{RESET(Source)} = 2mA$		$0.8V_{DD}$			V	
$I_{kg(OD)}$	Open-Drain output leakage current	$V_{DD} = V_{PULLUP} = 5.5V$		$T_A = -40^{\circ}C$ to $85^{\circ}C$		10	100	nA
						10	350	
$I_{DD}$	Supply current into VDD pin	Supply current into VDD pin	$V_{DD} = 5.5V$ $V_{IT-} = 1.9V$ to $4.9V$			0.125	1	$\mu A$

## 6.5 Electrical Characteristics (continued)

At  $V_{DDMIN} \leq V_{DD} \leq 5.5V$ ,  $CT = \overline{MR} = \text{Open}$ ,  $\overline{RESET}/\text{RESET}$  pull-up resistor  $R_{\text{pull-up}}^{(3)} = 100k\Omega$  to  $V_{DD}$ , output reset load  $C_{\text{LOAD}} = 10pF$  and over the operating free-air temperature range  $-40^{\circ}C$  to  $125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = 25^{\circ}C$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>TLV841S</b>						
$I_{\text{SENSE}}$	Current into SENSE pin, fixed threshold variant	$V_{DD} = V_{\text{SENSE}} = 5.5V$ $V_{\text{IT-}} = 0.8V$ to $4.9V$		0.025	0.1	$\mu A$
	Current into SENSE pin, ADJ variant	$V_{DD} = V_{\text{SENSE}} = 5.5V$ $V_{\text{IT-}} = 0.505V$		0.025	0.05	
<b>TLV841M</b>						
$V_{\overline{MR\_L}}$	Manual reset logic low input				$0.3V_{DD}$	V
$V_{\overline{MR\_H}}$	Manual reset logic high input			$0.7V_{DD}$		V
$R_{\overline{MR}}$	Manual reset internal pull-up resistance			100		k $\Omega$
<b>TLV841C</b>						
$R_{CT}$	CT pin internal resistance		410	500	590	k $\Omega$

- (1)  $V_{\text{IT-}}$  threshold voltage range from 0.8V to 4.9V (for DL, PL, DH) and 1V to 4.9V (for PH) in 100mV steps, for released versions see Device Voltage Thresholds table.
- (2)  $V_{\text{POR}}$  is the minimum  $V_{DD}$  voltage level for a controlled output state.
- (3) Pull up resistance applicable for open drain variants


## 6.6 Timing Requirements

At  $V_{DDMIN} \leq V_{DD} \leq 5.5V$ ,  $CT = \overline{MR} = \text{Open}$ ,  $\overline{RESET}$  pull-up resistor  $R_{pull-up} = 100k\Omega$  to  $V_{DD}$ , output load is  $C_{LOAD} = 10pF$  and over the operating free-air temperature range  $-40^{\circ}C$  to  $125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = 25^{\circ}C$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$t_{P\_HL}$	Propagation detect delay for $V_{DD}$ falling below $V_{IT-}$	$V_{DD} = (V_{IT+} + 10\%)$ to $(V_{IT-} - 10\%)$ <sup>(1)</sup>		30	50	$\mu s$
$t_D$	Reset time delay (TLV841C variant)	CT pin = Open or NC		40	80	$\mu s$
		CT pin = 10nF		6.2		ms
		CT pin = 1 $\mu F$		619		ms
$t_D$	Reset time delay (TLV841S and TLV841M variant) <sup>(4)</sup>	Variant A <sup>(2)</sup>		40	80	$\mu s$
		Variant B <sup>(2)</sup>		2		ms
		Variant C <sup>(2)</sup>		10		ms
		Variant D <sup>(2)</sup>		30		ms
		Variant E <sup>(2)</sup>		50		ms
		Variant F <sup>(2)</sup>		80		ms
		Variant G <sup>(2)</sup>		100		ms
		Variant H <sup>(2)</sup>		150		ms
		Variant I <sup>(2)</sup>		200		ms
$t_{GI\_VIT-}$	Glitch immunity $V_{IT-}$	5% $V_{IT-}$ overdrive <sup>(3)</sup>		10		$\mu s$
$t_{STRT}$	Startup Delay <sup>(5)</sup>				300	$\mu s$
$t_{MR\_PW}$	Glitch immunity $\overline{MR}$ pin			500		ns
$t_{MR\_RES}$	Propagation delay from $\overline{MR}$ low to reset	$V_{DD} = 3.3V$ , $\overline{MR} < V_{MR\_L}$		1		$\mu s$
$t_{MR\_tD}$	Delay from release $\overline{MR}$ to deassert reset	$V_{DD} = 3.3V$ , $\overline{MR} = V_{MR\_L}$ to $V_{MR\_H}$		3		$\mu s$


- (1)  $t_{P\_HL}$  measured from threshold trip point ( $V_{IT-}$ ) to  $V_{OL}$  for active low variants and  $V_{OH}$  for active high variants.
- (2) Refer device nomenclature table for variant description.  $V_{DD}$  transition from  $V_{IT-} - 10\%$  to  $V_{IT+} + 10\%$  for TLV841M and TLV841C;  $V_{SENSE}$  transition from  $V_{IT-} - 10\%$  to  $V_{IT+} + 10\%$  for TLV841S
- (3) Overdrive % =  $[(V_{DD}/V_{IT-}) - 1] \times 100\%$  for TLV841M and TLV841C; Overdrive % =  $[(V_{SENSE}/V_{IT-}) - 1] \times 100\%$  for TLV841S
- (4) Specified by design and characterization
- (5) When  $V_{DD}$  starts from less than the specified minimum  $V_{DD}$  and then exceeds  $V_{POR}$ , reset is release after the startup delay ( $t_{STRT}$ ). For TLV841C variants a capacitor at CT pin will add  $t_D$  delay to  $t_{STRT}$  time

## 6.7 Timing Diagrams

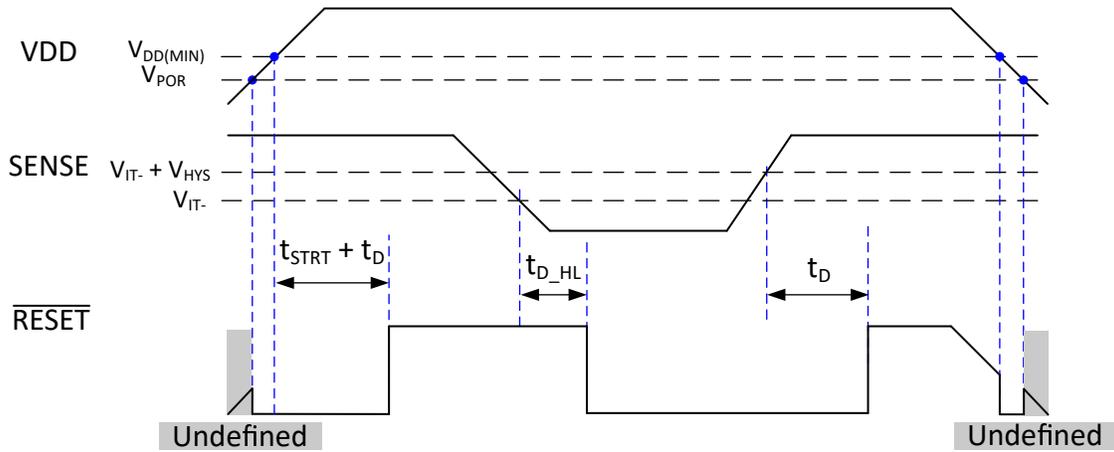


A. Open-Drain timing diagram assumes the  $\overline{\text{RESET}}$  pin is connected via an external pull-up resistor to VDD.

**Figure 6-1. Timing Diagram for TLV841SxxL (SENSE) Active Low Output [Open-Drain and Push-Pull Output Topology]**

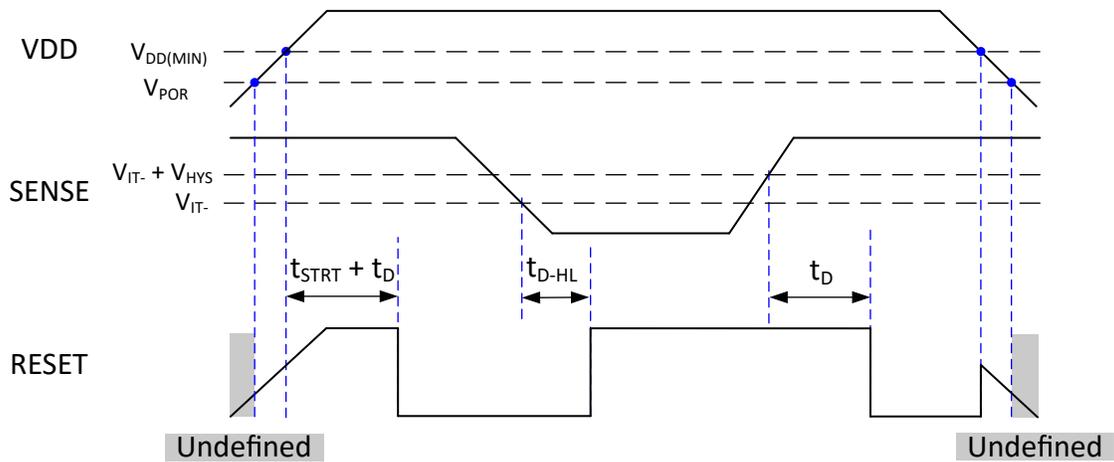


A. Open-Drain timing diagram assumes the RESET pin is connected via an external pull-up resistor to VDD.

**Figure 6-2. Timing Diagram for TLV841SxxH (SENSE) Active High Output [Open-Drain and Push-Pull Output Topology]**

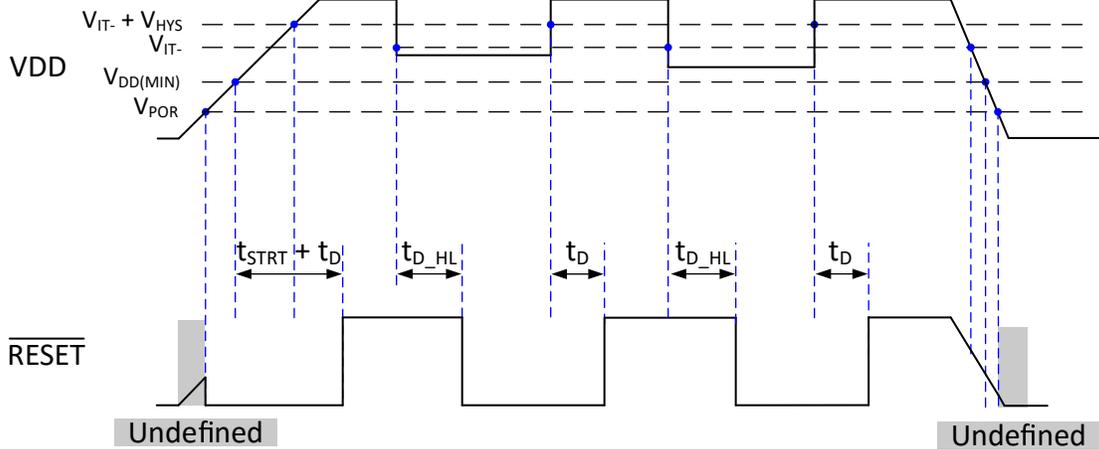

- A. Open-Drain timing diagram assumes the RESET / RESET pin is connected via an external pull-up resistor to VDD.
- B.  $t_{D \text{ (no cap)}}$  is included in  $t_{\text{START}}$  time delay. If  $t_D$  delay is programmed by an external capacitor connected to CT pin then  $t_D$  programmed time will be added to the startup time,  $V_{DD}$  slew rate =  $1V / \mu s$ .
- C. Be advised that the VDD falling slew rate is (slew rate  $> 1V / \mu s$ ) and resulting RESET in what is shown above figure. The RESET behavior would be similar to Figure 6-1 if the slew rate was much slower or if VDD decay time is larger than the prop delay ( $t_{D\_HL}$ ).

**Figure 6-3. Timing Diagram for TLV841CxxL (CT) Active Low Output [Open-Drain and Push-Pull Output Topology]**

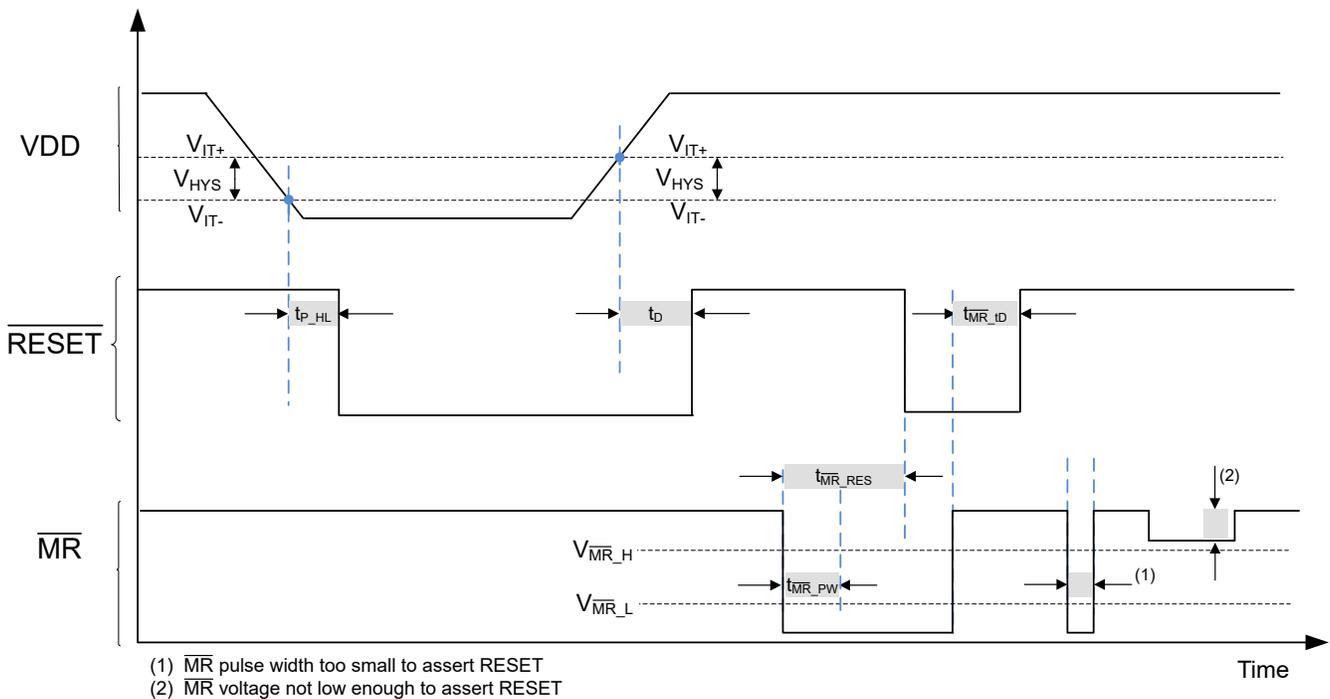


- A. Open-Drain timing diagram assumes the RESET / RESET pin is connected via an external pull-up resistor to VDD.


**Figure 6-4. Timing Diagram for TLV841MxxL Active Low Output (MR) [Open-Drain and Push-Pull Output Topology]**

## 6.8 Typical Characteristics


Typical characteristics show the typical performance of the TLV841 device. Test conditions are  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}$ ,  $R_{\text{pull-up}} = 100\text{k}\Omega$ ,  $C_{\text{Load}} = 50\text{pF}$ , unless otherwise noted.

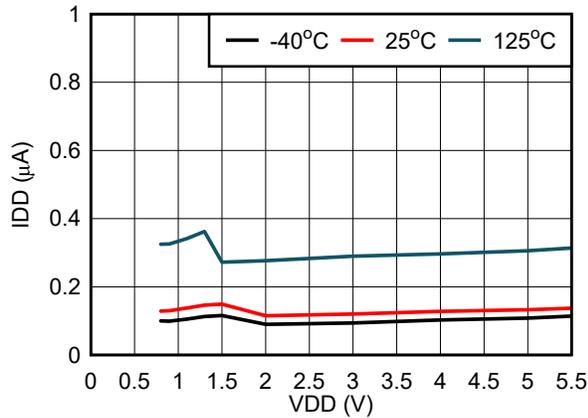


**Figure 6-5. Supply Current vs Supply Voltage for TLV841S**

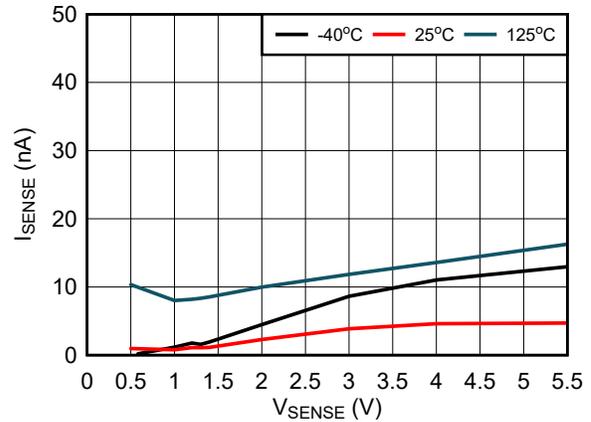


**Figure 6-6. SENSE Current vs  $V_{\text{SENSE}}$**

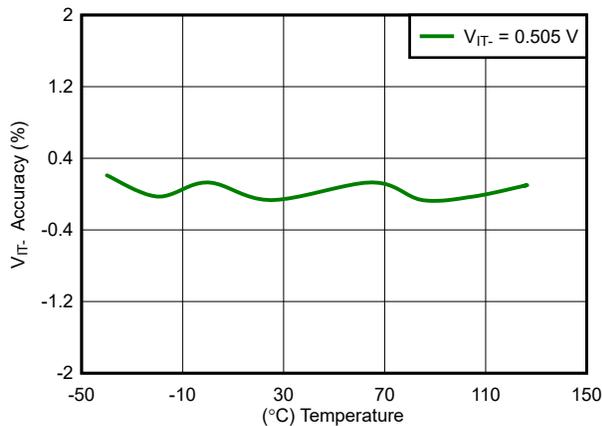


**Figure 6-7.  $V_{\text{IT}}$  Accuracy vs Temperature**

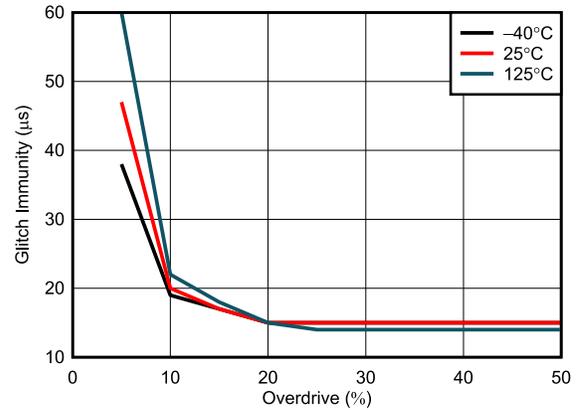

**Figure 6-8. SENSE Glitch Immunity ( $V_{\text{IT-}}$ ) vs Overdrive**

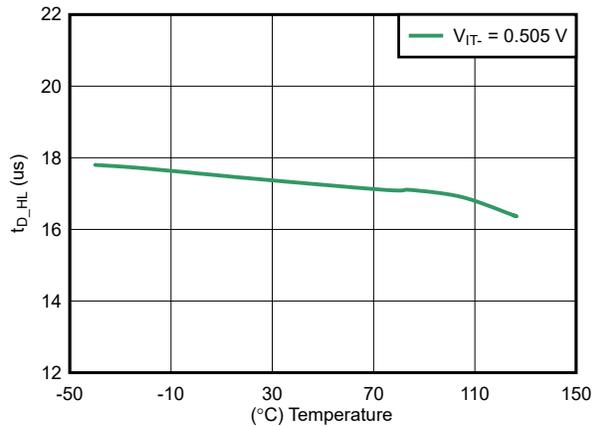

**Figure 6-9. SENSE Delay ( $t_{D\_HL}$ ) vs Temperature**

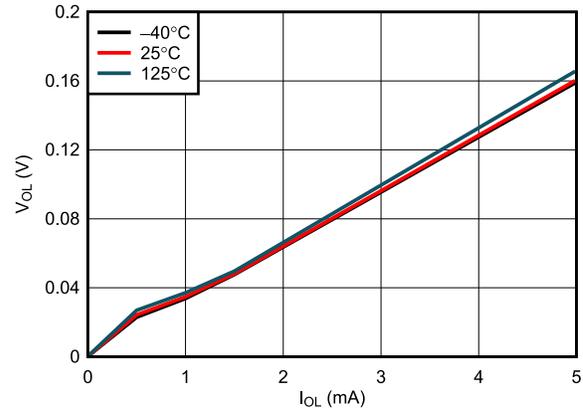

**Figure 6-10.  $V_{\text{OL}}$  vs  $I_{\text{OL}}$**


## 7 Detailed Description

### 7.1 Overview

The TLV841 is a family of very small, accurate, nano-quiescent current voltage supervisors with fixed threshold voltages. TLV841S features a separate SENSE pin for adjustable voltage threshold without losing accuracy, TLV841C features a programmable reset time delay using external capacitor, and TLV841M features an active-low manual reset ( $\overline{\text{MR}}$ ). The TLV841 family provide  $\pm 0.5\%$  typical monitor threshold accuracy with hysteresis and glitch immunity.

The adjustable variant of TLV841S has an internal reference voltage of 0.505V and can be used to accurately monitor any voltage above 0.505V within the recommended operating conditions. In addition to the adjustable threshold variant, fixed negative threshold voltages ( $V_{IT-}$ ) can be factory set from 0.8V to 4.9V in 100mV steps. TLV841 is available in a very small (0.73mm x 0.73mm) 4-pin BGA package.

### 7.2 Functional Block Diagram

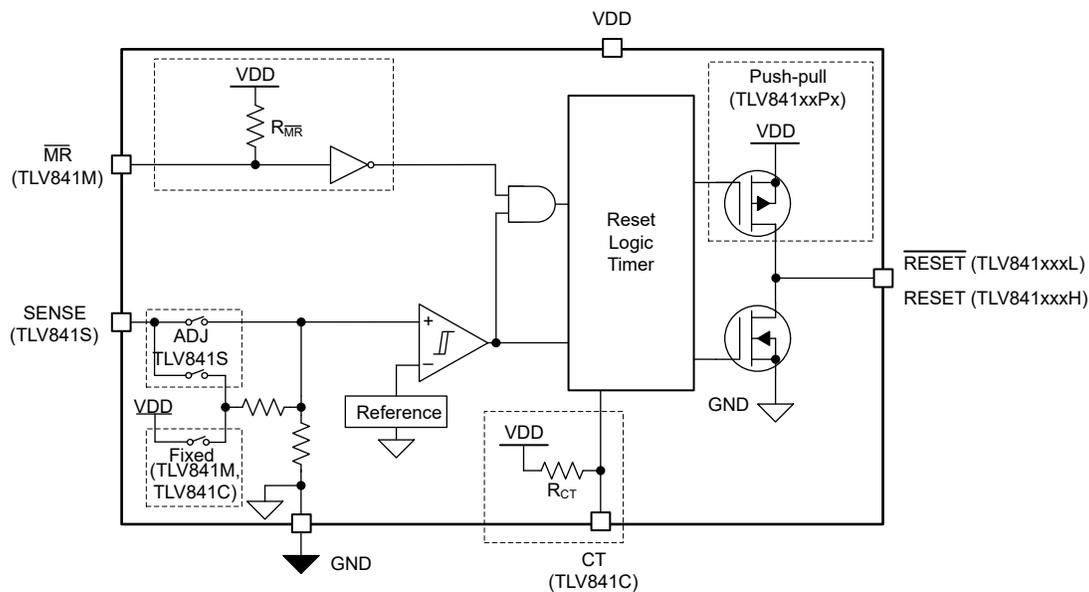


### 7.3 Feature Description

#### 7.3.1 Input Voltage (VDD)

For TLV841C and TLV841M, the VDD pin is monitored by the internal comparator to indicate when VDD falls below the fixed threshold voltage. For TLV841S, the SENSE pin is monitored by the internal comparator. VDD also functions as the supply for the internal bandgap, internal regulator, state machine, buffers and other control logic blocks. Good design practice involve placing a 0.1 $\mu$ F to 1 $\mu$ F bypass capacitor at VDD input for noisy applications to ensure enough charge is available for the device to power up correctly.

### 7.3.1.1 VDD Hysteresis

The internal comparator has built-in hysteresis to avoid erroneous output reset release. If the voltage at the VDD (TLV841C, TLV841M) pin falls below  $V_{IT-}$ , the output reset is asserted. When the monitored voltage goes above  $V_{IT-}$  plus hysteresis ( $V_{HYS}$ ) the output reset is deasserted after  $t_D$  delay.

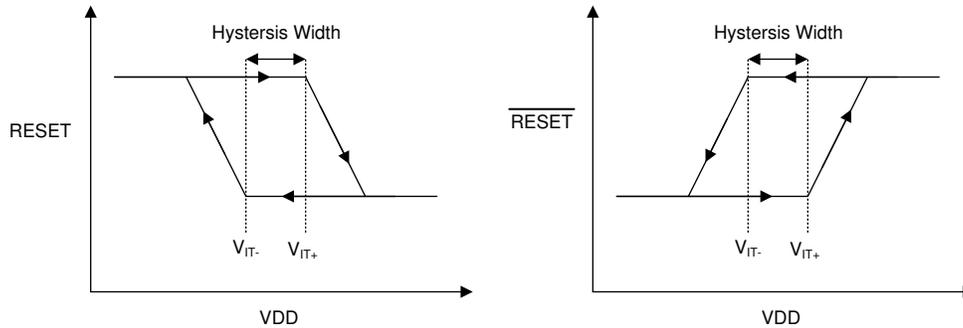


**Figure 7-1. Hysteresis Diagram**

### 7.3.1.2 VDD Transient Immunity

The TLV841 is immune to quick voltage transients or excursion on VDD. Sensitivity to transients depends on both pulse duration ( $t_{GL\_V_{IT-}}$ ), specified in [Section 6.6](#), and overdrive. Overdrive is defined by how much VDD deviates from the specified threshold. Threshold overdrive is calculated as a percent of the threshold in question, as shown in [Equation 1](#).

$$\text{Overdrive} = \left| \left[ \left( \frac{V_{DD}}{V_{IT-}} \right) - 1 \right] \times 100\% \right| \quad (1)$$

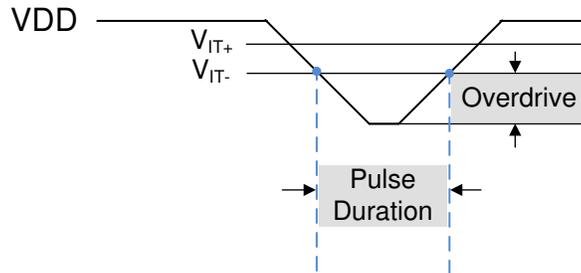

**Figure 7-2. Overdrive vs Pulse Duration**

### 7.3.2 SENSE Input (TLV841S)

The SENSE input can vary from 0V to 5.5V, regardless of the device supply voltage used. The SENSE pin is used to monitor a critical voltage rail or push-button input. If the voltage on this pin drops below  $V_{IT-}$ , then  $\overline{\text{RESET}}/\text{RESET}$  is asserted. When the voltage on the SENSE pin rises above the positive threshold voltage  $V_{IT-} + V_{HYS}$ ,  $\overline{\text{RESET}}/\text{RESET}$  deasserts after the user-defined  $\overline{\text{RESET}}/\text{RESET}$  delay time. The internal comparator has built-in hysteresis to ensure well-defined  $\overline{\text{RESET}}/\text{RESET}$  assertions and deassertions even when there are small changes on the voltage rail being monitored.

The TLV841 device is relatively immune to short transients on the SENSE pin. Glitch immunity ( $t_{GL\_V_{IT-}}$ ), specified in [Section 6.6](#), is dependent on threshold overdrive, as illustrated in [Figure 6-8](#). Although not required in most cases, for noisy applications, good analog design practice is to place a 10nF to 100nF bypass capacitor at the SENSE input to reduce sensitivity to transient voltages on the monitored signal.

### 7.3.2.1 SENSE Hysteresis

The internal comparator has built-in hysteresis to avoid erroneous output reset release. If the voltage at the SENSE (TLV841S) pin falls below  $V_{IT-}$ , the output reset is asserted. When the monitored voltage goes above  $V_{IT-}$  plus hysteresis ( $V_{HYS}$ ) the output reset is deasserted after  $t_D$  delay.

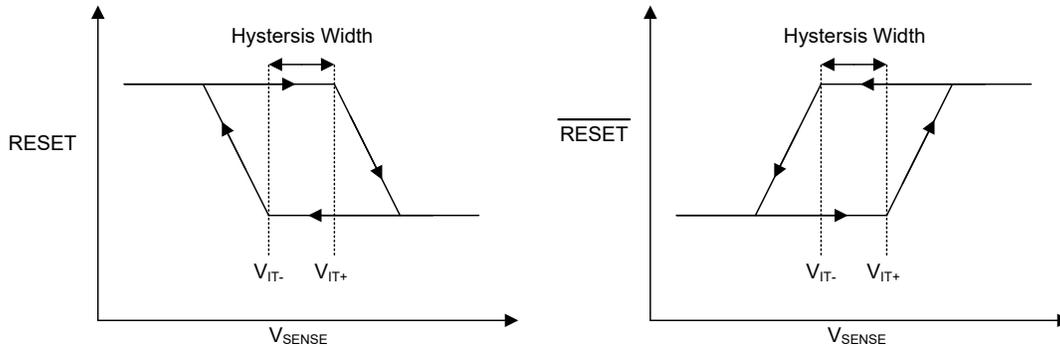


Figure 7-3. Hysteresis Diagram

### 7.3.2.2 Immunity to SENSE Pin Voltage Transients

The TLV841S is immune to short voltage transient spikes or excursion on the SENSE pin. To further improve the noise immunity on the SENSE pin, placing a 10nF to 100nF capacitor between the SENSE pin and GND can reduce the sensitivity to sensitivity to transient voltages on the monitored signal.

Sensitivity to transients depends on both transient duration and overdrive (amplitude) on the transient voltage. Overdrive is defined by how much  $V_{SENSE}$  exceeds the specified threshold and is important to know because the smaller the overdrive, the slower the response of the output. Threshold overdrive is calculated as a percent of the threshold in question, as shown in Equation 2.

$$\text{Overdrive} = \left| \left[ \left( \frac{V_{SENSE}}{V_{IT-}} \right) - 1 \right] \times 100\% \right| \tag{2}$$

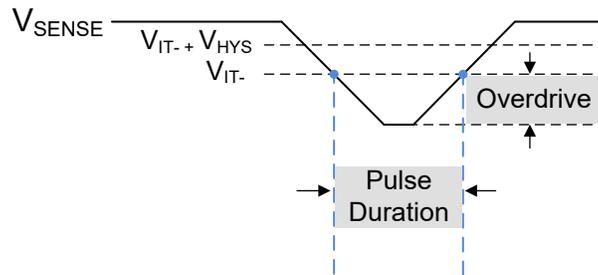


Figure 7-4. Overdrive vs Pulse Duration

### 7.3.3 User-Programmable Reset Time Delay for TLV841C Only

The reset time delay can be set to a typical value of 40µs by leaving the CT pin floating, or a maximum value of approximately 6.2 seconds by connecting 10µF delay capacitor. The reset time delay ( $t_D$ ) can be programmed by connecting a capacitor no larger than 10µF between the CT pin and GND.

The relationship between external capacitor ( $C_{CT\_EXT(typ)}$ ) in µF at CT pin and the time delay ( $t_D(typ)$ ) in seconds is given by Equation 3.

$$t_{D(typ)} = -\ln(0.29) \times R_{CT(typ)} \times C_{CT\_EXT(typ)} + t_{D(no\ cap,\ typ)} \quad (3)$$

Equation 3 is simplified to Equation 4 by plugging  $R_{CT(typ)}$  and  $t_{D(no\ cap,\ typ)}$  given in Section 6.5 and Section 6.6:

$$t_{D(typ)} = 618937 \times C_{CT\_EXT(typ)} + 40\mu s \quad (4)$$

Equation 5 solves for external capacitor value  $C_{CT\_EXT}$  in units of µF where  $t_D(typ)$  is in units of seconds

$$C_{CT\_EXT} = \frac{[t_{D(typ)} - 40\mu s]}{618937} \quad (5)$$

The reset delay varies according to three variables: the external capacitor  $C_{CT\_EXT}$ , CT pin internal resistance  $R_{CT}$  provided in Section 6.5, and a constant. The maximum variance due to the constant is show in Equation 6:

$$t_{D(max)} = -\ln(0.25) \times R_{CT(max)} \times C_{CT\_EXT(max)} + t_{D(no\ cap,\ max)} \quad (6)$$

The recommended maximum delay capacitor for the TLV841C is limited to 10µF as this ensures enough time for the capacitor to fully discharge when a voltage fault occurs. Also, having a too large of a capacitor value can cause very slow charge up (rise times) and system noise can cause the internal circuit to trip earlier or later near the threshold. This leads to variation in time delay where it can make the delay accuracy worse in the presence of system noise.

When a voltage fault occurs, the previously charged up capacitor discharges and if the monitored voltage returns from the fault condition before the delay capacitor discharges completely, the delay will be shorter than expected. The capacitor will begin charging from a voltage above zero and resulting in shorter than expected time delay. A larger delay capacitor can be used so long as the capacitor has enough time to fully discharge during the duration of the voltage fault. The amount of time required to discharge the delay capacitor relative to the reset delay rises as VDD fault undervoltage increases as shown in Figure 7-5. From the graph below, to ensure the  $C_{CT\_EXT}$  capacitor is fully discharged, the time period or duration of the voltage fault needs to be greater than 10% of the programmed reset time delay.


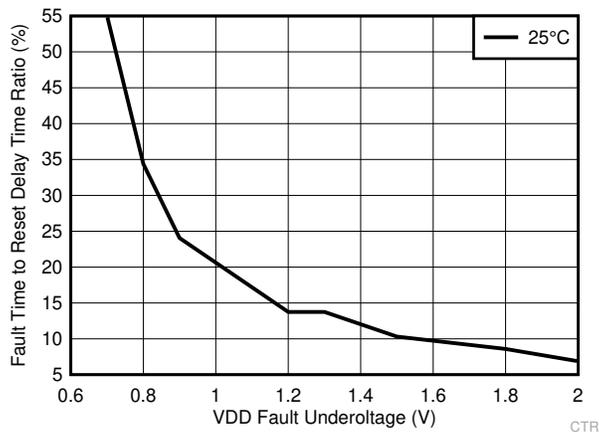


Figure 7-5.  $C_{CT\_EXT}$  Discharge Time During Fault Condition ( $C_{CT\_EXT} = 1\mu F$ )

### 7.3.4 Manual Reset ( $\overline{MR}$ ) Input for TLV841M only

The manual reset ( $\overline{MR}$ ) input allows a processor GPIO or other logic circuits to initiate a reset. A logic low on  $\overline{MR}$  with pulse duration longer than  $t_{MR\_RES}$  will causes reset output to assert. After  $\overline{MR}$  returns to a logic high ( $V_{MR\_H}$ ) and VDD is above  $V_{IT+}$ , reset is deasserted after the user programmed reset time delay ( $t_D$ ) expires.

If  $\overline{MR}$  is not controlled externally, then  $\overline{MR}$  can be left disconnected. If the logic signal controlling  $\overline{MR}$  is less than VDD, then additional current flows from VDD into  $\overline{MR}$  internally. For minimum current consumption, drive  $\overline{MR}$  to either VDD or GND.  $V_{MR}$  should not be higher than VDD voltage.

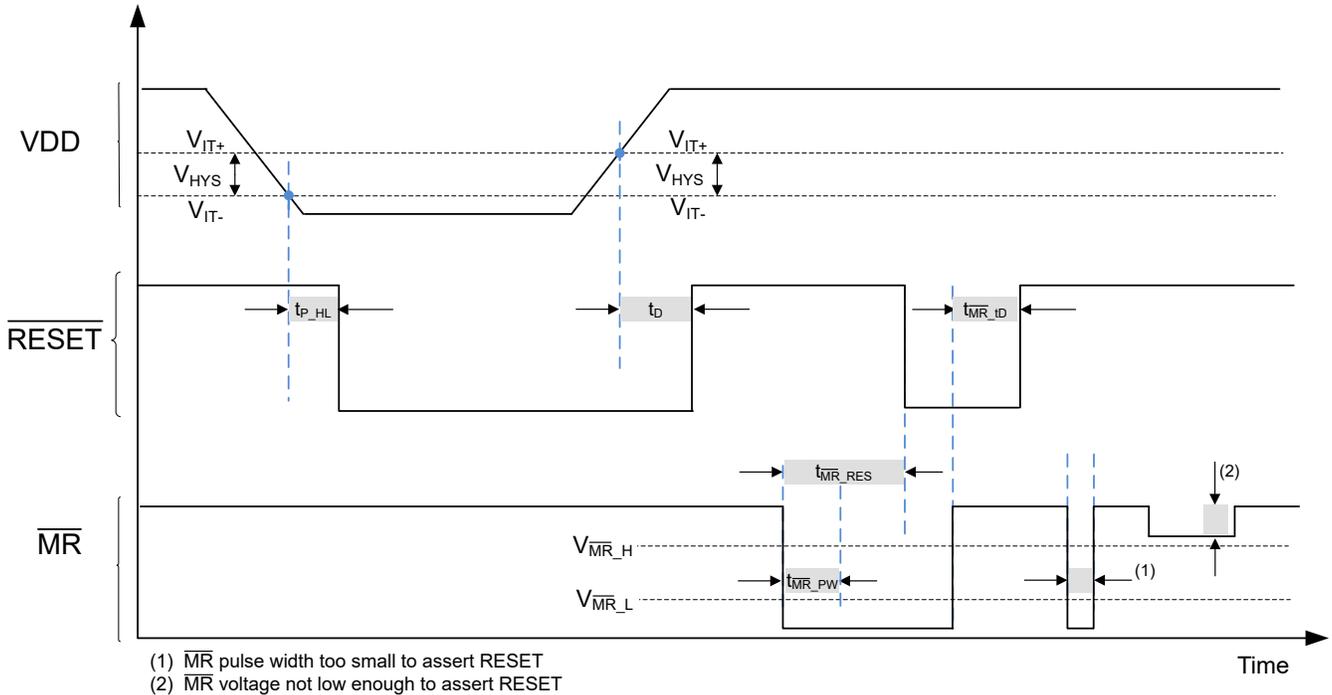

**Figure 7-6. Timing Diagram  $\overline{MR}$  and  $\overline{RESET}$  (TLV841M)**

### 7.3.5 Output Logic

#### 7.3.5.1 $\overline{RESET}$ Output, Active-Low

$\overline{RESET}$  (Active-Low) applies to TLV841xxDL (Open-Drain) and TLV841xxPL (Push-Pull) hence the "L" in the device name.  $\overline{RESET}$  remains high (deasserted) as long as VDD/SENSE is above the negative threshold ( $V_{IT-}$ ) and the  $\overline{MR}$  pin is floating or above  $V_{MR\_H}$ . If VDD/SENSE falls below the negative threshold ( $V_{IT-}$ ) or if  $\overline{MR}$  is driven low, then  $\overline{RESET}$  is asserted.

When  $\overline{MR}$  is again logic high or floating and VDD/SENSE rise above  $V_{IT+}$  ( $V_{IT-} + V_{HYS}$ ), the delay circuit will hold  $\overline{RESET}$  low for the specified reset time delay ( $t_D$ ). When the reset time delay has elapsed, the  $\overline{RESET}$  pin goes back to logic high voltage  $V_{OH}$ .

The TLV841xxDL (Open-Drain) version, denoted with "D" in the device name, requires an external pull-up resistor to hold  $\overline{RESET}$  pin high. Connect the external pull-up resistor to the desired pull-up voltage source and  $\overline{RESET}$  can be pulled up to any voltage up to 5.5V independent of the VDD voltage. To ensure proper voltage levels, give some consideration when choosing the external pull-up resistor values. The external pull-up resistor value determines the actual  $V_{OL}$ , the output capacitive loading, and the output leakage current ( $I_{lkg(OD)}$ ).

The Push-Pull variant (TLV841xxPL), denoted with "P" in the device name, does not require an external pull-up resistor

### 7.3.5.2 RESET Output, Active-High

RESET (active-high), denoted with no bar above the pin label, applies only to TLV841xxDH (open-drain) and TLV841xxPH (push-pull) active-high version, hence the "H" in the device name. RESET remains low (deasserted) as long as VDD/SENSE is above the threshold ( $V_{IT-}$ ) and the manual reset signal ( $\overline{MR}$ ) is floating or above  $V_{\overline{MR}_H}$ . If VDD/SENSE falls below the negative threshold ( $V_{IT-}$ ) or if  $\overline{MR}$  is driven low, then RESET is asserted driving the RESET pin to high voltage  $V_{OH}$ .

When  $\overline{MR}$  is again logic high or floating and VDD/SENSE is above  $V_{IT+}$  ( $V_{IT-} + V_{HYS}$ ) the delay circuit will hold RESET high for the specified reset time delay ( $t_D$ ). When the reset time delay has elapsed, the RESET pin goes back to low voltage  $V_{OL}$ .

The TLV841xxDH (Open-Drain) version, denoted with "D" in the device name, requires an external pull-up resistor to hold RESET pin high. Connect the external pull-up resistor to the desired pull-up voltage source and RESET can be pulled up to any voltage up to 5.5V independent of the VDD voltage. To ensure proper voltage levels, give some consideration when choosing the external pull-up resistor values. The external pull-up resistor value determines the actual  $V_{OL}$ , the output capacitive loading, and the output leakage current ( $I_{kg(OD)}$ ).

The Push-Pull variant (TLV841xxPH), denoted with "P" in the device name, does not require an external pull-up resistor.

## 7.4 Device Functional Modes

Table 7-1 and Table 7-2 summarizes the various functional modes of the device. Logic high is represented by "H" and logic low is represented by "L".

**Table 7-1. Truth Table for TLV841S**

VDD	SENSE	RESET (ACTIVE-HIGH)	RESET (ACTIVE-LOW)
$VDD < V_{POR}$	—	Undefined	Undefined
$V_{POR} < VDD < V_{DD(MIN)}$ <sup>(1)</sup>	—	H	L
$VDD \geq V_{DD(MIN)}$	$V_{SENSE} < V_{IT-}$	H	L
$VDD \geq V_{DD(MIN)}$	$V_{SENSE} > V_{IT-} + V_{HYS}$	L	H

(1) When  $V_{DD}$  falls below  $V_{DD(MIN)}$ , undervoltage-lockout (UVLO) takes effect and  $\overline{RESET}$  is held logic low (RESET is held logic high) until  $V_{DD}$  falls below  $V_{POR}$  at which the  $\overline{RESET}$ /RESET output is undefined.

**Table 7-2. Truth Table for TLV841M**

VDD	$\overline{MR}$	RESET (ACTIVE-HIGH)	RESET (ACTIVE-LOW)
$VDD < V_{POR}$	—	Undefined	Undefined
$V_{POR} < VDD < V_{IT-}$	—	H	L
$VDD \geq V_{IT-}$	L	H	L
$VDD \geq V_{IT-}$	H	L	H
$VDD \geq V_{IT-}$	Floating	L	H

### 7.4.1 Normal Operation ( $V_{DD} > V_{POR}$ )

When VDD is greater than  $V_{POR}$ , the reset signal is determined by the voltage on the VDD pin with respect to the trip point ( $V_{IT-}$ ).

- $\overline{MR}$  high: The reset signal corresponds to VDD with respect to the threshold voltage.
- $\overline{MR}$  low: In this mode, the reset is asserted regardless of the threshold voltage.

### 7.4.2 Below Power-On-Reset ( $V_{DD} < V_{POR}$ )

When the voltage on VDD is lower than  $V_{POR}$ , the device does not have enough bias voltage to internally pull the asserted output low or high and reset voltage level is undefined.

## 8 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The following sections describe in detail how to properly use this device, depending on the requirements of the final application.

### 8.2 Typical Application

#### 8.2.1 Design 1: Adjustable Voltage Supervisor With Push-Button Functionality

A typical application for the TLV841S is voltage rail monitoring with push-button functionality. In this design application, the TLV841SADL01 is being used to monitor a 3.3V power rail and triggers a reset when the voltage drops below 2.90V or when the push-button is pressed. The reset output connects to an MCU for system resetting or servicing the push-button.

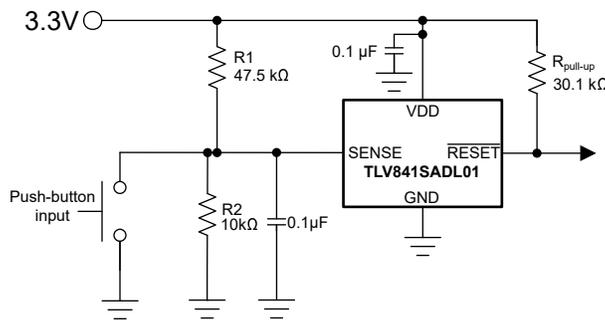


Figure 8-1. Design 1 - Adjustable Voltage Supervisor with Push-Button Functionality Circuit

#### 8.2.2 Design Requirements


The design requirements, described in [Table 8-1](#), for this design has a defined reset threshold voltage of 2.90V, a reset delay of 40  $\mu$ s and an output current no larger than 150  $\mu$ A.

Table 8-1. Design Requirements

PARAMETER	DESIGN REQUIREMENTS	DESIGN RESULTS
Reset Asserting	Reset needs to assert when under the reset condition of a button press or $VDD \leq 2.90V$ .	Reset asserted when under the reset condition of a button pressed or $VDD \leq 2.90V$ .
Reset Asserting Timing	Reset output needs to assert when the reset conditions are met for 20 $\mu$ s, and needs to de-assert after 40 $\mu$ s of no reset conditions.	Reset output asserted when the reset conditions were met for 26.4 $\mu$ s and deasserted after 46.8 $\mu$ s of no reset conditions.
Output Current	The output current must not exceed 150 $\mu$ A.	The output current was 110 $\mu$ A under the reset condition.

### 8.2.3 Detailed Design Procedure

The TLV841SADL01 can monitor any voltage above 0.505V using an external voltage divider. This device has a negative going input threshold voltage of 0.505V; however, the design needs to assert a reset when VDD drops below 2.90V. By using a resistor divider (R1 = 47.5 kΩ, R2 = 10kΩ) the negative going threshold voltage becomes 2.90V. The device's positive going voltage threshold is  $V_{IT-} + V_{HYS}$ . The typical  $V_{HYS}$  is 25mV. This in combination with the resistor divider makes the design's positive going threshold voltage equal to 3.05V. If VDD falls below 2.90V,  $\overline{\text{RESET}}$  will assert. If VDD rises above 3.05V,  $\overline{\text{RESET}}$  will deassert. See Figure 8-2 for a timing diagram detailing the voltage levels and reset assertion/deassertion conditions.

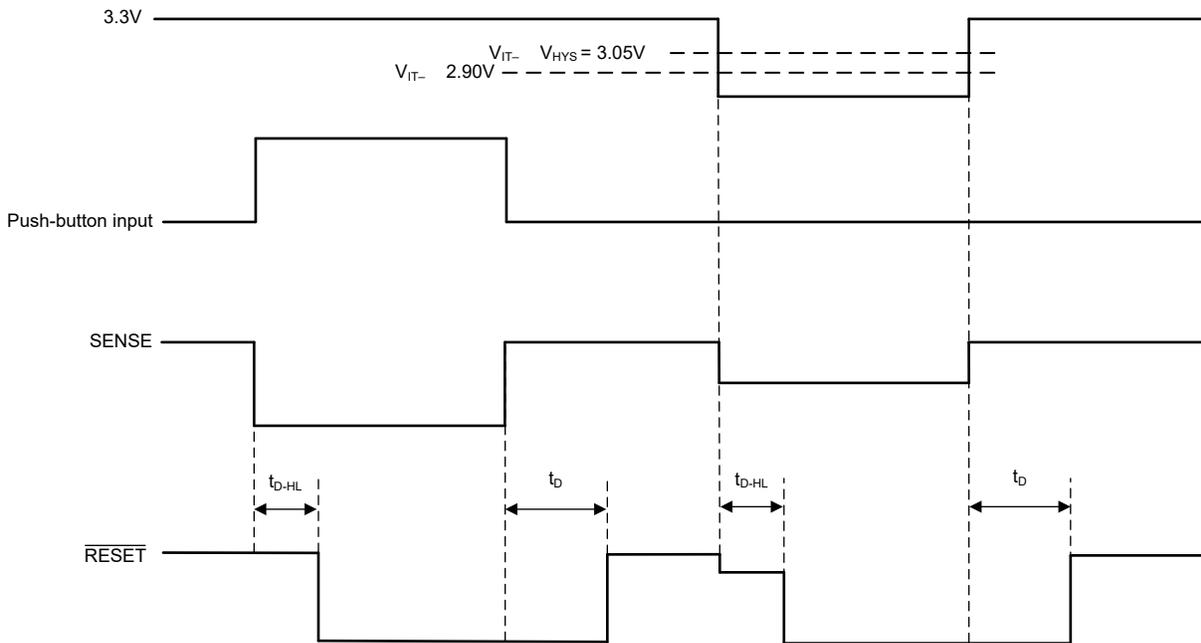

**Figure 8-2. Design 1 Timing Diagram**

This design will also enter a reset condition when the "push-button input" is asserted. The push-button is tied to ground and when pressed will drop the SENSE voltage to 0V, making the device assert a reset. As a good analog practice, a 0.1 μF capacitor was also placed on VDD.

The desired reset timing conditions are sense propagation delay time ( $t_{p\_HL}$  of 25 μs (how long it takes to assert RESET) and a reset delay time of 40 μs (how long it takes to deassert RESET). Figure 8-3 and Figure 8-4 are the results of the described application where the measured propagation delay and reset delay time are shown respectively.

For the requirement of a maximum output current, an external pull-up resistor needs to be selected so that the current through the external pull-up resistor exceeds no more than 150 μA. When the reset output is low, the voltage drop across the external pull-up resistor is equal to VDD. Ohm's law is used to calculate the minimum resistor value. The resistor needs to be greater than 22kΩ in order to pull less than 150 μA in the reset asserted low condition. A resistor value of 30.1kΩ was selected to accomplish this.

Note that this design does not account for tolerances.

### 8.2.4 Application Curves: TLV841EVM

These application curves are taken with the TLV841SADL01 part on the TLV841EVM. Please see the [TLV841 User Guide](#) for more information.

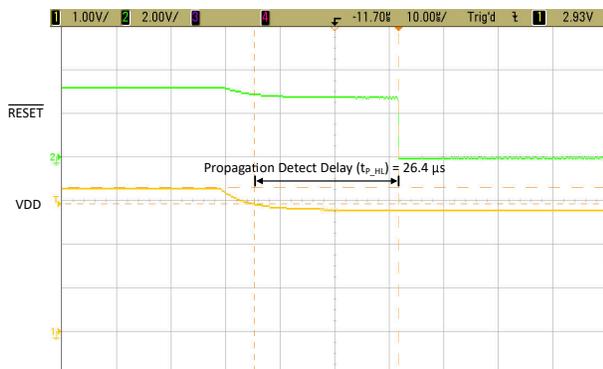


Figure 8-3. TLV841EVM Propagation Delay Time Delay ( $t_{D\_HL}$ )



Figure 8-4. TLV841EVM RESET Time Delay ( $t_D$ )

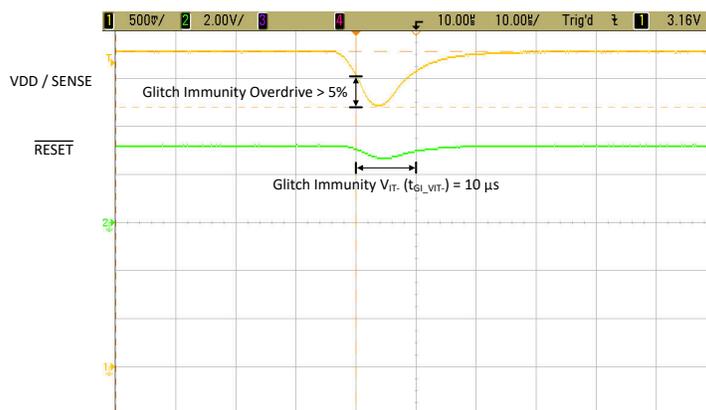


Figure 8-5. TLV841EVM SENSE Pin Glitch Immunity ( $t_{GI\_VIT-}$ )

## 8.3 Power Supply Recommendations

These devices are designed to operate from an input supply with a voltage range between 0.7V and 5.5V. TI recommends an input supply capacitor of 0.1μF between the VDD pin and GND pin. This device has a 6V absolute maximum rating on the VDD pin. If the voltage supply providing power to VDD is susceptible to any large voltage transient that can exceed 6V, additional precautions must be taken.

## 8.4 Layout

### 8.4.1 Layout Guidelines


Make sure that the connection to the VDD pin is low impedance. Good analog design practice recommends placing a minimum 0.1 μF ceramic capacitor as near as possible to the VDD pin. If a capacitor is not connected to the CT pin (TLV841C), then minimize parasitic capacitance on this pin so the rest time delay is not adversely affected.

- Make sure that the connection to the VDD pin is low impedance. Good analog design practice is to place a greater than 0.1 μF ceramic capacitor as near as possible to the VDD pin.
- If a  $C_{CT\_EXT}$  capacitor is used (TLV841C), place the capacitor as close as possible to the CT pin. If the CT pin is left unconnected, make sure to minimize the amount of parasitic capacitance on the pin to less than 5pF.
- If a SENSE capacitor ( $C_{SENSE}$ ) is used (TLV841S), place the capacitor as close as possible to the SENSE pin to further improve the noise immunity on the SENSE pin. Placing a 10nF to 100nF capacitor between the SENSE pin and GND can reduce the sensitivity to sensitivity to transient voltages on the monitored signal.

- Place the pull-up resistors on  $\overline{\text{RESET}}$  pin as close to the pin as possible.

### 8.4.2 Layout Example

The layout example in [Figure 8-6](#) shows how the TLV841S is laid out on a printed circuit board (PCB) for every device variant.

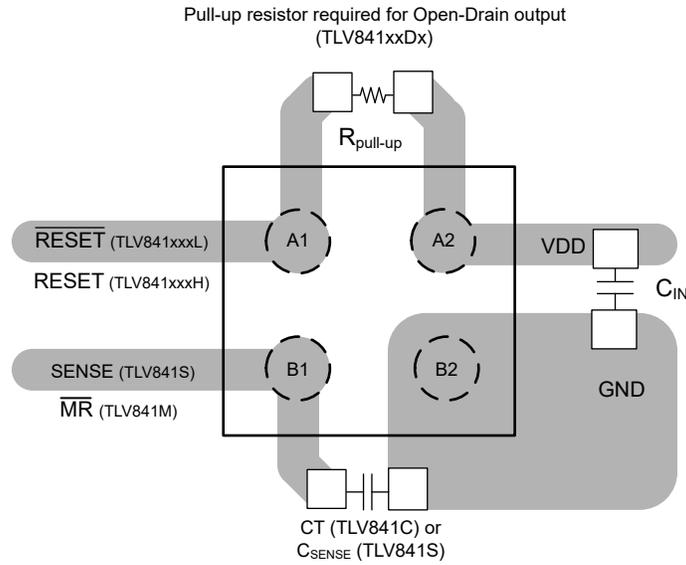

**Figure 8-6. TLV841 Recommended Layout**

## 9 Device and Documentation Support

### 9.1 Device Nomenclature

Figure 4-1 in Section 4 and Table 9-1 shows how to decode the function of the device based on its part number.

**Table 9-1. Device Naming Convention**

DESCRIPTION	NOMENCLATURE	VALUE
Generic Part number	TLV841	TLV841
Feature Option	S	SENSE pin option
	C	CT pin for programmable delay using external capacitor
	M	Manual Reset (MR) pin option
Delay Option	A	40µs (No internal reset time delay)
	B	2ms reset time delay
	C	10ms reset time delay
	D	30ms reset time delay
	E	50ms reset time delay
	F	80ms reset time delay
	G	100ms reset time delay
	H	150ms reset time delay
	I	200ms reset time delay
Variant code (Output Topology)	DL	Open-Drain, Active-Low
	PL	Push-Pull, Active-Low
	DH	Open-Drain, Active-High
	PH	Push-Pull, Active-High
Detect Voltage Option	## (two characters)	Example: 12 stands for 1.2V threshold
Package	YBH	DSBGA (4)
Reel	R	Large Reel

### 9.2 Documentation Support

#### 9.2.1 Related Documentation

The following related documents are available for download at [www.ti.com](http://www.ti.com):

- [C2000 Delfino™ Family of Microprocessors](#)
- Texas Instruments, [Getting Started With TMS320C28x Digital Signal Controllers application note](#)
- Texas Instruments, [Optimizing Resistor Dividers at a Comparator Input application note](#)
- Texas Instruments, [Sensitivity Analysis for Power Supply Design application note](#)
- Texas Instruments, [TLV841EVM-775 Evaluation Module User Guide](#)
- Texas Instruments, [TMS320F2833x, TMS320F2823x Real-Time Microcontrollers data sheet](#)

### 9.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.4 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

## 9.5 Trademarks

Delfino™ and TI E2E™ are trademarks of Texas Instruments. All trademarks are the property of their respective owners.

## 9.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 9.7 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>Changes from Revision D (January 2023) to Revision E (February 2026)</b>	<b>Page</b>
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1
• Updated description section.....	1
• Updated $t_{MR\_PW}$ typical from: 10 $\mu$ s to: 500ns.....	10
• Updated $t_{MR\_RES}$ typical from: $t_{P\_HL}$ $\mu$ s to: 1 $\mu$ s.....	10
• Updated $t_{MR\_ID}$ typical from: $t_d$ ms to: 3 $\mu$ s.....	10

<b>Changes from Revision C (June 2021) to Revision D (January 2023)</b>	<b>Page</b>
• Removed Table 12-2.....	24

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">TLV841MAPL35YBHR</a>	Active	Production	DSBGA (YBH)   4	3000   LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	E
<a href="#">TLV841SADL01YBHR</a>	Active	Production	DSBGA (YBH)   4	3000   LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	9
TLV841SADL01YBHR.A	Active	Production	DSBGA (YBH)   4	3000   LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	9
<a href="#">TLV841SADL41YBHR</a>	Active	Production	DSBGA (YBH)   4	3000   LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	T
TLV841SADL41YBHR.A	Active	Production	DSBGA (YBH)   4	3000   LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	T

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**

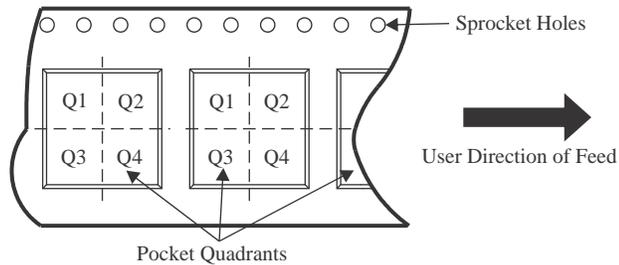**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLV841MAPL35YBHR	DSBGA	YBH	4	3000	180.0	8.4	0.84	0.84	0.48	4.0	8.0	Q1
TLV841SADL01YBHR	DSBGA	YBH	4	3000	180.0	8.4	0.84	0.84	0.48	4.0	8.0	Q1
TLV841SADL41YBHR	DSBGA	YBH	4	3000	180.0	8.4	0.84	0.84	0.48	4.0	8.0	Q1

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLV841MAPL35YBHR	DSBGA	YBH	4	3000	182.0	182.0	20.0
TLV841SADL01YBHR	DSBGA	YBH	4	3000	182.0	182.0	20.0
TLV841SADL41YBHR	DSBGA	YBH	4	3000	182.0	182.0	20.0




YBH0004



PACKAGE OUTLINE

DSBGA - 0.4 mm max height

DIE SIZE BALL GRID ARRAY

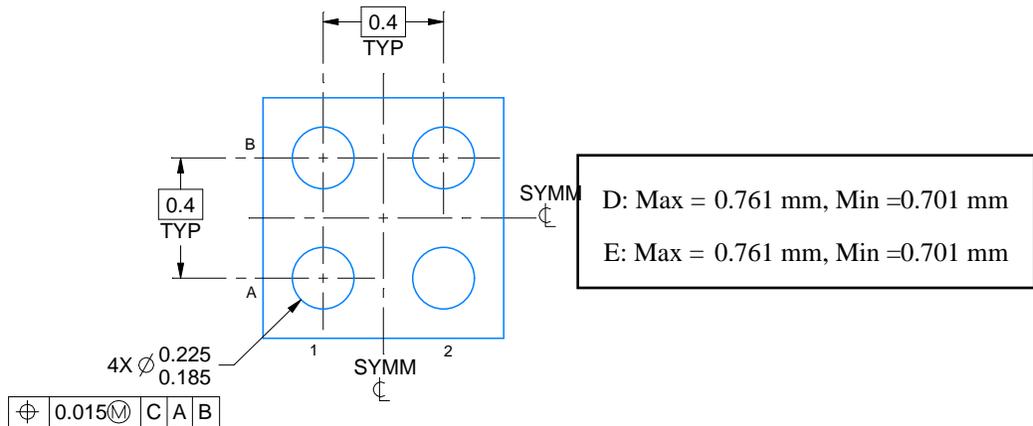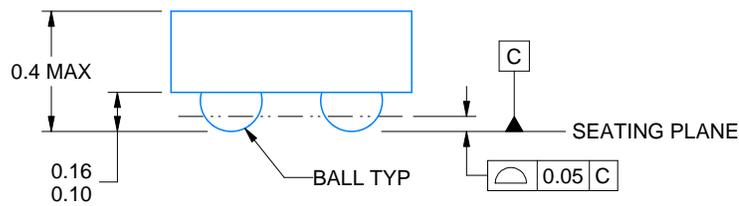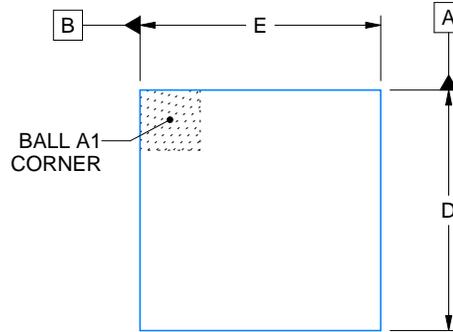

4224051/A 11/2017

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT


YBH0004

DSBGA - 0.4 mm max height

DIE SIZE BALL GRID ARRAY

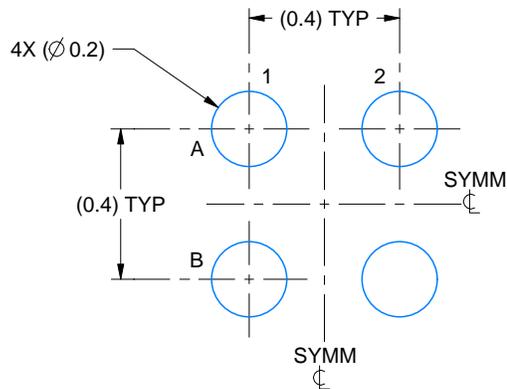

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 50X

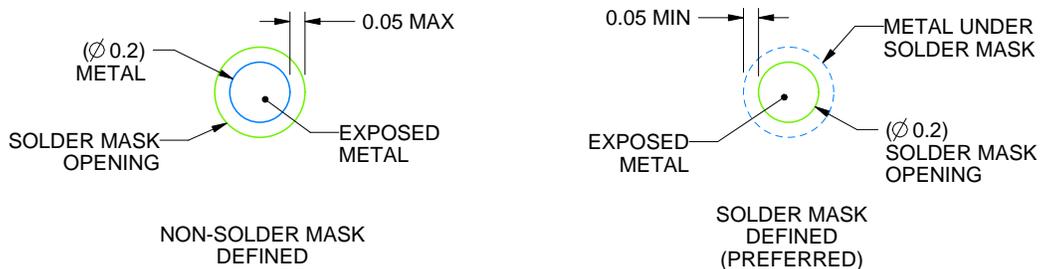

SOLDER MASK DETAILS  
NOT TO SCALE

4224051/A 11/2017

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. See Texas Instruments Literature No. SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

# EXAMPLE STENCIL DESIGN

YBH0004

DSBGA - 0.4 mm max height

DIE SIZE BALL GRID ARRAY

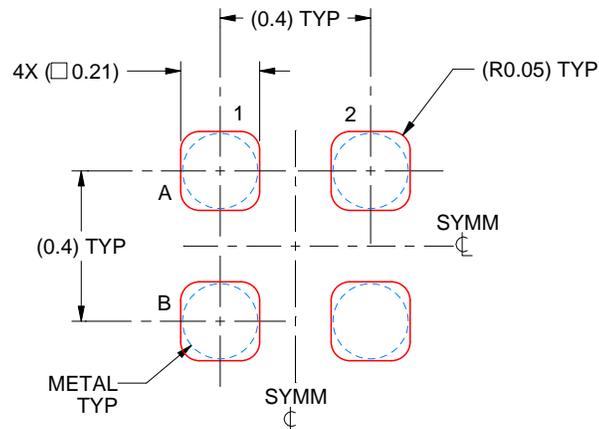

SOLDER PASTE EXAMPLE  
BASED ON 0.075 mm THICK STENCIL  
SCALE: 50X

4224051/A 11/2017

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025