

# BQ25170J : 1 セル・リチウムイオン、リチウムポリマ、LiFePO<sub>4</sub> 向け 800mA JEITA 準拠リニア・バッテリー・チャージャ

## 1 特長

- 耐入力電圧: 最大 30V
- 自動スリープ・モードによる消費電力低減
  - バッテリー・リーク電流: 350nA
  - 充電を無効にした際の入力リーク電流: 80μA
- 1 セルのリチウムイオン、リチウムポリマ、LiFePO<sub>4</sub> をサポート
- 外付け抵抗でプログラム可能な動作
  - VSET によるバッテリー・レギュレーション電圧の設定
    - リチウムイオン: 4.05V、4.1V、4.2V、4.35V、4.4V
    - LiFePO<sub>4</sub>: 3.5V、3.6V、3.7V
  - ISSET による充電電流の設定 (10mA～800mA)
- 高精度
  - ±0.5% の充電電圧精度
  - ±10% の充電電流精度
- 充電機能
  - プリチャージ電流は ISSET の 20%
  - JEITA 範囲全体にわたる充電動作を TS ピンで制御
  - 終了電流は ISSET の 10%
  - バッテリー温度を監視するための NTC サーミスタ入力
  - 充電機能制御ピン
  - ステータスおよびフォルト表示用のオープン・ドレイン出力
  - パワー・グッド表示用のオープン・ドレイン出力
- フォルト保護機能内蔵
  - 6.6V の IN 過電圧保護
  - VSET に基づく OUT 過電圧保護
  - 1000mA の過電流保護機能
  - 125°C のサーマル・レギュレーション、150°C のサーマル・シャットダウン保護
  - OUT 短絡保護
  - VSET、ISSET ピンの短絡 / 開放保護

## 2 アプリケーション

- 真のワイヤレス・ヘッドセット
- ウェアラブル・アクセサリ、スマート・バンド
- 美容と化粧
- 電動歯ブラシ
- フリート管理、アセット追跡

## 3 概要

BQ25170J は、スペースの制約が厳しい携帯用アプリケーションに適した 1 セル・リチウムイオン、リチウムポリマ、LiFePO<sub>4</sub> バッテリー用統合型 800mA リニア・チャージャです。本デバイスには、バッテリーを充電する電源出力が 1 つあります。安全タイマの継続時間内でのバッテリーのフル充電がシステムの平均的な負荷によって妨げられない限り、システムの負荷をバッテリーと並列に配置できます。システム負荷をバッテリーと並列に配置した場合、充電電流はシステムとバッテリーの間で共有されます。

このデバイスは、リチウムイオン・バッテリーを充電するための 3 つの段階を備えています。完全に放電されたバッテリーを回復させるためのプリチャージ、電荷の大半を供給するための高速充電定電流、最大容量に到達させるための電圧レギュレーションです。


これらすべての充電フェーズで、内部制御ループにより IC 接合部の温度が監視され、内部の温度スレッショルド (T<sub>REG</sub>) を超えた場合は充電電流が引き下げられます。

充電器の電源段と充電電流センス機能は完全に統合されています。充電器には、高精度の電流および電圧レギュレーション・ループ、充電ステータスの表示、および充電の自動終了の機能があります。充電電圧と高速充電電流は、外付け抵抗で設定できます。プリチャージおよび終了電流スレッショルドは、高速充電電流の設定に応じて設定されます。

### 製品情報

部品番号 <sup>(1)</sup>	パッケージ	本体サイズ (公称)
BQ25170J	WSO (8)	2.0mm × 2.0mm

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

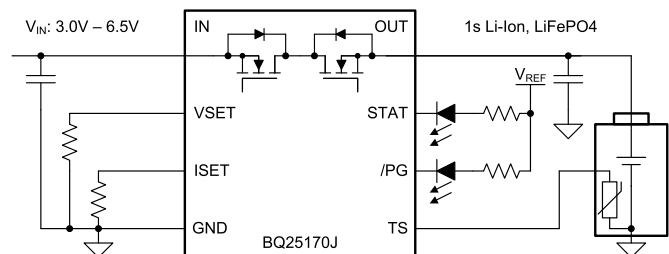

概略回路図



## Table of Contents

<b>1 特長</b> .....	<b>1</b>	7.4 Device Functional Modes.....	<b>18</b>
<b>2 アプリケーション</b> .....	<b>1</b>	<b>8 Application and Implementation</b> .....	<b>20</b>
<b>3 概要</b> .....	<b>1</b>	8.1 Application Information.....	20
<b>4 Revision History</b> .....	<b>2</b>	8.2 Typical Applications.....	20
<b>5 Pin Configuration and Functions</b> .....	<b>3</b>	<b>9 Power Supply Recommendations</b> .....	<b>23</b>
<b>6 Specifications</b> .....	<b>4</b>	<b>10 Layout</b> .....	<b>23</b>
6.1 Absolute Maximum Ratings .....	4	10.1 Layout Guidelines.....	23
6.2 ESD Ratings .....	4	10.2 Layout Example.....	23
6.3 Recommended Operating Conditions .....	4	<b>11 Device and Documentation Support</b> .....	<b>24</b>
6.4 Thermal Information .....	5	11.1 Device Support.....	24
6.5 Electrical Characteristics .....	6	11.2 Receiving Notification of Documentation Updates..	24
6.6 Timing Requirements .....	8	11.3 サポート・リソース.....	24
6.7 Typical Characteristics.....	9	11.4 Trademarks.....	24
<b>7 Detailed Description</b> .....	<b>11</b>	11.5 Electrostatic Discharge Caution.....	24
7.1 Overview.....	11	11.6 Glossary.....	24
7.2 Functional Block Diagram.....	13	<b>12 Mechanical, Packaging, and Orderable Information</b> .....	<b>25</b>
7.3 Feature Description.....	14		

## 4 Revision History

DATE	REVISION	NOTES
October 2021	*	Initial Release

## 5 Pin Configuration and Functions

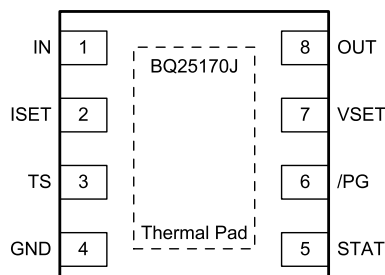


图 5-1. WSON Package 8-Pin Top View

表 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NUMBER		
IN	1	P	Input power, connected to external DC supply. Bypass IN with at least 1-μF capacitor to GND, placed close to the IC.
ISET	2	I	Programs the device fast-charge current. External resistor from ISET to GND defines fast charge current value. Expected range is 30 kΩ (10 mA) to 375 Ω (800 mA). $ICHG = K_{ISET} / R_{ISET}$ . Precharge current is defined as 20% of ICHG. Termination current is defined as 10% of ICHG.
TS	3	I	Temperature Qualification Voltage Input. Connect a negative temperature coefficient (NTC) thermistor directly from TS to GND (AT103-2 recommended). Charge suspends when the TS pin voltage is out of range. If TS function is not needed, connect an external 10-kΩ resistor from this pin to GND. Pulling $TS < V_{TS\_ENZ}$ will disable the charger.
GND	4	—	Ground pin
STAT	5	O	Open drain charger status indication output. Connect to pull-up rail via 10-kΩ resistor. LOW indicates charge in progress. HIGH indicates charge complete or charge disabled. When a fault condition is detected STAT pin blinks at 1 Hz.
PG	6	O	Open drain charge power good indication output. Connect to pull-up rail via 10-kΩ resistor. PG pulls low when $V_{IN} > V_{IN\_LOWV}$ and $V_{OUT} + V_{SLEEPZ} < V_{IN} < V_{IN\_OV}$ .
VSET	7	I	Programs the regulation voltage for OUT pin with a pull-down resistor. Valid resistor range is 18 kΩ to 100 kΩ, values outside this range will suspend charge. Refer to <a href="#">セクション 7.3.1.2</a> for voltage level details. Recommend using ±1% tolerance resistor with <200 ppm/°C temperature coefficient.
OUT	8	P	Battery Connection. System Load may be connected in parallel to battery. Bypass OUT with at least 1-μF capacitor to GND, placed close to the IC.
Thermal Pad	—	—	Exposed pad beneath the IC for heat dissipation. Solder thermal pad to the board with vias connecting to solid GND plane.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
Voltage	IN	−0.3	30	V
Voltage	OUT	−0.3	13	V
Voltage	ISET, PG, STAT, TS, VSET	−0.3	5.5	V
Output Sink Current	PG, STAT		5	mA
T <sub>J</sub>	Junction temperature	−40	150	°C
T <sub>stg</sub>	Storage temperature	−65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	±2500	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup>	±1500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V <sub>IN</sub>	Input voltage	3.0		6.6	V
V <sub>OUT</sub>	Output voltage			4.4	V
I <sub>OUT</sub>	Output current			0.8	A
T <sub>J</sub>	Junction temperature	−40		125	°C
C <sub>IN</sub>	IN capacitor	1			μF
C <sub>OUT</sub>	OUT capacitor	1			μF
R <sub>VSET</sub>	VSET resistor	18		100	kΩ
R <sub>VSET_TOL</sub>	Tolerance for VSET resistor	−1		1	%
R <sub>VSET_TEMPCO</sub>	Temperature coefficient for VSET resistor			200	ppm/°C
R <sub>ISET</sub>	ISET resistor	0.375		30	kΩ
R <sub>TS</sub>	TS thermistor resistor (recommend 103AT-2)		10		kΩ

## 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		BQ25170J	UNIT
		DSG	
		8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance (JEDEC <sup>(1)</sup> )	75.2	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	93.4	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	41.8	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	3.8	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	41.7	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	17.0	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

$3.0V < V_{IN} < V_{IN\_OV}$  and  $V_{IN} > V_{OUT} + V_{SLEEP}$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , and  $T_J = 25^{\circ}C$  for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>QUIESCENT CURRENTS</b>						
$I_{Q\_OUT}$	Quiescent output current (OUT)	OUT = 4.2V, IN floating or IN = 0V - 5V, Charge Disabled, $T_J = 25^{\circ}C$		0.350	0.6	$\mu A$
		OUT = 4.2V, IN floating or IN = 0V - 5V, Charge Disabled, $T_J < 105^{\circ}C$		0.350	0.8	$\mu A$
$I_{SD\_IN\_TS}$	Shutdown input current (IN) with charge disabled via TS pin	IN = 5V, Charge Disabled ( $V_{TS} < V_{TS\_ENZ}$ ), no battery		80	110	$\mu A$
$I_{STANDBY\_IN}$	Standby input current (IN) with charge terminated	IN = 5V, Charge Enabled, charge terminated		190		$\mu A$
$I_{Q\_IN}$	Quiescent input current (IN)	IN = 5V, OUT = 3.8V, Charge Enabled, ICHG = 0A		0.45	0.6	mA
<b>INPUT</b>						
$V_{IN\_OP}$	IN operating range		3.0		6.6	V
$V_{IN\_LOWV}$	IN voltage to start charging	IN rising	3.05	3.09	3.15	V
$V_{IN\_LOWV}$	IN voltage to stop charging	IN falling	2.80	2.95	3.10	V
$V_{SLEEPZ}$	Exit sleep mode threshold	IN rising, $V_{IN} - V_{OUT}$ , OUT = 4V	95	135	175	mV
$V_{SLEEP}$	Sleep mode threshold hysteresis	IN falling, $V_{IN} - V_{OUT}$ , OUT = 4V		80		mV
$V_{IN\_OV}$	VIN overvoltage rising threshold	IN rising	6.60	6.75	6.90	V
$V_{IN\_OVZ}$	VIN overvoltage falling threshold	IN falling		6.63		V
<b>CONFIGURATION PINS SHORT/OPEN PROTECTION</b>						
$R_{ISET\_SHORT}$	Highest resistor value considered short	$R_{ISET}$ below this at startup, charger does not initiate charge, power cycle or TS toggle to reset			350	$\Omega$
$R_{VSET\_SHORT}$	Highest resistor value considered short	$R_{VSET}$ below this at startup, charger does not initiate charge, power cycle or TS toggle to reset			2.8	k $\Omega$
$R_{VSET\_OPEN}$	Lowest resistor value considered open	$R_{VSET}$ above this at startup, charger does not initiate charge, power cycle or TS toggle to reset	120			k $\Omega$
<b>BATTERY CHARGER</b>						
$V_{DO}$	Dropout voltage ( $V_{IN} - V_{OUT}$ )	VIN falling, VOUT = 4.35V, IOU = 500mA		425		mV
$V_{REG\_ACC}$	OUT charge voltage regulation accuracy	$T_J = 25^{\circ}C$ , all VSET settings	-0.5		0.5	%
		$T_J = -40^{\circ}C$ to $125^{\circ}C$ , all VSET settings	-0.8		0.8	%
$I_{CHG\_RANGE}$	Typical charge current regulation range	$V_{OUT} > V_{BAT\_LOWV}$	10		800	mA
$K_{ISET}$	Charge current setting factor, $I_{CHG} = K_{ISET} / R_{ISET}$	$10mA < I_{CHG} < 800mA$	270	300	330	A $\Omega$
$I_{CHG\_ACC}$	Charge current accuracy	$R_{ISET} = 375\Omega$ , OUT = 3.8V	720	800	880	mA
		$R_{ISET} = 600\Omega$ , OUT = 3.8V	450	500	550	mA
		$R_{ISET} = 3.0k\Omega$ , OUT = 3.8V	90	100	110	mA
		$R_{ISET} = 30k\Omega$ , OUT = 3.8V	9	10	11	mA
$I_{PRECHG}$	Typical pre-charge current, as percentage of ICHG	$V_{OUT} < V_{BAT\_LOWV}$		20		%
$I_{PRECHG\_ACC}$	Precharge current accuracy	$R_{ISET} = 375\Omega$ , OUT = 2.5V	144	160	176	mA
		$R_{ISET} = 600\Omega$ , OUT = 2.5V	85	100	110	mA
		$R_{ISET} = 3.0k\Omega$ , OUT = 2.5V	18	20	22	mA
		$R_{ISET} = 30k\Omega$ , OUT = 2.5V	1.4	2	2.6	mA

## 6.5 Electrical Characteristics (continued)

$3.0V < V_{IN} < V_{IN\_OV}$  and  $V_{IN} > V_{OUT} + V_{SLEEP}$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , and  $T_J = 25^{\circ}C$  for typical values (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I <sub>TERM</sub>	Typical termination current, as percentage of ICHG	V <sub>OUT</sub> = V <sub>REG</sub>		10		%
I <sub>TERM_ACC</sub>	Termination current accuracy	R <sub>ISET</sub> = 600Ω, OUT = V <sub>REG</sub> = 4.2V	45	50	55	mA
		R <sub>ISET</sub> = 3.0kΩ, OUT = V <sub>REG</sub> = 4.2V	8.5	10	11.5	mA
		R <sub>ISET</sub> =30kΩ, OUT = V <sub>REG</sub> = 4.2V	0.4	1	1.6	mA
V <sub>BAT_SHORT</sub>	Output (OUT) short circuit voltage rising threshold, for Li-Ion chemistry	OUT rising, VSET configured for Li-Ion	2.1	2.2	2.3	V
V <sub>BAT_SHORT</sub>	Output (OUT) short circuit voltage rising threshold, for LiFePO <sub>4</sub> chemistry	OUT rising, VSET configured for LiFePO <sub>4</sub>	1.1	1.2	1.3	V
V <sub>BAT_SHORT_HYS</sub>	Output (OUT) short circuit voltage hysteresis	OUT falling		200		mV
I <sub>BAT_SHORT</sub>	OUT short circuit charging current	V <sub>OUT</sub> < V <sub>BAT_SHORT</sub>	12	16	20	mA
V <sub>BAT_LOWV</sub>	Pre-charge to fast-charge transition threshold, for Li-Ion chemistry	OUT rising, VSET configured for Li-Ion	2.7	2.8	3.0	V
V <sub>BAT_LOWV</sub>	Pre-charge to fast-charge transition threshold for Li-FePO <sub>4</sub> chemistry	OUT rising, VSET configured for LiFePO <sub>4</sub>	1.9	2.0	2.1	V
V <sub>BAT_LOWV_HYS</sub>	Battery LOWV hysteresis	OUT falling		100		mV
V <sub>RECHG</sub>	Battery recharge threshold for Li-Ion chemistry	OUT falling, VSET configured for Li-Ion V <sub>REG_ACC</sub> - V <sub>OUT</sub>	75	100	125	mV
V <sub>RECHG</sub>	Battery recharge threshold for LiFePO <sub>4</sub> chemistry	OUT falling, VSET configured for LiFePO <sub>4</sub> , V <sub>REG_ACC</sub> - V <sub>OUT</sub>	175	200	225	mV
R <sub>ON</sub>	Charging path FET on-resistance	I <sub>OUT</sub> = 400mA, T <sub>J</sub> = 25°C		845	1000	mΩ
		I <sub>OUT</sub> = 400mA, T <sub>J</sub> = -40 - 125°C		845	1450	mΩ
BATTERY CHARGER PROTECTION						
V <sub>OUT_OVP</sub>	OUT overvoltage rising threshold	V <sub>OUT</sub> rising, as percentage of VSET	103	104	105	%
V <sub>OUT_OVP</sub>	OUT overvoltage falling threshold	V <sub>OUT</sub> falling, as percentage of VSET	101	102	103	%
I <sub>OUT_OCP</sub>	Output current limit threshold	I <sub>OUT</sub> rising	0.9	1	1.1	A
TEMPERATURE REGULATION AND TEMPERATURE SHUTDOWN						
T <sub>REG</sub>	Typical junction temperature regulation			125		°C
T <sub>SHUT</sub>	Thermal shutdown rising threshold	Temperature increasing		150		°C
	Thermal shutdown falling threshold	Temperature decreasing		135		°C
BATTERY-PACK NTC MONITOR						
I <sub>TS_BIAS</sub>	TS nominal bias current		36.5	38	39.5	μA
V <sub>COLD</sub>	Cool to cold temperature theshold; Charge disabled	TS rising (approx. 0°C)	0.99	1.04	1.09	V
	Cold to cool temperature threshold; Charge current target increased to 20% x ISET	TS falling (approx. 4°C)	0.83	0.88	0.93	V
V <sub>COOL</sub>	Normal to cool temperature threshold; Charge current target reduced to 20% x ISET	TS rising (approx. 10°C)	650	680	710	mV
	Cool to normal temperature threshold; Charge current target increased to ISET	TS falling (approx. 13°C)	580	610	640	mV

## 6.5 Electrical Characteristics (continued)

$3.0V < V_{IN} < V_{IN\_OV}$  and  $V_{IN} > V_{OUT} + V_{SLEEP}$ ,  $T_J = -40^{\circ}C$  to  $+125^{\circ}C$ , and  $T_J = 25^{\circ}C$  for typical values (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{WARM}$	Normal to warm temperature threshold; Charge current target reduced to 50% x ISET; $V_{REG}$ reduced to 4.1V for VSET = 4.2 V, 4.35 V, 4.4 V	TS falling (approx. 45°C)	176	188	200	mV
	Warm to normal temperature threshold; Charge current target increased to ISET; $V_{REG}$ increased to VSET for VSET = 4.2 V, 4.35 V, 4.4 V	TS rising (approx. 40°C)	208	220	232	mV
$V_{HOT}$	Warm to hot temperature threshold; charge disabled	TS falling (approx. 55°C)	125	135	145	mV
	Hot to warm temperature threshold; Charge current target increased to 50% x ISET; $V_{REG}$ set to 4.1V for VSET = 4.2 V, 4.35 V, 4.4 V	TS rising (approx. 51°C)	148	158	168	mV
$V_{TS\_ENZ}$	Charger shutdown threshold; IC enters shutdown mode	TS falling	40	50	60	mV
$V_{TS\_EN}$	Charge enable threshold; Crossing this threshold restarts IC operation	TS rising	65	75	85	mV
$V_{TS\_CLAMP}$	TS maximum voltage clamp	TS open-circuit (float)	2.3	2.6	2.9	V
$I_{TS\_LEAK}$	TS pin high-level leakage	Pull-up rail 1.8V			1	μA
<b>LOGIC OUTPUT PIN (STAT, PG)</b>						
$V_{OL}$	Output low threshold level	Sink current = 5mA			0.4	V
$I_{OUT\_BIAS}$	High-level leakage current	Pull up rail 3.3V			1	μA

## 6.6 Timing Requirements


		MIN	NOM	MAX	UNIT
<b>BATTERY CHARGER</b>					
$t_{TS\_DUTY\_ON}$	TS turn-on time during TS duty cycle mode		100		ms
$t_{TS\_DUTY\_OFF}$	TS turn-off time during TS duty cycle mode		2		s
$t_{OUT\_OCP\_DGL}$	Deglintch time for $I_{OUT\_OCP}$ , IOOUT rising		100		μs
$t_{PRECHG}$	Pre-charge safety timer accuracy	28.5	30	31.5	min
$t_{SAFETY}$	Fast-charge safety timer accuracy	9.5	10	10.5	hr

## 6.7 Typical Characteristics


$C_{IN} = 1 \mu F$ ,  $C_{OUT} = 1 \mu F$ ,  $V_{IN} = 5 V$ ,  $V_{OUT} = 3.8 V$  (unless otherwise specified)

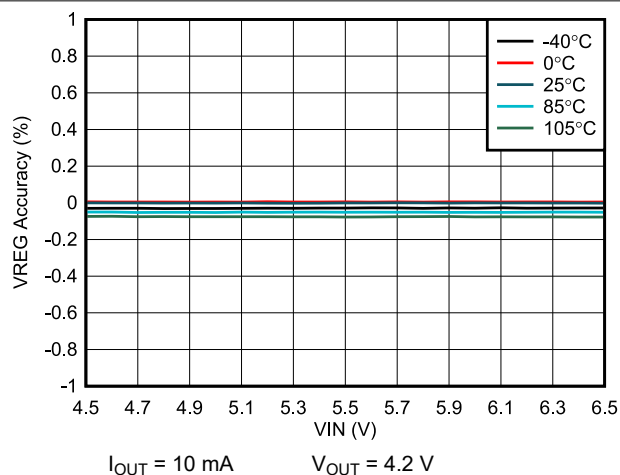


**Figure 6-1. Line Regulation**

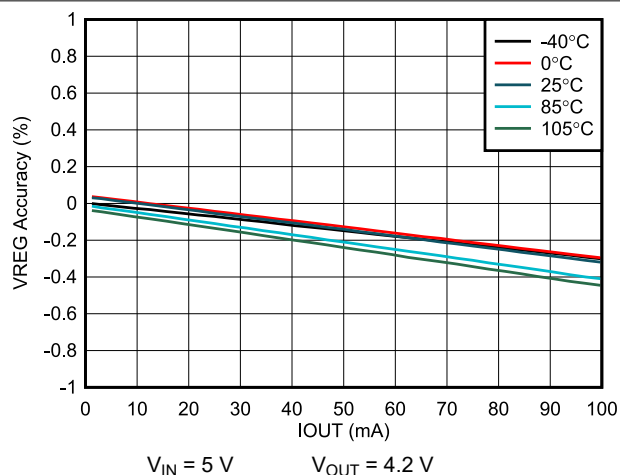


**Figure 6-2. Load Regulation**

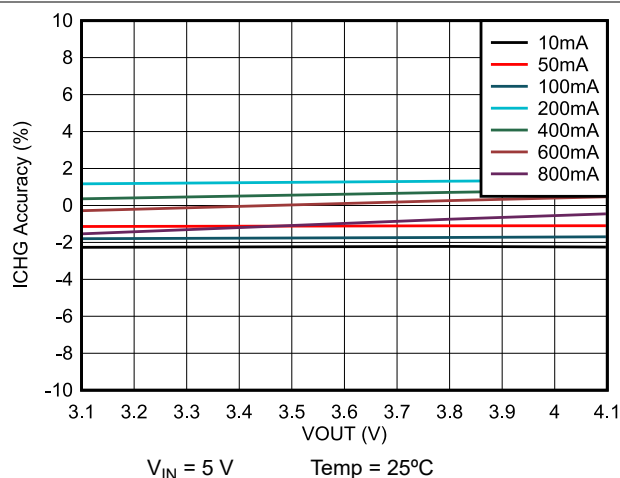


**Figure 6-3. ICHG Accuracy vs.  $V_{OUT}$**

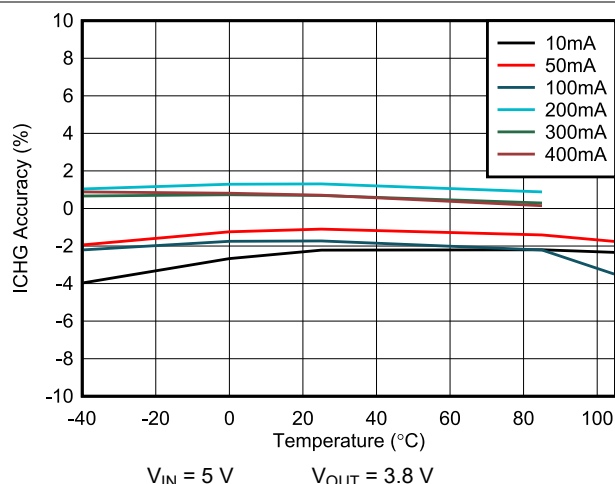





**Figure 6-4. ICHG Accuracy vs. Temperature**

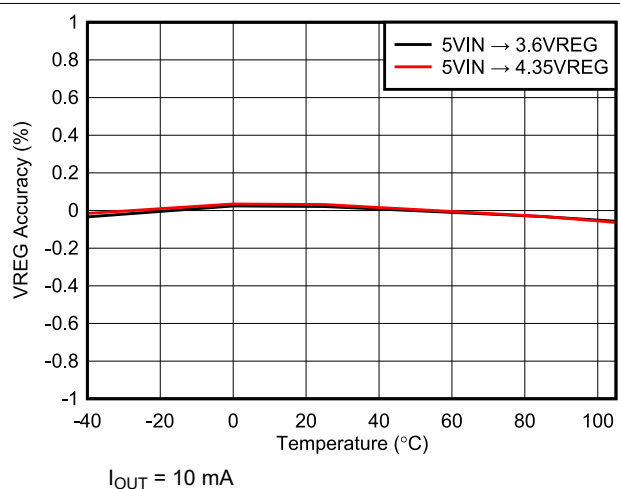

**Figure 6-5. VSET Accuracy vs. Temperature**

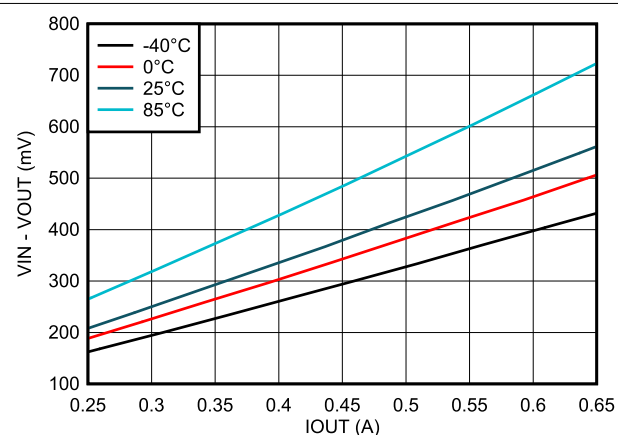

**Figure 6-6. Dropout Voltage vs. Output Current**

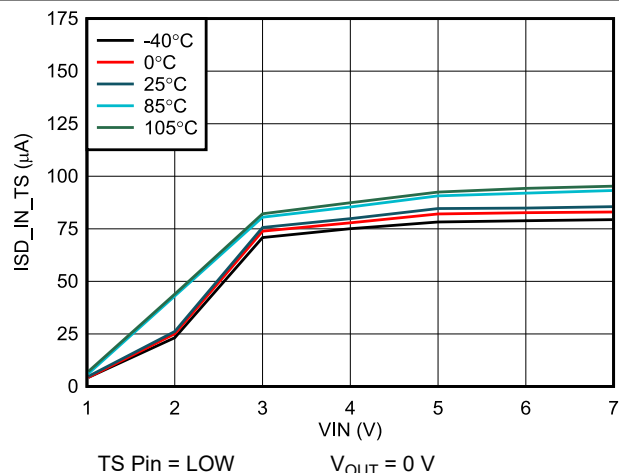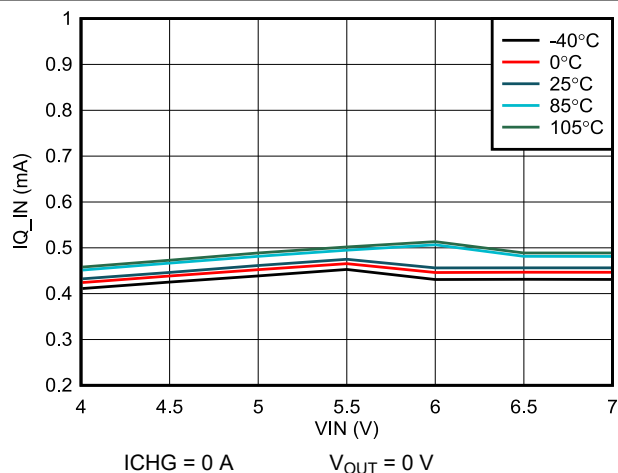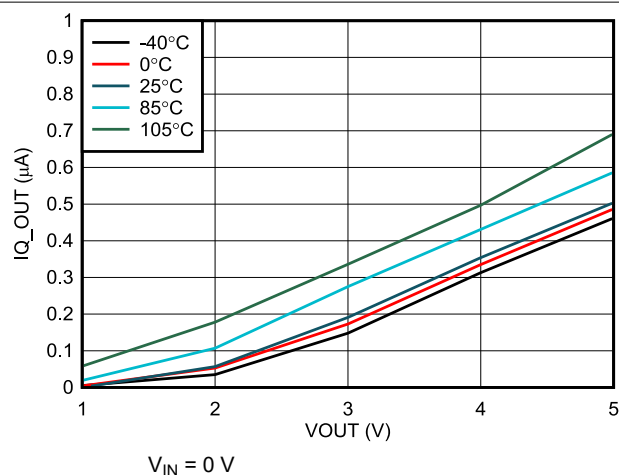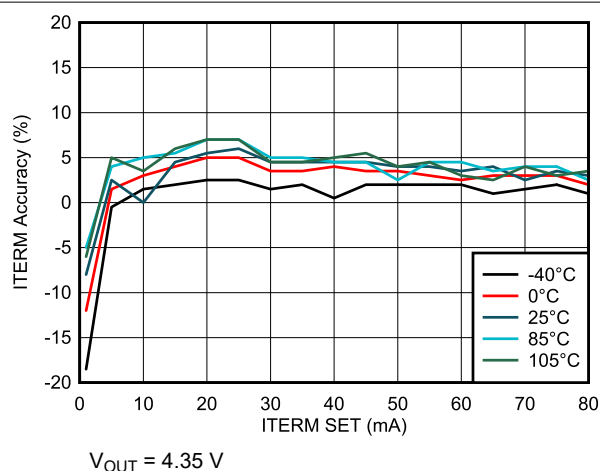
**Figure 6-7. Input Shutdown Current vs. Input Voltage**

**Figure 6-8. Input Quiescent Current vs. Input Voltage**

**Figure 6-9. Output Quiescent Current vs. Output Voltage**

**Figure 6-10. Termination Current Accuracy vs. Termination Current Setting**

## 7 Detailed Description

### 7.1 Overview

The BQ25170J is an integrated 800-mA linear charger for 1-cell Li-Ion, Li-Polymer, and LiFePO<sub>4</sub> batteries. The device has a single power output that charges the battery. The system load can be placed in parallel with the battery, as long as the average system load does not prevent the battery from charging fully within the safety timer duration. When the system load is placed in parallel with the battery, the input current is shared between the system and the battery.

The device has three phases for charging a Li-Ion battery: precharge to recover a fully discharged battery, fast-charge constant current to supply the bulk of the charge, and voltage regulation to reach full capacity.

The charger includes flexibility in programming of the fast-charge current and regulation voltage. This charger is designed to work with a standard USB connection or dedicated charging adapter (DC output).

The charger also comes with a full set of safety features: battery temperature monitoring, overvoltage protection, charge safety timers, and configuration pin (VSET, ISET) short and open protection. All of these features and more are described in detail below.


The charger is designed for a single path from the input to the output to charge the battery. Upon application of a valid input power source, the configuration pins are checked for short/open circuit.

If the Li-Ion battery voltage is below the  $V_{BAT\_LOWV}$  threshold, the battery is considered discharged and a preconditioning cycle begins. The amount of precharge current is 20% of the programmed fast-charge current via ISET pin. The  $t_{PRECHG}$  safety timer is active, and stops charging after expiration if battery voltage fails to rise above  $V_{BAT\_LOWV}$ .

Once the battery has charged to the  $V_{BAT\_LOWV}$  threshold, Fast Charge Mode is initiated, applying the fast charge current and starting the  $t_{SAFETY}$  timer. The fast charge constant current is programmed using the ISET pin. The constant current phase provides the bulk of the charge. Power dissipation in the IC is greatest in fast charge with a lower battery voltage. If the IC temperature reaches  $T_{REG}$ , the IC enters thermal regulation, slows the timer clock by half, and reduces the charge current as needed to keep the temperature from rising any further. [Figure 7-1](#) shows the typical Lithium battery charging profile with thermal regulation. Under normal operating conditions, the IC's junction temperature is less than  $T_{REG}$  and thermal regulation is not entered.


Once the battery has charged to the regulation voltage, the voltage loop takes control and holds the battery at the regulation voltage until the current tapers to the termination threshold. The termination threshold is 10% of the programmed fast-charge current.

Further details are described in [セクション 7.3](#).

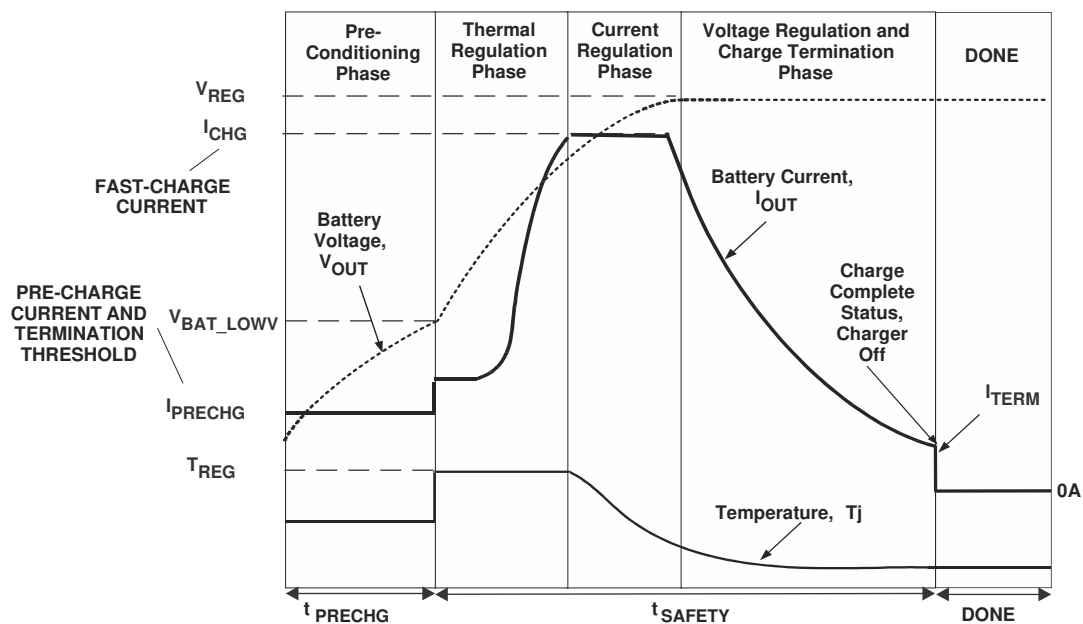

7-1. Lithium-Ion Battery Charging Profile with Thermal Regulation

## 7.2 Functional Block Diagram

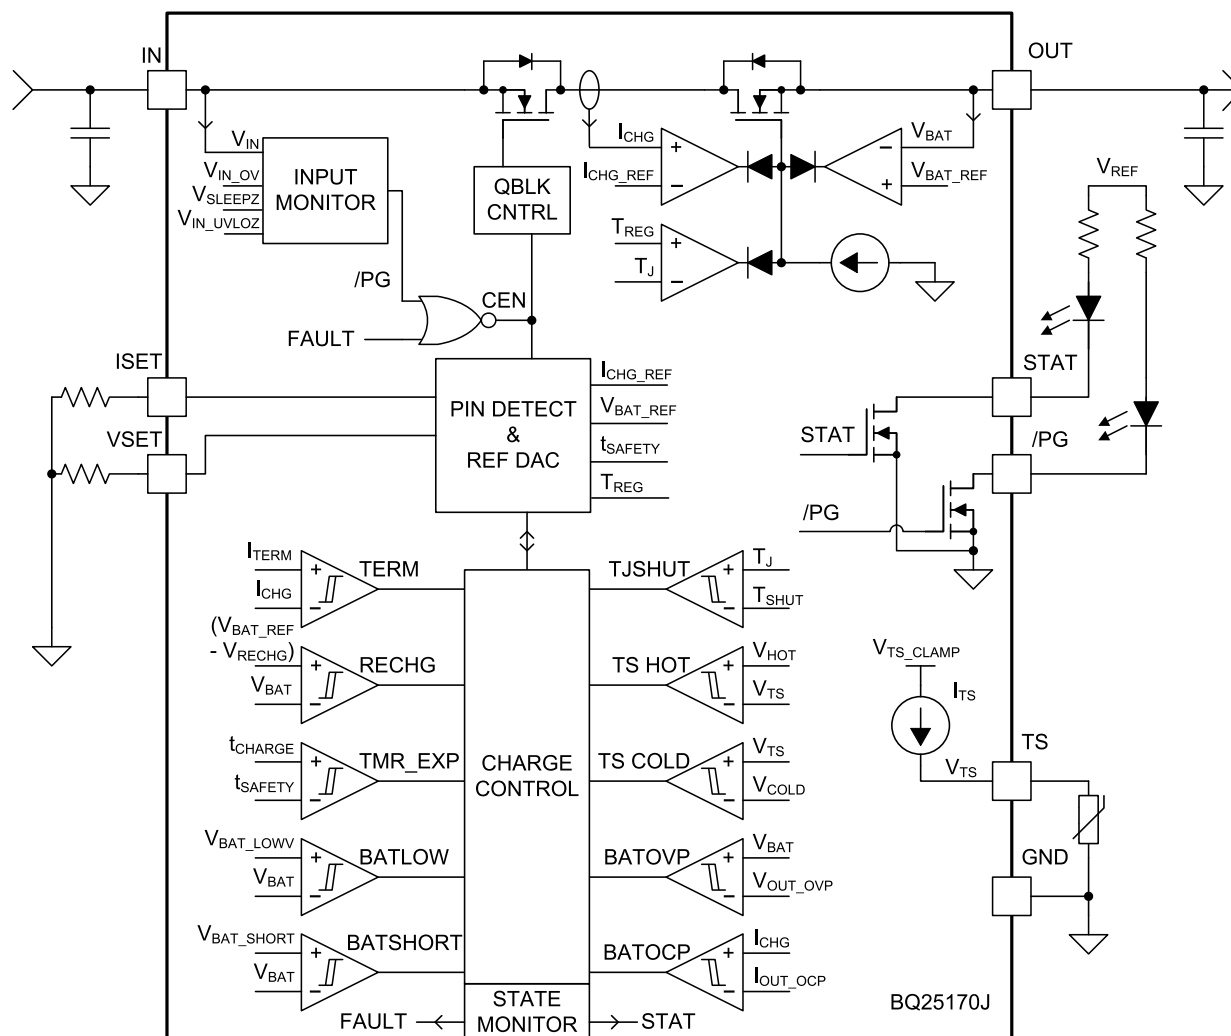

## 7.3 Feature Description

### 7.3.1 Device Power Up from Input Source

When an input source is plugged in and charge is enabled, the device checks the input source voltage to turn on all the bias circuits. It detects and sets the charge current and charge voltage limits before the linear regulator is started. The power up sequence from input source is as listed:

1. ISET pin detection
2. VSET pin detection to select charge voltage
3. Charger power up

#### 7.3.1.1 ISET Pin Detection

After a valid VIN is plugged in, the device checks the resistor on the ISET pin for a short circuit ( $R_{ISET} < R_{ISET\_SHORT}$ ). If a short condition is detected, the charger remains in the FAULT state until the input or TS pin is toggled. If the ISET pin is open-circuit, the charger proceeds through pin detection and starts the charger with no charge current. This pin is monitored while charging and changes in  $R_{ISET}$  while the charger is operating will immediately translate to changes in charge current.

An external pulldown resistor ( $\pm 1\%$  or better recommended to minimize charge current error) from ISET pin to GND sets the charge current as:

$$I_{CHG} = \frac{K_{ISET}}{R_{ISET}} \quad (1)$$

where

- $I_{CHG}$  is the desired fast-charge current
- $K_{ISET}$  is a gain factor found in the electrical specifications
- $R_{ISET}$  is the pulldown resistor from ISET pin to GND

For charge currents below 50 mA, an extra RC circuit is recommended on ISET to achieve more stable current signal. For greater accuracy at lower currents, part of the current-sensing FET is disabled to give better resolution.

#### 7.3.1.2 VSET Pin Detection

VSET pin is used to program the device regulation voltage at end-of-charge using a  $\pm 1\%$  pulldown resistor. The available pulldown resistor and corresponding charging levels are:

**表 7-1. VSET Pin Resistor Value Table**

RESISTOR	CHARGE VOLTAGE (V)
> 150 kΩ	No Charge (open-circuit)
100 kΩ	1-cell LiFePO <sub>4</sub> : 3.50 V
82 kΩ	1-cell LiFePO <sub>4</sub> : 3.60 V
62 kΩ	1-cell LiFePO <sub>4</sub> : 3.70 V
47 kΩ	1-cell Lilon: 4.05 V
36 kΩ	1-cell Lilon: 4.10 V
27 kΩ	1-cell Lilon: 4.20 V
24 kΩ	1-cell Lilon: 4.35 V
18 kΩ	1-cell Lilon: 4.40 V
< 3.0 kΩ	No Charge (short-circuit)

If either a short- or open-circuit condition is detected, charger stops operation and remains in the FAULT state until the input or TS pin is toggled.

Once a valid resistor value has been detected, the corresponding charge voltage is latched in and the pin is not continuously monitored during operation. A change in this pin will not be acknowledged by the IC until the input supply or TS pin is toggled.

### 7.3.1.3 Charger Power Up

After VSET, ISET pin resistor values have been validated, the device proceeds to enable the charger. The device automatically begins operation at the correct stage of battery charging depending on the OUT voltage.


## 7.3.2 Battery Charging Features

When charge is enabled, the device automatically completes a charging cycle according to the settings on VSET, ISET pins without any intervention. The lithium-based charging cycle is automatically terminated when the charging current is below termination threshold, charge voltage is above recharge threshold, and device is not in thermal regulation (TREG). When a full battery is discharged below the recharge threshold ( $V_{RECHG}$ ), the device automatically starts a new charging cycle. After charge is done, toggling the input supply or the TS pin can initiate a new charging cycle.

### 7.3.2.1 Lithium-Ion Battery Charging Profile

The device charges a lithium based battery in four phases: trickle charge, precharge, constant current and constant voltage. At the beginning of a charging cycle, the device checks the battery voltage and regulates current and voltage accordingly.

If the charger is in thermal regulation during charging, the actual charging current will be less than the programmed value. In this case, termination is temporarily disabled and the charging safety timer is counted at half the clock rate. For more information, refer to [セクション 7.3.2.3](#).

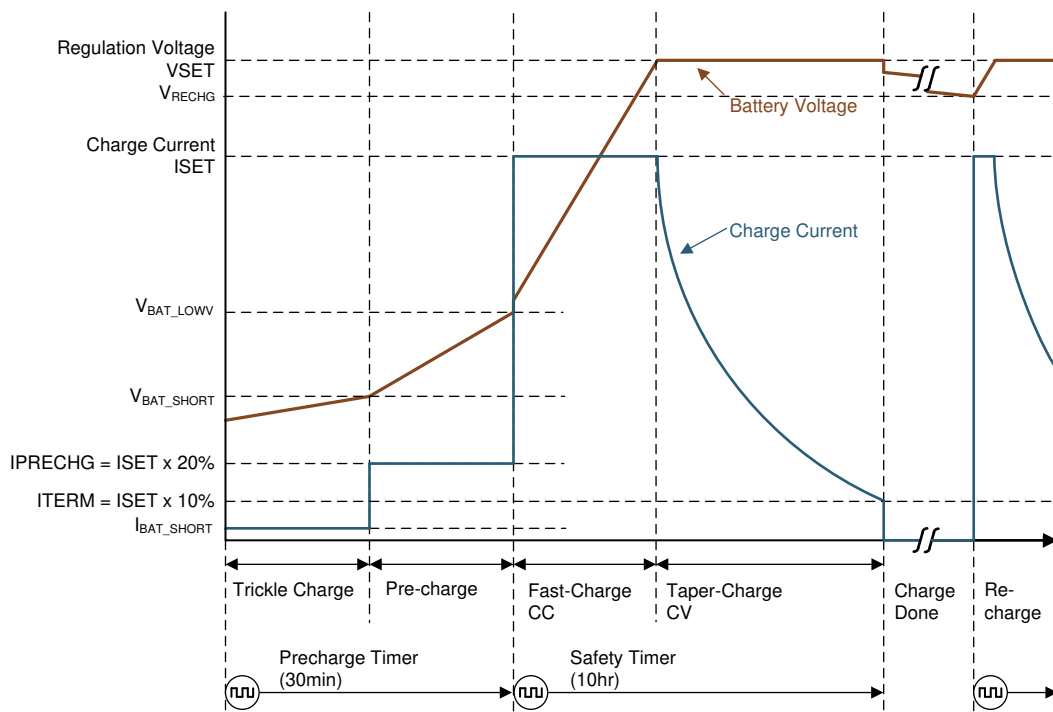

**7-2. Battery Charging Profile**

### 7.3.2.2 Charge Termination and Battery Recharge

device terminates a charge cycle when the OUT pin voltage is above the recharge threshold ( $V_{RECHG}$ ), and the current is below the termination threshold ( $I_{TERM}$ ). Termination is temporarily disabled when the charger device is

in thermal regulation. After charge termination is detected, the linear regulator turns off and the device enters STANDBY state. Once the OUT pin drops below the  $V_{RECHG}$  threshold, a new charge cycle is automatically initiated.

### 7.3.2.3 Charging Safety Timers

The device has built-in safety timers to prevent an extended charging cycle due to abnormal battery conditions. The precharge timer is fixed at 30 minutes. The fast-charge safety timer is fixed at 10 hours. When safety timer expires, the charge cycle ends. A toggle on the input supply or TS pin is required to restart a charge cycle after the safety timer has expired.

During thermal regulation, the safety timer counts at half clock rate as the actual charge current is likely to be below the ISET setting. For example, if the charger is in thermal regulation throughout the whole charging cycle, and the safety timer is 10 hours, then the timer will expire in 20 hours.

During faults which disable charging, such as VIN OVP, BAT OVP, TSHUT or TS faults, the timer is suspended. Once the fault goes away, charging and the safety timer resumes. If the charging cycle is stopped and started again, the timer gets reset (toggle TS pin restarts the timer).

The safety timer restarts counting for the following events:

1. Charging cycle stop and restart (toggle TS pin, charged battery falls below recharge threshold, or toggle input supply)
2. OUT pin voltage crosses the  $V_{BAT\_LOWV}$  threshold in either direction

The precharge safety timer (fixed counter that runs when  $V_{OUT} < V_{BAT\_LOWV}$ ), follows the same rules as the fast-charge safety timer in terms of getting suspended, reset, and counting at half-rate.


### 7.3.2.4 Battery Temperature Qualification (TS Pin)

While charging, the device continuously monitors battery temperature by sensing the voltage at the TS pin. A negative temperature coefficient (NTC) thermistor should be connected between the TS and GND pins (recommend: 103AT-2). If temperature sensing is not required in the application, connect a fixed 10-k $\Omega$  resistor from TS to GND to allow normal operation.

The TS function for BQ25170J is designed to follow the JEITA temperature standard for Li-Ion and Li-Poly batteries; charge current (ISET) and regulation voltage ( $V_{REG}$ ) are reduced based on battery temp (TS). There are four thresholds, Hot-55C, Warm-45C, Cool-10C and Cold-0C.

Normal operation occurs between 10C and 45C, charge current and voltage will be the normal values. When battery is in the Cool temperature range, between 0C and 10C, the charger current level is 20% of ISET value and regulation voltage is not changed. When the battery is in the Warm temperature range, between 45C and 55C, ISET is reduced by 50% and regulation voltage is reduced to 4.1V for VSET settings greater than 4.1V. Regulation voltage is not reduced during the Warm region for VSET settings less than or equal to 4.1V. Charge is suspended below Cold temp of 0C and above Hot temp of 55C. When charge is suspended device enters the STANDBY state, and blinks the STAT pin. Once battery temperature returns to normal conditions, charging resumes automatically. See [Figure 7-3](#).

When charge current is reduced during Cool or Warm temp the safety timer runs at half the clock rate.

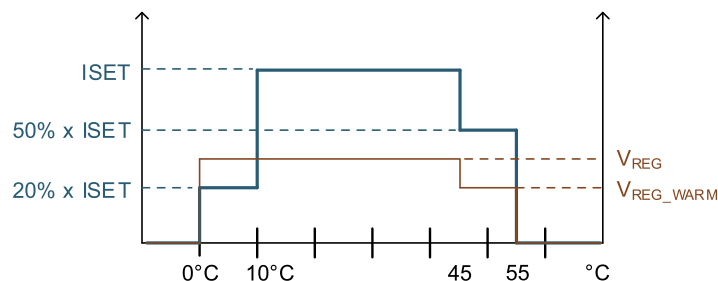

**Figure 7-3. Standard JEITA Profile figure**

In addition to battery temperature sensing, the TS pin can be used to disable the charger at any time by pulling TS voltage below  $V_{TS\_ENZ}$ . The device disables the charger and consumes  $I_{SD\_IN\_TS}$  from the input supply. In order to minimize quiescent current, the TS current source ( $I_{TS\_BIAS}$ ) is duty-cycled, with an on-time of  $t_{TS\_DUTY\_ON}$  and an off time of  $t_{TS\_DUTY\_OFF}$ . After the TS pin pull-down is released, the device may take up to  $t_{TS\_DUTY\_OFF}$  to turn the  $I_{TS\_BIAS}$  back on. After the source is turned on, the TS pin voltage will go above  $V_{TS\_EN}$ , and re-enable the charger operation. The device treats this TS pin toggle as an input supply toggle, triggering Device Power Up From Input Source (セクション 7.3.1).

### 7.3.3 Status Outputs ( $\overline{PG}$ , STAT)

#### 7.3.3.1 Power Good Indicator ( $\overline{PG}$ Pin)

This open-drain pin pulls LOW to indicate a good input source when:

1. VIN above  $V_{IN\_LOWV}$
2. VIN above  $V_{OUT} + V_{SLEEPZ}$  (not in SLEEP)
3. VIN below  $V_{IN\_OV}$

#### 7.3.3.2 Charging Status Indicator (STAT)

The device indicates the charging state on the open-drain STAT pin. This pin can drive an LED.

**表 7-2. STAT pin state**

CHARGING STATE	STAT PIN STATE
Charge completed, charger in sleep mode or charge disabled ( $V_{TS} < V_{TS\_ENZ}$ )	HIGH
Charge in progress (including automatic recharge)	LOW
Fault (VIN OVP, BAT OVP, BAT OCP, TS HOT, TS COLD, TMR_EXP, VSET pin short/open or ISET pin short)	BLINK at 1Hz

### 7.3.4 Protection Features

The device closely monitors input and output voltage, as well as internal FET current and temperature for safe linear regulator operation.

#### 7.3.4.1 Input Overvoltage Protection (VIN OVP)


If the voltage at IN pin exceeds  $V_{IN\_OV}$ , the device turns off after a deglitch,  $t_{VIN\_OV\_DGL}$ . The safety timer suspends count and device enters STANDBY mode. Once the IN voltage recovers to normal level, the charge cycle and the safety timer automatically resume operation.

#### 7.3.4.2 Output Overvoltage Protection (BAT OVP)

If the voltage at OUT pin exceeds  $V_{OUT\_OVP}$ , the device immediately stops charging. The safety timer suspends count and device enters STANDBY mode. Once the OUT voltage recovers to normal level, the charge cycle and the safety timer resume operation.

#### 7.3.4.3 Output Overcurrent Protection (BAT OCP)

During normal operation, the OUT current should be regulated to ISET programmed value. However, if a short circuit occurs on ISET pin, the OUT current may rise to unintended level. If the current at OUT pin exceeds  $I_{OUT\_OCP}$ , the device turns off after a deglitch,  $t_{OUT\_OCP\_DGL}$ . The safety timer resets the count, and device remains latched off. An input supply or TS pin toggle is required to restart operation.

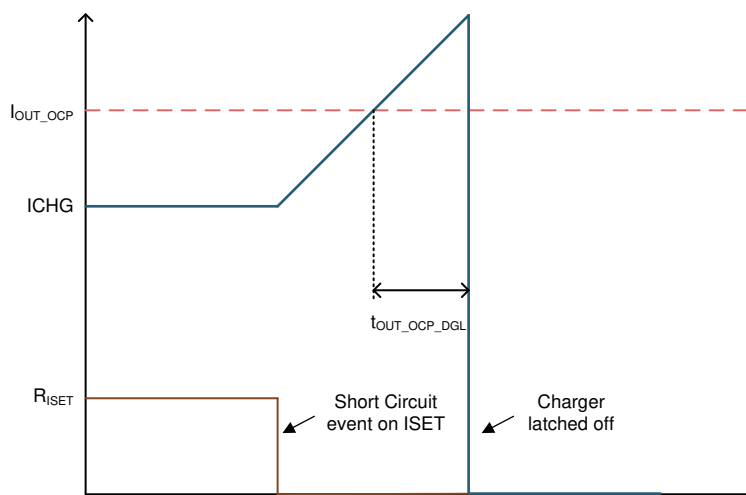

**7-4. Overcurrent Protection**

#### 7.3.4.4 Thermal Regulation and Thermal Shutdown (TREG and TSHUT)

The device monitors its internal junction temperature ( $T_J$ ) to avoid overheating and to limit the IC surface temperature. When the internal junction temperature exceeds the thermal regulation limit, the device automatically reduces the charge current to maintain the junction temperature at the thermal regulation limit (TREG). During thermal regulation, the actual charging current is usually below the programmed value on the ISET pin. Therefore, the termination comparator for the Lithium-Ion battery is disabled, and the safety timer runs at half the clock rate.

Additionally, the device has thermal shutdown to turn off the linear regulator when the IC junction temperature exceeds the TSHUT threshold. The charger resumes operation when the IC die temperature decreases below the TSHUT falling threshold.

### 7.4 Device Functional Modes

#### 7.4.1 Shutdown or Undervoltage Lockout (UVLO)

The device is in shutdown state if the IN pin voltage is less than  $V_{IN\_LOWV}$ , or the TS pin is below  $V_{TS\_ENZ}$ . The internal circuitry is powered down, all the pins are high impedance, and the device draws  $I_{SD\_IN\_TS}$  from the input supply. Once the IN voltage rises above the  $V_{IN\_LOW}$  threshold and the TS pin is above  $V_{TS\_EN}$ , the IC will enter Sleep Mode or Active Mode depending on the OUT pin voltage.

#### 7.4.2 Sleep Mode

The device is in Sleep Mode when  $V_{IN\_LOWV} < V_{IN} < V_{OUT} + V_{SLEEPZ}$ . The device waits for the input voltage to rise above  $V_{OUT} + V_{SLEEPZ}$  to start operation.

#### 7.4.3 Active Mode

The device is powered up and charges the battery when the TS pin is above  $V_{TS\_ENZ}$  and the IN voltage ramps above both  $V_{IN\_LOWV}$ , and  $V_{OUT} + V_{SLEEPZ}$ . The device draws  $I_{Q\_IN}$  from the supply to bias the internal circuitry. For details on device power-up sequence, refer to [セクション 7.3.1](#).

##### 7.4.3.1 Standby Mode

The device is in Standby Mode if a valid input supply is present and charge is terminated or if a recoverable fault is detected. The internal circuitry is partially biased, and the device continues to monitor for either  $V_{OUT}$  to drop below  $V_{RECHG}$ , or the recoverable fault to be removed.

#### 7.4.4 Fault Mode

The fault conditions are categorized into recoverable and nonrecoverable as follows:

- Recoverable, from which the device should automatically recover once the fault condition is removed:
  - VIN OVP
  - BAT OVP
  - TS HOT
  - TS COLD
- Nonrecoverable, requiring TS pin or input supply toggle to resume operation:
  - BAT OCP
  - ISET pin short detected
  - VSET pin short/open detected

## 8 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

A typical application consists of the device configured as a standalone battery charger for single-cell Lithium-Ion, Li-Polymer, or LiFePO<sub>4</sub> chemistries. The charge voltage and number of cells is configured using a pull-down resistor on the VSET pin. The charge current is configured using a pull-down resistor on the ISET pin. A battery thermistor may be connected to the TS pin to allow the device to monitor battery temperature and control charging. Pulling the TS pin below V<sub>TS\_ENZ</sub> disables the charging function. The charger and input supply status is reported via the STAT and PG pins.

### 8.2 Typical Applications

#### 8.2.1 Li-Ion Charger Design Example

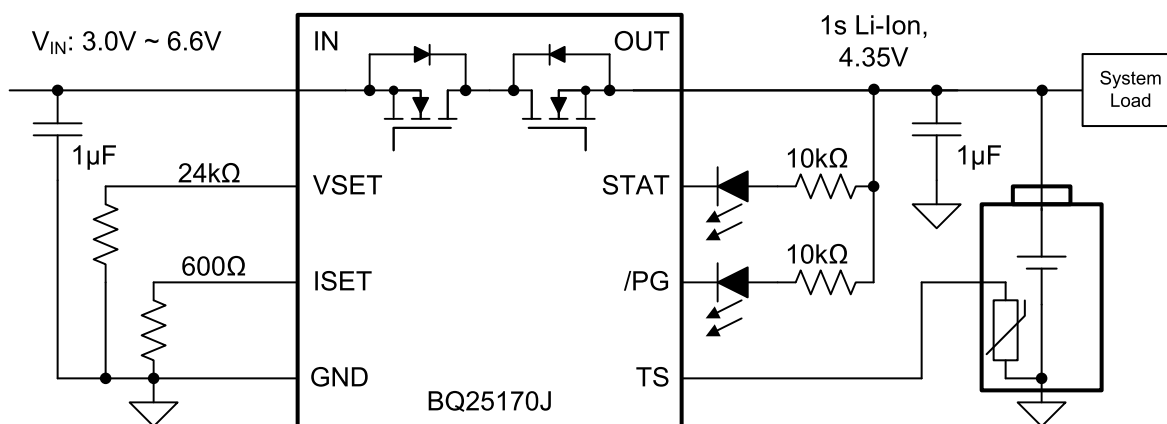


FIG 8-1. BQ25170J Typical Application for Li-Ion Charging at 500 mA

##### 8.2.1.1 Design Requirements

- Supply voltage = 5 V
- Battery is single-cell Li-Ion
- Fast charge current:  $I_{CHG} = 500 \text{ mA}$
- Charge Voltage:  $V_{REG} = 4.35 \text{ V}$
- Termination Current:  $I_{TERM} = 10\% \text{ of } I_{CHG} \text{ or } 50 \text{ mA}$
- Pre-charge Current:  $I_{PRECHG} = 20\% \text{ of } I_{CHG} \text{ or } 100 \text{ mA}$
- TS – Battery Temperature Sense = 10-kΩ NTC (103AT)
- TS pin can be pulled down to disable charging

##### 8.2.1.2 Detailed Design Procedure

The regulation voltage is set via the VSET pin to 4.35 V, the input voltage is 5 V and the charge current is programmed via the ISET pin to 500 mA.

$$R_{ISET} = [K_{ISET} / I_{CHG}]$$


from electrical characteristics table. . .  $K_{ISET} = 300 \text{ A}\Omega$

$$R_{ISET} = [300 \text{ A}\Omega / 0.5 \text{ A}] = 600 \Omega$$

Selecting the closest 1% resistor standard value, use a 604-Ω resistor between ISET and GND, for an expected  $I_{CHG} 497 \text{ mA}$ .


### 8.2.1.3 Application Curves

$C_{IN} = 1 \mu F$ ,  $C_{OUT} = 1 \mu F$ ,  $V_{IN} = 5 V$ ,  $V_{OUT} = 3.8 V$ ,  $I_{CHG} = 250 mA$  (unless otherwise specified)

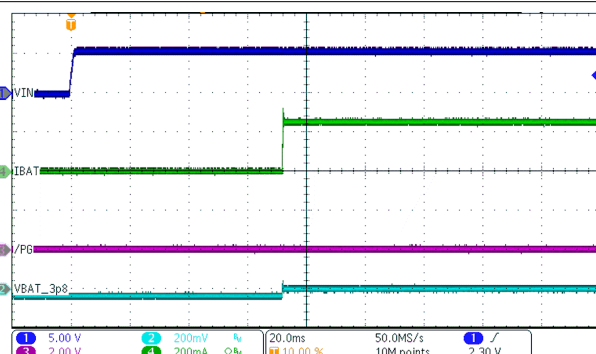


$R_{ISET} = 1.2 k\Omega$

**8-2. Power Up With Battery**

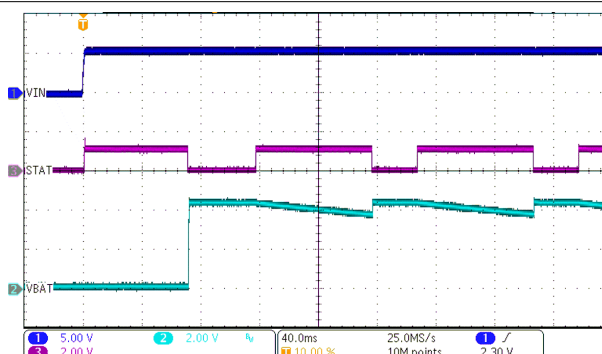


$R_{ISET} = 1.2 k\Omega$  OUT = open-circuit

**8-3. Power Up Without Battery**

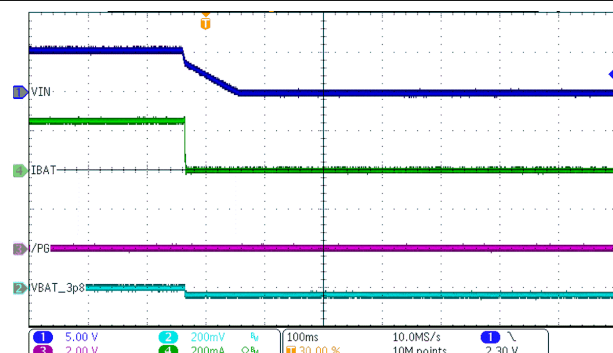


$V_{IN} = 5 V \rightarrow 0 V$

**8-4. Power Down**

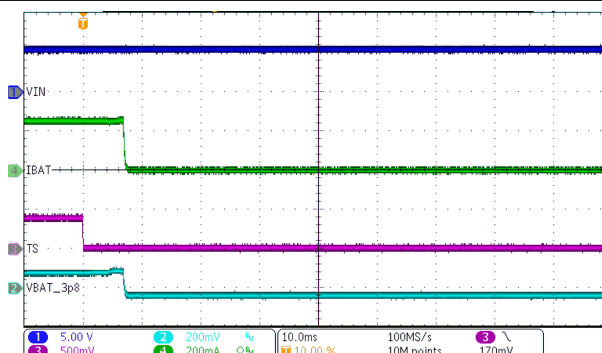


TS pulled LOW

**8-5. Charge Disable**

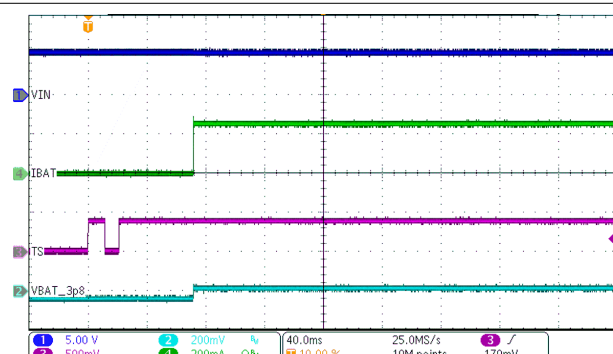







TS pin released

**8-6. Charge Enable**

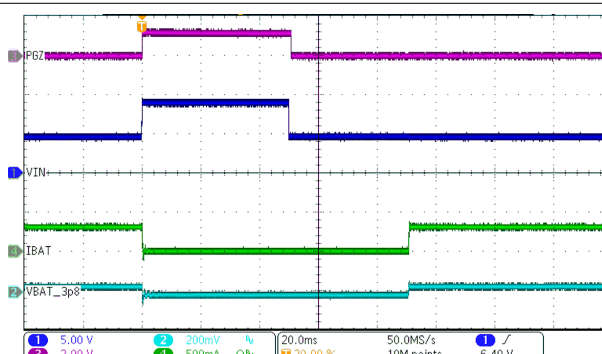

$V_{IN} = 5 V \rightarrow 10 V \rightarrow 5 V$

**8-7. IN OVP Response**

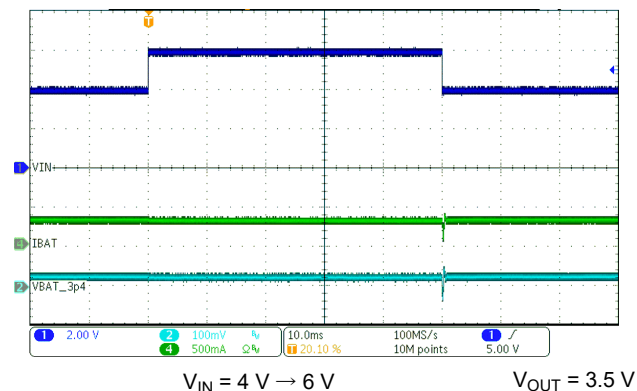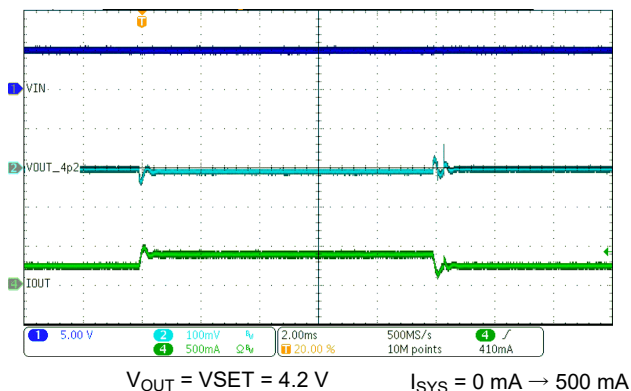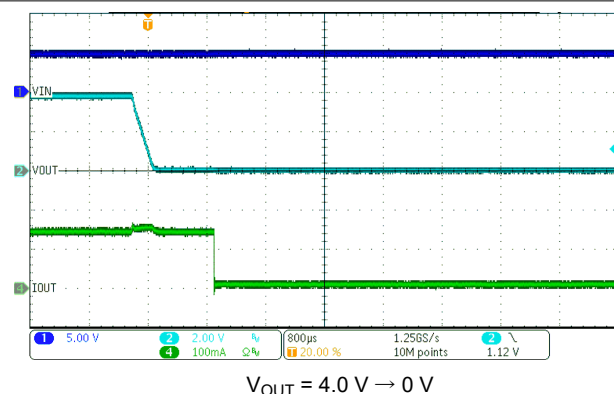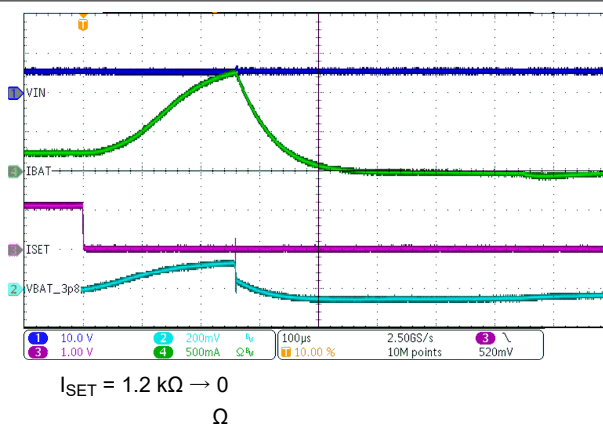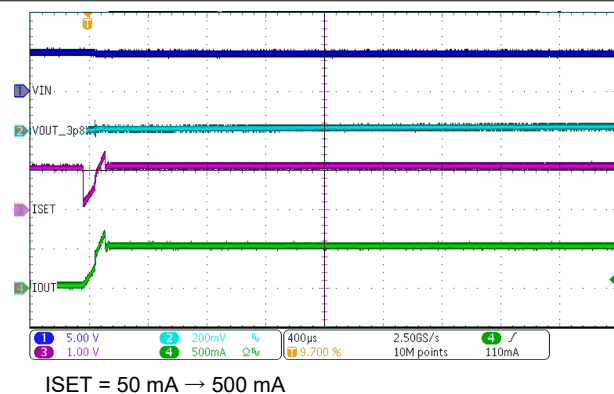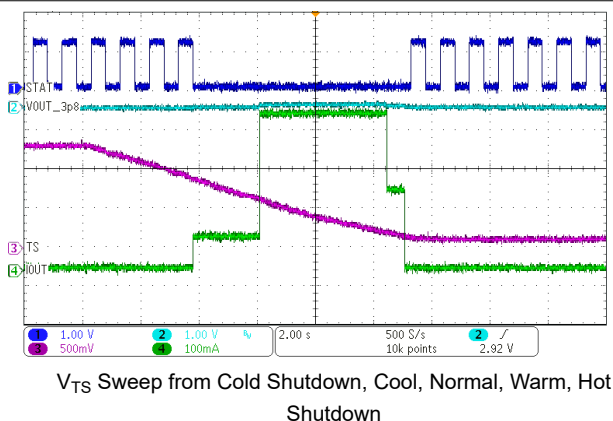
 8-8. IN Transient Response

 8-9. OUT Transient Response

 8-10. OUT Short-Circuit Response

 8-11. ISET Short-Circuit Response

 8-12. ISET Change Response

 8-13. TS Change Response

## 9 Power Supply Recommendations

The device is designed to operate from an input voltage supply range between 3.0 V and 6.6 V (up to 30 V tolerant) and current capability of at least the maximum designed charge current. If located more than a few inches from the IN and GND pins, a larger capacitor is recommended.


## 10 Layout

### 10.1 Layout Guidelines

To obtain optimal performance, the decoupling capacitor from IN to GND and the output filter capacitor from OUT to GND should be placed as close as possible to the device, with short trace runs to both IN, OUT and GND.

- All low-current GND connections should be kept separate from the high-current charge or discharge paths from the battery. Use a single-point ground technique incorporating both the small signal ground path and the power ground path.
- The high current charge paths into IN pin and from the OUT pin must be sized appropriately for the maximum charge current in order to avoid voltage drops in these traces.

### 10.2 Layout Example

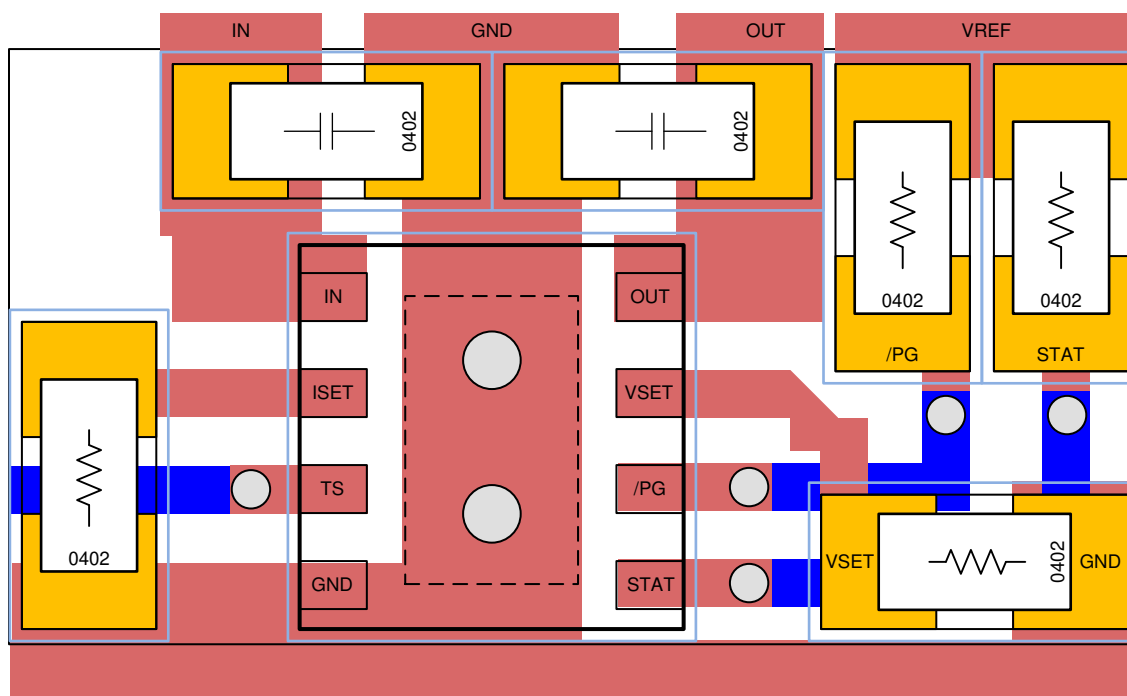

10-1. Board Layout Example

## 11 Device and Documentation Support

### 11.1 Device Support

#### 11.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

#### 11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.3 サポート・リソース

**TI E2E™ サポート・フォーラム**は、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

### 11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

### 11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 11.6 Glossary

#### TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">BQ25170JDSGR</a>	Active	Production	WSO (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	170J
BQ25170JDSGR.A	Active	Production	WSO (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	170J

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## GENERIC PACKAGE VIEW


**DSG 8**



**WSON - 0.8 mm max height**

2 x 2, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

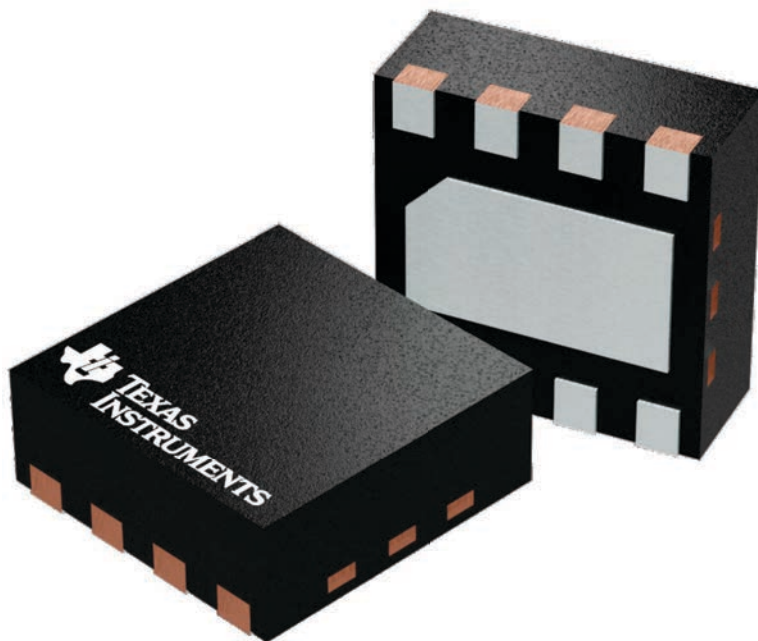

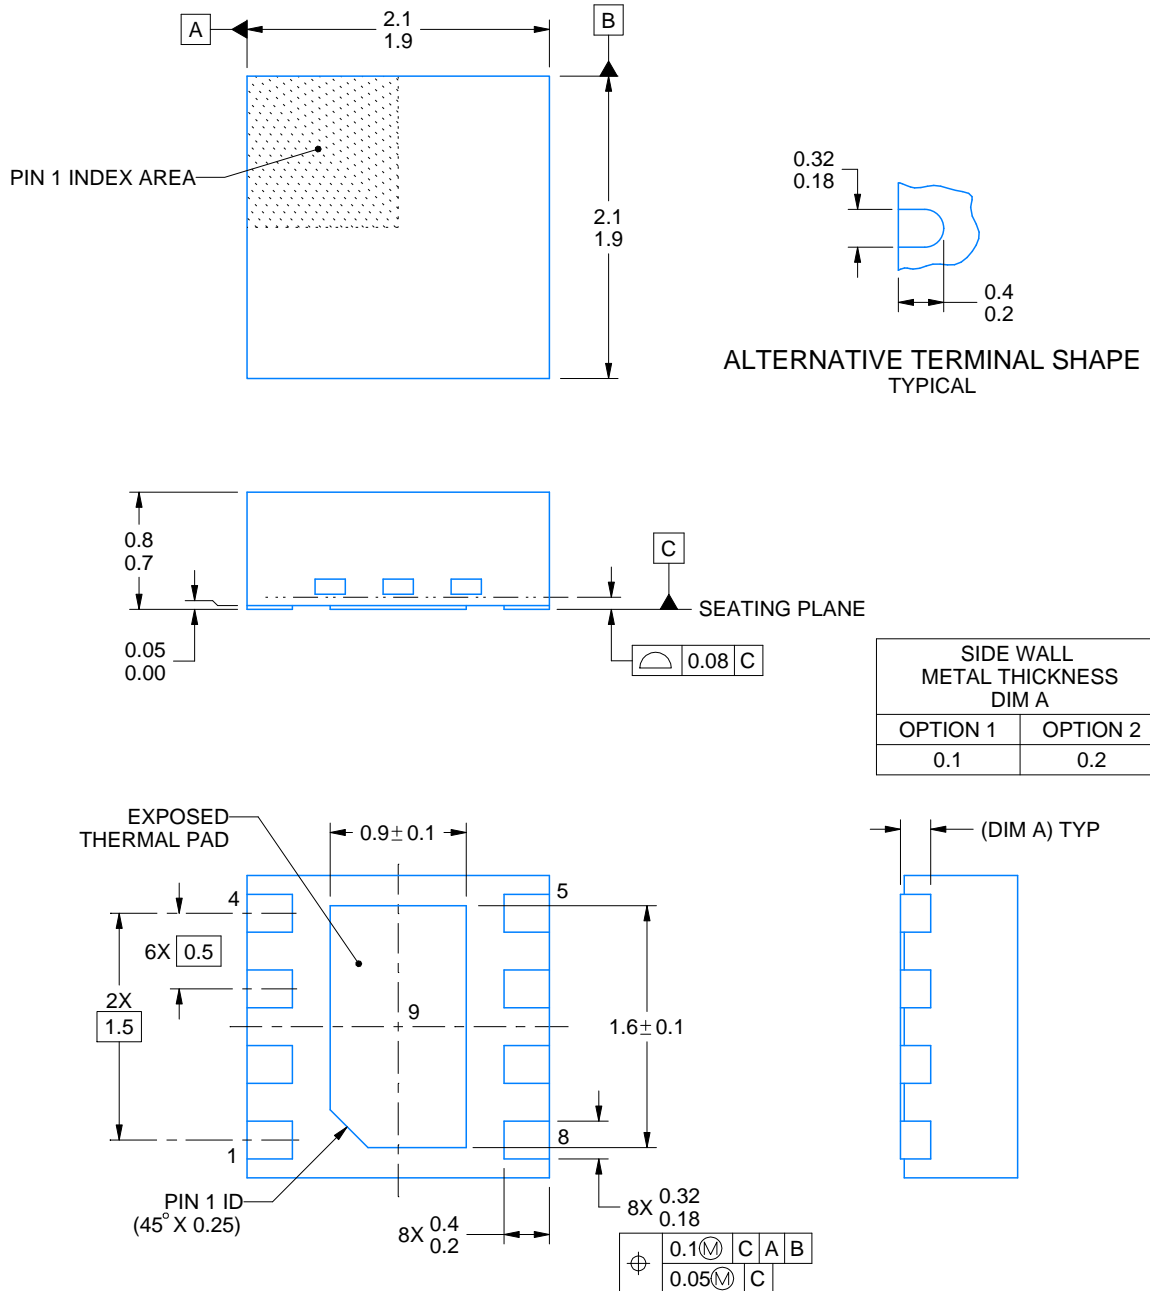

4218900/E 08/2022

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



**DSG0008A**

**WSON - 0.8 mm max height**

PLASTIC SMALL OUTLINE - NO LEAD

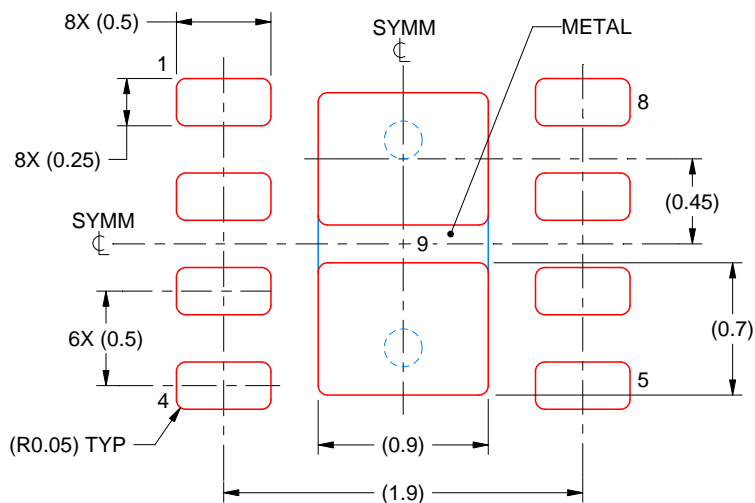

## SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:  
87% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:25X

4218900/E 08/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](https://www.ti.com) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月