TEXAS INSTRUMENTS
ADS54T01
JAJSO07B – DECEMBER 2012 – REVISED APRIL 2022

ADS54T01 シングル、12 ビット、750Msps レシーバ / フィードバック IC

1 特長

- シングル・チャネル
- 12 ビット分解能
- 最大クロック・レート:750Msps
- 低スイング・フルスケール入力:1.0Vpp
- 高インピーダンス入力を備えたアナログ入力バッファ
- 入力帯域幅 (3dB):> 1.2GHz
- データ出力インターフェイス:DDR LVDS
- 196 ピンの NFBGA パッケージ (12mm × 12mm)
- 消費電力:1.2W
- f_{in} = 230MHz IF での性能
  - SNR:60.7dBFS
  - SFDR:73dBc
- f_{in} = 700MHz IF での性能
  - SNR:58.6dBFS
  - SFDR:64dBc
- 受信モード:ローパス・フィルタまたはハイパス・フィルタによる 2 倍のデシメーション
- フィードバック・モード:全帯域幅 DPD フィードバックのバースト・モード出力

2 アプリケーション

- テレコミュニケーション
- ワイヤレス・インフラ
- パワーアンプ直線化

3 概要


ADS54T01 は、直線性が高いシングル・チャネル、12 ビット、750Msps の A/D コンバータ (ADC) で、広帯域レシーバ向けのフロント・エンド・フィルタ設計が容易になります。アナログ入力バッファにより、高インピーダンスの入力を実現し、またオンチップのトラック・アンド・ホールドの内部スイッチングを分離し、信号ソースからの干渉を防止します。

出力データには 2 つの出力モードがあります。データを 2 でデシメーションすること、またはデータをバースト・モードで出力することができます。バースト・モード出力は、特に短時間で高分解能の出力データが利用可能な DPD フィードバック・アプリケーション向けに設計されています。高い SFDR 向けの設計により、ADC は広い入力周波数範囲にわたって、低ノイズ特性と優れたスプリアス・フリー・ダイナミック・レンジを実現します。デバイスは 196 ピン NFBGA パッケージで供給され、–40℃～85℃の工業用温度範囲全体で動作が規定されています。

製品情報

部品番号	パッケージ(1)	本体サイズ (公称)
ADS54T01	NFBGA (196)	12.00mm × 12.00mm

(1) 利用可能なパッケージについては、このデータシートの末尾にある注文情報を参照してください。

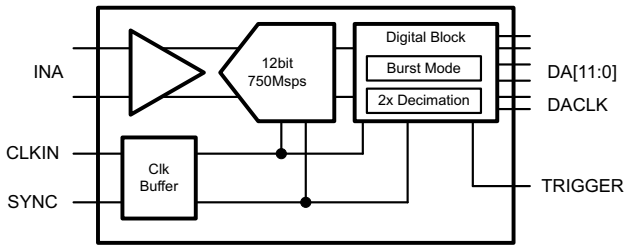

機能ブロック図

英語版の TI 製品についての情報を翻訳したこの資料は、製品の概要を確認する目的で便宜的に提供しているものです。該当する正式な英語版の最新情報は、www.ti.com で閲覧でき、その内容が常に優先されます。TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、必ず最新版の英語版をご参照くださいますようお願いいたします。

Table of Contents

1 特長 ... 1
2 アプリケーション ... 1
3 概要 ... 1
4 Revision History ... 2
5 Device Comparison ... 3
6 Pin Configuration and Functions ... 3
7 Specifications ... 6
7.1 Absolute Maximum Ratings ... 6
7.2 ESD Ratings ... 6
7.3 Recommended Operating Conditions ... 7
7.4 Thermal Information ... 7
7.5 Electrical Characteristics ... 7
7.6 Electrical Characteristics ... 9
7.7 Electrical Characteristics ... 10
7.8 Electrical Characteristics ... 11
7.9 Electrical Characteristics ... 11
7.10 Typical Characteristics ... 13
8 Detailed Description ... 22
8.1 Overview ... 22
8.2 Functional Block Diagram ... 22
8.3 Feature Description ... 22
8.4 Device Functional Modes ... 29
8.5 Programming ... 32
8.6 Register Maps ... 34
9 Power Supply Recommendations ... 39
10 Device and Documentation Support ... 40
10.1 Receiving Notification of Documentation Updates ... 40
10.2 サポート・リソース ... 40
10.3 Trademarks ... 40
10.4 Electrostatic Discharge Caution ... 40
10.5 Glossary ... 40
11 Mechanical, Packaging, and Orderable Information ... 40

4 Revision History

Changes from Revision A (January 2014) to Revision B (April 2022)	Page
• 「ESD 定格」表、「機能説明」セクション、「デバイスの機能モード」セクション、「アプリケーションと実装」セクション、「電源に関する推奨事項」セクション、「レイアウト」セクション、「デバイスおよびドキュメントのサポート」セクション、「メカニカル、パッケージ、および注文情報」セクションを追加	1
• 文書全体にわたって表、図、相互参照の採番方法を更新	1
• Changed Revision A History from "Deleted P7, N7" to "Deleted G4, G3"	2
• Changed *Pin Functions* table to match TI Standards	3

Changes from Revision * (December 2012) to Revision A (January 2014)	Page
• Deleted G4, G3 from TRDYP/N pin numbers	3
• Changed package from QFN to nFBGA in THERMAL INFORMATION	7
• Added text and figure to TEST PATTERN OUTPUT section	22
• Deleted text from last paragraph in INTERLEAVING CORRECTION section	26
• Changed second paragraph in MULTI DEVICE SYNCHRONIZATION section	28
• Deleted Register Initialization section and added Device Initialization section	32
• Changed Register Address 2 Bit D13 from 0 to 1 in SERIAL REGISTER MAP	34
• Changed Register Address E Bits D1 and D0 to 0 in SERIAL REGISTER MAP	34
• Changed Register Address 38 Bits D3 to D0 from 0 to 1 in SERIAL REGISTER MAP	34
• Changed Register Address 2 Bit D13 from 0 to 1 and add D13 Read back 1	34
• Changed Register Address E Bit D1 and D0 to 0	34
• Changed Register Address 38 Bits D3 to D0 from 0 to 1 and add D3 to D0 Read back 1	34
• Changed Register Address 66 D15-D10 to D15-D0 and D11-D10 to D11-D0	34

Copyright © 2022 Texas Instruments Incorporated

5 Device Comparison

表 5-1. Device Comparison

PART NUMBER	NUMBER OF CHANNELS	SPEED GRADE
ADS54T02	2	750 Msps
ADS54T01	1	750 Msps
ADS54T04	2	500 Msps

6 Pin Configuration and Functions

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	
14	VREF	VCM	GND	NC	NC	GND	AVDDC	AVDDC	GND	INA_P	INA_N	GND	GND	CLKINP	14
13	SDENB	TEST MODE	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	CLKINN	13
12	SCLK	SRESET	GND	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	AVDD33	GND	AVDD33	AVDD33	12
11	SDIO	ENABLE	GND	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	AVDD18	GND	AVDD18	AVDD18	11
10	SDO	IOVDD	GND	AVDD18	GND	GND	GND	GND	GND	GND	AVDD18	GND	TRIGGER N	TRIGGER P	10
9	DVDD	DVDD	GND	GND	GND	GND	GND	GND	GND	GND	GND	GND	SYNCN	SYNCP	9
8	DVDD	DVDD	DVDD	DVDD	GND	GND	GND	GND	GND	GND	DVDD	DVDD	DVDD	DVDD	8
7	NC	NC	DVDD LVDS	DVDD LVDS	GND	GND	GND	GND	GND	GND	DVDD LVDS	DVDD LVDS	TRDYN	TRDYP	7
6	NC	NC	DVDD LVDS	DVDD LVDS	GND	GND	GND	GND	GND	GND	DVDD LVDS	DVDD LVDS	HRESN	HRESP	6
5	NC	NC	NC	NC	GND	GND	GND	GND	GND	GND	OVRAN	OVRAP	SYNC OUTN	SYNC OUTP	5
4	NC	NC	NC	NC	NC	NC	NC	DA0P	DA2P	DA4P	DA6P	DA8P	NC	NC	4
3	NC	NC	NC	NC	NC	NC	NC	DA0N	DA2N	DA4N	DA6N	DA8N	DA11N	DA11P	3
2	NC	NC	NC	NC	NC	NC	NC	DACLKP	DA1P	DA3P	DA5P	DA7P	DA10N	DA10P	2
1	NC	NC	NC	NC	NC	NC	NC	DACLKN	DA1N	DA3N	DA5N	DA7N	DA9N	DA9P	1
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	

図 6-1. ADS54T01 ZAY Package, 196-Pin NFBGA, Top View (DDR Output Mode)

表 6-1. Pin Functions

PIN		I/O TYPE[1]	DESCRIPTION
NAME	NUMBER		
INPUT/REFERENCE			
INA_P/N	K14, L14	I	Analog ADC differential input signal.
VCM	B14	O	Output of the analog input common mode (nominally 1.9 V). A 0.1-µF capacitor to AGND is recommended, but not required.
VREF	A14	I	Reference voltage input. A 0.1-µF capacitor to AGND is recommended.
CLOCK/SYNC			
CLKINP/N	P14, P13	I	Differential input clock

Copyright © 2022 Texas Instruments Incorporated

表 6-1. Pin Functions (continued)

PIN		I/O TYPE[1]	DESCRIPTION
NAME	NUMBER		
SYNCP/N	P9, N9	I	Synchronization input. Inactive if logic low. When clocked in a high state initially, this is used for resetting internal clocks and digital logic and starting the SYNCOUT signal. Internal 100-Ω termination.
CONTROL/SERIAL			
SRESET	B12	I	Serial interface reset input. Active low. Initialized internal registers during high-to-low transition. Asynchronous. Internal 50-kΩ pullup resistor to IOVDD.
ENABLE	B11	I	Chip enable – active high. Power-down function can be controlled through SPI register assignment. Internal 50-kΩ pullup resistor to IOVDD.
SCLK	A12	I	Serial interface clock. Internal 50-kΩ pulldown resistor.
SDIO	A11	I/O	Bidirectional serial data in 3-pin mode (default). In 4-pin interface mode (register x00, D16), the SDIO pin in an input only. Internal 50-kΩ pulldown resistor.
SDENB	A13	I	Serial interface enable. Internal 50-kΩ pulldown resistor.
SDO	A10	O	Uni-directional serial interface data in 4-pin mode (register x00, D16). The SDO pin is tri-stated in 3-pin interface mode (default). Internal 50-kΩ pulldown resistor.
DATA INTERFACE			
DA[11:0]P/N	P3, N3, P2, N2, P1, N1, M4, M3, M2, M1, L4, L3, L2, L1, K4, K3, K2, K1, J4, J3, J2, J1, H4, H3	O	ADC A Data Bits 11 (MSB) to 0 (LSB) in DDR output mode. Standard LVDS output.
DACLKP/N	H2, H1	O	DDR differential output data clock for Bus A. Register programmable to provide either rising or falling edge to center of stable data nominal timing.
SYNCOUTP/N	P5, N5	O	Synchronization output signal for synchronizing multiple ADCs. Can be disabled through the SPI.
OVRAP/N	M5, L5	O	Bus A, Overrange indicator, LVDS output. A logic high signals an analog input in excess of the full-scale range. Optional SYNC output.
TRIGGERP/N	P10, N10	I	Trigger used for high-resolution output data in feedback mode. Internal 100-Ω termination.
TRDYP/N	P7, N7	O	Trigger ready output indicator
HRESP/N	P6, N6	O	Indicator for high-resolution output data; logic high signals 12-bit output data.
NO CONNECT			
NC	A1, A2, A3, A4, A5, A6, A7, B1, B2, B3, B4, B5, B6, B7, C1, C2, C3, C4, C5, D1, D2, D3, D4, D5, D14, E1, E2, E3, E4, E14, F1, F2, F3, F4, G1, G2, G3, G4, N4, P4	–	Do not connect to pin, leave floating.
TESTMODE	B13	–	Used for factory internal test. Do not connect to pin, leave floating.
POWER SUPPLY			
AVDD33	D12, E12, F12, G12, H12, J12, K12, L12, N12, P12	P	3.3-V analog supply
AVDDC	G14, H14	P	1.8-V supply for clock input
AVDD18	D10, D11, E11, F11, G11, H11, J11, K11, L10, L11, N11, P11	P	1.8-V analog supply

Copyright © 2022 Texas Instruments Incorporated

表 6-1. Pin Functions (continued)

PIN		I/O TYPE[1]	DESCRIPTION
NAME	NUMBER		
DVDD	A8, A9, B8, B9, C8, D8, L8, M8, N8, P8	P	1.8-V supply for digital block
DVDDLVDS	C6, C7, D6, D7, L6, L7, M6, M7	P	1.8-V supply for LVDS outputs
IOVDD	B10	P	1.8-V for digital I/Os
GND	C9, C10, C11, C12, C13, C14, D9, D13, E5, E6, E7, E8, E9, E10, E13, F5, F6, F7, F8, F9, F10, F13, F14, G5, G6, G7, G8, G9, G10,H5, H6, H7, H8, H9, H10, J5, J6, J7, J8, J9, J10, K5, K6, K7, K8, K9, K10, L9, M9, M10, M11, M12, M13, M14,N13, N14	GND	Ground

(1) The definitions below define the I/O type for each pin.

- I = Input
- O = Output
- I/O = Input / Output
- P = Power Supply
- G = Ground

Copyright © 2022 Texas Instruments Incorporated

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
Supply voltage	AVDD33	–0.5	4	V
	AVDDC	–0.5	2.3	V
	AVDD18	–0.5	2.3	V
	DVDD	–0.5	2.3	V
	DVDDLVDS	–0.5	2.3	V
	IOVDD	–0.5	4	V
Voltage applied to input pins	INA_P, INA_N	–0.5	AVDD33 + 0.5	V
	CLKINP, CLKINN	–0.5	AVDDC + 0.5	V
	SYNCP, SYNCN	–0.5	AVDD33 + 0.5	V
	SRESET, SDENB, SCLK, SDIO, SDO, ENABLE	–0.5	IOVDD + 0.5	V
Operating free-air temperature, T_A		–40	85	°C
Operating junction temperature, T_J			150	°C
Storage temperature, T_{stg}		–65	150	°C

(1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

7.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1)	±2000	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

Copyright © 2022 Texas Instruments Incorporated

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
T_J	Recommended operating junction temperature			105	°C
	Maximum rated operating junction temperature(1)	125			
T_A	Recommended free-air temperature	–40	25	85	°C

(1) Prolonged use at this junction temperature may increase the device failure-in-time (FIT) rate.

7.4 Thermal Information

THERMAL METRIC(1)		ADS54T01 ZAY (NFBGA) 196 PINS	UNIT
θ_{JA}	Junction-to-ambient thermal resistance(2)	37.6	°C/W
θ_{JCtop}	Junction-to-case (top) thermal resistance(3)	6.8	°C/W
θ_{JB}	Junction-to-board thermal resistance(4)	16.8	°C/W
ψ_{JT}	Junction-to-top characterization parameter(5)	0.2	°C/W
ψ_{JB}	Junction-to-board characterization parameter(6)	16.4	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.
(2) The junction-to-ambient thermal resistance under natural convection is obtained in a simulation on a JEDEC-standard, high-K board, as specified in JESD51-7, in an environment described in JESD51-2a.
(3) The junction-to-case (top) thermal resistance is obtained by simulating a cold plate test on the package top. No specific JEDEC-standard test exists, but a close description can be found in the ANSI SEMI standard G30-88.
(4) The junction-to-board thermal resistance is obtained by simulating in an environment with a ring cold plate fixture to control the PCB temperature, as described in JESD51-8.
(5) The junction-to-top characterization parameter, ψ_{JT}, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining $R_{\theta JA}$, using a procedure described in JESD51-2a (sections 6 and 7).
(6) The junction-to-board characterization parameter, ψ_{JB}, estimates the junction temperature of a device in a real system and is extracted from the simulation data for obtaining $R_{\theta JA}$, using a procedure described in JESD51-2a (sections 6 and 7).

7.5 Electrical Characteristics

Typical values at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
ADC Clock Frequency			40		750	MSPS
Resolution			12			Bits
SUPPLY						
AVDD33			3.15	3.3	3.45	V
AVDDC, AVDD18, DVDD, DVDDLVDS			1.7	1.8	1.9	V
IOVDD			1.7	1.8	3.45	V
POWER SUPPLY						
I_{AVDD33}	3.3-V Analog supply current			154	170	mA
I_{AVDD18}	1.8-V Analog supply current			66	80	mA
I_{AVDDC}	1.8-V Clock supply current			42	60	mA
I_{DVDD}	1.8-V Digital supply current	Auto Correction Enabled		250	280	mA
I_{DVDD}	1.8-V Digital supply current	Auto Correction Disabled		215		mA
I_{DVDD}	1.8-V Digital supply current	Auto Correction Disabled, decimation filter enabled		234		mA
$I_{DVDDLVDS}$	1.8-V LVDS supply current			66	90	mA
I_{IOVDD}	1.8-V I/O Voltage supply current			1	2	mA

Copyright © 2022 Texas Instruments Incorporated

7.5 Electrical Characteristics (continued)

Typical values at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
P_{dis} Total power dissipation	Auto Correction Enabled, decimation filter disabled		1.28	1.75	W
P_{dis} Total power dissipation	Auto Correction Disabled, decimation filter disabled		1.2		W
PSRR	250 kHz to 500 MHz	40			dB
Shutdown power dissipation			7		mW
Shutdown wake-up time			2.5		ms
Standby power dissipation			7		mW
Standby wake-up time			100		µs
Deep-sleep mode power dissipation	Auto correction disabled		350		mW
	Auto correction enabled		475		mW
Deep-sleep mode wake-up time			20		µs
Light-sleep mode power dissipation	Auto correction disabled		655		mW
	Auto correction enabled		780		mW
Light-sleep mode wake-up time			2		µs

Copyright © 2022 Texas Instruments Incorporated

7.6 Electrical Characteristics

Typical values at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD3V = 3.3 V, AVDD/DRVDD/IOVDD = 1.8 V, –1-dBFS differential input (unless otherwise noted).

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
ANALOG INPUTS					
Differential input full-scale			1.0	1.25	Vpp
Input common-mode voltage			1.9	±0.1	V
Input resistance	Differential at DC		1		kΩ
Input capacitance	Each input to GND		2		pF
VCM common-mode voltage output			1.9		V
Analog input bandwidth (3 dB)			1200		MHz
DYNAMIC ACCURACY					
Offset Error	Auto Correction Disabled	–20	–7.5	20	mV
	Auto Correction Enabled	–1	0	1	mV
Offset temperature coefficient			–6.5		µV/°C
Gain error		–5		5	%FS
Gain temperature coefficient			0.005		%FS/°C
Differential nonlinearity	f_{IN} = 230 MHz	–1	±0.9	2	LSB
Integral nonlinearity	f_{IN} = 230 MHz	–5	±1.5	5	LSB
CLOCK INPUT					
Input clock frequency		40		750	MHz
Input clock amplitude			2		Vpp
Input clock duty cycle		40%	50%	60%	
Internal clock biasing			0.9		V

Copyright © 2022 Texas Instruments Incorporated

7.7 Electrical Characteristics

Typical values at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
Auto Correction				Enabled			Disabled		Vpp
DYNAMIC AC CHARACTERISTICS(1) – Burst Mode Enabled: 12-bit High Resolution Output Data									
SNR	Signal to Noise Ratio	f_{IN} = 10 MHz		61.1			61.2		dBFS
		f_{IN} = 100 MHz		61.1			61.1		
		f_{IN} = 230 MHz	59	60.7			60.9		
		f_{IN} = 450 MHz		59.9			60.5		
		f_{IN} = 700 MHz		58.6			59.6		
HD2,3	Second and third harmonic distortion	f_{IN} = 10 MHz		81			83		dBc
		f_{IN} = 100 MHz		76			81		
		f_{IN} = 230 MHz		78			79		
		f_{IN} = 450 MHz		75			76		
		f_{IN} = 700 MHz		74			76		
Non HD2,3	Spur Free Dynamic Range (excluding second and third harmonic distortion)	f_{IN} = 10 MHz		78			79		dBc
		f_{IN} = 100 MHz	68	75			77		
		f_{IN} = 230 MHz		73			73		
		f_{IN} = 450 MHz		68			69		
		f_{IN} = 700 MHz		64			66		
IL	Fs/2-Fin interleaving spur	f_{IN} = 10 MHz		90			87		dBc
		f_{IN} = 100 MHz		84			82		
		f_{IN} = 230 MHz	65	79			76		
		f_{IN} = 450 MHz		72			72		
		f_{IN} = 700 MHz		66			69		
SINAD	Signal to noise and distortion ratio	f_{IN} = 10 MHz		61.0			61.1		dBc
		f_{IN} = 100 MHz		60.8			61.0		
		f_{IN} = 230 MHz	57.5	60.5			60.8		
		f_{IN} = 450 MHz		59.8			60.3		
		f_{IN} = 700 MHz		58.4			59.4		
THD	Total Harmonic Distortion	f_{IN} = 10 MHz		76			76		dBc
		f_{IN} = 100 MHz		73			76		
		f_{IN} = 230 MHz	66	74			74		
		f_{IN} = 450 MHz		74			73		
		f_{IN} = 700 MHz		72			74		
IMD3	Inter modulation distortion	F_{in} = 184.5 and 185.5 MHz, –7 dBFS		82			83		dBFS
		F_{in} = 549.5 and 550.5 MHz, –7 dBFS		76			77		
	Crosstalk			90			90		dB
ENOB	Effective number of bits	f_{IN} = 230 MHz		9.8			9.8		LSB

(1) SFDR and SNR calculations do not include the DC or Fs/2 bins when Auto Correction is disabled.

Copyright © 2022 Texas Instruments Incorporated

7.8 Electrical Characteristics

Typical values at T_A = 25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = 85°C, ADC sampling rate = 500 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input (unless otherwise noted).

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
OVER-DRIVE RECOVERY ERROR						
	Input overload recovery	Recovery to within 5% (of final value) for 6-dB overload with sine wave input		2		ns
SAMPLE TIMING CHARACTERISTICS						
rms	Aperture Jitter	Sample uncertainty		100		fs rms
	Data Latency	ADC sample to digital output, Auto correction disabled		38		Clock Cycles
		ADC sample to digital output, Auto correction enabled		50		
		ADC sample to digital output, Decimation filter enabled, Auto correction disabled		74		Sampling clock Cycles
	Over-range Latency	ADC sample to over-range output		12		Clock Cycles

7.9 Electrical Characteristics

The DC specifications refer to the condition where the digital outputs are not switching, but are permanently at a valid logic level 0 or 1. AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNITS
DIGITAL INPUTS – SRESET, SCLK, SDENB, SDIO, ENABLE						
	High-level input voltage	All digital inputs support 1.8-V and 3.3-V logic levels.	0.7 x IOVDD			V
	Low-level input voltage				0.3 x IOVDD	V
	High-level input current		–50		200	µA
	Low-level input current		–50		50	µA
	Input capacitance			5		pF
DIGITAL OUTPUTS – SDO						
	High-level output voltage	Iload = -100 µA	IOVDD – 0.2			V
		Iload = -2 mA	0.8 x IOVDD			
	Low-level output voltage	Iload = 100 µA			0.2	V
		Iload = 2 mA			0.22 x IOVDD	
DIGITAL INPUTS – SYNCP/N, TRIGGERP/N						
V_{ID}	Differential input voltage		250	350	450	mV
V_{CM}	Input common-mode voltage		1.125	1.2	1.375	V
t_{SU}			500			ps
DIGITAL OUTPUTS – DA[11:0]P/N, DACLKP/N, OVRAP/N, SYNCOUTP/N, TRDYP/N, HRESP/N						
V_{OD}	Output differential voltage	Iout = 3.5 mA	250	350	450	mV
V_{OCM}	Output common-mode voltage	Iout = 3.5 mA	1.125	1.25	1.375	V
t_{su}	F_s = 750 Msps	Data valid to zero-crossing of DACLK	320	400		ps
t_h	F_s = 750 Msps	Zero-crossing of DACLK to data becoming invalid	250	320		ps
t_{PD}	F_s = 750Msps	CLKIN falling edge to DACLK rising edge	3.36	3.69	3.92	ns

Copyright © 2022 Texas Instruments Incorporated

7.9 Electrical Characteristics (continued)

The DC specifications refer to the condition where the digital outputs are not switching, but are permanently at a valid logic level 0 or 1. AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
t_{RISE}	10% - 90%	100	150	200	ps
t_{FALL}	90% - 10%	100	150	200	ps

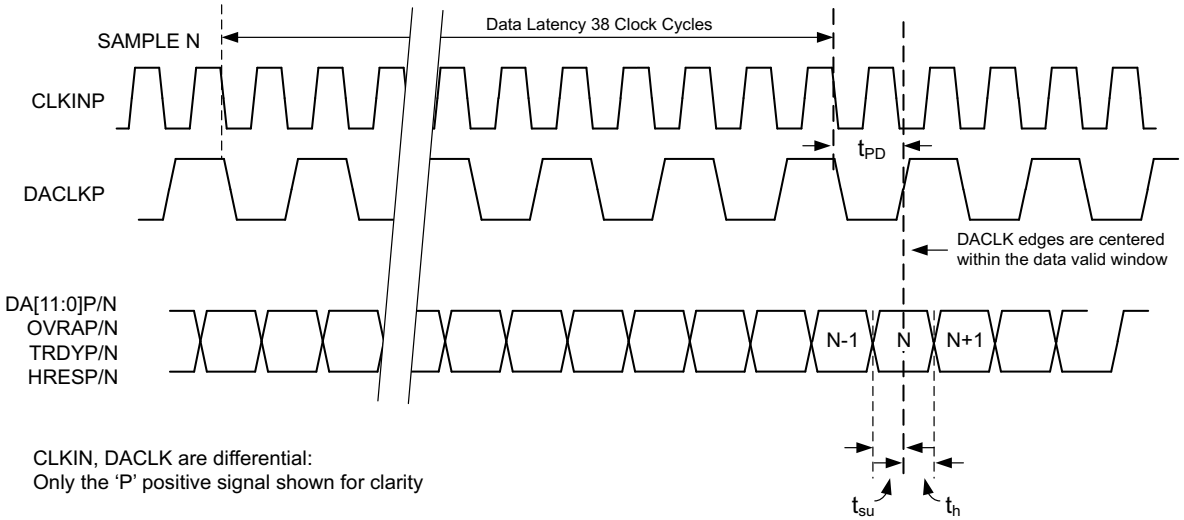


図 7-1. Timing Diagram for 12-Bit DDR Output

Copyright © 2022 Texas Instruments Incorporated

7.10 Typical Characteristics

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

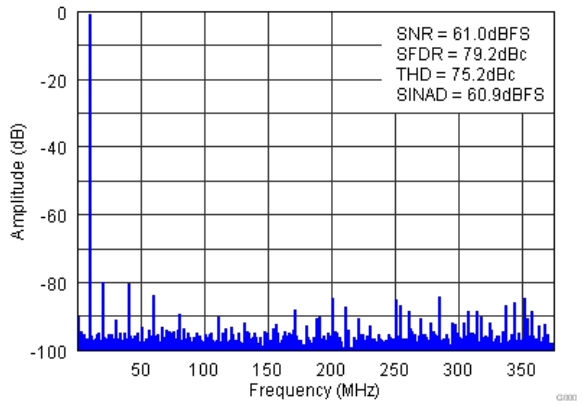


図 7-2. FFT for 10-MHz Input Signal (Auto On)

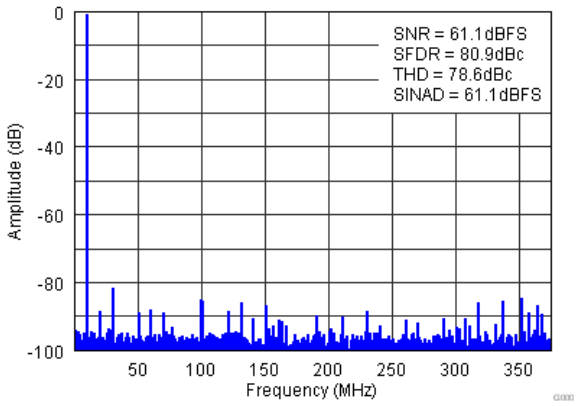


図 7-3. FFT for 10-MHz Input Signal (Auto Off)

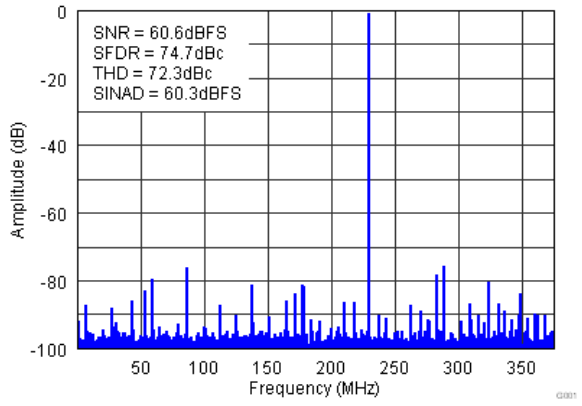


図 7-4. FFT for 230-MHz Input Signal (Auto On)

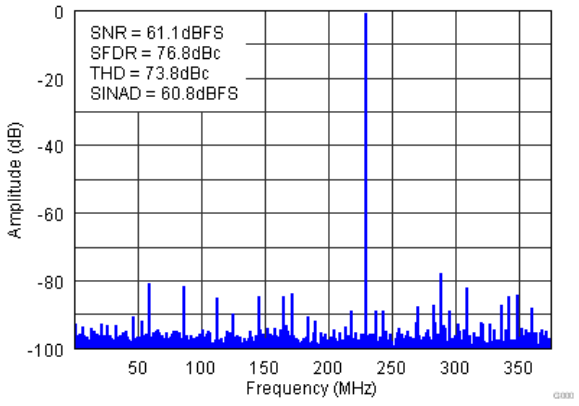


図 7-5. FFT for 230-MHz Input Signal (Auto Off)

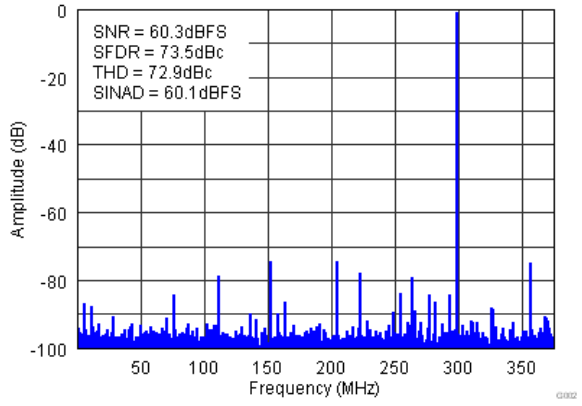


図 7-6. FFT for 450-MHz Input Signal (Auto On)

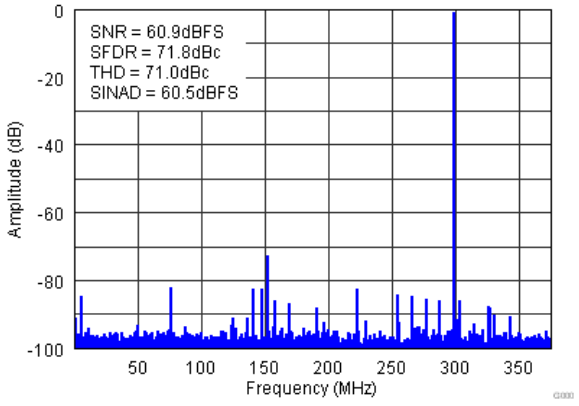


図 7-7. FFT for 450-MHz Input Signal (Auto Off)

Copyright © 2022 Texas Instruments Incorporated

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

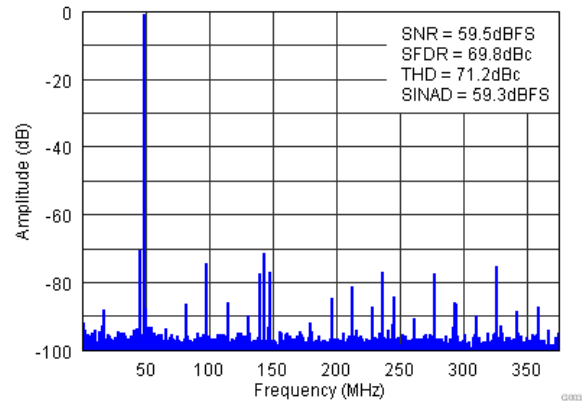


図 7-8. FFT for 700-MHz Input Signal (Auto On)

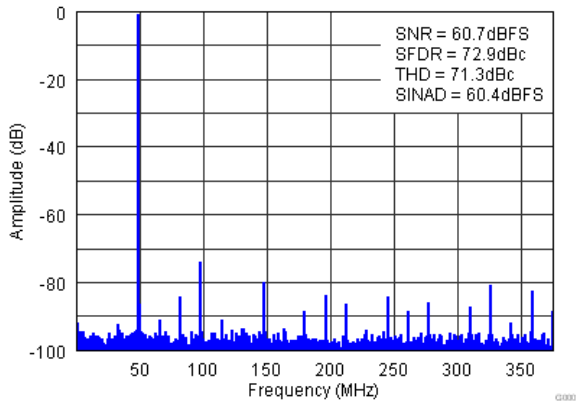


図 7-9. FFT for 700-MHz Input Signal (Auto Off)

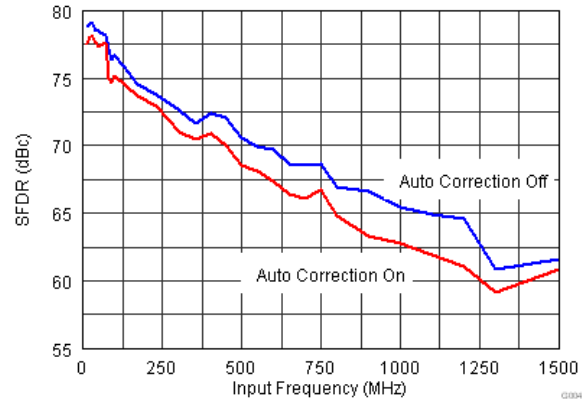


図 7-10. SFDR vs. Input Frequency

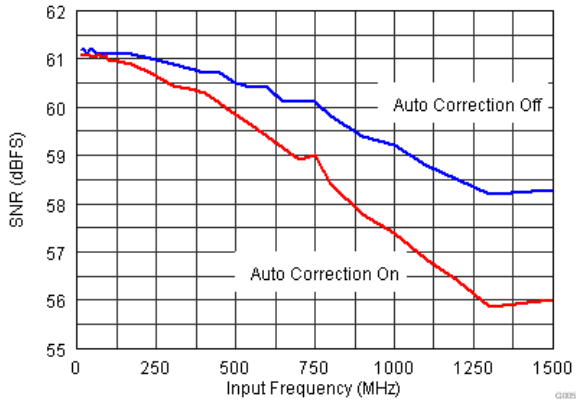


図 7-11. SNR vs. Input Frequency

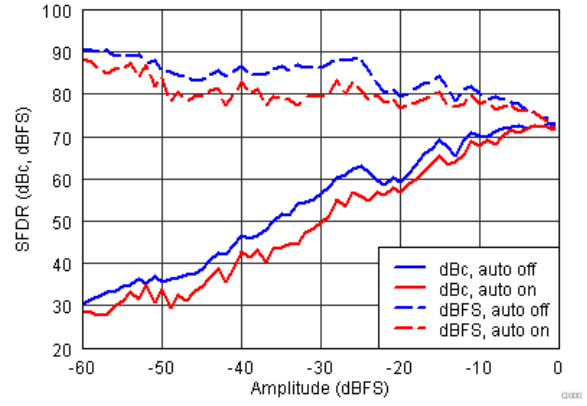


図 7-12. SFDR vs. Amplitude (fin = 230 MHz)

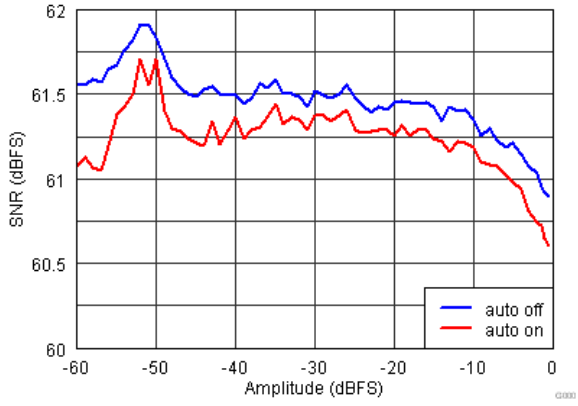


図 7-13. SNR vs. Amplitude (fin = 230 MHz)

Copyright © 2022 Texas Instruments Incorporated

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

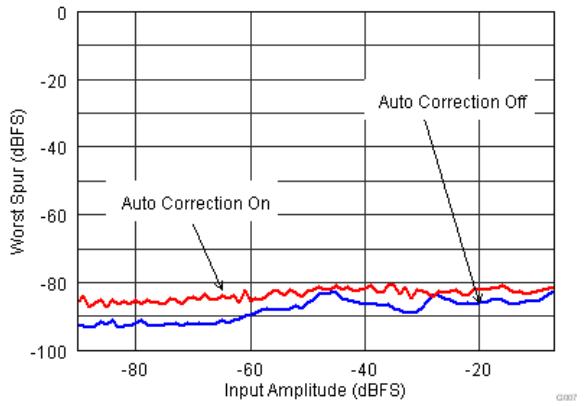


図 7-14. Tow Tone Performance Across Input Amplitude (fin = 185 MHz)

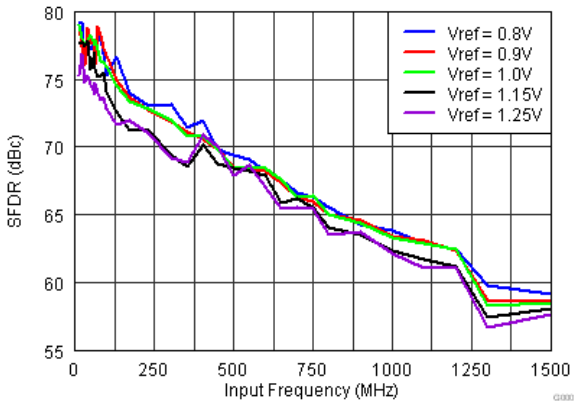


図 7-15. SFDR vs. Vref (Auto On)

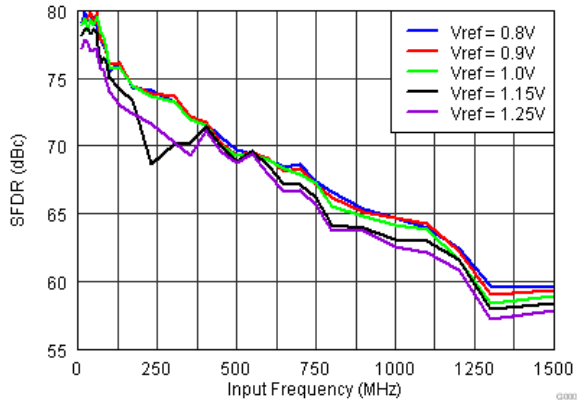


図 7-16. SFDR vs. Vref (Auto Off)

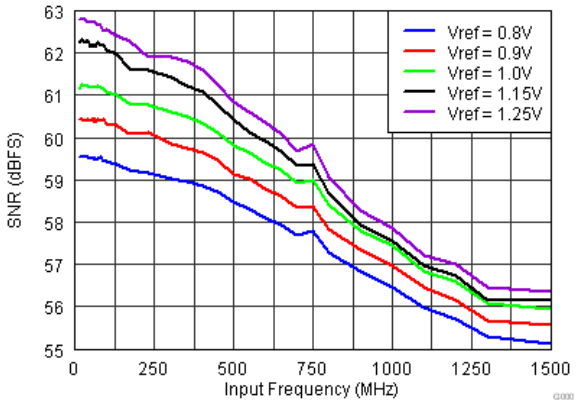


図 7-17. SNR vs. Vref (Auto On)

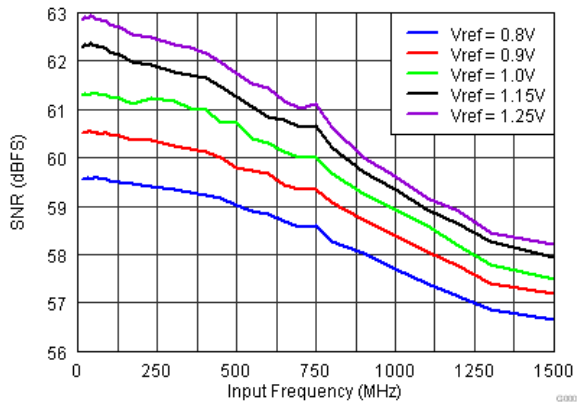


図 7-18. SNR vs. Vref (Auto Off)

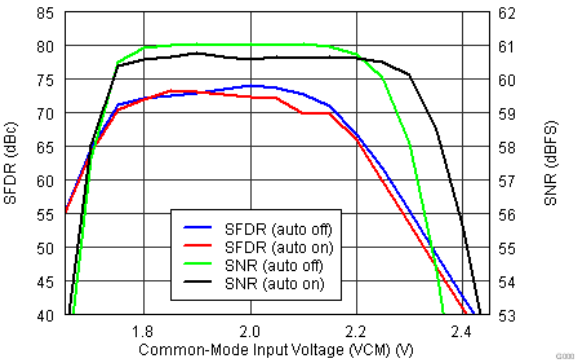


図 7-19. Performance Across Input Common-Mode Voltage

Copyright © 2022 Texas Instruments Incorporated

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

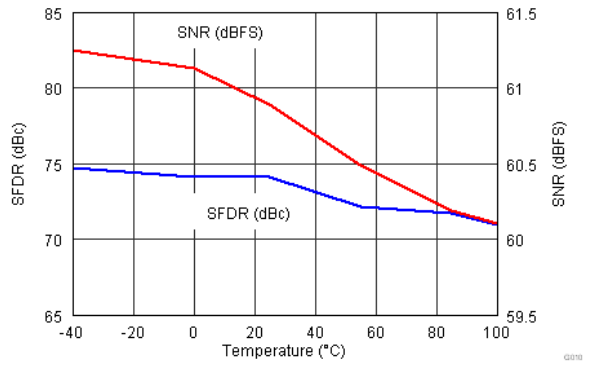


図 7-20. Performance Across Temperature (fin = 230 MHz)

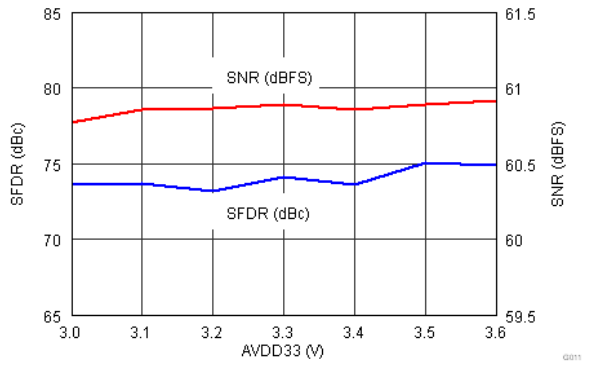


図 7-21. Performance Across AVDD33 (fin = 230 MHz)

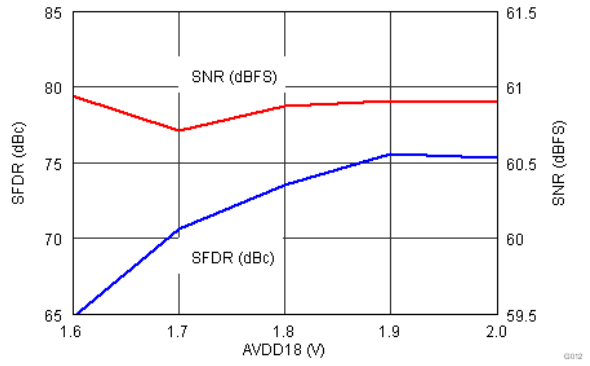


図 7-22. Performance Across AVDD18 (fin = 230 MHz)

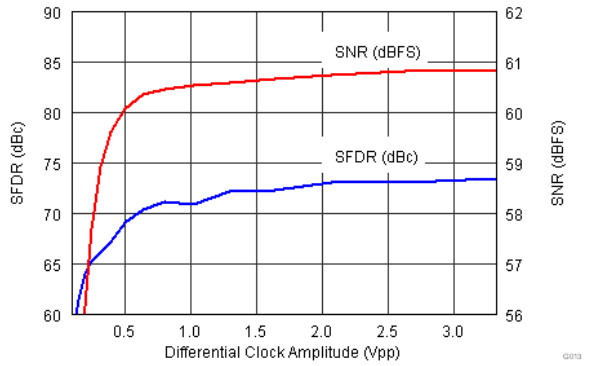


図 7-23. Performance Across Clock Amplitude

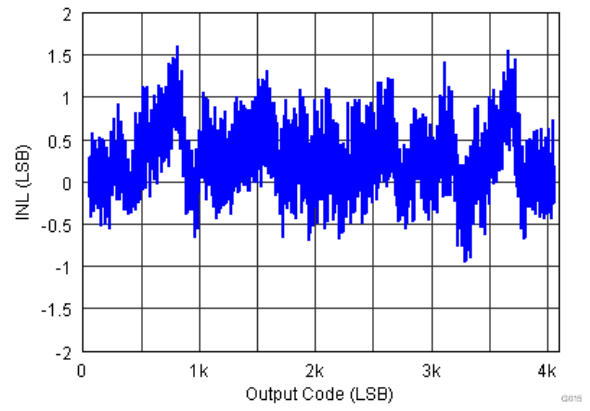


図 7-24. INL

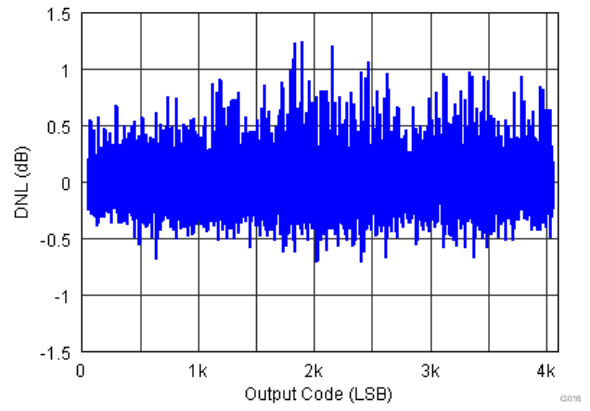


図 7-25. DNL

Copyright © 2022 Texas Instruments Incorporated

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

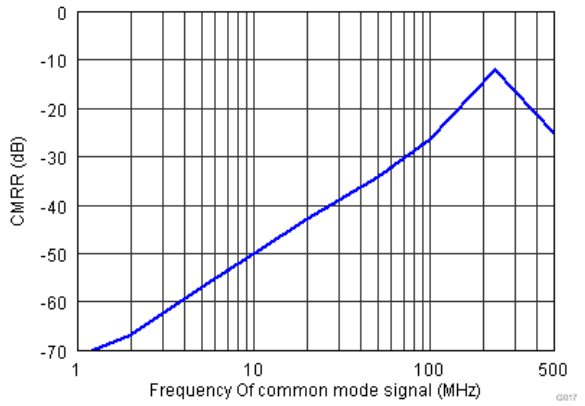


図 7-26. CMRR Across Frequency

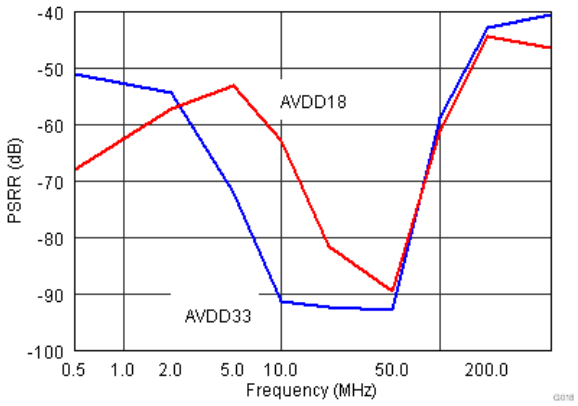


図 7-27. PSRR Across Frequency

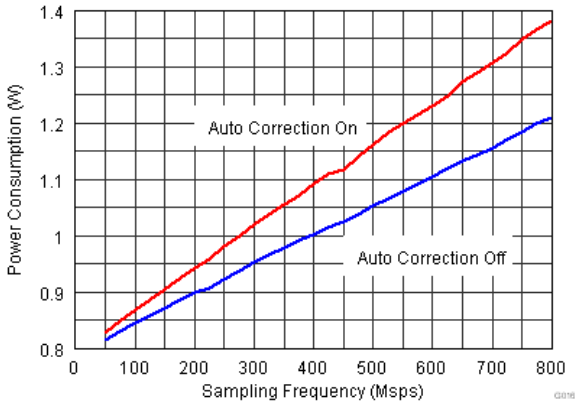


図 7-28. Power Across Sampling Frequency

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

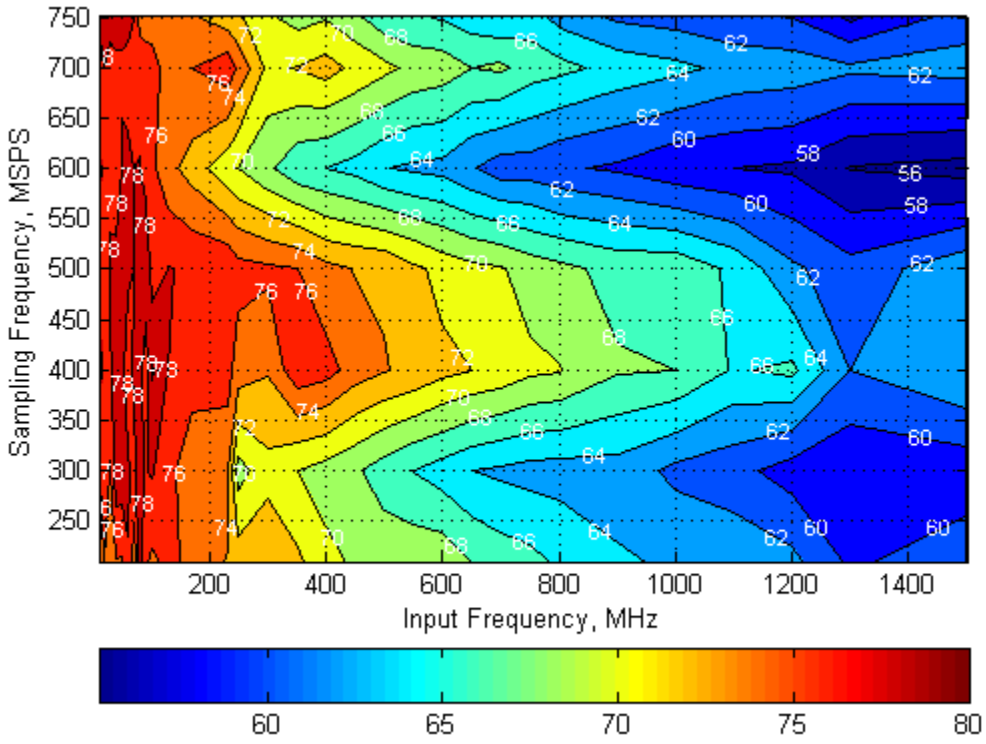


図 7-29. SFDR Across Input and Sampling Frequencies (Auto On)

Copyright © 2022 Texas Instruments Incorporated

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

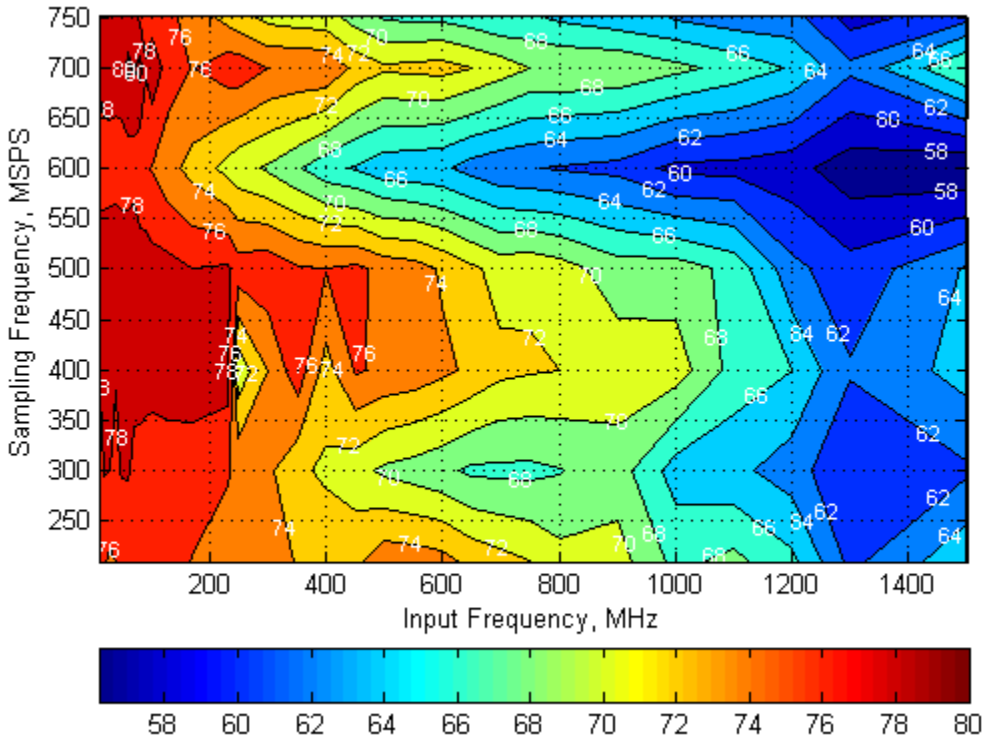


図 7-30. SFDR Across Input and Sampling Frequencies (Auto Off)

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

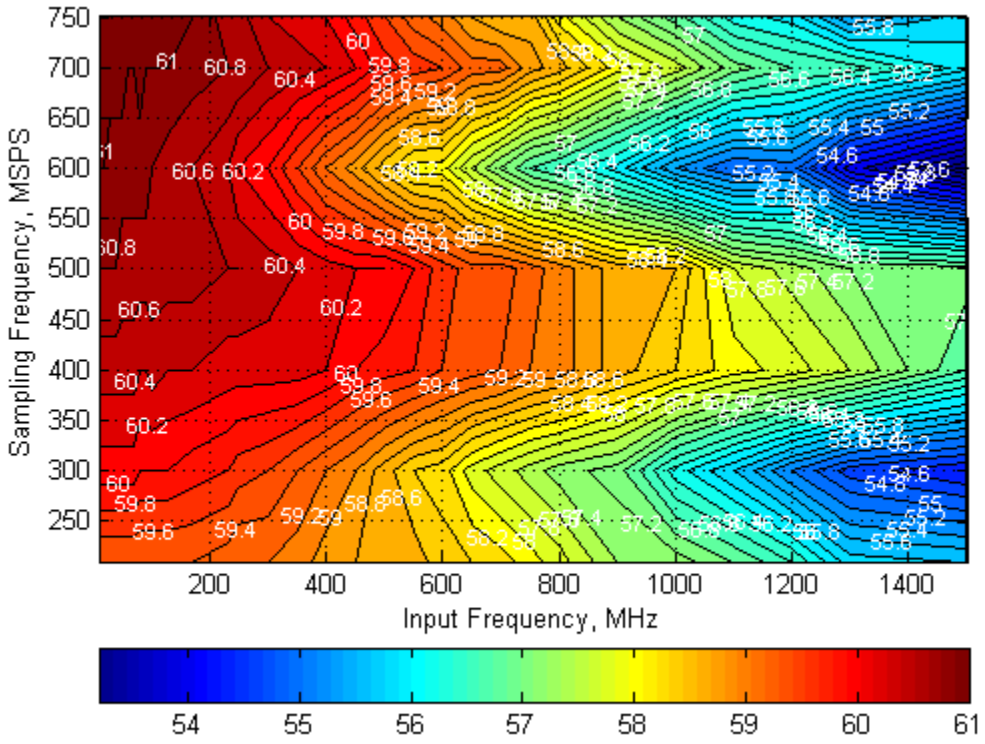


図 7-31. SNR Across Input and Sampling Frequencies (Auto On)

Copyright © 2022 Texas Instruments Incorporated

7.10 Typical Characteristics (continued)

Typical values at T_A = +25°C, full temperature range is T_{MIN} = –40°C to T_{MAX} = +85°C, ADC sampling rate = 750 Msps, 50% clock duty cycle, AVDD33 = 3.3 V, AVDDC/AVDD18/DVDD/DVDDLVDS/IOVDD = 1.8 V, –1-dBFS differential input, unless otherwise noted.

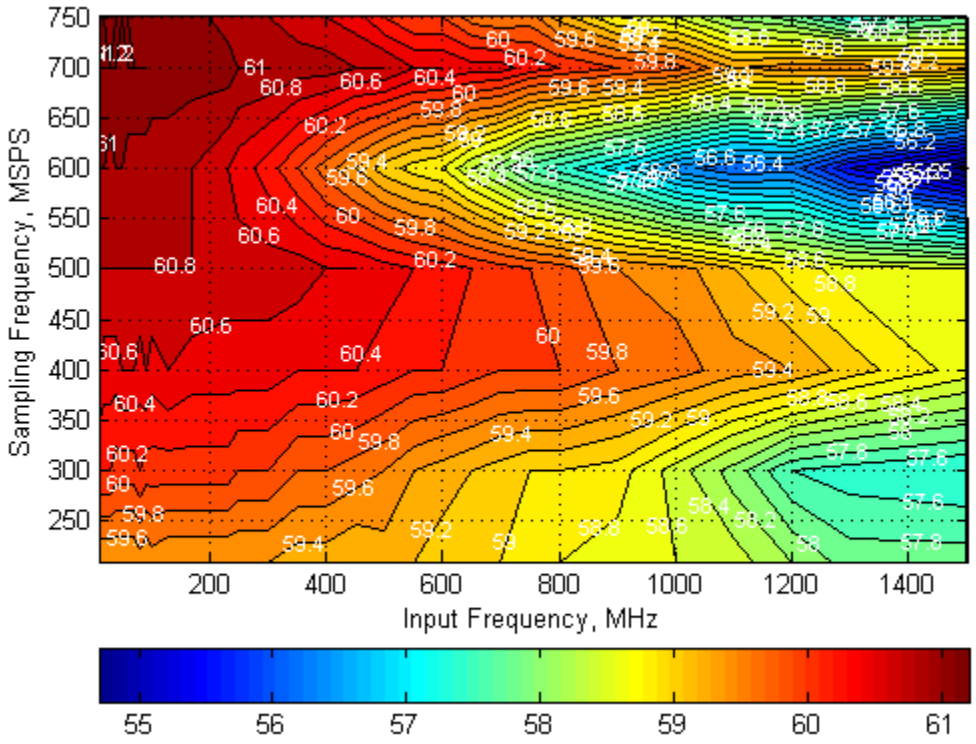


図 7-32. SNR Across Input and Sampling Frequencies (Auto On)

8 Detailed Description

8.1 Overview

The ADS54T01 is a 12-bit, single channel ADC that operates at sampling rates of up to 750 Msps. This device has excellent SFDR over a large input frequency range and low noise performance. The ADC accepts differential signals for the clock input and analog input buffers. The analog input buffer provides an isolated signal from the source with a high-impedance input.

8.2 Functional Block Diagram

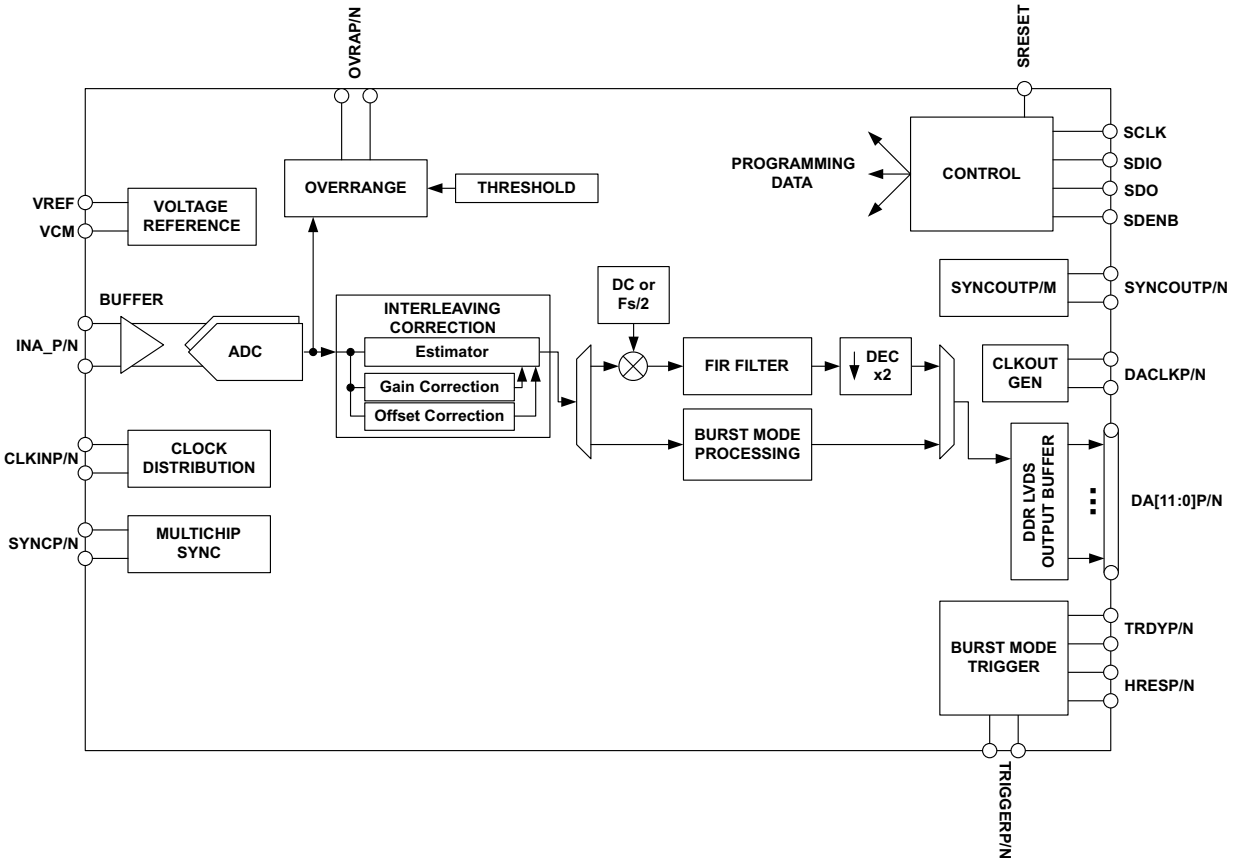


図 8-1. Functional Block Diagram

8.3 Feature Description

8.3.1 Test Pattern Output

The ADS54T01 can be configured to output different test patterns that can be used to verify the digital interface is connected and working properly.

To enable the test pattern mode, the high-performance mode 1 has to be disabled first through the SPI register write. Then different test patterns can be selected by configuring registers x3C, x3D, and x3E. All three registers must be configured for the test pattern to work properly.

First set HP1 = 0 (Addr 0x01, D01)

Internally the test pattern replaces the sampled data from the ADC. However at the LVDS outputs the output data is still subject to burst mode operation. In low-resolution output, the LSBs of the test pattern are replaced with 0 s.

Copyright © 2022 Texas Instruments Incorporated

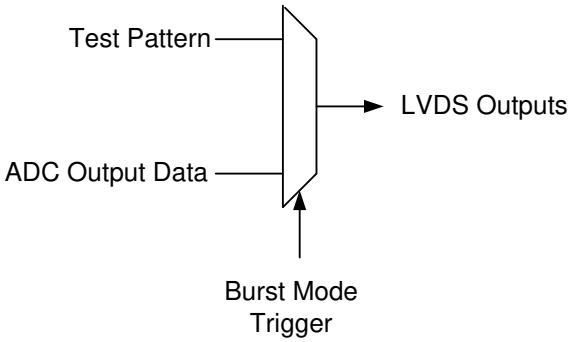


図 8-2. Test Pattern Selection

表 8-1. Test Pattern Register Setting

Register Address	All 0s	All 1s	Toggle (0xAAA => 0x555)	Toggle (0xFFF => 0x000)
0x3C	0x8000	0xBFFC	0x9554	0xBFFC
0x3D	0x0000	0x3FFC	0x2AA8	0x0000
0x3E	0x0000	0x3FFC	0x1554	0x3FFC

表 8-2. Custom Pattern Register Setting

Register Address	Custom Pattern															
	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
x3C	1	0	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	0	0
x3D	0	0													0	0
x3E	0	0													0	0

For normal operation, set HP1 = 1 (Addr 0x01, D01) and 0x3C, 0x3D, and 0x3E all to 0.

8.3.2 Clock Inputs

The ADS54T01 clock input can be driven differentially with a sine wave, LVPECL, or LVDS source with little or no difference in performance. The common-mode voltage of the clock input is set to 0.9 V using internal 2-kΩ resistors. This allows for AC coupling of the clock inputs. The termination resistors should be placed as close to the clock inputs as possible to minimize signal reflections and jitter degradation.

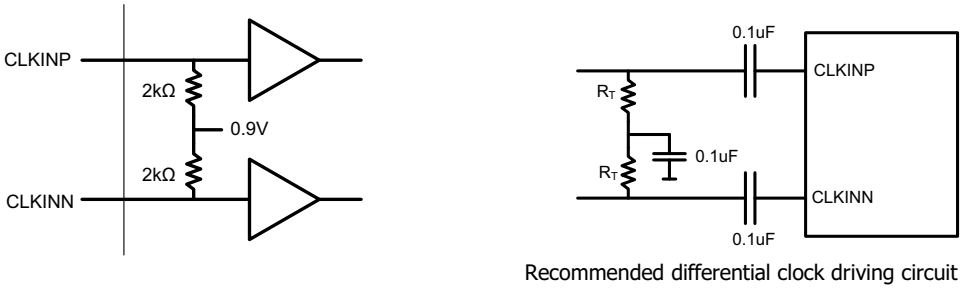


図 8-3. Recommended Differential Clock Driving Circuit

8.3.3 SNR and Clock Jitter

The signal-to-noise ratio of the ADC is limited by three different factors: the quantization noise is typically not noticeable in pipeline converters and is 72 dB for a 12-bit ADC. The thermal noise limits the SNR at low input frequencies while the clock jitter sets the SNR for higher input frequencies.

Copyright © 2022 Texas Instruments Incorporated

$$SNR_{ADC}[dBc] = -20 \times \log \sqrt{\left(10 - \frac{SNR_{Quantization_Noise}}{20}\right)^2 + \left(10 - \frac{SNR_{ThermalNoise}}{20}\right)^2 + \left(10 - \frac{SNR_{Jitter}}{20}\right)^2} \quad (1)$$

Use 式 2 to calculate the SNR limitation due to sample clock jitter.

$$SNR_{Jitter}[dBc] = -20 \times \log(2\pi \times f_{IN} \times t_{Jitter}) \quad (2)$$

The total clock jitter (t_{Jitter}) has three components: the internal aperture jitter (100 fs for ADS54T01) which is set by the noise of the clock input buffer, the external clock jitter, and the jitter from the analog input signal. Use 式 3 to calculate the total clock jitter.

$$T_{Jitter} = \sqrt{(T_{Jitter,Ext.Clock_Input})^2 + (T_{Aperture_ADC})^2} \quad (3)$$

External clock jitter can be minimized by using high-quality clock sources and jitter cleaners as well as bandpass filters at the clock input while a faster clock slew rate improves the ADC aperture jitter.

The ADS54T01 has a thermal noise of 61.2 dBFS and internal aperture jitter of 100 fs. 図 8-4 shows the SNR depending on amount of external jitter for different input frequencies.

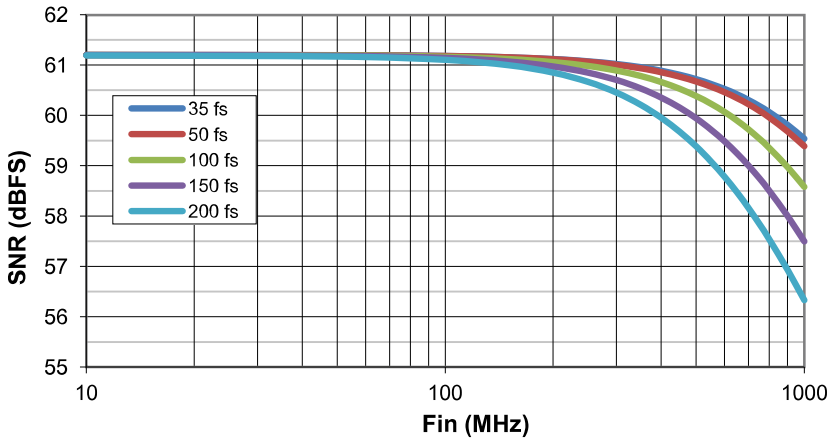


図 8-4. SNR vs. Frequency and External Clock Jitter

8.3.4 Analog Inputs

The ADS54T01 analog signal input is designed to be driven differentially. The analog input pins have internal analog buffers that drive the sampling circuit. As a result of the analog buffer, the input pins present a high impedance input across a very wide frequency range to the external driving source which enables great flexibility in the external analog filter design as well as excellent 50 Ω matching for RF applications. The buffer also helps isolate the external driving circuit from the internal switching currents of the sampling circuit which results in a more constant SFDR performance across input frequencies.

The common-mode voltage of the signal inputs is internally biased to 1.9 V using 500-Ω resistors which allows for AC coupling of the input drive network. Each input pin (INP, INM) must swing symmetrically between (VCM + 0.25 V) and (VCM – 0.25 V), resulting in a 1.0 Vpp (default) differential input swing. The input sampling circuit has a 3-dB bandwidth that extends up to 1.2 GHz.

Copyright © 2022 Texas Instruments Incorporated

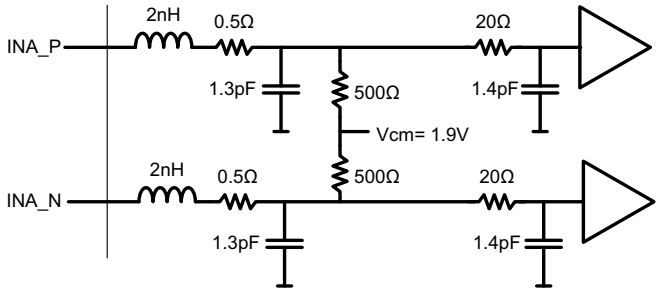


図 8-5. Analog Input Internal Circuitry

8.3.5 Over-Range Indication

The ADS54T01 provides a fast over-range indication on the OVRA/B pins. The fast OVR is triggered if the input voltage exceeds the programmable overrange threshold and it gets presented after just 12 clock cycles enabling a quicker reaction to an overrange event. The OVR threshold can be configured using SPI register writes.

The input voltage level at which the overload is detected is referred to as the threshold and is programmable using the over-range threshold bits. The threshold at which fast OVR is triggered is (full-scale × [the decimal value of the FAST OVR THRESH bits] /16). After reset, the default value of the over-range threshold is set to 15 (decimal) which corresponds to a threshold of 0.56 dB below full scale (20 × log(15/16)).

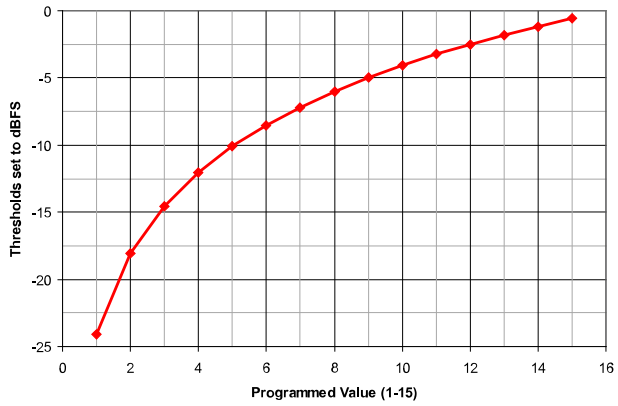


図 8-6. OVR Detection Threshold

8.3.6 Interleaving Correction

The data converter channel consists of two interleaved ADCs each operating at half of the ADC sampling rate but 180° out of phase from each other. The front end track and hold circuitry is operating at the full ADC sampling rate which minimizes the timing mismatch between the two interleaved ADCs. In addition, the ADS54T01 is equipped with internal interleaving correction logic that can be enabled through a SPI register write.

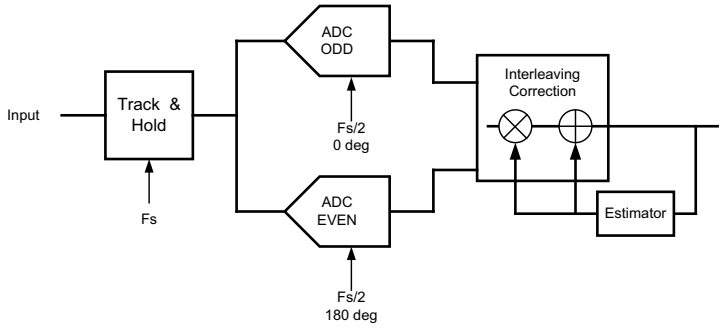


図 8-7. Interleaving Correction Block Diagram

The interleaving operation creates 2 distinct and interleaving products:

- Fs/2 – Fin: this spur is created by gain timing mismatch between the ADCs. Since internally the front end track and hold is operated at the full sampling rate, this component is greatly improved and mostly dependent on gain mismatch.
- Fs/2 Spur: due to offset mismatch between ADCs

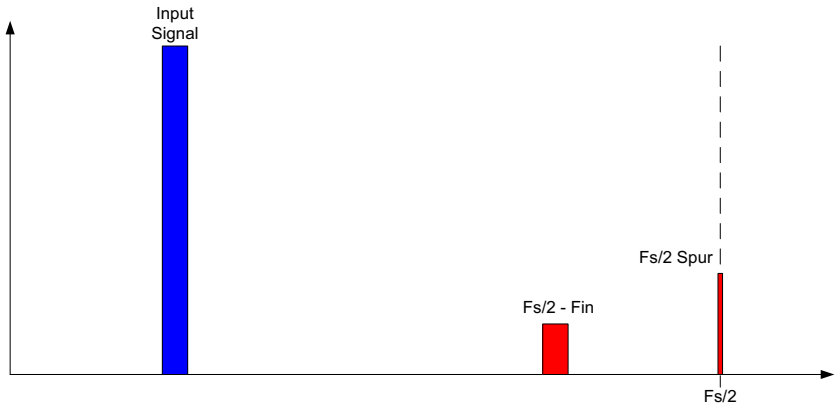


図 8-8. Interleaving Correction Spurs

The auto correction loop can be enabled through a SPI register write in address 0x01. By default, the auto correction function is disabled for lowest possible power consumption. The default settings for the auto correction function should work for most applications. However please contact Texas Instruments if further fine tuning of the algorithm is required.

The auto correction function yields best performance for input frequencies below 250 MHz.

8.3.7 High-Resolution Output Data

After trigger, the data outputs DA[11..0] are 12-bit resolution for 2^N samples, where N is a programmable register with a range $10 \le N \le 25$ (corresponding to 1024 to 33554432 samples).

Copyright © 2022 Texas Instruments Incorporated

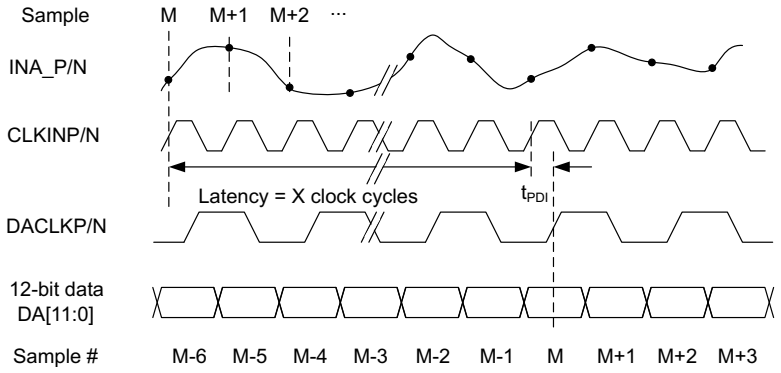


図 8-9. High-Resolution Data Output Timing

After the high-resolution data, the data output returns to low-resolution mode, the logic level of the HRES flag returns low and the trigger is locked out for $2^{(N+3)}$ samples. N is the sample integer resulting in a maximum output duty cycle of 1/9. During the trigger lockout time, a low to high transition on TRIGGERP/N will be ignored. After the 2^{N+3} low-resolution samples, the TRIGGERP/N is re-enabled for the next valid data burst.

8.3.8 Low-Resolution Output Data

There are two different options for the low-resolution output data and the selection is made through SPI register control. The data can either be output at full speed (ADC sampling rate) with the output resolution limited to 7 bit (7 MSBs). Alternatively the output resolution can be selected to 11 bit (11 MSBs) but at a reduced effective data rate where every 4^{th} sample gets repeated four times.

8.3.9 Full Speed – 7 Bit

The output data rate and timing is exactly the same as the high-resolution data, only the output resolution is limited to the 7 MSBs.

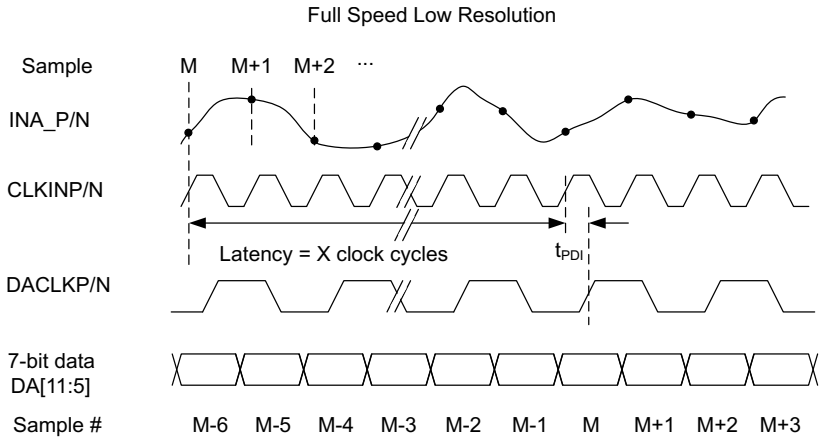


図 8-10. Full-Rate, Low-Resolution Output Data Timing

8.3.10 Decimated Low-Resolution Output Data

In decimated low-resolution mode, the output data is limited to 11 bits and every sample is repeated four times, so the effective data rate is 1/4 of ADC sampling rate. The latency of the ADC sample to output sample is exactly the same as for high-resolution data—there is no uncertainty in which conversion sample results in the valid output data. This is because the output continues to run at the ADC sample rate in decimated low-resolution mode where only the resolution is changed and three out of four samples are deleted.

Copyright © 2022 Texas Instruments Incorporated

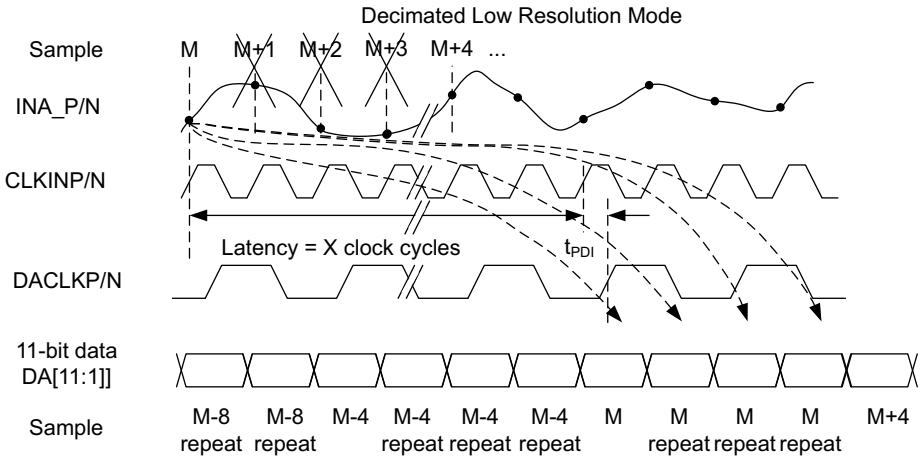


図 8-11. Decimated Low-Resolution Output Data Timing Diagram

8.3.11 Multi Device Synchronization

The ADS54T01 simplifies the synchronization of data from multiple ADCs in one common receiver. Upon receiving the initial SYNC input signal, the ADS54T01 resets all the internal clocks and digital logic while also starting a SYNCOUT signal which operates on a 5-bit counter (32 clock cycles). Therefore, by providing a common SYNC signal to multiple ADCs, their output data can be synchronized as the SYNCOUT signal marks a specific sample with the same latency in all ADCs. The SYNCOUT signal then can be used in the receiving device to synchronize the FIFO pointers across the different input data streams. Thus the output data of multiple ADCs can be aligned properly even if there are different trace lengths between the different ADCs.

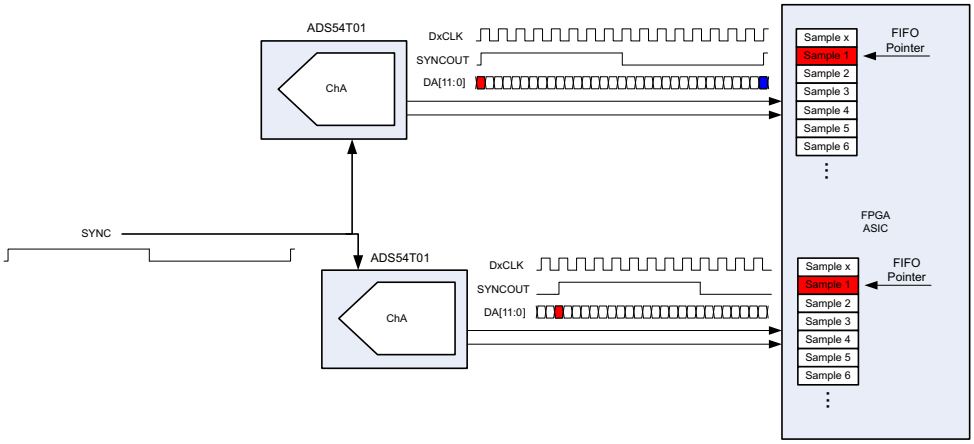


図 8-12. Multi Device SYNC

The SYNC input signal should be a one-time pulse to trigger the periodic 5-bit counter for SYNCOUT or a periodic signal repeating every 32 CLKIN clock cycles. The signal is registered on the rising edge of the ADC input clock (CLKIN). Upon registering the initial rising edge of the SYNC signal, the internal clocks and logic get reset which results in invalid output data for 36 samples (1 complete sync cycle and 4 additional samples). The SYNCOUT signal starts with the next output clock (DACLK) rising edge and operates on a 5-bit counter. If a SYNCIN rising edge gets registered at a new position, the counter gets reset and SYNCOUT starts from the new position.

The ADS54T01 output interface operates with a DDR clock, therefore the synchronization can happen on the rising edge or falling edge sample. Synchronization on the falling edge sample will result in a half cycle clock stretch of DACLK. For convenience, the SYNCOUT signal is available on the ChA output LVDS bus.

When using decimation, the SYNCOUT signal still operates on 32 clock cycles of CLKIN, but because the output data is decimated by 2, only the first 18 samples should be discarded.

Copyright © 2022 Texas Instruments Incorporated

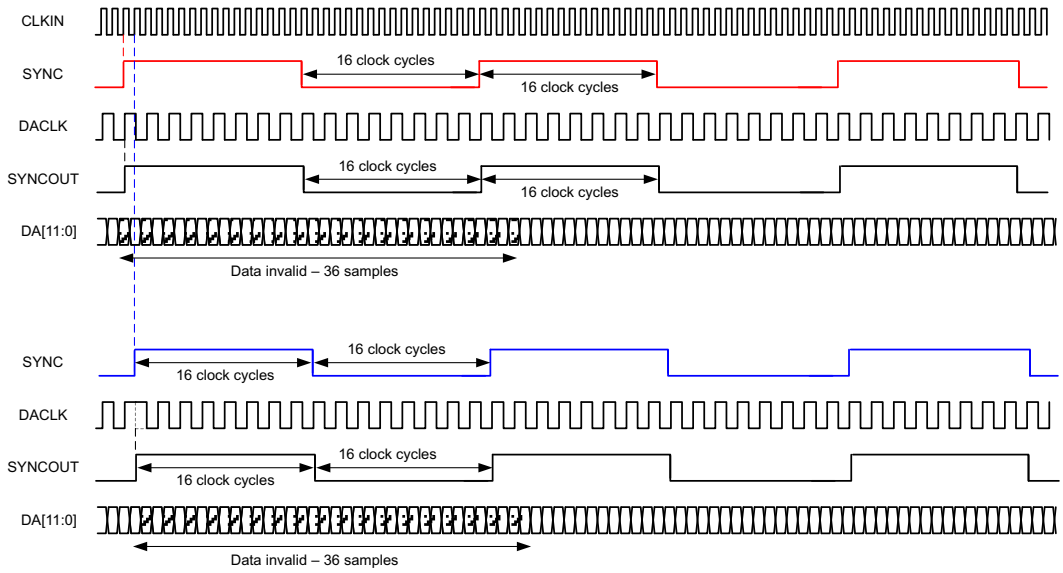


図 8-13. SYNC Timing Diagram

8.4 Device Functional Modes

8.4.1 Power-Down Modes

The ADS54T01 can be configured through a SPI write (address x37) to a standby, light, or deep sleep power mode which is controlled by the ENABLE pin. The sleep modes are active when the ENABLE pin goes low. Different internal functions stay powered up which results in different power consumption and wake up time between the two sleep modes.

表 8-3. Sleep Mode Power Consumption

Sleep Mode	Wake-Up Time	Power Consumption With Auto Correction Disabled	Power Consumption With Auto Correction Enabled
Complete Shutdown	2.5 ms	7 mW	7 mW
Standby	100 µs	7 mW	7 mW
Deep Sleep	20 µs	350 mW	475 mW
Light Sleep	2 µs	655 mW	780 mW

8.4.2 Feedback Mode: Burst Mode

In burst mode, the output data is alternated between a high-resolution, 12-bit output of 2^N samples and a low-resolution, 7-bit or 11-bit output of 2^{N+3} samples. Burst mode is enabled through a SPI register write and there are two basic operating modes available: a manual trigger mode where the high-resolution output is initiated through an external trigger and an auto-trigger mode where the internal logic transitions to a high-resolution output immediately after transmitting the last low-resolution sample. After burst mode is enabled through a SPI register write, the ADS54T01 transmits 2^{13} low-resolution samples and the trigger command is locked out until completion.

The parameter N can be changed through the SPI at any time. The change will go into effect with the next output cycle, starting with the transmission of low-resolution samples. The default value for N after reset is N=10.

表 8-4. Burst Mode Samples Per Cycle

N limit	10 (minimum)	25 (maximum)
Number of low resolution samples per cycle (2^{N+3})	8,192	268,435,456
Number of high resolution samples per cycle (2^N)	1,024	33,554,432
Total amount of samples per cycle	9,216	301,989,888

Copyright © 2022 Texas Instruments Incorporated

表 8-4. Burst Mode Samples Per Cycle (continued)

N limit	10 (minimum)	25 (maximum)
Maximum number of high resolution (12-bit) samples per 1 second	83.3M	83.3M

8.4.3 Receive Mode: Decimation Filter

図 8-14 shows that each channel has a digital filter in the data path.

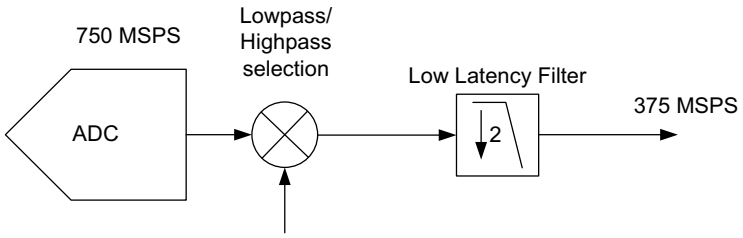


図 8-14. Decimation Filter Block Diagram

The filter can be programmed as a low-pass or a high-pass filter and the normalized frequency response of both filters. The decimation filter response has a 0.1-dB pass-band ripple with approximately 41% pass-band bandwidth. The stop-band attenuation is approximately 40 dB.

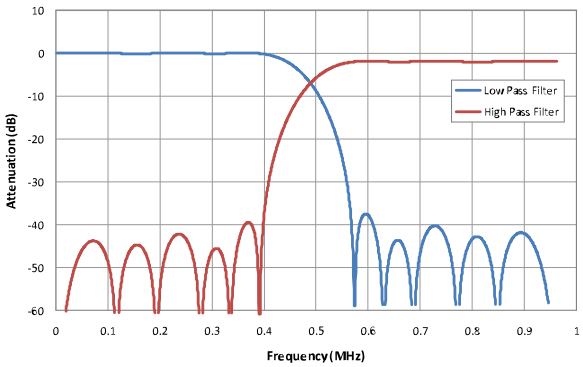


図 8-15. Decimation Filter Response

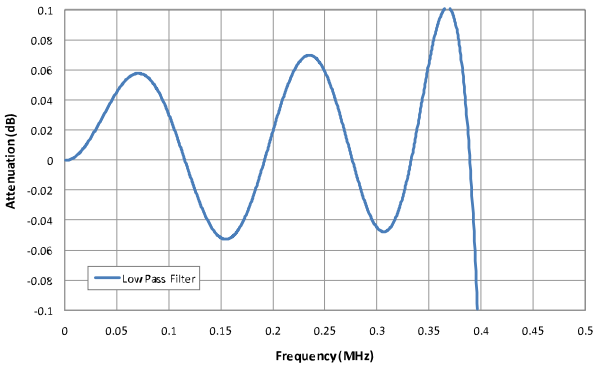


図 8-16. Decimation Filter Response

8.4.4 Manual Trigger Mode

The control of the high-resolution output is shown below along with the two output flags (TRDY and HRES).

Copyright © 2022 Texas Instruments Incorporated

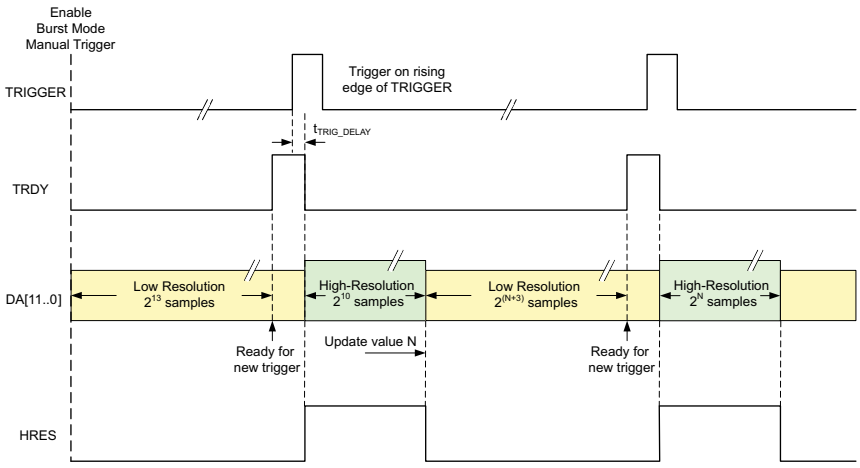


図 8-17. Triggering High Resolution Mode and Lockout Time

After enabling burst mode, the output data DA[11..0] are forced to low-resolution mode for 2^{13} samples. During that period, any trigger signal is ignored. The completion of the low-resolution sample cycle is signaled by a logic high on the TRDY output pins indicating that a high-resolution (12-bit) data output burst can be triggered by a low-to-high transition on the TRIGGER input. The ADC monitors the TRIGGER input at each rising edge of the input clock.

The high-resolution output data starts with a delay of t_{TRIG_DELAY} = 1-2 DACLK clock cycles and is indicated through the HRES data flag which stays high for all 2^N high-resolution samples. At completion the register value for N is verified and transmission of $2^{(N+3)}$ low-resolution data immediately follows. When the last low-resolution sample is output on the output data bus, the flag TRDY is asserted high again indicating the end of the lockout period and the next 2^N high-resolution samples can be triggered again.

8.4.5 Auto Trigger Mode

This mode is enabled by setting the auto trigger bit through a SPI register write and the DA data outputs start in low resolution for 2^{13} samples. Immediately following completion of transmission of the last low resolution sample, the outputs automatically start transmitting 2^{10} high-resolution samples without the need for external trigger ensuring maximum efficiency. Any input signal on the TRIGGER pins is ignored and the TRDY flag will go high only for one clock cycle with the start of the high-resolution data.

The output flag HRES is aligned with the 2^N high-resolution output samples and the parameter N can be changed until the next output cycle starts again with low-resolution output data.

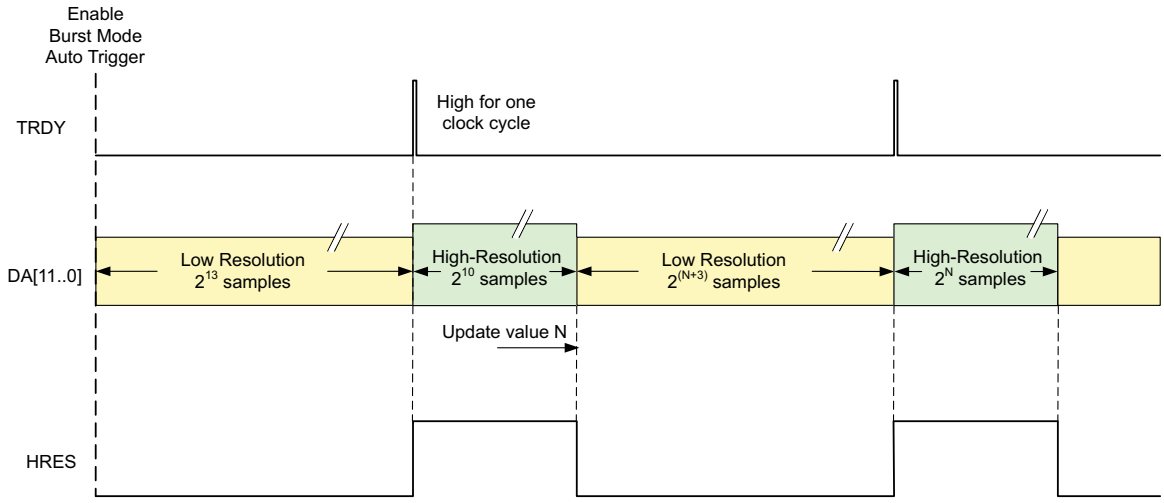


図 8-18. Auto Trigger Mode Timing Diagram

Copyright © 2022 Texas Instruments Incorporated

8.5 Programming

The serial interface (SIF) included in the ADS54T01 is a simple 3 or 4 pin interface. In normal mode, 3 pins are used to communicate with the device. There is an enable (SDENB), a clock (SCLK) and a bidirectional IO port (SDIO). If the user would like to use the 4-pin interface one write must be implemented in the 3-pin mode to enable 4-pin communications. In this mode, the SDO pin becomes the dedicated output. The serial interface has an 8-bit address word and a 16-bit data word. The first rising edge of SCLK after SDENB goes low will latch the read/write bit. If a high is registered, then a read is requested. If it is low, then a write is requested. SDENB must be brought high again before another transfer can be requested. The signal diagram is shown below:

8.5.1 Device Initialization

After power up, TI recommends to initialize the device through a hardware reset by applying a logic low pulse on the SRESETb pin (of width greater than 20 ns), as shown in 図 8-19. This resets all internal digital blocks (including SPI registers) to their default condition.

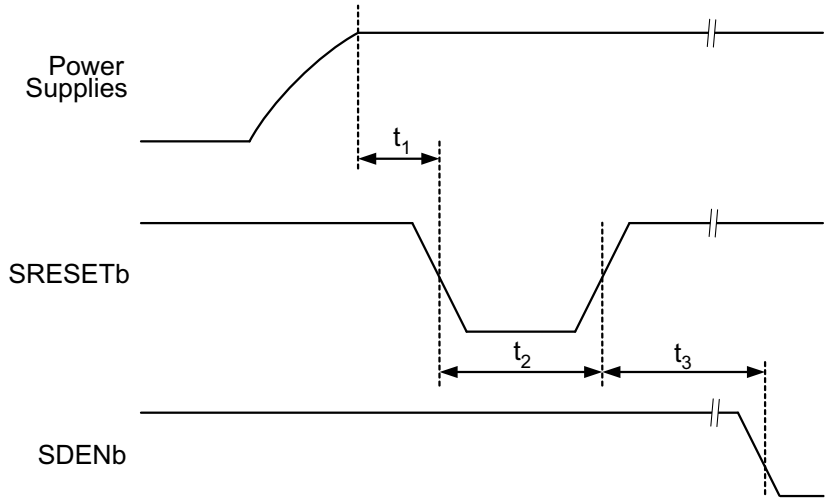


図 8-19. Device Initialization Timing Diagram

表 8-5. Reset Timing

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
t_1	Power-on delay	Delay from power up to active low RESET pulse	3			ms
t_2	Reset pulse width	Active low RESET pulse width	20			ns
t_3	Register write delay	Delay from RESET disable to SDENb active	100			ns

Recommended Device Initialization Sequence:

1. Power up
2. Reset ADS54T01 using hardware reset.
3. Apply clock and input signal.
4. Set register 0x01 bit D15 to "1" (ChA Corr EN) to enable gain/offset correction circuit and other desired registers.
5. Set register 0x03 bit D14 to "1" (Start Auto Corr ChA). This clears and resets the accumulator values in the DC and gain correction loop.
6. Set register 0x03 bit D14 to "0" (Start Auto Corr ChA). This starts the DC and gain auto-correction loop.

8.5.2 Serial Register Write

The internal register of the ADS54T01 can be programmed following these steps:

1. Drive SDENB pin low
2. Set the R/W bit to "0" (bit A7 of the 8-bit address)

Copyright © 2022 Texas Instruments Incorporated

3. Initiate a serial interface cycle specifying the address of the register (A6 to A0) whose content has to be written
4. Write 16-bit data which is latched on the rising edge of SCLK

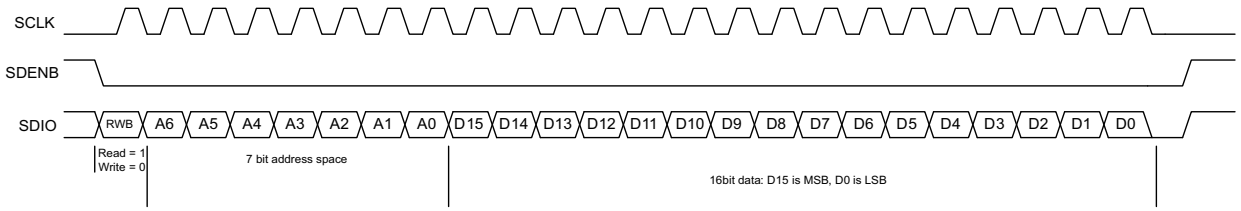


図 8-20. Serial Register Write Timing Diagram

表 8-6. Timing Requirements

PARAMETER		MIN	TYP(1)	MAX	UNIT
f_{SCLK}	SCLK frequency (equal to $1/t_{SCLK}$)	>DC		20	MHz
t_{SLOADS}	SDENB to SCLK setup time	25			ns
t_{SLOADH}	SCLK to SDENB hold time	25			ns
t_{DSU}	SDIO setup time	25			ns
t_{DH}	SDIO hold time	25			ns

(1) Typical values at +25°C; minimum and maximum values across the full temperature range: TMIN = –40°C to TMAX = +85°C, AVDD3V = 3.3 V, AVDD, DRVDD = 1.9 V, unless otherwise noted.

8.5.3 Serial Register Readout

The device includes a mode where the contents of the internal registers can be read back using the SDO/SDIO pins. This read-back mode may be useful as a diagnostic check to verify the serial interface communication between the external controller and the ADC.

1. Drive SDENB pin low
2. Set the RW bit (A7) to "1". This setting disables any further writes to the registers
3. Initiate a serial interface cycle specifying the address of the register (A6 to A0) whose content has to be read.
4. The device outputs the contents (D15 to D0) of the selected register on the SDO/SDIO pin
5. The external controller can latch the contents at the SCLK rising edge.
6. To enable register writes, reset the RW register bit to "0".

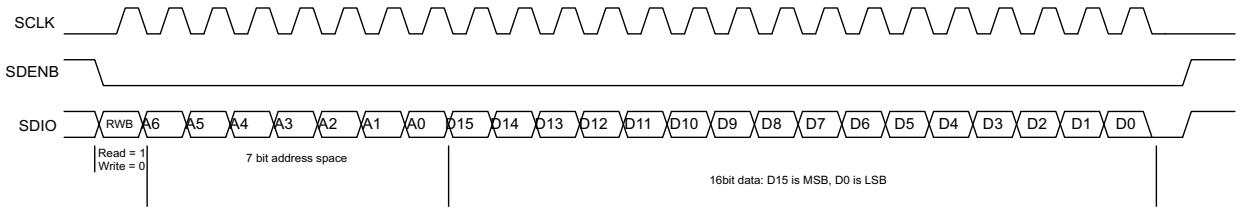


図 8-21. Serial Register Read Timing Diagram

Copyright © 2022 Texas Instruments Incorporated

8.6 Register Maps

8.6.1 Serial Register Map

表 8-7. Serial Registers

Register Address	Register Data[1]															
A7–A0 IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
0	3/4 Wire SPI	DecFil/ Burst	0	High/ Low Pass	0	0	0	0	0	0	Burst rate	0	0	Auto Trigger	0	0
1	Corr EN	0	0	0	0	0	0	0	0	0	0	0	Data Format	0	Hp Mode1	0
2	0	1	1	0	0	Over-range threshold				0	0	0	0	0	0	0
3	0	DC Offset Corr	0	0	1	0	1	1	0	0	0	1	1	0	0	0
E	Sync Select														0	0
F	Sync Select				0	0	0	0	0	VREF Set			0	0	0	0
1A	0	0	0	0	1	0	1	1	0	0	0	1	1	0	0	0
2B	0	0	0	0	0	0	0	Temp Sensor								
2C	Reset															
34	0	0	Burst Mode N				0	0	0	0	0	0	0	0	0	0
37	Sleep Modes						0	0	0	0	0	0	0	0	0	0
38	HP Mode2							LP Mode	TEMP EN	BIAS EN	SYNC EN	TRIGEN	1	1	1	1
3A	LVDS Current Strength			LVDS SW		Internal LVDS Termination		0	0	0	0	DACLK EN	DBCLK EN	0	OVRA EN	OVRB EN
66	LVDS Output Bus A EN															

(1) Multiple functions in a register can be programmed in a single write operation.

8.6.2 Description of Serial Interface Registers

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
0	3/4 Wire SPI	Dec Fil/ Burst	0	High/ Low Pass	0	0	0	0	0	0	Burst rate	0	0	Auto Trigger	0	0

D15 **3/4 Wire SPI** Enables 4-bit serial interface when set
Default 0

0 3-wire SPI is used with SDIO pin operating as bidirectional I/O port

1 4-wire SPI is used with SDIO pin operating as data input and SDO pin as data output port.

D14 **DecFil/ Burst** 2x decimation filter (Receive Mode) is enabled when bit is set
Default 0

0 Burst mode enable

1 2x decimation filter enabled

D12 **High/Low Pass** (Decimation filter must be enabled first: set bit D14)
Default 0

0 Low Pass

1 High Pass

D5 **Burst Rate** Low resolution output data rate in burst mode
Default 0

0 Low resolution (9-bit) full output rate

1 Decimated low resolution output (4x decimation, 11-bit resolution)

D2 **Auto Trigger** Enables auto trigger mode in burst mode without the need to control the trigger pin.
Default 0

0 Manual trigger mode using the external trigger input pin

1 Auto trigger mode enabled

Copyright © 2022 Texas Instruments Incorporated

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
1	Corr EN	0	0	0	0	0	0	0	0	0	0	0	Data Format	0	HP Mode1	0

D15 **Corr EN (should be enabled for maximum performance)**
Default 0

0 auto gain correction disabled

1 auto gain correction enabled

D3 **Data Format**
Default 0

0 Two's complement

1 Offset Binary

D1 **HP Mode 1**
Default 0

1 Must be set to 1 for optimum performance

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
2	0	1	1	0	0	Over-range threshold				0	0	0	0	0	0	0

D14 Read back 1.

D13 Read back 1.

D10-D7 **Over-range threshold**

The over-range detection is triggered 12 output clock cycles after the overload condition occurs. The threshold at which the OVR is triggered = 1.0V x [decimal value of <Over-range threshold>]/16. After power up or reset, the default value is 15 (decimal) which corresponds to a OVR threshold of 0.56dB below fullscale (20*log(15/16)). This OVR threshold is applicable to both channels.

Default 1111

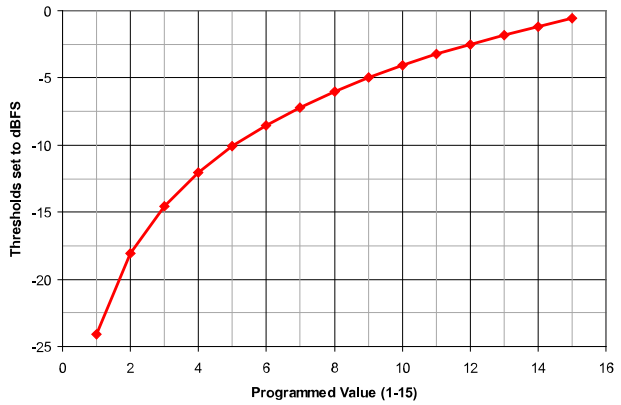


図 8-22. Over-range Threshold vs. Programmed Value

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
3	0	DC Offset Coff	0	0	1	0	1	1	0	0	0	1	1	0	0	0

D14 **DC Offset Corr** Starts DC offset correction loop
Default 1

0 Starts offset correction loop

1 DC offset correction loop is cleared

D11, 9, 8, 4, 3 Must be set to 1 for maximum performance
Default 1

Copyright © 2022 Texas Instruments Incorporated

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
E	Sync Select														0	0

D15-D2 **Sync Select** Sync selection for the clock generator block (also need to see address 0x0F)
Default 1010 1010 1010 10

0000 0000 0000 00 Sync is disabled

0101 0101 0101 01 Sync is set to one shot (one time synchronization only)

1010 1010 1010 10 Sync is derived from SYNC input pins

1111 1111 1111 11 not supported

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
F	Sync Select				0	0	0	0	0	VREF Sel			0	0	0	0

D15-D12 **Sync Select** Sync selection for the clock generator block
Default 1010 1010 1010 10

0000 Sync is disabled

0101 Sync is set to one shot (one time synchronization only)

1010 Sync is derived from SYNC input pins

1111 not supported

D6-D4 **VREF SEL** Internal voltage reference selection
Default 000

000 1.0 V

001 1.25 V

010 0.9 V

011 0.8 V

100 1.15 V

Others external reference

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
1A	0	0	0	0	1	0	1	1	0	0	0	1	1	0	0	0

D14, 11, 9, 8, 4, 3 Must be set to 1 for maximum performance
Default 1

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
2B	0	0	0	0	0	0	0	Temp Sensor								

D8-D0 **Temp Sensor** Internal temperature sensor value – read only

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
2C	Reset															

D15-D0 **Reset** This is a software reset to reset all SPI registers to their default value. Self clears to 0.
Default 0000

1101001011110000 Perform software reset

Copyright © 2022 Texas Instruments Incorporated

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
34	0	0	Burst Mode N				0	0	0	0	0	0	0	0	0	0

D13-D10 **Burst Mode N** This is the parameter that sets the amount of high resolution samples in burst mode
Default 0000

0000 N = 10

0001 N = 11

... ...

1111 N = 25

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
37	Sleep Modes						0	0	0	0	0	0	0	0	0	0

D15-D14 **Sleep Modes** Sleep mode selection which is controlled by the ENABLE pin. Sleep modes are active when ENABLE pin goes low.
Default 00

000000 Complete shut down Wake up time 2.5 ms

100000 Standby mode Wake up time 100 µs

110000 Deep sleep mode Wake up time 20 µs

110101 Light sleep mode Wake up time 2 µs

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
38	HP Mode 2							LP Mode	TEMP EN	FUSE Bias EN	SYNC EN	TRIG EN	1	1	1	1

D15-D9 **HP Mode 2**
Default 111111111

1 Set to 1 for normal operation

D8 **LP Mode** Low power mode
Default 1

0 Set to 0 to turn off unused output buffers

D7 **TEMP EN** Temperature sensor enable
Default 1

1 Set to 1 to enable the temperature sensor

D6 **FUSE BIAS EN** Enables internal bias voltages. Can be disabled after power up for power savings.
Default 1

0 Internal fuse bias powered down

1 Internal fuse bias enabled

D5 **SYNC EN** Enables the SYNC input buffer.
Default 1

0 SYNC input buffer disabled

1 SYNC input bffer enabled

D4 **TRIG EN** Enables the TRIGGER input buffer.
Default 1

0 TRIGGER input buffer disabled

1 TRIGGER input bffer enabled

D3-D0 Read back 1

Copyright © 2022 Texas Instruments Incorporated

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
3A	LVDS Current Strength			LVDS SW		Internal LVDS Termination		0	0	0	0	DACLK EN	0	0	OVRA EN	0

D15-D13 **LVDS Current Strength** LVDS output current strength.
Default 000

000	2 mA	100	3 mA
001	2.25 mA	101	3.25 mA
010	2.5 mA	110	3.5 mA
011	2.75 mA	111	3.75 mA

D12-D11 **LVDS SW** LVDS driver internal switch setting – correct range must be set for setting in D15-D13
Default 01

01 2 mA to 2.75 mA

11 3mA to 3.75mA

D10-D9 **Internal LVDS Termination** Internal termination
Default 00

00 2 kΩ

01 200 Ω

10 200 Ω

11 100 Ω

D4 **DACLK EN** Enable DACLK output buffer
Default 1

0 DACLK output buffer powered down

1 DACLK output buffer enabled

D1 **OVRA EN** Enable OVRA output buffer
Default 1

0 OVRA output buffer powered down

1 OVRA output buffer enabled

Register Address	Register Data															
A7-A0 in hex	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
66	LVDS Output Bus EN															

D15-D0 **LVDS Output Bus EN** Individual LVDS output pin power down
Default FFFF

0 Output is powered down

1 Output is enabled

D15 corresponds to TRDYP/N (pins N7, P7)

D14 corresponds to HRESP/N (pins N6, P6)

D13 SYNCOUTP/N (pins N5, P5)

D12 Pins N4, P4 (no connect pins) which are not used and should be powered down for power savings

D11-D0 corresponds to DA11-DA0

Copyright © 2022 Texas Instruments Incorporated

9 Power Supply Recommendations

The device requires a 1.8-V nominal supply for AVDDC, AVDD18, DVDD, DVDDLVDS, and IOVDD. The device also requires a 3.3-V supply for AVDD33. There are no specific sequence power-supply requirements during device power-up. AVDDC, AVDD18, DVDD, DVDDLVDS, IOVDD and AVDD33 can power up in any order.

Copyright © 2022 Texas Instruments Incorporated

10 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

10.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.2 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の使用条件を参照してください。

10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.
すべての商標は、それぞれの所有者に帰属します。

10.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.5 Glossary

TI Glossary	This glossary lists and explains terms, acronyms, and definitions.

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2022 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
ADS54T01IZAY	Active	Production	NFBGA (ZAY) | 196	160 | JEDEC TRAY (5+1)	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	ADS54T01I
ADS54T01IZAY.B	Active	Production	NFBGA (ZAY) | 196	160 | JEDEC TRAY (5+1)	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	ADS54T01I
ADS54T01IZAYR	Active	Production	NFBGA (ZAY) | 196	1000 | LARGE T&R	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	ADS54T01I
ADS54T01IZAYR.B	Active	Production	NFBGA (ZAY) | 196	1000 | LARGE T&R	Yes	SNAGCU	Level-3-260C-168 HR	-40 to 85	ADS54T01I

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

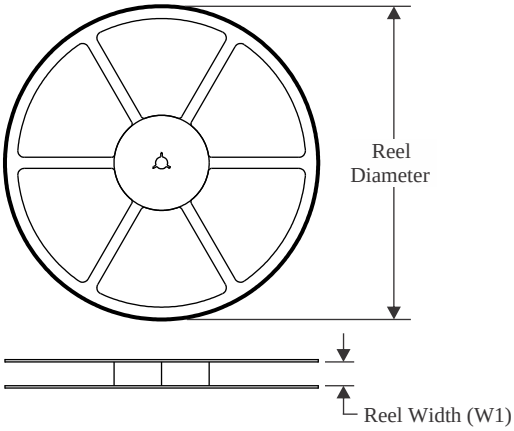


TAPE DIMENSIONS

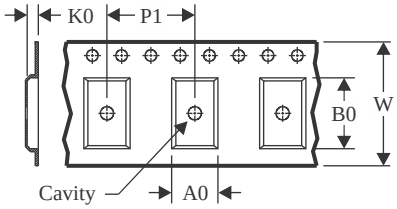

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

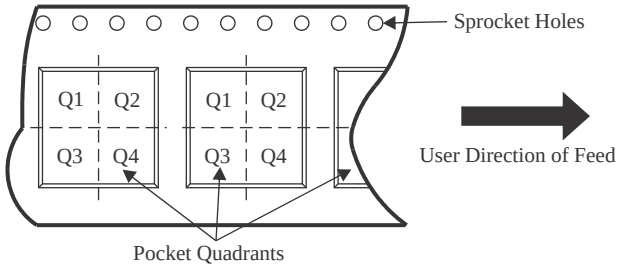

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ADS54T01IZAYR	NFBGA	ZAY	196	1000	330.0	24.4	12.3	12.3	2.3	16.0	24.0	Q1


TAPE AND REEL BOX DIMENSIONS

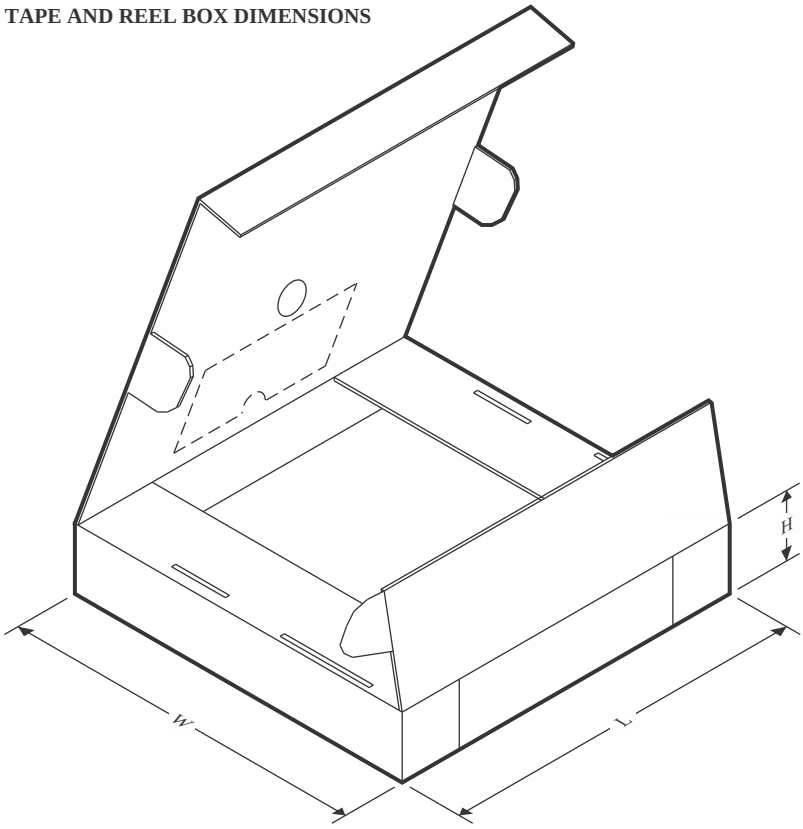

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ADS54T01IZAYR	NFBGA	ZAY	196	1000	350.0	350.0	43.0

TRAY

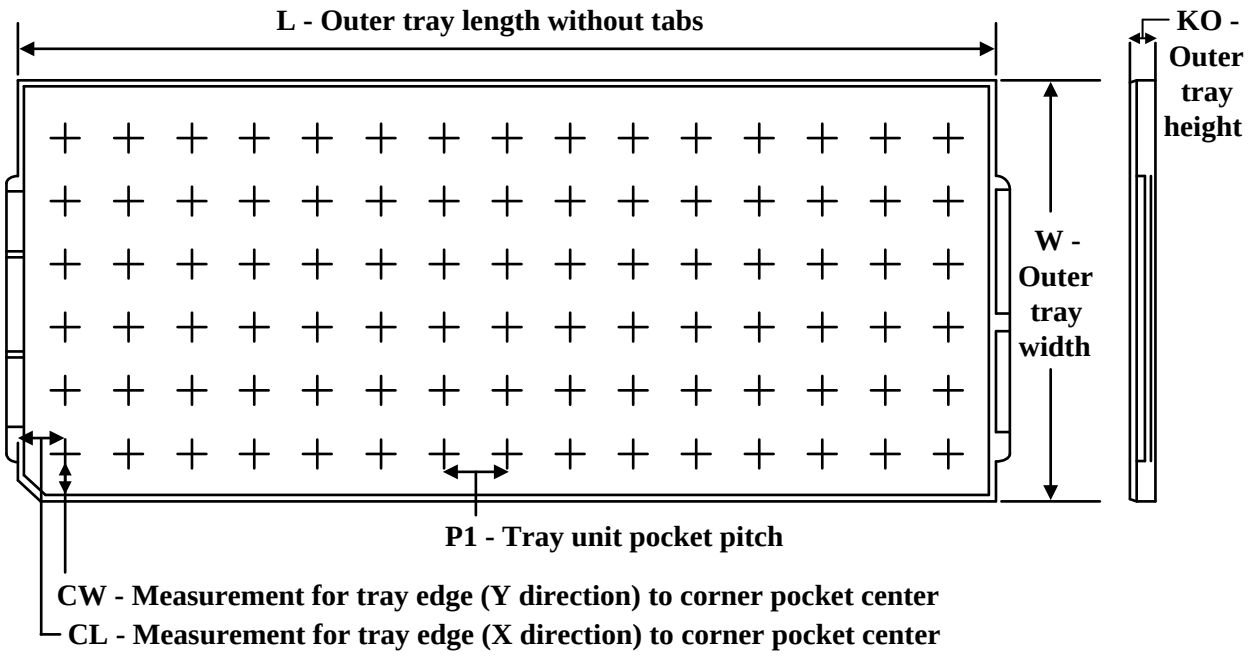

Chamfer on Tray corner indicates Pin 1 orientation of packed units.

*All dimensions are nominal


Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	K0 (µm)	P1 (mm)	CL (mm)	CW (mm)
ADS54T01IZAY	ZAY	NFBGA	196	160	8 x 20	150	315	135.9	7620	15.4	11.2	19.65
ADS54T01IZAY.B	ZAY	NFBGA	196	160	8 x 20	150	315	135.9	7620	15.4	11.2	19.65

PACKAGE OUTLINE

ZAY0196A


NFBGA - 1.4 mm max height

PLASTIC BALL GRID ARRAY

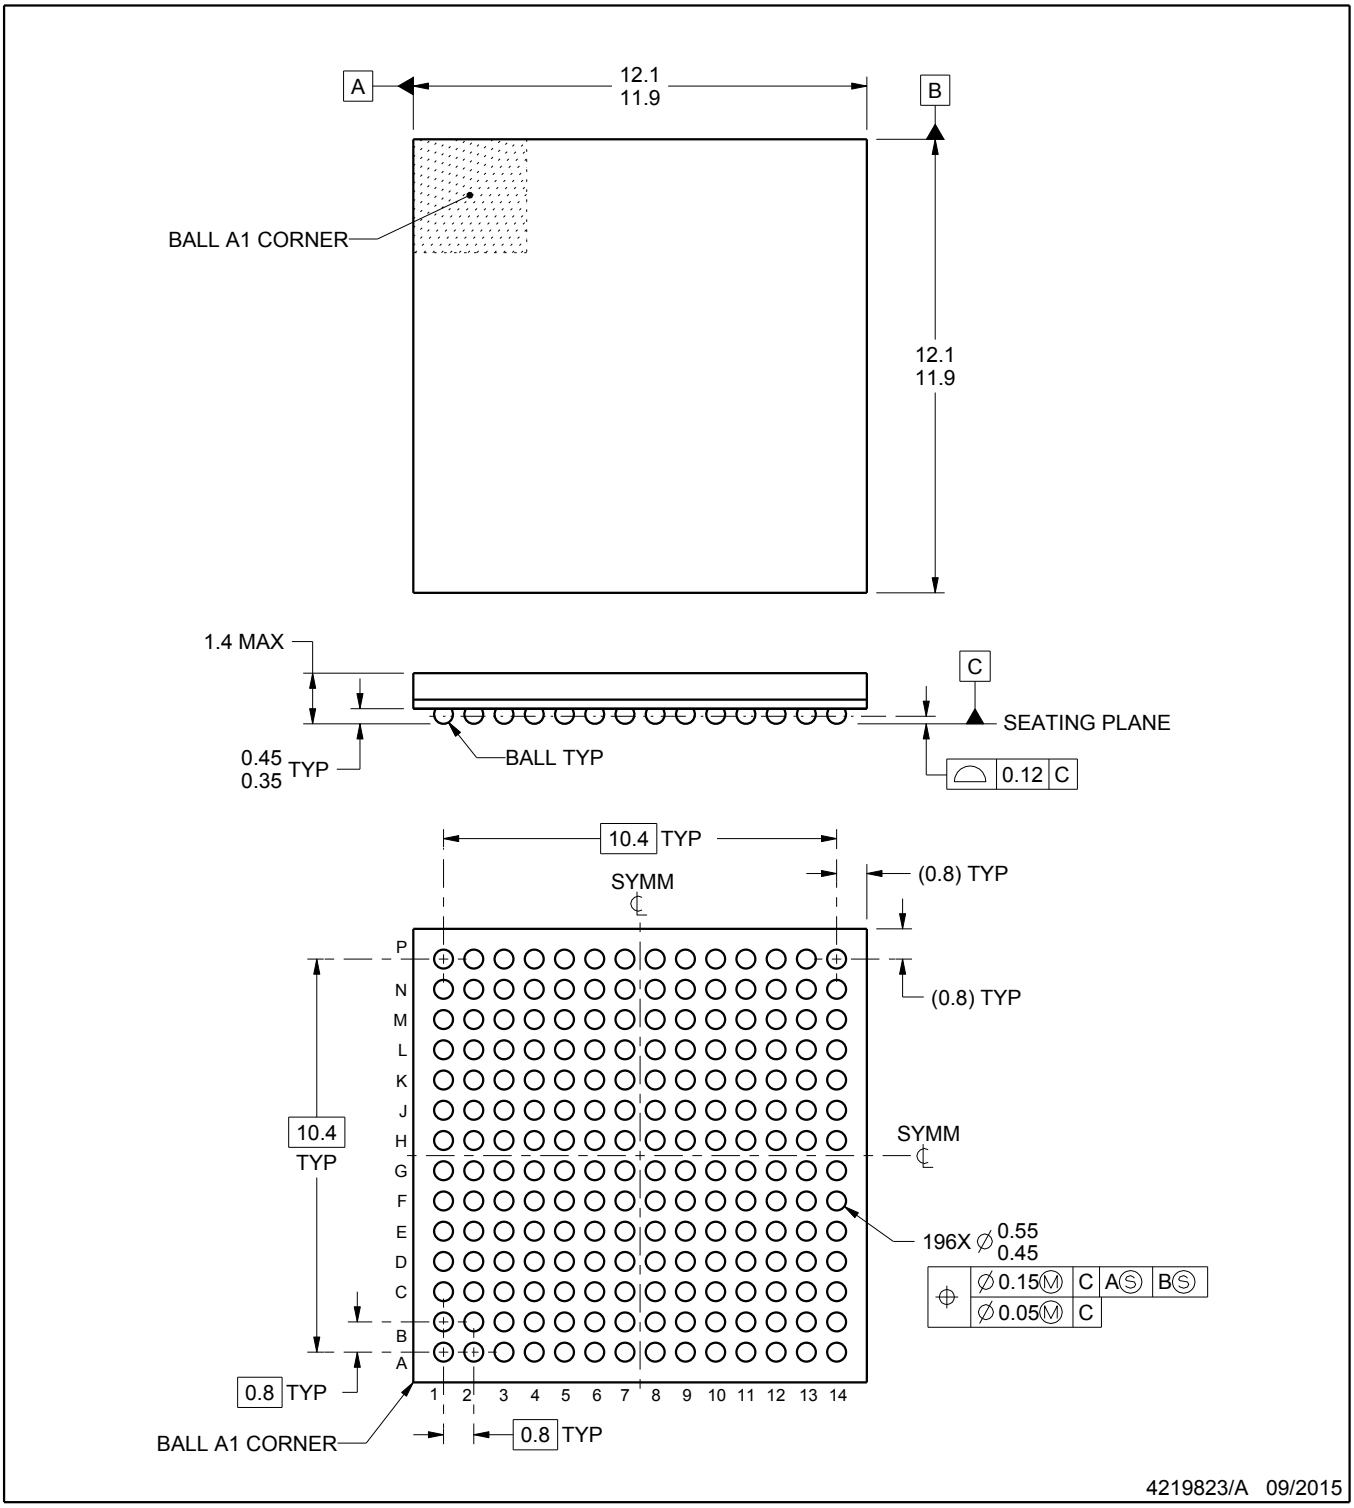


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

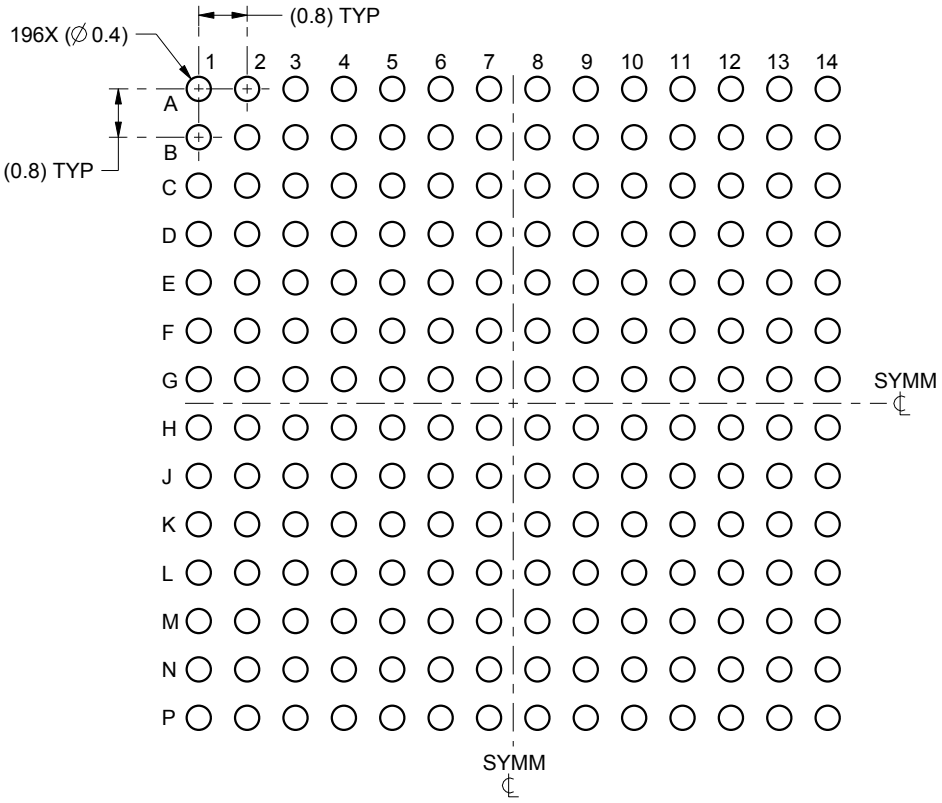

LAND PATTERN EXAMPLE
SCALE:8X

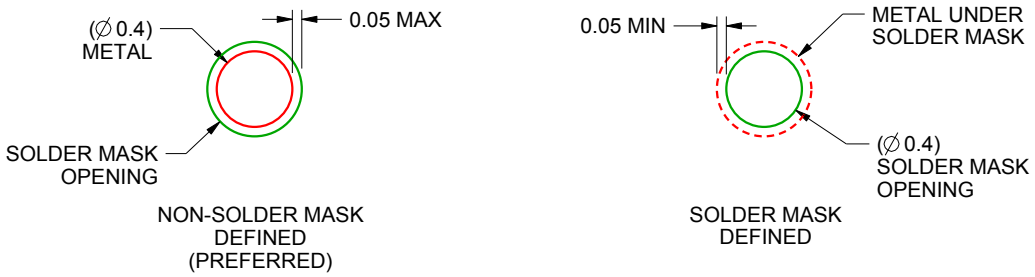

SOLDER MASK DETAILS
NOT TO SCALE

4219823/A 09/2015

NOTES: (continued)


3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For information, see Texas Instruments literature number SPRAA99 (www.ti.com/lit/spraa99).

EXAMPLE STENCIL DESIGN

ZAY0196A

NFBGA - 1.4 mm max height

PLASTIC BALL GRID ARRAY

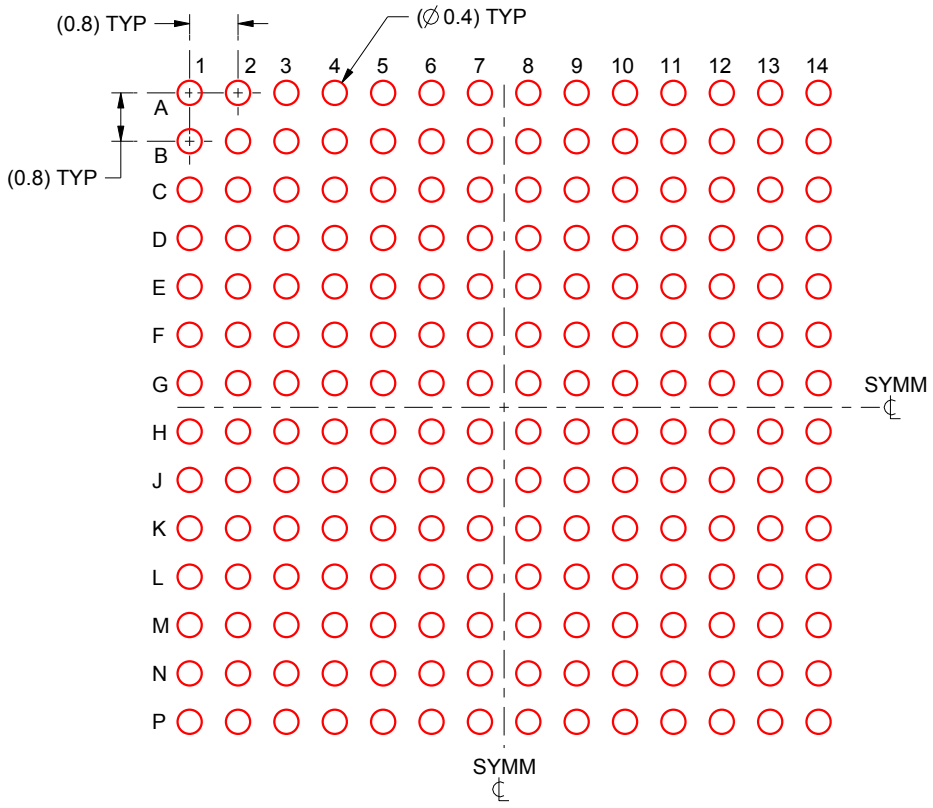

SOLDER PASTE EXAMPLE
BASED ON 0.15 mm THICK STENCIL
SCALE:8X

4219823/A 09/2015

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、 TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月