DAC39RF12、DAC39RFS12 JESD204B、C インターフェイス搭載、12、24GSPS、16 ビット、デュアルおよびシングル チャネル、マルチナイキスト D/A コンバータ (DAC)

1 特長

- 16 ビット、12/24GSPS、マルチナイキスト DAC コア
- 最大入力データ レート:
  - 8 ビット、シングル チャネル、DES モード: 24GSPS
  - 12 ビット、シングル チャネル、DES モード: 15.5GSPS
  - 16 ビット、シングル チャネル: 12GSPS
  - 8 ビット、デュアル チャネル、12GSPS
  - 12 ビット、デュアル チャネル: 7.75GSPS/Ch
  - 16 ビット、デュアル チャネル: 6.2GSPS/Ch
- 出力帯域幅 (-3dB): 12GHz
- f_{OUT} = 2.997GHz、DES2XL モード、DEM/Dither off の場合の性能
  - ノイズ フロア (小信号): -155dBFS/Hz
  - SFDR (-0.1dBFS): –60dBc
  - IMD3 (各トーン -7dBFS): –60dBc
  - 付加位相ノイズ、10kHz オフセット: -137dBc/Hz
- 4 つのデジタル アップコンバータ (DUC) を内蔵
  - 補間: 1x、2x、3x、4x、6x、8x …256x
  - I/Q 出力用の複素ベースバンド DUC
  - デュアル チャネルのダイレクト RF サンプリングに使用する、複素信号から実信号へのアップコンバージョン
  - 64 ビットの周波数分解能 NCO
- 高速周波数ホッピングに適した高速再構成インターフェイス
  - 200MHz クロックの 4 ビット データ
  - 60ns での再構成 (32 ビット周波数)
  - 位相干渉を使用する任意の周波数ホッピング
- JESD204C インターフェイス
  - 最大 12.8Gbps で最大 16 レーン
  - Class C-S、Subclass-1 互換
  - 内部 AC カップリング コンデンサ
- SYSREF タイミング自動較正用の SYSREF ウィンドウ処理

2 アプリケーション

- 衛星通信 (SATCOM)
- フェーズド アレイ アンテナ システム
- 合成開口レーダー (SAR) 励振器
- ワイヤレス通信テスター
- 任意波形ジェネレータ (AWG)

3 概要

DAC39RF12 および RFS12 は、16 ビット分解能のデュアルおよびシングル チャネル D/A コンバータ (DAC) のファミリです。これらのデバイスは、直接 RF サンプリングまたは複素ベースバンド信号生成のいずれかに対して、非補間または補間 DAC として使用できます。最大入力データ レートは、1 チャネルの場合は 24GSPS、2 チャネルの場合は 12GSPS です。このデバイスは、10GHz を超える搬送波周波数で、最大 10GHz、7.5GHz、および 6GHz の信号帯域幅 (8、12、16 ビットの入力分解能) の信号を生成できるため、C バンドを通した X バンドへの直接サンプリングを可能にします。


また、このデバイスは、高いサンプリング レート、出力の周波数範囲、64 ビットの NCO 周波数分解能、位相コヒーレンスを備えた任意の周波数ホッピングにより、任意波形生成 (AWG) とダイレクト デジタル合成 (DDS) も可能です。

JESD204B および JESD204C 互換のシリアル インターフェイスには、最大 12.8Gbps に対応する 16 のレシーバ ペアがあります。インターフェイスは JESD204B および JESD204C Subclass-1 に準拠しており、SYSREF を使用することで決定論的レイテンシとマルチデバイス同期を実現します。

パッケージ情報

部品番号	パッケージ (1)	パッケージ サイズ(2)
DAC39RF12 DAC39RFS12	FCBGA (256)	17mm × 17mm、 1mm ピッチ

(1) 詳細については、セクション 11 を参照してください。
(2) パッケージ サイズ (長さ × 幅) は公称値であり、該当する場合はピンも含まれます。

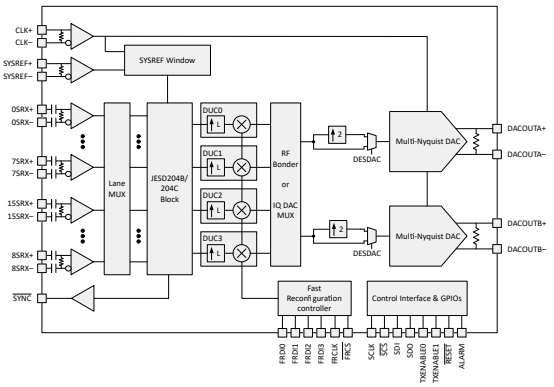

ブロック図

このリソースの元の言語は英語です。翻訳は概要を便宜的に提供するもので、自動化ツール (機械翻訳) を使用していることがあり、TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、ti.com で必ず最新の英語版をご参照くださいますようお願いいたします。

Table of Contents

1 特長.....1
2 アプリケーション.....1
3 概要.....1
4 Device Comparison.....2
5 Pin Configuration and Functions.....3
6 Specifications.....8
6.1 Absolute Maximum Ratings.....8
6.2 ESD Ratings.....8
6.3 Recommended Operating Conditions.....9
6.4 Thermal Information.....9
6.5 Electrical Characteristics - DC Specifications.....10
6.6 Electrical Characteristics - AC Specifications.....12
6.7 Electrical Characteristics - Power Consumption.....26
6.8 Timing Requirements.....30
6.9 Switching Characteristics.....31
6.10 SPI and FRI Timing Diagrams.....33
6.11 Typical Characteristics: Bandwidth and DC Linearity.....35
6.12 Typical Characteristics: Single Tone Spectra.....38
6.13 Typical Characteristics: Dual Tone Spectra.....41
6.14 Typical Characteristics: Noise Spectral Density.....45
6.15 Typical Characteristics: Linearity Sweeps.....49
6.16 Typical Characteristics: Modulated Waveforms.....67
6.17 Typical Characteristics: Phase and Amplitude Noise.....68
6.18 Typical Characteristics: Power Dissipation and Supply Currents.....70
7 Detailed Description.....73
7.1 Overview.....73
7.2 Functional Block Diagrams.....73
7.3 Feature Description.....75
7.4 Device Functional Modes.....103
7.5 Programming.....116
8 Application and Implementation.....177
8.1 Application Information.....177
8.2 Typical Application.....183
8.3 Power Supply Recommendations.....190
8.4 Layout.....193
9 Device and Documentation Support.....205
9.1 ドキュメントの更新通知を受け取る方法.....205
9.2 サポート・リソース.....205
9.3 商標.....205
9.4 静電気放電に関する注意事項.....205
9.5 用語集.....205
10 Revision History.....205
11 Mechanical, Packaging, and Orderable Information.....206

4 Device Comparison

Part Number	# Channels	Maximum Sample Rate (Single /Dual Edge)	Radiation Tolerance		JESD Interface
			SEL/SEFI	TID	
DAC39RF10	2	10.24/20.48 GSPS	NA	NA	Yes
DAC39RFS10	1	10.24/20.48 GSPS	NA	NA	Yes
DAC39RF12	2	12/24 GSPS	NA	NA	Yes
DAC39RFS12	1	12/24 GSPS	NA	NA	Yes
DAC39RF10-EP	2	10.4/20.8 GSPS	NA	NA	Yes
DAC39RFS10-EP	1	10.4/20.8 GSPS	NA	NA	Yes
DAC39RF10-SP	2	10.4/20.8 GSPS	120 MeV	300 krad	Yes
DAC39RFS10-SP	1	10.4/20.8 GSPS	120 MeV	300 krad	Yes
DAC39RF10-SEP	2	10.4/20.8 GSPS	43 MeV	30 krad	Yes
DAC39RFS10-SEP	1	10.4/20.8 GSPS	43 MeV	30 krad	Yes
DDS39RF12	2	12/24 GSPS	NA	NA	2 lanes only
DDS39RFS12	1	12/24 GSPS	NA	NA	2 lanes only
DAC39RF10EF	2	10.24/20.48 GSPS	NA	NA	Input rate limited
DAC39RFS10EF	1	10.24/20.48 GSPS	NA	NA	Input rate limited

Copyright © 2024 Texas Instruments Incorporated

5 Pin Configuration and Functions

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
A	DGND	DGND	DGND	2SRX-	2SRX+	DGND	0SRX-	0SRX+	DGND	AGND	AGND	DACOUTA+	DACOUTA-	AGND	VSSCLK	VSSCLK	A
B	DGND	DGND	DGND	3SRX-	3SRX+	DGND	1SRX-	1SRX+	DGND	AGND	AGND	AGND	AGND	AGND	VSSCLK	VSSCLK	B
C	4SRX+	5SRX+	VDDT	VDDT	VDDT	DGND	VDDT	VDDT	DGND	AGND	VEEAM18	VEEAM18	VEEAM18	AGND	VSSCLK	VSSCLK	C
D	4SRX-	5SRX-	VDDT	TXEN1	TXEN0	RESETB	SDO	SDI	VDDIO	AGND	VEEAM18	VEEAM18	VEEAM18	AGND	VSSCLK	CLK+	D
E	DGND	DGND	DGND	FRDI0	FRDI1	SCANEN	SCSB	SCLK	VDDIO	VSSCLK	VSSCLK	VDDCLK10	VSSCLK	VSSCLK	VSSCLK	CLK-	E
F	6SRX+	7SRX+	VDDT	FRCLK	FRDI2	DGND	VDDDIG	VDDEA	VDDEA	VDDLA	VDDCLK10	VSSCLK	VSSCLK	VSSCLK	VSSCLK	VSSCLK	F
G	6SRX-	7SRX-	VDDT	FRCSB	FRDI3	VDDT	DGND	VDDDIG	DGND	VSSCLK	VSSCLK	VSSCLK	AGND	VDDA18A	AGND	AGND	G
H	DGND	DGND	DGND	ALARM	VDDT	DGND	VDDDIG	DGND	DGND	VDDLA	VDDCLK10	VDDCLK18	VDDCLK18	VDDA18A	AGND	RBIAS-	H
J	DGND	DGND	DGND	SYNCB	VDDT	DGND	VDDDIG	DGND	DGND	VDDLB	VDDCLK10	VDDSYS18	VDDSYS18	VDDA18B	EXTREF	RBIAS+	J
K	14SRX+	15SRX+	VDDT	VDDR18	DGND	VDDT	DGND	VDDDIG	DGND	VSSCLK	VSSCLK	VSSCLK	AGND	VDDA18B	AGND	AGND	K
L	14SRX-	15SRX-	VDDT	VDDR18	DGND	DGND	VDDDIG	VDDEB	VDDEB	VDDLB	VDDCLK10	VSSCLK	VSSCLK	VSSCLK	VSSCLK	VSSCLK	L
M	DGND	DGND	DGND	VDDR18	RTEST	VDDT	DGND	VDDDIG	DGND	VSSCLK	VSSCLK	VDDCLK10	VSSCLK	VSSCLK	VSSCLK	SYSREF+	M
N	12SRX+	13SRX+	VDDT	VDDR18	DGND	ATEST	VDDDIG	DGND	VQPS	AGND	VEEBM18	VEEBM18	VEEBM18	AGND	VSSCLK	SYSREF-	N
P	12SRX-	13SRX-	VDDT	VDDT	VDDT	DGND	VDDT	VDDT	VQPS	AGND	VEEBM18	VEEBM18	VEEBM18	AGND	VSSCLK	VSSCLK	P
R	DGND	DGND	DGND	11SRX+	11SRX-	DGND	9SRX+	9SRX-	DGND	AGND	AGND	AGND	AGND	AGND	VSSCLK	VSSCLK	R
T	DGND	DGND	DGND	10SRX+	10SRX-	DGND	8SRX+	8SRX-	DGND	AGND	AGND	DACOUTB+	DACOUTB-	AGND	VSSCLK	VSSCLK	T

図 5-1. ACK Package, 256-Ball Flip Chip BGA with 1mm pitch, Top View

Copyright © 2024 Texas Instruments Incorporated

表 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	COORD.		
DAC Outputs			
DACOUTA-	A13	O	DAC channel A analog output negative terminal. Output voltage must comply with DAC compliance voltage to maintain specified performance.
DACOUTA+	A12	O	DAC channel A analog output positive terminal. Output voltage must comply with DAC compliance voltage to maintain specified performance.
DACOUTB-	T13	O	DAC channel B analog output negative terminal. Output voltage must comply with DAC compliance voltage to maintain specified performance. Not available in single channel devices.
DACOUTB+	T12	O	DAC channel B analog output positive terminal. Output voltage must comply with DAC compliance voltage to maintain specified performance. Not available in single channel devices.
Differential Clock and SYSREF Inputs			
CLK-	E16	I	Device clock input negative terminal. There is an internal 100-Ω differential termination between CLK+ and CLK–. This input is self-biased and should be AC coupled to the clock source.
CLK+	D16	I	Device clock input positive terminal. There is an internal 100-Ω differential termination between CLK+ and CLK–. This input is self-biased and should be AC coupled to the clock source.
SYSREF-	N16	I	Differential JESD204C SYSREF input negative terminal.There is an internal 100-Ω differential termination between SYSREF+ and SYSREF–.
SYSREF+	M16	I	Differential JESD204C SYSREF input negative terminal.There is an internal 100-Ω differential termination between SYSREF+ and SYSREF–.
SerDes Interface			
0SRX-	A7	I	Serdes Lane 0 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 0SRX+.
0SRX+	A8	I	Serdes Lane 0 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 0SRX-.
1SRX-	B7	I	Serdes Lane 1 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 1SRX+.
1SRX+	B8	I	Serdes Lane 1 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 1SRX-.
2SRX-	A4	I	Serdes Lane 2 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 2SRX+.
2SRX+	A5	I	Serdes Lane 2 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 2SRX-.
3SRX-	B4	I	Serdes Lane 3 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 3SRX+.
3SRX+	B5	I	Serdes Lane 3 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 3SRX-.
4SRX-	D1	I	Serdes Lane 4 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 4SRX+.
4SRX+	C1	I	Serdes Lane 4 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 4SRX-.
5SRX-	D2	I	Serdes Lane 5 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 5SRX+.
5SRX+	C2	I	Serdes Lane 5 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 5SRX-.
6SRX-	G1	I	Serdes Lane 6 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 6SRX+.
6SRX+	F1	I	Serdes Lane 6 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 6SRX-.

Copyright © 2024 Texas Instruments Incorporated

表 5-1. Pin Functions (続き)

PIN		I/O	DESCRIPTION
NAME	COORD.		
7SRX-	G2	I	Serdes Lane 7 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 7SRX+.
7SRX+	F2	I	Serdes Lane 7 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 7SRX-.
8SRX-	T8	I	Serdes Lane 8 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 8SRX+.
8SRX+	T7	I	Serdes Lane 8 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 8SRX-.
9SRX-	R8	I	Serdes Lane 9 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 9SRX+.
9SRX+	R7	I	Serdes Lane 9 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 9SRX-.
10SRX-	T5	I	Serdes Lane 10 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 10SRX+.
10SRX+	T4	I	Serdes Lane 10 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 10SRX-.
11SRX-	R5	I	Serdes Lane 11 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 11SRX+.
11SRX+	R4	I	Serdes Lane 11 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 11SRX-.
12SRX-	P1	I	Serdes Lane 12 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 12SRX+.
12SRX+	N1	I	Serdes Lane 12 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 12SRX-.
13SRX-	P2	I	Serdes Lane 13 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 13SRX+.
13SRX+	N2	I	Serdes Lane 13 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 13SRX-.
14SRX-	L1	I	Serdes Lane 14 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 14SRX+.
14SRX+	K1	I	Serdes Lane 14 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 14SRX-.
15SRX-	L2	I	Serdes Lane 15 negative input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 15SRX+.
15SRX+	K2	I	Serdes Lane 15 positive input. Includes in package AC-coupling series capacitor and 100Ω internal termination to 15SRX-.
GPIO Functions			
ALARM	H4	O	ALARM pin is asserted when an internal unmasked alarm is detected. Alarm mask is set by ALM_MASK register.
FRCLK	F4	I	Fast reconfiguation interface clock.
$\overline{\text{FRCS}}$	G4	I	Fast reconfiguation interface chip select. Internal pullup.
FRDI0	E4	I	Fast reconfiguation interface data bit 0.
FRDI1	E5	I	Fast reconfiguation interface data bit 1.
FRDI2	F5	I	Fast reconfiguation interface data bit 2.
FRDI3	G5	I	Fast reconfiguation interface data bit 3.
$\overline{\text{RESET}}$	D6	I	Device reset input, active low. Must be toggled after power up. Internal pullup.
SCANEN	E6	I	TI use only, can be left unconnected. Internal pulldown.
SCLK	E8	I	Serial programming interface (SPI) clock input.
$\overline{\text{SCS}}$	E7	I	Serial programming interface (SPI) device select input, active low. Internal pullup.

Copyright © 2024 Texas Instruments Incorporated

表 5-1. Pin Functions (続き)

PIN		I/O	DESCRIPTION
NAME	COORD.		
SDI	D8	I	Serial programming interface (SPI) data input.
SDO	D7	O	Serial programming interface (SPI) data output. High impedance when not reading out SPI data.
$\overline{\text{SYNC}}$	J4	O	JESD204C SYNC output, active low.
TXEN0	D5	I	Transmit enable for channel A active high input. This pin must be enabled using register USE_TX_EN0. The DAC output is forced to midcode (0x0000 in 2's complement) when transmission is disabled. Internal pullup.
TXEN1	D4	I	Transmit enable for channel B active high input. This pin must be enabled using register USE_TX_EN1. The DAC output is forced to midcode (0x0000 in 2's complement) when transmission is disabled. Internal pullup.
Analog functions			
ATEST	N6	O	Analog test pin. Can be left disconnected if not used.
EXTREF	J15	I/O	Reference voltage output or input, determined by the EXTREF_EN register field. If the internal reference is used, the ball should be tied through 0.1uF to AGND.
RBIAS-	H16	O	Full-scale output current bias is set by the resistor tied from this terminal to RBIAS+.
RBIAS+	J16	O	Full-scale output current bias is set by the resistor tied from this terminal to RBIAS-.
RTEST	M5	O	TI use only. Tie to AGND.
Power Supplies			
VDDA18A	G14 H14	I	1.8-V supply voltage for DAC channel A. Can be combined with VDDA18B, but may degrade channel-to-channel crosstalk (XTALK).
VDDA18B	J14 K14	I	1.8-V supply voltage for DAC channel B. Can be combined with VDDA18A, but may degrade channel-to-channel crosstalk (XTALK).
VDDCLK10	F11 H11 J11 L11 E12 M12	I	1.0-V supply voltage for internal sampling clock distribution path. Noise or spurs on this supply may degrade phase noise performance. Recommended to separate from VDDDIG and VDDA for best performance.
VDDCLK18	H12 H13	I	1.8-V supply voltage for clock (CLK+/–) input buffer. Noise or spurs on this supply may degrade phase noise performance.
VDDDIG	F7 H7 J7 L7 N7 G8 K8 M8	I	1.0-V supply voltage for digital block. Recommended to separate from VDDA and VDDCLK for best performance.
VDDEA	F8 F9	I	1.0-V supply voltage for channel A DAC encoder. Recommended to separate from VDDDIG for best performance. Can be combined with VDDEB.
VDDEB	L8 L9	I	1.0-V supply voltage for channel B DAC encoder. Recommended to separate from VDDDIG for best performance. Can be combined with VDDEA.
VDDIO	D9 E9	I	1.8-V supply for CMOS input and output terminals.
VDDLA	F10 H10	I	1.0-V supply for DAC analog latch for channel A. Separate from VDDLB for best channel-to-channel crosstalk (XTALK). Must be separated from VDDDIG for best performance.
VDDLB	J10 L10	I	1.0-V supply for DAC analog latch for channel B. Separate from VDDLA for best channel-to-channel crosstalk (XTALK). Must be separated from VDDDIG for best performance.
VDDR18	K4 L4 M4 N4	I	1.8V Supply voltage for SerDes receivers.
VDDSYS18	J12 J13	I	1.8-V supply voltage for SYSREF (SYSREF+/–) input buffer. Can be combined with VDDCLK18 when SYSREF is disabled during normal operation. This supply should be separate from VDDCLK18 when SYSREF is run continuously during operation to avoid noise and spur coupling and reduced phase noise performance.
VDDT	C3 D3 F3 G3 K3 L3 N3 P3 C4 P4 C5 H5 J5 P5 G6 K6 M6 C7 P7 C8 P8	I	1.0V Supply voltage for SerDes termination.
VEEAM18	C11 D11 C12 D12 C13 D13	I	–1.8-V supply voltage for DAC current source bias for channel A. Can be combined with VEEBM18, but may degrade channel-to-channel crosstalk (XTALK).

Copyright © 2024 Texas Instruments Incorporated

表 5-1. Pin Functions (続き)

PIN		I/O	DESCRIPTION
NAME	COORD.		
VEEBM18	N11 P11 N12 P12 N13 P13	I	–1.8-V supply voltage for DAC current source bias for channel B. Can be combined with VEEAM18, but may degrade channel-to-channel crosstalk (XTALK).
VQPS	N9 P9	I	TI use only. Can be tied to DGND during normal operation.
Grounds			
AGND	A10 B10 C10 D10 N10 P10 R10 T10 A11 B11 R11 T11 B12 R12 B13 G13 K13 R13 A14 B14 C14 D14 N14 P14 R14 T14 G15 H15 K15 G16 K16	-	Analog ground.
DGND	A1 B1 E1 H1 J1 M1 R1 T1 A2 B2 E2 H2 J2 M2 R2 T2 A3 B3 E3 H3 J3 M3 R3 T3 K5 L5 N5 A6 B6 C6 F6 H6 J6 L6 P6 R6 T6 G7 K7 M7 H8 J8 N8 A9 B9 C9 G9 H9 J9 K9 M9 R9 T9	-	Digital ground.
VSSCLK	E10 G10 K10 M10 E11 G11 K11 M11 F12 G12 K12 L12 E13 F13 L13 M13 E14 F14 L14 M14 A15 B15 C15 D15 E15 F15 L15 M15 N15 P15 R15 T15 A16 B16 C16 F16 L16 P16 R16 T16	-	Clock ground.

Copyright © 2024 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
Supply voltage range	Supply voltage range, VDDA18A, VDDA18B(2)	-0.3	2.45	V
	Supply voltage range, VEEAM18, VEEBM18(2)	-2.0	0.3	V
	Supply voltage range, VDDCLK18, VDDSYS18(3)	-0.3	2.45	V
	Supply voltage range, VDDLB, VDDLA, VDDCLK10(3)	-0.3	1.3	V
	Supply voltage range, VDDIO, VQPS, VDDR18(4)	-0.3	2.45	V
	Supply voltage range, VDDDIG, VDDEB, VDDEA, VDDT(4)	-0.3	1.3	V
Voltage between any combination of AGND, DGND and VSSCLK	Voltage between any combination of AGND, DGND and VSSCLK	-0.1	0.1	V
Voltage applied to input pins	CLK+, CLK–, SYSREF+, SYSREF-(3)	-0.3	VDDCLK18+0.3	V
	[0:15]SRX-/+ AC Voltage		1.6	
	[0:15]SRX-/+ DC Voltage to GND	-5	5	
	SCLK, $\overline{SCS}$, SDI, $\overline{RESET}$, SYNC, SCANEN, TXEN[0:1], FRDI[0:3], FRCLK, $\overline{FRCS}$, $\overline{SYNC}$ (4)	-0.3	VDDIO+0.3	
	EXTREF(2)	-0.3	VDDA18A + 0.3	
Voltage at output pins	DACOUTA+, DACOUTA-(2)	-0.3	VDDA18A + 0.5	V
	DACOUTB+, DACOUTB-(2)	-0.3	VDDA18B + 0.5	
	ATEST, RBIAS-/+(2)	-0.5	VDDA18B + 0.3	
	SDI, SDO, ALARM(4)	-0.5	VDDIO + 0.3	
Peak input current (any input)		-20	20	mA
Peak total input current (sum of absolute value of all currents forced in or out, not including power supply current and DACOUTA+, DACOUTA–, DACOUTB+ and DACOUTB–)			30	mA
Junction temperature, T_J			150	°C
Storage temperature, T_{stg}		-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) Measured to AGND.
(3) Measured to VSSCLK.
(4) Measured to DGND.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1)	1000	V
		Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002, all pins(2)	250	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Copyright © 2024 Texas Instruments Incorporated

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
Supply voltage range		VDDA18A, VDDA18B(1)	1.71	1.8	1.89	V
		VEEAM18, VEEBM18(1)	-1.89	-1.8	-1.71	V
		VDDCLK18, VDDSYS18, VDDR18(2)	1.71	1.8	1.89	V
		VDDLB, VDDLA, VDDCLK10(2)	0.95	1	1.05	V
		VDDIO(3)	1.71	1.8	1.89	V
		VQPS(3)	0	0	1.89	V
		VDDDIG, VDDEB, VDDEA, VDDT(3)	0.95	1	1.05	V
V_{CMI}	Input common mode voltage	CLK+, CLK–(2) (4)		0.4		V
V_{CMI}	Input common mode voltage	SYSREF+, SYSREF–(2) (4)	0	0.4	1.0	V
V_{ID}	Input differential peak-to-peak voltage	SYSREF+ to SYSREF–	800	1000	2000	$mV_{PP-DIFF}$
		CLK+ to CLK–, f_{CLK} < 5GHz	800	1000	1400	$mV_{PP-DIFF}$
		CLK+ to CLK–, 5GHz < f_{CLK} < 7.5GHz	800	1000	1800	$mV_{PP-DIFF}$
		CLK+ to CLK–, f_{CLK} > 7.5GHz	800	1000	2000	$mV_{PP-DIFF}$
DC_{MIN}	CLK+/– duty cycle minimum			45		%
DC_{MAX}	CLK+/– duty cycle maximum			55		%
T_A	Operating free-air temperature		-40		85	°C
T_J	Recommended operating junction temperature				105	°C

(1) Measured to AGND.
(2) Measured to VSSCLK.
(3) Measured to DGND.
(4) SYSREF+/- termination has two options. In option 1 the inputs are weakly self-biased to the optimal common mode voltage, which is appropriate for AC coupling. In option 2, each input terminal is connected through 50Ohms to ground, which is appropriate to level shift from a higher common mode voltage.

6.4 Thermal Information

THERMAL METRIC(1)		17mmx17mm FC-BGA 256 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	15.8	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	0.9	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	4.2	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.4	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	4.2	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

Copyright © 2024 Texas Instruments Incorporated

6.5 Electrical Characteristics - DC Specifications

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, 2 channels, F_{INPUT} = 3 GSPS, JMODE 1, 8b/10b encoding, 4x Interpolation, F_{CLK} = 12 GHz, F_{OUT} = 2997 MHz, NRZ mode, $I_{FSSWITCH}$ = 20.5 mA, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DC ACCURACY						
BITS	DAC core resolution		16			bits
DNL	Differential nonlinearity			±2.2		LSB
INL	Integral nonlinearity			±9		LSB
DAC ANALOG OUTPUT (DACOUTA+, DACOUTA–, DACOUTB+, DACOUTB–)						
I_{FS_SWITCH}	Switched full scale output current	3.6-kΩ resistor from RBIAS+ to RBIAS-, COARSE_CUR_A / COARSE_CUR_B= 0xF and FINE_CUR_A / FINE_CUR_B = default, CUR_2X_EN = 1		41		mA
		3.6-kΩ resistor from RBIAS+ to RBIAS-, COARSE_CUR_A / COARSE_CUR_B= 0xF and FINE_CUR_A / FINE_CUR_B = default		20.5		
		3.6-kΩ resistor from RBIAS+ to RBIAS-, COARSE_CUR_A / COARSE_CUR_B = 0x0 and FINE_CUR_A / FINE_CUR_B = default, CUR_2X_EN = 1		11		
		3.6-kΩ resistor from RBIAS+ to RBIAS-, COARSE_CUR_A / COARSE_CUR_B = 0x0 and FINE_CUR_A / FINE_CUR_B = default		5.5		
I_{STATIC}	Static output current per pin	3.6-kΩ resistor from RBIAS+ to RBIAS-, COARSE_CUR_A / COARSE_CUR_B = 0xF and FINE_CUR_A / FINE_CUR_B = default		4.8		mA
$I_{FSDRIFT}$	Full scale output current temperature drift	3.6-kΩ resistor from RBIAS+ to RBIAS-, COARSE_CUR_A / COARSE_CUR_B = 0xF and FINE_CUR_A / FINE_CUR_B = default		-8.6		uA/°C
				-0.3		PPM/°C
$I_{FSERROR}$	Full scale current error	3.6-kΩ resistor from RBIAS+ to RBIAS-, COARSE_CUR_A / COARSE_CUR_B = 0xF and FINE_CUR_A / FINE_CUR_B = default		±0.1		%
$I_{MIDOFFERR}$	Mid Code Offset Error	Mid Code offset		±0.02		%FSR
V_{COMP}	Output compliance voltage range	Measured from DACOUTA+, DACOUTA–, DACOUTB+ or DACOUTB– to AGND	VDDA18 A/B - 0.5		VDDA18 A/B + 0.5	V
C_{OUT}	Output capacitance	Single-ended capacitance to ground		0.25		pF
R_{TERM}	Output differential termination resistance			102		Ω
$R_{TERMDRIFT}$	Output differential termination resistance temperature coeff			–9.6		mΩ/°C
				–42		PPM/°C
CLOCK AND SYSREF INPUTS (CLK+, CLK-, SYSREF+, SYSREF-)						
R_T	Internal differential termination resistance			100		Ω

Copyright © 2024 Texas Instruments Incorporated

6.5 Electrical Characteristics - DC Specifications (続き)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, 2 channels, F_{INPUT} = 3 GSPS, JMODE 1, 8b/10b encoding, 4x Interpolation, F_{CLK} = 12 GHz, F_{OUT} = 2997 MHz, NRZ mode, $I_{FSSWITCH}$ = 20.5 mA, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C_{IN}	Internal differential input capacitance			0.5		pF
REFERENCE VOLTAGE						
V_{REF}	Reference output voltage			0.9		V
$V_{REF-DRIFT}$	Absolute Value of Reference output voltage drift over temperature			45		ppm/°C
I_{REF}	Maximum reference output current sourcing capability for EXTREF ball with internal reference			100		nA
JESD204C SERDES INTERFACE ([15:0]SRX+/-)						
V_{SRDIFF}	SerDes Receiver Input Amplitude		50		1200	mVppdiff
V_{SRCOM}	SerDes Input Common Mode		Internal AC coupled			
Z_{SRdiff}	SerDes Internal Differential Termination			100		Ω
CMOS INTERFACE (ALARM, SCLK, $\overline{SCS}$, SDI, SDO, $\overline{RESET}$, FRDI[0:3], FRCLK, $\overline{FRCS}$, $\overline{SYNC}$, TXENABLE[0:1])						
I_{IH}	High level input current (with pulldowns)	SCANEN(1)			200	uA
I_{IH}	High level input current (without pulldowns)	$\overline{SCS}$, $\overline{RESET}$, $\overline{FRCS}$, TXEN[0:1], FRDI[0:3], FRCLK, SDI, SCLK(1)			2	uA
I_{IL}	Low level input current (with pullups)	$\overline{SCS}$, $\overline{RESET}$, $\overline{FRCS}$, TXEN[0:1](1)	–200			uA
I_{IL}	Low level input current (without pullups)	SCANEN, FRDI[0:3], FRCLK, SDI, SCLK(1)	–3			uA
C_I	Input capacitance	Input capacitance		3		pF
V_{IH}	High level input voltage	SCLK, $\overline{SCS}$, SDI, $\overline{RESET}$, FRDI[0:3], FRCLK, $\overline{FRCS}$, SCANEN, TXEN[0:1]	0.7 x VDDIO18			V
V_{IL}	Low level input voltage				0.3 x VDDIO18	V
V_{OH}	High level output voltage	ALARM, SDO, $\overline{SYNC}$, I_{LOAD} = –400 uA	1.55			V
V_{OL}	Low level output voltage	ALARM, SDO, $\overline{SYNC}$, I_{LOAD} = 400 uA			0.2	V
TEMPERATURE SENSOR						
Res	Resolution			1		℃/LSB
Range	Digital Range		-50		150	℃
T_{ERROR}	Temperature Error	TA = 25℃, device powered down except for temperature sensor and SPI interface		±5		℃

(1) With no IO supply voltage offset in connecting device.

Copyright © 2024 Texas Instruments Incorporated

6.6 Electrical Characteristics - AC Specifications

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
MODE INDEPENDENT PARAMETERS						
F_{CLK}	DAC clock rate		0.8		12	GHz
BW	Analog output bandwidth (–3 dB)	Excluding sinx/x response. Useable bandwidth may exceed the –3 dB point. I_{FS_SWITCH} = 20.5 mA		12.15		GHz
		Excluding sinx/x response. Useable bandwidth may exceed the –3 dB point. I_{FS_SWITCH} = 41 mA		11.95		
Crosstalk	Isolation between channel A (DACOUTA+/–) and channel B (DACOUTB+/-), f_{OUT} = -25 MHz offset on victim channel	f_{OUT} = 97 MHz, NRZ mode		105		dBc
		f_{OUT} = 1897 MHz, NRZ mode		100		dBc
		f_{OUT} = 3897 MHz, NRZ mode		84		dBc
		f_{OUT} = 5897 MHz, RF mode		74		dBc
		f_{OUT} = 7897 MHz, RF mode		72		dBc
DAC OUTPUT TIME DOMAIN CHARACTERISTICS						
t_{RISE}	10% to 90%(1)	JMODE 0, 1x Interpolation		41		ps
t_{FALL}	90% to 10%(1)	JMODE 0, 1x Interpolation		41		ps
f_{CLK} DC Feedthrough	Relative to fullscale sinewave at 1 GHz	NRZ Mode, f_{OUT} = DC (mid-code), DEM/Dither off		62		dBc
		NRZ Mode, f_{OUT} = DC (mid-code), DEM/Dither on		66		dBc
		DES2XL Mode, f_{OUT} = DC (mid-code), DEM/Dither off		62		dBc
		DES2XL Mode, f_{OUT} = DC (mid-code), DEM/Dither on		66		dBc
2*f_{CLK} DC Feedthrough	Relative to fullscale sinewave at 1 GHz	DES2XL Mode, f_{OUT} = DC (mid-code), DEM/Dither off		70		dBc
		DES2XL Mode, f_{OUT} = DC (mid-code), DEM/Dither on		71		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
12 GSPS, DUAL or SINGLE CHANNEL MODE, JMODE 1, 2x Int, NRZ MODE						
P_{OUT}	Output power into 100Ω load, I_{FS_SWITCH} = 20.5 mA(3)	f_{OUT} = 97 MHz		1.0		dBm
		f_{OUT} = 997 MHz		0.5		dBm
		f_{OUT} = 1997 MHz		–0.4		dBm
		f_{OUT} = 2997 MHz		–0.7		dBm
		f_{OUT} = 3997 MHz		–2.4		dBm
		f_{OUT} = 4997 MHz		–4.2		dBm
	Output power into 100Ω load, I_{FS_SWITCH} = 41 mA(3)	f_{OUT} = 97 MHz		7.0		dBm
		f_{OUT} = 997 MHz		6.4		dBm
		f_{OUT} = 1997 MHz		6		dBm
		f_{OUT} = 2997 MHz		5.5		dBm
		f_{OUT} = 3997 MHz		3.4		dBm
		f_{OUT} = 4997 MHz		1.6		dBm
SFDR	Spurious free dynamic range (SFDR) across 0 - F_{DAC}/2, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		80		dBc
		f_{OUT} = 997 MHz		67		dBc
		f_{OUT} = 1997 MHz		66		dBc
		f_{OUT} = 2997 MHz		62		dBc
		f_{OUT} = 3997 MHz		63		dBc
		f_{OUT} = 4997 MHz		53		dBc
	Spurious free dynamic range (SFDR) across 0 - F_{DAC}/2, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		76		dBc
		f_{OUT} = 997 MHz		54		dBc
		f_{OUT} = 1997 MHz		50		dBc
		f_{OUT} = 2997 MHz		50		dBc
		f_{OUT} = 3997 MHz		53		dBc
		f_{OUT} = 4997 MHz		50		dBc
HD2	Second harmonic (HD2), 0 - F_{DAC}/2, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		–83		dBc
		f_{OUT} = 997 MHz		–75		dBc
		f_{OUT} = 1997 MHz		–70		dBc
		f_{OUT} = 2997 MHz		–67		dBc
		f_{OUT} = 3997 MHz		–60		dBc
		f_{OUT} = 4997 MHz		–54		dBc
	Second harmonic (HD2), 0 - F_{DAC}/2, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		–75		dBc
		f_{OUT} = 997 MHz		–66		dBc
		f_{OUT} = 1997 MHz		–62		dBc
		f_{OUT} = 2997 MHz		–61		dBc
		f_{OUT} = 3997 MHz		–57		dBc
		f_{OUT} = 4997 MHz		–51		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
HD3	Third harmonic (HD3), 0 - F_{DAC}/2, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		–92		dBc
		f_{OUT} = 997 MHz		–68		dBc
		f_{OUT} = 1997 MHz		–68		dBc
		f_{OUT} = 2997 MHz		–63		dBc
		f_{OUT} = 3997 MHz		–65		dBc
		f_{OUT} = 4997 MHz		–73		dBc
	Third harmonic (HD3), 0 - F_{DAC}/2, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		–78		dBc
		f_{OUT} = 997 MHz		–55		dBc
		f_{OUT} = 1997 MHz		–49		dBc
		f_{OUT} = 2997 MHz		–50		dBc
		f_{OUT} = 3997 MHz		–52		dBc
		f_{OUT} = 4997 MHz		–51		dBc
$SFDR_{NONHD23}$	non-HD2/3 SFDR, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		88		dBc
		f_{OUT} = 997 MHz		86		dBc
		f_{OUT} = 1997 MHz		85		dBc
		f_{OUT} = 2997 MHz		85		dBc
		f_{OUT} = 3997 MHz		63		dBc
		f_{OUT} = 4997 MHz		80		dBc
	non-HD2/3 SFDR, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		90		dBc
		f_{OUT} = 997 MHz		72		dBc
		f_{OUT} = 1997 MHz		74		dBc
		f_{OUT} = 2997 MHz		76		dBc
		f_{OUT} = 3997 MHz		52		dBc
		f_{OUT} = 4997 MHz		69		dBc
IMD3	Third-order two tone intermodulation distortion, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 +/- 10 MHz, -7dBFS/tone		–94		dBc
		f_{OUT} = 997 +/- 10 MHz, -7dBFS/tone		–72		dBc
		f_{OUT} = 1997 +/- 10 MHz, -7dBFS/tone		–76		dBc
		f_{OUT} = 2997 +/- 10 MHz, -7dBFS/tone		–74		dBc
		f_{OUT} = 3997 +/- 10 MHz, -7dBFS/tone		–67		dBc
		f_{OUT} = 4997 +/- 10 MHz, -7dBFS/tone		–61		dBc
	Third-order two tone intermodulation distortion, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 +/- 10 MHz, -7dBFS/tone		–85		dBc
		f_{OUT} = 997 +/- 10 MHz, -7dBFS/tone		–64		dBc
		f_{OUT} = 1997 +/- 10 MHz, -7dBFS/tone		–59		dBc
		f_{OUT} = 1997 +/- 10 MHz, -6dBFS/tone, JMODE 3, 8x Int			–55	dBc
		f_{OUT} = 2997 +/- 10 MHz, -7dBFS/tone		–55		dBc
		f_{OUT} = 3997 +/- 10 MHz, -7dBFS/tone		–54		dBc
		f_{OUT} = 4997 +/- 10 MHz, -7dBFS/tone		–46		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
NSD	Noise spectral density, large signal, sinusoidal output, I_{FS_SWITCH} = 20.5 mA, DEM and Dither off	f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–158		dBc/Hz
		f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–158		dBc/Hz
		f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–154		dBc/Hz
		f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–151		dBc/Hz
		f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–150		dBc/Hz
		f_{OUT} = 4997 MHz, 70-MHz offset from f_{OUT}		–147		dBc/Hz
	Noise spectral density, large signal, sinusoidal output, I_{FS_SWITCH} = 41 mA, DEM and Dither off	f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–159		dBc/Hz
		f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–158		dBc/Hz
		f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–154		dBc/Hz
		f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–152		dBc/Hz
		f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–150		dBc/Hz
		f_{OUT} = 4997 MHz, 70-MHz offset from f_{OUT}		–147		dBc/Hz
NSD	Noise spectral density, small signal, sinusoidal output, I_{FS_SWITCH} = 20.5 mA, DEM and Dither off	A_{OUT} = -20 dBFS, f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–159		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–158		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–156		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–154		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–152		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 4997 MHz, 70-MHz offset from f_{OUT}		–150		dBFS/Hz
	Noise spectral density, small signal, sinusoidal output, I_{FS_SWITCH} = 41 mA, DEM and Dither off	A_{OUT} = -20 dBFS, f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–160		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–159		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–157		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–155		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–153		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 4997 MHz, 70-MHz offset from f_{OUT}		–151		dBFS/Hz

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
NPR	Noise Power Ratio, I_{FS_SWITCH} = 20.5 mA	Signal spanning 80% of Nyquist zone, notch at center of Nyquist zone of 5% of Nyquist zone, 12 dB PAR		47		dBc
	Noise Power Ratio, I_{FS_SWITCH} = 41 mA	Signal spanning 80% of Nyquist zone, notch at center of Nyquist zone of 5% of Nyquist zone, 12 dB PAR		47		dBc
ENOB	Effective number of bits, I_{FS_SWITCH} = 20.5 mA	Calculated from peak NPR		9.5		bits
	Effective number of bits, I_{FS_SWITCH} = 41 mA	Calculated from peak NPR		9.6		bits
PN	Additive DAC phase noise, external clock contribution subtracted out, NRZ mode, DEM and Dither off	f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 100 Hz offset		–121		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 1 KHz offset		–132		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 10 kHz offset		–143		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 100 kHz offset		–153		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 1 MHz offset		–159		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 10 MHz offset		–165		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 100 MHz offset		–167		dBc/Hz

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
12 GSPS, DUAL or SINGLE CHANNEL MODE, JMODE 1, 2x Int, RF MODE						
P_{OUT}	Output power with 2:1 balun and 50Ω load	f_{OUT} = 6997 MHz		–1.5		dBm
		f_{OUT} = 7997 MHz, I_{FS_SWITCH} = 41 mA		1.1		dBm
		f_{OUT} = 7997 MHz		–4.3		dBm
		f_{OUT} = 8997 MHz		–5.4		dBm
		f_{OUT} = 10997 MHz		–9.5		dBm
SFDR	Spurious free dynamic range (SFDR) across F_{DAC}/2 - F_{DAC}	f_{OUT} = 6997 MHz		56		dBc
		f_{OUT} = 7997 MHz, I_{FS_SWITCH} = 41 mA		41		dBc
		f_{OUT} = 7997 MHz		55		dBc
		f_{OUT} = 8997 MHz		55		dBc
		f_{OUT} = 10997 MHz		56		dBc
HD2	2nd Harmonic Distortion in F_{DAC}/2 - F_{DAC}	f_{OUT} = 6997 MHz		–65		dBc
		f_{OUT} = 7997 MHz, I_{FS_SWITCH} = 41 mA		–56		dBc
		f_{OUT} = 7997 MHz		–56		dBc
		f_{OUT} = 8997 MHz		–56		dBc
		f_{OUT} = 10997 MHz		–66		dBc
HD3	3rd Harmonic Distortion in F_{DAC}/2 - F_{DAC}	f_{OUT} = 6997 MHz		–56		dBc
		f_{OUT} = 7997 MHz, I_{FS_SWITCH} = 41 mA		–41		dBc
		f_{OUT} = 7997 MHz		–65		dBc
		f_{OUT} = 8997 MHz		–61		dBc
		f_{OUT} = 10997 MHz		–55		dBc
$SFDR_{NONHD23}$	non-HD2/3 SFDR across F_{DAC}/2 - F_{DAC}	f_{OUT} = 6997 MHz		80		dBc
		f_{OUT} = 7997 MHz, I_{FS_SWITCH} = 41 mA		75		dBc
		f_{OUT} = 7997 MHz		80		dBc
		f_{OUT} = 8997 MHz		54		dBc
		f_{OUT} = 10997 MHz		72		dBc
IMD3	Third-order two tone intermodulation distortion	f_{OUT} = 6997 +/- 10 MHz, -7dBFS/tone		–57		dBc
		f_{OUT} = 7997 +/- 10 MHz, -7dBFS/tone, I_{FS_SWITCH} = 41 mA		–46		dBc
		f_{OUT} = 7997 +/- 10 MHz, -7dBFS/tone		–64		dBc
		f_{OUT} = 8997 +/- 10 MHz, -7dBFS/tone		–71		dBc
		f_{OUT} = 10997 MHz		–56		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
NSD	Noise spectral density, large signal, sinusoidal output	f_{OUT} = 6997 MHz, 70-MHz offset from f_{OUT}		–146		dBc/Hz
		f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}, I_{FS_SWITCH} = 41 mA		–146		dBc/Hz
		f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}		–146		dBc/Hz
		f_{OUT} = 8997 MHz, 70-MHz offset from f_{OUT}		–146		dBc/Hz
		f_{OUT} = 10997 MHz, 70-MHz offset from f_{OUT}		–142		dBFS/Hz
	Noise spectral density, small signal, sinusoidal output	A_{OUT} = -20 dBFS, f_{OUT} = 6997 MHz, 70-MHz offset from f_{OUT}		–149		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}, I_{FS_SWITCH} = 41 mA		–152		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}		–149		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 8997 MHz, 70-MHz offset from f_{OUT}		–148		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 10997 MHz, 70-MHz offset from f_{OUT}		–147		dBFS/Hz
NPR	Noise power ratio, peak	Signal spanning 80% of 2nd Nyquist zone, notch at center of Nyquist zone of 5% of Nyquist zone, 12 dB PAR		42		dBc
ENOB	Effective number of bits	Calculated from peak NPR		8.8		bits

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
24 GSPS, SINGLE CHANNEL MODE, 12GSPS INPUT, JMODE 0, 2x DES INTERPOLATION MODE						
P_{OUT}	Output power with 2:1 balun and 50Ω load, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		0.9		dBm
		f_{OUT} = 997 MHz		0.7		dBm
		f_{OUT} = 1997 MHz		0.5		dBm
		f_{OUT} = 2997 MHz		0.1		dBm
		f_{OUT} = 3997 MHz		–2.0		dBm
		f_{OUT} = 5997 MHz		–2.1		dBm
		f_{OUT} = 6997 MHz		0.3		dBm
		f_{OUT} = 7997 MHz		–2.6		dBm
		f_{OUT} = 8997 MHz		–5.0		dBm
		f_{OUT} = 10997 MHz		–8.7		dBm
	Output power with 2:1 balun and 50Ω load, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		6.9		dBm
		f_{OUT} = 997 MHz		6.6		dBm
		f_{OUT} = 1997 MHz		6.4		dBm
		f_{OUT} = 2997 MHz		5.9		dBm
		f_{OUT} = 3997 MHz		3.8		dBm
		f_{OUT} = 5997 MHz		3.7		dBm
		f_{OUT} = 6997 MHz		5.8		dBm
		f_{OUT} = 7997 MHz		2.8		dBm
		f_{OUT} = 8997 MHz		0.5		dBm
		f_{OUT} = 10997 MHz		–3.5		dBm
SFDR	Spurious free dynamic range (SFDR) across 0 - F_{DAC}/4, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		84		dBc
		f_{OUT} = 997 MHz		67		dBc
		f_{OUT} = 1997 MHz		67		dBc
		f_{OUT} = 2997 MHz		63		dBc
		f_{OUT} = 3519 MHz(3)	55			dBc
		f_{OUT} = 3997 MHz		74		dBc
	Spurious free dynamic range (SFDR) across F_{DAC}/4 - F_{DAC}/2, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 5997 MHz		72		dBc
		f_{OUT} = 6997 MHz		62		dBc
		f_{OUT} = 7997 MHz		51		dBc
		f_{OUT} = 8997 MHz		52		dBc
		f_{OUT} = 10997 MHz		56		dBc
	Spurious free dynamic range (SFDR) across 0 - F_{DAC}/4, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		63		dBc
		f_{OUT} = 997 MHz		52		dBc
		f_{OUT} = 1997 MHz		43		dBc
		f_{OUT} = 2997 MHz		60		dBc
		f_{OUT} = 3997 MHz		68		dBc
	Spurious free dynamic range (SFDR) across F_{DAC}/4 - F_{DAC}/2, I_{FS_SWITCH} = 41 mA	f_{OUT} = 5997 MHz		69		dBc
		f_{OUT} = 6997 MHz		65		dBc
		f_{OUT} = 7997 MHz		51		dBc
		f_{OUT} = 8997 MHz		53		dBc
		f_{OUT} = 10997 MHz		42		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
IMG_{DES}	$F_{DAC}/2$ - F_{OUT} DES Image, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		–72		dBc
		f_{OUT} = 997 MHz		–60		dBc
		f_{OUT} = 1997 MHz		–51		dBc
		f_{OUT} = 2997 MHz		–48		dBc
		f_{OUT} = 3997 MHz		–38		dBc
		f_{OUT} = 5997 MHz		–49		dBc
		f_{OUT} = 6997 MHz		–40		dBc
		f_{OUT} = 7997 MHz		–31		dBc
		f_{OUT} = 8997 MHz		–26		dBc
		f_{OUT} = 10997 MHz		–19		dBc
	$F_{DAC}/2$ - F_{OUT} DES Image, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		–93		dBc
		f_{OUT} = 997 MHz		–67		dBc
		f_{OUT} = 1997 MHz		–56		dBc
		f_{OUT} = 2997 MHz		–47		dBc
		f_{OUT} = 3997 MHz		–39		dBc
		f_{OUT} = 5997 MHz		–55		dBc
		f_{OUT} = 6997 MHz		–42		dBc
		f_{OUT} = 7997 MHz		–30		dBc
		f_{OUT} = 8997 MHz		–25		dBc
		f_{OUT} = 10997 MHz		–18		dBc
HD2	2^{nd} order harmonic across 0 - $F_{DAC}/4$, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		–90		dBc
		f_{OUT} = 997 MHz		–80		dBc
		f_{OUT} = 1997 MHz		–68		dBc
		f_{OUT} = 2997 MHz		–62		dBc
		f_{OUT} = 3519 MHz			–55	dBc
		f_{OUT} = 3997 MHz		–72		dBc
	2^{nd} order harmonic across $F_{DAC}/4$ - $F_{DAC}/2$, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 5997 MHz		–68		dBc
		f_{OUT} = 6997 MHz		–62		dBc
		f_{OUT} = 7997 MHz		–51		dBc
		f_{OUT} = 8997 MHz		–52		dBc
		f_{OUT} = 10997 MHz		–65		dBc
	2^{nd} order harmonic across 0 - $F_{DAC}/4$, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		–73		dBc
		f_{OUT} = 997 MHz		–71		dBc
		f_{OUT} = 1997 MHz		–67		dBc
		f_{OUT} = 2997 MHz		–65		dBc
		f_{OUT} = 3997 MHz		–72		dBc
	2^{nd} order harmonic across $F_{DAC}/4$ - $F_{DAC}/2$, I_{FS_SWITCH} = 41 mA	f_{OUT} = 5997 MHz		–69		dBc
		f_{OUT} = 6997 MHz		–66		dBc
		f_{OUT} = 7997 MHz		–51		dBc
		f_{OUT} = 8997 MHz		–53		dBc
		f_{OUT} = 10997 MHz		–62		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
HD3	3nd order harmonic across 0 - F_{DAC}/4, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		–92		dBc
		f_{OUT} = 997 MHz		–67		dBc
		f_{OUT} = 1997 MHz		–63		dBc
		f_{OUT} = 2997 MHz		–85		dBc
		f_{OUT} = 3519 MHz			–70	dBc
		f_{OUT} = 3997 MHz		–84		dBc
	3nd order harmonic across across F_{DAC}/4 - F_{DAC}/2, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 5997 MHz		–78		dBc
		f_{OUT} = 6997 MHz		–74		dBc
		f_{OUT} = 7997 MHz		–75		dBc
		f_{OUT} = 8997 MHz		–70		dBc
		f_{OUT} = 10997 MHz		–56		dBc
	3nd order harmonic across across 0 - F_{DAC}/4, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		–63		dBc
		f_{OUT} = 997 MHz		–52		dBc
		f_{OUT} = 1997 MHz		–43		dBc
		f_{OUT} = 2997 MHz		–78		dBc
		f_{OUT} = 3997 MHz		–82		dBc
	3nd order harmonic across across F_{DAC}/4 - F_{DAC}/2, I_{FS_SWITCH} = 41 mA	f_{OUT} = 5997 MHz		–78		dBc
		f_{OUT} = 6997 MHz		–69		dBc
		f_{OUT} = 7997 MHz		–67		dBc
		f_{OUT} = 8997 MHz		–73		dBc
		f_{OUT} = 10997 MHz		–43		dBc
$SFDR_{NONHD23}$	non-HD2/3 SFDR in 0 - F_{DAC}/4, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 MHz		86		dBc
		f_{OUT} = 997 MHz		83		dBc
		f_{OUT} = 1997 MHz		85		dBc
		f_{OUT} = 2997 MHz		84		dBc
		f_{OUT} = 3997 MHz		81		dBc
	non-HD2/3 SFDR in F_{DAC}/4 - F_{DAC}/2, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 5997 MHz		81		dBc
		f_{OUT} = 6997 MHz		84		dBc
		f_{OUT} = 7997 MHz		83		dBc
		f_{OUT} = 8997 MHz		52		dBc
		f_{OUT} = 10997 MHz		70		dBc
	non-HD2/3 SFDR in 0 - F_{DAC}/4, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 MHz		89		dBc
		f_{OUT} = 997 MHz		74		dBc
		f_{OUT} = 1997 MHz		83		dBc
		f_{OUT} = 2997 MHz		87		dBc
		f_{OUT} = 3997 MHz		80		dBc
	non-HD2/3 SFDR in F_{DAC}/4 - F_{DAC}/2, I_{FS_SWITCH} = 41 mA	f_{OUT} = 5997 MHz		77		dBc
		f_{OUT} = 6997 MHz		71		dBc
		f_{OUT} = 7997 MHz		70		dBc
		f_{OUT} = 8997 MHz		52		dBc
		f_{OUT} = 10997 MHz		60		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
IMD3	Third-order two tone intermodulation distortion, I_{FS_SWITCH} = 20.5 mA	f_{OUT} = 97 +/- 10 MHz, -7dBFS/tone		–92		dBc
		f_{OUT} = 997 +/- 10 MHz, -7dBFS/tone		–74		dBc
		f_{OUT} = 1997 +/- 10 MHz, -7dBFS/tone		–74		dBc
		f_{OUT} = 2997 +/- 10 MHz, -7dBFS/tone		–71		dBc
		f_{OUT} = 3997 +/- 10 MHz, -7dBFS/tone		–71		dBc
		f_{OUT} = 5997 +/- 10 MHz, -7dBFS/tone		–68		dBc
		f_{OUT} = 6997 +/- 10 MHz, -7dBFS/tone		–55		dBc
		f_{OUT} = 7997 +/- 10 MHz, -7dBFS/tone		–59		dBc
		f_{OUT} = 8997 +/- 10 MHz, -7dBFS/tone		–66		dBc
		f_{OUT} = 10997 +/- 10 MHz, -7dBFS/tone		–57		dBc
	Third-order two tone intermodulation distortion, I_{FS_SWITCH} = 41 mA	f_{OUT} = 97 +/- 10 MHz, -7dBFS/tone		–67		dBc
		f_{OUT} = 997 +/- 10 MHz, -7dBFS/tone		–63		dBc
		f_{OUT} = 1997 +/- 10 MHz, -7dBFS/tone		–53		dBc
		f_{OUT} = 2997 +/- 10 MHz, -7dBFS/tone		–52		dBc
		f_{OUT} = 3997 +/- 10 MHz, -7dBFS/tone		–57		dBc
		f_{OUT} = 5997 +/- 10 MHz, -7dBFS/tone		–60		dBc
		f_{OUT} = 6997 +/- 10 MHz, -7dBFS/tone		–38		dBc
		f_{OUT} = 7997 +/- 10 MHz, -7dBFS/tone		–41		dBc
		f_{OUT} = 8997 +/- 10 MHz, -7dBFS/tone		–45		dBc
		f_{OUT} = 10997 +/- 10 MHz, -7dBFS/tone		–46		dBc

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
NSD	Noise spectral density, large signal, sinusoidal output, I_{FS_SWITCH} = 20.5 mA, DEM and Dither off	f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–158		dBc/Hz
		f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–155		dBc/Hz
		f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–153		dBc/Hz
		f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–151		dBc/Hz
		f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–149		dBc/Hz
		f_{OUT} = 5997 MHz, 70-MHz offset from f_{OUT}		–147		dBc/Hz
		f_{OUT} = 6997 MHz, 70-MHz offset from f_{OUT}		–147		dBc/Hz
		f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}		–144		dBc/Hz
		f_{OUT} = 8997 MHz, 70-MHz offset from f_{OUT}		–144		dBc/Hz
		f_{OUT} = 10997 MHz, 70-MHz offset from f_{OUT}		–140		dBc/Hz
	Noise spectral density, large signal, sinusoidal output, I_{FS_SWITCH} = 41 mA, DEM and Dither off	f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–158		dBc/Hz
		f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–156		dBc/Hz
		f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–154		dBc/Hz
		f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–152		dBc/Hz
		f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–150		dBc/Hz
		f_{OUT} = 5997 MHz, 70-MHz offset from f_{OUT}		–148		dBc/Hz
		f_{OUT} = 6997 MHz, 70-MHz offset from f_{OUT}		–147		dBc/Hz
		f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}		–147		dBc/Hz
		f_{OUT} = 8997 MHz, 70-MHz offset from f_{OUT}		–144		dBc/Hz
		f_{OUT} = 10997 MHz, 70-MHz offset from f_{OUT}		–141		dBc/Hz

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
NSD	Noise spectral density, small signal, sinusoidal output, I_{FS_SWITCH} = 20.5 mA	A_{OUT} = -20 dBFS, f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–160		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–156		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–155		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–152		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–152		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 5997 MHz, 70-MHz offset from f_{OUT}		–150		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 6997 MHz, 70-MHz offset from f_{OUT}		–151		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}		–150		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 8997 MHz, 70-MHz offset from f_{OUT}		–149		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 10997 MHz, 70-MHz offset from f_{OUT}		–158		dBFS/Hz
	Noise spectral density, small signal, sinusoidal output, I_{FS_SWITCH} = 41 mA	A_{OUT} = -20 dBFS, f_{OUT} = 97 MHz, 70-MHz offset from f_{OUT}		–158		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 997 MHz, 70-MHz offset from f_{OUT}		–158		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 1997 MHz, 70-MHz offset from f_{OUT}		–156		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 2997 MHz, 70-MHz offset from f_{OUT}		–155		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 3997 MHz, 70-MHz offset from f_{OUT}		–153		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 5997 MHz, 70-MHz offset from f_{OUT}		–152		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 6997 MHz, 70-MHz offset from f_{OUT}		–152		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 7997 MHz, 70-MHz offset from f_{OUT}		–153		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 8997 MHz, 70-MHz offset from f_{OUT}		–152		dBFS/Hz
		A_{OUT} = -20 dBFS, f_{OUT} = 10997 MHz, 70-MHz offset from f_{OUT}		–150		dBFS/Hz
NPR	Noise power ratio, peak	Signal spanning 80% of 2nd Nyquist zone, notch at center of Nyquist zone of 5% of Nyquist zone, 12 dB PAR, I_{FS_SWITCH} = 20.5 mA		44		dBc
		Signal spanning 80% of 2nd Nyquist zone, notch at center of Nyquist zone of 5% of Nyquist zone, 12 dB PAR, I_{FS_SWITCH} = 41 mA		45		dBc
ENOB	Effective number of bits	Calculated from peak NPR, I_{FS_SWITCH} = 20.5 mA		9		bits
		Calculated from peak NPR, I_{FS_SWITCH} = 41 mA		9.3		bits

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, 8b/10b encoding, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, SE DEM and Dither (DEM_ADJ = 1 below 750 MHz and DEM_ADJ = 0 above 750 MHz), 64b/66b encoding, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
PN	Additive DAC phase noise, external clock contribution subtracted out, DES mode, DEM and Dither off	f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 100 Hz offset		–128		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 1 KHz offset		–137		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 10 kHz offset		–148		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 100 kHz offset		–158		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 1 MHz offset		–166		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 10 MHz offset		–167		dBc/Hz
		f_{CLK} = 12 GHz, f_{OUT} = 997 MHz, 100 MHz offset		–170		dBc/Hz
PN	Additive DAC phase noise, external clock contribution subtracted out, DES mode, DEM and Dither off	f_{CLK} = 8 GHz, f_{OUT} = 997 MHz, 100 Hz offset		–127		dBc/Hz
		f_{CLK} = 8 GHz, f_{OUT} = 997 MHz, 1 KHz offset		–136		dBc/Hz
		f_{CLK} = 8 GHz, f_{OUT} = 997 MHz, 10 kHz offset		–147		dBc/Hz
		f_{CLK} = 8 GHz, f_{OUT} = 997 MHz, 100 kHz offset		–157		dBc/Hz
		f_{CLK} = 8 GHz, f_{OUT} = 997 MHz, 1 MHz offset		–165		dBc/Hz
		f_{CLK} = 8 GHz, f_{OUT} = 997 MHz, 10 MHz offset		–167		dBc/Hz
		f_{CLK} = 8 GHz, f_{OUT} = 997 MHz, 100 MHz offset		–169		dBc/Hz

(1) Measured single ended into 50Ω load
(2) A 100Ω load is equivalent to a 2:1 with 50Ω single ended load
(3) MIN SFDR is the worst of HD2 - HD5

Copyright © 2024 Texas Instruments Incorporated

6.7 Electrical Characteristics - Power Consumption

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, 2 channels, F_{INPUT} = 3 GSPS, JMODE 1, 64b/66b encoding, 4x Interpolation, F_{CLK} = 12 GHz, F_{OUT} = 2997 MHz, NRZ mode, $I_{FSSWITCH}$ = 20.5 mA, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 1: 1 Stream with Dual DACs in parallel, JMODE 0, F_{DAC} = 12 GSPS, F_{OUT} = 2997 MHz, NRZ mode (dual channel device only)		75		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			171		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			366		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			573		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			2320		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			123		
P_{DIS}	Total power dissipation			3926		mW
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 2: Dual DACs, 1 IQ input stream per DAC, F_{INPUT} = 3 GSPS, JMODE 2, 4x Interpolation, F_{DAC} = 12 GSPS, F_{OUT} = 2997 MHz, NRZ mode (dual channel device only)		75		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			171		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			367		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			574		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			3544		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			123		
P_{DIS}	Total power dissipation			5152		mW
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 3: Dual DACs, 2 IQ input streams per DAC, F_{INPUT} = 750 MSPS, JMODE 3, 16x Interpolation, F_{DAC} = 12 GSPS, F_{OUT1} = 2997 MHz, F_{OUT2} = 3997 MHz, NRZ mode (dual channel device only)		75		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			171		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			370		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			575		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			3943		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			123		
P_{DIS}	Total power dissipation			5555		mW

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, 2 channels, F_{INPUT} = 3 GSPS, JMODE 1, 64b/66b encoding, 4x Interpolation, F_{CLK} = 12 GHz, F_{OUT} = 2997 MHz, NRZ mode, $I_{FSSWITCH}$ = 20.5 mA, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 4: Dual DACs, 2 IQ input streams per DAC, F_{INPUT} = 187.5 MSPS, JMODE 6, 64x Interpolation, F_{DAC} = 12 GSPS, F_{OUT1} = 2997 MHz, F_{OUT2} = 3997 MHz, NRZ mode (dual channel device only)		75		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			112		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			370		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			574		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			2720		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			123		
P_{DIS}	Total power dissipation			4224		mW
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 5: Dual DACs, 2 IQ input streams per DAC, F_{INPUT} = 187.5 MSPS, JMODE 5, 64x Interpolation, F_{DAC} =12 GSPS, F_{OUT1} = 2997 MHz, F_{OUT2} = 3997 MHz, NRZ mode (dual channel device only)		75		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			113		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			369		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			574		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			2810		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			123		
P_{DIS}	Total power dissipation			4316		mW
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 6: Dual DACs, 2 IQ input streams per DAC, F_{INPUT} = 1 GSPS, JMODE 3, 12 x Interpolation, F_{DAC} =12 GSPS, F_{OUT1} = 2997 MHz, F_{OUT2} = 3997 MHz, NRZ mode (dual channel device only)		75		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			149		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			370		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			575		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			4227		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			123		
P_{DIS}	Total power dissipation			5800		mW

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, 2 channels, F_{INPUT} = 3 GSPS, JMODE 1, 64b/66b encoding, 4x Interpolation, F_{CLK} = 12 GHz, F_{OUT} = 2997 MHz, NRZ mode, $I_{FSSWITCH}$ = 20.5 mA, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 7: Dual DACs, 1 IQ input stream sent to both DACs after the NCO, F_{INPUT} = 6 GSPS, JMODE 1, 2x Interpolation, F_{DAC} = 12 GSPS, F_{OUT} = 2997 MHz, NRZ mode (dual channel device only)		85		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			171		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			366		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			574		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			3015		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			122		
P_{DIS}	Total power dissipation			4638	6000	mW
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 8: Dual channel devices programmed as single DAC, F_{INPUT} = 12 GSPS, JMODE 0, 2x DES Interpolation, F_{DAC} = 24 GSPS, F_{OUT} = 7997 MHz, DES mode		58		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			171		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			356		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			573		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			2461		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			70		
P_{DIS}	Total power dissipation			3931		mW
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 9: Dual channel devices programmed as single DAC, F_{INPUT} = 24 GSPS, JMODE 14 (8-bit resolution), F_{DAC} = 24 GSPS, F_{OUT} = 7997 MHz, DES mode		58		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			171		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			356		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			573		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			2304		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			70		
P_{DIS}	Total power dissipation			3774		mW

Copyright © 2024 Texas Instruments Incorporated

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, 2 channels, F_{INPUT} = 3 GSPS, JMODE 1, 64b/66b encoding, 4x Interpolation, F_{CLK} = 12 GHz, F_{OUT} = 2997 MHz, NRZ mode, $I_{FSSWITCH}$ = 20.5 mA, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 10: Single channel devices (DAC39RFSxx), F_{INPUT} = 12 GSPS, JMODE 0, 2x DES Interpolation, F_{DAC} = 24 GSPS, F_{OUT} = 7997 MHz, DES mode		58		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			172		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			187		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			356		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			2086		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			70		
P_{DIS}	Total power dissipation			3170		mW
I_{VDDA18}	1.8-V combined supply current for VDDA18A and VDDA18B	Power Mode 11: Single channel devices (DAC39RFSxx), F_{INPUT} = 24 GSPS, JMODE 14 (8-bit resolution), F_{DAC} = 24 GSPS, F_{OUT} = 7997 MHz, DES mode		58		mA
I_{VDDIO}	1.8-V supply current for VDDIO			1		
I_{VDDCSR}	1.8-V combined supply current for VDDCLK18, VDDSYS18 and VDDR18			172		
I_{VDDL}	1.0-V combined supply current for VDDLB, VDDLA			187		
I_{VDDCLK}	1.0-V supply current for VDDCLK10			356		
I_{DVDD}	1.0-V supply current for VDDDIG, VDDT, VDDEB and VDDEA			1933		
I_{VEE}	–1.8-V combined supply current for VEEAM18 and VEEBM18			70		
P_{DIS}	Total power dissipation			3017		mW
P_{DIS}	Total power dissipation	Power Mode 12: Sleep, MODE[1:0] = 0b11.		180		mW

Copyright © 2024 Texas Instruments Incorporated

6.8 Timing Requirements

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

			MIN	NOM	MAX	UNIT
INPUT CLOCK (CLK+, CLK-)						
f_{CLK}	Input clock frequency		800		12000	MHz
SYSREF (SYSREF+, SYSREF-)						
t_{SYSREF_LOW}	SYSREF Low Timing		$5*t_{CLK}$ + 1 ns			
t_{SYSREF_HIGH}	SYSREF High Timing		$5*t_{CLK}$ + 1 ns			
$t_{INV(SYSREF)}$	Width of invalid SYSREF capture region of CLK± period, indicating setup or hold time violation, as measured by SYSREF_POS status register[1]			13		ps
$t_{INV(TEMP)}$	Drift of invalid SYSREF capture region over temperature, positive number indicates a shift toward MSB of SYSREF_POS register			–0.05		ps/°C
$t_{INV(VA11)}$	Drift of invalid SYSREF capture region over VDDSYS18 supply voltage, positive number indicates a shift toward MSB of SYSREF_POS register			0.19		ps/mV
$t_{STEP(SP)}$	Delay of SYSREF_POS LSB	SYSREF_ZOOM = 0		20		ps
		SYSREF_ZOOM = 1		9		
$DC_{(SYSREF)}$	SYSREF duty cycle (asserted) when using a periodic SYSREF signal	SYSREF duty cycle (asserted) when using a periodic SYSREF signal		50%	55%	
$t_{(PH_SYS)}$	Minimum SYSREF± assertion duration after SYSREF± rising edge event			8		ns
RESET						
t_{RESET}	Minimum $\overline{\text{RESET}}$ pulse width			100		ns
TXENABLE						
$t_{TXENABLE_LOW}$	TXENABLE Low Time		102			clock cycles

(1) Use SYSREF_POS to select an optimal SYSREF_SEL value for the SYSREF capture, see the SYSREF Position Detector section for more information on SYSREF windowing. The invalid region, specified by $t_{INV(SYSREF)}$, indicates the portion of the CLK± period(t_{CLK}), as measured by SYSREF_SEL, that may result in a setup and hold violation. Verify that the timing skew between SYSREF± and CLK± over system operating conditions from the nominal conditions (that used to find optimal SYSREF_SEL) does not result in the invalid region occurring at the selected SYSREF_SEL position in SYSREF_POS, otherwise a temperature dependent SYSREF_SEL selection may be needed to track the skew between CLK± and SYSREF±.

Copyright © 2024 Texas Instruments Incorporated

6.9 Switching Characteristics

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
JESD204C SERDES INTERFACE [15:0]SRX-/+						
f_{SERDES}	SERDES bit rate(4)		.78125		12.8	Gbps
UI	Unit Interval		78.125		1280	ps
LATENCY						
T_{DAC}	DAC clock period			1 / f_{CLK}		s
$t_{PD(RX)}$	Serdes RX analog propagation delay	Serdes RX analog propagation delay		215		ps
t_{PDI}	Input clock rising edge cross-over to output sample cross-over	Input clock rising edge cross-over to output sample cross-over		500		ps
t_{DACLAT}	Digital path latency from SYSREF rising edge to DAC output			See XLS Calculator		
$t_{RELEASE}$	Latency from SYSREF rising edge to elastic buffer release			See XLS Calculator		
t_{RXIN}	Latency from SERDES Input to elastic buffer release			See XLS Calculator		
t_{TXEN_OUTPUT}	TXENABLE rising edge to data output of DAC	FAST_TX_EN = 0		varies(1)		CLK Cycles
		FAST_TX_EN=1 and QUIET_TX_DISABLE=0			93	
		FAST_TX_EN=1 and QUIET_TX_DISABLE=1			133	
t_{TXEN_MUTE}	TXENABLE falling edge to DAC output muted	QUIET_TX_DISABLE=0			93	
		QUIET_TX_DISABLE=1			133	
t_{TXEN_PW}	Required TXENABLE pulse width	FAST_TX_EN = 0(2)	102			
		FAST_TX_EN = 1(3)	20			
SERIAL PROGRAMMING INTERFACE						
F_{s_c}	serial clock frequency				15.625	MHz
F_{s_cts}	serial clock frequency temp sensor	TS_TEMP register read			1	MHz
t_P	serial clock period		64			ns
t_{PH}	serial clock pulse width high		32			ns
t_{PL}	serial clock pulse width low		32			ns
t_{SU}	SDI setup time		30			ns
t_H	SDI hold time		3			ns
t_{IZ}	SDI TRI-STATE			3		ns
t_{ODZ}	SDO driven to TRI-STATE	200 fF load		5		ns
t_{OZD}	SDO TRI-STATE to driven	200 fF load		3		ns
t_{OD}	SDO output delay	200 fF load		3		ns
t_{CSS}	$\overline{SCS}$ setup		30			ns
t_{CSH}	$\overline{SCS}$ hold		3			ns
t_{RS}	$\overline{RESET}$ setup to serial clock	$\overline{RESET}$ high	30			ns
t_{RH}	$\overline{RESET}$ hold to serial clock	$\overline{RESET}$ high	30			ns
t_{IAG}	Inter-access gap		30			ns
FAST RECONFIGURATION (FR) INTERFACE						
F_{FRCLK}	FRCLK frequency				200	MHz
t_{FRCLK_P}	FRCLK period		5			ns
t_{FRCLK_PH}	FRCLK pulse width high		2			ns

Copyright © 2024 Texas Instruments Incorporated

6.9 Switching Characteristics (続き)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{FRCLK_PL}	FRCLK pulse width low		2			ns
t_{FRDI_SU}	FRDI setup time		1			ns
t_{FRDI_H}	FRDI hold time		1			ns
$t_{\overline{FRCS}_SU}$	$\overline{FRCS}$ setup time		1			ns
$t_{\overline{FRCS}_H}$	$\overline{FRCS}$ hold time		1			ns
t_{FR_IAG}	Inter-access gap		1			ns

(1) The delay depends on how long it takes the JESD link to start up and the mode dependent device latency. Add the link layer startup time and the mode depedent latency (T_{DAC_LAT}) from the latency calculator spreadsheet.
(2) Pulse durations less than this produce undefined behavior.
(3) Pulse durations less than this may have no effect on the output.
(4) 8b/10b encoding required for < 2 Gbps

Copyright © 2024 Texas Instruments Incorporated

6.10 SPI and FRI Timing Diagrams

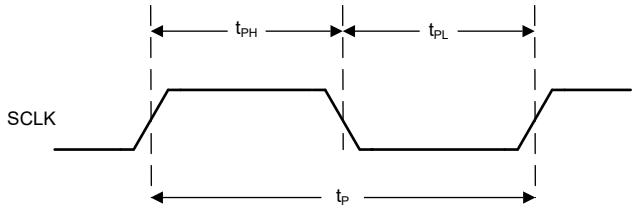


図 6-1. SPI Clock Timing Diagram

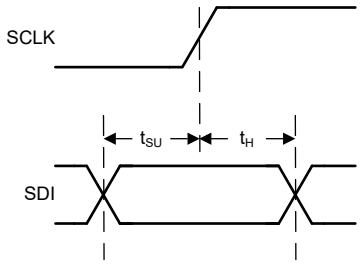


図 6-2. SPI Data Input Timing Diagram

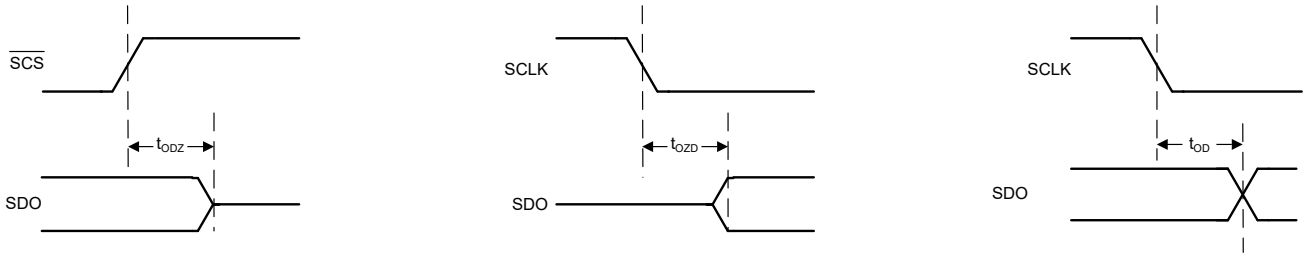


図 6-3. SPI Data Output Timing Diagram

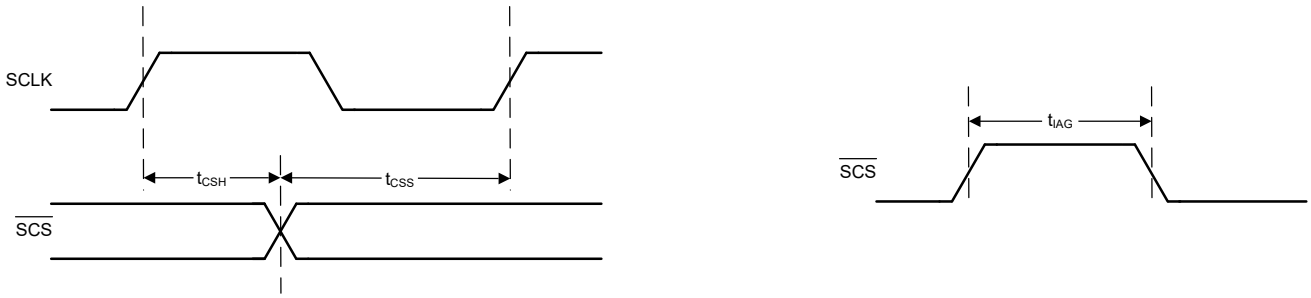


図 6-4. SPI Chip Select Timing Diagram

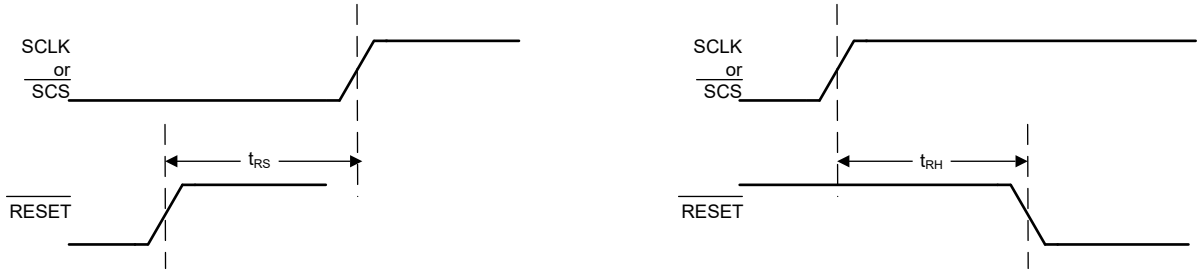


図 6-5. $\overline{\text{RESET}}$ Timing Diagram

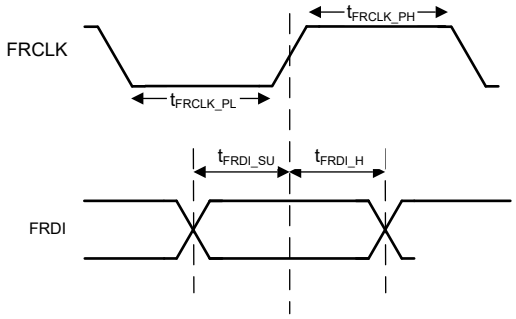


図 6-6. FRDI Timing Diagram


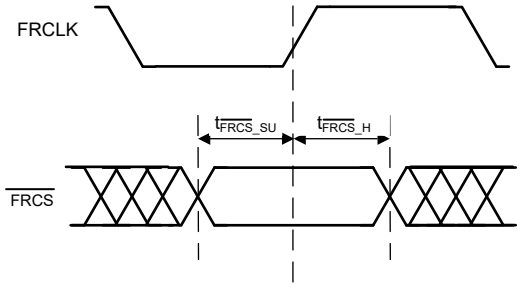


図 6-7. $\overline{\text{FRCS}}$ Timing Diagram

Copyright © 2024 Texas Instruments Incorporated


6.11 Typical Characteristics: Bandwidth and DC Linearity

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

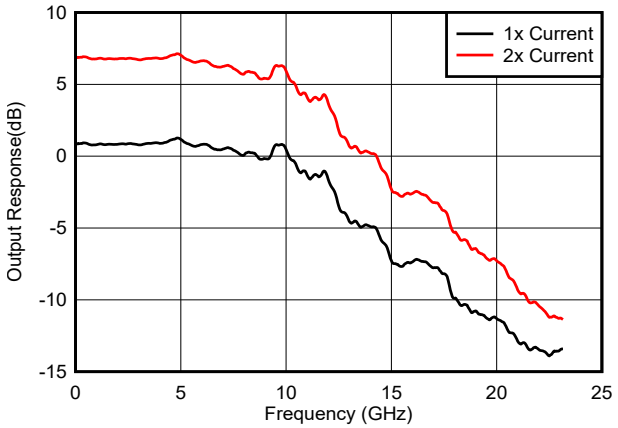


Not including Sin(x)/x response, PCB and cable loss removed.

図 6-8. Output Response vs Frequency

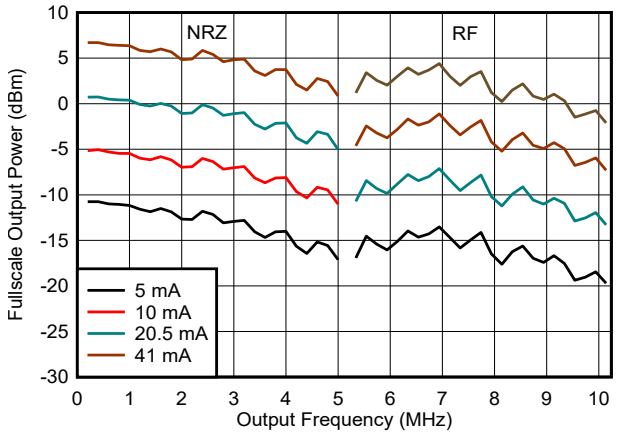


Includes PCB loss. External balun and cable loss removed.

図 6-9. Output Power vs Frequency (NRZ/RF modes)

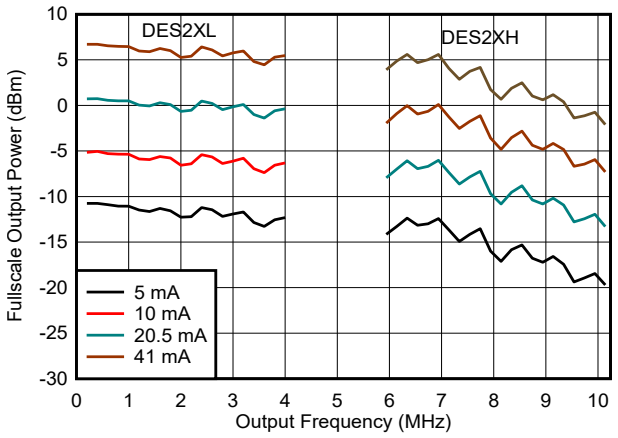

Includes PCB loss. External balun and cable loss removed.

図 6-10. Output Power vs Frequency (DES2X modes)

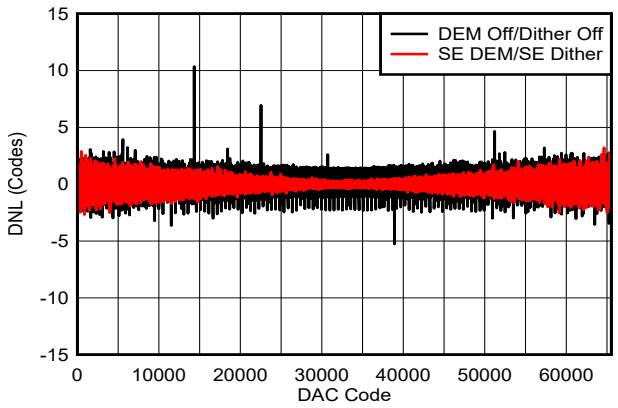


I_{FS_SWITCH} = 20.5 mA

図 6-11. DNL vs DAC Code: 20.5 mA


6.11 Typical Characteristics: Bandwidth and DC Linearity (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

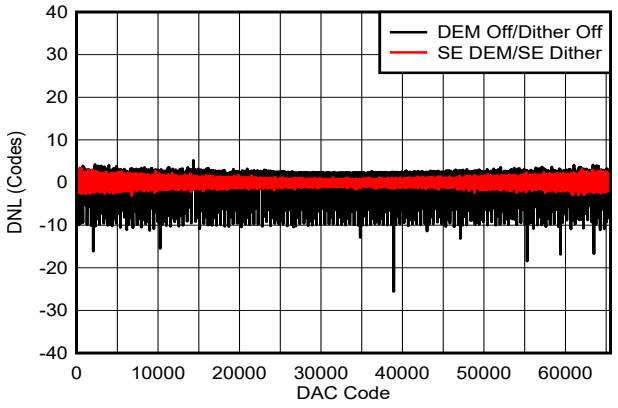


I_{FS_SWITCH} = 5 mA

図 6-12. DNL vs DAC Code: 5 mA

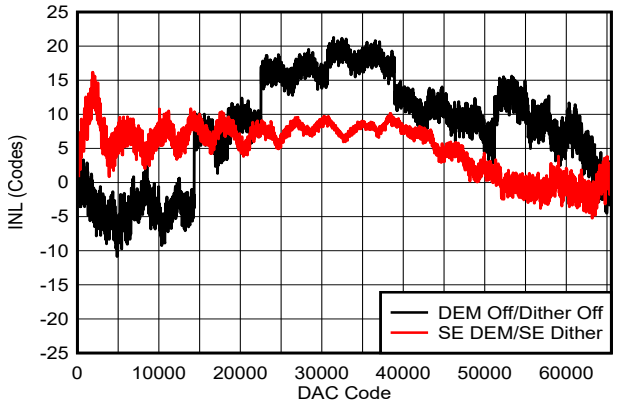


I_{FS_SWITCH} = 20.5 mA

図 6-13. INL vs DAC Code: 20.5 mA

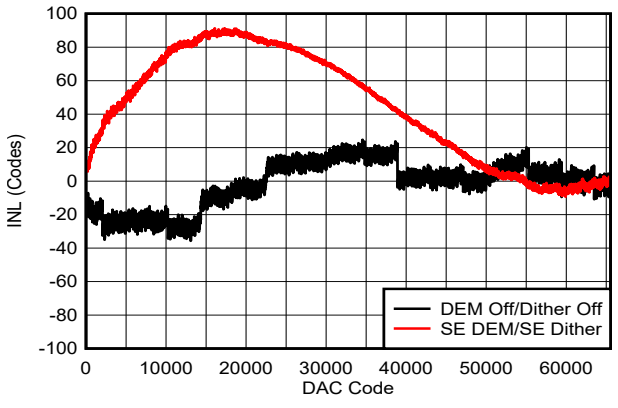


I_{FS_SWITCH} = 5 mA

図 6-14. INL vs DAC Code: 5 mA

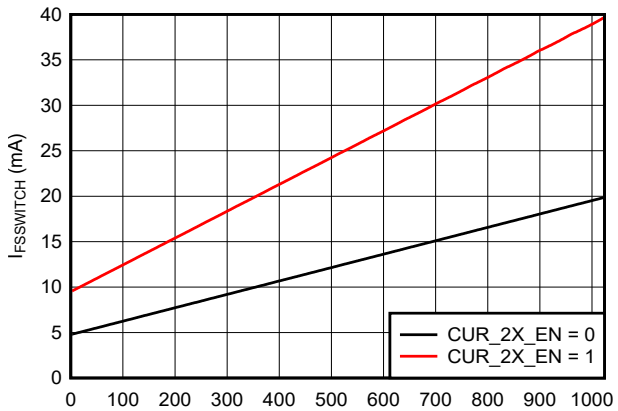


Gain Code = 64*COARSE_CUR_x + FINE_CUR_x

図 6-15. I_{FS_SWITCH} vs Gain Code

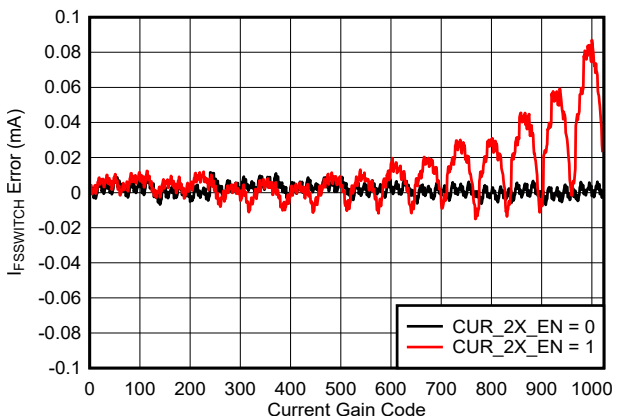

Gain Code = 64*COARSE_CUR_x + FINE_CUR_x, error relative to linear end point fit

図 6-16. I_{FS_SWITCH} Error vs Gain Code

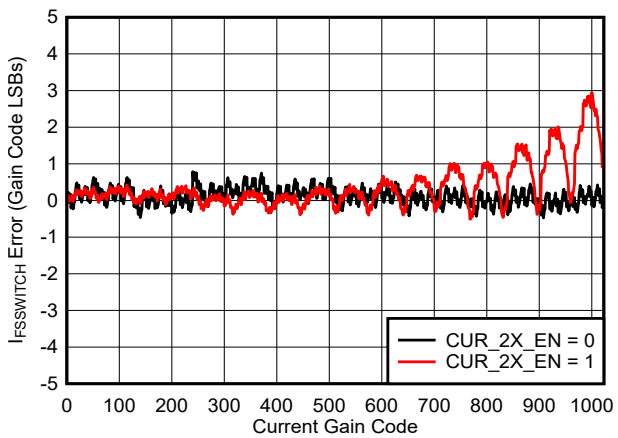


Gain Code = 64*COARSE_CUR_x + FINE_CUR_x, error relative to linear end point fit

図 6-17. I_{FS_SWITCH} Error vs Gain Code

Copyright © 2024 Texas Instruments Incorporated

6.11 Typical Characteristics: Bandwidth and DC Linearity (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

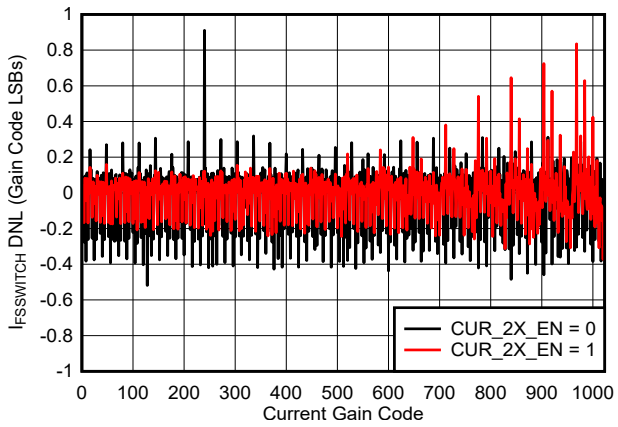


Gain Code = 64*COARSE_CUR_x + FINE_CUR_x, error relative to linear end point fit

図 6-18. I_{FS_SWITCH} Error Differential Non-Linearity vs Gain Code


6.12 Typical Characteristics: Single Tone Spectra

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

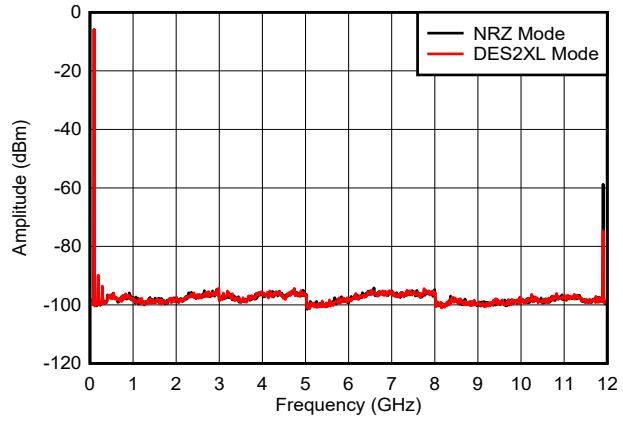


includes PCB, cable and balun loss

図 6-19. f_{OUT} = 97 MHz, 0 dBFS

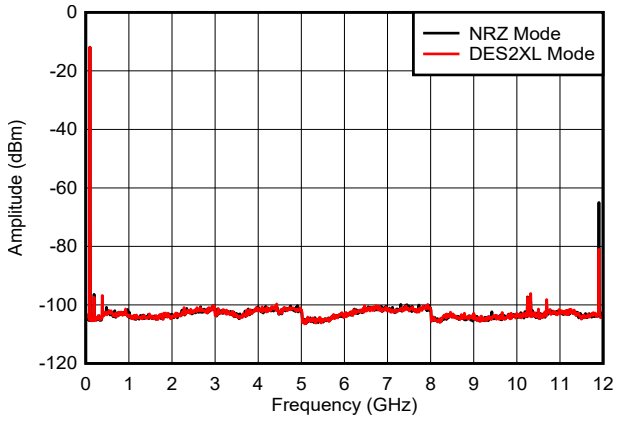


includes PCB, cable and balun loss

図 6-20. f_{OUT} = 97 MHz, -6 dBFS

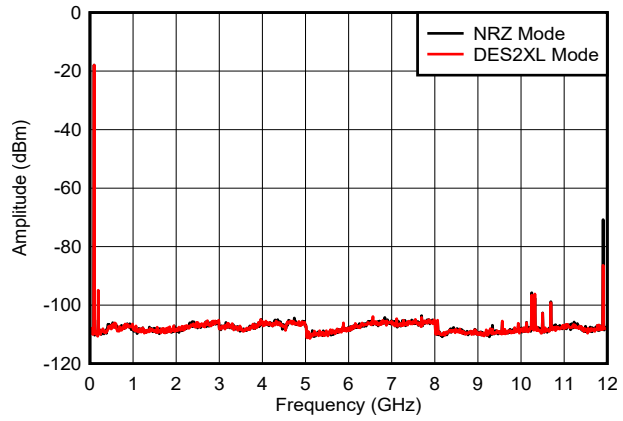


includes PCB, cable and balun loss

図 6-21. f_{OUT} = 97 MHz, -12 dBFS

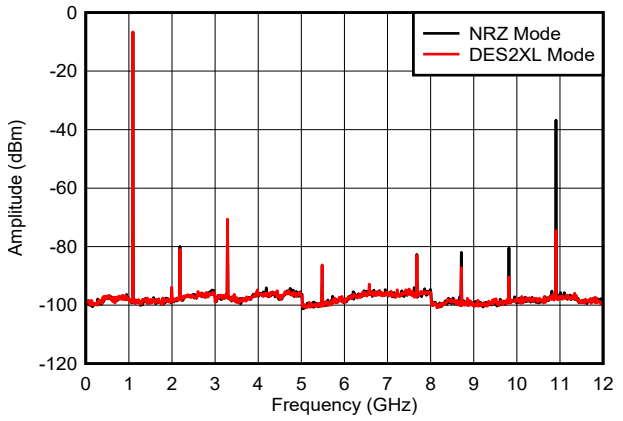


includes PCB, cable and balun loss

図 6-22. f_{OUT} = 1097 MHz, 0 dBFS

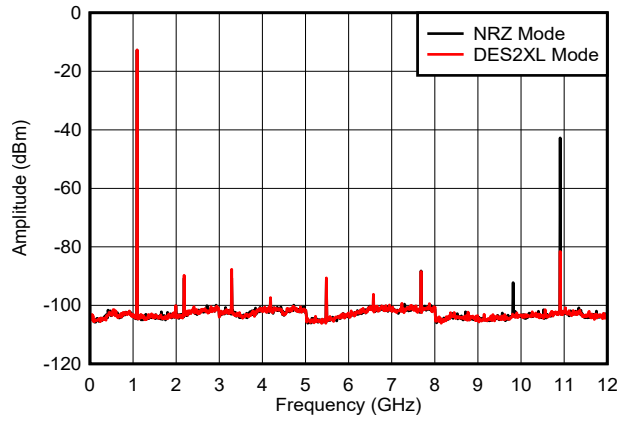

includes PCB, cable and balun loss

図 6-23. f_{OUT} = 1097 MHz, -6 dBFS

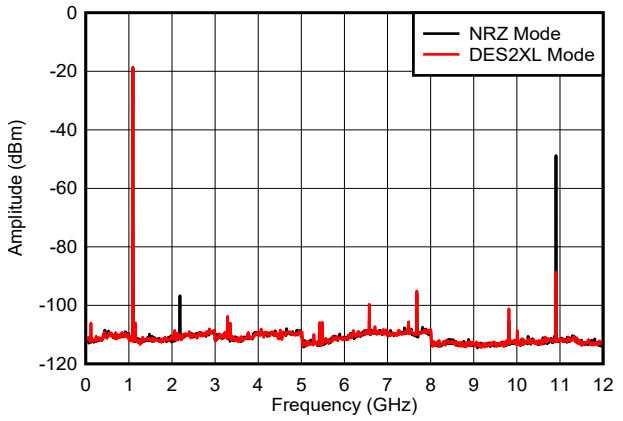


includes PCB, cable and balun loss

図 6-24. f_{OUT} = 1097 MHz, -12 dBFS

Copyright © 2024 Texas Instruments Incorporated


6.12 Typical Characteristics: Single Tone Spectra (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

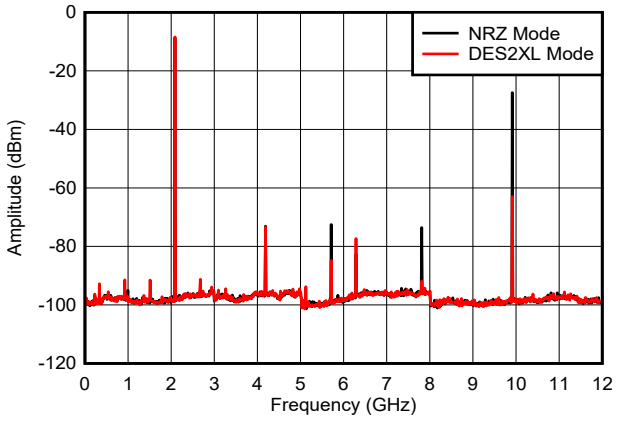


includes PCB, cable and balun loss

図 6-25. f_{OUT} = 2097 MHz, 0 dBFS

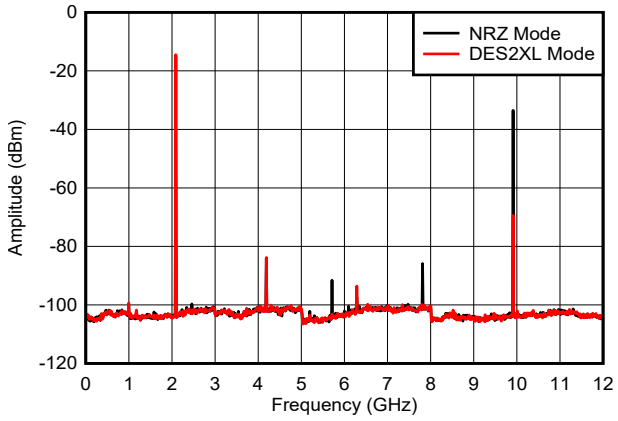


includes PCB, cable and balun loss

図 6-26. f_{OUT} = 2097 MHz, -6 dBFS

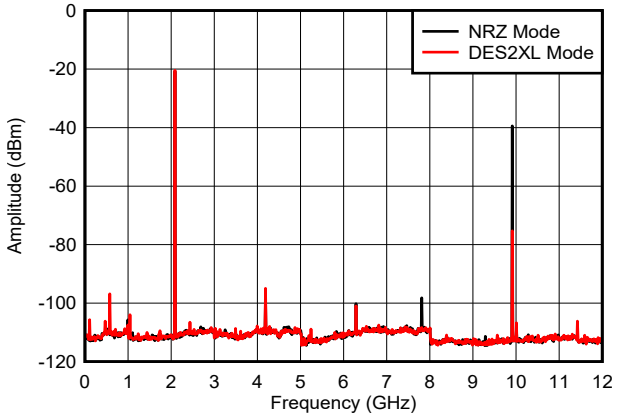


includes PCB, cable and balun loss

図 6-27. f_{OUT} = 2097 MHz, -12 dBFS

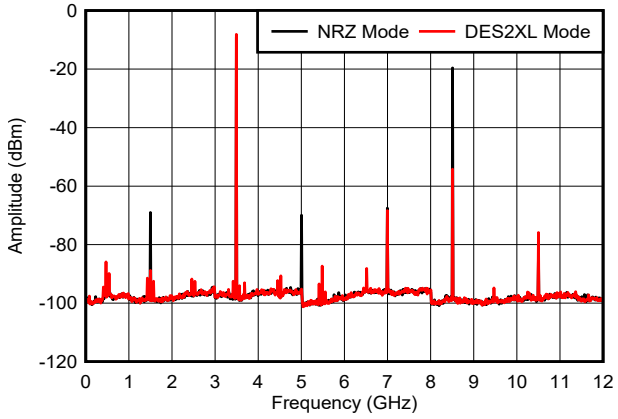


includes PCB, cable and balun loss

図 6-28. f_{OUT} = 3497 MHz, 0 dBFS

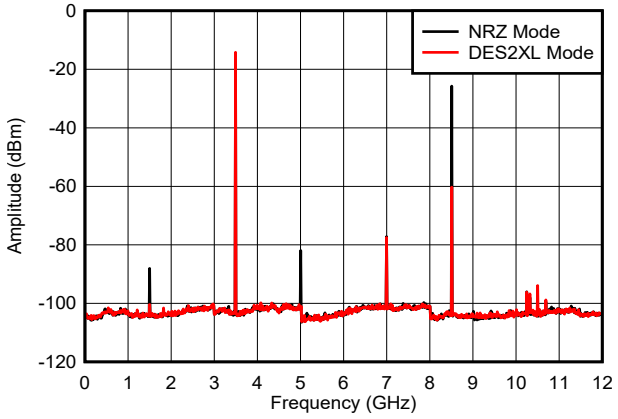

includes PCB, cable and balun loss

図 6-29. f_{OUT} = 3497 MHz, -6 dBFS

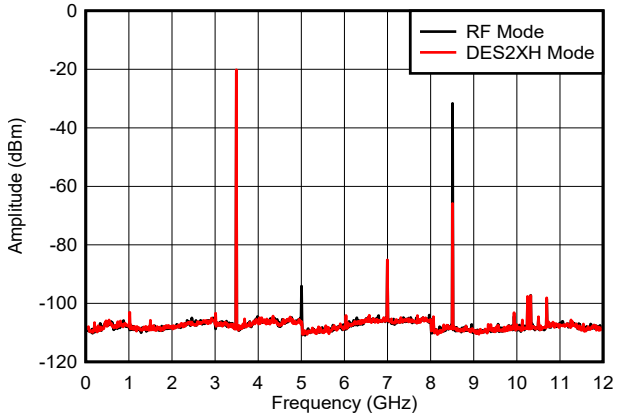


includes PCB, cable and balun loss

図 6-30. f_{OUT} = 3497 MHz, -12 dBFS

Copyright © 2024 Texas Instruments Incorporated


6.12 Typical Characteristics: Single Tone Spectra (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

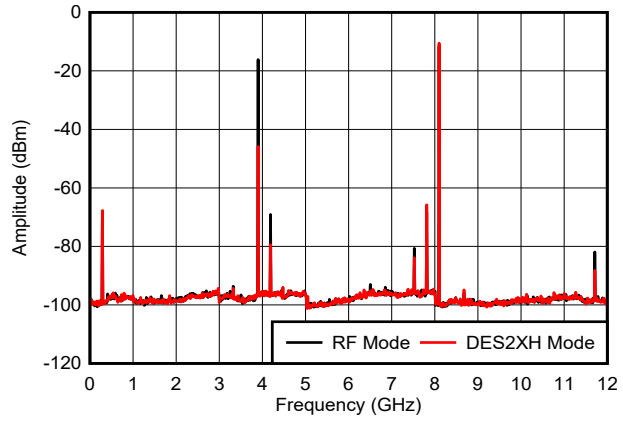


includes PCB, cable and balun loss

図 6-31. f_{OUT} = 8097 MHz, 0 dBFS

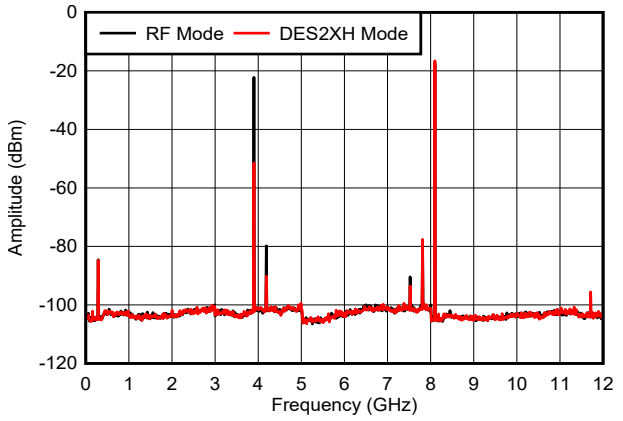


includes PCB, cable and balun loss

図 6-32. f_{OUT} = 8097 MHz, -6 dBFS

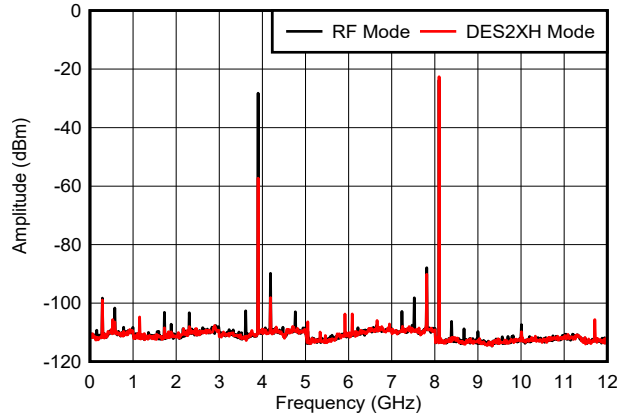


includes PCB, cable and balun loss

図 6-33. f_{OUT} = 8097 MHz, -12 dBFS

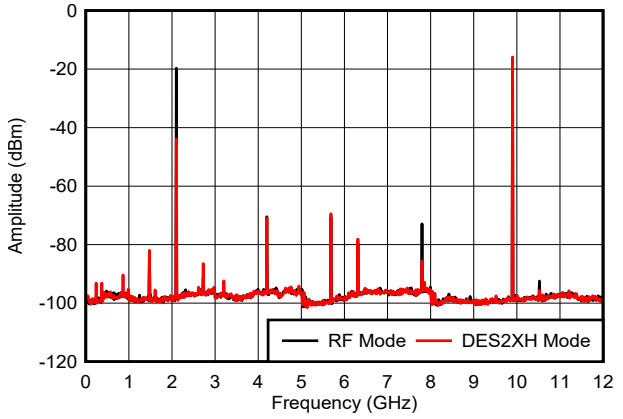


includes PCB, cable and balun loss

図 6-34. f_{OUT} = 9897 MHz, 0 dBFS

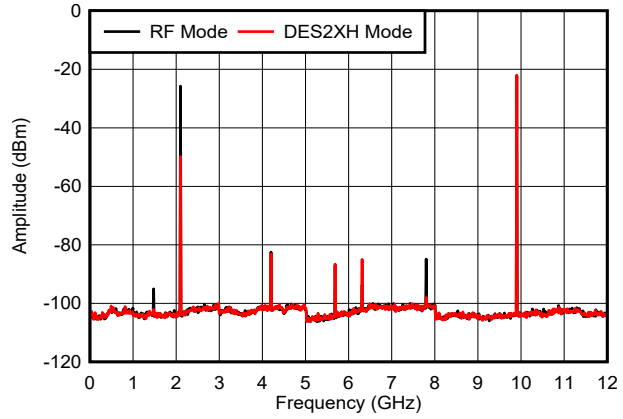

includes PCB, cable and balun loss

図 6-35. f_{OUT} = 9897 MHz, -6 dBFS

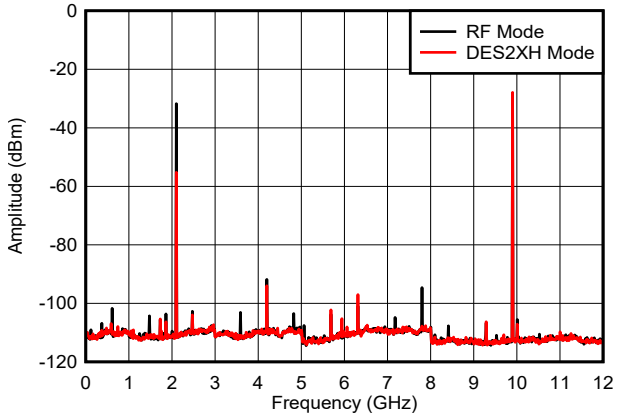


includes PCB, cable and balun loss

図 6-36. f_{OUT} = 9897 MHz, -12 dBFS

Copyright © 2024 Texas Instruments Incorporated


6.13 Typical Characteristics: Dual Tone Spectra

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

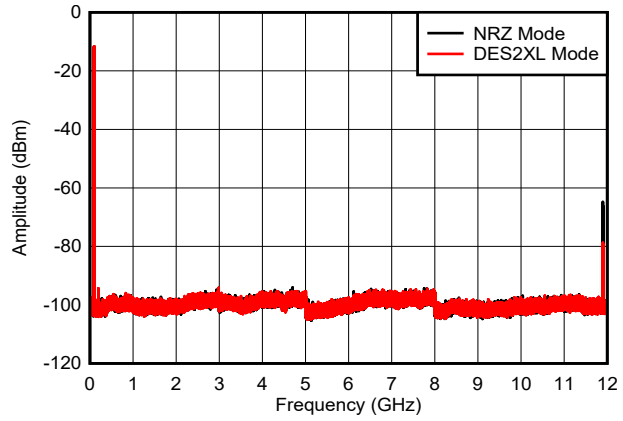


10 MHz tone spacing, includes PCB, cable and balun loss

図 6-37. Dual Tone, f_{OUT} = 97 MHz, 0 dBFS (0 - f_{CLK})

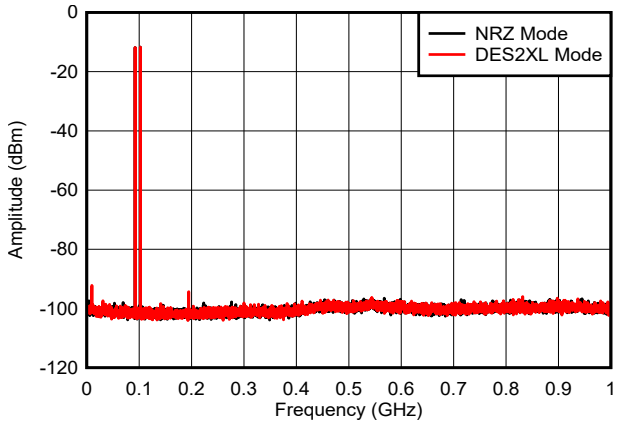


10 MHz tone spacing, includes PCB, cable and balun loss

図 6-38. Dual Tone, f_{OUT} = 97 MHz, 0 dBFS (0 - 1 GHz)

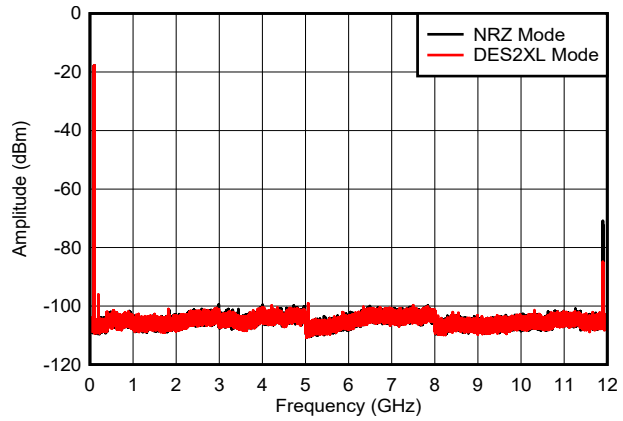


10 MHz tone spacing, includes PCB, cable and balun loss

図 6-39. Dual Tone, f_{OUT} = 97 MHz, -6 dBFS (0 - f_{CLK})

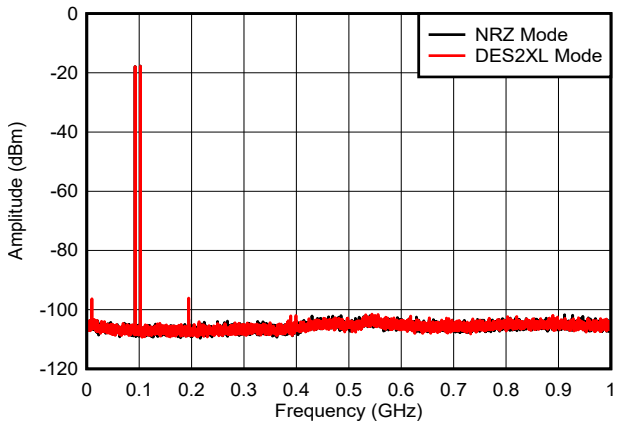


10 MHz tone spacing, includes PCB, cable and balun loss

図 6-40. Dual Tone, f_{OUT} = 97 MHz, -6 dBFS (0 - 1 GHz)

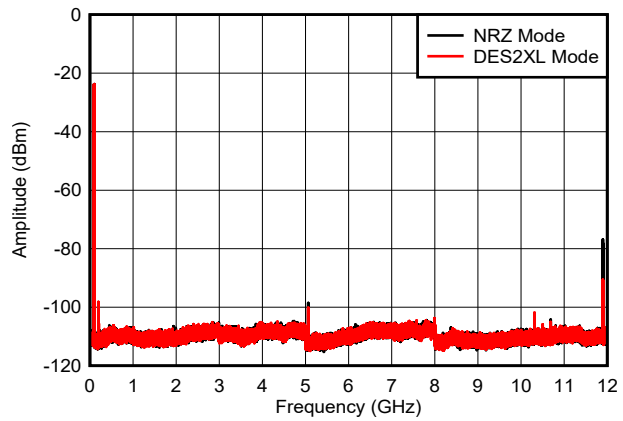

10 MHz tone spacing, includes PCB, cable and balun loss

図 6-41. Dual Tone, f_{OUT} = 97 MHz, -12 dBFS (0 - f_{CLK})

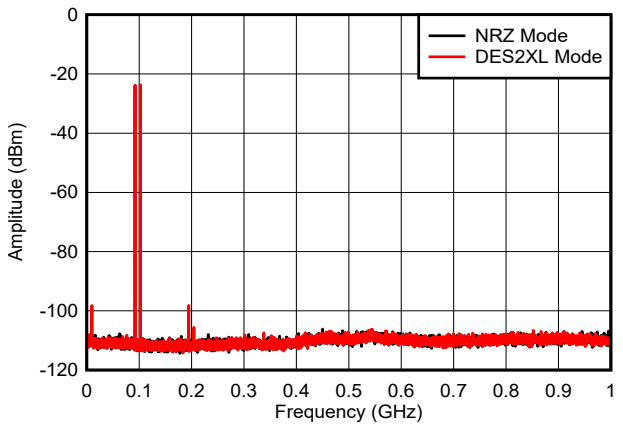


10 MHz tone spacing, includes PCB, cable and balun loss

図 6-42. Dual Tone, f_{OUT} = 97 MHz, -12 dBFS (0 - 1 GHz)

Copyright © 2024 Texas Instruments Incorporated


6.13 Typical Characteristics: Dual Tone Spectra (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

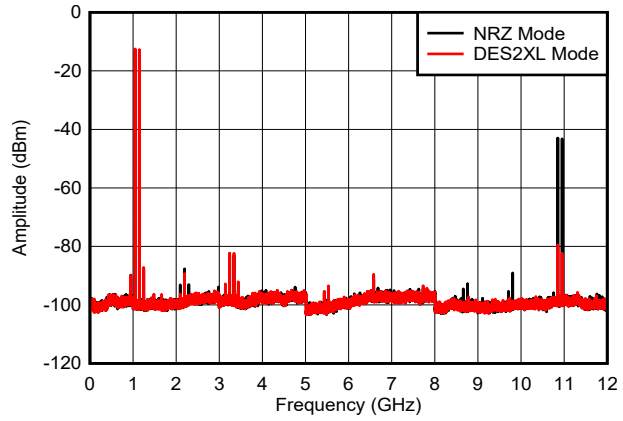


100 MHz tone spacing, includes PCB, cable and balun loss

図 6-43. Dual Tone, f_{OUT} = 1097 MHz, 0 dBFS

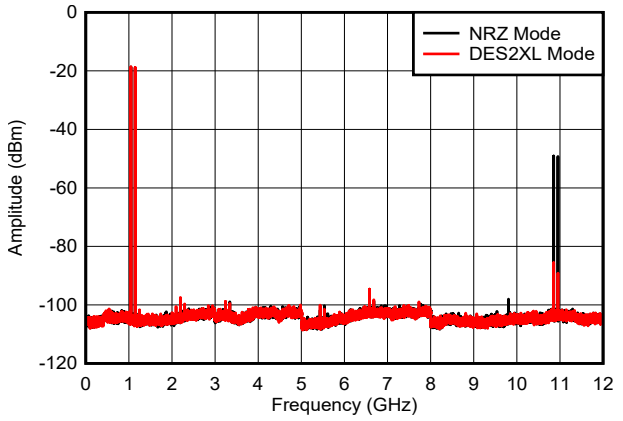


100 MHz tone spacing, includes PCB, cable and balun loss

図 6-44. Dual Tone, f_{OUT} = 1097 MHz, -6 dBFS

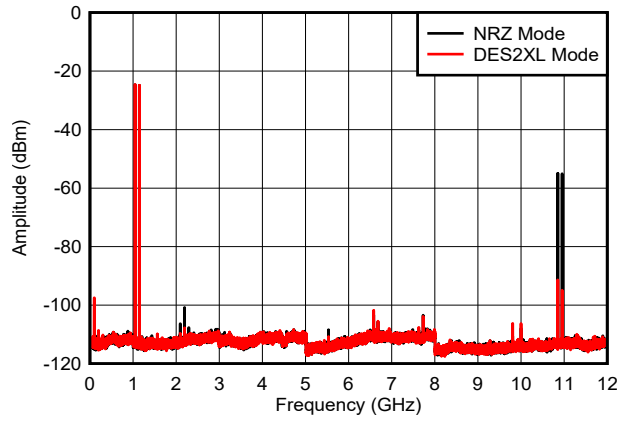


100 MHz tone spacing, includes PCB, cable and balun loss

図 6-45. Dual Tone, f_{OUT} = 1097 MHz, -12 dBFS

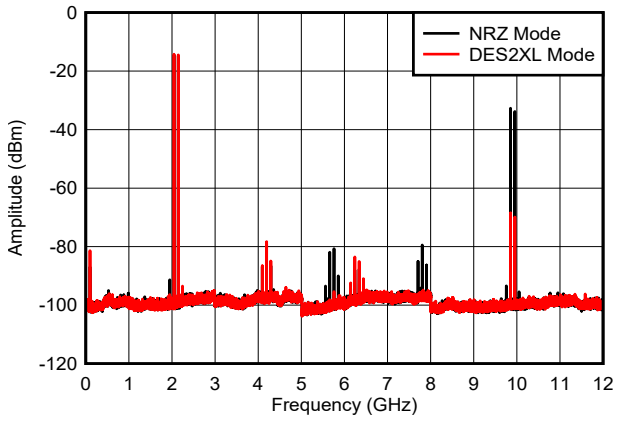


100 MHz tone spacing, includes PCB, cable and balun loss

図 6-46. Dual Tone, f_{OUT} = 2097 MHz, 0 dBFS

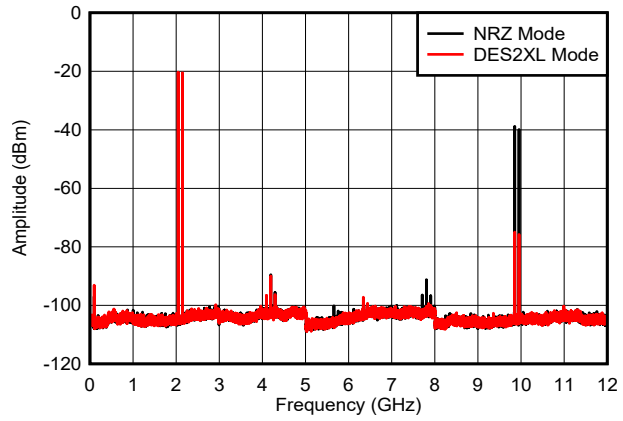

100 MHz tone spacing, includes PCB, cable and balun loss

図 6-47. Dual Tone, f_{OUT} = 2097 MHz, -6 dBFS

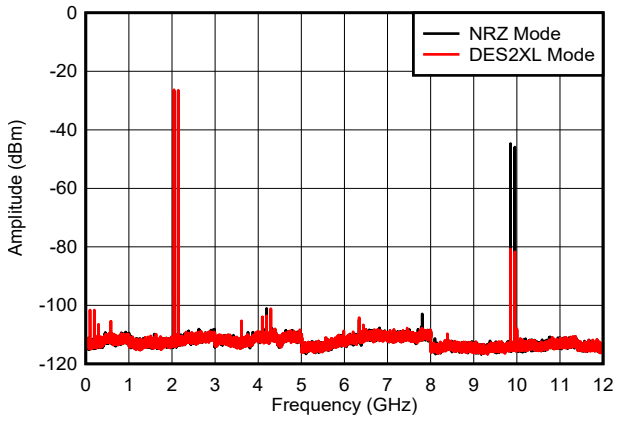


100 MHz tone spacing, includes PCB, cable and balun loss

図 6-48. Dual Tone, f_{OUT} = 2097 MHz, -12 dBFS

Copyright © 2024 Texas Instruments Incorporated


6.13 Typical Characteristics: Dual Tone Spectra (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

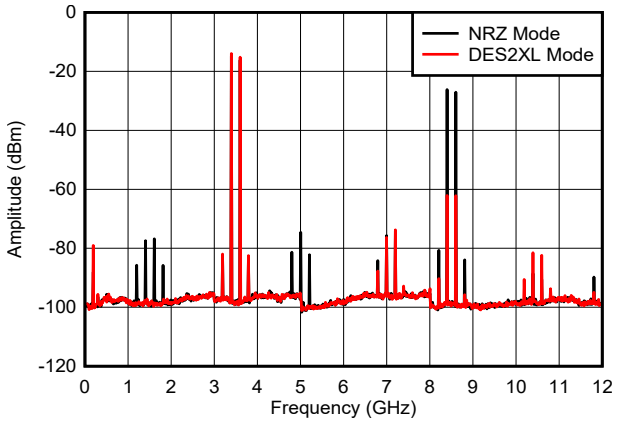


200 MHz tone spacing, includes PCB, cable and balun loss

図 6-49. Dual Tone, f_{OUT} = 3497 MHz, 0 dBFS

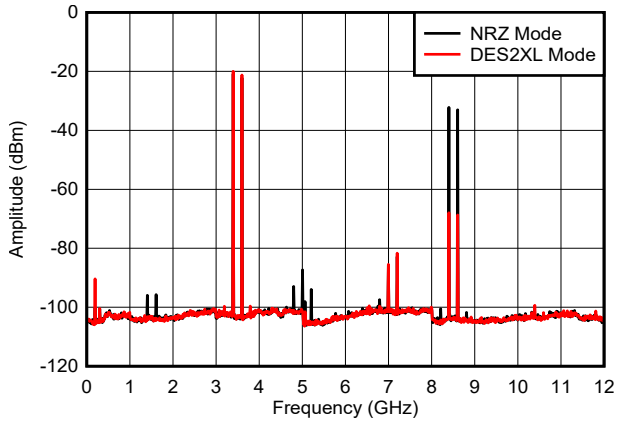


200 MHz tone spacing, includes PCB, cable and balun loss

図 6-50. Dual Tone, f_{OUT} = 3497 MHz, -6 dBFS

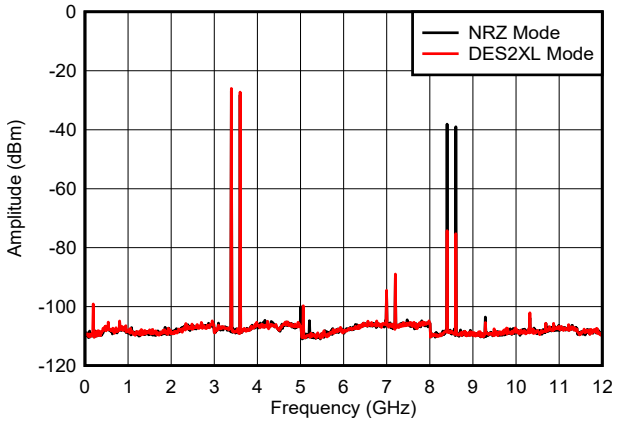


200 MHz tone spacing, includes PCB, cable and balun loss

図 6-51. Dual Tone, f_{OUT} = 3497 MHz, -12 dBFS

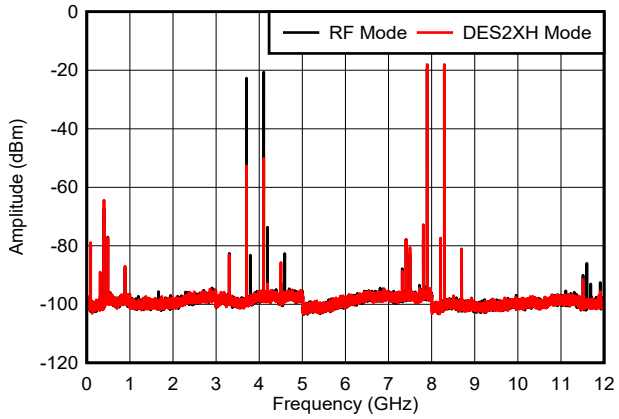


400 MHz tone spacing, includes PCB, cable and balun loss

図 6-52. Dual Tone, f_{OUT} = 8097 MHz, 0 dBFS

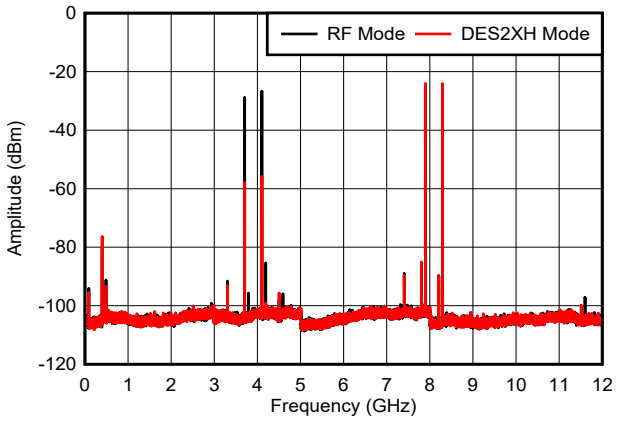

400 MHz tone spacing, includes PCB, cable and balun loss

図 6-53. Dual Tone, f_{OUT} = 8097 MHz, -6 dBFS

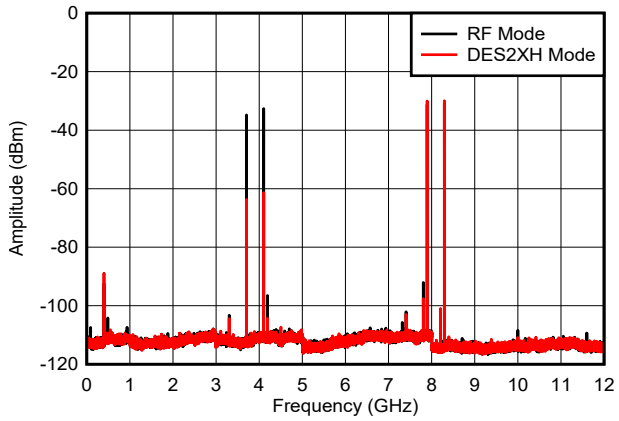


400 MHz tone spacing, includes PCB, cable and balun loss

図 6-54. Dual Tone, f_{OUT} = 8097 MHz, -12 dBFS

Copyright © 2024 Texas Instruments Incorporated


6.13 Typical Characteristics: Dual Tone Spectra (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, unless otherwise noted.

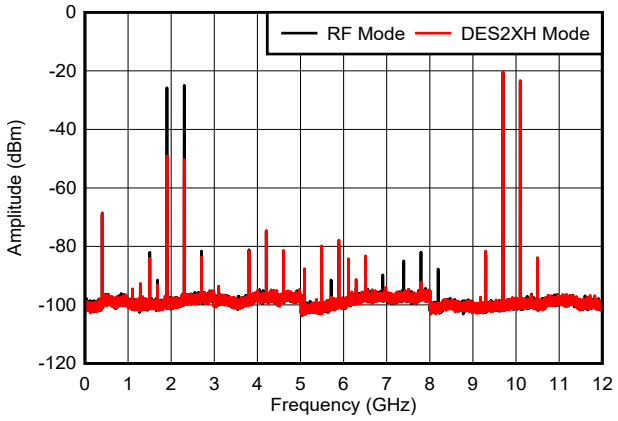


400 MHz tone spacing, includes PCB, cable and balun loss

図 6-55. Dual Tone, f_{OUT} = 9897 MHz, 0 dBFS

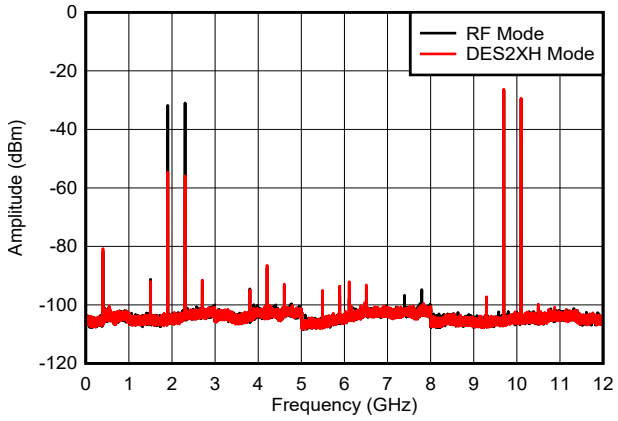

400 MHz tone spacing, includes PCB, cable and balun loss

図 6-56. Dual Tone, f_{OUT} = 9897 MHz, -6 dBFS

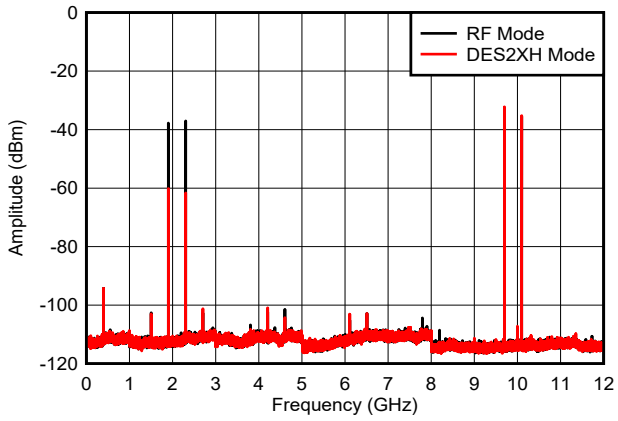


400 MHz tone spacing, includes PCB, cable and balun loss

図 6-57. Dual Tone, f_{OUT} = 9897 MHz, -12 dBFS

Copyright © 2024 Texas Instruments Incorporated


6.14 Typical Characteristics: Noise Spectral Density

NSD at 70 MHz offset from tone, typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, DEM_ADJ = 1 below 750 MHz and 0 above 750 MHz, unless otherwise noted.

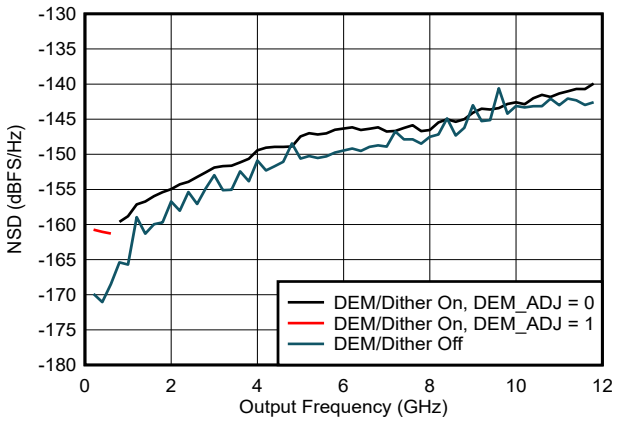


I_{FS_SWITCH} = 41 mA, NRZ and RF Modes

図 6-58. NSD vs Output Frequency and DEM/Dither Mode

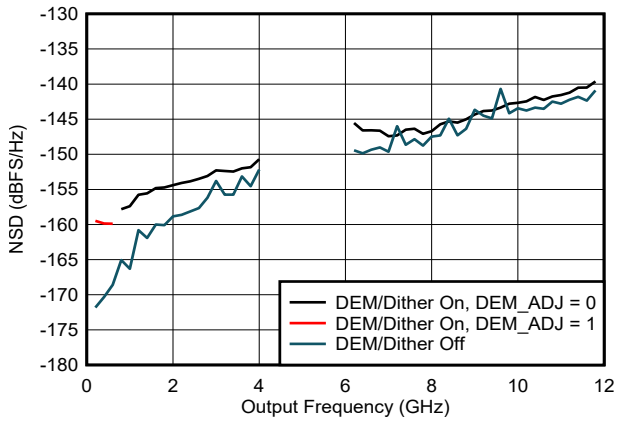


I_{FS_SWITCH} = 41 mA, DES2XL and DES2XH Modes

図 6-59. NSD vs Output Frequency and DEM/Dither Mode

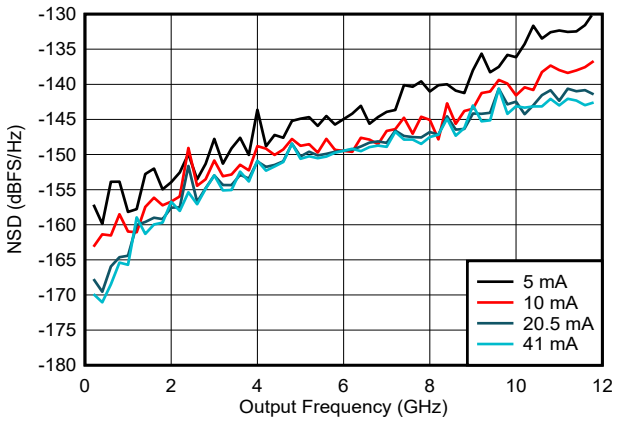


DEM and Dither Off, NRZ and RF Modes

図 6-60. NSD vs Output Frequency and Output Current

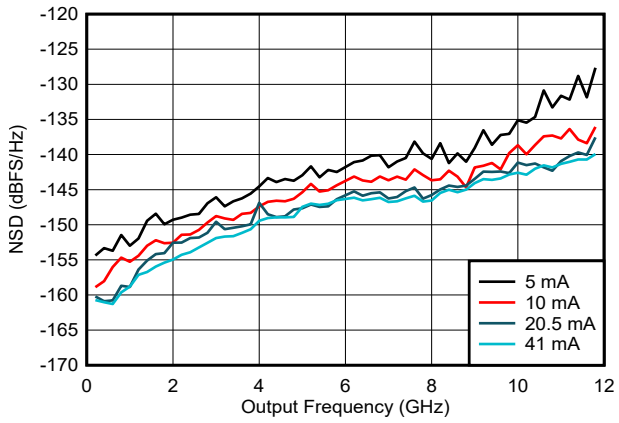


DEM and Dither On, NRZ and RF Modes

図 6-61. NSD vs Output Frequency and Output Current

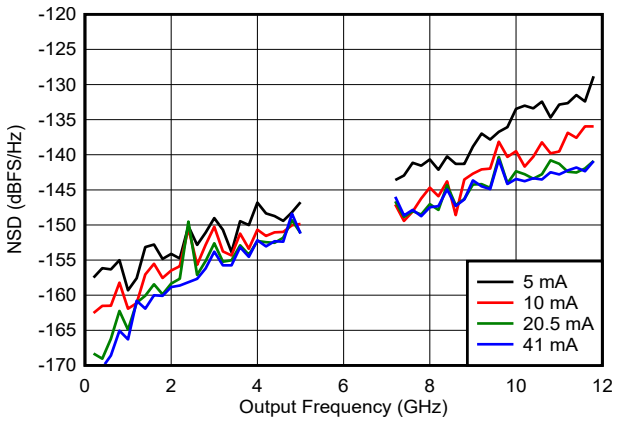

DEM and Dither Off, DES2XL and DES2XH Modes

図 6-62. NSD vs Output Frequency and Output Current

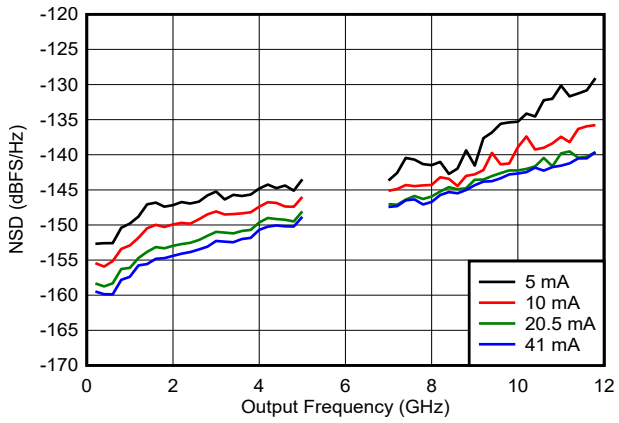


DEM and Dither On, DES2XL and DES2XH Modes

図 6-63. NSD vs Output Frequency and Output Current


Copyright © 2024 Texas Instruments Incorporated

6.14 Typical Characteristics: Noise Spectral Density (continued)

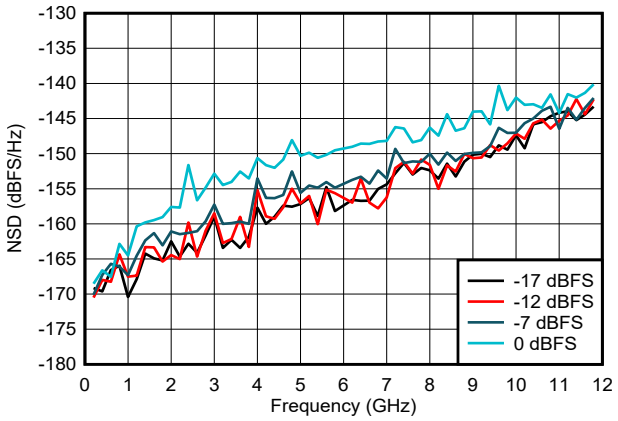


I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off, NRZ and RF Modes

図 6-64. NSD vs Output Frequency and Digital Amplitude

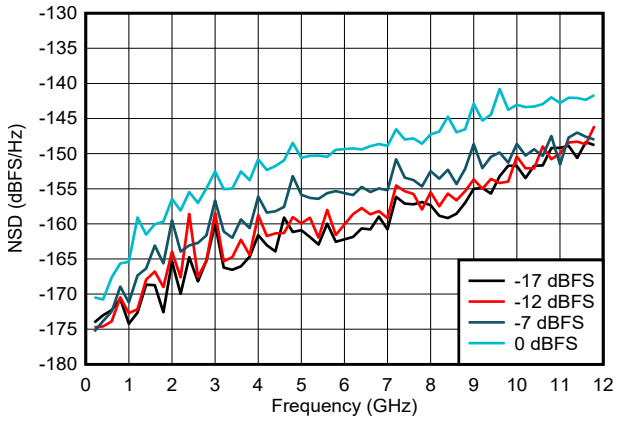


I_{FS_SWITCH} = 41 mA, DEM and Dither Off, NRZ and RF Modes

図 6-65. NSD vs Output Frequency and Digital Amplitude

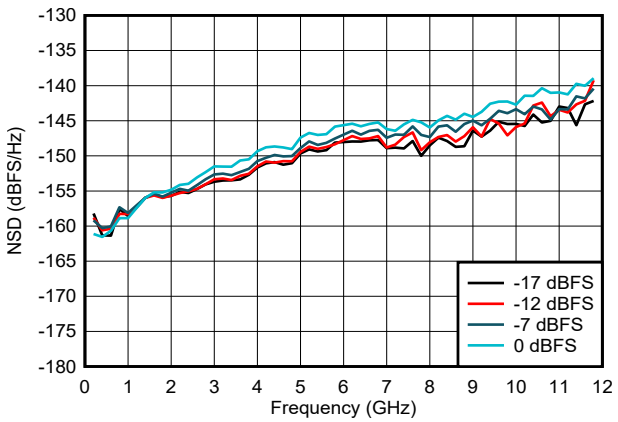


I_{FS_SWITCH} = 20.5 mA, DEM and Dither On, NRZ and RF Modes

図 6-66. NSD vs Output Frequency and Digital Amplitude

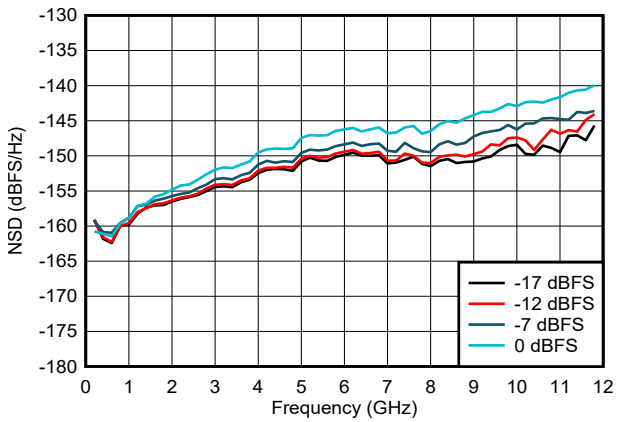


I_{FS_SWITCH} = 41 mA, DEM and Dither On, DEM_ADJ = 0, NRZ and RF Modes

図 6-67. NSD vs Output Frequency and Digital Amplitude

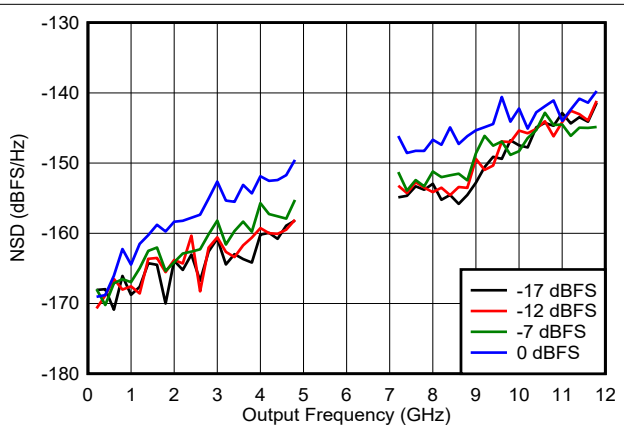

I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off, DES2XL and DES2XH Modes

図 6-68. NSD vs Output Frequency and Digital Amplitude

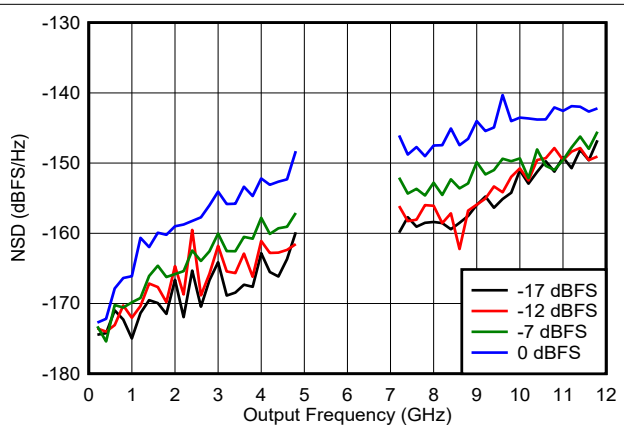


I_{FS_SWITCH} = 41 mA, DEM and Dither Off, DES2XL and DES2XH Modes

図 6-69. NSD vs Output Frequency and Digital Amplitude


Copyright © 2024 Texas Instruments Incorporated

6.14 Typical Characteristics: Noise Spectral Density (continued)

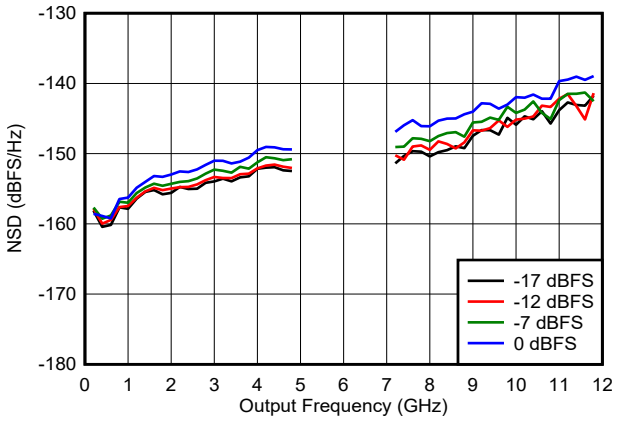


I_{FS_SWITCH} = 20.5 mA, DEM and Dither On, DES2XL and DES2XH Modes

図 6-70. NSD vs Output Frequency and Digital Amplitude

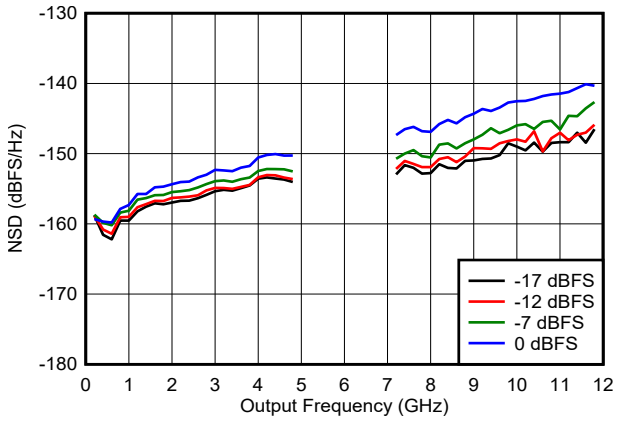


I_{FS_SWITCH} = 41 mA, DEM and Dither On, DES2XL and DES2XH Modes

図 6-71. NSD vs Output Frequency and Digital Amplitude

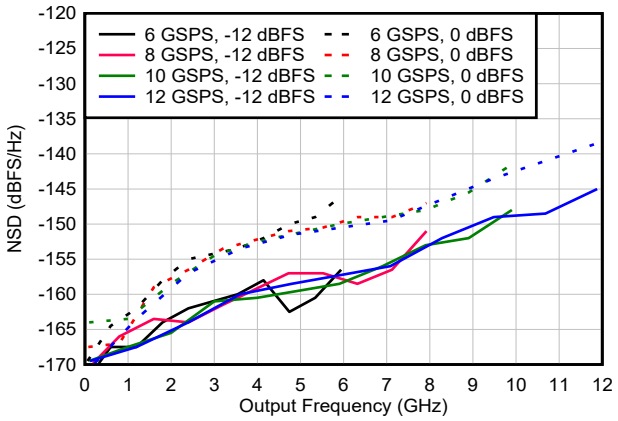


I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off, NRZ and RF Modes

図 6-72. NSD vs Output Frequency and Sample Rate

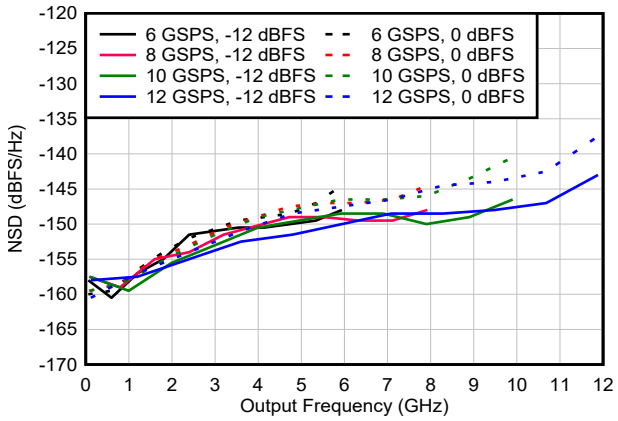


I_{FS_SWITCH} = 20.5 mA, DEM and Dither On, NRZ and RF Modes

図 6-73. NSD vs Output Frequency and Sample Rate

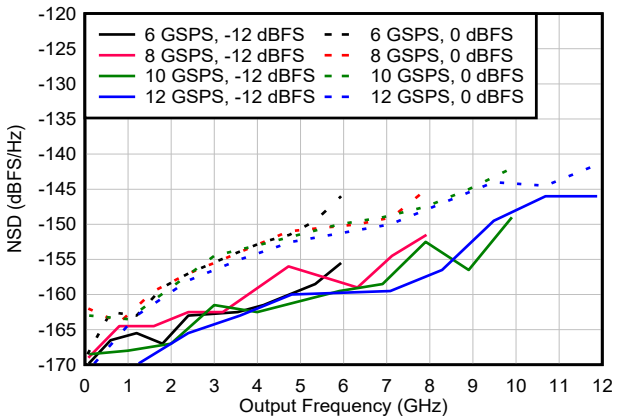

I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off, DES2XL and DES2XH Modes

図 6-74. NSD vs Output Frequency and Sample Rate

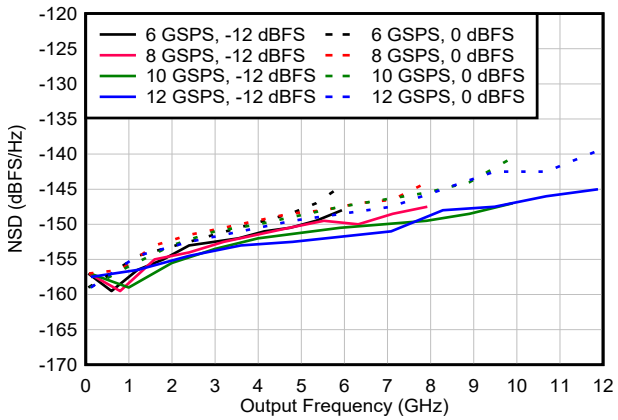


I_{FS_SWITCH} = 20.5 mA, DEM and Dither On, DES2XL and DES2XH Modes

図 6-75. NSD vs Output Frequency and Sample Rate


Copyright © 2024 Texas Instruments Incorporated

6.14 Typical Characteristics: Noise Spectral Density (continued)

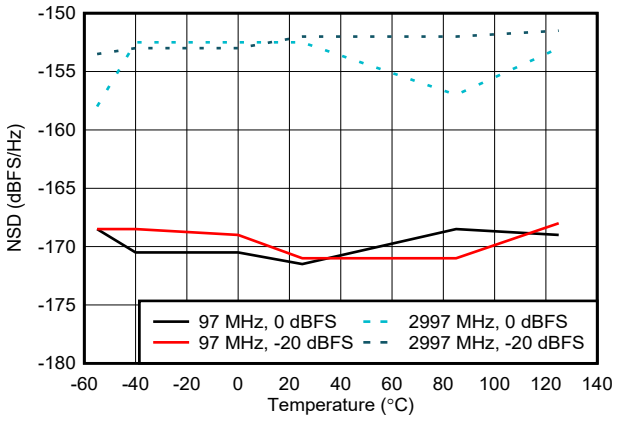


I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off, NRZ Mode

図 6-76. NSD vs Temperature

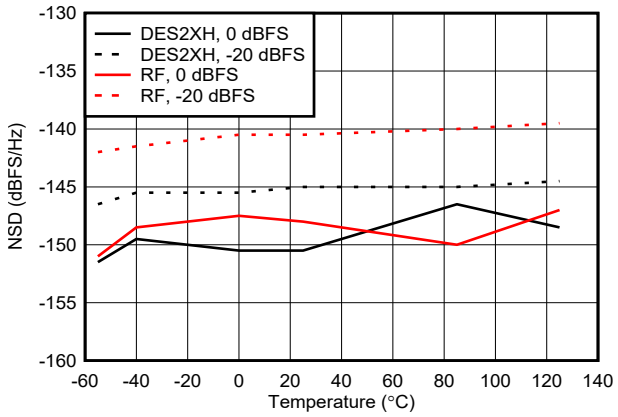


F_{OUT} = 9002 MHz, I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off

図 6-77. NSD vs Temperature

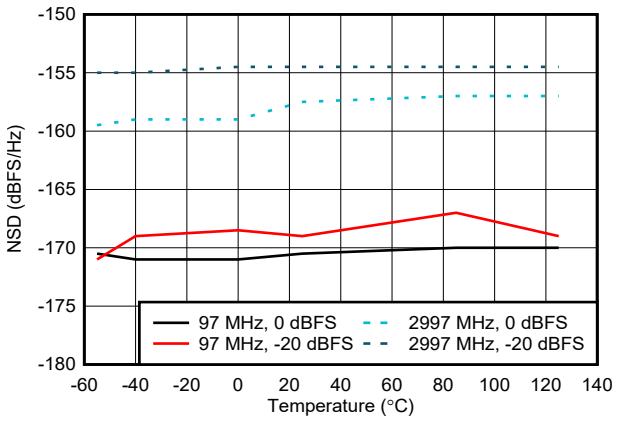


I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off,, DES2XL Mode

図 6-78. NSD vs Temperature

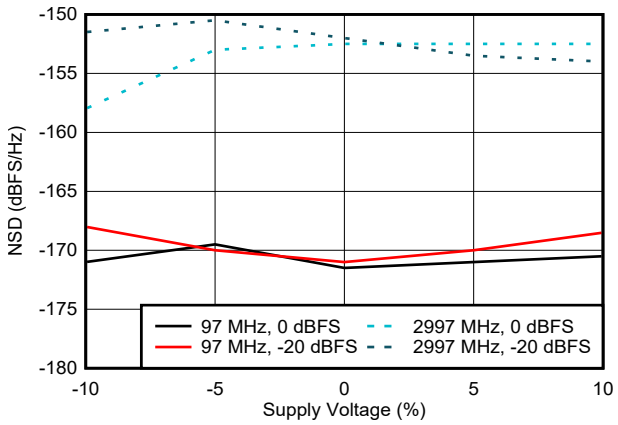


I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off, NRZ Mode

図 6-79. NSD vs Supply Voltage

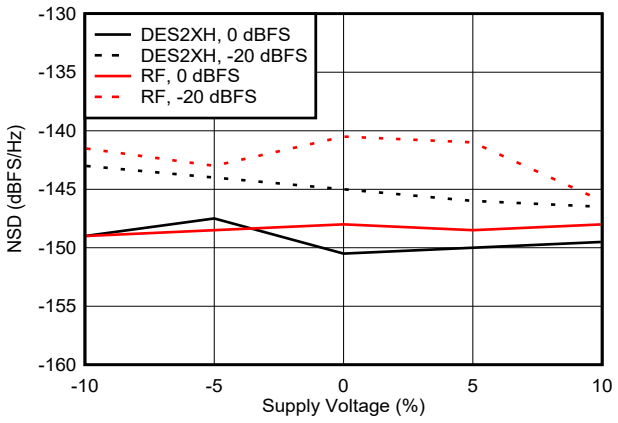

F_{OUT} = 9002 MHz, I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off,

図 6-80. NSD vs Supply Voltage

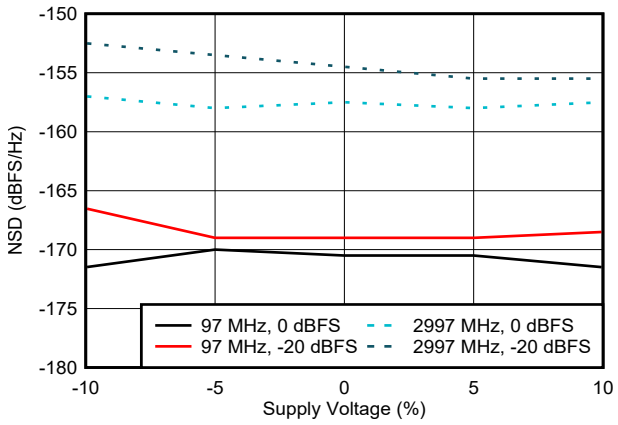


I_{FS_SWITCH} = 20.5 mA, DEM and Dither Off, DES2XL Mode

図 6-81. NSD vs Supply Voltage

Copyright © 2024 Texas Instruments Incorporated


6.15 Typical Characteristics: Linearity Sweeps

NSD at 70 MHz offset from tone, typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, I_{FS_SWITCH} = 20.5 mA, single tone amplitude = 0 dBFS, Dither and DEM enabled, DEM_ADJ = 1 below 750 MHz and 0 above 750 MHz, unless otherwise noted. SFDR/harmonics measured between 0 and $f_{CLK}/2$ when $f_{OUT} < f_{CLK}/2$ and $f_{CLK}/2$ and f_{CLK} when $f_{OUT} > f_{CLK}/2$.

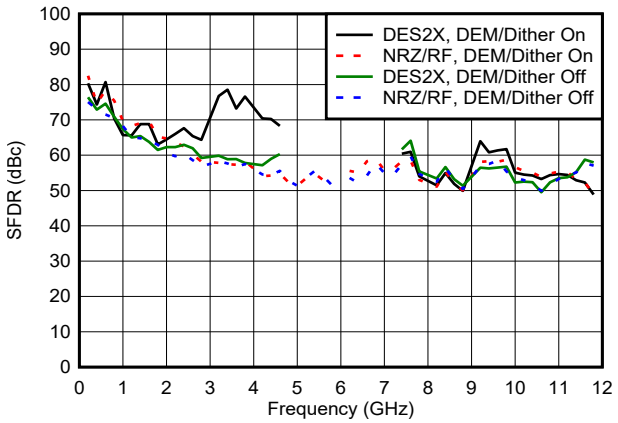


I_{FS_SWITCH} = 20.5 mA

図 6-82. SFDR vs Frequency and Mode

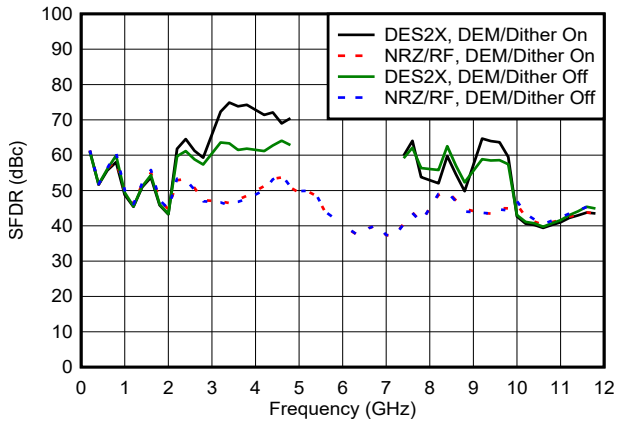


I_{FS_SWITCH} = 41 mA

図 6-83. SFDR vs Frequency and Mode

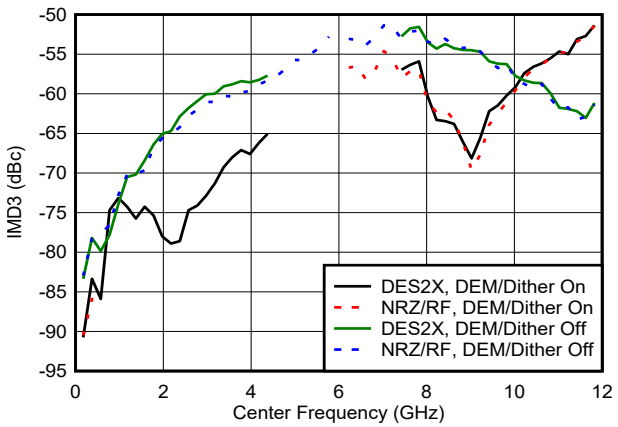

I_{FS_SWITCH} = 20.5 mA

図 6-84. IMD3 vs Frequency and Mode

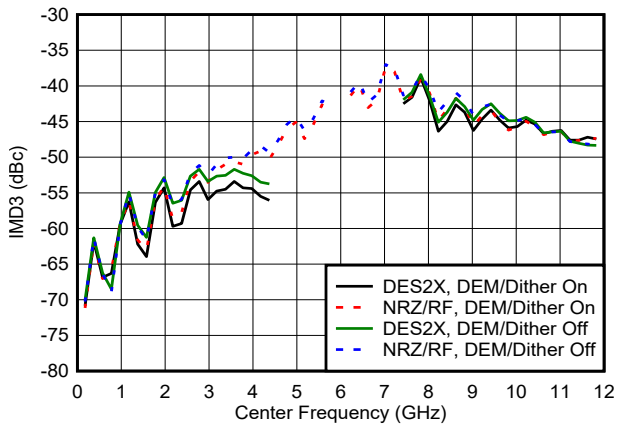


I_{FS_SWITCH} = 41 mA

図 6-85. IMD3 vs Frequency and Mode


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

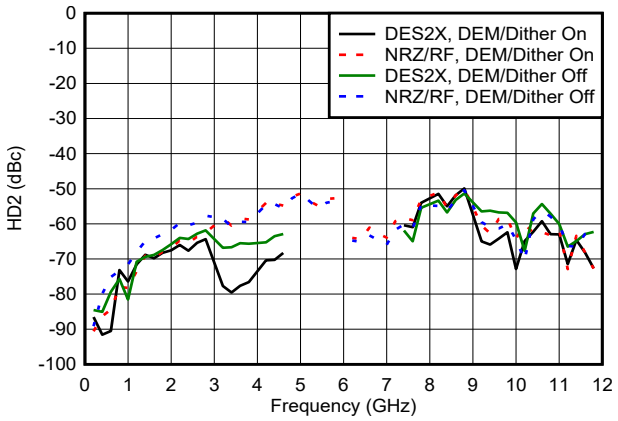


I_{FS_SWITCH} = 20.5 mA

図 6-86. HD2 vs Frequency and Mode

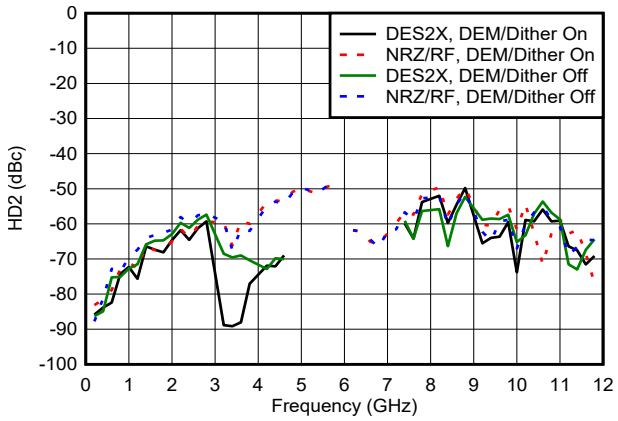


I_{FS_SWITCH} = 41 mA

図 6-87. HD2 vs Frequency and Mode

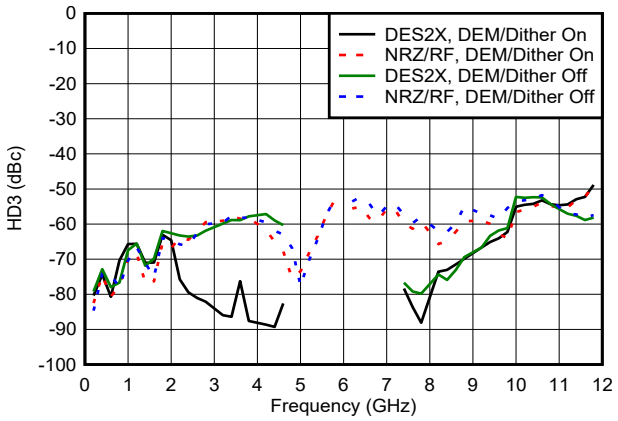


I_{FS_SWITCH} = 20.5 mA

図 6-88. HD3 vs Frequency and Mode

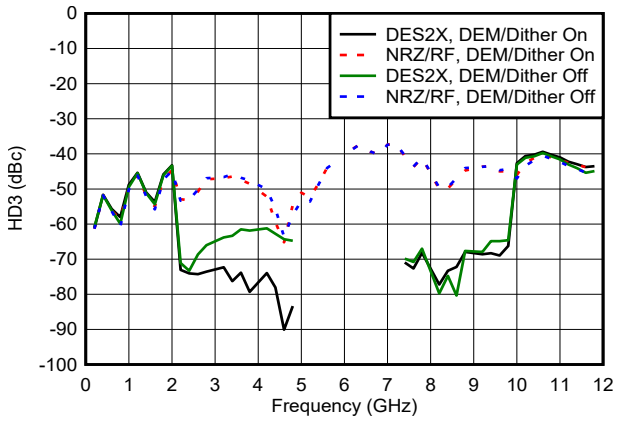


I_{FS_SWITCH} = 41 mA

図 6-89. HD3 vs Frequency and Mode

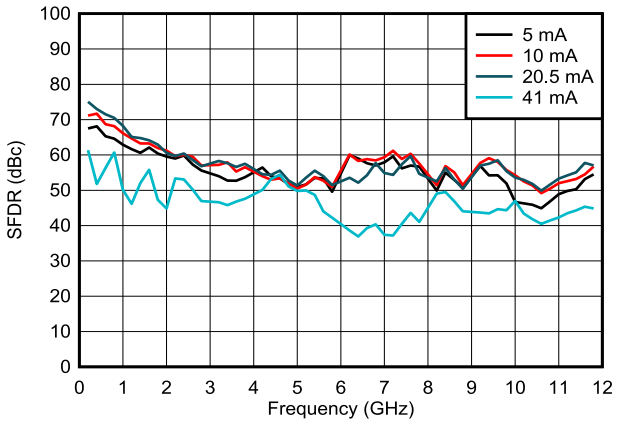

DEM/Dither off

図 6-90. SFDR vs Frequency and Output Current in NRZ/RF Modes

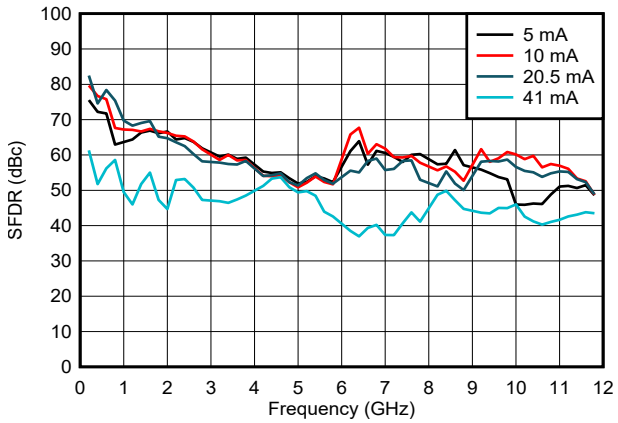


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-91. SFDR vs Frequency and Output Current in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

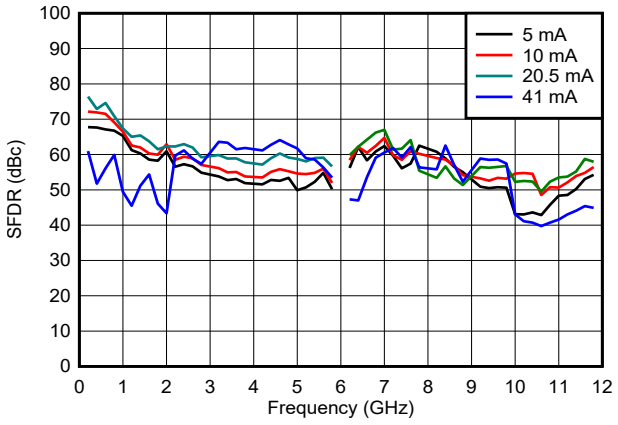


DEM/Dither off

図 6-92. SFDR vs Frequency and Output Current in DES2X Modes

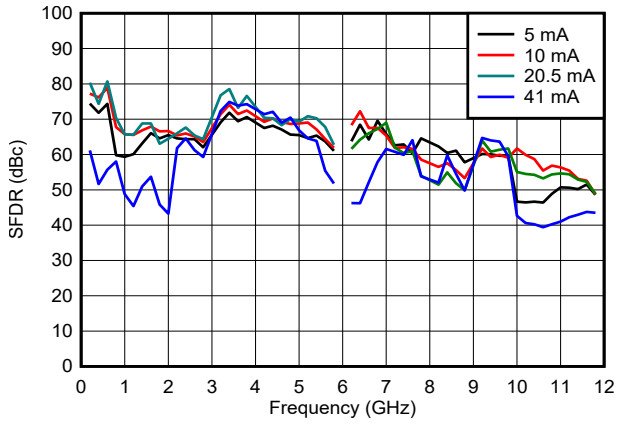


DEM/Dither on

図 6-93. SFDR vs Frequency and Output Current in DES2X Modes

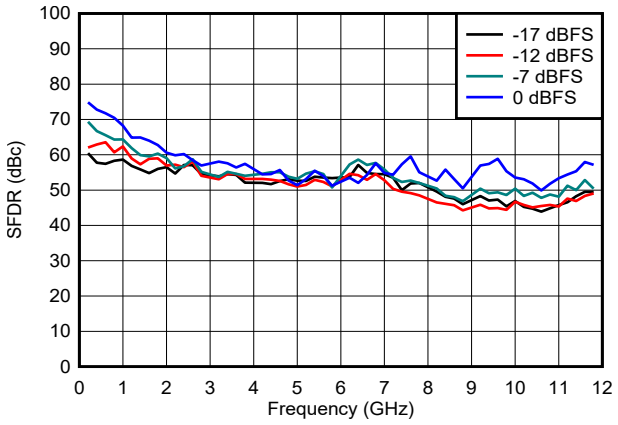


I_{FS_SWITCH} = 20.5 mA, DEM/Dither off

図 6-94. SFDR vs Frequency and Digital Amplitude in NRZ/RF Modes

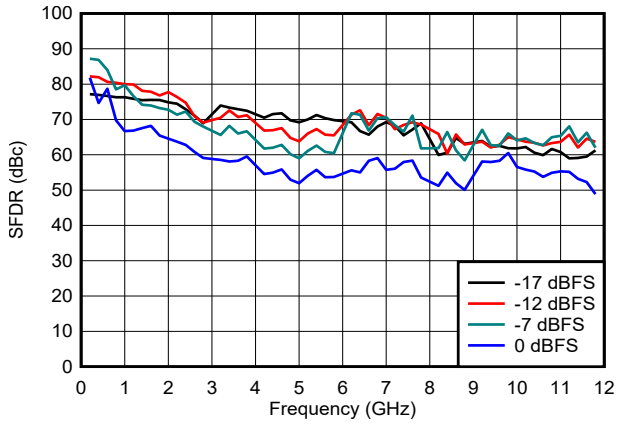


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-95. SFDR vs Frequency and Digital Amplitude in NRZ/RF Modes

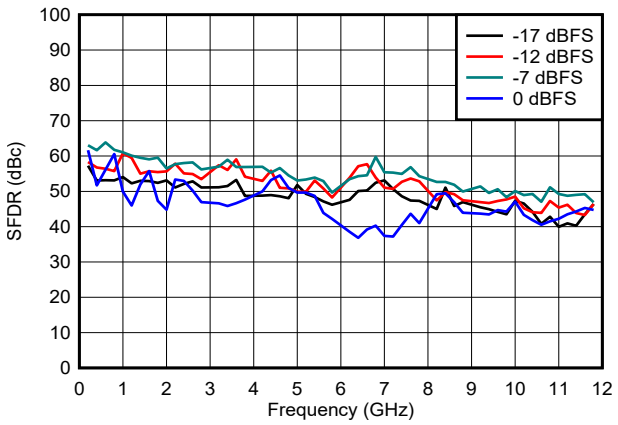

I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-96. SFDR vs Frequency and Digital Amplitude in NRZ/RF Modes

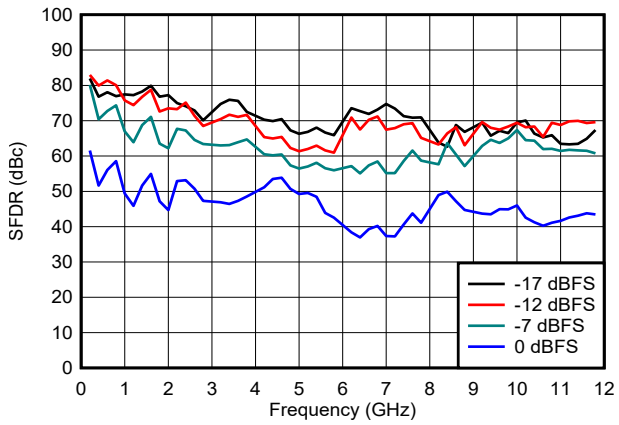


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-97. SFDR vs Frequency and Digital Amplitude in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

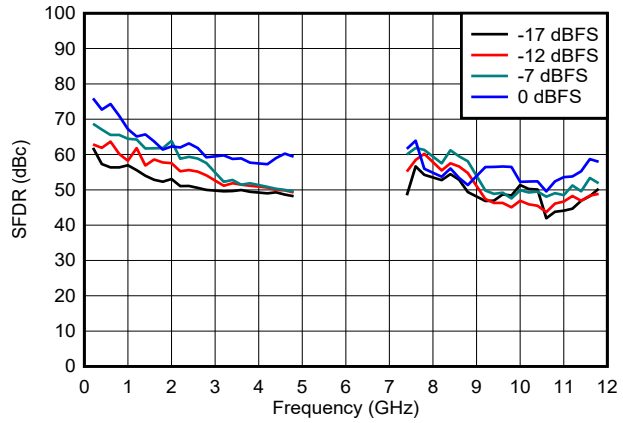


I_{FS_SWITCH} = 20.5 mA, DEM/Dither off

図 6-98. SFDR vs Frequency and Digital Amplitude in DES2X Modes

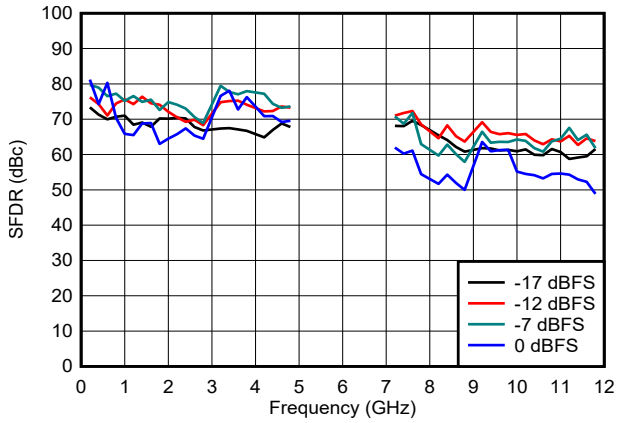


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-99. SFDR vs Frequency and Digital Amplitude in DES2X Modes

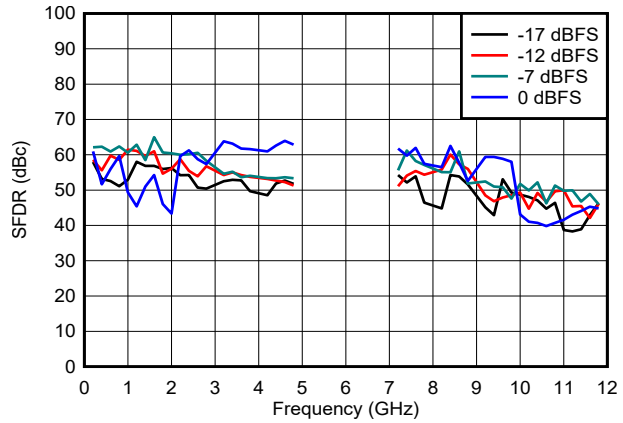


I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-100. SFDR vs Frequency and Digital Amplitude in DES2X Modes

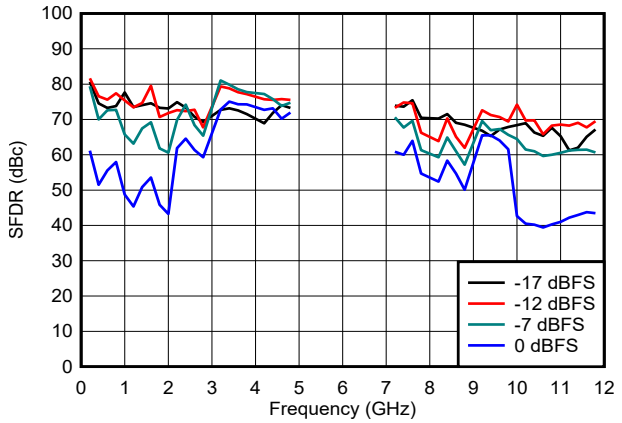


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-101. SFDR vs Frequency and Digital Amplitude in DES2X Modes

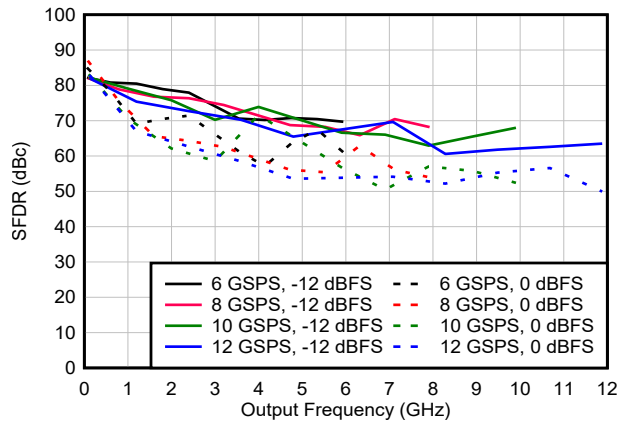

DEM/Dither on

図 6-102. SFDR vs Frequency and Sample Rate in NRZ/RF Modes

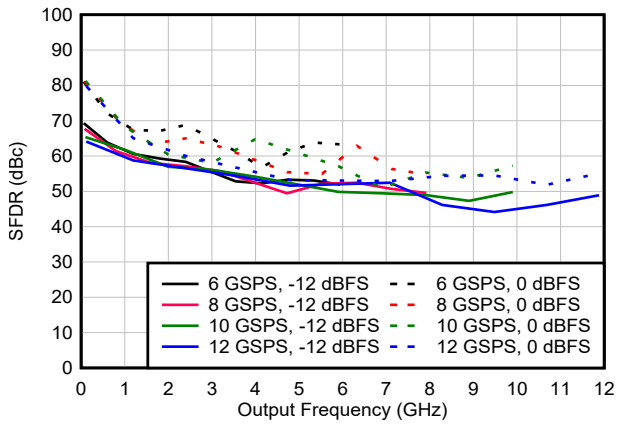


DEM/Dither off

図 6-103. SFDR vs Frequency and Sample Rate in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

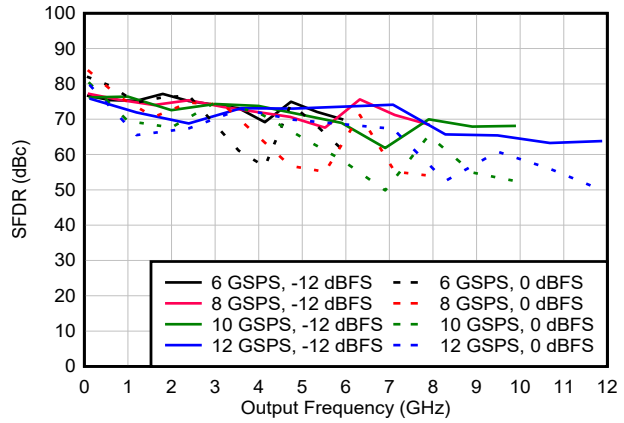


DEM/Dither on

図 6-104. SFDR vs Frequency and Sample Rate in DES2X Modes

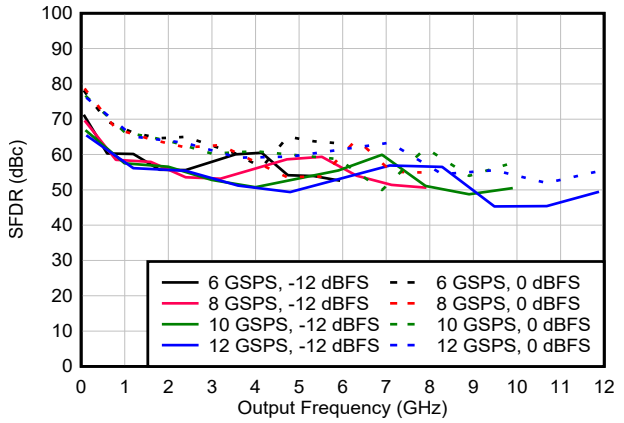


DEM/Dither off

図 6-105. SFDR vs Frequency and Sample Rate in DES2X Modes

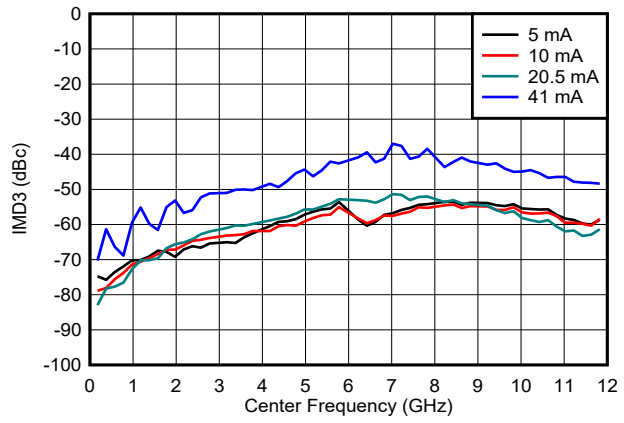


DEM/Dither off

図 6-106. IMD3 vs Frequency and Output Current in NRZ/RF Modes

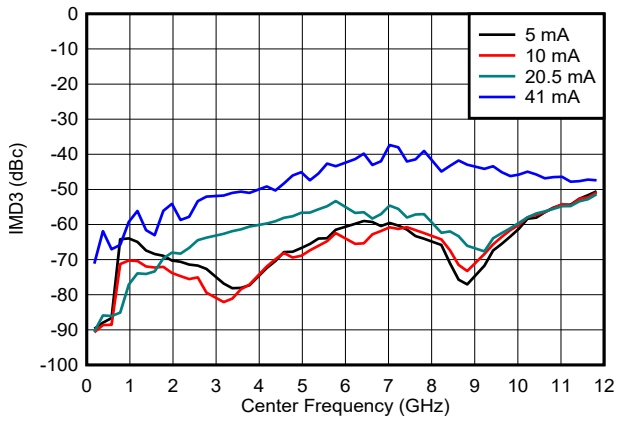


DEM/Dither on

図 6-107. IMD3 vs Frequency and Output Current in NRZ/RF Modes

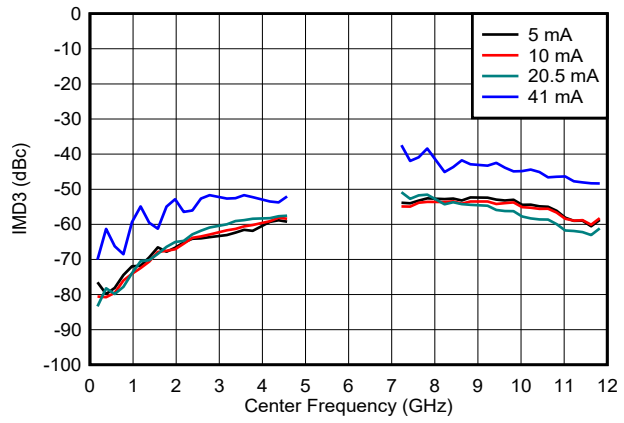

DEM/Dither off

図 6-108. IMD3 vs Frequency and Output Current in DES2X Modes

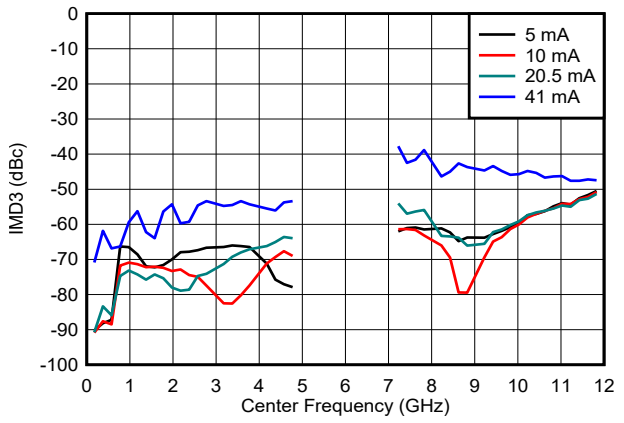


DEM/Dither on

図 6-109. IMD3 vs Frequency and Output Current in DES2X Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

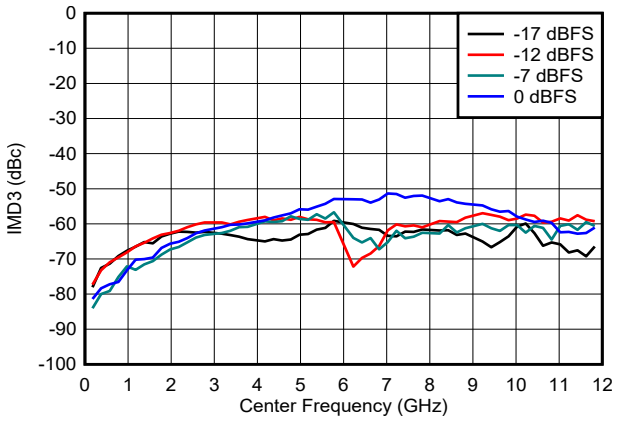


I_{FS_SWITCH} = 20.5 mA, DEM/Dither off

図 6-110. IMD3 vs Frequency and Digital Amplitude in NRZ/RF Modes

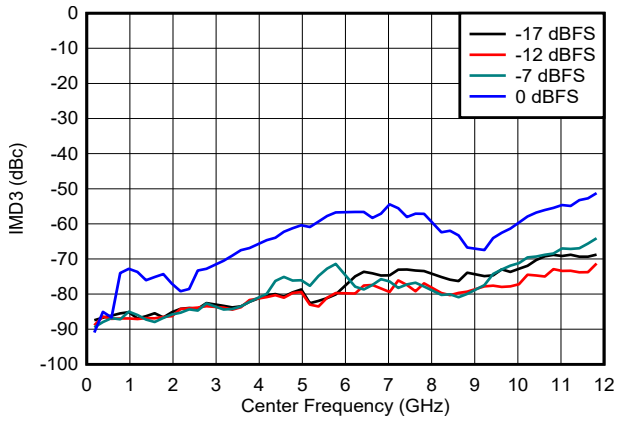


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-111. IMD3 vs Frequency and Digital Amplitude in NRZ/RF Modes

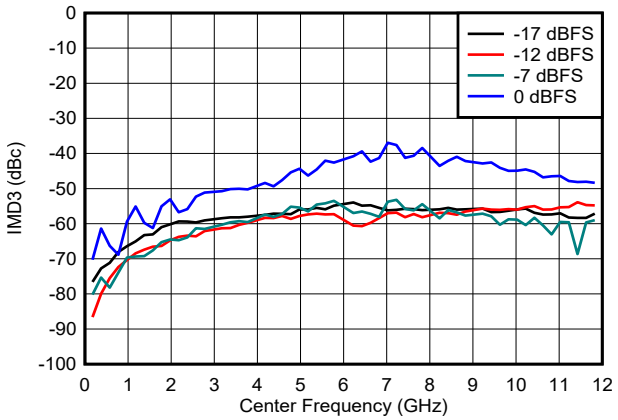


I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-112. IMD3 vs Frequency and Digital Amplitude in NRZ/RF Modes

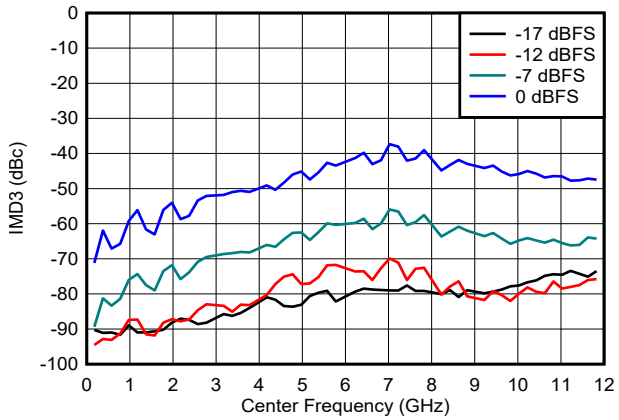


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-113. IMD3 vs Frequency and Digital Amplitude in NRZ/RF Modes

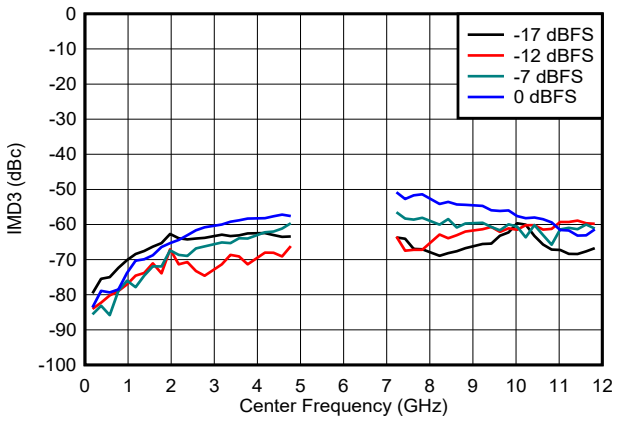

I_{FS_SWITCH} = 20.5 mA, DEM/Dither off

図 6-114. IMD3 vs Frequency and Digital Amplitude in DES2X Modes

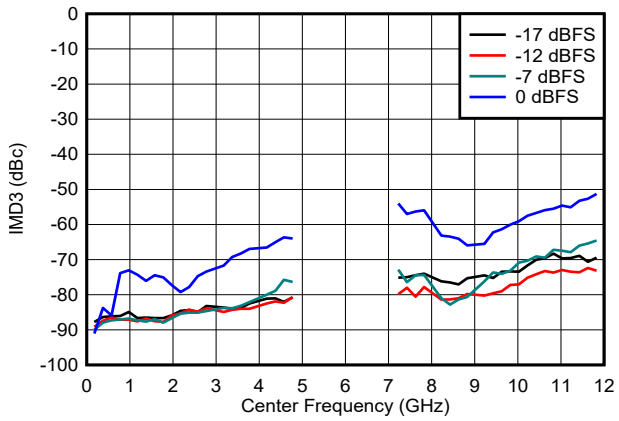


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-115. IMD3 vs Frequency and Digital Amplitude in DES2X Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

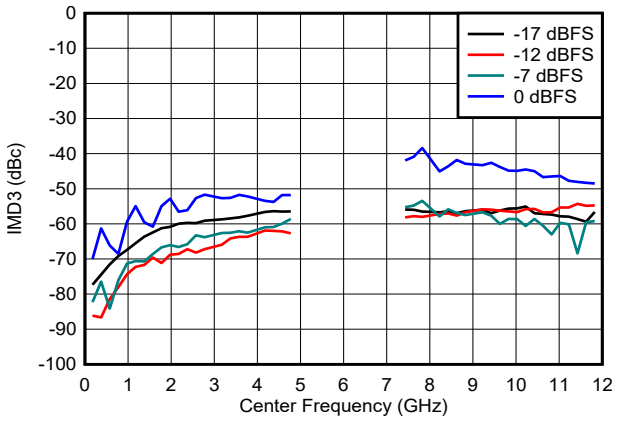


I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-116. IMD3 vs Frequency and Digital Amplitude in DES2X Modes

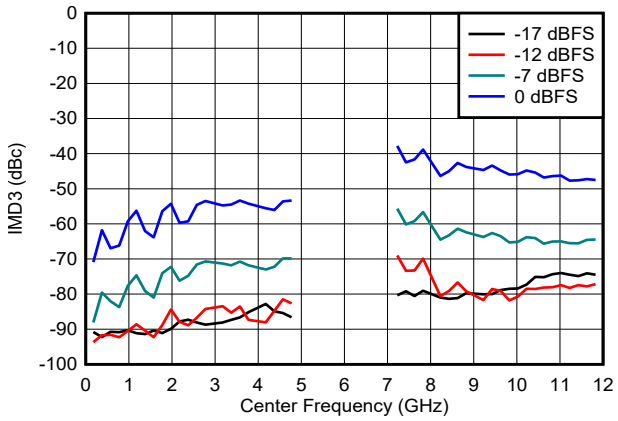


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-117. IMD3 vs Frequency and Digital Amplitude in DES2X Modes

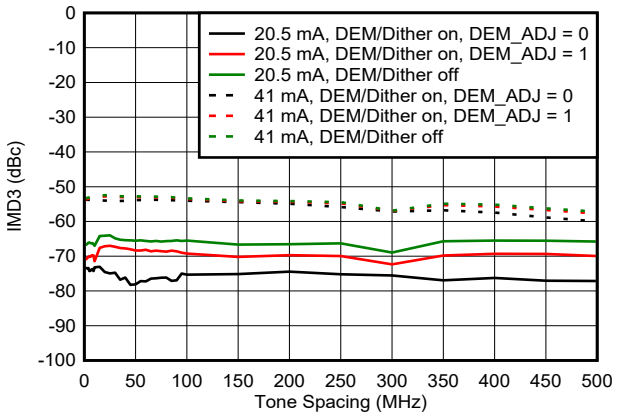


F_{CENTER} = 1997 MHz

図 6-118. IMD3 vs Tone Spacing in NRZ Mode

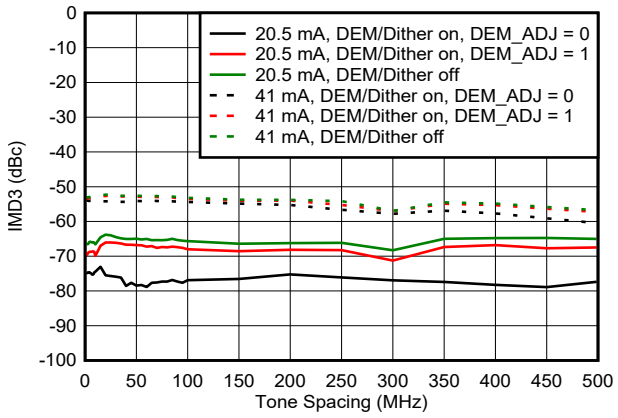


F_{CENTER} = 1997 MHz

図 6-119. IMD3 vs Tone Spacing in DES2XL Mode

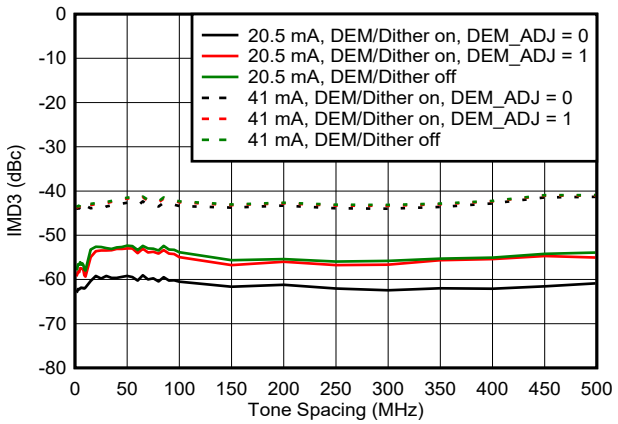

F_{CENTER} = 7997 MHz

図 6-120. IMD3 vs Tone Spacing in RF Mode

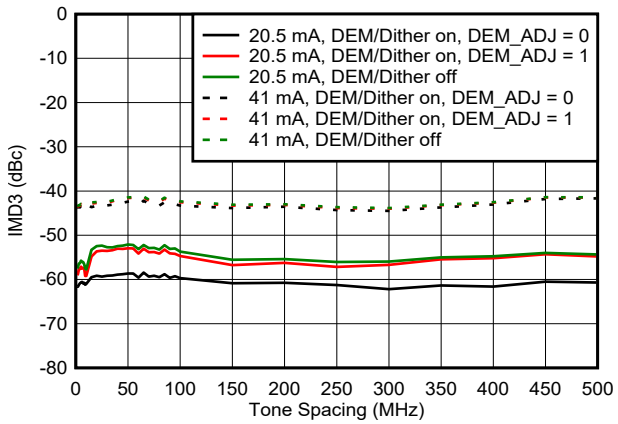


F_{CENTER} = 7997 MHz

図 6-121. IMD3 vs Tone Spacing in DES2XH Mode


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

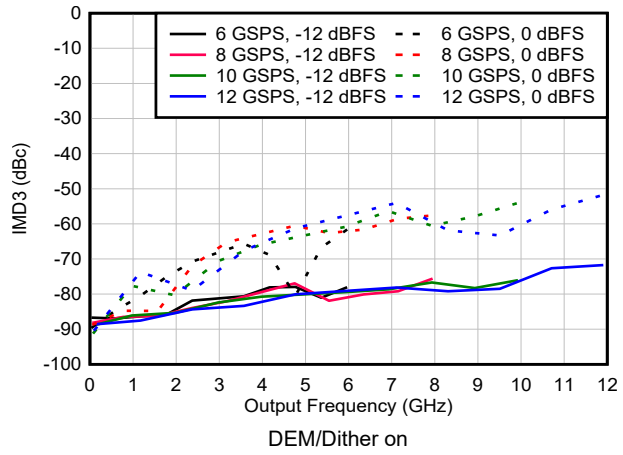


DEM/Dither on

図 6-122. IMD3 vs Frequency and Sample Rate in NRZ/RF Modes

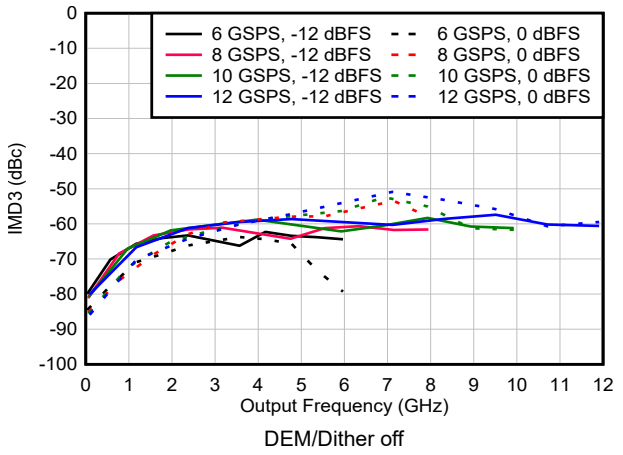


DEM/Dither off

図 6-123. IMD3 vs Frequency and Sample Rate in NRZ/RF Modes

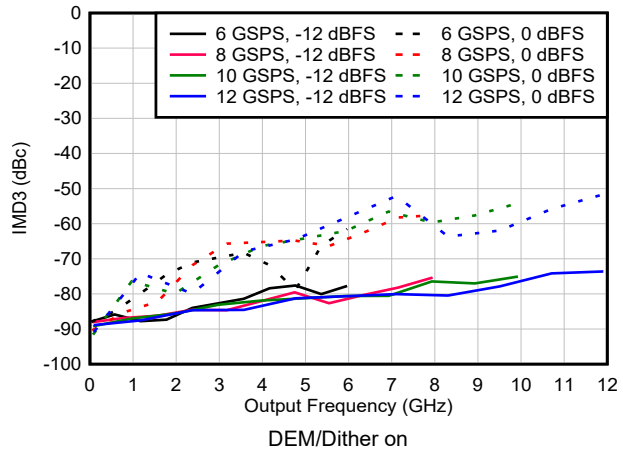

DEM/Dither on

図 6-124. IMD3 vs Frequency and Sample Rate in DES2X Modes

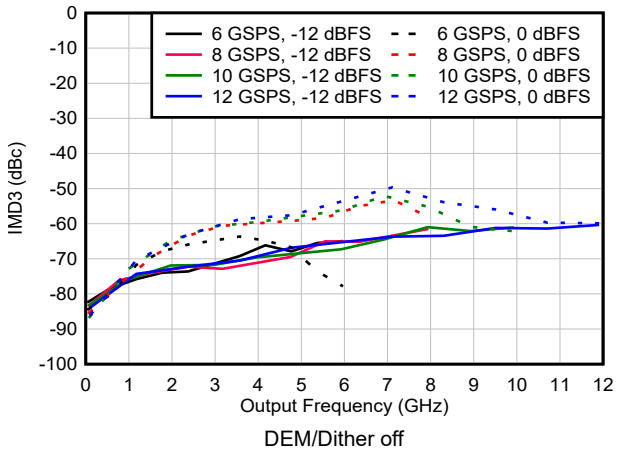

DEM/Dither off

図 6-125. IMD3 vs Frequency and Sample Rate in DES2X Modes

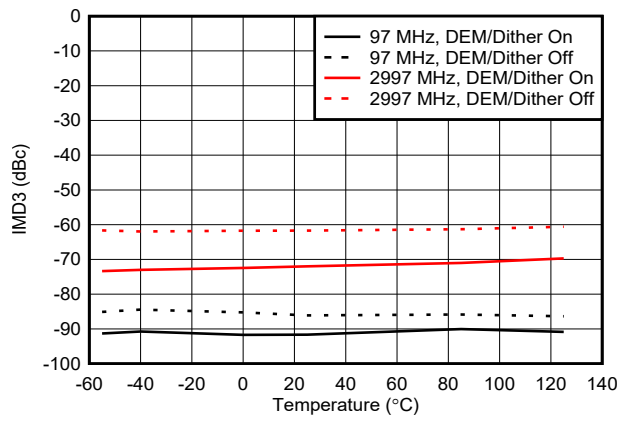


図 6-126. IMD3 vs Temperature in NRZ Mode

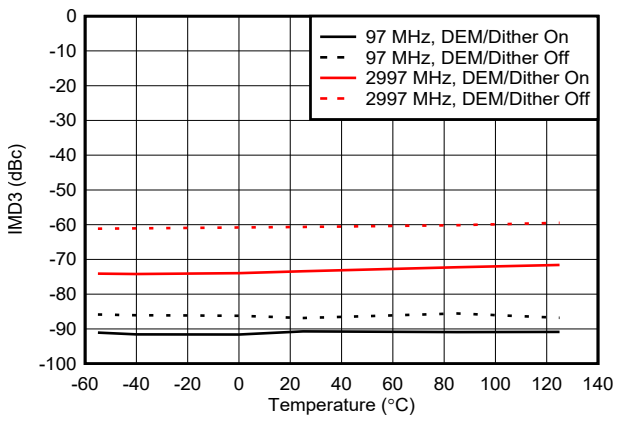


図 6-127. IMD3 vs Temperature in DES2XL Mode

Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

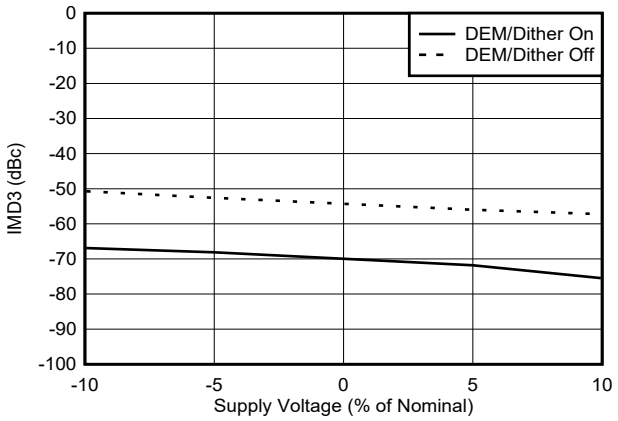


図 6-128. IMD3 vs Temperature in RF Mode at 9002 MHz

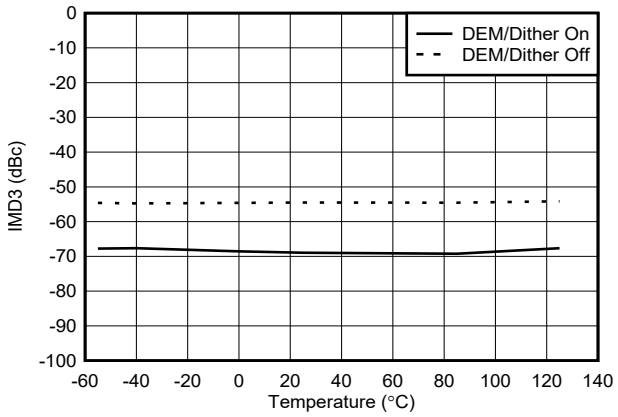


図 6-129. IMD3 vs Temperature in DES2XH Mode at 9002 MHz

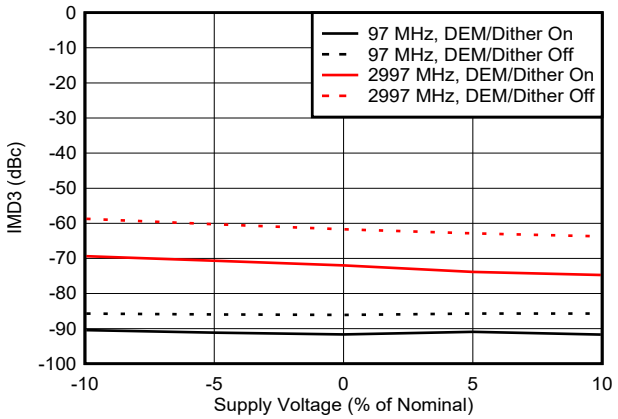


図 6-130. IMD3 vs Voltage in NRZ Mode

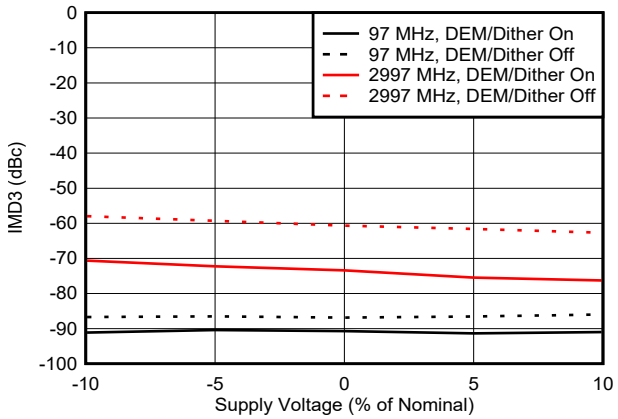


図 6-131. IMD3 vs Voltage in DES2XL Mode

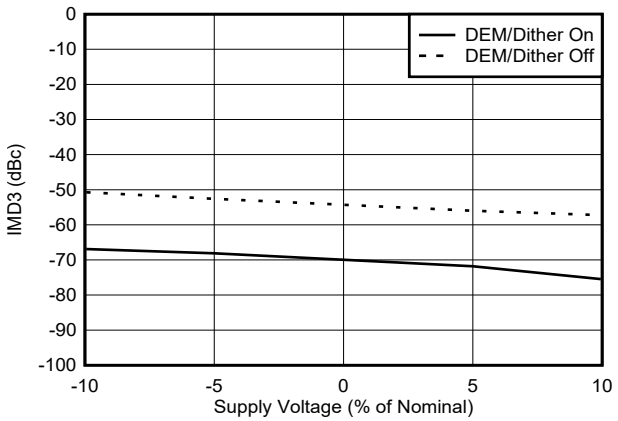


図 6-132. IMD3 vs Voltage in RF Mode at 9002 MHz

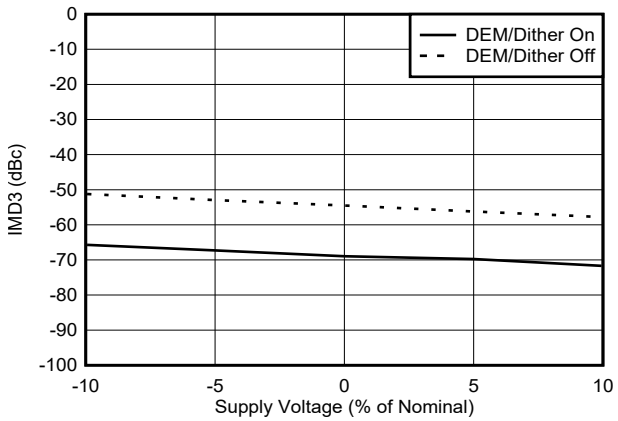


図 6-133. IMD3 vs Voltage in DES2XH Mode at 9002 MHz

Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

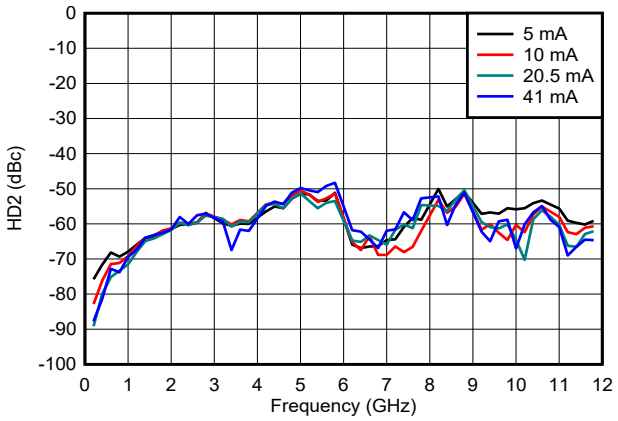


図 6-134. HD2 vs Frequency and Output Current in NRZ/RF Modes

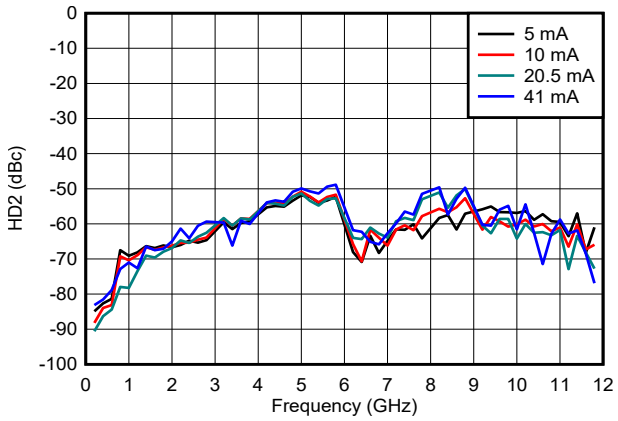


図 6-135. HD2 vs Frequency and Output Current in NRZ/RF Modes

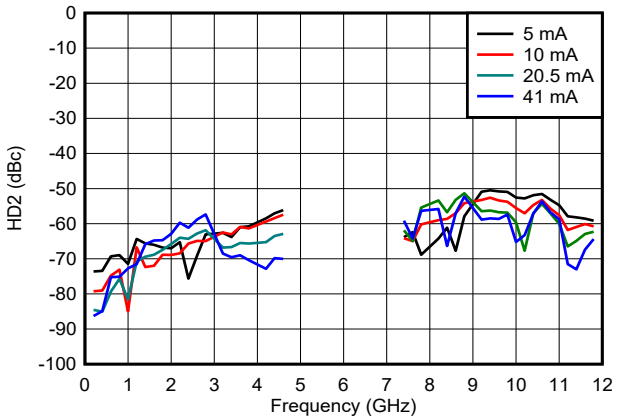


図 6-136. HD2 vs Frequency and Output Current in DES2X Modes

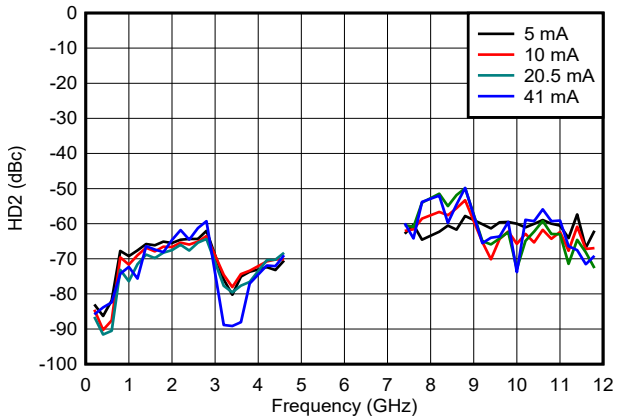


図 6-137. HD2 vs Frequency and Output Current in DES2X Modes

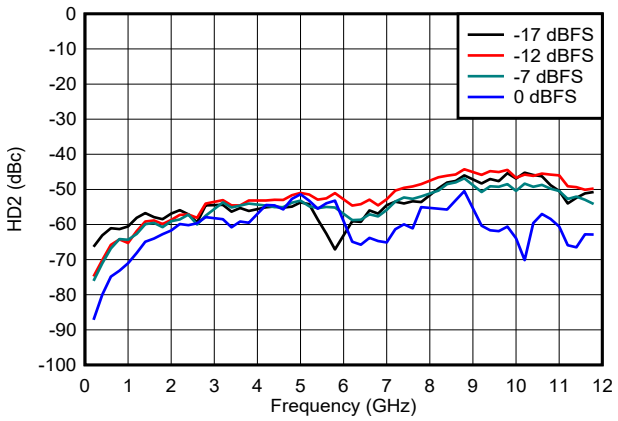


図 6-138. HD2 vs Frequency and Digital Amplitude in NRZ/RF Modes


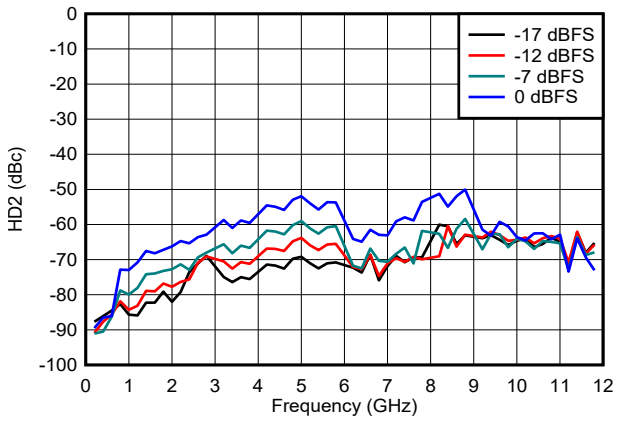


図 6-139. HD2 vs Frequency and Digital Amplitude in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

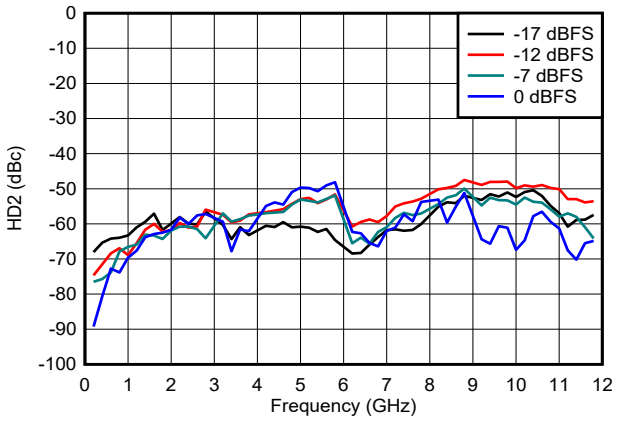


I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-140. HD2 vs Frequency and Digital Amplitude in NRZ/RF Modes

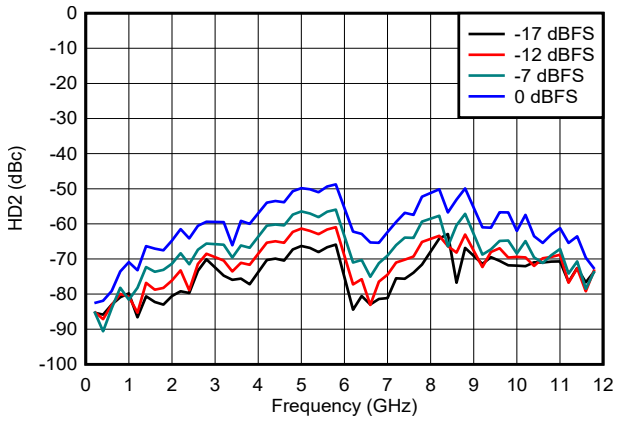


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-141. HD2 vs Frequency and Digital Amplitude in NRZ/RF Modes

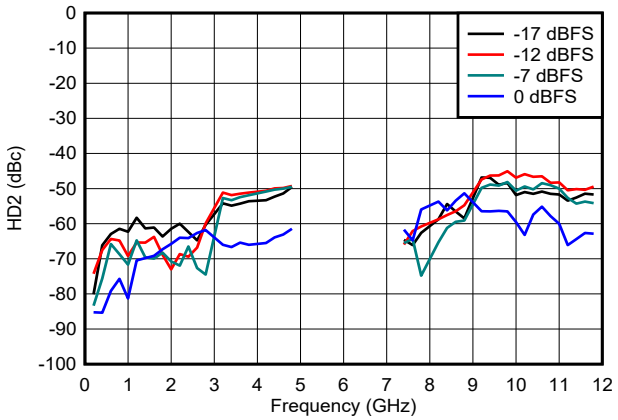


I_{FS_SWITCH} = 20.5 mA, DEM/Dither off

図 6-142. HD2 vs Frequency and Digital Amplitude in DES2X Modes

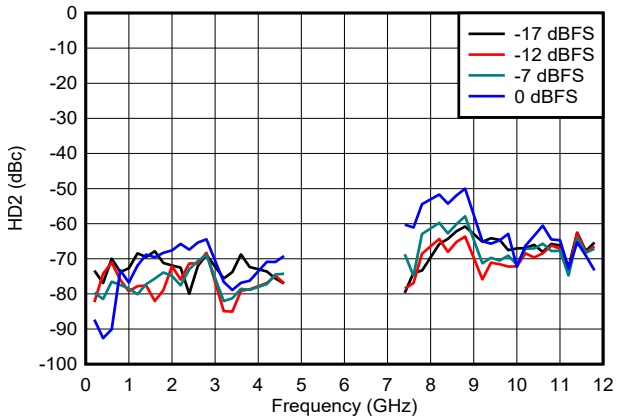


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-143. HD2 vs Frequency and Digital Amplitude in DES2X Modes

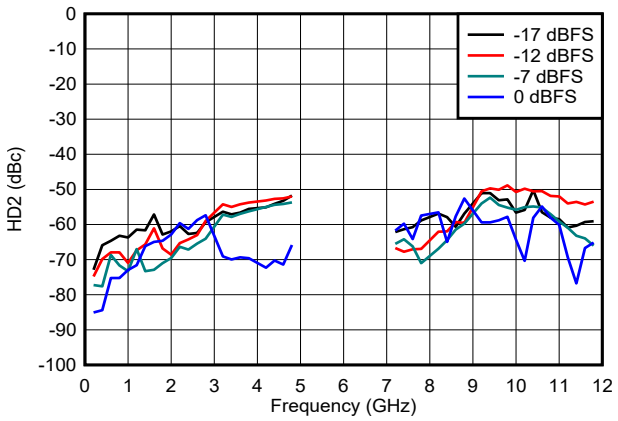

I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-144. HD2 vs Frequency and Digital Amplitude in DES2X Modes

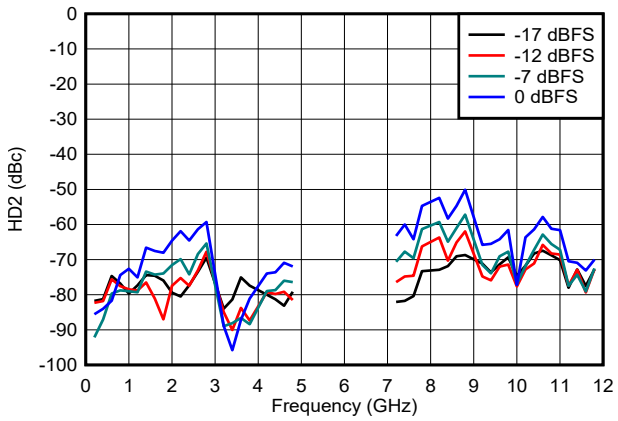


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-145. HD2 vs Frequency and Digital Amplitude in DES2X Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

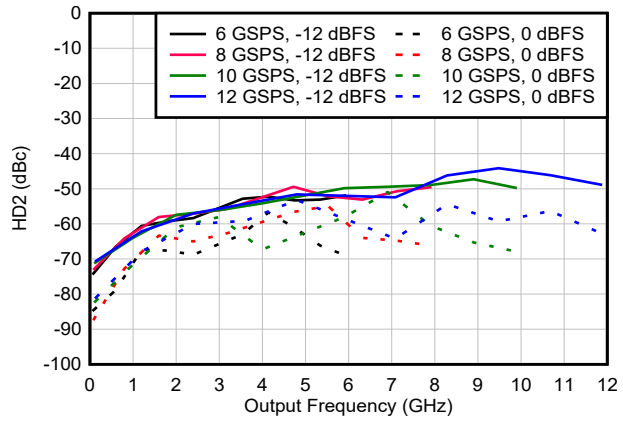


DEM/Dither on

図 6-146. HD2 vs Frequency and Sample Rate in NRZ/RF Modes

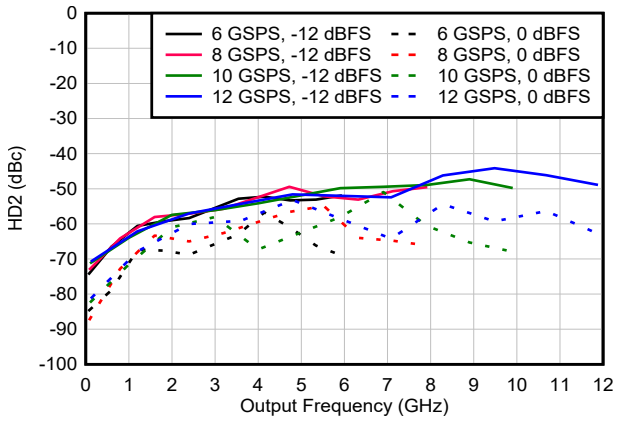


DEM/Dither off

図 6-147. HD2 vs Frequency and Sample Rate in NRZ/RF Modes

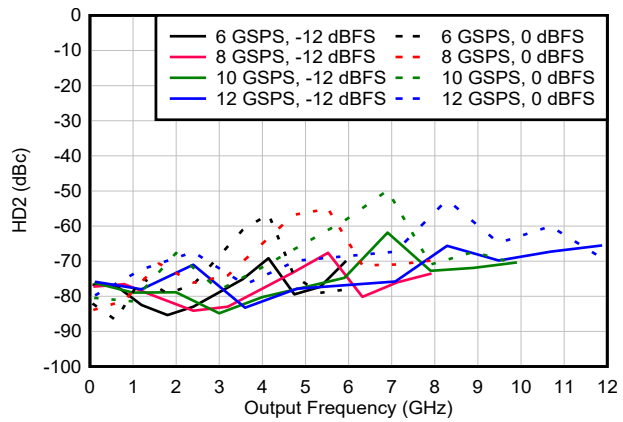


DEM/Dither on

図 6-148. HD2 vs Frequency and Sample Rate in DES2X Modes

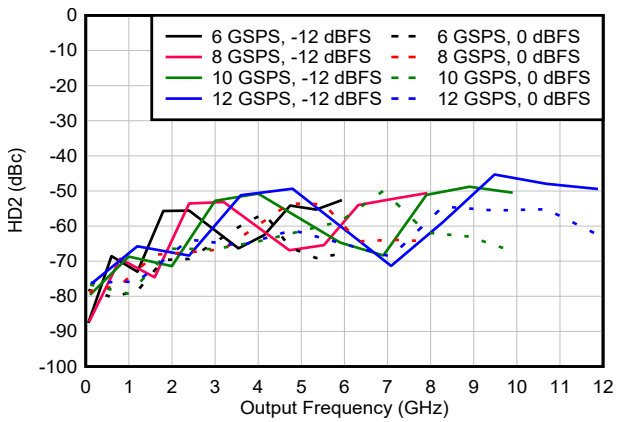


DEM/Dither off

図 6-149. HD2 vs Frequency and Sample Rate in DES2X Modes

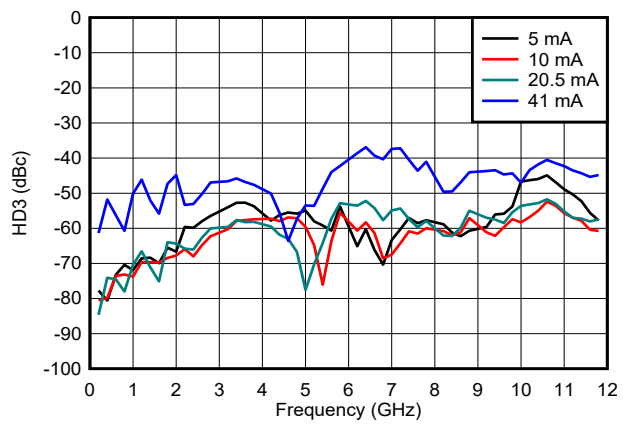

DEM/Dither off

図 6-150. HD3 vs Frequency and Output Current in NRZ/RF Modes

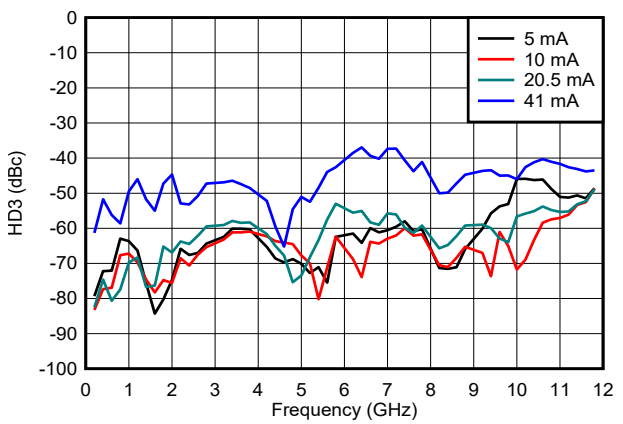


DEM/Dither on

図 6-151. HD3 vs Frequency and Output Current in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

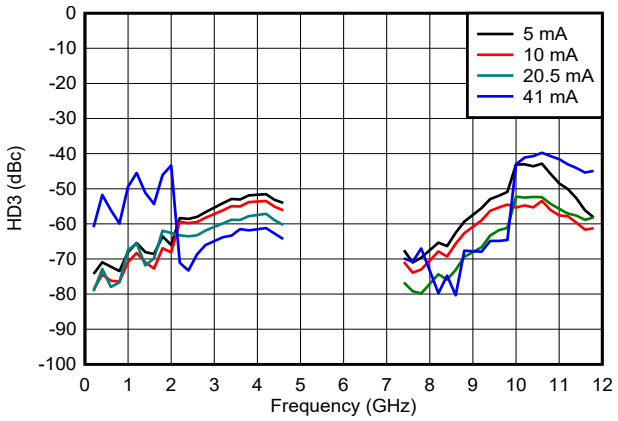


DEM/Dither off

図 6-152. HD3 vs Frequency and Output Current in DES2X Modes

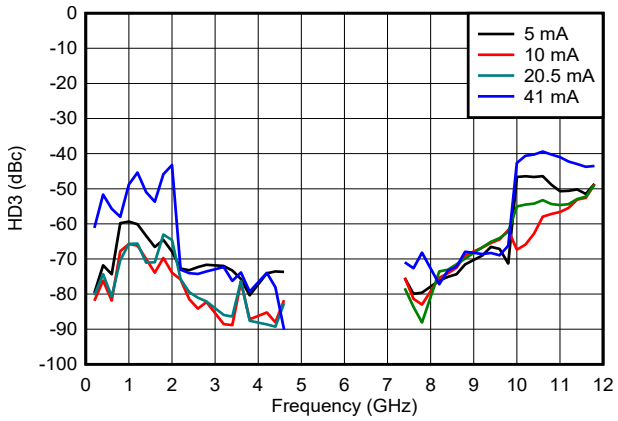


DEM/Dither on

図 6-153. HD3 vs Frequency and Output Current in DES2X Modes

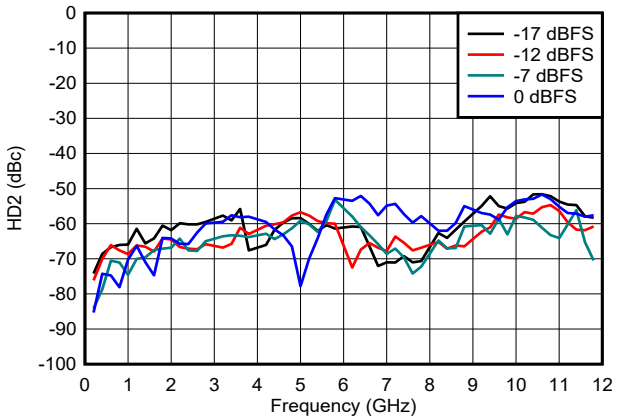


I_{FS_SWITCH} = 20.5 mA, DEM/Dither off

図 6-154. HD3 vs Frequency and Digital Amplitude in NRZ/RF Modes

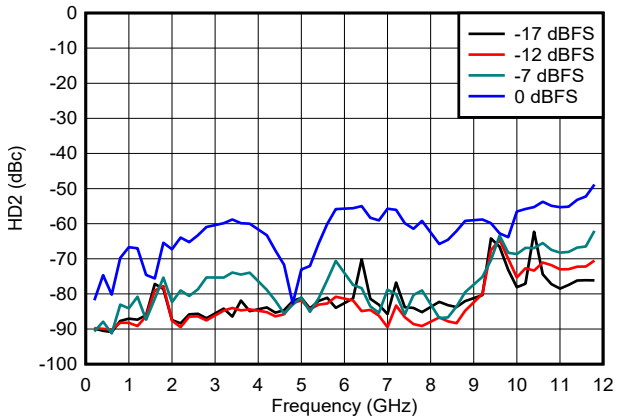


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-155. HD3 vs Frequency and Digital Amplitude in NRZ/RF Modes

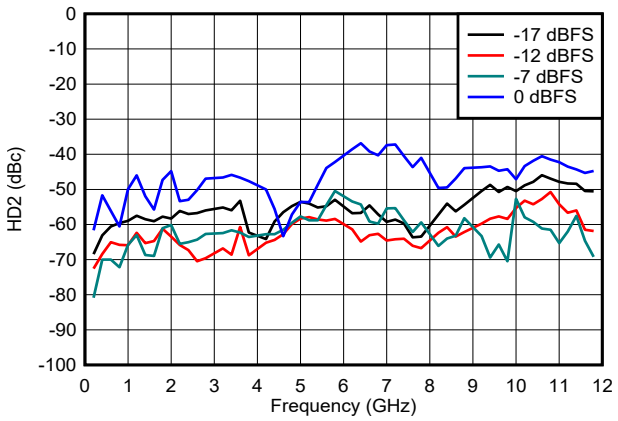

I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-156. HD3 vs Frequency and Digital Amplitude in NRZ/RF Modes

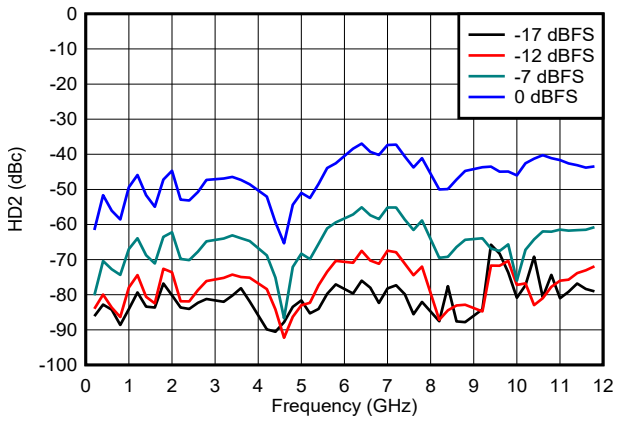


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-157. HD3 vs Frequency and Digital Amplitude in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

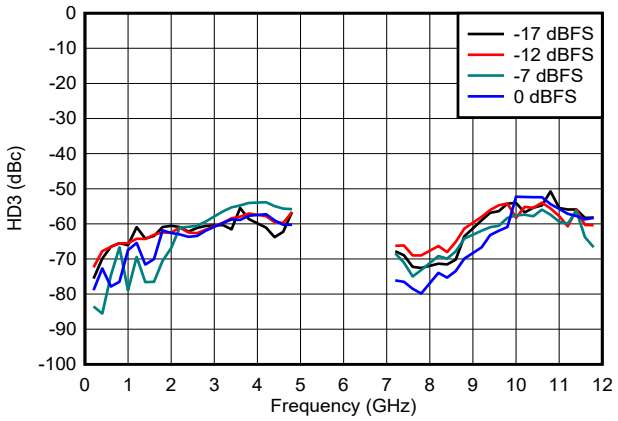


I_{FS_SWITCH} = 20.5 mA, DEM/Dither off

図 6-158. HD3 vs Frequency and Digital Amplitude in DES2X Modes

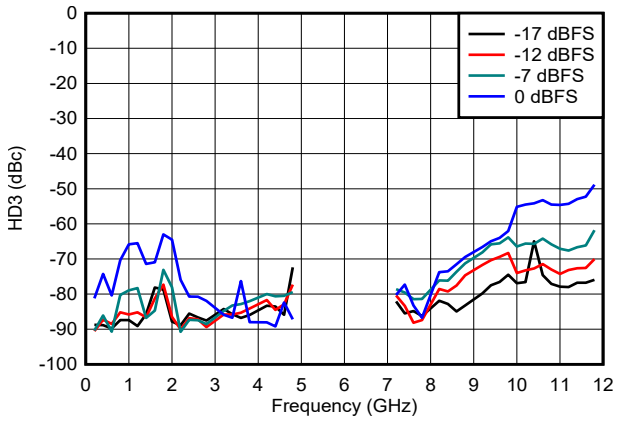


I_{FS_SWITCH} = 20.5 mA, DEM/Dither on

図 6-159. HD3 vs Frequency and Digital Amplitude in DES2X Modes

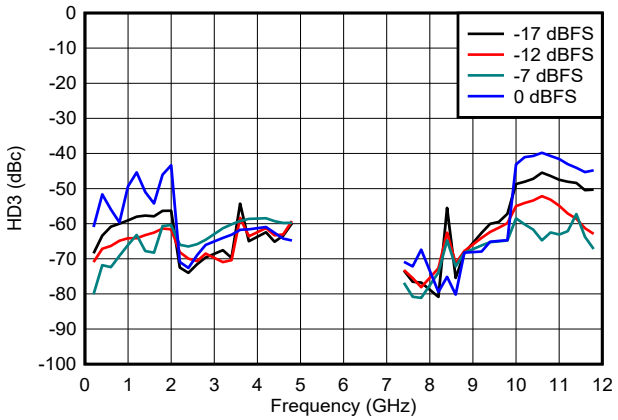


I_{FS_SWITCH} = 41 mA, DEM/Dither off

図 6-160. HD3 vs Frequency and Digital Amplitude in DES2X Modes

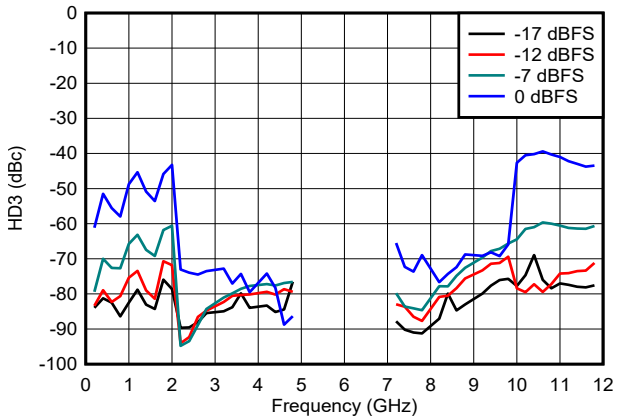


I_{FS_SWITCH} = 41 mA, DEM/Dither on

図 6-161. HD3 vs Frequency and Digital Amplitude in DES2X Modes

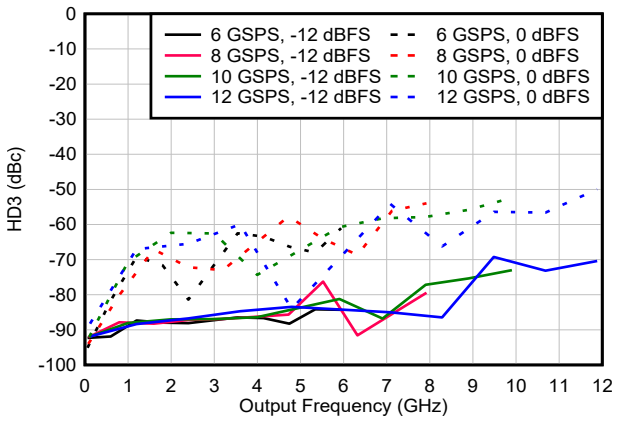

DEM/Dither on

図 6-162. HD3 vs Frequency and Sample Rate in NRZ/RF Modes

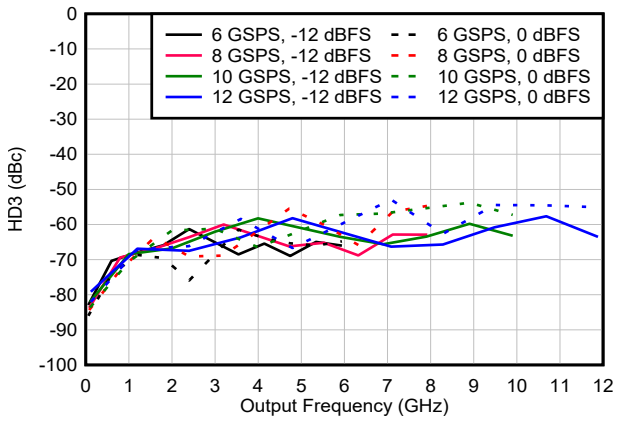


DEM/Dither off

図 6-163. HD3 vs Frequency and Sample Rate in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

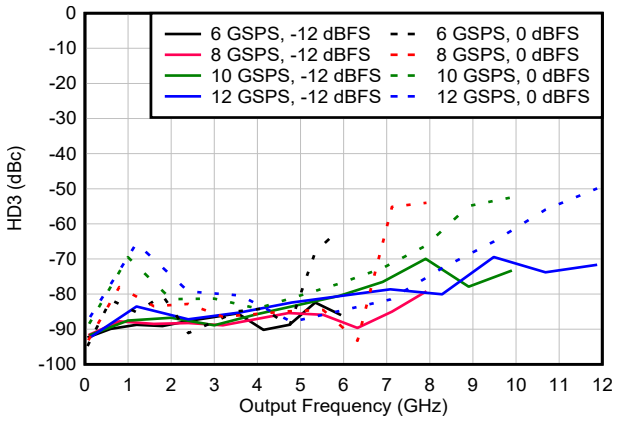


DEM/Dither on

図 6-164. HD3 vs Frequency and Sample Rate in DES2X Modes

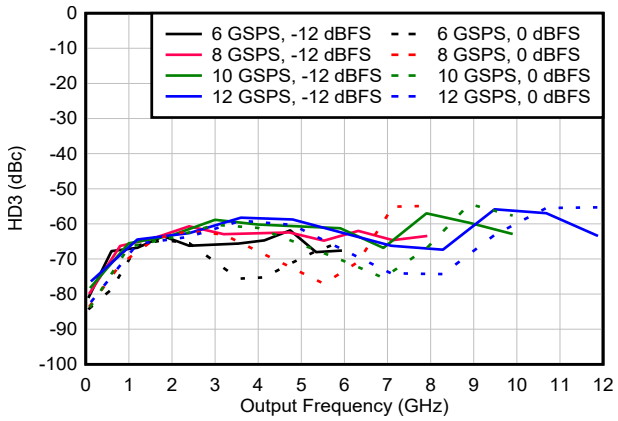


DEM/Dither off

図 6-165. HD3 vs Frequency and Sample Rate in DES2X Modes

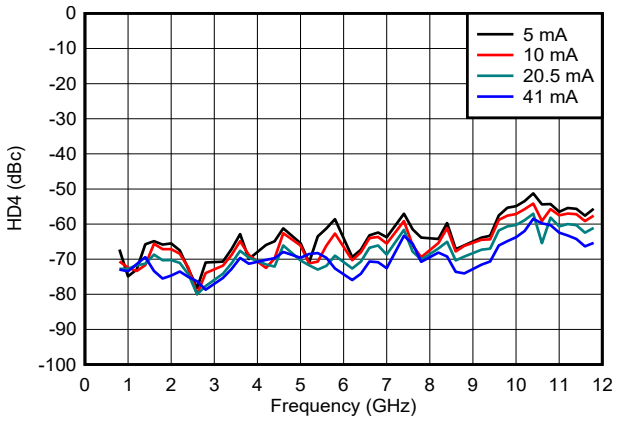


DEM/Dither off

図 6-166. HD4 vs Frequency and Output Current in NRZ/RF Modes

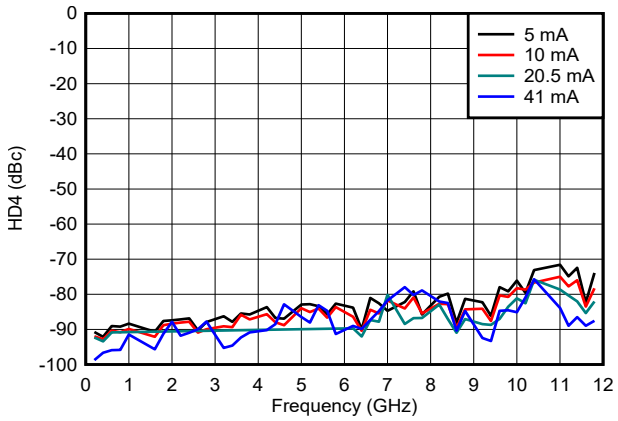


DEM/Dither on

図 6-167. HD4 vs Frequency and Output Current in NRZ/RF Modes

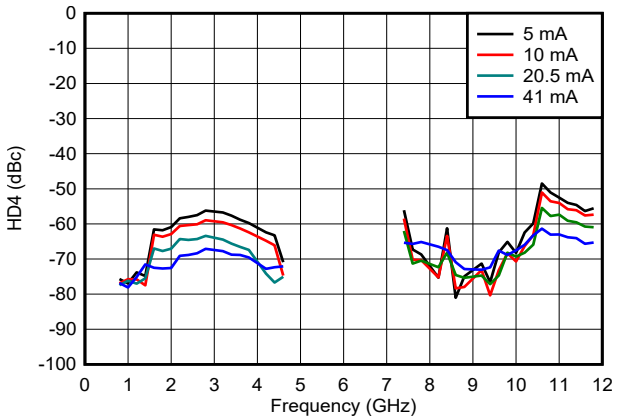

DEM/Dither off

図 6-168. HD4 vs Frequency and Output Current in DES2X Modes

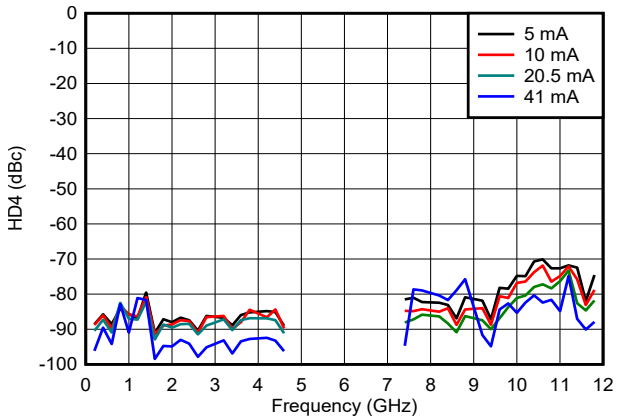

DEM/Dither on

図 6-169. HD4 vs Frequency and Output Current in DES2X Modes

Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

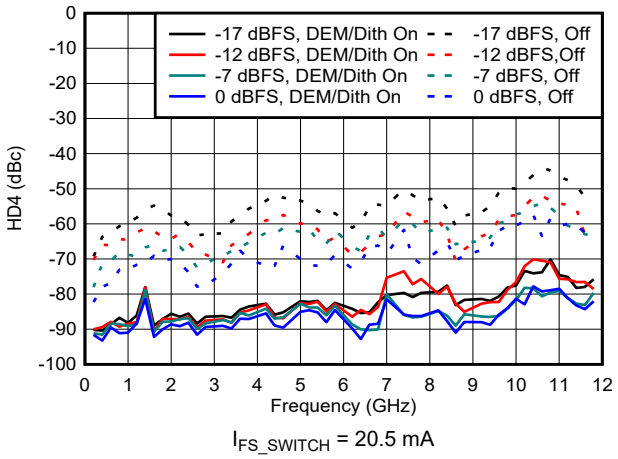


図 6-170. HD4 vs Frequency and Digital Amplitude in NRZ/RF Modes

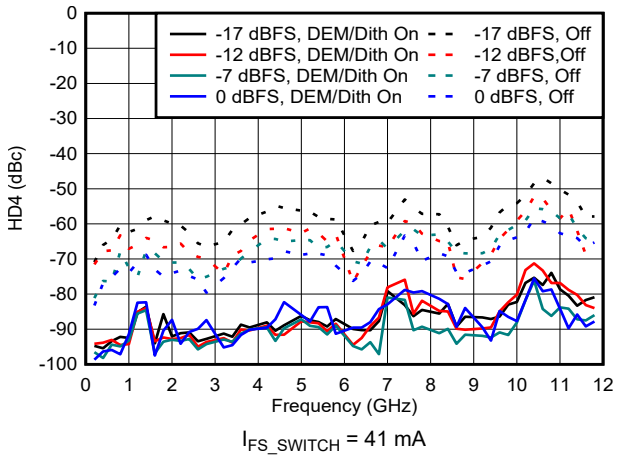


図 6-171. HD4 vs Frequency and Digital Amplitude in NRZ/RF Modes

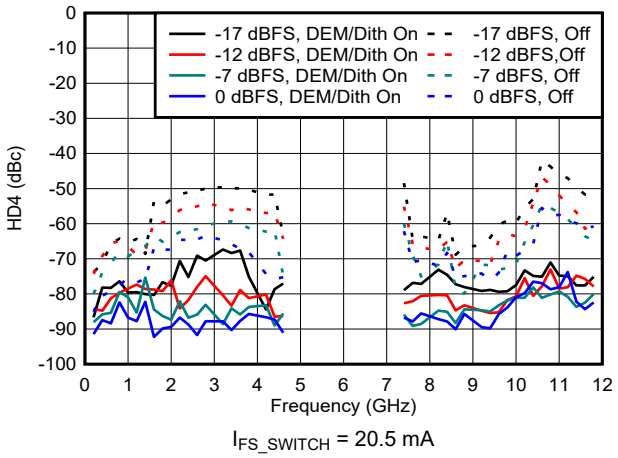


図 6-172. HD4 vs Frequency and Digital Amplitude in NRZ/RF Modes

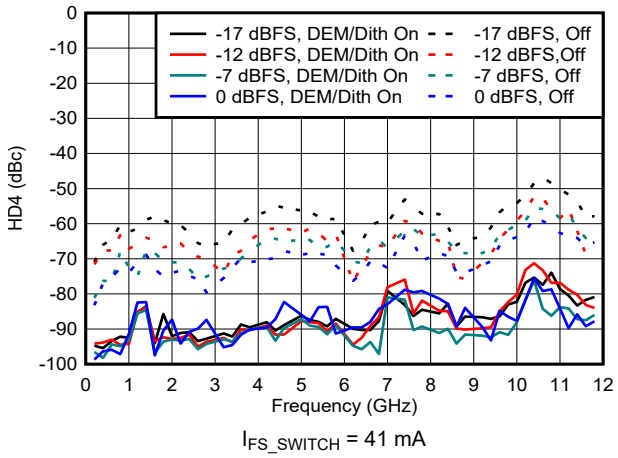


図 6-173. HD4 vs Frequency and Digital Amplitude in NRZ/RF Modes

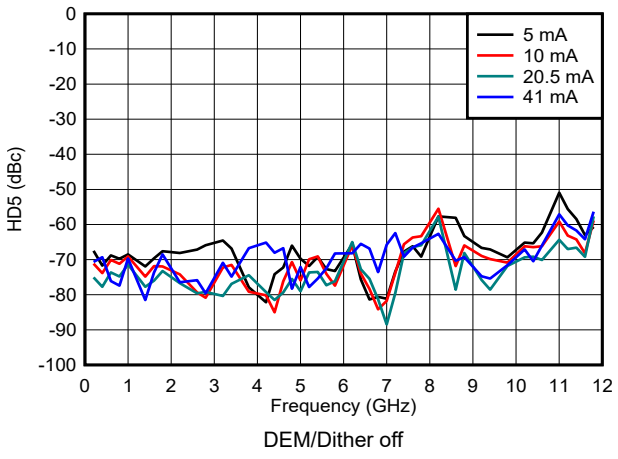


図 6-174. HD5 vs Frequency and Output Current in NRZ/RF Modes


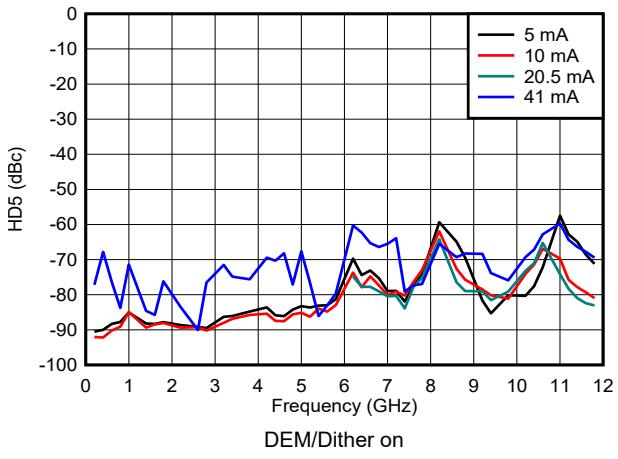


図 6-175. HD5 vs Frequency and Output Current in NRZ/RF Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

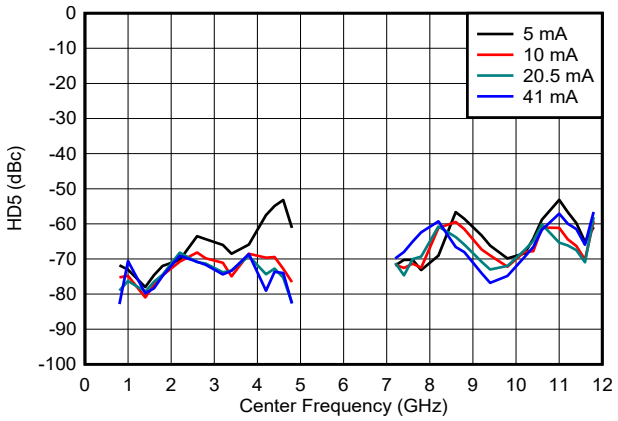


DEM/Dither off

図 6-176. HD5 vs Frequency and Output Current in DES2X Modes

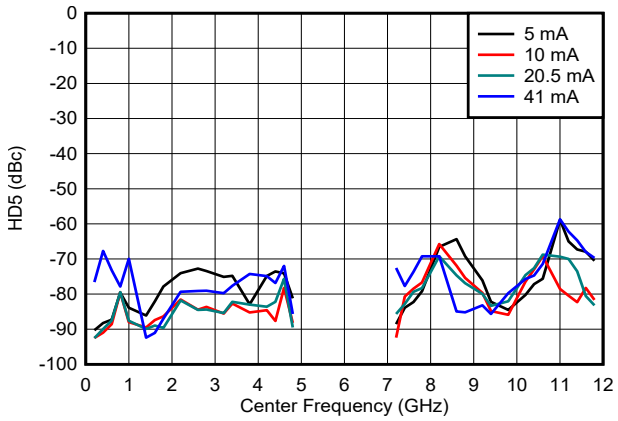


DEM/Dither on

図 6-177. HD5 vs Frequency and Output Current in DES2X Modes

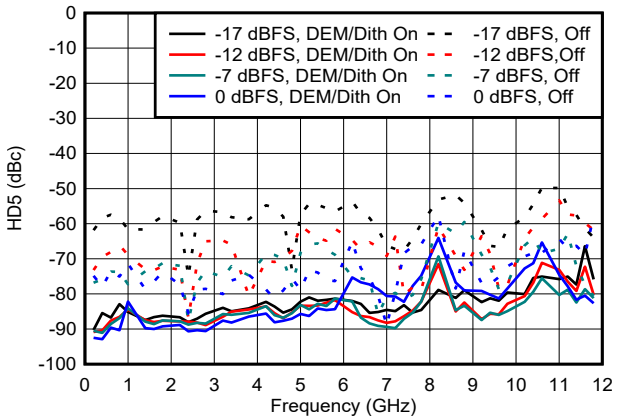


I_{FS_SWITCH} = 20.5 mA

図 6-178. HD5 vs Frequency and Digital Amplitude in NRZ/RF Modes

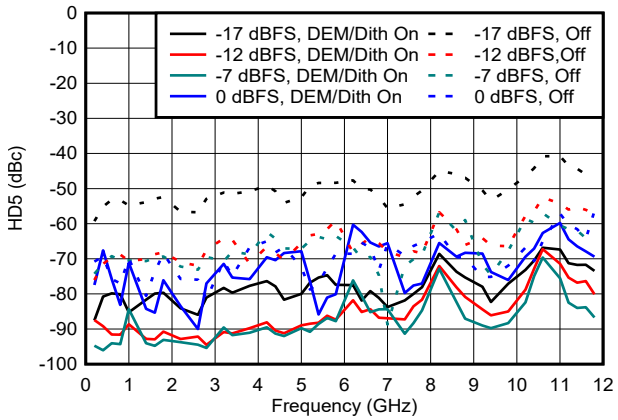


I_{FS_SWITCH} = 41 mA

図 6-179. HD5 vs Frequency and Digital Amplitude in NRZ/RF Modes

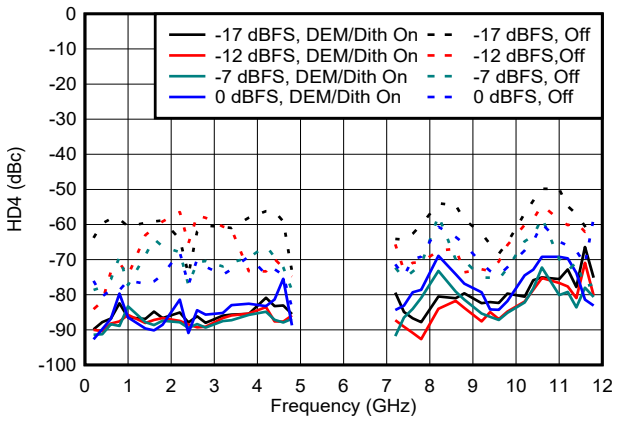

I_{FS_SWITCH} = 20.5 mA

図 6-180. HD5 vs Frequency and Digital Amplitude in DES2X Modes

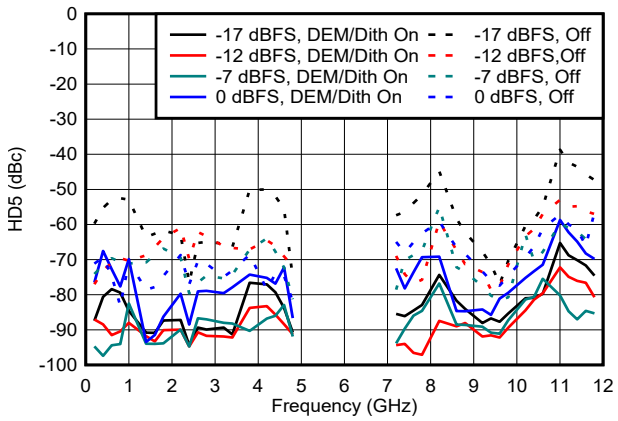


I_{FS_SWITCH} = 41 mA

図 6-181. HD5 vs Frequency and Digital Amplitude in DES2X Modes


Copyright © 2024 Texas Instruments Incorporated

6.15 Typical Characteristics: Linearity Sweeps (continued)

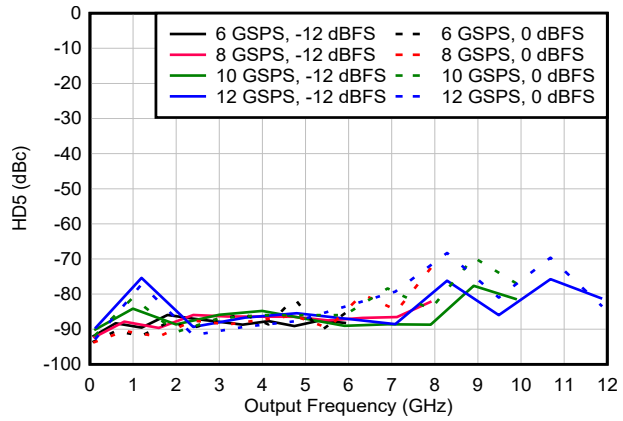


DEM/Dither on

図 6-182. HD5 vs Frequency and Sample Rate in NRZ/RF Modes

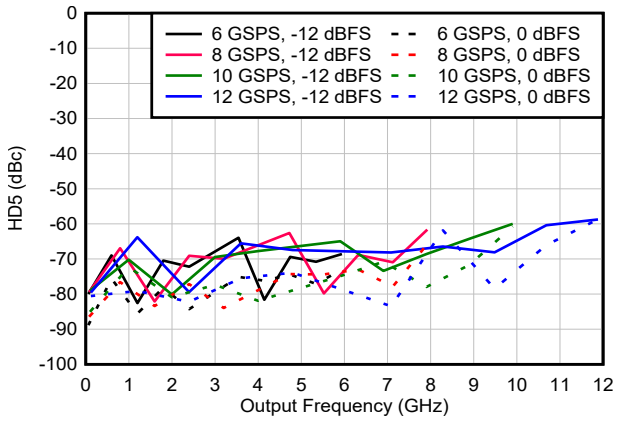


DEM/Dither off

図 6-183. HD5 vs Frequency and Sample Rate in NRZ/RF Modes

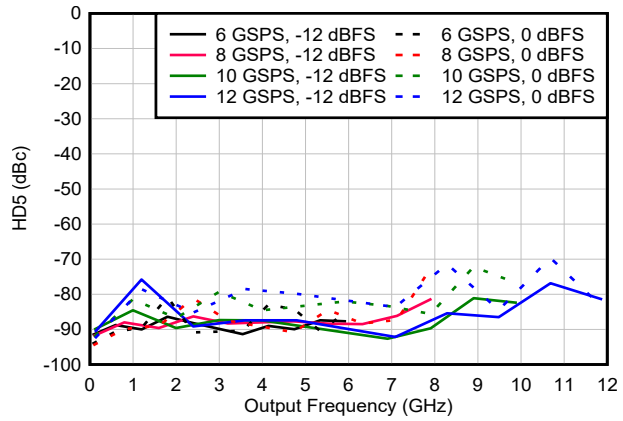


DEM/Dither on

図 6-184. HD5 vs Frequency and Sample Rate in DES2X Modes

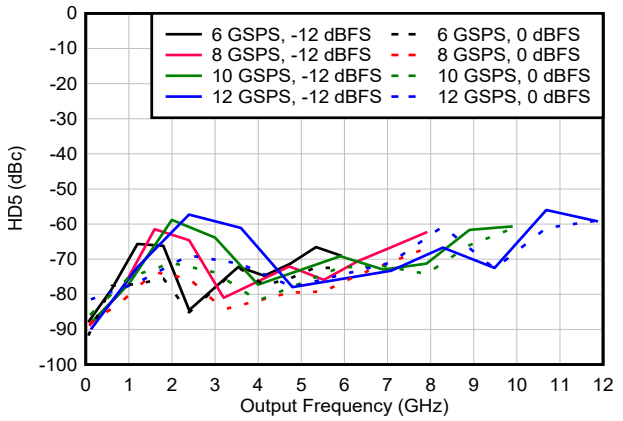

DEM/Dither off

図 6-185. HD5 vs Frequency and Sample Rate in DES2X Modes

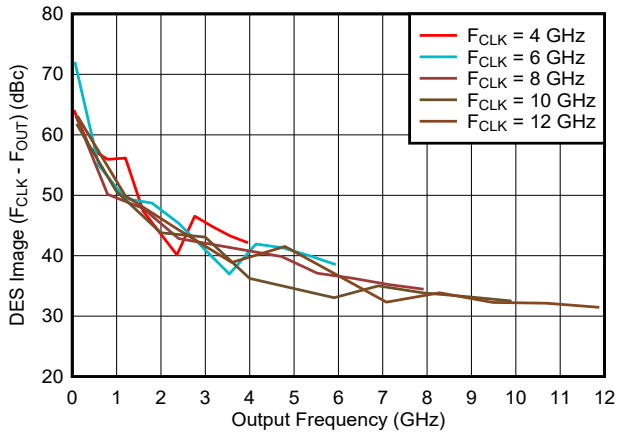

DES Image = F_{CLK} - F_{OUT}. DES Image relative to power of the tone at the same frequency as the image using the inverse DES2X mode. This removes the bandwidth difference across frequency.

図 6-186. DES Image vs Frequency and Sample Rate in DES2X Modes

Copyright © 2024 Texas Instruments Incorporated

6.16 Typical Characteristics: Modulated Waveforms

NSD at 70 MHz offset from tone, typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, DEM_ADJ = 0 when DEM enabled, NPR waveform 80% of Nyquist with 5% gap for measurement and 12 dB PAR, unless otherwise noted.

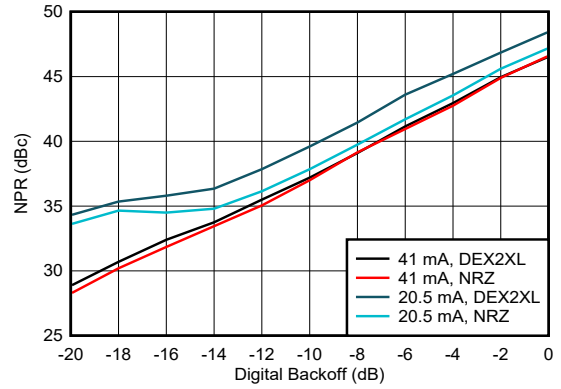


図 6-187. Noise Power Ratio vs Digital Backoff: 1st Nyquist Zone

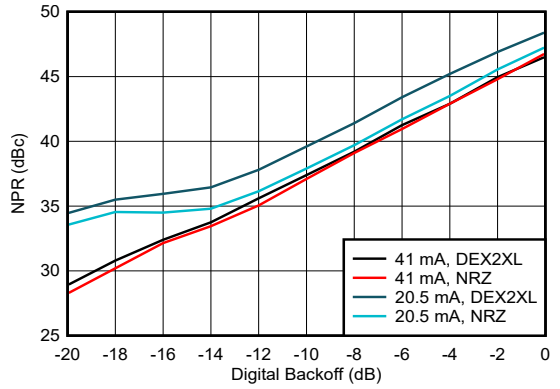


図 6-188. Noise Power Ratio vs Digital Backoff: 1st Nyquist Zone

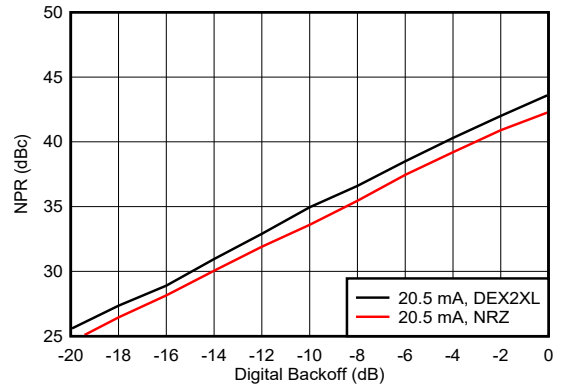


図 6-189. Noise Power Ratio vs Digital Backoff: 2nd Nyquist Zone

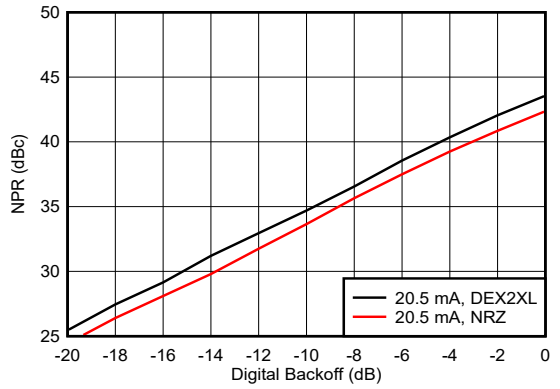


図 6-190. Noise Power Ratio vs Digital Backoff: 2nd Nyquist Zone

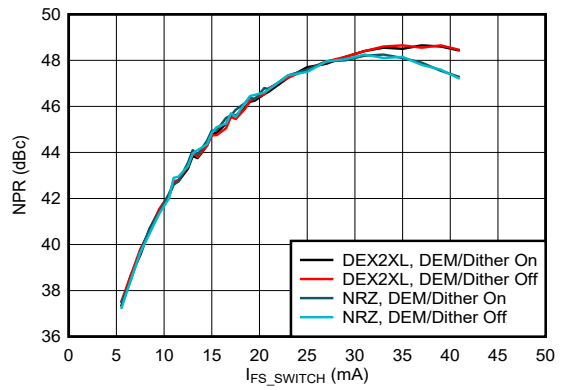


図 6-191. Noise Power Ratio vs Output Current: 1st Nyquist Zone


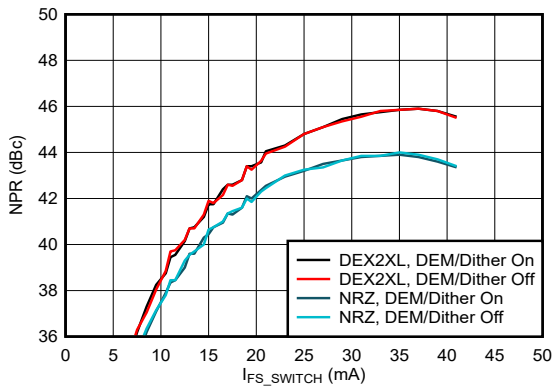


図 6-192. Noise Power Ratio vs Output Current: 2nd Nyquist Zone

Copyright © 2024 Texas Instruments Incorporated


6.17 Typical Characteristics: Phase and Amplitude Noise

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, single tone amplitude = 0 dBFS, f_{OUT} = 1 GHz, unless otherwise noted. Input clock contribution removed by phase noise analyzer.

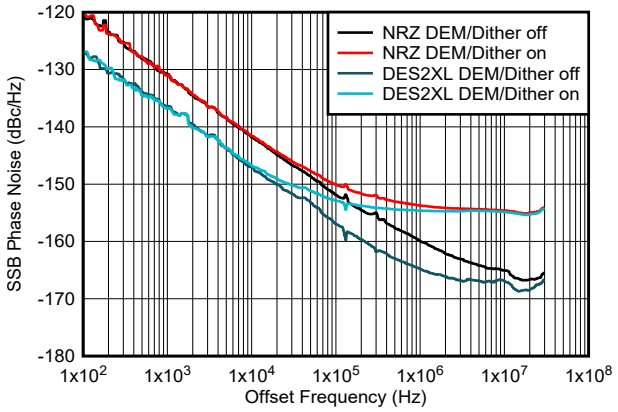


f_{CLK} = 8 GHz

図 6-193. Phase Noise vs Offset Frequency at 1 GHz

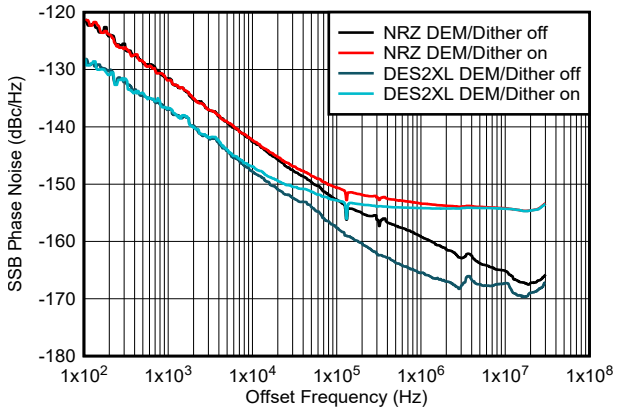


f_{CLK} = 12 GHz

図 6-194. Phase Noise vs Offset Frequency at 1 GHz

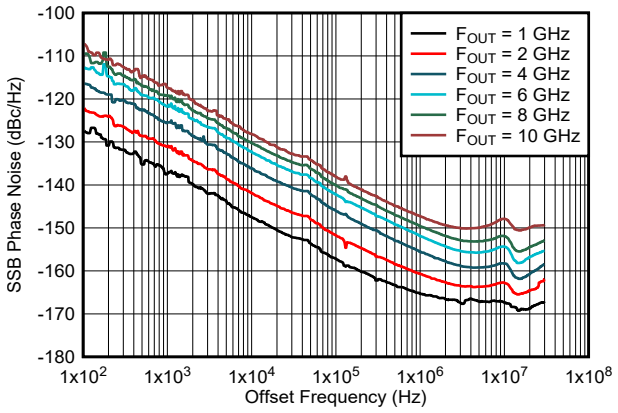


DES2XL and DES2XH modes, DEM/Dither off

図 6-195. Phase Noise vs Offset Frequency and Output Frequency

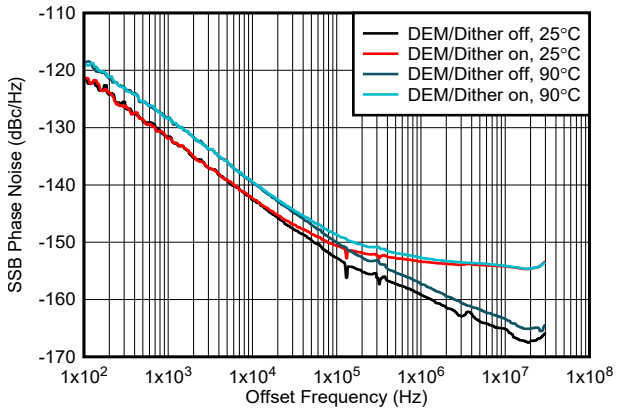


NRZ mode

図 6-196. Phase Noise vs Offset Frequency at 1 GHz

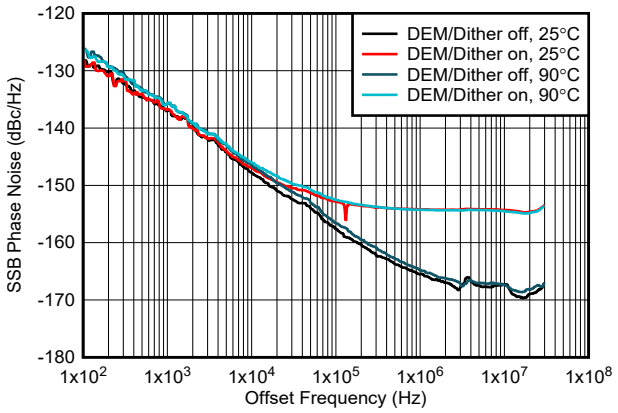

DES2XL mode

図 6-197. Phase Noise vs Offset Frequency at 1 GHz

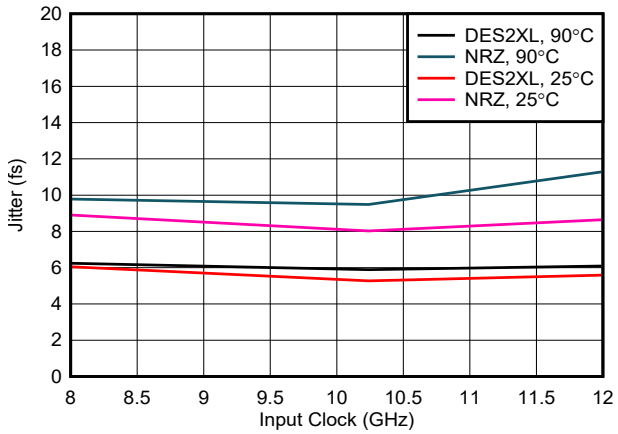


Integrated from 100 Hz to 30 MHz, DEM/Dither off

図 6-198. Jitter vs Input Clock

Copyright © 2024 Texas Instruments Incorporated

6.17 Typical Characteristics: Phase and Amplitude Noise (continued)

Typical values at T_A = +25°C, minimum and maximum values over operating free-air temperature range, typical supply voltages, f_{CLK} = 12 GHz, single tone amplitude = 0 dBFS, f_{OUT} = 1 GHz, unless otherwise noted. Input clock contribution removed by phase noise analyzer.

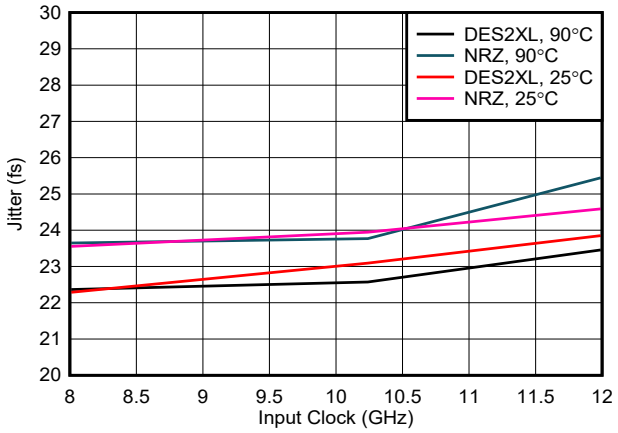

Integrated from 100 Hz to 30 MHz, DEM/Dither on

図 6-199. Jitter vs Input Clock



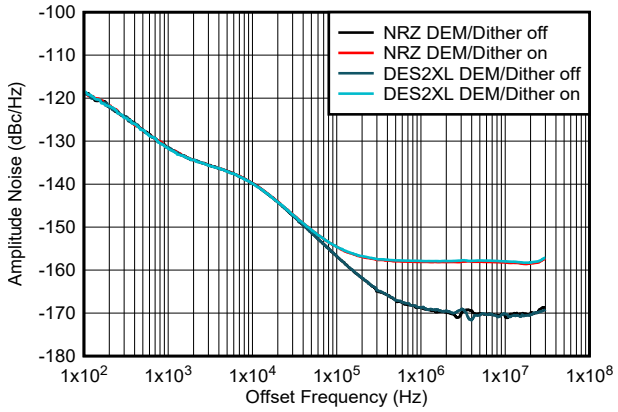


図 6-200. Amplitude Noise vs Offset Frequency at 1 GHz

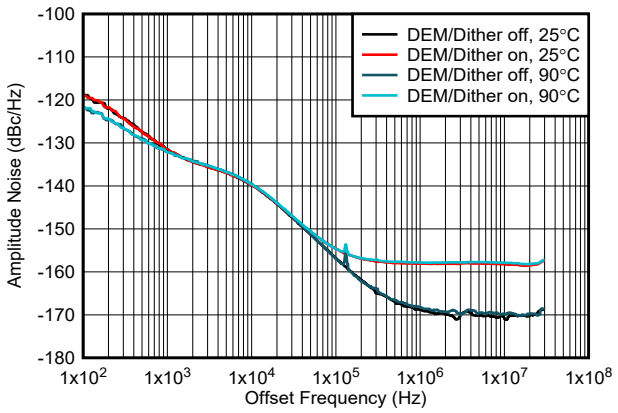

NRZ Mode

図 6-201. Amplitude Noise vs Offset Frequency and Temperature at 1 GHz

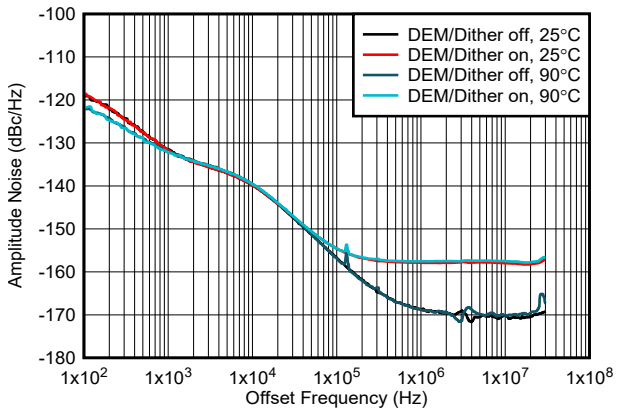


DES2XL Mode

図 6-202. Amplitude Noise vs Offset Frequency and Temperature at 1 GHz

Copyright © 2024 Texas Instruments Incorporated


6.18 Typical Characteristics: Power Dissipation and Supply Currents

Typical values at T_A = +25°C and nominal supply voltages, I_{FS_SWITCH} = 20.5 mA, 1 DAC device = DAC39RFS12, 2 DAC device = DAC39RF12 except where noted.

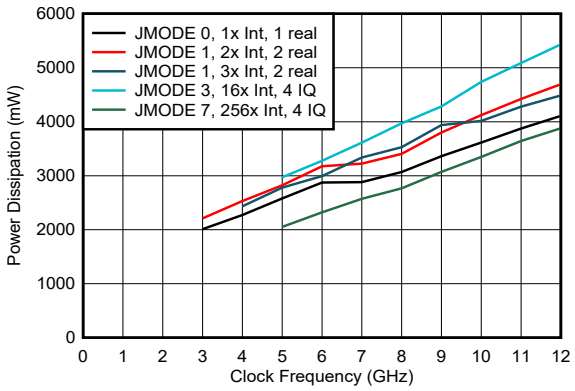


I_{FS_SWITCH} = 20.5 mA

図 6-203. Power Dissipation vs Clock Frequency and Digital Mode

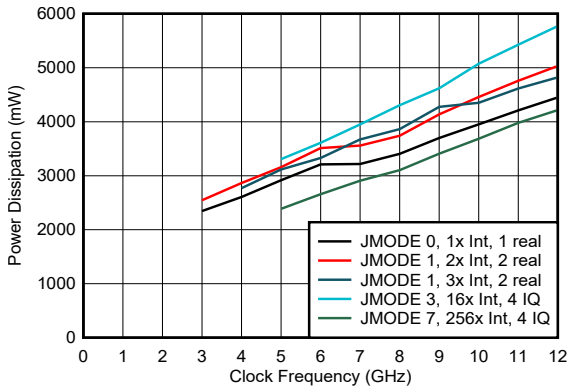


I_{FS_SWITCH} = 41 mA

図 6-204. Power Dissipation vs Clock Frequency and Digital Mode

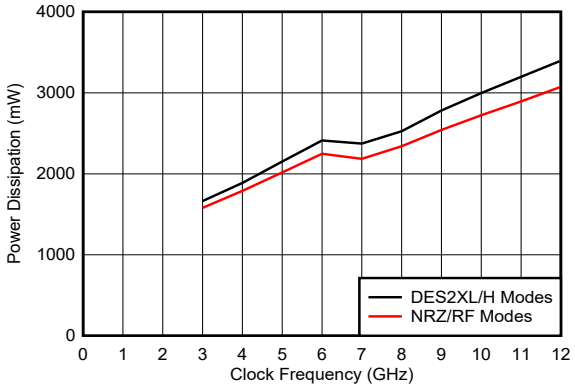


JMODE 0, single DAC Device

図 6-205. Power Dissipation vs Clock Frequency and DAC Mode

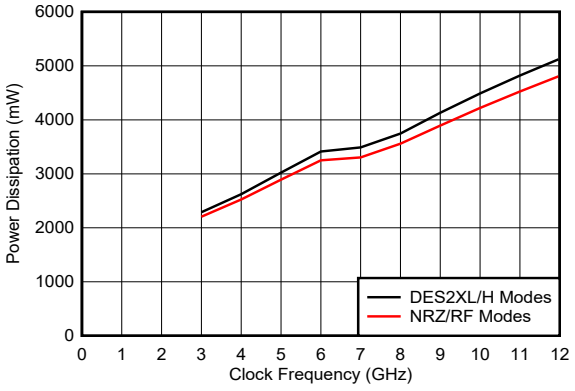


JMODE 1, 2x interpolation, dual DACs

図 6-206. Power Dissipation vs Clock Frequency and DAC Mode

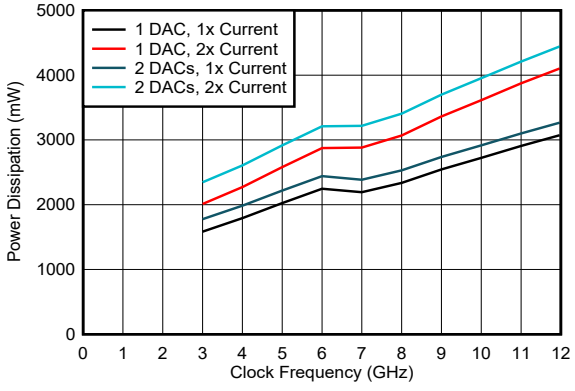

JMODE 0, 1x interpolation, single DAC device vs dual DAC device

図 6-207. Power Dissipation vs Clock Frequency and DAC Mode

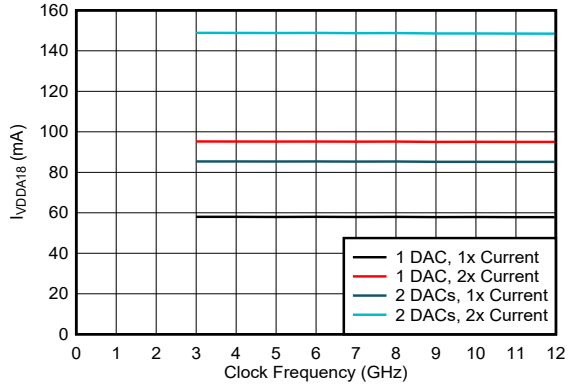


Independent of JMODE and interpolation, single DAC device vs dual DAC device

図 6-208. VDDA18 Current vs Clock Frequency and DAC Mode

Copyright © 2024 Texas Instruments Incorporated


6.18 Typical Characteristics: Power Dissipation and Supply Currents (continued)

Typical values at T_A = +25°C and nominal supply voltages, I_{FS_SWITCH} = 20.5 mA, 1 DAC device = DAC39RFS12, 2 DAC device = DAC39RF12 except where noted.

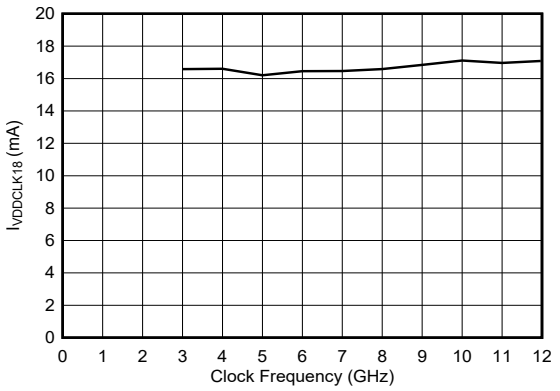


Independent of JMODE, interpolation, and single/dual DAC device

図 6-209. VDDCLK18 Current vs Clock Frequency

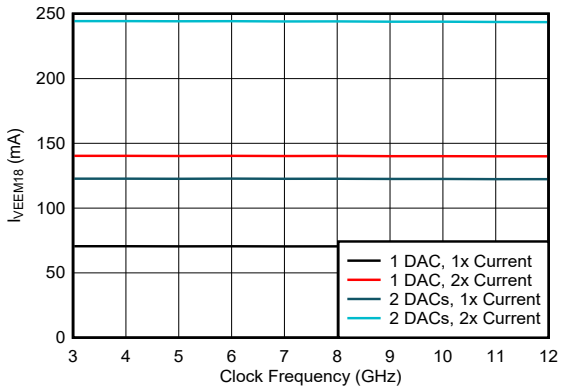


Independent of JMODE, interpolation, single DAC device vs dual DAC device

図 6-210. VEEM18 Current vs Clock Frequency and DAC Mode

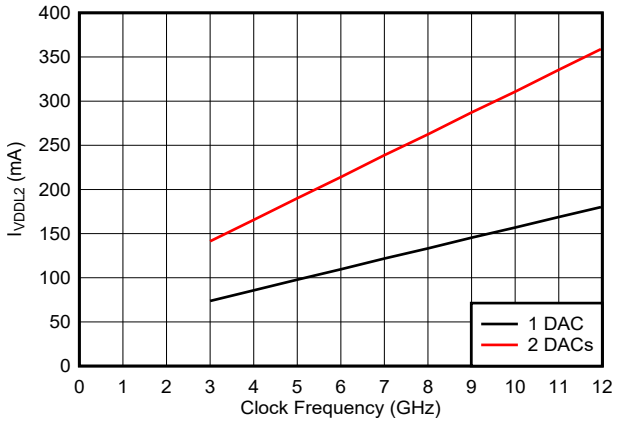


Independent of JMODE, Interpolation, single DAC device vs dual DAC device

図 6-211. VDDLx Current vs Clock Frequency

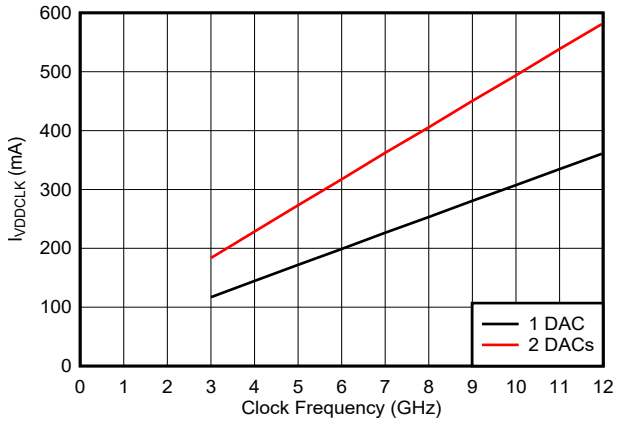


Independent of JMODE, Interpolation, single DAC device vs dual DAC device

図 6-212. VDDCLK Current vs Clock Frequency

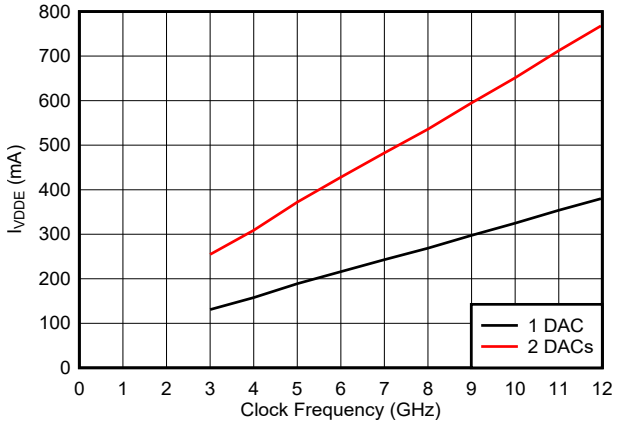

Independent of JMODE, Interpolation, single DAC device vs dual DAC device

図 6-213. VDDE Current vs Clock Frequency

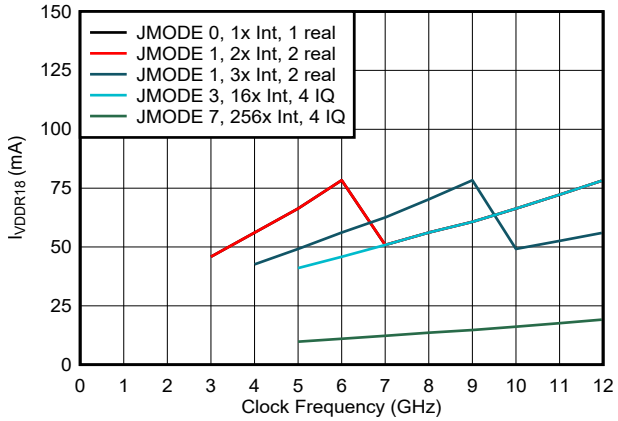


Dependent on # of Serdes and baud rate

図 6-214. VDDR18 Current vs Clock Frequency and Mode

Copyright © 2024 Texas Instruments Incorporated


6.18 Typical Characteristics: Power Dissipation and Supply Currents (continued)

Typical values at T_A = +25°C and nominal supply voltages, I_{FS_SWITCH} = 20.5 mA, 1 DAC device = DAC39RFS12, 2 DAC device = DAC39RF12 except where noted.

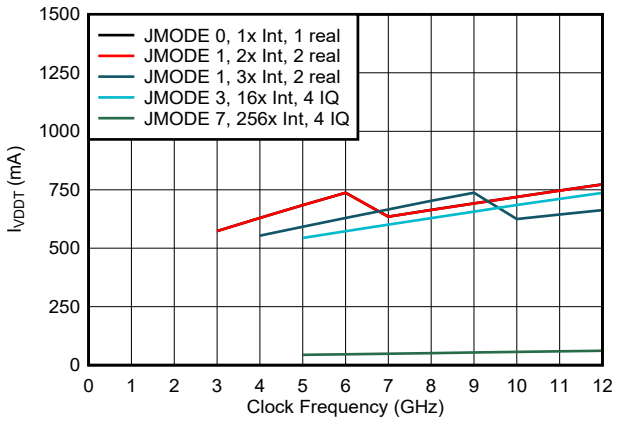


Dependent on # of Serdes and baud rate

図 6-215. VDDT Current vs Clock Frequency and Mode

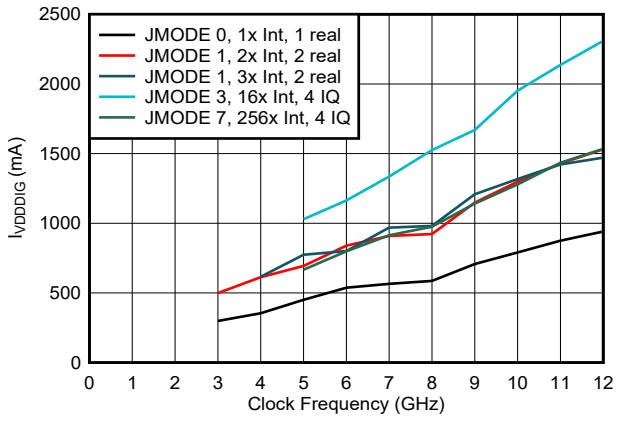

Dual DAC Device

図 6-216. VDDDIG Current vs Clock Frequency and Digital Mode

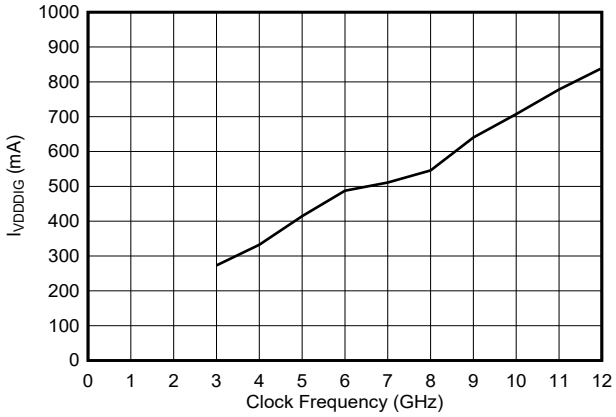

single DAC device, JMODE 0, bypass mode

図 6-217. VDDDIG Current vs Clock Frequency

Copyright © 2024 Texas Instruments Incorporated

7 Detailed Description

7.1 Overview

The DAC39RF12 および RFS12 are a family of single and dual channel digital-to-analog converters (DAC) with 16-bit resolution. The device can be used as single channel or dual channel non-interpolation DACs. The device can also be used as interpolating DACs in either direct RF sampling mode or baseband mode, supporting up to four complex (IQ) input streams that can be combined at different RF frequencies. The maximum input data rate is 24 GSPS in single channel mode or 12 GSPS in dual channel mode or baseband mode. The device can generate signals of up to 12, 7.8, 6 GHz signal bandwidth (8, 12, 16-bit input resolution) at carrier frequencies exceeding 8 GHz enabling direct sampling through C-band and into X-band.

The 64-bit NCO frequency resolution and infinite frequency hopping with phase coherence, continuity and reset options makes the device ideally suited for arbitrary waveform generation (AWG) and direct digital synthesis (DDS).

A JESD204C compatible serial interface with 8b/10b and 64b/66b encoding options has 16 receiver pairs capable of up to 12.8 Gbps. The interface is JESD204C subclass-1 compliant for deterministic latency and multi-device synchronization through the use of SYSREF. The SYSREF Windowing feature allows for automatic SYSREF timing calibration.

7.2 Functional Block Diagrams

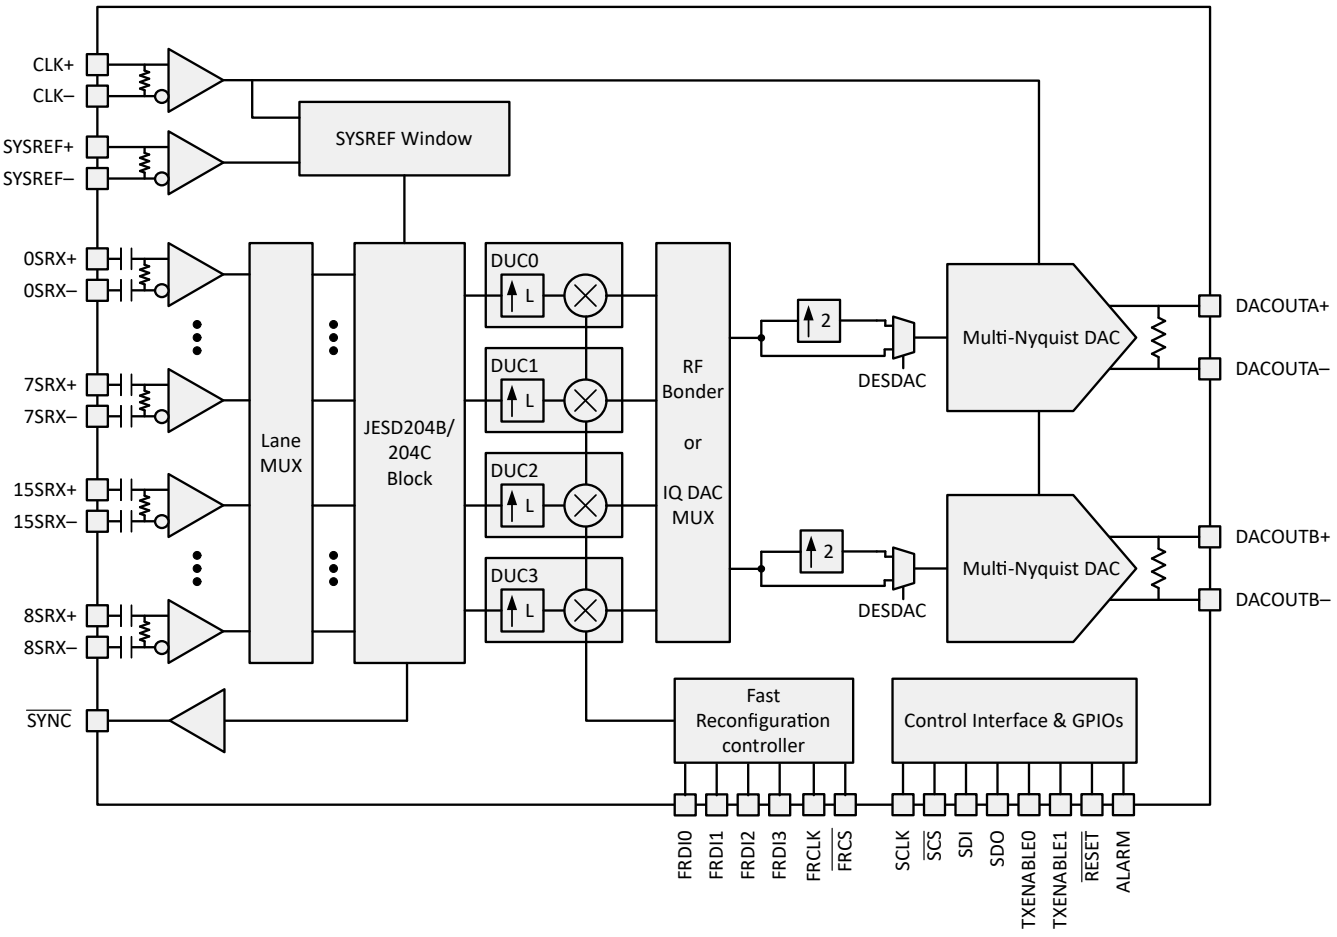


図 7-1. Dual Channel Device

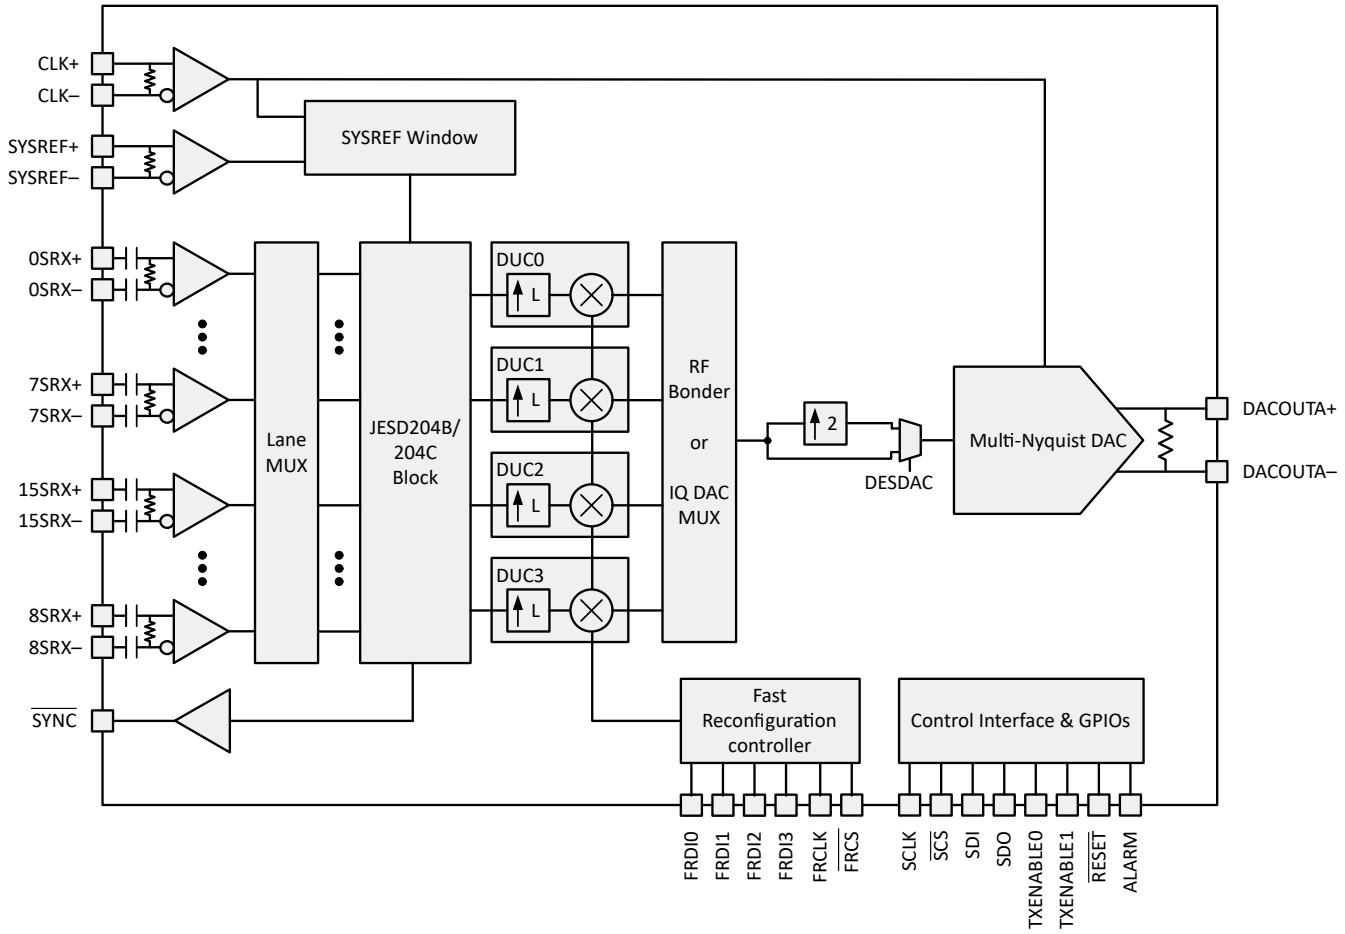


図 7-2. Single Channel Device

Copyright © 2024 Texas Instruments Incorporated

7.3 Feature Description

This section describes the analog and digital features of the device.

7.3.1 DAC Output Modes

The DAC39RF12 および RFS12 consists of a multi-Nyquist DAC core capable of direct transmission through the third Nyquist zone. The high output frequency capabilities are enabled by specific output switching waveforms that alter the output waveform, changing the frequency response of the DAC to enhance the DAC images in alternate Nyquist zones. The desired switching waveforms can be selected through the serial interface. A list of modes along with their properties and uses are provided in 表 7-1. The responses shown in this section do not consider the effect of the DAC analog bandwidth or external passive or active signal chain components.

表 7-1. Summary of Multi-Nyquist Output Modes and Uses

DAC OUTPUT MODE	PASSES DC	Optimal Frequency Range	PEAK OUTPUT POWER(1)	Other
Non-return-to-zero (NRZ)	Yes	0 - F_{CLK}/2	0 dBFS	
Return-to-zero (RTZ)	Yes	0 - F_{CLK}	–6 dBFS	
Radio Frequency (RF)	No	F_{CLK}/2 - F_{CLK}	–2.8 dBFS	
Dual Edge Sampling (DES)	Yes	0 - F_{CLK}	0 dBFS	Duty cycle image at F_{CLK} - F_{OUT}

(1) Peak power here does not include the effect of analog output bandwidth due to parasitic passive components or external components

Copyright © 2024 Texas Instruments Incorporated

7.3.1.1 NRZ Mode

Non-return-to-zero (NRZ) mode is the standard zero-order hold mode. The timing diagram for NRZ mode is given in 図 7-3. The sample is output from the DAC on the CLK rising edge and held until the rising edge. This output waveform can be thought of as a rectangular filter in time domain resulting in a sinc response in the frequency domain. The result is a frequency response that has significant power loss in the 2nd and 3rd Nyquist zones and a null at the sampling rate and is meant for 1st Nyquist zone operation only. A plot of the frequency response of NRZ mode is shown in 図 7-4.

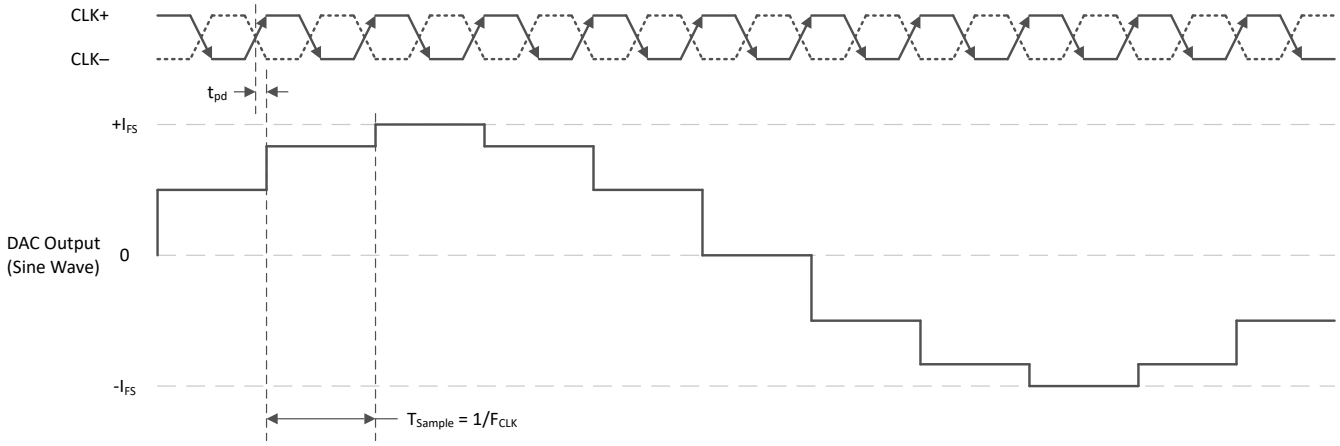


図 7-3. NRZ Mode Timing Diagram

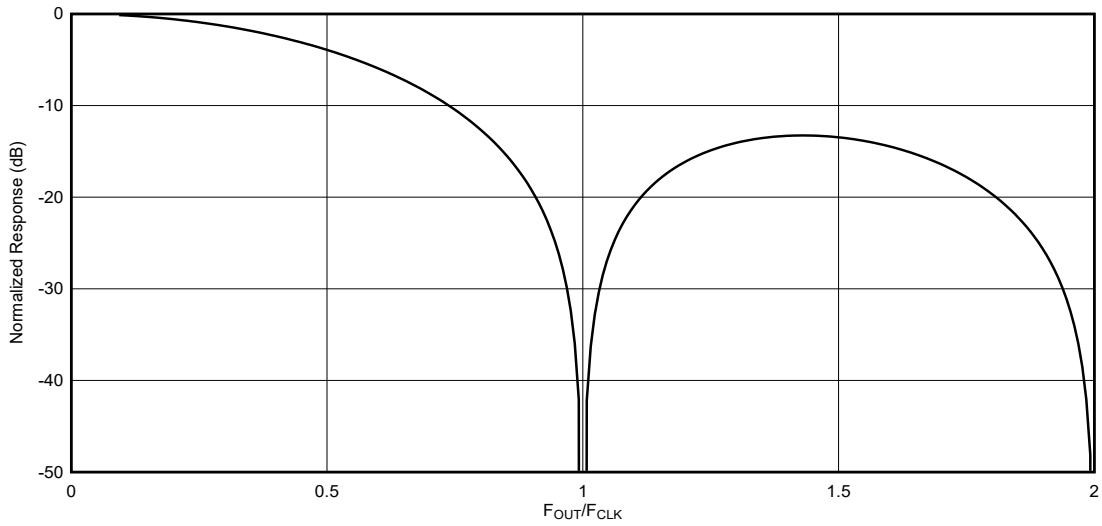


図 7-4. NRZ Mode Output Frequency Response

7.3.1.2 RTZ Mode

Return-to-zero (RTZ) mode is similar to the standard zero-order hold mode used by DACs, however the response adds a return-to-zero pulse for the second half of the sample period. The timing diagram for RTZ mode is given in 図 7-5. This output waveform can be thought of as a rectangular filter in time domain that is half the length of that which is used in NRZ mode, resulting in a sinc response that is expanded by two times in the frequency domain. The result is a frequency response with less power loss in the 2nd Nyquist zone and a null at twice the sampling rate. It can be used for 1st and 2nd Nyquist zone applications. The return-to-zero pulse provides flatter response through the first Nyquist zone at a tradeoff of 6-dB lower peak power. A plot of the frequency response of RTZ mode is shown in 図 7-6.

Copyright © 2024 Texas Instruments Incorporated

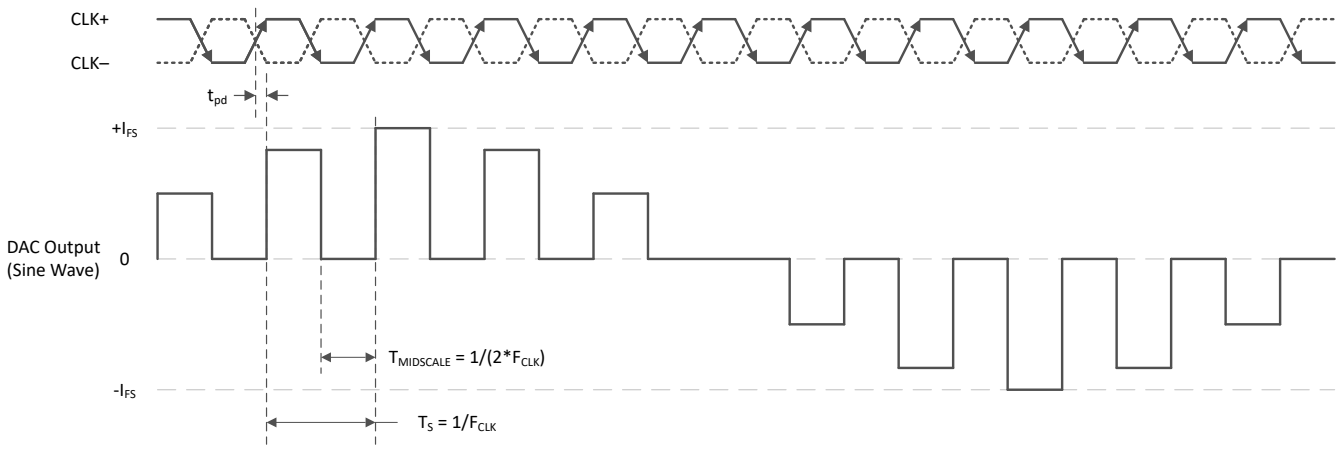


図 7-5. RTZ Mode Timing Diagram

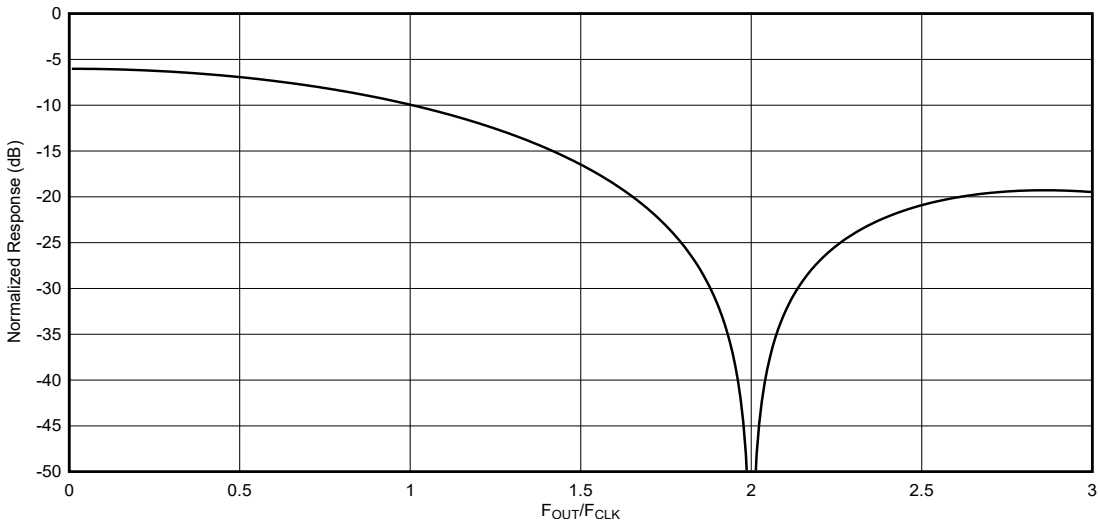


図 7-6. RTZ Mode Output Frequency Response

7.3.1.3 RF Mode

RF mode adds a mixing function to the DAC output by inverting the sample halfway through the sample period. The result is a sinc response that peaks and provides maximum flatness in the 2nd Nyquist zone. The timing diagram for RF mode is given in 図 7-7. A plot of the frequency response of RF mode is shown in 図 7-8.

Copyright © 2024 Texas Instruments Incorporated

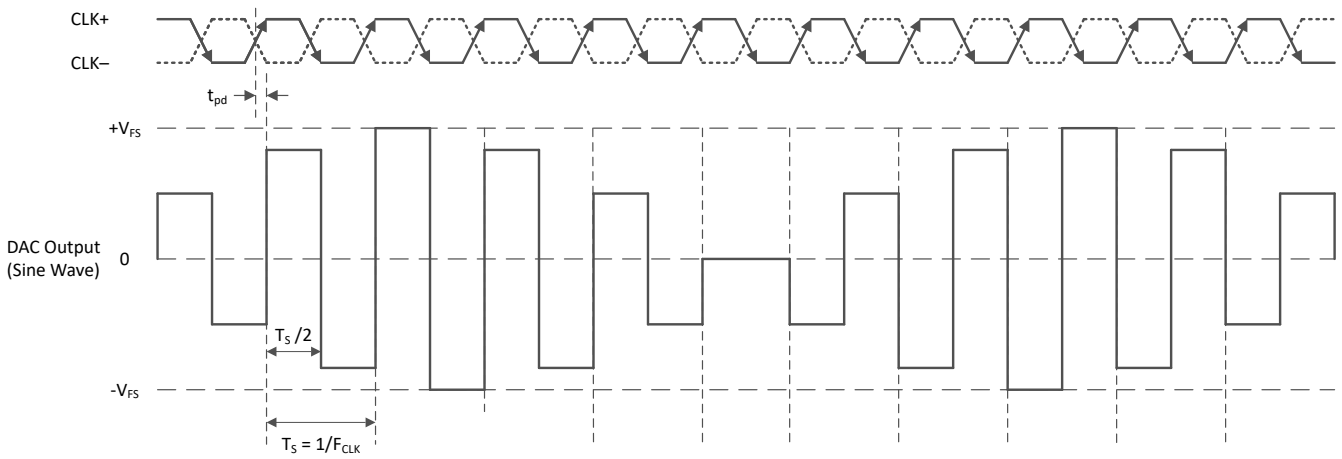


図 7-7. RF Mode Timing Diagram

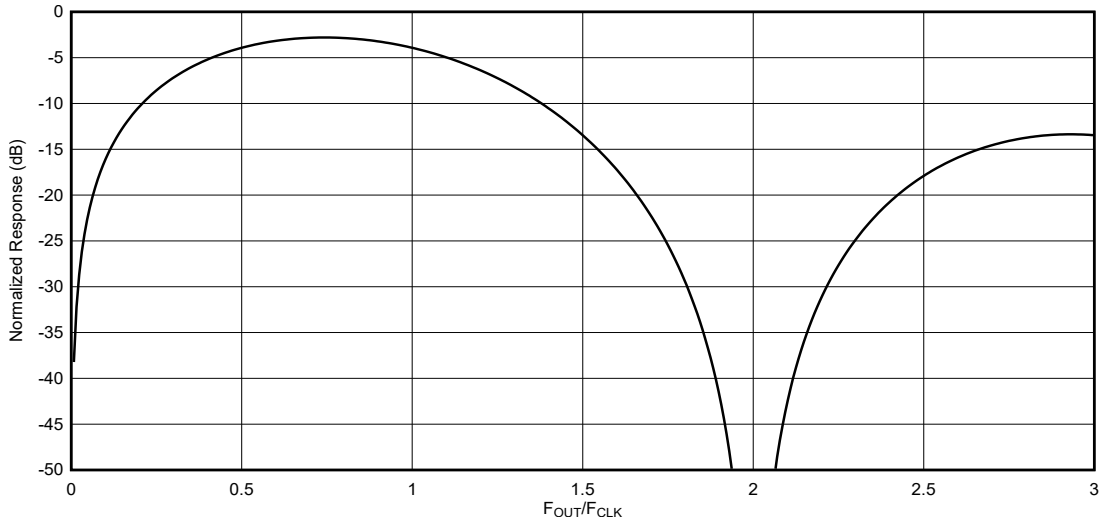


図 7-8. RF Mode Output Frequency Response

7.3.1.4 DES Mode

Dual edge sampling (DES) mode outputs unique samples on both the rising and falling edge of CLK, doubling the sample rate for the same clock frequency. An extra digital interpolate by 2 stage is included in the device to enable a double sample rate.

An non-50% CLK duty cycle results in an image of the signal at F_{CLK} - F_{OUT}. Compared to NRZ mode with the same clock frequency, DES mode provides significant reduction in the image amplitude, reducing filter requirements. There are three DES modes: DES1X, DES2XL and DES2XH. DES1X mode also allows 15.52 or 24 GSPS of unique data in 12-bit and 8-bit single channel mode, supporting 7.68 GHz or 12 GHz of signal bandwidth. DES2XL uses an low pass 2x interpolation filter to increase from the single edge sample rate to dual edge sample rate, and supports output frequencies between 0 - 0.4*F_{CLK} with up to 4.8 GHz of signal BW). DES2XH uses a high pass interpolation filter, supporting output frequencies between 0.6 - 1.0*F_{CLK} with the same signal BW as DES2XL.

Copyright © 2024 Texas Instruments Incorporated

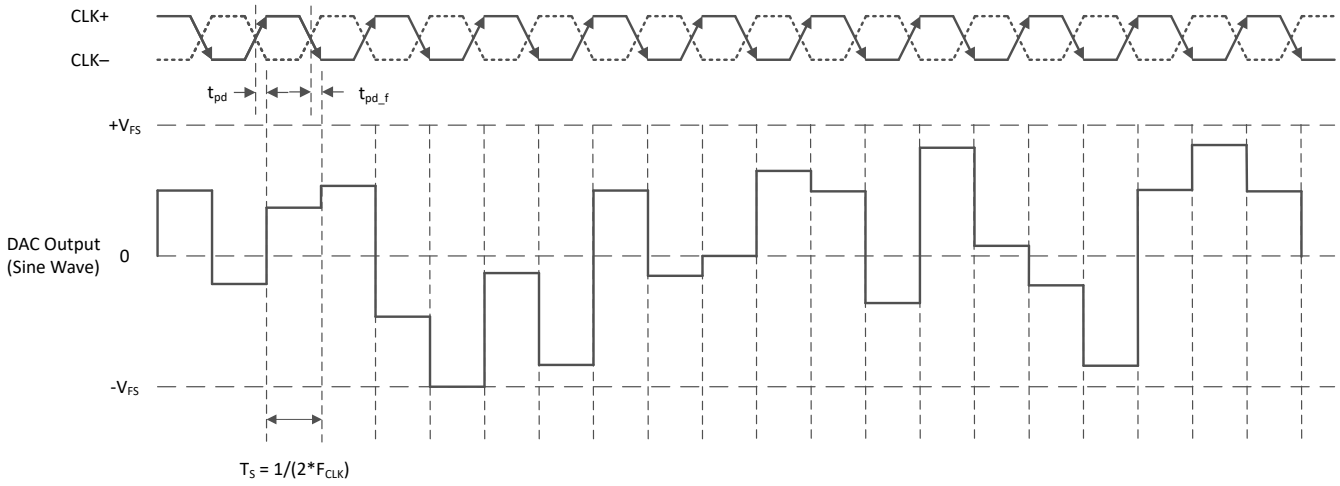


図 7-9. DES Mode Timing Diagram

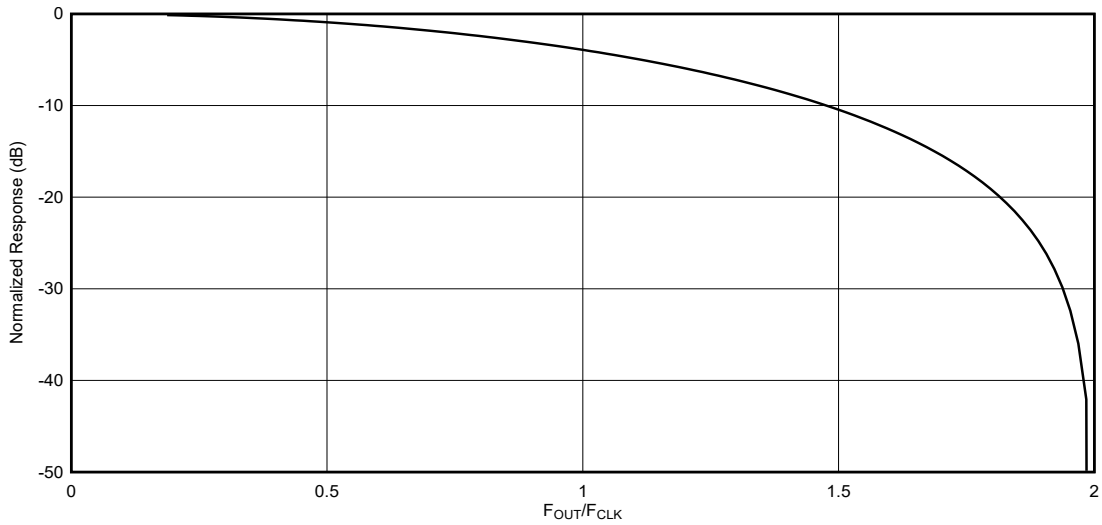


図 7-10. DES1X Output Frequency Response

7.3.2 DAC Core

The device has two 16-bit DAC cores.

7.3.2.1 DAC Output Structure

The DAC core analog output structure is shown in 図 7-11 for one DAC channel. There is a differential termination resistance between the two current output pins, DACOUTx±. The current steering switch array connects to the output pins and steers current between the output pins based on the digital code. A constant DC current bias, I_{BIAS}, draws current from both outputs regardless of the digital code. The I_{BIAS} current is:

$$3\ mA \times 2^{CUR_2X_EN} (COARSE_CUR_x + 5)/20 \quad (1)$$

With a 3.6-kΩ resistor from RBIAS+ to RBIAS-.

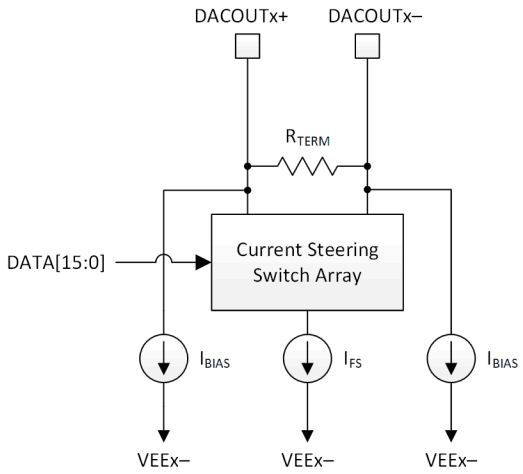


図 7-11. Analog Output Structure

Examples of conversions from digital codes to currents on the IOUTx± outputs are given in 表 7-2. The currents shown in 表 7-2 include both the current steered portion and the bias currents on each leg.

表 7-2. Example Digital Code to Analog Current Conversions

DIGITAL CODE	2'S COMPLEMENT	OFFSET BINARY	$I_{DACOUTx+}$	$I_{DACOUTx–}$	$I_{DACOUTx+} – I_{DACOUTx–}$
32767	0111 1111 1111 1111	1111 1111 1111 1111	0.9999847 × I_{FS} + I_{BIAS}	0.0000153 × I_{FS} + I_{BIAS}	0.9999694 × I_{FS}
16384	0100 0000 0000 0000	1100 0000 0000 0000	¾ × I_{FS} + I_{BIAS}	¼ × I_{FS} + I_{BIAS}	½ × I_{FS}
0	0000 0000 0000 0000	0000 0000 0000 0000	½ × I_{FS} + I_{BIAS}	½ × I_{FS} + I_{BIAS}	0
–16384	1100 0000 0000 0000	0100 0000 0000 0000	¼ × I_{FS} + I_{BIAS}	¾ × I_{FS} + I_{BIAS}	–½ × I_{FS}
–32768	1000 0000 0000 0000	0000 0000 0000 0000	I_{BIAS}	I_{FS} + I_{BIAS}	–I_{FS}

7.3.2.2 Full-Scale Current Adjustment

The total DAC output current is set through the external RBIAS resistor and the COARSE_CUR_A or COARSE_CUR_B and the FINE_CUR_A or FINE_CUR_B registers. There is a switched fullscale current and a static fullscale current. The switched current is divided between DACOUTA/B+ and DACOUTA/B- in proportion to the digital signal value at the DAC. The static current is fixed at the output of each ball DACOUTA/B+ and DACOUTA/B-.

The equation for the DAC switched output current is

$$I_{FSSWITCH} = \frac{3.6k\Omega}{R_{BIAS}} \times (5mA + 1mA{*}COARSE + 0.0156mA{*}FINE) \times 2^{CUR_2X_EN} \quad (2)$$

where

- R_{bias} is the external bias resistor
- COARSE is the value of the register COARSE_CUR_A or COARSE_CUR_B (0 to 15)
- FINE is the value of register FINE_CUR_A or FINE_CUR_B (0 to 63)
- CUR_2X_EN is the value of register CUR_2X_EN (0 or 1)

The static current is a fixed fraction of the switched current

$$I_{FSSTATIC} = 0.235 \times I_{FSSWITCH} \quad (3)$$

Copyright © 2024 Texas Instruments Incorporated

With a 3.6 kΩ bias resistor, COARSE_CUR_A or COARSE_CUR_B = 15 and FINE_CUR_A or FINE_CUR_B = 31, $I_{FSSWITCHED}$ is ~ 20.5 mA and $I_{FSSTATIC}$ ~ 4.82 mA (on each ball + and -). Enabling CUR_2X_EN doubles the currents.

7.3.3 DEM and Dither

The device contains two optional features to improve non-linearity due to current segment and switch timing mismatch: Dynamic element Mixing (DEM) and dither.

The DAC core consists of

1. Thermometer encoded current sources/switches representing the upper MSBs
2. Thermometer encoded current sources/switches representing the middle bits (called ULSBs)
3. Binary weighted current sources/switches representing the lower LSBs.
4. Additional current sources/switches for dithering

DEM randomizes which MSB and ULSB current sources/switches are used to generate the output, which whitens the non-linearity due to mismatches between the current sources and switch timing. The DEM_DACA/B and DEM_ADJ registers control the frequency and amplitude of the shift in current sources/segments.

Dither add or subtracts 8 different digital code values to the digital data which are then cancelled by switching additional current sources with the same amplitude. The digital data path is expanded so the full 16-bit range is maintained. The DITH_DACA/B registers control the frequency of the dither.

Using DEM generally improves low order harmonics near fullscale. Dither generally improves higher order harmonics near fullscale and all harmonics at lower digital amplitudes. Both DEM and dither increase the noise floor (both amplitude and phase) of the output due to the whitening of the non-linearity and the additional switching activity. This is reduced by DEM and dither settings with lower switching activity, e.g. data dependent or reduced activity DEM. However, data dependent or reduced activity DEM is less effective at higher output frequencies. For data sheet specification testing in セクション 6.6, data dependent DEM (DEM_ADJ = 1) is used below 750 MHz and normal activity DEM (DEM_ADJ = 0) above 750 MHz, but different settings (including disabling DEM and/or dither) can be tested and the best chosen based on the specific use case.

7.3.4 Offset Adjustment

The device allows an offset adjustment to the signal at the DAC output. The offset adjustment does NOT take away from the full 16-bit digital range of the DAC data.

The offset is set by the DAC_OFS[0] or DAC_OFS[1] register values for DACA and DACB, respectively. If dithering is enabled (see register DEM_DITH), the value is saturated to the range of ±128. If dithering is disabled, the value is saturated to the range ±3968. This makes sure that the primary DAC range will never be exceeded.

7.3.5 Clocking Subsystem

The device requires a clock running at a frequency equal to the DAC core sampling rate in NRZ, RTZ and RF modes, or at half of the DAC core sampling rate in DES mode. The clocking subsystem is shown in 図 7-12.

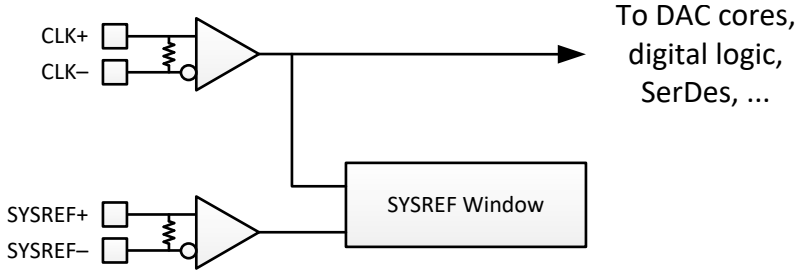


図 7-12. Device Clocking Subsystem

7.3.5.1 SYSREF Frequency Requirements

The SYSREF input period must be an integer multiple of all clocks in the part, including the LMFC/LEMC. The following table depicts the requirements for the SYSREF period:

表 7-3. Requirements for SYSREF period

Requirements on SYSREF Period	Reason
SYSREF period must be a multiple of 16 CLK cycles.	DAC Encoder/DEM always operates with a F_{DAC}/16 clock that is aligned to SYSREF.
SYSREF period must be a multiple of LT CLK cycles This constraint does not apply to DDS mode (DDS_EN=1).	Makes sure the SYSREF period is a multiple of the input sample period.
SYSREF period must be a multiple of 4*LT*S/F CLK cycles. This constraint does not apply to DDS mode (DDS_EN=1).	Makes sure the SYSREF period is a multiple of the effective link layer clock period.
SYSREF period must be a multiple of LT*S*K CLK cycles. This constraint does not apply to Subclass 0 mode (SUBCLASS=0) or DDS mode (DDS_EN=1)	Makes sure that SYSREF period is a multiple of the LMFC/LEMC period. Note that K=256*E/F in 64b/66b mode.

7.3.5.2 SYSREF Position Detector and Sampling Position Selection (SYSREF Windowing)

The SYSREF Windowing block is used to first detect the position of SYSREF relative to the input clock CLK± rising edge. Based on the window information, an optimum SYSREF sampling time is selected to maximize setup and hold timing margins relative to the input clock. In many cases a single SYSREF sampling position SYSREF_SEL is sufficient to meet timing for all systems (device-to-device variation) and conditions (temperature and voltage variations). However, this feature can also be used by the system to expand the timing window by tracking the movement of SYSREF as operating conditions change or to remove system-to-system variation at production test by finding a unique optimal value at nominal conditions for each system.

This section describes proper usage of the SYSREF Windowing block (SYSREF_RECV_SLEEP must be programmed to 0). First, apply the device clock and SYSREF to the device. The location of SYSREF relative to the device clock cycle is determined and stored in the SYSREF_POS field. Each bit of SYSREF_POS represents a potential SYSREF sampling position. If a bit in SYSREF_POS is set to 1, then the corresponding SYSREF sampling position has a potential setup or hold violation. Upon determining the valid SYSREF sampling positions (the positions of SYSREF_POS that are set to 0) the desired sampling position can be chosen by setting SYSREF_SEL to the value corresponding to that SYSREF_POS position. In general, the middle sampling position between two setup and hold instances is chosen. Ideally, the determination of SYSREF_SEL is performed at the nominal operating conditions of the system (temperature and supply voltage) to provide maximum margin for operating condition variations. This process can be performed at final test and the optimal SYSREF_SEL setting can be stored for use at every system power up. Further, SYSREF_POS can be used to characterize the skew between CLK± and SYSREF± over operating conditions for a system by sweeping the system temperature and supply voltages. For systems that have large variations in CLK± to SYSREF± skew, this characterization can be used to track the optimal SYSREF sampling position as system operating conditions change. In general, a single value can be found that meets timing over all conditions for well-matched systems, such as those where CLK± and SYSREF± come from a single clocking device.

The step size between each SYSREF_POS sampling position can be adjusted using SYSREF_ZOOM. When SYSREF_ZOOM is set to 0, the delay steps are coarser. When SYSREF_ZOOM is set to 1, the delay steps are finer. See the electrical specifications table for delay step sizes when SYSREF_ZOOM is enabled and disabled. In general, SYSREF_ZOOM is recommended to always be used (SYSREF_ZOOM = 1) unless a transition region (defined by 1's in SYSREF_POS) is not observed, which can be the case for low clock rates. Bits 0 and 19 of SYSREF_POS are always 1 because there is insufficient information to determine if these settings are close to a timing violation, although the actual valid window can extend beyond these sampling positions. The value programmed into SYSREF_SEL is the decimal number representing the desired bit location in SYSREF_POS. 表 7-4 lists some example SYSREF_POS readings and the optimal SYSREF_SEL settings. Although 20 sampling positions are provided by the SYSREF_POS status register, SYSREF_SEL only allows selection of the first 16 sampling positions, corresponding to SYSREF_POSbits 0 to 15. The additional SYSREF_POS status bits are intended only to provide additional knowledge of the SYSREF valid window. In

Copyright © 2024 Texas Instruments Incorporated

general, lower values of SYSREF_SEL are selected because of delay variation over supply voltage, however in the fourth example a value of 14 provides additional margin and can be selected instead.

If SYSREF_PS_EN is set to 0, only the last SYSREF edge is used for the SYSREF_POS values. Setting SYSREF_PS_EN to 1 enables an "infinite persistence" mode, where if any SYSREF edge since SYSREF_PS_EN is enabled has a 1 in a position, the SYSREF_POS value is set to one. This provides worst case values for SYSREF_POS to select the optimum SYSREF_SEL setting.

表 7-4. Examples of SYSREF_POS Readings and SYSREF_SEL Selections

SYSREF_POS[19:0]			OPTIMAL SYSREF_SEL SETTING
0x092[3:0] (positions 19-16)	0x091[7:0](1)(positions 15-8)	0x090[7:0](1) (positions 7-0)	
b1000	b01100000	b00011001	8 or 9
b1000	b00000000	b00110001	12
b1000	b01100000	b00000001	6 or 7
b1000	b00000011	b00000001	4 or 14
b1100	b01100011	b00011001	6

(1) Underlined 0 indicates the bits that are selected, as given in the last column of this table.

To use SYSREF Windowing:

1. Apply SYSREF and CLK
2. Set SYSREF_RECV_SLEEP = 0 and SYSREF_ZOOM = 1
3. If persistence is desired, set SYSREF_PS_EN = 1 and allow many SYSREF transitions for SYSREF_POS to build.
4. Read SYSREF_POS and determine a proper setting for SYSREF_SEL, as shown above. If a proper sampling point cannot be determined, set SYSREF_ZOOM = 0 and retry.
5. Once a propoer value for SYSREF_SEL is applied, program SYSREF_PROC_EN = 1 and SYSREF_ALIGN_EN = 1.
6. SYSREF is not being propoerly processd by the device and the user can proceed to use the JESD204C interface (or other functionality) that relies on SYSREF.
7. SYSREF may need to be adjusted over large temperature or supply voltage swings, depending on the input clock frequency. The SYSREF invalid window dependence on temperature ($t_{INV(TEMP)}$) and VA11 supply voltage ($t_{INV(VA11)}$) is given in セクション 6.8. To adjust SYSREF_SEL to track shifts in SYSREF relative to the input clock, the following steps can be looped (i.e. in background during operation of the JESD204C link):
   a. If persistence is desired,clear and then set SYSREF_PS_EN and allow many SYSREF transitions for the SYSREF_POS data to build.
   b. Read SYSREF_POS and determine a new value for SYSREF_SEL (but do not program it yet). The procedure to incrementally adjust SYSREF_SEL should prefer values that are closer to the previousSYSREF_SEL value rather than selecting the smallest valid SYSREF_SEL value. This helps ensure that the original valid window is selected and tracked rather than selecting a different window which would cause clock realignment to occur.
   c. Program SYSREF_PROC_EN = 0. Write the new SYSREF_SEL value, and then set SYSREF_PROC_EN = 1. The new SYSREF_SEL value is now used by the device.
   d. Wait for some period of time, then return to step 7a above.

7.3.6 Digital Signal Processing Blocks

The digital signal processing blocks are shown in 図 7-13. The device includes four digital up-converter (DUC) blocks supporting four complex (IQ) input streams that can be combined at different RF frequencies. The four DUCs can be flexibly assigned and summed together for either DAC output in the channel bonder. The final signal processing block is a extra interpolate by 2 filter for use with DES2XL/H mode.

表 7-5 and 表 7-6 list the available modes for single channel and dual channel outputs, respectively.

Copyright © 2024 Texas Instruments Incorporated

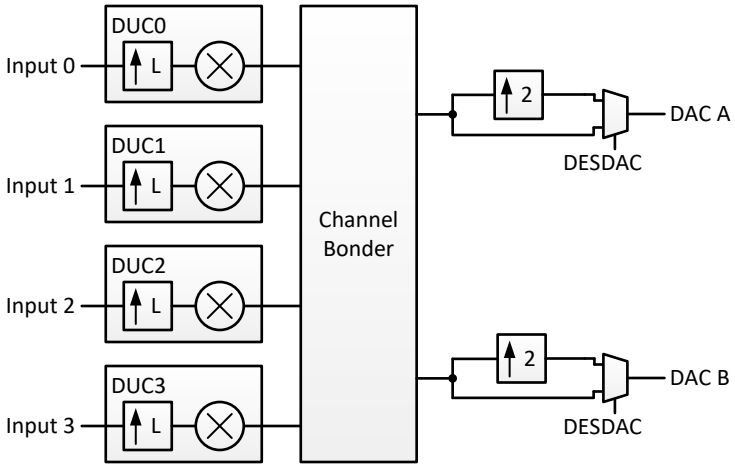


図 7-13. DUC Block with real output

表 7-5. DSP Modes with Single Output Signal

Input Steams	LT (Interpolation)	NCO_EN	DUC_FORMAT	DAC_SRC0 value	MXMODE0/1	Description
1	1	0	Real	0x1	NRZ, RTZ, RF, DES2x	Single channel mode (no up-conversion).
1	1	0	Real	0x1	DES1x	Single channel mode with dual-edge samples w/o interpolation (DES1X). The JESD204C interface provides all samples (no interpolation).
2, 4, 6 or 8	2-256x	1	Real	0x1, 0x3, 0x7, 0xF	NRZ, RTZ, RF, DES2x	1-4 DUC channels with single real output DAC_SRC0 settings are for 1, 2, 3, or 4 DUC channels respectively.
These modes only produce one output signal, so only one DAC is required. The table shows the programming to use DACA (MXMODE1 should be set to disabled). The user may elect to use DACB instead by programming DAC_SRC1 and MXMODE1 (and setting MXMODE0 to disabled). The user may also program DAC_SRC1=DAC_SRC0 and MXMODE1=MXMODE0 and then tie the DAC outputs together to get more output power.						

表 7-6. DSP Modes with Dual Output Signal

Input Steams	LT (Interpolation)	NCO_EN	DUC_FORMAT	DAC_SRC0 value	DAC_SRC1 value	MXMODE0/1	Description
2	1	0	N/A	0x1	0x2	NRZ, RTZ, RF, DES2x	Dual channel mode (no up-conversion)
2, 4, 6 or 8	2-256x	1	Real	any bits set	any bits set	NRZ, RTZ, RF, DES2x	1-4 DUC channels with two real outputs
2	2-256x	1 or 0	Complex	0x1	0x4	NRZ, RTZ, RF, DES2x	1 DUC channel with complex output: DACA outputs real samples DACB outputs imaginary samples
4	2-256x	1 or 0	Complex	0x3	0xC	NRZ, RTZ, RF, DES2x	2 DUC channels with complex output
These modes produce two output signals (and uses both DACs). The user may elect to swap the values programmed into DAC_SRC0 and DAC_SRC1 to swap the output signals. Typically MXMODE0 and MXMODE1 are set to the same setting, however this is not required.							

Copyright © 2024 Texas Instruments Incorporated

7.3.6.1 Digital Upconverter (DUC)

Each DUC interpolates the I and Q signals by factors ranging from LT = 2, 3, 4, 6, 8, 12, 16, 24, 32, 48, 64, 96, 128, 192 and 256. The resulting up-converted baseband I/Q signal is then multiplied by a complex sinusoid generated by the numerically controlled oscillator (NCO) to mix the signal to the desired carrier frequency for output from the DAC. The interpolation factors supported vs the number of DUCs enabled is listed in 表 7-7.

表 7-7. Supported Interpolation Factors vs Number of DUCs Enabled

Number of Streams (JESD_M)	Interpolation Factors Supported (LT)	DUCs Enabled
2	2-256x	DUC0
4	4-256x	DUC0, DUC1
6	8-256x	DUC0, DUC1, DUC2
8	8-256x	DUC0, DUC1, DUC2, DUC3

The NCOs and mixer can be bypassed, essentially setting the frequency and phase to 0, in which case the I input passes to the I output and the Q input passes to the Q output.

7.3.6.1.1 Interpolation Filters

The first operation of the DUC is to interpolate the input signal to a higher data rate. The available interpolation options are summarized in 表 7-8. The sampling rate of the input signal is multiplied by the specified interpolation amount to determine the DAC output rate, subject to the maximum sample rate for the DAC39RF12 および RFS12. These rates do not include the optional 2x interpolation for DES mode. For interpolations rates 6x and below, a reduced number of DUC channels are available.

表 7-8. Summary of Interpolation Options

INTERPOLATION	Maximum Number of DUC channels
2x	1
3x	1
4x	2
6x	2
8x	4
12x	4
16x	4
24x	4
32x	4
48x	4
64x	4
96x	4
128x	4
192x	4
256x	4

Each DUC contains multiple 2x or 3x interpolating filters. The filter coefficients for each filter are listed in 表 7-9 and the filters used for each interpolation factor are shown in 表 7-10. The interpolation filter composite responses are given in 図 7-14 to 図 7-42. The filters are designed to provide a passband bandwidth of 80% on the input bandwidth and passband ripple less than 0.01 dB. The stopband attenuation is greater than 90 dB for any signal within the passband.

Copyright © 2024 Texas Instruments Incorporated

表 7-9. Interpolation Filter Coefficients

Filter	Coefficients (Center Tap in Bold)
fir1	[6 0 -19 0 47 0 -100 0 192 0 -342 0 572 0 -914 0 1409 0 -2119 0 3152 0 -4729 0 7420 0 -13334 0 41527 **65536** 41527 0 -13334 0 7420 0 -4729 0 3152 0 -2119 0 1409 0 -914 0 572 0 -342 0 192 0 -100 0 47 0 -19 0 6]*2^{-16}
fir2	[-12 0 84 0 -336 0 1006 0 -2691 0 10141 **16384** 10141 0 -2691 0 1006 0 -336 0 84 0 -12]*2^{-14}
fir3	[29 0 -214 0 1209 **2048** 1209 0 -214 0 29]*2^{-11}
fir4	[3 0 -25 0 150 **256** 150 0 -25 0 3]*2^{-8}
fir5	[-1 0 9 **16** 9 0 -1]*2^{-4}
fir_3x	-38 -38 0 83 117 0 -214 -281 0 464 584 0 -900 -1102 0 1612 1929 0 -2713 -3190 0 4346 5040 0 -6699 -7684 0 10023 11408 0 -14701 -16661 0 21389 24260 0 -31417 -35960 0 48101 56540 0 -82781 -105224 0 215190 432780 **524288** 432780 215190 0 -105224 -82781 0 56540 48101 0 -35960 -31417 0 24260 21389 0 -16661 -14701 0 11408 10023 0 -7684 -6699 0 5040 4346 0 -3190 -2713 0 1929 1612 0 -1102 -900 0 584 464 0 -281 -214 0 117 83 0 -38 -38]*2^{-19}

表 7-10. Filters Used vs. DUC Interpolation Factor

DUC Interpolation Factor (L_{DUC})	Filters Used in DUC							
	1st Filter	2nd Filter	3rd Filter	4th Filter	5th Filter	6th Filter	7th Filter	8th Filter
2x	fir1							
3x	fir_3x							
4x	fir1	fir2						
6x	fir_3x	fir2						
8x	fir1	fir2	fir3					
12x	fir_3x	fir2	fir3					
16x	fir1	fir2	fir3	fir4				
24x	fir_3x	fir2	fir3	fir4				
32x	fir1	fir2	fir3	fir4	fir5			
48x	fir_3x	fir2	fir3	fir4	fir5			
64x	fir1	fir2	fir3	fir4	fir5	fir5		
96x	fir_3x	fir2	fir3	fir4	fir5	fir5		
128x	fir1	fir2	fir3	fir4	fir4	fir5	fir5	
192x	fir_3x	fir2	fir3	fir4	fir4	fir5	fir5	
256x	fir1	fir2	fir3	fir4	fir4	fir4	fir5	fir5

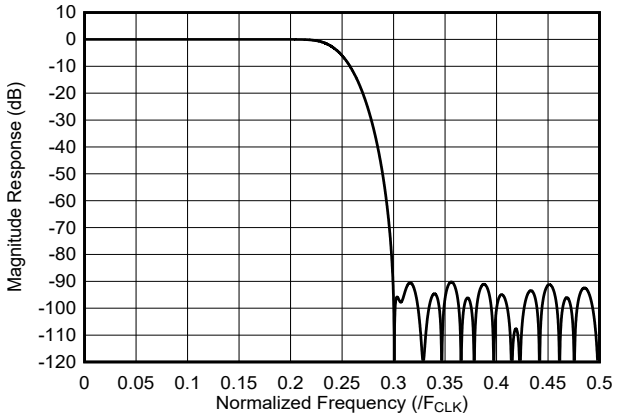


図 7-14. 2x Interpolation Filter Response

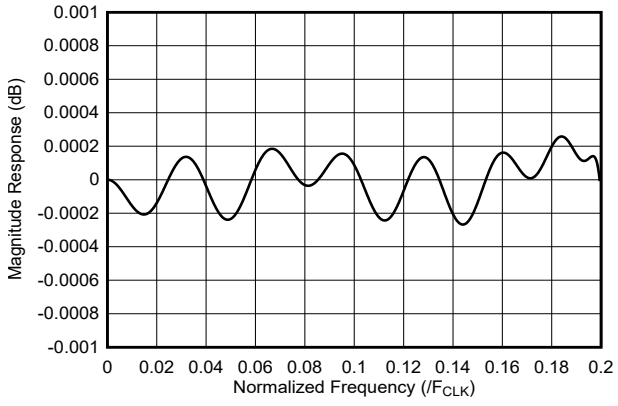


図 7-15. 2x Interpolation Filter Passband Response

Copyright © 2024 Texas Instruments Incorporated

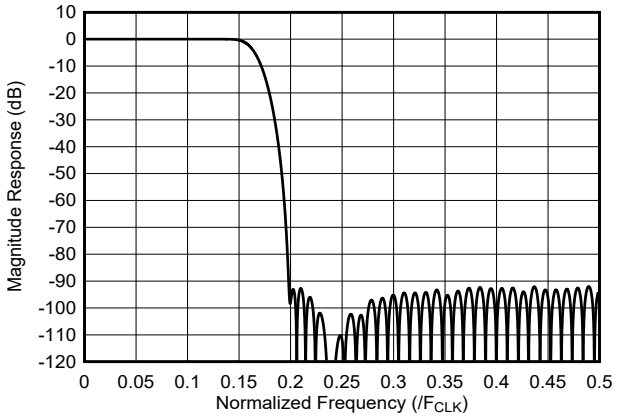


図 7-16. 3x Interpolation Filter Response

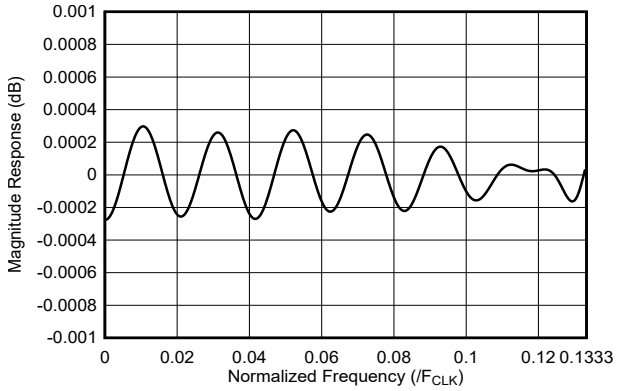


図 7-17. 3x Interpolation Filter Passband Response

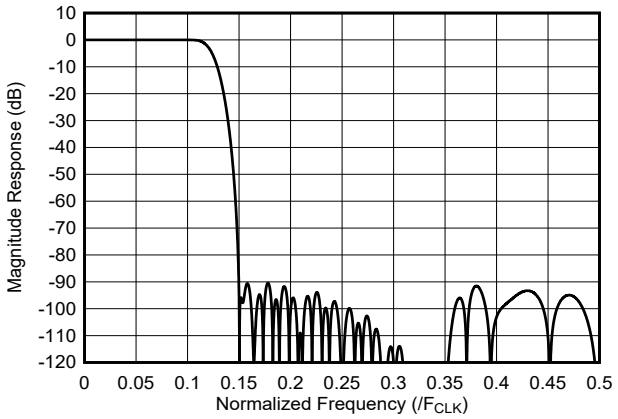


図 7-18. 4x Interpolation Filter Response

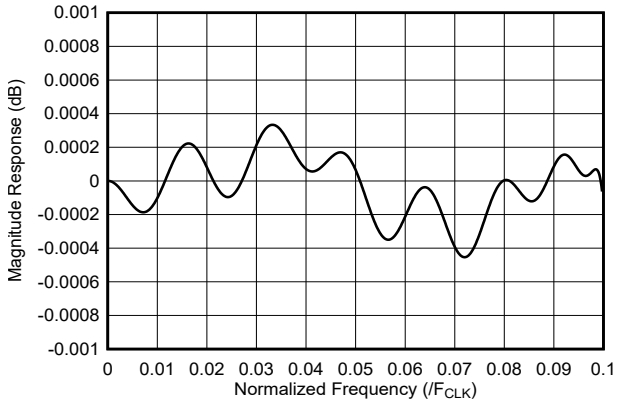


図 7-19. 4x Interpolation Filter Passband Response

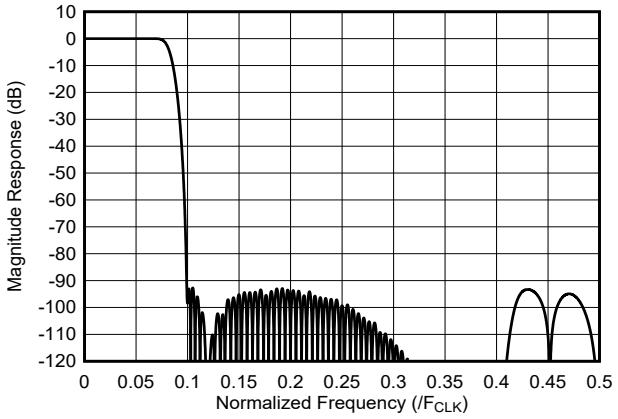


図 7-20. 6x Interpolation Filter Response

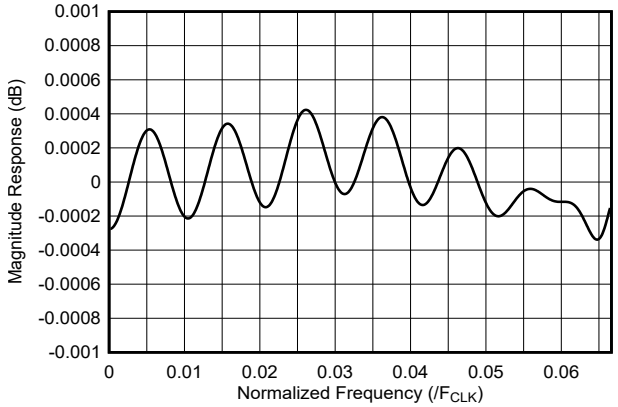


図 7-21. 6x Interpolation Filter Passband Response

Copyright © 2024 Texas Instruments Incorporated

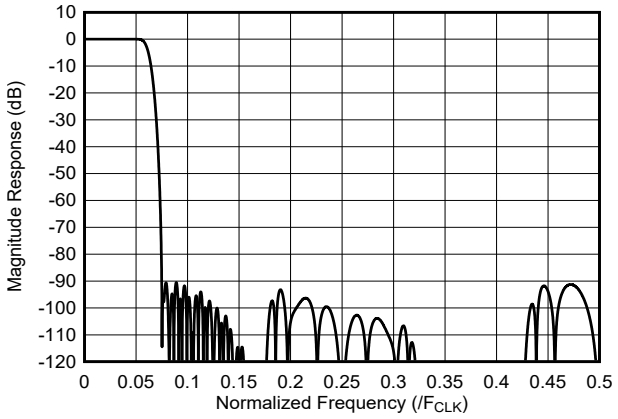


図 7-22. 8x Interpolation Filter Response

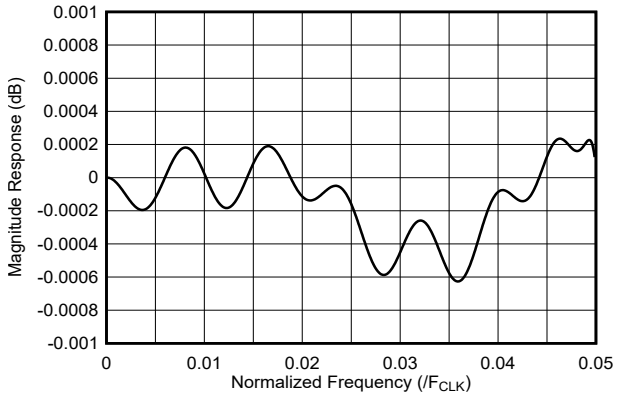


図 7-23. 8x Interpolation Filter Passband Response

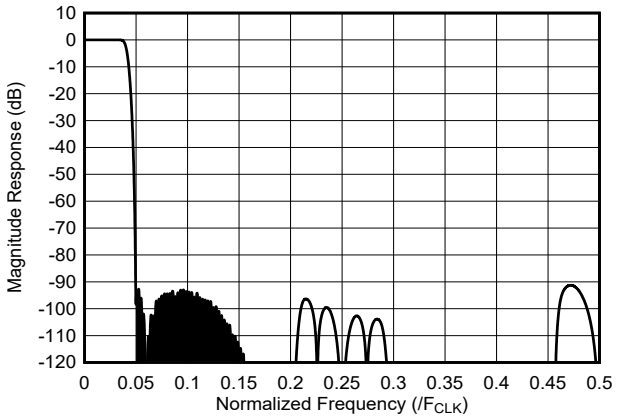


図 7-24. 12x Interpolation Filter Response

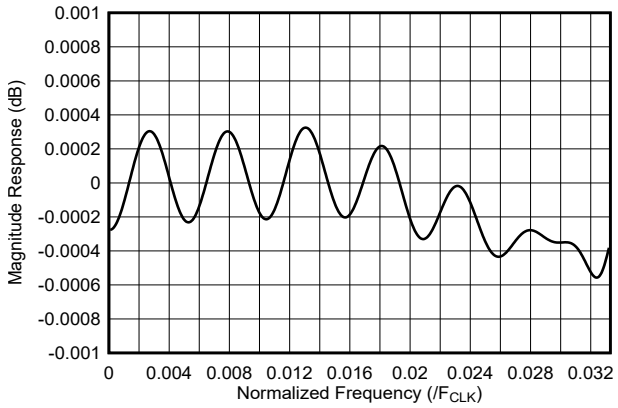


図 7-25. 12x Interpolation Filter Passband Response

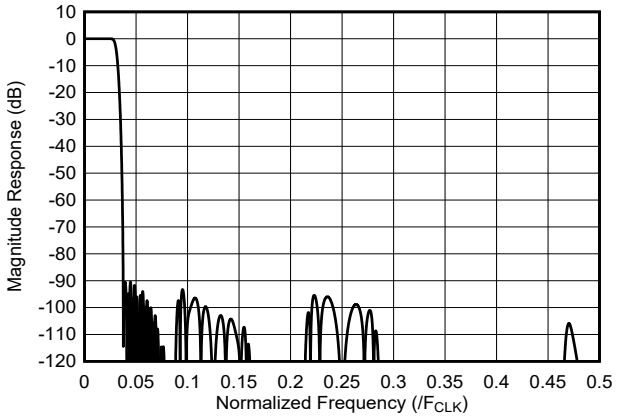


図 7-26. 16x Interpolation Filter Response

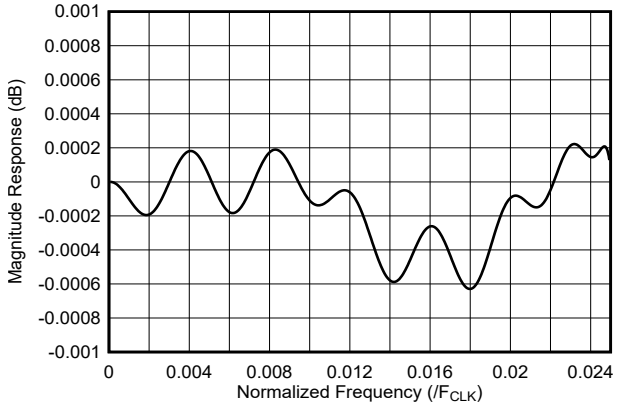


図 7-27. 16x Interpolation Filter Passband Response

Copyright © 2024 Texas Instruments Incorporated

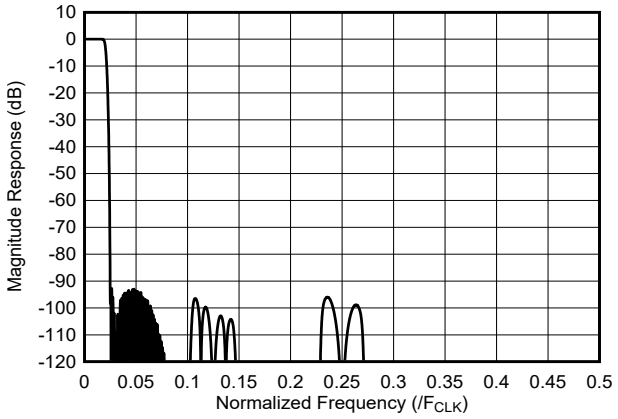


図 7-28. 24x Interpolation Filter Response

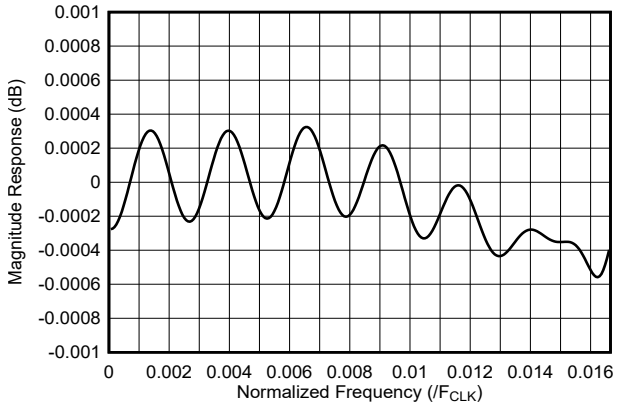


図 7-29. 24x Interpolation Filter Passband Response

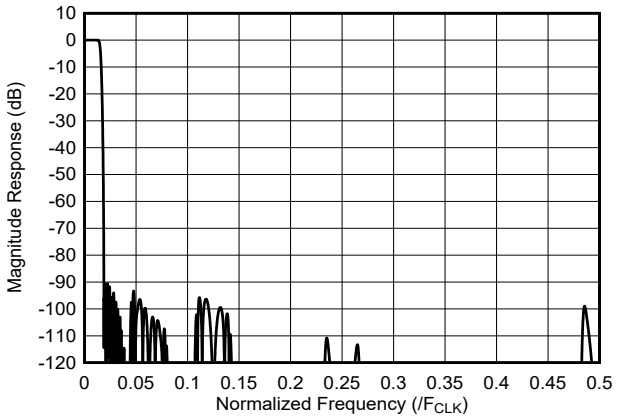


図 7-30. 32x Interpolation Filter Response

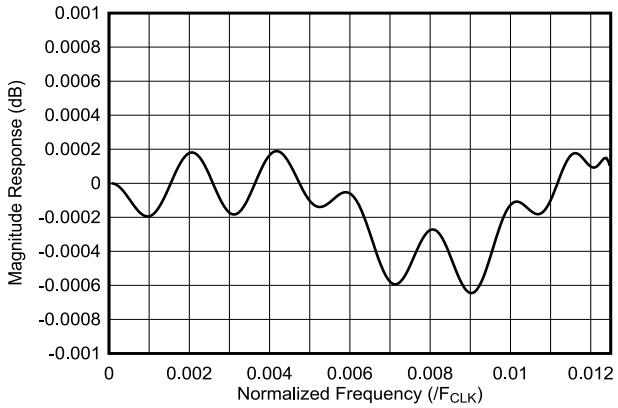


図 7-31. 32x Interpolation Filter Passband Response

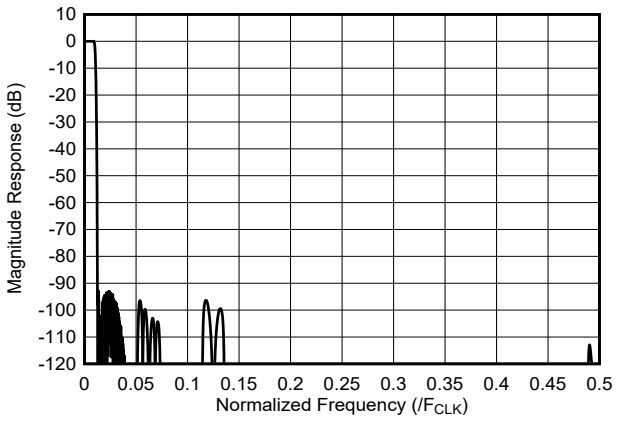


図 7-32. 48x Interpolation Filter Response

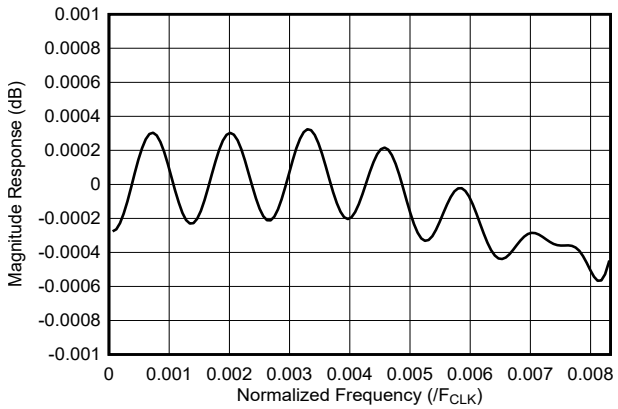


図 7-33. 48x Interpolation Filter Passband Response

Copyright © 2024 Texas Instruments Incorporated

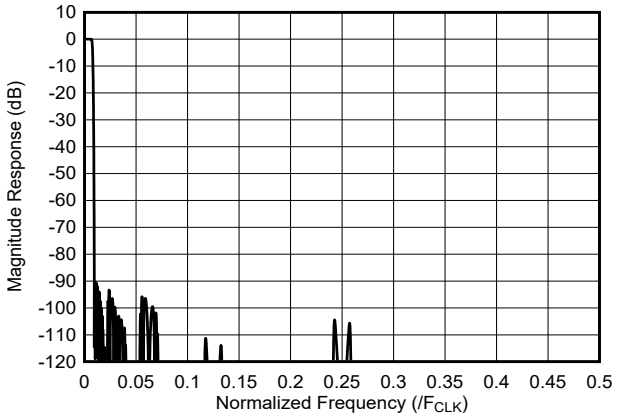


図 7-34. 64x Interpolation Filter Response

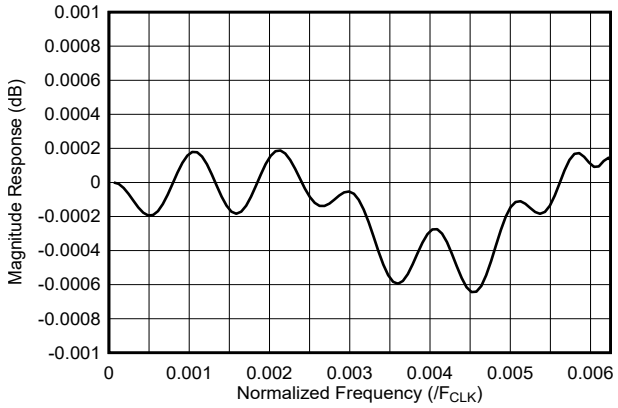


図 7-35. 64x Interpolation Filter Passband Response

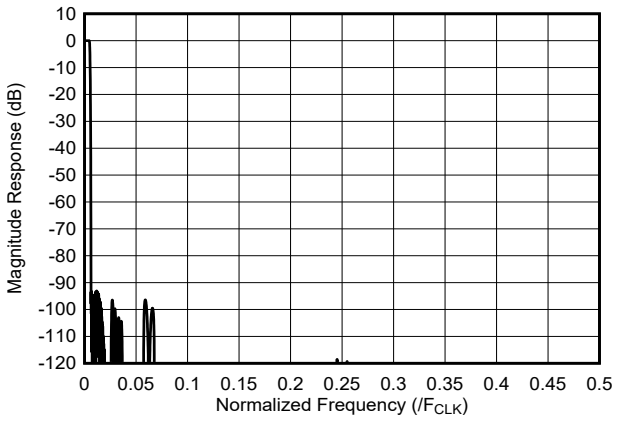


図 7-36. 96x Interpolation Filter Response

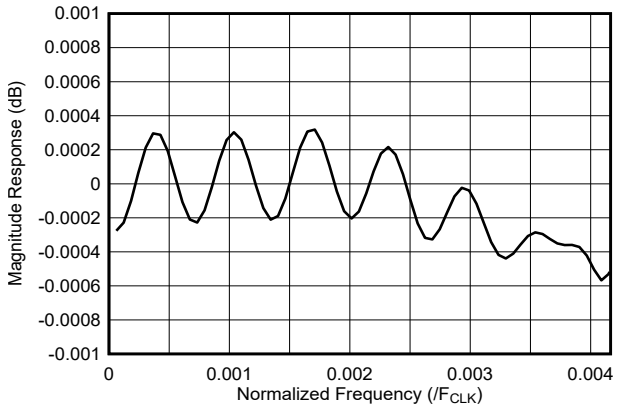


図 7-37. 96x Interpolation Filter Passband Response

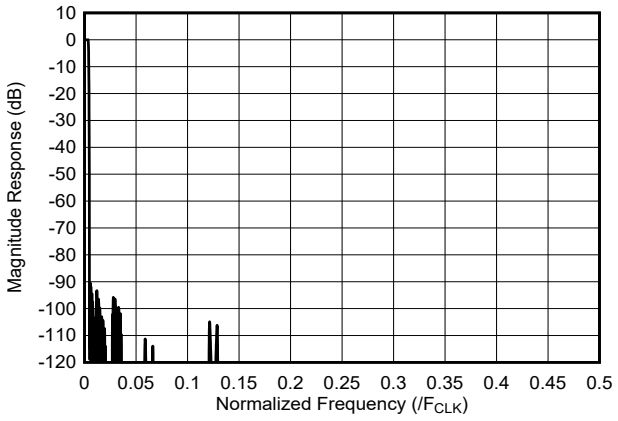


図 7-38. 128x Interpolation Filter Response

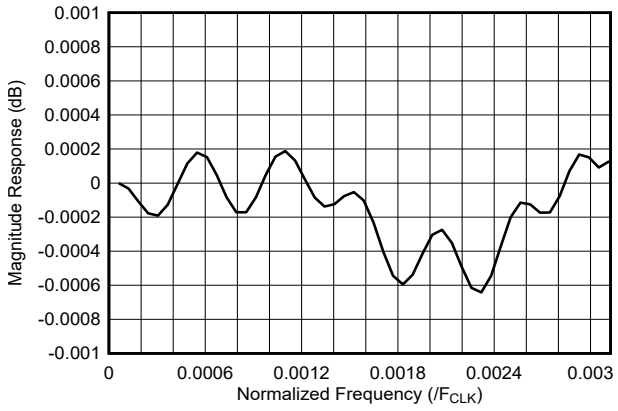


図 7-39. 128x Interpolation Filter Passband Response

Copyright © 2024 Texas Instruments Incorporated

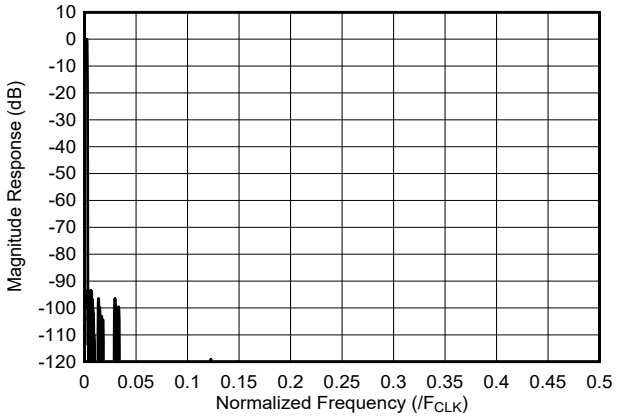


図 7-40. 192x Interpolation Filter Response

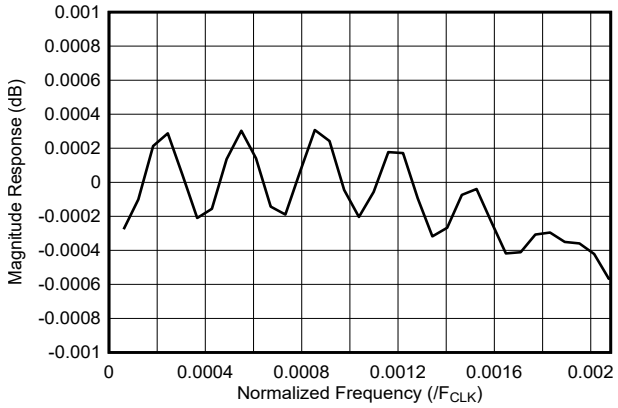


図 7-41. 192x Interpolation Filter Passband Response

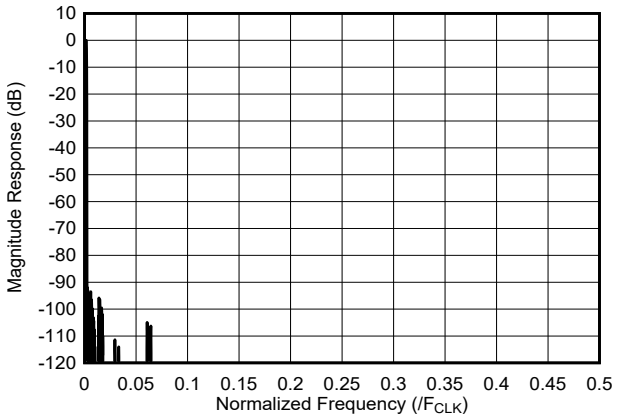


図 7-42. 256x Interpolation Filter Response

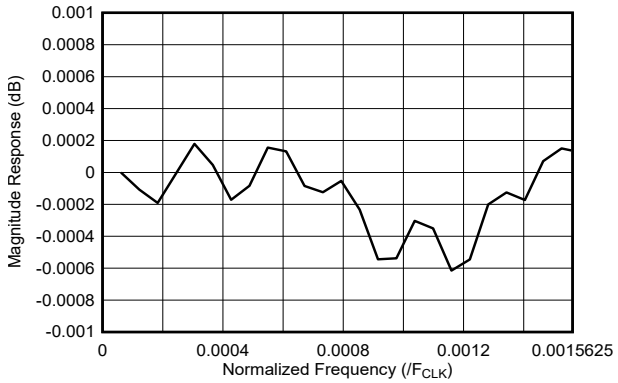


図 7-43. 256x Interpolation Filter Passband Response

7.3.6.1.2 Numerically Controlled Oscillator (NCO)

Each DUC has its own NCO block that is capable of phase continuous frequency hopping and phase coherent frequency hopping through a NCO with 64-bit frequency and 16-bit phase words. The NCO provides the complex sinusoid that is used for the complex mixing operation. The NCOs can also be used with DDS mode to generate a tone without using the DUC filter path.

The NCO updates modes are either Phase-continuous (see Phase-continuous NCO Update Mode), Phase-coherent (see Phase-coherent NCO Update Mode or Phase-sync (see Phase-sync NCO Update Mode).

The NCO frequency is written to the NCO frequency word register setting through either the standard SPI interface or through the Fast Reconfiguration (FR) interface, which allows for faster frequency updates. The frequency update occurs either as soon as the new frequency word is written or once triggered by the chosen trigger source. Available trigger sources are a SPI register, the SYSREF signal or by replacing the LSB of the I input signal with a sync signal (determined by the NCO_SYNC_SRC register).

7.3.6.1.2.1 Phase-Continuous NCO Update Mode

In phase-continuous NCO update mode, the phase frequency is updated without reset of the phase accumulator, which maintains the current sinusoid phase when changing frequency to reduce discontinuities in the output response. Phase Continuous NCO Mode operation is demonstrated in 図 7-44 and selected by programming NCO_CONT = 1 and NCO_AR = 0.

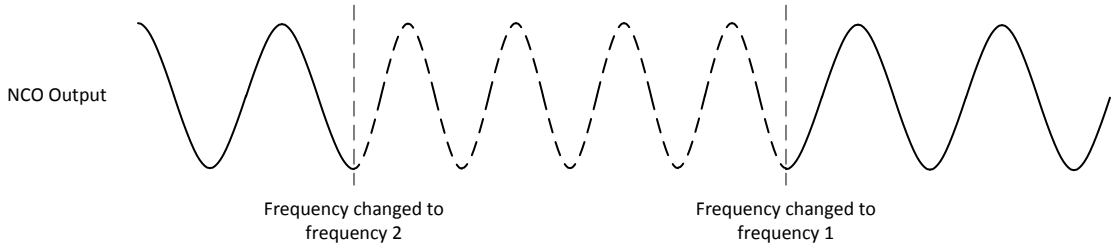


図 7-44. Example Phase Continuous NCO Mode Operation

7.3.6.1.2.2 Phase-coherent NCO Update Mode

The phase-coherent NCO update mode, the frequency word is updated and is multiplied by a counter to update the accumulator. This allows the phase for a particular frequency to be "coherent" with the previous usage of the frequency as if the NCO had never been tuned away from that frequency. Since the phase information is maintained by the counter, any frequency can be phase coherent. Phase Coherent NCO Mode operation is demonstrated in 図 7-45 and selected by programming NCO_CONT = 0 and NCO_AR = 0. If alignment between multiple devices is required, then NCO_AR must be programmed to 1 during the initial NCO synchronization to align the master accumulator for all devices.

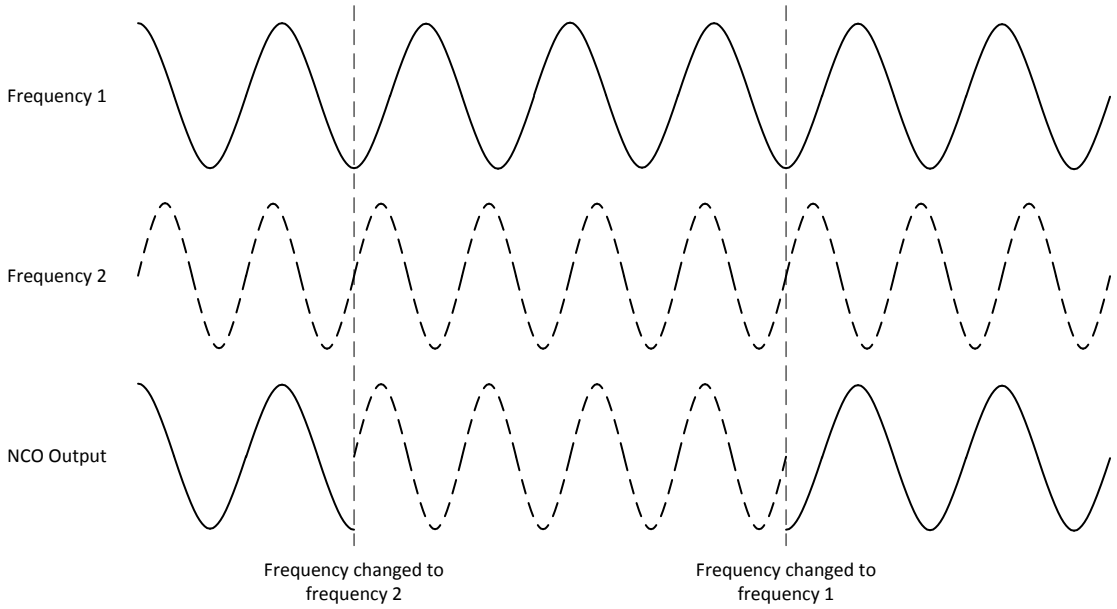


図 7-45. Example Phase Coherent NCO Mode Operation

7.3.6.1.2.3 Phase-sync NCO Update Mode

In Phase-sync NCO update mode, the frequency word is updated (if it changed) and the accumulator is reset. This mode can be used to align the NCOs across multiple devices by providing a synchronization signal simultaneously across all devices. This mode is selected by programming NCO_AR = 1.

7.3.6.1.2.4 NCO Synchronization

Many systems required synchronization between DAC channels including the phase of the internal NCOs when using digital up-conversion features. Further, frequency hopping systems may have additional requirements for synchronized frequency hopping to maintain NCO synchronization during changes in NCO frequency. The device has a number of ways to update NCO changes. These include:

- Synchronization through the LSB of the "I" input of DUC0 in the JESD204C input data stream
- Synchronization through SYSREF
- Update through SPI_SYNC register bit

Copyright © 2024 Texas Instruments Incorporated

- Update on the rising edge of FRCS of the FRI interface if the FRS bit is set.

The method used for NCO synchronization is controlled through the register setting.

The JESD204C LSB approach allows the synchronization information to be embedded in the input data and can therefore be easily controlled by the data source (that is, FPGA). By controlling the timing of the synchronization bit across multiple devices, multi-device synchronization can be achieved.

Synchronization by issuing a SYSREF pulse requires a DC coupled SYSREF interface and the ability to issue a single SYSREF pulse unless the NCO frequency is an integer multiple of the SYSREF frequency. Many systems will use AC coupled SYSREF signals which eliminates the ability to reliably issue a single SYSREF pulse. Careful timing of the SPI interface, especially for very slow SYSREF signals (< 10 MHz), may make masking and unmasking of SYSREF at multiple devices possible, however it is not characterized since the SPI path is asynchronous.

With SPI_SYNC synchronization, all NCOs within the device can be updated simultaneously.

7.3.6.1.2.4.1 JESD204C LSB Synchonization

The NCO blocks can be synchronized using the LSB of the "I" input of the DUC0 channel on the JESD204C interface in complex input JMODES. Control bits that replace the LSB of the data samples are used to reset the NCO phase or an NCO frequency change. 表 7-11 show how the SYNC bit replaces the I sample LSB when using LSB replacement. The LSB replacement mode is enabled when the SPI_SYNC register bit is high while NCO_SYNC_SRC is set to 3. To trigger the event, the LSB must be low for 4 or more consecutive samples, and then high for 4 consecutive samples. The sync coincides with the 4th high sample arriving at the DUC0 input. When using the SPI interface to update the NCO frequency word, the user must set SPI_SYNC back to 0 to change back to the LSB representing I sample data. When using the FR interface to update the NCO, the LSB changes back to representing the I sample data after the synchronization event is triggered.

表 7-11. Bit Assignment using LSB Replacement

BIT	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
I Sample	I[15:1]															Sync
Q Sample	Q[15:0]															

7.3.6.1.2.5 NCO Mode Programming

表 7-13 and 表 7-12 show the register programming for the different NCO modes. Each NCO[*n*] can have separate mode selection.

表 7-12. NCO Programming: SPI Usage (FR_EN = 0)

NCO_AR[*n*]	NCO_CONT[*n*]	Mode
0	0	Phase Coherent
	1	Phase Continuous
1	0	Phase Reset
	1	

表 7-13. NCO Programming: FRI Usage (FR_EN = 1)

FR_NCO_AR[*n*]	NCO_CONT[*n*]	Mode
0	0	Phase Coherent
	1	Phase Continuous
1	0	Phase Reset
	1	

7.3.6.1.3 Mixer Scaling

The DUC mixer support complex to complex or complex to real mixing of the complex interpolated input signal with the NCO frequency. The scaling in the mixer is exactly 1:1, so a fullscale 16-bit (absolute amplitude =

Copyright © 2024 Texas Instruments Incorporated

32767) complex tone results in a fullscale real or complex tone at the output. If the input absolute value of the complex amplitude exceeds 32767 the mixer saturates, resulting in a corrupted waveform. This is illustrated in 図 7-46, which shows the valid circular region in white and invalid corners in grey.

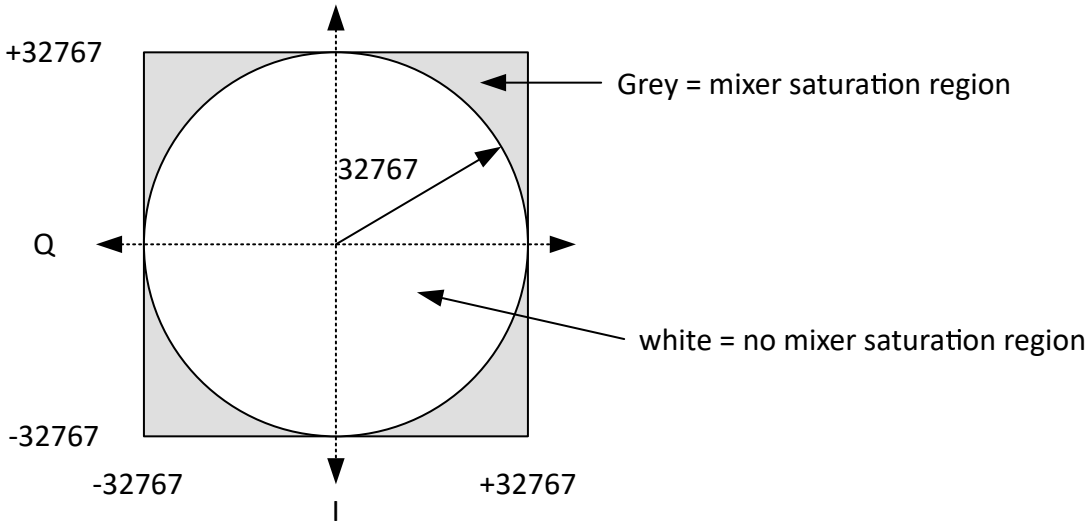


図 7-46. Mixer Saturation Region for the 16-bit Complex Input

7.3.6.2 Channel Bonder

The channel bonder sits after the DUC blocks and is used to combine the outputs of the DUCs. A block diagram for one DAC channel is shown in 図 7-47. The DUC outputs can be scaled by 1 (0 dB), 0.5 (-6 dB) or 0.25 (-12 dB) as set by the DUC_GAIN registers to prevent saturation when summing the signals. The signals are summed at full precision as determined by the settings of the DAC_SRC registers, and then saturation and rounding occurs on the combined signal. When the DUC outputs are real, up to four DUCs are available to be combined for each DAC. When the DUC outputs are complex, only two DUCs are available per DAC. The channel bonder can combine any combination of the real or complex DUC outputs for each DAC.

Copyright © 2024 Texas Instruments Incorporated

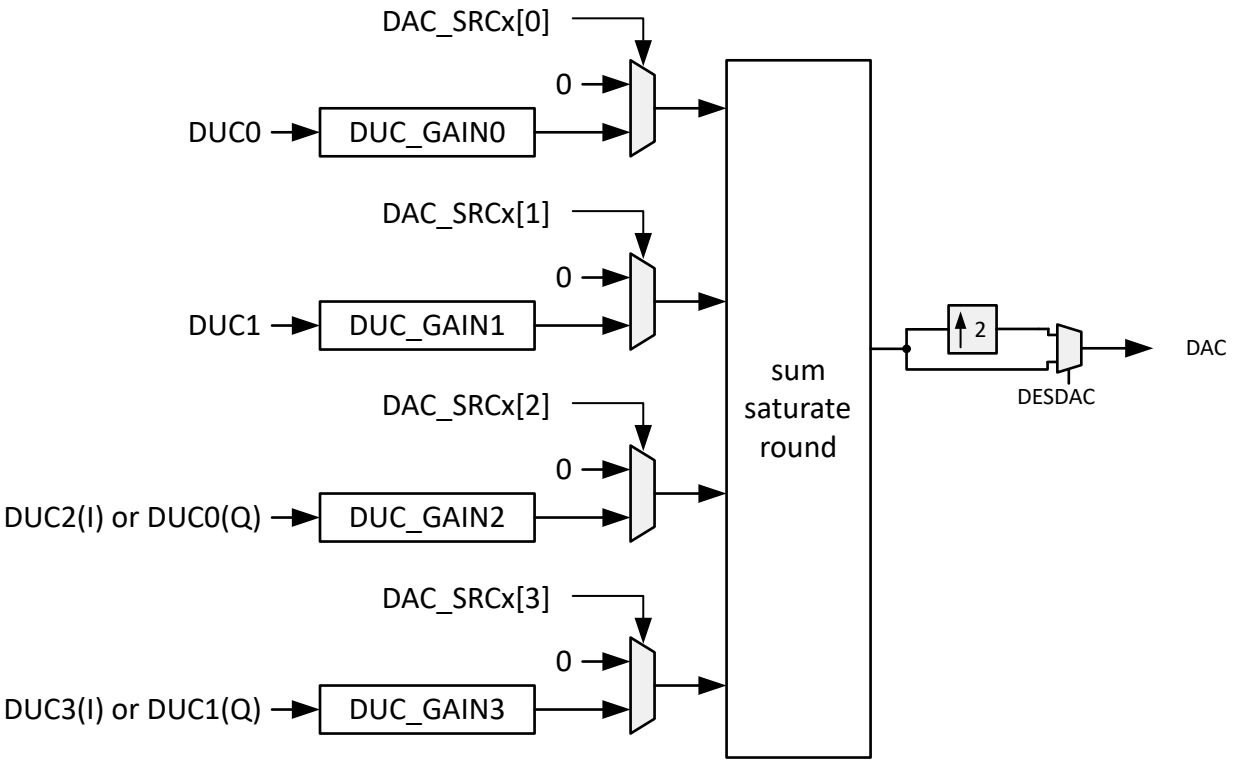


図 7-47. Channel Bonder Block Diagram

7.3.6.3 DES Interpolator

The output of the summation block or the non-interpolated input signal can optionally be interpolated by 2x by the DES interpolator to double the sample rate for DES2XL and DES2XH output modes. The DES interpolator has a passband bandwidth of 80%, stopband attenuation of 54dB and ripple less than ±0.02dB. The DES interpolator can operate as high pass (DES2XH) or low pass (DES2XL) with an inverted spectrum. The DES2X filter coefficients are listed in 表 7-14 and the responses are shown in 図 7-48, with the passband ripple for DES2XL shown in 図 7-49.The sample rate after interpolation is $2*f_{CLK}$ due to having samples on both the rising and falling edges, so the x-axis in 図 7-48 covers the Nyquist zone.

表 7-14. DES2X Filter Coefficients

Filter	Coefficients (center tap is in bold)
DES2X	[-9 0 19 0 -39 0 70 0 -122 0 211 0 -403 0 1293 **2048** 1293 0 -403 0 211 0 -122 0 70 0 -39 0 19 0 -9]*2^{-11}

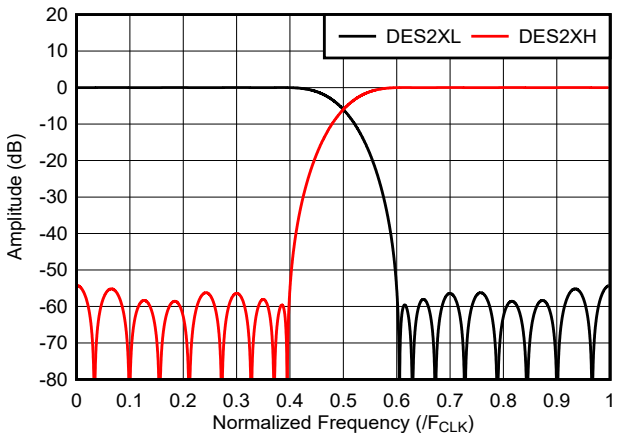


図 7-48. DES Interpolator Frequency Response

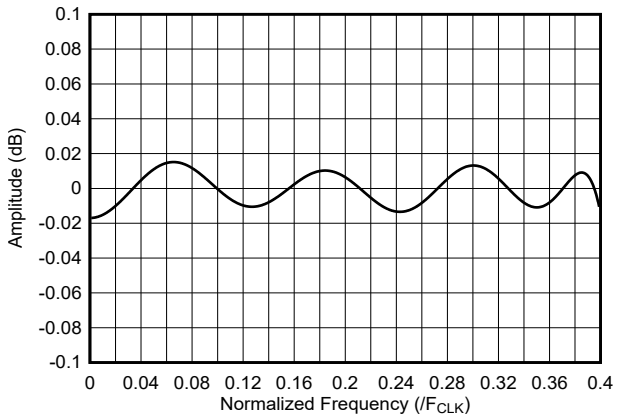


図 7-49. DES Interpolator Frequency Response (Passband)

7.3.7 JESD204C Interface

The devices uses a JESD204C high-speed serial interface to transfer data from the logic device to the receiving DAC. The device serial lanes are capable of operating with both 8b/10b encoding and 64b/66b encoding. The JESD204C formats using 8b/10b encoding are backwards compatible with existing JESD204B receivers. A maximum of 16 lanes can be used to lower lane rates for interfacing with speed limited logic devices. There are a few differences between 8b/10b and 64b/66b encoding, which is highlighted throughout this section. 図 7-50 shows a simplified block diagram of the 8b/10b encoded JESD204C interface and 図 7-51 shows a simplified block diagram of the 64b/66b encoded JESD204C interface.

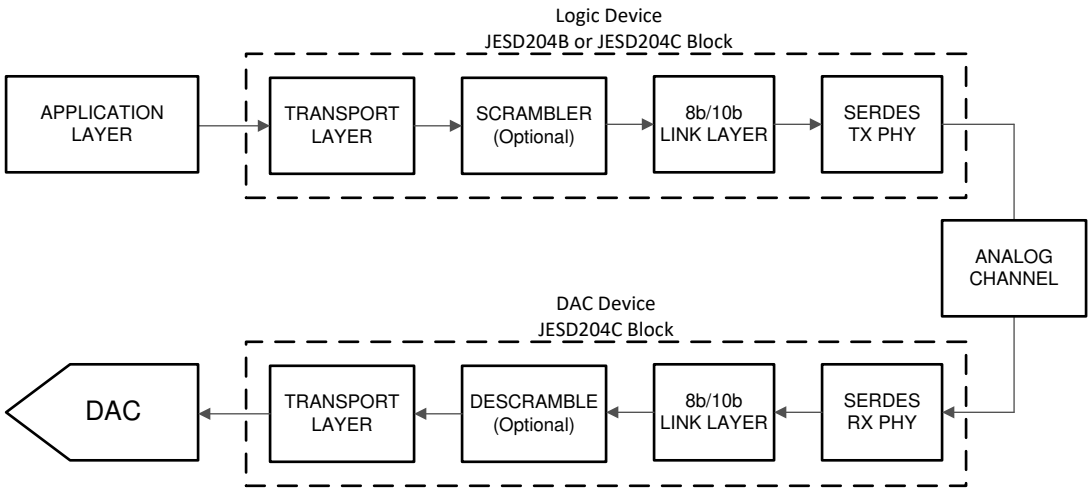


図 7-50. Simplified JESD204C Interface Diagram with 8b/10b Encoding

Copyright © 2024 Texas Instruments Incorporated

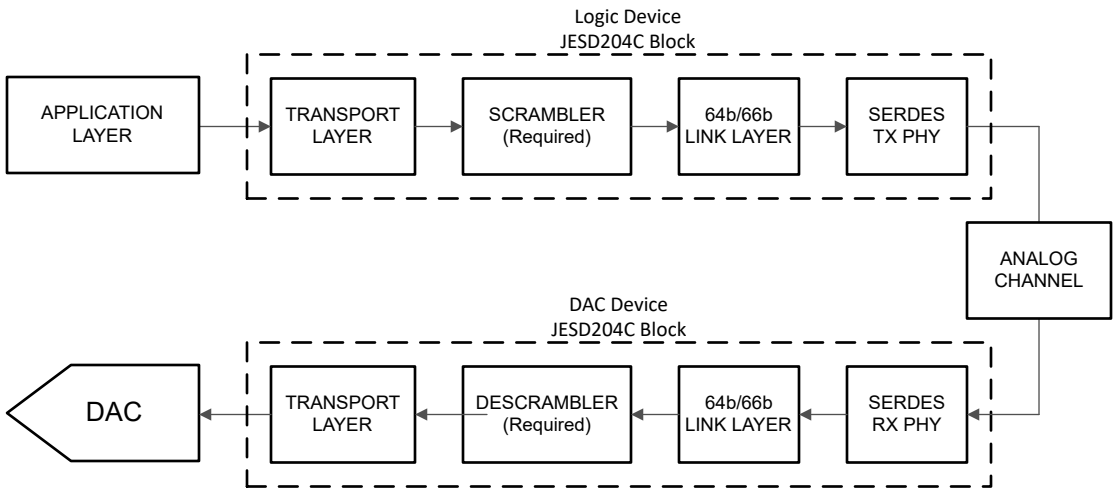


図 7-51. Simplified JESD204C Interface Diagram with 64b/66b Encoding

Not all optional features of JESD204C are supported by the device. The list of features that are supported and the features that are not supported is provided in 表 7-15

表 7-15. Declaration of Supported JESD204C Features

LETTER IDENTIFIER	FEATURE	SUPPORTED BY DEVICE?
a	8b/10b link layer	Yes
b	64b/66b link layer	Yes
c	64b/80b link layer	No
d	The command channel when using 64b/66b or 64b/80b link layer	No
e	Forward error correction (FEC) when using the 64b/66b or 64b/80b link layer	No
f	CRC3 when using the 64b/66b or 64b/80b link layer	No
g	A physical $\overline{\text{SYNC}}$ pin when using the 8b/10b link layer	Yes
h	Subclass 0	Yes
i	Subclass 1	Yes
j	Subclass 2	No
k	Lane alignment within a single link	Yes
l	Subclass 1 with support for lane alignment on a multipoint link by means of the MULTIREF signal	No
m	$\overline{\text{SYNC}}$ interface timing compatible with JESD204A	Yes
n	$\overline{\text{SYNC}}$ interface timing compatible with JESD204B	Yes

The various signals used in the JESD204C interface and the associated device pin names are summarized briefly in 表 7-16 for reference.

表 7-16. Summary of JESD204C Signals

SIGNAL NAME	DEVICE PIN NAMES	DESCRIPTION
Data	[15:0]SRX±	High-speed serialized data after 8b/10b or 64b/66b encoding that is received by the SerDes receivers.

Copyright © 2024 Texas Instruments Incorporated

表 7-16. Summary of JESD204C Signals (続き)

SIGNAL NAME	DEVICE PIN NAMES	DESCRIPTION
$\overline{\text{SYNC}}$	$\overline{\text{SYNC}}$	Link initialization signal (handshake), toggles low to start code group synchronization (CGS) process. Not used for 64B/66B encoding modes.
Device clock	CLK+, CLK–	DAC sampling clock, also used for clocking digital logic and SerDes receivers.
SYSREF	SYSREF+, SYSREF–	System timing reference used to deterministically reset the internal local multiframe clock (LMFC) or local extended multiblock clock (LEMC) counters in each JESD204C device

7.3.7.1 Deviation from JESD204C Standard

JESD204C section 4.3.4 requires subclass 1 devices to be able to measure the amount of device clock cycles by which the detected active edge of the SYSREF signal deviates from its expected position and not to re-align the LMFC/LEMC if the deviation from the expected position is less than a programmable number of device clock cycles. This design does not contain this feature, but is compliant with JESD204B in this regard. The LMFC and other supporting clocks are aligned to the detected SYSREF if the JESD204C subsystem and SYSREF processor are enabled (and SYSREF_ALIGN_EN=1).

7.3.7.2 Transport Layer

In the transmitter (logic device) the transport layer takes samples from the application layer and maps the samples into octets inside of frames. The frames are then mapped onto the available SerDes lanes. In the receiver (DAC) the transport layer performs the inverse operation to extract samples from the serialized data. The mapping of octets into frames and frames onto lanes is defined by the transport layer settings such as L, M, F, S, N and N'. An octet is 8 bits (before 8b/10b or 64b/66b encoding), a frame consists of F octets and the frames are mapped onto L lanes. Samples are N bits, but sent as N' bits across the link. The samples come from M converters and there are S samples per converter per frame cycle.

There are a number of predefined transport layer modes in the device that are defined in JESD204C Interface Modes. The various configuration parameters for JESD204C block are defined in JESD204C Interface Parameter Definitions.

The link layer further maps the frames into multiframes.

7.3.7.3 Scrambler and Descrambler

A data descrambler is available in the DAC device to descramble the data after reception. Scrambling is used to remove the possibility of spectral peaks in the transmitted data due to repetitive data streams. The scrambler is optional for 8b/10b encoded mode, however it is mandatory for 64b/66b encoded mode to have sufficient spectral content for clock recovery and adaptive equalization. The scrambler operates on the data before encoding, such that the 8b/10b scrambler scrambles the 8-bit octets before 10-bit encoding and the 64b/66b scrambler scrambles the 64-bit block before the sync header insertion (66-bit encoding). The JESD204C receiver automatically synchronizes its descrambler to the incoming scrambled data stream. For 8b/10b encoding, the initial lane alignment sequence (ILAS) is never scrambled. The descrambler can be enabled by setting SCR for 8b/10b encoding mode, but it is automatically enabled in 64b/66b mode. The scrambling polynomial is different for 8b/10b encoding and 64b/66b encoding schemes as defined by the JESD204C standard.

7.3.7.4 Link Layer

The link layer serves multiple purposes in JESD204C for both 8b/10b and 64b/66b encoding modes, however there are some differences in implementation for each encoding scheme. In general, the link layer responsibilities include scrambling of the data (see Scrambler and Descrambler), establishing the code (8b/10b)

Copyright © 2024 Texas Instruments Incorporated

or block (64b/66b) boundaries and the multiframe (8b/10b) or multiblock (64b/66b) boundaries to deskew the Serdes lanes, initializing the link, encoding the data, and monitoring the health of the link.

7.3.7.5 Physical Layer

The devices JESD204C physical layer contains 16 SerDes receivers. Each SerDes lane has a Continuous Time Linear Equalizer (CTLE) for channel loss equalization.

7.3.7.6 Serdes PLL Control

The Serdes recievers work over a wide frequency range if various parameters are altered. Before setting JESD_EN, the user must program various parameters for the Serdes receivers to work. The parameters are adjusted to maintain all these constraints:

1. The VCO clock frequency (F_{VCO}) must be between 1.5625 GHz and 3.2 GHz.
2. When the VCO clock frequency (F_{VCO}) is below 2.17 GHz, VRANGE must be set.
3. The REFDIV, MPY and RATE settings are all associated with a frequency change. The product of all the frequency changes must match the R value for the selected JMODE.
4. Settings with a higher PLL reference clock (and smaller MPY multiplier) are preferred.

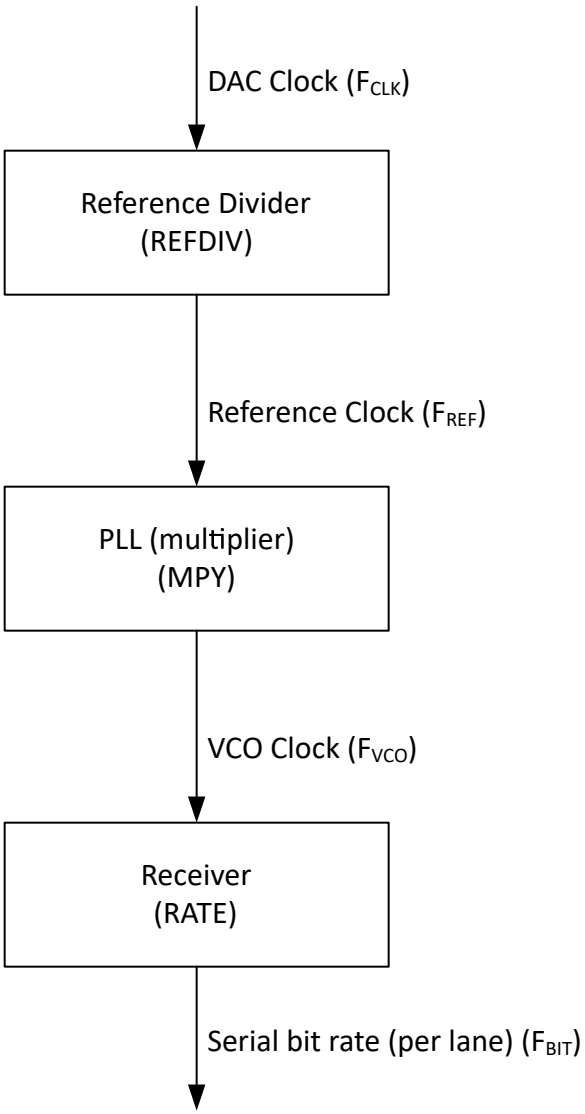


図 7-52. Serdes Clock Frequency Generation

Copyright © 2024 Texas Instruments Incorporated

表 7-17. PLL Configuration Table for 8b/10b Encoding Modes

R decimal (fraction)	CLK Range (F_{CLK}) (GHz)	Register Values to Program				Actual Frequency Multipliers			Lane Bit Rate (Gbps)
		REFDIV	MPY	RATE	VRANGE	REFDIV	MPY	RATE	
0.3125 (40/128)	2.5-5.12	0x08	0x14	0x3	F_{CLK}<3.472GHz	1/8	5	0.5	0.78125 – 1.6
0.3125 (40/128)	5.0-10.24	0x10	0x14	0x2	F_{CLK}<6.994GHz	1/16	5	1	1.5625 – 3.2
0.3125 (40/128)	10.0-12.8	0x20	0x14	0x1	1	1/32	5	2	3.125 – 4.0
0.4167 (40/96)	1.88-3.84	0x06	0x14	0x3	F_{CLK}<2.604GHz	1/6	5	0.5	0.78125 – 1.6
0.4167 (40/96)	3.75-7.68	0x0C	0x14	0x2	F_{CLK}<5.208GHz	1/12	5	1	1.5625 – 3.2
0.4167 (40/96)	7.50-12.8	0x18	0x14	0x1	F_{CLK}<10.416GHz	1/24	5	2	3.125 – 5.333
0.625 (40/64)	1.25-2.56	0x04	0x14	0x3	F_{CLK}<1.736GHz	1/4	5	0.5	0.78125 – 1.6
0.625 (40/64)	2.5-5.12	0x08	0x14	0x2	F_{CLK}<3.472GHz	1/8	5	1	1.5625 – 3.2
0.625 (40/64)	5.00-10.24	0x10	0x14	0x1	F_{CLK}<6.994GHz	1/16	5	2	3.125 – 6.4
0.625 (40/64)	10.00-12.8	0x20	0x14	0x0	1	1/32	5	4	6.25 – 8.0
0.833 (40/48)	0.94-1.92	0x03	0x14	0x3	F_{CLK}<1.302GHz	1/3	5	0.5	0.78125 – 1.6
0.833 (40/48)	1.88-3.84	0x06	0x14	0x2	F_{CLK}<2.604GHz	1/6	5	1	1.5625 – 3.2
0.833 (40/48)	3.75-7.68	0x0C	0x14	0x1	F_{CLK}<5.208GHz	1/12	5	2	3.125 – 6.4
0.833 (40/48)	7.50-12.8	0x18	0x14	0x0	F_{CLK}<10.416GHz	1/24	5	4	6.25 – 10.667
1 (40/40)	0.781-1.6	0x02	0x10	0x3	F_{CLK}<1.085GHz	1/2	4	0.5	0.78125 – 1.6
1 (40/40)	1.5625-3.2	0x04	0x10	0x2	F_{CLK}<2.17GHz	1/4	4	1	1.5625 – 3.2
1 (40/40)	3.125-6.4	0x08	0x10	0x1	F_{CLK}<4.34GHz	1/8	4	2	3.125 – 6.4
1 (40/40)	6.25-12.8	0x10	0x10	0x0	F_{CLK}<8.68GHz	1/16	4	4	6.25 – 12.8
1.25 (40/32)	0.625-1.28	0x02	0x14	0x3	F_{CLK}<0.868GHz	1/2	5	0.5	0.78125 – 1.6
1.25 (40/32)	1.25-2.56	0x04	0x14	0x2	F_{CLK}<1.736GHz	1/4	5	1	1.5625 – 3.2
1.25 (40/32)	2.5-5.12	0x08	0x14	0x1	F_{CLK}<3.472GHz	1/8	5	2	3.125 – 6.4
1.25 (40/32)	5.0-10.24	0x10	0x14	0x0	F_{CLK}<6.994GHz	1/16	5	4	6.25 – 12.8
1.667 (40/24)	0.47-0.96	0x03	0x28	0x3	F_{CLK}<0.651GHz	1/3	10	0.5	0.78125 – 1.6
1.667 (40/24)	0.94-1.92	0x03	0x14	0x2	F_{CLK}<1.302GHz	1/3	5	1	1.5625 – 3.2
1.667 (40/24)	1.88-3.84	0x06	0x14	0x1	F_{CLK}<2.604GHz	1/6	5	2	3.125 – 6.4
1.667 (40/24)	3.75-7.68	0x0C	0x14	0x0	F_{CLK}<5.208GHz	1/12	5	4	6.25 – 12.8
2 (40/20)	0.781-1.6	0x02	0x10	0x2	F_{CLK}<1.085GHz	1/2	4	1	1.5625 – 3.2
2 (40/20)	1.5625-3.2	0x04	0x10	0x1	F_{CLK}<2.17GHz	1/4	4	2	3.125 – 6.4
2 (40/20)	3.125-6.4	0x08	0x10	0x0	F_{CLK}<4.34GHz	1/8	4	4	6.25 – 12.8
2.5 (40/16)	0.625-1.28	0x02	0x14	0x2	F_{CLK}<0.868GHz	1/2	5	1	1.5625 – 3.2
2.5 (40/16)	1.25-2.56	0x04	0x14	0x1	F_{CLK}<1.736GHz	1/4	5	2	3.125 – 6.4
2.5 (40/16)	2.5-5.12	0x08	0x14	0x0	F_{CLK}<3.472GHz	1/8	5	4	6.25 – 12.8
3.3333 (40/12)	0.47 – 0.96	0x03	0x28	0x2	F_{CLK}<0.651GHz	1/3	10	1	1.5625 – 3.2
3.3333 (40/12)	0.94 – 1.92	0x03	0x14	0x1	F_{CLK}<1.302GHz	1/3	5	2	3.125 – 6.4
3.3333 (40/12)	1.88 – 3.84	0x06	0x14	0x0	F_{CLK}<2.604GHz	1/6	5	4	6.25 – 12.8
4 (40/10)	0.781 – 1.6	0x02	0x10	0x1	F_{CLK}<1.085GHz	1/2	4	2	3.125 – 6.4
4 (40/10)	1.5625 – 3.2	0x04	0x10	0x0	F_{CLK}<2.17GHz	1/4	4	4	6.25 – 12.8
5 (40/8)	0.625-1.28	0x02	0x14	0x1	F_{CLK}<0.868GHz	1/2	5	2	3.125 – 6.4
5 (40/8)	1.25-2.56	0x04	0x14	0x0	F_{CLK}<1.736GHz	1/4	5	4	6.25 – 12.8

表 7-18. PLL Configuration Table for 64b/66b Encoding Modes

RR decimal (fraction)	CLK Range (F_{CLK}) (GHz)	Register Values to Program				Actual Frequency Multipliers			Lane Bit Rate (F_{BIT}) (Gbps)
		REFDIV	MPY	RATE	VRANGE	REFDIV	MPY	RATE	
0.515625 (33/64)	6.06 – 12.41	0x20	0x21	0x1	F_{CLK}<8.417GHz	1/32	8.25	2	3.125 – 6.4
0.6875 (33/48)	4.55 – 9.31	0x18	0x21	0x1	F_{CLK}<6.313GHz	1/24	8.25	2	3.125 – 6.4
0.6875 (33/48)	9.09 – 12.8	0x30	0x21	0x0	F_{CLK}<12.625GHz	1/48	8.25	4	6.25 – 8.8
0.825 (33/40)	3.79 – 7.76	0x14	0x21	0x1	F_{CLK}<5.261GHz	1/20	8.25	2	3.125 – 6.4
0.825 (33/40)	7.58 – 12.8	0x28	0x21	0x0	F_{CLK}<10.521GHz	1/40	8.25	4	6.25 – 10.56
1.03125 (33/32)	3.03 – 6.21	0x10	0x21	0x1	F_{CLK}<4.208GHz	1/16	8.25	2	3.125 – 6.4
1.03125 (33/32)	6.06 – 12.41	0x20	0x21	0x0	F_{CLK}<8.417GHz	1/32	8.25	4	6.25 – 12.8
1.375 (33/24)	2.27 – 4.65	0x0C	0x21	0x1	F_{CLK}<3.156GHz	1/12	8.25	2	3.125 – 6.4
1.375 (33/24)	4.55 – 9.31	0x18	0x21	0x0	F_{CLK}<6.313GHz	1/24	8.25	4	6.25 – 12.8
1.65 (33/20)	1.89 – 3.88	0x0A	0x21	0x1	F_{CLK}<2.630GHz	1/10	8.25	2	3.125 – 6.4

Copyright © 2024 Texas Instruments Incorporated

表 7-18. PLL Configuration Table for 64b/66b Encoding Modes (続き)

RR decimal (fraction)	CLK Range (F_{CLK}) (GHz)	Register Values to Program				Actual Frequency Multipliers			Lane Bit Rate (F_{BIT}) (Gbps)
		REFDIV	MPY	RATE	VRANGE	REFDIV	MPY	RATE	
1.65 (33/20)	3.79 – 7.76	0x14	0x21	0x0	F_{CLK}<5.261GHz	1/20	8.25	4	6.25 – 12.8
2.0625 (33/16)	1.52 – 3.10	0x08	0x21	0x1	F_{CLK}<2.104GHz	1/8	8.25	2	3.125 – 6.4
2.0625 (33/16)	3.03 – 6.21	0x10	0x21	0x0	F_{CLK}<4.208GHz	1/16	8.25	4	6.25 – 12.8
2.75 (33/12)	1.14 – 2.33	0x06	0x21	0x1	F_{CLK}<1.578GHz	1/6	8.25	2	3.125 – 6.4
2.75 (33/12)	2.27 – 4.65	0x0C	0x21	0x0	F_{CLK}<3.156GHz	1/12	8.25	4	6.25 – 12.8
3.3 (33/10)	0.95 – 1.94	0x05	0x21	0x1	F_{CLK}<1.315GHz	1/5	8.25	2	3.125 – 6.4
3.3 (33/10)	1.89 – 3.88	0x0A	0x21	0x0	F_{CLK}<2.630GHz	1/10	8.25	4	6.25 – 12.8
4.125 (33/8)	0.76 – 1.55	0x04	0x21	0x1	F_{CLK}<1.052GHz	1/4	8.25	2	3.125 – 6.4
4.125 (33/8)	1.52 – 3.10	0x08	0x21	0x0	F_{CLK}<2.104GHz	1/8	8.25	4	6.25 – 12.8

7.3.7.7 Serdes Crossbar

The device includes a crossbar immediately after coming out of the PHY that allows mapping of signals between lanes to simplify PCB routing between the Tx and Rx which could save PCB complexity or shorten the traces (reduce loss). See LANE_SEL ***n***.

The physical layer lanes (0SRX± to 15SRX±) must be routed to the appropriate JESD204C lanes (JESD0 to JESD15) based on the lanes defined in the bit packing diagrams shown in JESD204C Format Diagrams.

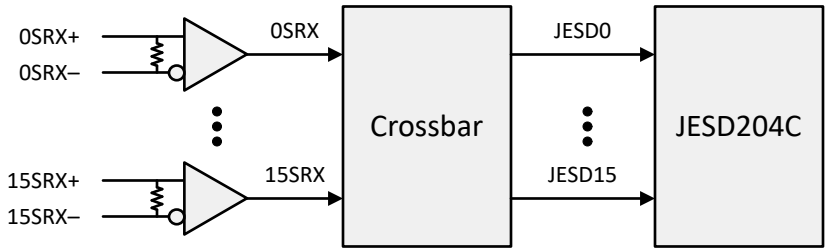


図 7-53. Crossbar Block Diagram

7.3.7.8 Multi-Device Synchronization and Deterministic Latency

JESD204C subclass 1 outlines a method to achieve deterministic latency across the serial link. If two devices achieve the same deterministic latency then they can be considered synchronized. This latency must be achieved from system startup to startup to be deterministic. There are two key requirements to achieve deterministic latency. The first is proper capture of SYSREF. SYSREF resets the LMFC counter in each device to act as a known timing reference.

The second requirement is to choose a proper elastic buffer release point in the receiver. The converter device is the receiver (RX) in the JESD204C link and the logic device is the transmitter (TX). The elastic buffer is the key block for achieving deterministic latency and does so by absorbing variations in the propagation delays of the serialized data as the data travels from the transmitter to the receiver. A proper release point is one that provides sufficient margin against delay variations. Choosing a proper release point requires knowing the average arrival time of data at the elastic buffer, referenced to an LMFC edge, and the total expected delay variation for all devices. With this information the region of invalid release points within the LMFC period can be defined, which stretches from the minimum to maximum delay for all lanes. Essentially, the designer must make sure that the data for all lanes arrives at all devices after the previous release point occurs and before the next release point occurs. The invalid region can also be found experimentally - see Programming RBD.

図 7-54 provides a simplified timing diagram that demonstrates this requirement. In this figure, the data for two transmitters (ADC or logic device) is shown. The second transmitter (TX 2) has a longer routing distance (t_{PCB}) and results in a longer link delay than the first transmitter (TX 1). First, the invalid region of the LMFC period is marked off as determined by the data arrival times for all devices. Then, the release point is set by using the release buffer delay (RBD) parameter to shift the release point an appropriate number of quad-octet steps from the LMFC edge so that the release point occurs within the valid region of the LMFC cycle. In the case of 図 7-54,

Copyright © 2024 Texas Instruments Incorporated

the LMFC edge (RBD = 0) is a good choice for the release point because there is sufficient margin on each side of the valid region.

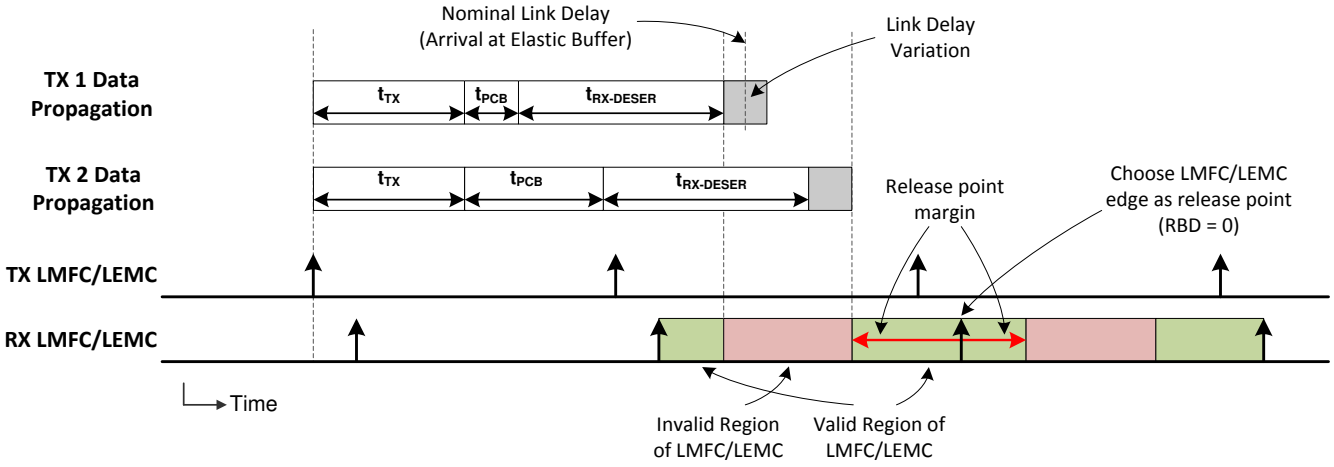


図 7-54. LMFC Valid Region Definition for Elastic Buffer Release Point Selection

The TX and RX LMFC do not necessarily need to be phase aligned, but knowledge of their phase is important for proper elastic buffer release point selection. Also, the elastic buffer release point occurs within every LMFC cycle, but the buffers only release when all lanes have arrived. Therefore, the total link delay can exceed a single LMFC period; see *JESD204B multi-device synchronization: Breaking down the requirements* for more information.

7.3.7.8.1 Programming RBD

The range of suitable values for RBD depends on the phase delta between the Rx and Tx LMFC/LEMC, as well as link latencies in the Tx, channel, and Rx. Therefore; it is not practical to provide a pre-determined RBD value that is appropriate for all systems. The LANE_ARR registers are provided to help the user measure lane arrival times and select an appropriate RBD value for the system. To ensure deterministic latency, the RBD value should be selected during system prototyping and stored in system firmware. Calculating RBD each time the system is turned on could result in non-deterministic latency.

The arrival times are reported in units of quad-bytes and are measured with respect to a modulo-64 reference counter that increments for each quad-byte received (per lane). The reference counter is aligned (reset) by SYSREF.

Since the lane arrival times are modulo-values, it is important to use arithmetic that accounts for the modulus (the *latest* arriving lane might actually have a *smaller* LANE_ARR value than the earliest arriving lane). 図 7-55 and 図 7-56 depict the RBD calculation graphically to emphasize this. The lane arrival times are mapped onto a circle with a circumference of 64 quad-bytes which corresponds to the modulo-64 counter used to measure lane arrival times.

The earliest usable RBD value is equal to the latest LANE_ARR value plus 1 (modulo 64). The latest usable RBD value is equal to the earliest LANE_ARR value plus the buffer depth (modulo 64) (the buffer depth is 16 quad-octets, except when K x F = 32, then the buffer depth is reduced to 8 quad-octets). Note that the latest, usable RBD value causes the earliest arriving lane to overwrite buffer data on the same clock cycle that the data is being read out (this is acceptable and does not cause overflow).

Choosing an RBD value in the middle of the usable range will maximize the skew tolerance, however the user may choose a value closer to the latest arriving lane if lower latency is desired.

Copyright © 2024 Texas Instruments Incorporated

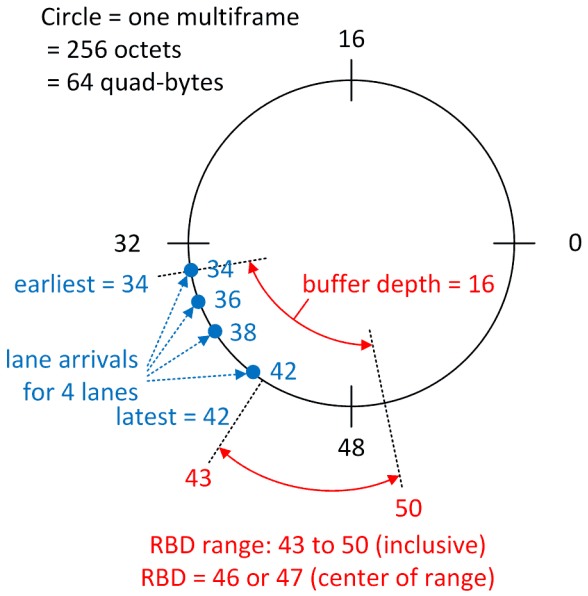


図 7-55. RBD Example (lane arrivals do not straddle zero)

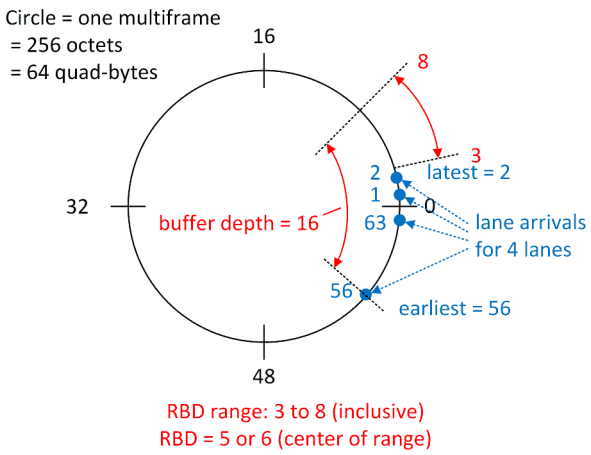


図 7-56. RBD Example (lane arrivals straddle zero)

7.3.7.9 Operation in Subclass 0 Systems

The device can operate with subclass 0 compatibility provided that multi-DAC synchronization and deterministic latency are not required. With these limitations, the device can operate without the application of SYSREF. The internal LMFC is automatically self-generated with unknown starting phase. RBD does not need to be programmed as the elastic buffer is released automatically just after the latest arriving lane begins to write to the elastic buffer. $\overline{\text{SYNC}}$ is used as normal to initiate the CGS and ILAS.

7.3.7.10 Link Reset

The entire link layer for all lanes is reset any time:

- There is a gearbox FIFO underflow/overflow detected (LANE_ERR[0]) on a lane used by the JESD link
- There is an elastic buffer overflow detected (EB_ERR) on a lane used by the JESD link
- The JESD link goes down (JESD_LINK_DOWN_ALM)
- SYSREF causes clock divider or LMFC/LEMC realignment (REALIGNED)
- The JTimer expires (JTIMER_EXPIRED_ALM)

7.3.8 Alarm Generation

The alarm pin is useful for notifying the host controller of events that may require intervention. Any active alarms in the SYS_ALM register asserts the alarm output if they are not masked in the ALM_MASK register.

7.4 Device Functional Modes

This section describes the functional modes of the device. Some of the features in this section have been discussed in further detail in Feature Description.

7.4.1 DUC and DDS Modes

The device contains a DUC mode and a direct digital synthesis (DDS) mode. The data path mode uses complex (I and Q) data from the JESD interface, interpolates and upconverts it in the DUCs, sums the DUC outputs and generates the analog signal in the DAC. In DDS mode, the DUC NCOs are used directly to generate tones without requiring input data.

Copyright © 2024 Texas Instruments Incorporated

The list below summarized how DDS mode differs from DUC mode:

1. Interpolation filters are not enabled
2. JESD204C interface is not enabled
3. NCOs use less power (no complex mixing)
4. AMP register supplies unique amplitudes for each DUC (DDS) channel, allowing DDS channels to generate tones to cancel harmonic tones in the DAC output. For example, DDS channel 0 could produce a fundamental tone, channel 1 could produce a tone to cancel HD2, and channel 2 could produce a tone to cancel HD3.
5. The JMODE and DUC_L registers are ignored and the SYSREF period constraints imposed by the JESD204C system and interpolation filters are removed. See 表 7-3.

Copyright © 2024 Texas Instruments Incorporated

7.4.2 JESD204C Interface Modes

Each operational mode has a limited set of available interface formats (number of lanes, resolution).

7.4.2.1 JESD204C Interface Modes

The device JESD204C modes are configured with the parameters defined in 表 7-19, 表 7-20 and 表 7-21.

表 7-19. JESD204C Interface Parameter Definitions

Parameter	Description
JMODE	JESD204C mode number. The user configures this parameter to choose a supported mode. Most other parameters are derived from this setting. See 表 7-22.
LS	Lanes per sample stream. This is derived from JMODE. See 表 7-22.
LT	Ratio of clock to input sample rate. LT = F_{CLK} / F_{INPUT}. A value of 0.5 indicates that the DES1X mode is enabled, and the input sampling rate is twice the DAC clock frequency (the JESD204C system provides two samples per CLK cycle). If DES1X mode is not enabled, LT equals the interpolation factor, the ratio of output to input sample rate. Not that DES2X mode does not affect the value of LT. Interpolation factor 1-256x is programmed in the DUC_L register.
Lx	Maximum number of lanes used for a given JMODE. The link will scale down the number of active lanes (L) depending on how many channels are enabled. See JESD_M register.
Mx	Maximum number of streams for a given JMODE. Mx is computed automatically according to 表 7-22. The user can specify the actual number of streams (M) using the JESD_M register.
R	Number of bits transmitted per lane per CLK cycle. Derived from JMODE and LT (see 表 7-22). Based on R, the user must program REFDIV, MPY, and RATE registers. Additionally, the maximum CLK frequency is a function of R.
SI	Sample Interleaving/Increment Factor. A value of 1 indicates that the standard transport layer mapping from the JESD204C standard is used (samples are mapped linearly from 0 to S-1). A value greater than 1 indicates that an alternate mapping is used as follows: Map samples starting with sample 0, incrementing the index by SI. Repeat this as many times as necessary to map all S samples, starting each repetition at an index that is one larger than the previous repetition. See JESD Format Diagrams JESD Format Diagrams.
KR	For 8b/10b operation, KR defines the legal values of K (frames per multiframe). The legal values are restricted to facilitate upset immunity of the elastic buffer. The multiframe length is restricted to a multiple of the elastic buffer depth of 64 characters (buffer depth is reduced to 32 characters if K=32 and F=1). For 8b/10b modes, K is programmed via the KM1 register.

Copyright © 2024 Texas Instruments Incorporated

表 7-20. JESD204C Link Parameters

Parameter	Description	ILAS Field Name	Value for this device see (1)
ADJCNT	DAC LMFC adjustment	ADJCNT[3:0]	n/a
ADJDIR	DAC LMFC adjustment direction	ADJDIR[0]	n/a
BID	Bank ID	BID[3:0]	n/a
CF	Number of control words per frame	CF[4:0]	0
CS	Number. of control bits per sample	CS[1:0]	0
DID	Device identification number	DID[7:0]	n/a
F	Number of octets per frame (per lane)	F[7:0]	See 表 7-22
HD	High Density Format	HD[0]	See 表 7-22
JESDV	JESD204 Version	JESDV[2:0]	n/a
K	Number of frames per multiframe	K[7:0]	Set by KM1register
L	Number of lanes per link	L[4:0]	ceiling(M/Mx*Lx)
LID	Lane identification no.	LID[4:0]	n/a
M	Number of sample streams per link (see (1))	M[7:0]	Set by JESD_M register
N	Bits per sample (before adding control or tail bits) for JESD204C interface.	N[4:0]	See 表 7-22
N'	Total number of bits per sample (including control and tail bits) for JESD204C interface.	N'[4:0]	See 表 7-22
PHADJ	Phase adjustment request to DAC	PHADJ[0]	n/a
S	Number of samples per stream per frame	S[4:0]	See 表 7-22
SCR	Scrambling enabled	SCR[0]	Set by SCR register
SUBCLASSV	Device Subclass Version	SUBCLASSV[2:0]	n/a
RES1	Reserved field 1	RES1[7:0]	n/a
RES2	Reserved field 2	RES2[7:0]	n/a
CHKSUM	Checksum (sum of all above fields, modulo 256)	FCHK[7:0]	n/a

(1) In 8b/10b modes, the transmitter may send link configuration octets during the ILAS. The values sent by the transmitter are not checked by this receiver, and they do not need to match the operational values of the receiver.

表 7-21. Link Parameters (applicable in 64b/66b encoding only)

Parameter	Description	Value for this device see (1)
E	Number of multi-blocks per extended multi-block (64b/66b encoding only)	1

Each supported mode is assigned a mode number which can be programmed into the JMODE register with the parameters listed in 表 7-22.

Copyright © 2024 Texas Instruments Incorporated

表 7-22. JESD Interface Modes

JMODE	Encoding	Max Input Sample Rate per Stream (MSPS)#none#	MAX Serdes Baud Rate (Gbps)	R = F_{BIT}/ F_{CLK}	N	Mx = Max # Streams	Ls = Lanes/ Stream	Lx = Max # Lanes	LT = Interpolation		JESD Format				KR
									MIN	MAX	F	S	HD	SI	
0	8b/10b	10240	12.8	1.25	16	1	16	16	1	1	2	16	0	1	32, 64, 128
	64b/66b	12000	12.375	1.03125											
1	8b/10b	5120	12.8	2.5/LT	16	2	8	16	1	8	2	8	0	1	32, 64, 128
	64b/66b	6206.1	12.8	2.0625/LT											
2	8b/10b	2560	12.8	5/LT	16	4	4	16	1	16	2	4	0	1	32, 64, 128
	64b/66b	3103.0	12.8	4.125/LT											
3	8b/10b	1280	12.8	10/LT	16	8	2	16	2	32	2	2	0	1	32, 64, 128
	64b/66b	1551.5	12.8	8.25/LT											
4	8b/10b	640	12.8	20/LT	16	8	1	8	4	64	2	1	0	1	32, 64, 128
	64b/66b	775.8	12.8	16.5/LT											
5	8b/10b	320	12.8	40/LT	16	8	½	4	8	128	4	1	0	1	16,32,64
	64b/66b	387.9	12.8	33/LT											
6	8b/10b	160	12.8	80/LT	16	8	¼	2	16	256	8	1	0	1	8,16,32
	64b/66b	193.9	12.8	66/LT											
7	8b/10b	80	12.8	160/LT	16	8	⅛	1	32	256	16	1	0	1	4,8,16
	64b/66b	97.0	12.8	132/LT											
8	8b/10b	12800	12.8	1/LT	12	1	16	16	0.5	1	8	80	0	16	8,16,32
	64b/66b	15515.2	12.8	0.825/LT											
9	8b/10b	9600	12.8	1.25	12	1	12	12	1	1	2	16	1	1	32,64, 128
	64b/66b	12000	12.375	1.03125											
10	8b/10b	6400	12.8	2	12	2	8	16	1	1	8	40	0	8	8,16,32
	64b/66b	7757.6	12.8	1.65											
11	8b/10b	4800	12.8	2.5	12	2	6	12	1	1	2	8	1	1	32,64, 128
	64b/66b	6206.1	12.8	2.0625											
12	8b/10b	3200	12.8	4	12	2	4	8	1	1	8	20	0	4	8,16,32
	64b/66b	3878.8	12.8	3.3											
13	8b/10b	2400	12.8	5	12	2	3	6	1	1	2	4	1	1	32,64, 128
	64b/66b	3103.0	12.8	4.125											
14	8b/10b	20480	12.8	0.625/LT	8	1	16	16	0.5	1	1	16	0	1	32,64, 128,256
	64b/66b	24000	12.375	0.515625/LT											
15	8b/10b	10240	12.8	1.25	8	2	8	16	1	1	1	8	0	1	32,64, 128,256
	64b/66b	12000	12.375	1.03125											
16	8b/10b	5120	12.8	2.5	8	2	4	8	1	1	1	4	0	1	32,64, 128,256
	64b/66b	6206.1	12.8	2.0625											

1. At minimum interpolation rate

7.4.2.2 JESD204C Format Diagrams

The following sub-sections depict each output format, showing how samples and tail bits are mapped to the lanes. Any lanes that are not shown in the output format tables are unused. Each table depicts exactly one frame. Tail bits are discarded and ignored by the transport layer. All diagrams are with respect to the logical lane numbers which can be arbitrarily mapped to the external physical lanes using LANE_SELn.

表 7-23. Format Notation Description

Notation	Description
T	Tail bits (used for some 12-bit modes)

表 7-23. Format Notation Description (続き)

Notation	Description
CH0_I[n]	In-Phase samples for channel 0. Can also be considered as “channel A” when the input isn’t considered to be complex data.
CH0_Q[n]	Quadrature samples for channel 0. Can also be considered as “channel B” when the input isn’t considered to be complex data.
CH1_I[n]	In-Phase samples for channel 1.
CH1_Q[n]	Quadrature samples for channel 1.
CH2_I[n]	In-Phase samples for channel 2.
CH2_Q[n]	Quadrature samples for channel 2.
CH3_I[n]	In-Phase samples for channel 3.
CH3_Q[n]	Quadrature samples for channel 3.

In all of the above notations, n indicates the sample number. Some JESD204C modes have S=1 (one sample per stream per frame). In those cases, “[n]” is omitted in the descriptions.

7.4.2.2.1 16-bit Formats

表 7-24. JMODE 0 (16-bit, 16 lanes per stream, 1 stream)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I[0]			
Lane 1	CH0_I[1]			
Lane 2	CH0_I[2]			
Lane 3	CH0_I[3]			
Lane 4	CH0_I[4]			
Lane 5	CH0_I[5]			
Lane 6	CH0_I[6]			
Lane 7	CH0_I[7]			
Lane 8	CH0_I[8]			
Lane 9	CH0_I[9]			
Lane 10	CH0_I[10]			
Lane 11	CH0_I[11]			
Lane 12	CH0_I[12]			
Lane 13	CH0_I[13]			
Lane 14	CH0_I[14]			
Lane 15	CH0_I[15]			

表 7-25. JMODE 1 (16-bit, 8 lanes per stream, 2 streams maximum)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I[0]			
Lane 1	CH0_I[1]			
Lane 2	CH0_I[2]			
Lane 3	CH0_I[3]			
Lane 4	CH0_I[4]			
Lane 5	CH0_I[5]			
Lane 6	CH0_I[6]			
Lane 7	CH0_I[7]			

Copyright © 2024 Texas Instruments Incorporated

表 7-25. JMODE 1 (16-bit, 8 lanes per stream, 2 streams maximum) (続き)

Octet	0		1	
Nibble	0	1	2	3
Lane 8	CH0_Q[0]			
Lane 9	CH0_Q[1]			
Lane 10	CH0_Q[2]			
Lane 11	CH0_Q[3]			
Lane 12	CH0_Q[4]			
Lane 13	CH0_Q[5]			
Lane 14	CH0_Q[6]			
Lane 15	CH0_Q[7]			

表 7-26. JMODE 2 (16-bit, 4 lanes per stream, 4 streams maximum)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I[0]			
Lane 1	CH0_I[1]			
Lane 2	CH0_I[2]			
Lane 3	CH0_I[3]			
Lane 4	CH0_Q[0]			
Lane 5	CH0_Q[1]			
Lane 6	CH0_Q[2]			
Lane 7	CH0_Q[3]			
Lane 8	CH1_I[0]			
Lane 9	CH1_I[1]			
Lane 10	CH1_I[2]			
Lane 11	CH1_I[3]			
Lane 12	CH1_Q[0]			
Lane 13	CH1_Q[1]			
Lane 14	CH1_Q[2]			
Lane 15	CH1_Q[3]			

表 7-27. JMODE 3 (16-bit, 2 lanes per stream, 8 streams maximum)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I[0]			
Lane 1	CH0_I[1]			
Lane 2	CH0_Q[0]			
Lane 3	CH0_Q[1]			
Lane 4	CH1_I[0]			
Lane 5	CH1_I[1]			
Lane 6	CH1_Q[0]			
Lane 7	CH1_Q[1]			
Lane 8	CH2_I[0]			
Lane 9	CH2_I[1]			
Lane 10	CH2_Q[0]			
Lane 11	CH2_Q[1]			

Copyright © 2024 Texas Instruments Incorporated

表 7-27. JMODE 3 (16-bit, 2 lanes per stream, 8 streams maximum) (続き)

Octet	0		1	
Nibble	0	1	2	3
Lane 12	CH3_I[0]			
Lane 13	CH3_I[1]			
Lane 14	CH3_Q[0]			
Lane 15	CH3_Q[1]			

表 7-28. JMODE 4 (16-bit, 1 lane per stream, 8 streams maximum)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I			
Lane 1	CH0_Q			
Lane 2	CH1_I			
Lane 3	CH1_Q			
Lane 4	CH2_I			
Lane 5	CH2_Q			
Lane 6	CH3_I			
Lane 7	CH3_Q			

表 7-29. JMODE 5 (16-bit, 1/2 lane per stream, 8 streams maximum)

Octet	0		1		2		3	
Nibble	0	1	2	3	4	5	6	7
Lane 0	CH0_I				CH0_Q			
Lane 1	CH1_I				CH1_Q			
Lane 2	CH2_I				CH2_Q			
Lane 3	CH3_I				CH3_Q			

表 7-30. JMODE 6 (16-bit, 1/4 lane per stream, 8 streams maximum)

Octet	0		1		2		3		4		5		6		7	
Nibble	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Lane 0	CH0_I				CH0_Q				CH1_I				CH1_Q			
Lane 1	CH2_I				CH2_Q				CH3_I				CH3_Q			

表 7-31. JMODE 7 (16-bit, 1/8 lane per stream, 8 streams maximum)

Octet	0		1		2		3		4		5		6		7		8		9		10		11		12		13		14		15	
Nibble	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Lane 0	CH0_I				CH0_Q				CH1_I				CH1_Q				CH2_I				CH2_Q				CH3_I				CH3_Q			

7.4.2.2.2 12-bit Formats

表 7-32. JMODE 8 (12-bit, 16 lanes per stream, 1 stream)

Octet	0		1		2		3		4		5		6		7	
Nibble	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Lane 0	CH0_I[0]		CH0_I[16]		CH0_I[32]		CH0_I[48]		CH0_I[64]						T	
Lane 1	CH0_I[1]		CH0_I[17]		CH0_I[33]		CH0_I[49]		CH0_I[65]						T	
Lane 2	CH0_I[2]		CH0_I[18]		CH0_I[34]		CH0_I[50]		CH0_I[66]						T	
Lane 3	CH0_I[3]		CH0_I[19]		CH0_I[35]		CH0_I[51]		CH0_I[67]						T	
Lane 4	CH0_I[4]		CH0_I[20]		CH0_I[36]		CH0_I[52]		CH0_I[68]						T	

Copyright © 2024 Texas Instruments Incorporated

表 7-32. JMODE 8 (12-bit, 16 lanes per stream, 1 stream) (続き)

Octet	0		1		2		3		4		5		6		7	
Nibble	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Lane 5	CH0_I[5]		CH0_I[21]		CH0_I[37]		CH0_I[53]		CH0_I[69]						T	
Lane 6	CH0_I[6]		CH0_I[22]		CH0_I[38]		CH0_I[54]		CH0_I[70]						T	
Lane 7	CH0_I[7]		CH0_I[23]		CH0_I[39]		CH0_I[55]		CH0_I[71]						T	
Lane 8	CH0_I[8]		CH0_I[24]		CH0_I[40]		CH0_I[56]		CH0_I[72]						T	
Lane 9	CH0_I[9]		CH0_I[25]		CH0_I[41]		CH0_I[57]		CH0_I[73]						T	
Lane 10	CH0_I[10]		CH0_I[26]		CH0_I[42]		CH0_I[58]		CH0_I[74]						T	
Lane 11	CH0_I[11]		CH0_I[27]		CH0_I[43]		CH0_I[59]		CH0_I[75]						T	
Lane 12	CH0_I[12]		CH0_I[28]		CH0_I[44]		CH0_I[60]		CH0_I[76]						T	
Lane 13	CH0_I[13]		CH0_I[29]		CH0_I[45]		CH0_I[61]		CH0_I[77]						T	
Lane 14	CH0_I[14]		CH0_I[30]		CH0_I[46]		CH0_I[62]		CH0_I[78]						T	
Lane 15	CH0_I[15]		CH0_I[31]		CH0_I[47]		CH0_I[63]		CH0_I[79]						T	

表 7-33. JMODE 9 (12-bit, 12 lanes per stream, 1 stream)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I[0]			CH0_I[1][11:8]
Lane 1	CH0_I[1][7:0]		CH0_I[2] [11:4]	
Lane 2	CH0_I[2] [3:0]	CH0_I[3]		
Lane 3	CH0_I[4]			CH0_I[5][11:8]
Lane 4	CH0_I[5][7:0]		CH0_I[6] [11:4]	
Lane 5	CH0_I[6] [3:0]	CH0_I[7]		
Lane 6	CH0_I[8]			CH0_I[9][11:8]
Lane 7	CH0_I[9][7:0]		CH0_I[10] [11:4]	
Lane 8	CH0_I[10] [3:0]	CH0_I[11]		
Lane 9	CH0_I[12]			CH0_I[13][11:8]
Lane 10	CH0_I[13][7:0]		CH0_I[14] [11:4]	
Lane 11	CH0_I[14] [3:0]	CH0_I[15]		

表 7-34. JMODE 10 (12-bit, 8 lanes per stream, 2 streams maximum)

Octet	0		1		2		3		4		5		6		7	
Nibble	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Lane 0	CH0_I[0]		CH0_I[8]		CH0_I[16]		CH0_I[24]		CH0_I[32]						T	
Lane 1	CH0_I[1]		CH0_I[9]		CH0_I[17]		CH0_I[25]		CH0_I[33]						T	
Lane 2	CH0_I[2]		CH0_I[10]		CH0_I[18]		CH0_I[26]		CH0_I[34]						T	
Lane 3	CH0_I[3]		CH0_I[11]		CH0_I[19]		CH0_I[27]		CH0_I[35]						T	
Lane 4	CH0_I[4]		CH0_I[12]		CH0_I[20]		CH0_I[28]		CH0_I[36]						T	
Lane 5	CH0_I[5]		CH0_I[13]		CH0_I[21]		CH0_I[29]		CH0_I[37]						T	
Lane 6	CH0_I[6]		CH0_I[14]		CH0_I[22]		CH0_I[30]		CH0_I[38]						T	
Lane 7	CH0_I[7]		CH0_I[15]		CH0_I[23]		CH0_I[31]		CH0_I[39]						T	
Lane 8	CH0_Q[0]		CH0_Q[8]		CH0_Q[16]		CH0_Q[24]		CH0_Q[32]						T	
Lane 9	CH0_Q[1]		CH0_Q[9]		CH0_Q[17]		CH0_Q[25]		CH0_Q[33]						T	
Lane 10	CH0_Q[2]		CH0_Q[10]		CH0_Q[18]		CH0_Q[26]		CH0_Q[34]						T	
Lane 11	CH0_Q[3]		CH0_Q[11]		CH0_Q[19]		CH0_Q[27]		CH0_Q[35]						T	
Lane 12	CH0_Q[4]		CH0_Q[12]		CH0_Q[20]		CH0_Q[28]		CH0_Q[36]						T	

Copyright © 2024 Texas Instruments Incorporated

表 7-34. JMODE 10 (12-bit, 8 lanes per stream, 2 streams maximum) (続き)

Octet	0		1		2		3		4		5		6		7	
Nibble	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Lane 13	CH0_Q[5]		CH0_Q[13]		CH0_Q[21]		CH0_Q[29]		CH0_Q[37]						T	
Lane 14	CH0_Q[6]		CH0_Q[14]		CH0_Q[22]		CH0_Q[30]		CH0_Q[38]						T	
Lane 15	CH0_Q[7]		CH0_Q[15]		CH0_Q[23]		CH0_Q[31]		CH0_Q[39]						T	

表 7-35. JMODE 11 (12-bit, 6 lanes per stream, 2 streams maximum)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I[0]			CH0_I[1][11:8]
Lane 1	CH0_I[1][7:0]		CH0_I[2] [11:4]	
Lane 2	CH0_I[2] [3:0]	CH0_I[3]		
Lane 3	CH0_I[4]			CH0_I[5][11:8]
Lane 4	CH0_I[5][7:0]		CH0_I[6] [11:4]	
Lane 5	CH0_I[6] [3:0]	CH0_I[7]		
Lane 6	CH0_Q[0]			CH0_Q[1][11:8]
Lane 7	CH0_Q[1][7:0]		CH0_Q[2] [11:4]	
Lane 8	CH0_Q[2] [3:0]	CH0_Q[3]		
Lane 9	CH0_Q[4]			CH0_Q[5][11:8]
Lane 10	CH0_Q[5][7:0]		CH0_Q[6] [11:4]	
Lane 11	CH0_Q[6] [3:0]	CH0_Q[7]		

表 7-36. JMODE 12 (12-bit, 4 lanes per stream, 2 streams maximum)

Octet	0		1		2		3		4		5		6		7	
Nibble	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Lane 0	CH0_I[0]		CH0_I[4]		CH0_I[8]		CH0_I[12]		CH0_I[16]						T	
Lane 1	CH0_I[1]		CH0_I[5]		CH0_I[9]		CH0_I[13]		CH0_I[17]						T	
Lane 2	CH0_I[2]		CH0_I[6]		CH0_I[10]		CH0_I[14]		CH0_I[18]						T	
Lane 3	CH0_I[3]		CH0_I[7]		CH0_I[11]		CH0_I[15]		CH0_I[19]						T	
Lane 4	CH0_Q[0]		CH0_Q[4]		CH0_Q[8]		CH0_Q[12]		CH0_Q[16]						T	
Lane 5	CH0_Q[1]		CH0_Q[5]		CH0_Q[9]		CH0_Q[13]		CH0_Q[17]						T	
Lane 6	CH0_Q[2]		CH0_Q[6]		CH0_Q[10]		CH0_Q[14]		CH0_Q[18]						T	
Lane 7	CH0_Q[3]		CH0_Q[7]		CH0_Q[11]		CH0_Q[15]		CH0_Q[19]						T	

表 7-37. JMODE 13 (12-bit, 3 lanes per stream, 2 streams maximum)

Octet	0		1	
Nibble	0	1	2	3
Lane 0	CH0_I[0]			CH0_I[1][11:8]
Lane 1	CH0_I[1][7:0]		CH0_I[2] [11:4]	
Lane 2	CH0_I[2] [3:0]	CH0_I[3]		
Lane 3	CH0_I[4]			CH0_I[5][11:8]
Lane 4	CH0_I[5][7:0]		CH0_I[6] [11:4]	
Lane 5	CH0_I[6] [3:0]	CH0_I[7]		

Copyright © 2024 Texas Instruments Incorporated

7.4.2.2.3 8-bit Formats

表 7-38. JMODE 14 (8-bit, 16 lanes per stream, 1 stream)

Octet	0	
Nibble	**0**	**1**
Lane 0	CH0_I[0]	
Lane 1	CH0_I[1]	
Lane 2	CH0_I[2]	
Lane 3	CH0_I[3]	
Lane 4	CH0_I[4]	
Lane 5	CH0_I[5]	
Lane 6	CH0_I[6]	
Lane 7	CH0_I[7]	
Lane 8	CH0_I[8]	
Lane 9	CH0_I[9]	
Lane 10	CH0_I[10]	
Lane 11	CH0_I[11]	
Lane 12	CH0_I[12]	
Lane 13	CH0_I[13]	
Lane 14	CH0_I[14]	
Lane 15	CH0_I[15]	

表 7-39. JMODE 15 (8-bit, 8 lanes per stream, 2 streams maximum)

Octet	0	
Nibble	**0**	**1**
Lane 0	CH0_I[0]	
Lane 1	CH0_I[1]	
Lane 2	CH0_I[2]	
Lane 3	CH0_I[3]	
Lane 4	CH0_I[4]	
Lane 5	CH0_I[5]	
Lane 6	CH0_I[6]	
Lane 7	CH0_I[7]	
Lane 8	CH0_Q[0]	
Lane 9	CH0_Q[1]	
Lane 10	CH0_Q[2]	
Lane 11	CH0_Q[3]	
Lane 12	CH0_Q[4]	
Lane 13	CH0_Q[5]	
Lane 14	CH0_Q[6]	
Lane 15	CH0_Q[7]	

表 7-40. JMODE 16 (8-bit, 4 lanes per stream, 2 streams maximum)

Octet	0	
Nibble	**0**	**1**
Lane 0	CH0_I[0]	
Lane 1	CH0_I[1]	
Lane 2	CH0_I[2]	

Copyright © 2024 Texas Instruments Incorporated

表 7-40. JMODE 16 (8-bit, 4 lanes per stream, 2 streams maximum) (続き)

Octet	0	
Nibble	0	1
Lane 3	CH0_I[3]	
Lane 4	CH0_Q[0]	
Lane 5	CH0_Q[1]	
Lane 6	CH0_Q[2]	
Lane 7	CH0_Q[3]	

7.4.3 NCO Synchronization Latency

There are two deterministic methods for synchronizing the NCO (frequency or phase change, accumulator reset): through an LSB of the JESD204C interface or via SYSREF. The latency parameters for each sychronization method are listed in 表 7-41.

Using SYSREF as the Synchronization source, the latency parameter T_{SYSREF_NCO} is the time between the moment SYSREF is sampled high by CLK and the arrival of the NCO change at the DAC output. The alignment to the data path samples can be calculated by the Excel spreadsheet latency calculator discussed in セクション 7.4.4.

When using the JESD204C interface LSB, the latency parameter T_{JSYNC_NCO} is the difference in time of the NCO synchronization event relative to the corresponding data sample aligned with the LSB. T_{JSYNC_NCO} is deterministic, but for some modes depends on the alignment of the LSB rising edge to the multiframe boundary (see 表 7-42).

表 7-41. NCO Synchronization Latency Parameters

Latency Parameter	Description	Value
T_{SYSREF_NCO}	Latency from SYSREF sampled high (by CLK) to DAC output reacting to an NCO synchronization event (that was triggered by SYSREF).	477.5 CLK cycles
T_{JSYNC_NCO}	The latency through the interpolation filter(s) to the NCO minus the latency of the LSB that synchronizes the NCO. Applies only when using the LSB of the input data to synchronize the NCO. To make input sample **n** be the first sample to be mixed with a new NCO frequency or phase, the LSB should be brought high on sample **n'** = **n**+T_{JSYNC_NCO}/LT. Note that **n'** may not be an integer as the synchronization path is not always a whole number of input sample periods.	See 表 7-42

表 7-42. T_{JSYNC_NCO} vs. LT

Interpolation Factor (LT)	T_{JSYNC_NCO} [CLK cycles](1)
2	-144, -142, -140, -138, -136, -134, -132, -130
3	-89, -86, -83, -81, -80, -78, -77, -75, -74, -72, -71, -69, -68, -66, -63, -60
4	-36, -32, -28, -24
6	34, 40, 42, 46, 48, 52, 54, 60
8	86, 94
12	186, 194, 198, 206
16	290
24	458, 466
32	648
48	968
64	1396
96	2036
128	2932
192	4212

Copyright © 2024 Texas Instruments Incorporated

表 7-42. T_{JSYNC_NCO} vs. LT (続き)

Interpolation Factor (LT)	T_{JSYNC_NCO} [CLK cycles](1)
256	6004

(1) When multiple values are listed, it indicates that T_{JSYNC_NCO} depends on when the LSB rises with respect to the multiframe boundary.

7.4.4 Data Path Latency

There are several difference latencies defined for the device as shown in 図 7-57 and listed in 表 7-43. The latency within the device is dependent on the mode of operation, including JMODE, Interpolation factor, RBD setting, NCO usage and DES setting. An Excel spreadsheet calculator is provided by TI to calculate the device latency in different modes of operation.

In JESD204C subclass 0 operation, the latency from Serdes input to DAC output is called T_{DAC_LAT0} and is not deteriministic and a minimum and maximum range is provided in the Excel spreadsheet calculator.

In JESD204C subclass 1 operation, the latency T_{DAC_LAT} from the SYSREF input to DAC output is deterministic and is provided in the Excel spreadsheet calculator. The JESD204C link latency is deterministic as long as SYSREF is sampled reliably and the RBD value is set properly.

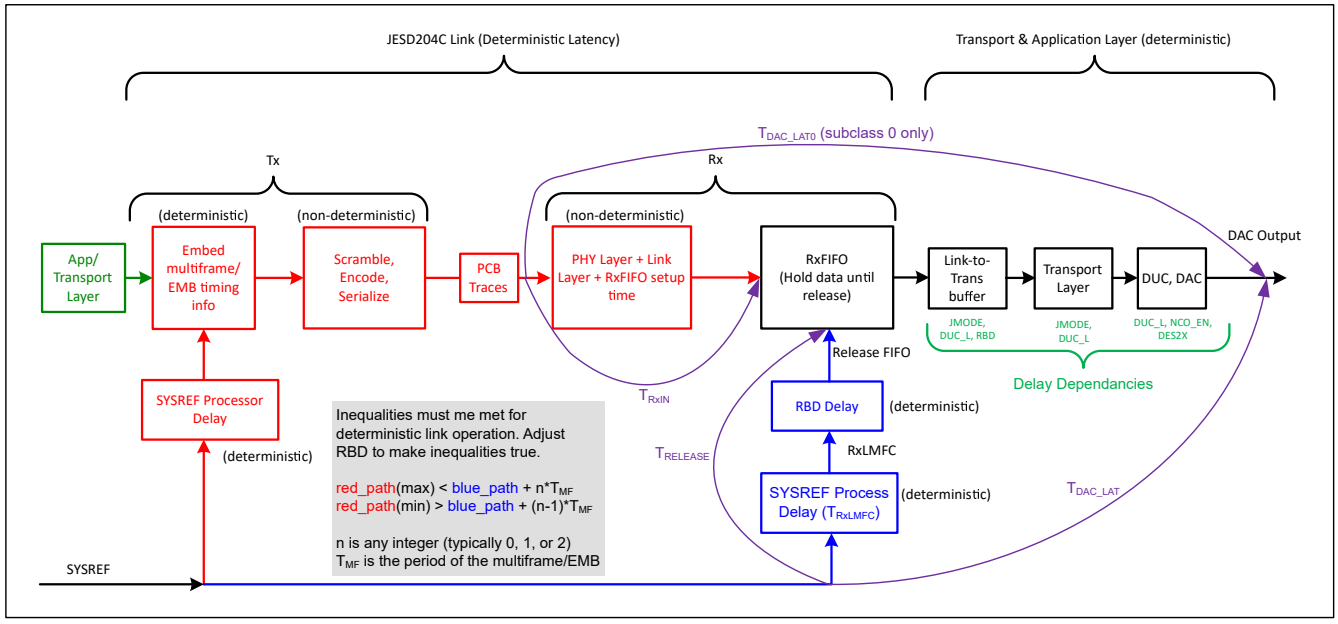


図 7-57. Definition of Device Latencies

表 7-43. Latency Definitions

Latency Parameter	Definition
$T_{RELEASE}$	Latency from the rising edge of CLK that follows the rising edge of SYSREF to release event for elastic buffer. (subclass 1 only).
T_{DAC_LAT}	Latency from the rising edge of CLK that follows the rising edge of SYSREF to the time of the first sample at the DAC output of the multiframe/extended multiblock launched by SYSREF (subclass 1 only).
T_{RxIN}	Latency from the receiver data inputs to the elastic buffer input, including the minimum setup time of the elastic buffer. This is non-deterministic, so a minimum and maximum limit are provided.
T_{DAC_LAT0}	Latency from receiver data inputs (multiframe/EMB boundary) to first sample of a multiframe launched on DAC output. This is non-deterministic, so a minimum and maximum limit are provided (subclass 0 only).

Copyright © 2024 Texas Instruments Incorporated

7.5 Programming

The device contains two programming interfaces: a SPI interface and a Fast Reconfiguration (FR) interface for fast programming of NCO frequency and phase.

7.5.1 Using the Standard SPI Interface

The standard SPI interface is accessed using the following four pins: serial clock (SCLK), serial data in (SDI), serial data out (SDO), and serial interface chip-select ($\overline{SCS}$). Register access is enabled through the $\overline{SCS}$ pin.

7.5.1.1 $\overline{SCS}$

This signal must be asserted low to access a register through the serial interface. Setup and hold times with respect to the SCLK must be observed.

7.5.1.2 SCLK

Serial data input is accepted at the rising edge of this signal. SCLK has no minimum frequency requirement.

7.5.1.3 SDI

Each register access requires a specific 24-bit pattern at this input. This pattern consists of a read-and-write (R/W) bit, register address, and register value. The data are shifted in MSB first and multi-byte registers are always in little-endian format (least significant byte stored at the lowest address). Setup and hold times with respect to the SCLK must be observed (see the Switching Characteristics table).

7.5.1.4 SDO

The SDO signal provides the output data requested by a read command. This output is high impedance during write bus cycles and during the read bit and register address portion of read bus cycles.

7.5.1.5 Serial Interface Protocol

As shown in 図 7-58, each register access consists of 24 bits. The first bit is high for a read and low for a write.

The next 15 bits are the address of the register that is to be written to. During write operations, the last eight bits are the data written to the addressed register. During read operations, the last eight bits on SDI are ignored and, during this time, the SDO outputs the data from the addressed register. 図 7-58 shows the serial protocol details.

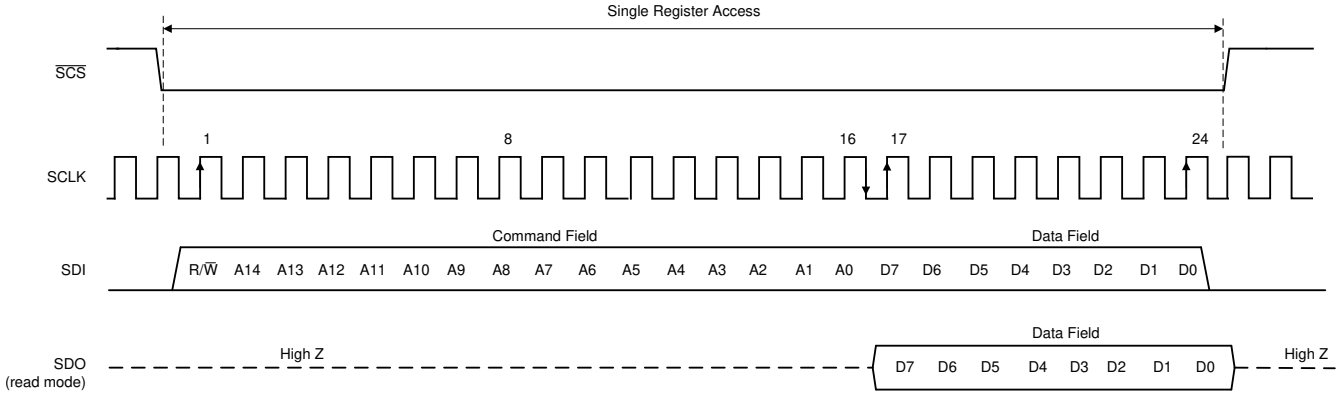


図 7-58. Serial Interface Protocol: Single Read and Write

Copyright © 2024 Texas Instruments Incorporated

7.5.1.6 Streaming Mode

The serial interface supports streaming reads and writes. In this mode, the initial 24 bits of the transaction specifies the access type, register address, and data value as normal. Additional clock cycles of write or read data are immediately transferred, as long as the $\overline{SCS}$ input is maintained in the asserted (logic low) state. The register address auto increments (default) or decrements for each subsequent 8-bit transfer of the streaming transaction. The ASCEND bit (register 000h, bit 5) controls whether the address value ascends (increments) or descends (decrements). 図 7-59 shows the streaming mode transaction details.

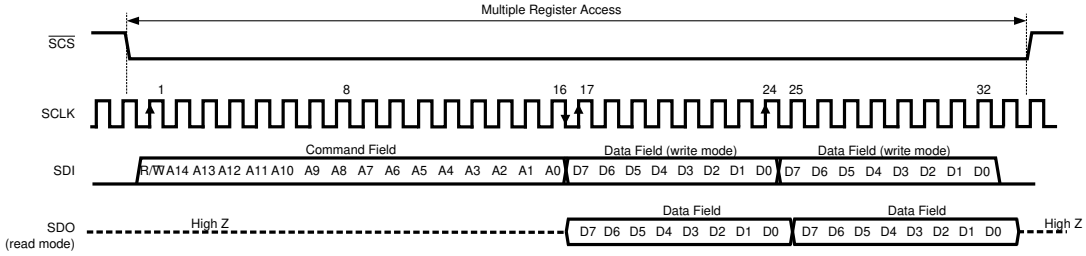


図 7-59. Serial Interface Protocol: Streaming Read and Write

7.5.2 Using the Fast Reconfiguration Interface

The FR interface provides fast write-only access to configure NCO frequencies and synchronization. The FR interface is similar to the SPI interface, but 4 bits are sent per clock cycle. The FR timing diagram is shown in 図 7-60. It uses a R/W bit (always Write for this device), a transaction sync bit (FRS), and 14-bits of address followed by some number of data bytes. The address is decremented after each data byte (consistent with little-endian). The interface is byte addressable and data is committed after each byte. The FR interface is takes 4-bits (one nibble) per clock. For multi-nibble fields, data is sent most-significant nibble first. When the transaction sync bit (FRS) is set, the synchronization event specified in the NCO_SYNC_SRC register field occurs at the rising edge of $\overline{FRCS}$. Transactions ended before the completion of the first data byte may not trigger the sync event.

Copyright © 2024 Texas Instruments Incorporated

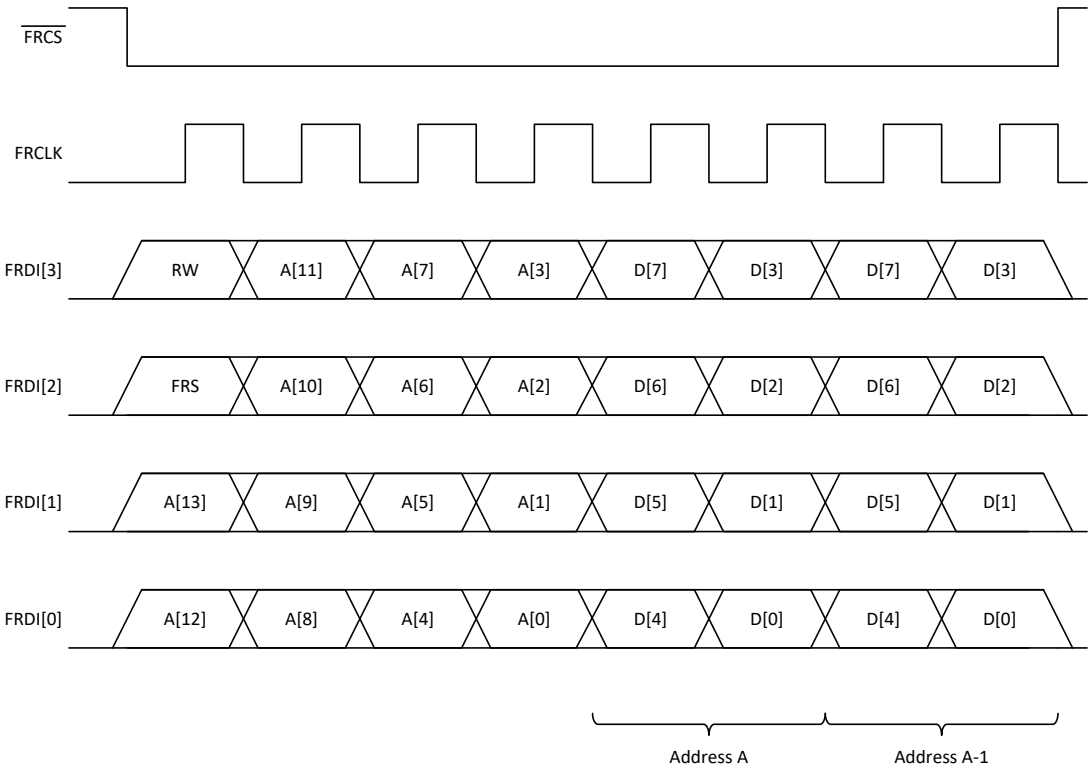


図 7-60. FR Interface Timing Diagram

The FR interface registers are listed in 表 7-44. There are two registers that can change the NCO frequency - FR_FREQL[3:0] is 64-bits for each NCO and changes the entire frequency word. FR_FREQS[3:0] is 32-bits for each NCO and changes only the upper 32-bits of the frequency word, providing for faster frequency changes.

表 7-44. FR Interface Registers

Address	Name	Description
0x00FF	FR_NCO_AR	FR NCO Accumulator Reset (default: 0x0f) [7:4] RESERVED [3:0] FR_NCO_AR For each bit FR_NCO_AR[n], if set, the accumulator for NCOn is reset on every sync event specified by NCO_SYNC_SRC. Note: This register has no effect when FR_EN=0.
0x0100-0x011F	FR_FREQL[3:0]	FR 64-bit Frequency for NCO Accumulator (default for FR_FREQL[n]=0x00) The frequency setting for FR_FREQL[0] is at the lowest address. [63:0] FR_FREQL[n] This register is used instead of FREQ[n] when FR_EN=1. Changes to the upper 32-bits of this register also change FR_FREQS[n]. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register has no effect when FR_EN=0.
0x0120-0x0127	FR_PHASE[3:0]	FR Phase for NCO Accumulator (default for FR_PHASE[n]=0x0000) The phase setting for FR_PHASE[0] is at the lowest address. [15:0] FR_PHASE[n] This register is used instead of PHASE[n] when FR_EN=1. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register has no effect when FR_EN=0.

Copyright © 2024 Texas Instruments Incorporated

表 7-44. FR Interface Registers (続き)

Address	Name	Description
0x0128-0x0137	FR_FREQS[3:0]	FR 32-bit Frequency for NCO Accumulator (default for FR_FREQS[n]=0x00) The frequency setting for FR_FREQS[0] is at the lowest address. [31:0] FR_FREQS[n] This register is used instead of FREQ[n] when FR_EN=1. Changes to this register also change the upper 32-bits of FR_FREQL[n]. This register only controls the upper 32-bits of the frequency. The lower 32-bits of the frequency are always controlled by FR_FREQL[n]. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register has no effect when FR_EN=0.

Copyright © 2024 Texas Instruments Incorporated

7.5.3 SPI Register Map

表 7-45 lists the SPI registers. All register offset addresses not listed in 表 7-45 should be considered as reserved locations and the register contents should not be modified. Reserved register fields in addresses with non-reserved R/W fields always return the default/reset value during read, not the written value.

表 7-45. SPI Registers

Offset	Acronym	Register Name	Section
0x0000	CONFIG_A	Configuration A	Go
0x0002	DEVICE_CONFIG	Device Configuration	Go
0x0003	CHIP_TYPE	Chip Type	Go
0x0004	CHIP_ID	Chip Identification	Go
0x0006	CHIP_VERSION	Chip Version	Go
0x000C	VENDOR_ID	Vendor Identification	Go
0x0010-0x007F	RESERVED		
0x0080	SYSREF_CTRL	SYSREF Control	Go
0x0081-0x008F	RESERVED		
0x0090-0x0092	SYSREF_POS	SYSREF Capture Position	Go
0x0093-0x009F	RESERVED		
0x00A0	SYSREF_ALIGN	SYSREF Alignment Control	Go
0x00A1	SYSREF_TERM	SYSREF Termination Configuration	Go
0x00A2-0x00FF	RESERVED		
0x0100	JESD_EN	JESD204C Subsystem Enable	Go
0x0101	JMODE	JESD204C Mode	Go
0x0102	JESD_M	JESD204C Number of Streams	Go
0x0103	JCTRL	JESD204C Control	Go
0x0104	SHMODE	JESD204C Sync Word Mode	Go
0x0105	KM1	JESD204C K Parameter	Go
x0106	RBD	JESD204C Release Buffer Delay	Go
0x0107	JESD_STATUS	JESD204C System Status Register	Go
0x0108	REFDIV	JESD204C Reference Divider	Go
0x0109	MPY	JESD204C PLL Multiplier	Go
0x010A	RATE	JESD204C Receive Rate	Go
0x010B	LB_VRANGE	JESD204C VCO Range	Go
0x010C-0x011F	RESERVED		
0x0120	JSYNC_N	JESD204C Manual Sync Request	Go
0x0121	JTEST	JESD204C Test Control	Go
0x0122-0x0123	RESERVED	RESERVED	
0x0124	JTIMER	JESD204C Watchdog Timer	Go
0x0125-0x0126	RESERVED		
0x0127	SYNC_EPW	JESD204C $\overline{\text{SYNC}}$ Error Report Pulse Width	Go
0x0128	CRC_TH	JESD204C CRC Error Thresholds	Go
0x0129-0x012B	RESERVED		
0x012C	LANE_ARSTAT	Lane Arrival Status	Go
0x012D	RESERVED		
0x012E-0x012F	LANE_INV	PHY Lane Inversion	Go
0x0130-0x013F	LANE_SEL[15:0]	PHY Lane Select for Logical Lane *n*	Go
0x0140-0x014F	LANE_ARR[15:0]	Lane *n* Arrival Time	Go

Copyright © 2024 Texas Instruments Incorporated

表 7-45. SPI Registers (続き)

Offset	Acronym	Register Name	Section
0x0150-0x015F	LANE_STATUS[15:0]	Lane *n* Status	Go
0x0160-0x016F	LANE_ERR[15:0]	Lane *n* Error Flags	Go
0x0170-0x017F	FIFO_STATUS[15:0]	Gearbox FIFO Status for Logical Lane *n*	Go
0x0180-0x0189	RESERVED		
0x018A-0x019F	RESERVED		
0x01A0	BER_EN	BER Measurement Control	Go
0x01A1-0x01AF	RESERVED		
0x01B0-0x01BF	BER_CNT[15:0]	BER Error Count for Lane *n*	Go
0x01C0	RESERVED		
0x01C1	JPHY_CTRL	SerDes PHY Control	Go
0x01C2	EQ_CTRL	SerDes Equalizer Control	Go
0x01C3	EQZERO	SerDes Equalizer Zero	Go
0x01D0-0x01DF	LANE_EQ[15:0]	SerDes Equalizer Level for Lane *n*	Go
0x01E0-0x01EF	LANE_EQS[15:0]	SerDes Equalizer Status for Lane *n*	Go
0x1F0	ESRUN	SerDes Eye-Scan Run Control	Go
0x01F1	ES_CTRL	SerDes Eye-Scan Control	Go
0x01F2	ESPO	SerDes Eye-Scan Phase Offset	Go
0x01F3	ESVO	SerDes Eye-Scan Voltage Offset	Go
0x01F4	ES_BIT_SELECT	SerDes Eye-Scan Bit Select	Go
0x01F5	ESCOUNT_CLR	SerDes Error Counter Clear	Go
0x01F6-0x01F7	ESDONE	SerDes Eye-Scan Process Done	Go
0x01F8-0x01FF	RESERVED		
0x0200-0x020F	ESVO_S[15:0]	SerDes Eye-Scan Voltage Offset for Lane *n*	Go
0x0210-0x022F	ECOUNT[15:0]	SerDes Error/Mismatch Count for Lane *n*	Go
0x0230-0x0233	RESERVED		
0x0234	LOS_TH	SerDes Loss-of_Signal Threshold	Go
0x0235	EQCNTSZ	SerDes Equalizer Counter Size	Go
0x0236-0x237	RESERVED		
0x0238	CDRLOCK	SerDes CDR Lock/Freeze	Go
0x0239	CDRPHASE	SerDes CDR Phase Status	Go
0x023A-0x024F	RESERVED		
0x0250	PLL_STATUS	SerDes PLL Status	Go
0x0251-0x0252	RESERVED		
0x0253	JESD_RST	JESD Reset	Go
0x0254-0x02AF	RESERVED		
0x02B0	EXTREF_EN	Enable External Reference	Go
0x02B1	CUR_2X_EN	DAC Current Doubler Enable	Go
0x02B2-0x02C1	RESERVED		
0x02C2-0x02CE	RESERVED		
0x02CF	DAC_OFS_CHG_BLK	DAC Offset Adjustment Change Block	Go
0x02D0-0x02DF	RESERVED		
0x02E0	DP_EN	Datapath Enable	Go
0x02E1	DUC_L	DUC Interpolation Factor	Go
0x02E2	DUC_GAIN	DUC Gain	Go
0x02E3	DUC_FORMAT	DUC Output Format	Go

Copyright © 2024 Texas Instruments Incorporated

表 7-45. SPI Registers (続き)

Offset	Acronym	Register Name	Section
0x02E4	DAC_SRC	DAC Source	Go
0x02E5-0x02E7	RESERVED		
0x02E8	MXMODE	DAC Output Mode	Go
0x02E9	RESERVED		
0x02EA	TRUNC_HLSB	Truncation Half LSB Offset	Go
0x02EB-0x02F7	RESERVED		
0x02F8	TX_EN_SEL	Transmitter Enable Control Selection	Go
0x02F9	TX_EN	Transmitter Enable Configuration	Go
0x02FA-0x02FF	RESERVED		
0x0300	NCO_CTRL	NCO Control	Go
0x0301	NCO_CONT	NCO Phase Continuous Mode	Go
0x0302	NCO_SYNC	NCO Synchronization Configuration	Go
0x0303	NCO_AR	NCO Accumulator Reset	Go
0x0304	SPI_SYNC	SPI Sync	Go
0x0305	NCO_SS	NCO Continuous Self-Sync Mode	Go
0x0306-0x0317	RESERVED		
0x0318-0x031F	AMP[3:0]	DDS Amplitude	Go
0x0320-0x0327	FREQ[0]	Frequency for NCO*0* Accumulator	Go
0x0328-0x032F	FREQ[1]	Frequency for NCO*1* Accumulator	Go
0x0330-0x0337	FREQ[2]	Frequency for NCO*2* Accumulator	Go
0x0338-0x033F	FREQ[3]	Frequency for NCO*3* Accumulator	Go
0x0340-0x0347	PHASE[3:0]	Phase for NCO*n* Accumulator	Go
0x0348-0x0377	RESERVED		
0x0378-0x037F	AMP_R[3:0]	Readback for Amplitude Workd for NCO*n*	Go
0x0380-0x039F	FREQ_R[3:0]	Readback for Frequency for NCO*n* Accumulator	Go
0x03A0-0x03A7	PHASE_R[3:0]	Readback for Phase Word for NCO*n* Accumulator	Go
0x03A8-0x03DF	RESERVED		
0x03E0	FR_FRS_R	Readback for FR Synchronization	Go
0x03E1	FR_NCO_AR_R	Readback for FR NCO Accumulator Reset	Go
0x03E2-0x03FF	RESERVED		
0x0400	TS_TEMP	Tempeature Reading in Celsius	Go
0x0401	TS_SLEEP	Temperature Sensor Sleep	Go
0x0402-0x040F	RESERVED		
0x0410	SYNC_STATUS	Synchronization Status	Go
0x0411-0x042F	RESERVED		
0x0430	SYS_ALM	System Alarm Status	Go
0x0431	ALM_MASK	Alarm Mask	Go
0x0432	MUTE_MASK	DAC Mute Mask	Go
0x0433	MUTE_REC	DAC Mute Recovery	Go
0x0434-0x05FF	RESERVED		
0x0600	FUSE_STATUS	Fuse Status	Go
0x0601-0x0722	RESERVED		
0x0723	FINE_CUR_A	Fine Bias Current Control for DACA	Go
0x0724	COARSE_CUR_A	Coarse Bias Current Control for DACA	Go
0x0725	FINE_CUR_B	Fine Bias Current Control for DACB	Go

Copyright © 2024 Texas Instruments Incorporated

表 7-45. SPI Registers (続き)

Offset	Acronym	Register Name	Section
0x0726	COARSE_CUR_B	Coarse Bias Current Control for DACB	Go
0x0727	DEM_ADJ	DEM Adjust	Go
0x0728	RESERVED		
0x0729	DEM_DITH	DEM and DITHER Control	Go
0x72A-0x072D	DAC_OFS	DAC_Offset_Adjustment	Go
0x72E - 0x7FF	RESERVED		

7.5.3.1 CONFIG_A Register (Offset = 0h) [reset = 30h]

CONFIG_A is shown in 図 7-61 and described in 表 7-46.

Return to the Register Summary Table.

Configuration A (default: 0x30)

図 7-61. CONFIG_A Register

7	6	5	4	3	2	1	0
SOFT_RESET	RESERVED	ASCEND	RESERVED	RESERVED			
R/W-0h	R/W-0h	R/W-1h	R/W-1h	R/W-0h			

表 7-46. CONFIG_A Register Field Descriptions

Bit	Field	Type	Reset	Description
7	SOFT_RESET	R/W	0h	Writing a 1 to this bit causes a full reset of the chip and all SPI registers (including CONFIG_A). This bit is self-clearing and will always read zero. After writing this bit, the part may take up to 5 ns to reset. During this time, do not perform any SPI transactions.
6	RESERVED	R/W	0h	
5	ASCEND	R/W	1h	0 : Address is decremented during streaming reads/writes 1 : Address is incremented during streaming reads/writes (default)
4	RESERVED	R	1h	Always read 1.
3-0	RESERVED	R/W	0h	

7.5.3.2 DEVICE_CONFIG Register (Offset = 2h) [reset = 00h]

DEVICE_CONFIG is shown in 図 7-62 and described in 表 7-47.

Return to the Register Summary Table.

Device Configuration (default: 0x00)

図 7-62. DEVICE_CONFIG Register

7	6	5	4	3	2	1	0
RESERVED						MODE	
R/W-0h						R/W-0h	

表 7-47. DEVICE_CONFIG Register Field Descriptions

Bit	Field	Type	Reset	Description
7-2	RESERVED	R/W	0h	

Copyright © 2024 Texas Instruments Incorporated

表 7-47. DEVICE_CONFIG Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
1-0	MODE	R/W	0h	0 : Normal operation (default) 1 : Reserved 2 : Reserved 3 : Full power down. The user should follow the recommendations in セクション 8.1.6 in this mode to avoid reliability concerns.

7.5.3.3 CHIP_TYPE Register (Offset = 3h) [reset = 04h]

CHIP_TYPE is shown in 図 7-63 and described in 表 7-48.

Return to the Register Summary Table.

Chip Type (read-only: 0x04)

図 7-63. CHIP_TYPE Register

7	6	5	4	3	2	1	0
RESERVED				CHIP_TYPE			
R/W-0h				R-4h			

表 7-48. CHIP_TYPE Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-0	CHIP_TYPE	R	4h	Always returns 0x4, indicating that the part is a high speed DAC.

7.5.3.4 CHIP_ID Register (Offset = 4h) [reset = 003Bh]

CHIP_ID is shown in 図 7-64 and described in 表 7-49.

Return to the Register Summary Table.

Chip Identification (read-only)

図 7-64. CHIP_ID Register

15	14	13	12	11	10	9	8
CHIP_ID							
R-0h							
7	6	5	4	3	2	1	0
CHIP_ID							
R-3Bh							

表 7-49. CHIP_ID Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	CHIP_ID	R	003Bh	Always returns 0x003B indicating it is the DAC39RF10 device family

7.5.3.5 CHIP_VERSION Register (Offset = 6h) [reset = 02h]

CHIP_VERSION is shown in 図 7-65 and described in 表 7-50.

Return to the Register Summary Table.

Copyright © 2024 Texas Instruments Incorporated

Chip Version (read-only)

図 7-65. CHIP_VERSION Register

7	6	5	4	3	2	1	0
CHIP_VERSION							
R-2h							

表 7-50. CHIP_VERSION Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	CHIP_VERSION	R	02h	1: PG1.0 2: PG2.0

7.5.3.6 VENDOR_ID Register (Offset = Ch) [reset = 0451h]

VENDOR_ID is shown in 図 7-66 and described in 表 7-51.

Return to the Register Summary Table.

Vendor Identification (default: 0x0451)

図 7-66. VENDOR_ID Register

15	14	13	12	11	10	9	8
VENDOR_ID							
R-04h							
7	6	5	4	3	2	1	0
VENDOR_ID							
R-51h							

表 7-51. VENDOR_ID Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	VENDOR_ID	R	451h	TI vendor ID

7.5.3.7 SYSREF_CTRL Register (Offset = 0080h) [reset = 40h]

SYSREF_CTRL is shown in 図 7-67 and described in 表 7-52.

Return to the Register Summary Table.

SYSREF Control

図 7-67. SYSREF_CTRL Register

7	6	5	4	3	2	1	0
SYSREF_PROC_EN	SYSREF_RECV_SLEEP	SYSREF_PS_EN	SYSREF_ZOOM	SYSREF_SEL			
R/W-0b	R/W-1b	R/W-0b	R/W-0b	R/W-0h			

表 7-52. SYSREF_CTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
7	SYSREF_PROC_EN	R/W	0h	When set, this bit enables the SYSREF processor. When this is enabled, the system receives and processes each new SYSREF edge. User should always clear SYSREF_RECV_SLEEP before setting this bit. This bit is provided to allow the SYSREF receiver to stabilize before allowing the SYSREF to come to the digital.

Copyright © 2024 Texas Instruments Incorporated

表 7-52. SYSREF_CTRL Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
6	SYSREF_RECV_SLEEP	R/W	1b	Clear this bit to enable the SYSREF receiver circuit. User should always clear SYSREF_PROC_EN before setting this bit.
5	SYSREF_PS_EN	R/W	0b	When set, SYSREF_POS will contain 1's for all positions that have been detected as near the SYSREF edge since this bit was set. When cleared, SYSREF_POS will only contain 1's for the last SYSREF edge that was detected.
4	SYSREF_ZOOM	R/W	0b	Set this bit to "zoom" in the SYSREF strobe status (impacts SYSREF_POS and the step size of SYSREF_SEL).
3-0	SYSREF_SEL	R/W	0b	Set this field to select which SYSREF delay to use. Set this based on the results returned by SYSREF_POS.

7.5.3.8 SYSREF_POS Register (Offset = 90h) [reset = NA]

SYSREF_POS is shown in 図 7-68 and described in 表 7-53.

Return to the Register Summary Table.

SYSREF Position Capture

図 7-68. SYSREF_POS Register

23	22	21	20	19	18	17	16
RESERVED				SYSREF_POS			
R				R			
15	14	13	12	11	10	9	8
SYSREF_POS							
R							
7	6	5	4	3	2	1	0
SYSREF_POS							
R							

表 7-53. SYSREF_POS Register Field Descriptions

Bit	Field	Type	Reset	Description
23-20	Reserved	R	0x0	Reserved
19-0	SYSREF_POS	R	NA	Returns a 20-bit status value that indicates the position of the SYSREF edge with respect to CLK. Use this to determine the proper programming for SYSREF_SEL, and SYSREF_ZOOM.

7.5.3.9 SYSREF_ALIGN Register (Offset = 00A0h) [reset = 00h]

SYSREF_ALIGN is shown in 図 7-69 and described in 表 7-54.

Return to the Register Summary Table.

SYSREF Alignment Control

図 7-69. SYSREF_ALIGN Register

7	6	5	4	3	2	1	0
RESERVED							SYSREF_ALIGN_EN
R/W-00h							R/W-0b

Copyright © 2024 Texas Instruments Incorporated

表 7-54. SYSREF_ALIGN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	Reserved
0	SYSREF_ALIGN_EN	R/W	0b	When this bit is set, the chip realigns to each detected SYSREF edge. This affects both the external clock divider and the JESD subsystem.

SYSREF_TERM Register (Offset = 00A1h) [reset = 00h]

SYSREF_TERM is shown in 図 7-70 and described in 表 7-55.

Return to the Register Summary Table.

SYSREF Termination Configuration

図 7-70. SYSREF_TERM Register

7	6	5	4	3	2	1	0
RESERVED							SYSREF_RECV_LVPECL
R/W-00h							R/W-0b

表 7-55. SYSREF_TERM Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	Reserved
0	SYSREF_RECV_LVPECL	R/W	0b	0: SYSREF termination is 100 Ohm differential with Vcm of 0.4V 1: SYSREF termination is singled ended 50 Ohm to GND (LVPECL mode)

7.5.3.10 JESD_EN Register (Offset = 0100h) [reset = 00h]

JESD_EN is shown in 図 7-71 and described in 表 7-56.

Return to the Register Summary Table.

JESD204C Subsystem Enable

図 7-71. JESD_EN Register

7	6	5	4	3	2	1	0
RESERVED							JESD_EN
R/W-00h							R/W-0b

表 7-56. JESD_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	JESD_EN	R/W	0b	0 : Disable JESD204C interface 1 : Enable JESD204C interface When JESD_EN=0, the JESD204C subsystem is held in reset and the SERDES PHY is disabled. The LMFC/LEMC counter is also held in reset, so SYSREF will not align the LMFC/LEMC. Note: This register should only be changed when DP_EN=0.

Copyright © 2024 Texas Instruments Incorporated

7.5.3.11 JMODE Register (Offset = 0101h) [reset = 00h]

JMODE is shown in 図 7-72 and described in 表 7-57.

Return to the Register Summary Table.

JESD204C Mode

図 7-72. JMODE Register

7	6	5	4	3	2	1	0
RESERVED		JMODE					
R/W-00b		R/W-000000b					

表 7-57. JMODE Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R/W	00b	
5-0	JMODE	RW	000000b	Specify the JESD204C interface mode. See 表 7-22. Note: This register should only be changed when JESD_EN=0.

7.5.3.12 JESD_M Register (Offset = 0102h) [reset = 01h]

JESD_M is shown in 図 7-73 and described in 表 7-58.

Return to the Register Summary Table.

JESD204C Number of Streams

図 7-73. JESD_M Register

7	6	5	4	3	2	1	0
				JESD_M			
R/W-0h				R/W-1h			

表 7-58. JESD_M Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-0	JESD_M	R/W	1h	Specify the number of sample streams to enable (JESD204C M parameter). The supported settings for JESD_M depend on the DUC interpolation (DUC_L) and Mx. **L_{DUC}: Supported Settings for JESD_M** 1x: 1 or 2 (but never larger than Mx) 2x or 3x: 2 (but never larger than Mx) 4x or 6x: 2 or 4 (but never larger than Mx) 8x or higher:2, 4, 6 or 8 (but never larger than Mx) See 表 7-22 for the Mx value associated with each JMODE. The number of lanes enabled (L) is computed as: L=ceiling(M/Mx*Lx). An I/Q pair counts as two streams. For example, when inputting 4 IQ streams, program JESD_M=8. Note: This register should only be changed when JESD_EN=0 and DP_EN=0.

7.5.3.13 JCTRL Register (Offset = 0103h) [reset = 03h]

JCTRL is shown in 図 7-74 and described in 表 7-59.

Copyright © 2024 Texas Instruments Incorporated

Return to the Register Summary Table.

JESD204C Control. This register should only be changed when JESD_EN = 0.

図 7-74. JCTRL Register

7	6	5	4	3	2	1	0
RESERVED	TI_MODE	SUBCLASS	JENC	RESERVED		SFORMAT	SCR
R/W-0b	R/W-0b	R/W-0b	R/W-0b	R/W-00b		R/W-1b	R/W-1b

表 7-59. JCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0b	
6	TI_MODE	R/W	0b	0 : JESD204C standard mode (default) 1 : TI Mode - set this when using TI FPGA transmitter IP
5	SUBCLASS	R/W	0b	Specify how the elastic buffer is released: 0 : Subclass 0 operation (default). Release the elastic buffer immediately once all lanes have starting writing to the buffer. 1 : Subclass 1 operation. Release the elastic buffer on a release opportunity defined by the LMFC/LEMC and RBD.
4	JENC	R/W	0b	0 : Use 8b/10b link layer 1 : Use 64b/66b link layer
3-2	RESERVED	R/W	0b	
1	SFORMAT	R/W	1b	Input sample format for JESD204C samples 0 : Offset binary 1 : Signed 2's complement (default)
0	SCR	R/W	1b	0 : 8b/10b Scrambler disabled 1 : 8b/10b Scrambler enabled (default) The 8b/10b scrambler is recommended to improve spurious noise and make sure that certain sample payloads cannot prevent the JESD204C receiver from detecting incorrect code-group or lane alignment. This register has no effect on 64b/66b modes (which are always scrambled).

7.5.3.14 SHMODE Register (Offset = 0104h) [reset = 00h]

SHMODE is shown in 図 7-75 and described in 表 7-60.

Return to the Register Summary Table.

JESD204C Sync Word Mode

図 7-75. SHMODE Register

7	6	5	4	3	2	1	0
RESERVED						SHMODE	
R/W-0b						R/W-00b	

表 7-60. SHMODE Register Field Descriptions

Bit	Field	Type	Reset	Description
7-2	RESERVED	R/W	00h	

Copyright © 2024 Texas Instruments Incorporated

表 7-60. SHMODE Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
1-0	SHMODE	R/W	00b	Select the mode for the 64b/66b sync word (32 bits of data per multi-block). This only applies when JENC=1 (64b/66b mode). 0 : Enable CRC-12 checking (JESD204C Table 41) (default setting) 1 : RESERVED 2 : RESERVED 3 : RESERVED Note: This device does not support any JESD204C command features. All command fields are ignored by the receiver. Note: This register should only be changed when JESD_EN=0.

7.5.3.15 KM1 Register (Offset = 0105h) [reset = 1Fh]

KM1 is shown in 図 7-76 and described in 表 7-61.

Return to the Register Summary Table.

JESD204C K Parameter (minus 1)

図 7-76. KM1 Register

7	6	5	4	3	2	1	0
KM1							
R/W-1Fh							

表 7-61. KM1 Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	KM1	R/W	1Fh	K is the number of frames per multiframe, and K-1 shall be programmed here when using the 8b/10b link layer (see JENC). Depending on the JMODE setting, there are constraints on the legal values of K (see 表 7-22 and KR). Programming an illegal value for K will cause the link to malfunction. The default value is KM1=31, which corresponds to K=32. Note: For modes using the 64b/66b link layer, the KM1 register is ignored. The effective value of K is 256*E/F. Note: This register should only be changed when JESD_EN=0.

7.5.3.16 RBD Register (Offset = 106h) [reset = 00h]

RBD is shown in 図 7-77 and described in 表 7-62.

Return to the Register Summary Table.

JESD204C Release Buffer Delay

図 7-77. RBD Register

7	6	5	4	3	2	1	0
RESERVED		RBD					
R/W-0b		R/W-000000b					

表 7-62. RBD Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R/W	00b	

Copyright © 2024 Texas Instruments Incorporated

表 7-62. RBD Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
5-0	RBD	R/W	000000b	This register shifts the elastic buffer release opportunities. Increasing RBD by 1 delays the release opportunities by 4 bytes (octets). The legal RBD range is 0 to K*F/4-1. For 64b/66b modes, the legal RBD range is 0 to 63. See Programming RBD. Note: This register should only be changed when JESD_EN=0.

7.5.3.17 JESD_STATUS Register (Offset = 0107h) [reset = NA]

JESD_STATUS is shown in 図 7-78 and described in 表 7-63.

Return to the Register Summary Table.

JESD204C / System Status

図 7-78. JESD_STATUS Register

7	6	5	4	3	2	1	0
EB_ERR	LINK_UP	JSYNC_STATE	REALIGNED	ALIGNED	PLL_LOCKED	RESERVED	
R/W1C	R	R	R/W1C	R	R	R	

表 7-63. JESD_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
7	EB_ERR	R/W1C	NA	Elastic buffer experienced underflow/overflow. Check RBD. Write a 1 to clear this bit.
6	LINK_UP	R	NA	When set, indicates that the JESD204C link is up (elastic buffer released).
5	JSYNC_STATE	R	NA	Returns the state of the JESD204C $\overline{\text{SYNC}}$ signal. 0 : $\overline{\text{SYNC}}$ asserted 1 : $\overline{\text{SYNC}}$ de-asserted
4	REALIGNED	R/W1C	NA	When any clock dividers or the LMFC/LEMC counters are realigned by SYSREF, this bit gets set. Write a 1 to clear this bit. The behavior of this bit is undefined when SUBCLASS=0.
3	ALIGNED	R	NA	When set, indicates that the last SYSREF pulse was consistent with the SYSREF-associated clock dividers (including the LMFC/LEMC). This bit is read-only (cannot be cleared via SPI). After JESD_EN is set, the part may require up to 7 SYSREF pulses to achieve full alignment and set this bit. The behavior of this bit is undefined when SUBCLASS=0.
2	PLL_LOCKED	R	NA	When high, indicates that all enabled SerDes PLLs are locked.
1-0	RESERVED	R	NA	

7.5.3.18 REFDIV Register (Offset = 0108h) [reset = 30h]

REFDIV is shown in 図 7-79 and described in 表 7-64.

Return to the Register Summary Table.

JESD204C Reference Divider

Copyright © 2024 Texas Instruments Incorporated

図 7-79. REFDIV Register

7	6	5	4	3	2	1	0
RESERVED		REFDIV					
R/W-0b		R/W-30h					

表 7-64. REFDIV Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R/W	00b	
5-0	REFDIV	R/W	30h	Specifies the frequency divisor to generate the PHY PLL reference clock (FREF) from the DAC clock (F_{CLK}). See PLL Control. The following values are legal: 2, 3, 4, 5, 6, 8, 10, 12, 16, 20, 24, 32, 40, 48. All other values are reserved and produce undefined behavior.

7.5.3.19 MPY Register (Offset = 0109h) [reset = 14h]

MPY is shown in 図 7-80 and described in 表 7-65.

Return to the Register Summary Table.

JESD204C PLL Multiplier

図 7-80. MPY Register

7	6	5	4	3	2	1	0
MPY							
R/W-14h							

表 7-65. MPY Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	MPY	R/W	14h	Specifies the PLL frequency multiplier for the PHY. See PLL Control. The following values are allowed for this design: **MPY: Frequency Multiplier** 16 (0x10): 4 20 (0x14): 5 33 (0x21): 8.25 40 (0x28): 10 Note: This register should only be changed when JESD_EN=0.

7.5.3.20 RATE Register (Offset = 010Ah) [reset = 00h]

RATE is shown in 図 7-81 and described in 表 7-66.

Return to the Register Summary Table.

JESD204C Receive Rate

図 7-81. RATE Register

7	6	5	4	3	2	1	0
RESERVED						RATE	
R/W-00h						R/W-00b	

Copyright © 2024 Texas Instruments Incorporated

表 7-66. RATE Register Field Descriptions

Bit	Field	Type	Reset	Description
7-2	RESERVED	R/W	00h	
1-0	RATE	R/W	00b	Controls the frequency multiplier from the PHY PLL to the serial line rate. See PLL Control. Affects all lanes. **RATE: Multiplier** 00b: 4 01b: 2 10b: 1 11b: 0.5 Note: This register should only be changed when JESD_EN=0.

7.5.3.21 LB_VRANGE Register (Offset = 010Bh) [reset = 00h]

LB_VRANGE is shown in 図 7-82 and described in 表 7-67.

Return to the Register Summary Table.

JESD204C PLL VCO Range. Note: This register should only be changed when JESD_EN=0.

図 7-82. LB_VRANGE Register

7	6	5	4	3	2	1	0
RESERVED							VRANGE
R/W-0h							R/W-0b

表 7-67. LB_VRANGE Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	VRANGE	R/W	0b	This bit must be set if the PLL/VCO frequency is below 2.17GHz. See PLL Control.

7.5.3.22 JSYNC_N Register (Offset = 0120h) [reset = 01h]

JSYNC_N is shown in 図 7-67 and described in 表 7-52.

Return to the Register Summary Table.

JESD204C Manual Sync Request

図 7-83. JSYNC_N Register

7	6	5	4	3	2	1	0
RESERVED							JSYNC_N
R/W-00h							R/W1C

表 7-68. JSYNC_N Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	JSYNC_N	R/W	1b	Set this bit to 0 to manually assert the $\overline{\text{SYNC}}$ signal. For normal operation, leave this bit set to 1. Note: Behavior of JSYNC_N=0 is undefined when JENC=1.

Copyright © 2024 Texas Instruments Incorporated

7.5.3.23 JTEST Register (Offset = 0121h) [reset = 00h]

JTEST is shown in 図 7-84 and described in 表 7-69.

Return to the Register Summary Table.

JESD204C Test Control

図 7-84. JTEST Register

7	6	5	4	3	2	1	0
RESERVED			JTEST				
R/W-000b			R/W-00h				

表 7-69. JTEST Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	0h	
4-0	JTEST	R/W	0b	PRBS Test Modes: 0 : Test mode disabled. Normal operation (default) 1 : PRBS7 test mode 2 : PRBS9 test mode 3 : PRBS15 test mode 4 : PRBS31 test mode 5-31: RESERVED When a PRBS test mode is enabled, see BER_EN. Note: This register should only be changed when JESD_EN=0.

7.5.3.24 JTIMER Register (Offset = 0124h) [reset = 00h]

JTIMER is shown in 図 7-85 and described in 表 7-70.

Return to the Register Summary Table.

Note: This register should only be changed when JESD_EN=0.

JESD204C Watchdog Timer

図 7-85. JTIMER Register

7	6	5	4	3	2	1	0
JTPLL	RESERVED	JTR		RESERVED	JTT		
R/W-0b	R/W-0b	R/W-0b		R/W-0b	R/W-000b		

表 7-70. JTIMER Register Field Descriptions

Bit	Field	Type	Reset	Description
7	JTPLL	R/W	1b	When this bit is set, the SerDes PLL is also reset when the watchdog timer expires. When this bit is 0, only the SerDes receiver is reset.
6	RESERVED	R/W	0b	
5-4	JTR	R/W	00b	This register determines how much the watchdog counter is decremented when the link is up and CRC_FAULT is not set. **JTR : Watchdog Counter Decrement : Approximate Link Uptime % required to prevent the SerDes from being reset** 0 : 1 : 99.25% 1 : 2 : 98.46% 2 : 8 : 94.12% 3 : 16 : 88.89%

Copyright © 2024 Texas Instruments Incorporated

表 7-70. JTIMER Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
3	RESERVED	R/W	0b	
2-0	JTT	R/W	0b	JESD204C watchdog counter threshold. When the watchdog counter reaches the threshold defined by JTT, the PHY layer is reset (including the PHY PLL(s) if JTPLL=1) and the watchdog timer is reset. Larger values of JTT cause the watchdog timer to take longer to intervene. JTT : Watchdog Counter Threshold : Counter Duration [assuming F_{CLK} = 10.24 GHz 0 : <Watchdog Timer Disabled> : <disabled> 1 : 2^{17} : 102.4 µs 2 : 2^{19} : 409.6 µs 3 : 2^{32} : 1.63 ms 4 : 2^{23} : 6.55 ms 5-7 : RESERVED : RESERVED Note: The watchdog may not detect link up events shorter than 2^{10} (1024) CLK cycles.

7.5.3.25 SYNC_EPW Register (Offset = 0127h) [reset = 00h]

SYNC_EPW is shown in 図 7-86 and described in 表 7-71.

Return to the Register Summary Table.

JESD204C SYNC Error Report Pulse Width

図 7-86. SYNC_EPW Register

7	6	5	4	3	2	1	0
RESERVED					SYNC_EPW		
R/W-00h					R/W-000b		

表 7-71. SYNC_EPW Register Field Descriptions

Bit	Field	Type	Reset	Description
7-3	RESERVED	R/W	00h	
2-0	SYNC_EPW	R/W	000b	Specifies the pulse width of $\overline{SYNC}$ that is used for reporting errors to the transmitter. When an error is detected that does not require link resynchronization, $\overline{SYNC}$ is asserted for SYNC_EPW link clock cycles (equal to 4*SYNC_EPW character durations). To disable error reporting over $\overline{SYNC}$, set SYNC_EPW=0. The legal range for SYNC_EPW is 0 to 7. Note: This register should only be changed when JESD_EN= 0.

7.5.3.26 CRC_TH Register (Offset = 0128h) [reset = 00h]

CRC_TH is shown in 図 7-87 and described in 表 7-72.

Return to the Register Summary Table.

JESD204C CRC Error Thresholds

図 7-87. CRC_TH Register

7	6	5	4	3	2	1	0

Copyright © 2024 Texas Instruments Incorporated

図 7-87. CRC_TH Register (続き)

RESERVED	CRC_ERR_REC	CFC_ERR_TH
R/W-0h	R/W-00b	R/W-00b

表 7-72. CRC_TH Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-2	CRC_ERR_REC	R/W	0b	Specify how many contiguous, error-free multiblocks must be received to reset the CRC error counter (and un-trigger the CRC alarm if triggered). 0 : 1 multiblock 1 : 4 multiblocks 2 : 16 multiblocks 3 : 64 multiblocks
1-0	CRC_ERR_TH	R/W	0b	Specify how many multi-blocks must have CRC errors to trigger the CRC alarm. The receiver counts each error, but if a run of error-free multi-blocks occurs (as specified by CRC_ERR_REC), the error counter resets. 0 : 1 multiblock 1 : 2 multiblocks 2 : 4 multiblocks 3 : 8 multiblocks
Note: For each lane, the internal signal, CRC_FAULT, is set if the number of multi-blocks with CRC errors exceeds the threshold set by CRC_ERR_TH without a run of contiguous, error-free multi-blocks specified by CRC_ERR_REC. CRC_FAULT is cleared when a run of contiguous, error-free multi-blocks specified by CRC_ERR_REC is detected. Note: This register should only be changed when JESD_EN=0.				

7.5.3.27 LANE_ARSTAT Register (Offset = 012Ch) [reset = NA]

LANE_ARSTAT is shown in 図 7-88 and described in 表 7-73.

Return to the Register Summary Table.

Lane Arrival Status

図 7-88. LANE_ARSTAT Register

7	6	5	4	3	2	1	0
RESERVED							LANE_ARR_RDY
R/W-00h							R

表 7-73. LANE_ARSTAT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	LANE_ARR_RDY	R	NA	This bit is set when lane arrival times are captured and available for read in LANE_ARR. Lane arrival data is captured when all lanes are ready and the chip attempts to release the elastic buffer. This bit is cleared when JESD_EN=0 or JESD_RST=1.

Copyright © 2024 Texas Instruments Incorporated

7.5.3.28 LANE_INV Register (Offset = 012Eh) [reset = 0000h]

LANE_INV is shown in 図 7-89 and described in 表 7-74.

Return to the Register Summary Table.

SerDes Lane Inversion

図 7-89. LANE_INV Register

15	14	13	12	11	10	9	8
LANE_INV[15:8]							
R/W-00h							
7	6	5	4	3	2	1	0
LANE_INV[7:0]							
R/W-00h							

表 7-74. LANE_INV Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	LANE_INV	R/W	0000h	Program LANE_INV[n]=1 to invert the bitstream through physical lane n. Use this if the differential pair is swapped between the transmitter and receiver.

7.5.3.29 LANE_SEL[15:0] Register (Offset = 0130h) [reset for LANE_SEL[*n*]=*n*]

LANE_SEL[15:0] forms a crossbar switch, and is a set of 16 registers for specifying which physical lane is bound to logical lane *n*. LANE_SEL[15:0] is shown in 図 7-90 and described in 表 7-75.

Return to the Register Summary Table.

SerDes Lane Select for Logical Lane *n* (*n* = 0 - 15). LANE_SEL[0] is at the lowest address.

図 7-90. LANE_SEL[15:0] Register

7	6	5	4	3	2	1	0
RESERVED				LANE_SEL[*n*]			
R/W-0h				R/W-*n*			

表 7-75. LANE_SEL[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-0	LANE_SEL[*n*]	R/W	*n*	Specify which physical lane (0 to 15) is bound to logical lane *n*. To bind physical lane *p* to logical lane *n*, program LANE_SEL[*n*]=*p*. For example, to bind logical lane 0 to physical lane 3, program LANE_SEL[0]=3. Note: This register should only be changed when JESD_EN=0.

7.5.3.30 LANE_ARR[15:0] Register (Offset = 0140h) [Read only, reset = NA]

LANE_ARR[15:0] is a set of 16 registers for measuring the arrival time of lane *n*. LANE_ARR[15:0] is shown in 図 7-91 and described in 表 7-76.

Return to the Register Summary Table.

SerDes Lane *n* Arrival Time (*n* = 0 - 15). LANE_ARR[0] is at the lowest address.

Copyright © 2024 Texas Instruments Incorporated

図 7-91. LANE_ARR[15:0] Register

7	6	5	4	3	2	1	0
RESERVED		LANE_ARR[*n*]					
R-00b		R					

表 7-76. LANE_ARR[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R	0h	
5-0	LANE_ARR[*n*]	R	NA	Returns the arrival time of lane *n* with respect to the internal LMFC/LEMC that is established by SYSREF. The value returned can be between 0 and 63 (inclusive), regardless of the multiframe/EMB length. These registers are valid only when LANE_ARR_RDY =1. See Programming RBD. Note: The lane arrival data is captured when attempting to release the elastic buffer and LANE_ARR_RDY=0. All values are from the same release attempt. Note: It may be necessary to use JESD_RST when starting the link to get accurate lane arrival values.

7.5.3.31 LANE_STATUS[15:0] Register (Offset = 0150h) [Read only, reset = NA]

LANE_STATUS[15:0] is a set of 16 registers showing the status of lane *n*. LANE_STATUS[15:0] is shown in 図 7-92 and described in 表 7-77.

Return to the Register Summary Table.

SerDes Lane *n* Status (*n* = 0 - 15). LANE_STATUS[0] is at the lowest address.

図 7-92. LANE_STATUS[15:0] Register

7	6	5	4	3	2	1	0
RESERVED						LANE_STATUS[*n*]	
R-00h						R	

表 7-77. LANE_STATUS[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-3	RESERVED	R	00h	
2	F_EMB_SYNC[*n*]	R	NA	Returns 1 if logical lane n has frame or EMB synchronization.
1	CG_BK_SYNC[*n*]	R	NA	Returns 1 if logical lane *n* has code-group or block synchronization.
0	SIG_DET[*n*]	R	NA	Returns 1 if logical lane *n* is detecting a data signal (using loss-of-signal detector in PHY).

7.5.3.32 LANE_ERR[15:0] Register (Offset = 0160h) [reset = 00h]

LANE_ERR[15:0] is a set of 16 registers reporting errors for lane *n*. LANE_ERR[15:0] is shown in 図 7-93 and described in 表 7-78.

Return to the Register Summary Table.

SerDes Lane *n* Error Flags (*n* = 0 - 15). LANE_ERR[0] is at the lowest address.

図 7-93. LANE_ERR[15:0] Register

7	6	5	4	3	2	1	0

Copyright © 2024 Texas Instruments Incorporated

図 7-93. LANE_ERR[15:0] Register (続き)

LANE_ERR[*n*]
R/W1C

表 7-78. LANE_ERR[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	LANE_ERR[*n*]	R/W1C	00h	Sticky bits indicating various errors on lane n. A bit is set to indicate an error. Write a 1 to clear a bit. [7] Alignment character found at unexpected location (8b/10b) or (extended)-multi-block pilot signal not in expected location (64b/66b) [6] Multi-frame, multi-block, or extended-multi-block alignment lost. [5] Frame alignment was lost (8b/10b only) or CRC_FAULT=1 (64b/66b). [4] Code-group or block synchronization was lost. [3] RESERVED [2] Not-in-table or unexpected control character (8b/10b) or CRC (64b/66b) error occurred. [1] Disparity error (8b/10b) or invalid sync header (64b/66b) occurred. [0] Gearbox FIFO overflowed or underflowed. As long as the write clock frequency is correct the gearbox write clock can drift at least 3UI after this flag without causing data corruption. Note: Lane Error Flags for extra or disabled lanes are undefined. Note: LANE_ERR[6:1] are only detected for 8b/10b operation while sync_n=1

7.5.3.33 FIFO_STATUS[15:0] Register (Offset = 0170h) [Read only, reset = NA]

FIFO_STATUS[15:0] is a set of 16 registers showing the status of lane *n*. LANE_STATUS[15:0] is shown in 図 7-94 and described in 表 7-79.

Return to the Register Summary Table.

SerDes Lane *n* Status (*n* = 0 - 15). FIFO_STATUS[0] is at the lowest address.

図 7-94. FIFO_STATUS[15:0] Register

7	6	5	4	3	2	1	0
RESERVED				PDIFF[*n*]			
R-000b				R			

表 7-79. FIFO_STATUS[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R	000b	

表 7-79. FIFO_STATUS[15:0] Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
4-0	PDIFF[*n*]	R	NA	This register returns the difference between the write and read pointers inside the gearbox FIFO for logical lane n. For 8b/10b, values from 0-14 will be returned. For 64b/66b, values from 0-16 will be returned. The values at the ends of the range (0 & 14 for 8b/10b or 0 & 16 for 64b/66b) indicate error positions that will cause the Gearbox FIFO overflow/underflow flag to be set in LANE_ERR. In both cases, 1 indicates minimum setup and the max value minus 1 indicates minimum hold. Values are measured in the read clock. The tread size is approximately ½ of the effective link layer clock period (0.5/(LCR*FDR)). In terms of UI: • In 8b/10b mode, the nominal tread size is 20UI. The nominal tread size for the final tread (14) is 380UI±20UI. • In 64b/66b mode, the nominal tread size is 16.5UI. The nominal tread size for the final tread (16) is 412.5UI±16.5UI. The PDIFF[n] value for disabled lanes and lanes enabled by EXTRA_LANE are undefined.

7.5.3.34 BER_EN Register (Offset = 01A0h) [reset = 00h]

BER_EN is shown in 図 7-95 and described in 表 7-80.

Return to the Register Summary Table.

BER Measurement Control

図 7-95. BER_EN Register

7	6	5	4	3	2	1	0
RESERVED							BER_EN
R/W-0b							R/W-0b

表 7-80. BER_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	BER_EN	R/W	0b	BER (bit-error-rate) test enable. After setting up the receiver parameters, the user can program JTEST to a PRBS mode, set JESD_EN, and then set BER_EN to enable the BER counters (see BER_CNTn). To clear and restart the counters, program BER_EN to 0 and then back to 1. The BER logic will self-synchronize to the incoming PRBS data after the rising edge of BER_EN.

7.5.3.35 BER_CNT Register (Offset = 01B0h) [reset = NA, read rnly]

BER_CNT is shown in 図 7-96 and described in 表 7-81.

Return to the Register Summary Table.

BER Error Count for Lane *n*. Lane 0 is a the lowest address

図 7-96. BER_CNT Register

7	6	5	4	3	2	1	0

Copyright © 2024 Texas Instruments Incorporated

図 7-96. BER_CNT Register (続き)

BER_CNT[*n*]
R/W-0b

表 7-81. BER_CNT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	BER_CNT[*n*]	R/W	0h	Returns the number of bit errors detected on lane n. This value will saturate at 255. The BER for lane n can be computed as follows: BER = BER_CNT[n] / FBIT / TBER Where TBER is the number of seconds that has elapsed from when BER_EN was set to when BER_CNT[n] was read. TBER is measured by the host system or clock. Example: If BER_CNT[n] returns 2, and FBIT is 12.8Gbps, and TBER is 3600 seconds, the bit-error-rate is 2/12.8e9/3600 = 43e-15 Note: The error counters on disabled lanes and lanes enabled by EXTRA_LANE are undefined.

7.5.3.36 JPHY_CTRL Register (Offset = 01C1h) [reset = 43h]

JPHY_CTRL is shown in 図 7-97 and described in 表 7-82.

Return to the Register Summary Table.

JESD204C SerDes Control. Note: This register should only be changed when JESD_EN = 0.

図 7-97. JPHY_CTRL Register

7	6	5	4	3	2	1	0
RESERVED	CDR			RESERVED		OC_EN	LOS_EN
R/W-0b	R/W-100b			R/W-0b		R/W-1b	R/W-1b

表 7-82. JPHY_CTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0b	
6-4	CDR	R/W	100b	Control CDR (clock-data-recovery) setting. The default value should be appropriate, but other settings can be used to adjust the tracking rate or reduce CDR power consumption. The 2nd order modes are for tracking a frequency offset when the Tx and Rx do not share a common reference clock. This is not applicable to JESD204C. See CDR Settings.
3-2	RESERVED	R/W	00b	
1	OC_EN	R/W	1b	Enable offset compensation/calibration for all lanes.
0	LOS_EN	R/W	1b	Enable loss-of-signal detector for all lanes.

表 7-83. CDR Settings

CDR	Vote Threshold	Tracking Rate [ppm]	Order	Settling Time [UI]	Activity %
0	15	313	2nd	36	83
1	7	607	2nd	36	70
2	3	723	2nd	36	50
3	1	868	2nd	36	25
4 (default)	15	96	1st	36	83
5	3	289	1st	36	50

Copyright © 2024 Texas Instruments Incorporated

表 7-83. CDR Settings (続き)

CDR	Vote Threshold	Tracking Rate [ppm]	Order	Settling Time [UI]	Activity %
6	1	434	1st	36	25
7	7	13	1st	1524	5

7.5.3.37 EQ_CTRL Register (Offset = 01C2h) [reset = 00h]

EQ_CTRL is shown in 図 7-98 and described in 表 7-84.

Return to the Register Summary Table.

SerDes Equalizer Control

図 7-98. EQ_CTRL Register

7	6	5	4	3	2	1	0
RESERVED			EQ_OVR	EQZ_OVR	EQHLD	EQMODE	
R/W-000b			R/W-0b	R/W-0b	R/W-0b	R/W-00b	

表 7-84. EQ_CTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	000b	
4	EQ_OVR	R/W	0b	When EQMODE=1, you can program EQ_OVR=1 to over-ride the equalizer level using the EQLEVEL[n] registers. Affects all lanes.
3	EQZ_OVR	R/W	0b	Set this bit to enable the EQZERO register (to override the equalizer's zero frequency). When EQZ_OVR=0, the frequency is set based on the RATE register. Affects all lanes.
2	EQHLD	R/W	0b	When the equalizer is in fully-adaptive mode (EQMODE=1 and EQ_OVR=0), programming EQHLD will freeze (hold) the adaptation loop (for all lanes).
1-0	EQMODE	R/W	00b	Sets the equalizer mode (for all lanes): See Equalizer. 0: Equalizer disabled. Flat response with maximum gain. 1: Equalizer enabled. The equalizer is fully adaptive if EQ_OVR=0. 2: Precursor equalization analysis. 3: Postcursor equalization analysis.

7.5.3.38 EQZERO Register (Offset = 01C3h) [reset = 00h]

EQZERO is shown in 図 7-99 and described in 表 7-85.

Return to the Register Summary Table.

SerDes Equalizer Zero.

図 7-99. EQZERO Register

7	6	5	4	3	2	1	0
RESERVED			EQZERO				
R/W-000b			R/W-00h				

表 7-85. EQZERO Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	000b	

Copyright © 2024 Texas Instruments Incorporated

表 7-85. EQZERO Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
4-0	EQZERO	R/W	00h	When EQZ_OVR=1, this field over-rides the equalizer's zero frequency (for all lanes). When EQZ_OVR=0, the zero frequency is set automatically based on the RATE setting. 0x1F: 365 MHz (default setting for full and half-rate, RATE = 0 or 1) 0x1E: 275 MHz 0x1D: 195 MHz 0x1B: 140 MHz (default setting for quarter-rate mode, RATE = 2) 0x19: 105 MHz 0x10: 75 MHz 0x08: 55 MHz (default setting for eighth-rate, RATE = 3) 0x00: 50 MHz

7.5.3.39 LANE_EQ[15:0] Register (Offset = 01D0h) [reset = 08h]

LANE_EQ[15:0] is shown in 図 7-100 and described in 表 7-86.

Return to the Register Summary Table.

SerDes Equalizer Level for Physical Lane [*n*]. LANE_EQ[0] is at the lowest address.

図 7-100. LANE_EQ[15:0] Register

7	6	5	4	3	2	1	0
RESERVED	EQBOOST[*n*]		EQLEVEL[*n*]				
R/W-0b	R/W-00b		R/W-00h				

表 7-86. LANE_EQ[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0b	
6-5	EQBOOST[*n*]	R/W	00b	Controls EQ boost for physical lane *n*. **EQBOOST : GAIN Boost : BW Change : Power Increase** 0 : 0dB : 0% : 0mW 1 : 2dB : -30% : 0mW 2 : 4dB : +10% : 5mW 3 : 6dB : -20% : 5mW
4-0	EQLEVEL[*n*]	R/W	00h	When EQ_OVR=1, this field controls the equalization level for lane n. The valid range is from 0 (least equalization) to 16 (most equalization).

7.5.3.40 LANE_EQS[15:0] Register (Offset = 01E0h) [reset = NA, read only]

LANE_EQS[15:0] is shown in 図 7-101 and described in 表 7-87.

Return to the Register Summary Table.

Serdes Equalizer Status for Physical Lane *n*

図 7-101. LANE_EQS[15:0] Register

7	6	5	4	3	2	1	0
RESERVED	EQOVER[*n*]	EQUNDER[*n*]	EQLEVEL_S[*n*]				
R	R	R	R				

Copyright © 2024 Texas Instruments Incorporated

表 7-87. LANE_EQS[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R		
6	EQOVER[*n*]	R		EQOVER status for PHY lane *n* pre/post cursor analysis. See Pre/Post Cursor Analysis Procedure.
5	EQUNDER[*n*]	R		EQUNDER status for PHY lane *n* pre/post cursor analysis. See Pre/Post Cursor Analysis Procedure..
4	EQLEVEL_S[*n*]	R		This field returns the equalizer level currently in effect for lane *n*. This is the count of the number of bits set in the thermometer encoded value from the stsrx EQLEVEL_S field for lane *n*.

7.5.3.41 ESRUN Register (Offset = 01F0h) [reset = 00h]

ESRUN is shown in 図 7-102 and described in 表 7-88.

Return to the Register Summary Table.

Eye-Scan Run Control

図 7-102. ESRUN Register

7	6	5	4	3	2	1	0
RESERVED							ESRUN
R/W-00h							R/W-0b

表 7-88. ESRUN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	ESRUN	R/W	0b	After setting up eye-scan, set ESRUN=1 to run the eye-scan test. See Eye Scan Procedure.

7.5.3.42 ES_CTRL Register (Offset = 01F1h) [reset = 00h]

ES_CTRL is shown in 図 7-103 and described in 表 7-89.

Return to the Register Summary Table. Note: Only change this register while ESRUN=0.

Eye-Scan Control

図 7-103. ES_CTRL Register

7	6	5	4	3	2	1	0
RESERVED		ESLEN		ES			
R/W-00b		R/W-00b		R/W-0h			

表 7-89. ES_CTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	ES_CTRL	R/W	00b	

Copyright © 2024 Texas Instruments Incorporated

表 7-89. ES_CTRL Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
5-4	ESLEN	R/W	00b	Specify the length of the eye-scan test. Larger values will give more consistent results, but will take longer. **ESLEN : Number of Samples Analyzed** 0 : 127 1 : 1032 2 : 8191 3 : 65535 Note: Many eye-scan modes only analyze zeros (or ones). Since they don't analyze every sample, those modes will take longer to complete compared to a mode that analyzes all samples.
3-0	ES	R/W	0h	Specify the eye-scan mode. Applies to all lanes. ES : Eye-Scan Mode 0 : Eye-scan disabled (default) 1 : Compare. Counts mismatches between the normal sampler and the eye-scan sampler. Analyzes zeros and ones. 2 : Compare zeros. Same as ES=1, but only analyzes zeros. 3 : Compare ones. Same as ES=1, but only analyzes ones. 4 : Count ones. Increments ECOUNTn when the eye-scan sample is 1. 5-7 : RESERVED 8 : Average zero. Adjusts ESVO_Sn to the average voltage for a zero. 9 : Outer zero. Adjusts ESVO_Sn to the lowest voltage for a zero. 10 : Inner zero. Adjusts ESVO_Sn to the highest voltage for a zero. 11 : RESERVED 12 : Average one. Adjusts ESVO_Sn to the average voltage for a one. 13 : Outer one. Adjusts ESVO_Sn to the highest voltage for a one. 14 : Inner one. Adjusts ESVO_Sn to the lowest voltage for a one. 15 : RESERVED

7.5.3.43 ESPO Register (Offset = 01F2h) [reset = 00h]

ESPO is shown in 図 7-104 and described in 表 7-90.

Return to the Register Summary Table.

Eye-Scan Phase Offset

図 7-104. ESPO Register

7	6	5	4	3	2	1	0
RESERVED	ESPO						
R/W-0b	R/W-00h						

表 7-90. ESPO Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0h	

Copyright © 2024 Texas Instruments Incorporated

表 7-90. ESPO Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
6-0	ESPO	R/W	0b	Eye-scan phase offset for all lanes. This adjusts the sampling instant of the eye-scan sampler compared to the normal sampler. This is a signed value from -64 to +63 and the step size is 1/32th of a UI. Note: Only change this register while ESRUN=0.

7.5.3.44 ESVO Register (Offset = 01F3h) [reset = 00h]

ESVO is shown in 図 7-105 and described in 表 7-91.

Return to the Register Summary Table.

Eye-Scan Voltage Offset

図 7-105. ESVO Register

7	6	5	4	3	2	1	0
RESERVED		ESVO					
R/W-00b		R/W-00h					

表 7-91. ESVO Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R/W	0h	
5-0	ESVO	R/W	00h	Eye-scan voltage offset for all lanes. This adjusts the voltage threshold of the eye-scan sampler. This is a signed value from -32 to +31. The step size is about 10mV (giving an adjustment range of about -320mV to +310mV). This field is ignored for eye-scan modes that adjust the voltage offset automatically and return a result on ESVO_S[*n*]. Note: This register should only be changed when ESRUN=0.

7.5.3.45 ES_BIT_SELECT Register (Offset = 01F4h) [reset = 00h]

ES_BIT_SELECT is shown in 図 7-106 and described in 表 7-92.

Return to the Register Summary Table.

Eye-Scan Bit Select.

図 7-106. ES_BIT_SELECT Register

7	6	5	4	3	2	1	0
RESERVED			ES_BIT_SELECT				
R/W-000b			R/W-00h				

表 7-92. ES_BIT_SELECT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-5	RESERVED	R/W	000b	

Copyright © 2024 Texas Instruments Incorporated

表 7-92. ES_BIT_SELECT Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
4-0	ES_BIT_SELECT	R/W	00h	Eye-scan only runs on every 20th bit. This field specifies which bit position the eye-scan runs on (valid range is 0 to 19). Eye-scans may be run with all possible values of ES_BIT_SELECT and the results combined. Alternatively, results can be kept separate to see the effects of any duty cycle distortion / repetitive jitter. Note: This register should only be changed when ESRUN=0.

7.5.3.46 ECOUNT_CLR Register (Offset = 01F5h) [reset = 00h]

ECOUNT_CLR is shown in 図 7-107 and described in 表 7-93.

Return to the Register Summary Table.

SerDes Error Counter Clear

図 7-107. ECOUNT_CLR Register

7	6	5	4	3	2	1	0
RESERVED							ECOUNT_CLR
R/W-00h							R/W-0b

表 7-93. ECOUNT_CLR Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	ECOUNT_CLR	R/W	0b	Program this to a 1 and then to 0 to clear the ECOUNT counters

7.5.3.47 ESDONE Register (Offset = 01F6h) [reset = NA, read-only]

ESDONE is shown in 図 7-108 and described in 表 7-94.

Return to the Register Summary Table.

Eye-Scan Process Done

図 7-108. ESDONE Register

7	6	5	4	3	2	1	0
ESDONE[15:8]							
R							
ESDONE[7:0]							
R							

表 7-94. ESDONE Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	ESDONE[15:0]	R	NA	ESDONE[*n*] returns a 1 to indicate that the eye-scan procedure is completed on physical lane *n*. You must make sure that ESDONE[*n*] returns 1 before reading ESVO_S[*n*] or ECOUNT[*n*].

7.5.3.48 ESVO_S[15:0] Register (Offset = 0200h) [reset = NA, read-only]

ESVO_S[15:0] is shown in 図 7-109 and described in 表 7-95.

Copyright © 2024 Texas Instruments Incorporated

Return to the Register Summary Table.

Eye-Scan Voltage Offset for SerDes lane *n*, *n* = 0 - 15. ESVO_S[0] is at the lowest address.

図 7-109. ESVO_S[15:0] Register

7	6	5	4	3	2	1	0
RESERVED				ESVO_S[*n*]			
R				R			

表 7-95. ESVO_S[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R	NA	
5-0	ESVO_S[*n*]	R	NA	Returns the voltage offset result from the eye-scan on physical lane *n*. Applies to eye-scan modes that compute the voltage offset automatically. Only valid when ESDONE[*n*] returns 1.

7.5.3.49 ESCOUNT[15:0] Register (Offset = 0210h) [reset = NA, read-only]

ESCOUNT[15:0] is shown in 図 7-110 and described in 表 7-96.

Return to the Register Summary Table.

Eye-Scan Voltage Offset for SerDes lane *n*, *n* = 0 - 15. ESCOUNT[0] is at the lowest address.

図 7-110. ESCOUNT[15:0] Register

7	6	5	4	3	2	1	0
ESCOUNT[15:8][*n*]							
R							
ESCOUNT[7:0][*n*]							
R							

表 7-96. ESCOUNT[15:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	ESCOUNT[*n*]	R	NA	Returns the mismatch count for physical lane *n* (applies to eye-scan modes that count mismatches). Only valid when ESDONE[*n*] returns 1.

7.5.3.50 LOS_TH Register (Offset = 0234h) [reset = 08h]

LOS_TH is shown in 図 7-111 and described in 表 7-97.

Return to the Register Summary Table.

SerDes Loss-of-signal Theshold

図 7-111. LOS_TH Register

7	6	5	4	3	2	1	0
RESERVED				LOS_TH			
R/W-0h				R/W-0h			

表 7-97. LOS_TH Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	

Copyright © 2024 Texas Instruments Incorporated

表 7-97. LOS_TH Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
3-0	LOS_TH	R/W	0h	Specifies the threshold for the loss-of-signal detector. Applies when LOS_EN=1. Affects all lanes. LOS_TH : Approximate Threshold (mV) 0, 1 : RESERVED 2 - 15 : 15*(LOS_TH)

7.5.3.51 EQCNTSZ Register (Offset = 0235h) [reset = 00h]

EQCNTSZ is shown in 図 7-112 and described in 表 7-98.

Return to the Register Summary Table.

SerDes Equalizer Counter Size

図 7-112. EQCNTSZ Register

7	6	5	4	3	2	1	0
R/W-0h				R/W-0h			

表 7-98. EQCNTSZ Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-0	EQCNTSZ	R/W	0h	Equalizer counter size: Adjusts how many votes must be accumulated to cause the adaptive equalizer gain to change. Affects all lanes. This is for debug purposes only and the user should generally not need to change this setting. EQCNTSZ : Equalizer Vote Counter Size (votes required to adjust gain) 0 : (default) 511 1 : RESERVED 2 : 1 3 : 3 4 : 7 5 : 15 6 : 31 7 : 63 8 : 127 9 : 255 10-15 : RESERVED

7.5.3.52 CDRLOCK Register (Offset = 0238h) [reset = 00h]

CDRLOCK is shown in 図 7-113 and described in 表 7-99.

Return to the Register Summary Table.

SerDes CDR Lock/Freeze.

図 7-113. CDRLOCK Register

7	6	5	4	3	2	1	0
RESERVED							CDRLOCK
R/W-00h							R/W-0b

Copyright © 2024 Texas Instruments Incorporated

図 7-113. CDRLOCK Register (続き)

表 7-99. CDRLOCK Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	CDRLOCK	R/W	0b	When set, the CDR is frozen and no longer tracks. When the CDR is operating in first-order mode, set CDRLOCK to freeze the CDRPHASE value to inspect it.

7.5.3.53 CDRPHASE Register (Offset = 0239h) [reset = NA, read-only]

CDRPHASE is shown in 図 7-114 and described in 表 7-100.

Return to the Register Summary Table.

SerDes CDR Phase Status

図 7-114. CDRPHASE Register

7	6	5	4	3	2	1	0
CDRPHASE							
R							

表 7-100. CDRPHASE Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	CDRPHASE	R		Returns the current CDR phase value for the lane specified by RXDLANE. It is recommended to set CDRLOCK=1 before reading this register. The format is gray-coded. Refer to CDRPHASE Status for the coding.

7.5.3.54 PLL_STATUS Register (Offset = 0250h) [reset = NA, read only]

PLL_STATUS is shown in 図 7-67 and described in 表 7-52.

Return to the Register Summary Table.

SerDes PLL Status

図 7-115. PLL_STATUS Register

7	6	5	4	3	2	1	0
PLL_LOCK_STS				PLL_LOCK_LOST			
R-0h				R/W1C-0h			

表 7-101. PLL_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	PLL_LOCK_STS	R	0h	This field returns the LOCK signal from all four SerDes macros (3:0). This field can be used for functional (fault) testing of the PLL lock detectors.

Copyright © 2024 Texas Instruments Incorporated

表 7-101. PLL_STATUS Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
3-0	PLL_LOCK_LOST	R/W1C	0h	PLL_LOCK_LOST[n] is set whenever the LOCK signal from a SerDes PLL is low. bit 0: lanes 0 - 3 bit 1: lanes 4 - 7 bit 2: lanes 8 - 11 bit 3: lanes 12 - 15 This bit is sticky (remains set even if the PLL acquires lock). Write 1 to clear a bit. These bits are for debug purposes and allow the SPI to monitor if any SerDes PLL loses lock even briefly.

7.5.3.55 JESD_RST Register (Offset = 0253h) [reset = 0x00]

JESD_RST is shown in 図 7-116 and described in 表 7-102.

Return to the Register Summary Table.

JESD Reset

図 7-116. JESD_RST Register

7	6	5	4	3	2	1	
RESERVED							JESD_RST
R/W-00h							R/W-0h

表 7-102. JESD_RST Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	RESERVED
0	JESD_RST	R/W	0b	When set, this bit holds the digital portion of the JESD circuitry in reset but does not affect the physical lane. It may be necessary to set this bit prior to setting JESD_EN = 1 and then clear this bit at a later time to start processing the JESD data. This allows the supply to settle from the large change in power that occurs when starting the PHY and JESD clocks. This is especially important if the user plans to use the LANE_ARR values, since these values are captured only the first time the elastic buffer attempts to release.

7.5.3.56 EXTREF_EN Register (Offset = 02B0h) [reset = 00h]

EXTREF_EN is shown in 図 7-117 and described in 表 7-103.

Return to the Register Summary Table.

Enable External Reference

図 7-117. EXTREF_EN Register

7	6	5	4	3	2	1	0
RESERVED							EXTREF_EN
R/W-00h							R/W-0b

表 7-103. EXTREF_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	EXTREF_EN	R/W	0b	Setting this bit enable the use of an external reference voltage on the EXTREF ball.

Copyright © 2024 Texas Instruments Incorporated

CUR_2X_EN Register (Offset = 02B1h) [reset = 00h]

CUR_2X_EN is shown in 図 7-118 and described in 表 7-104.

Return to the Register Summary Table.

DAC Current Doubler Enable

図 7-118. CUR_2X_EN Register

7	6	5	4	3	2	1	0
RESERVED							CUR_2X_EN
R/W-00h							R/W-0b

表 7-104. CUR_2X_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	CUR_2X_EN	R/W	0b	Setting this bit doubles the DAC output current.

7.5.3.57 DAC_OFS_CHG_BLK Register (Offset = 02CFh) [reset = 00h]

DAC_OFS_CHG_BLK is shown in 図 7-119 and described in 表 7-105.

Return to the Register Summary Table.

DAC Offset Adjustment Change Block

図 7-119. DAC_OFS_CHG_BLK Register

7	6	5	4	3	2	1	0
RESERVED							DAC_OFS_CHG_BLK
R/W-00h							R/W-0b

表 7-105. DAC_OFS_CHG_BLK Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1		R/W	00h	
0	DAC_OFS_CHG_BLK	R/W	0b	When set, changes to DAC_OFS[n] are not propagated to the high-speed clocks and both DACs continue to use their current value. When this is changed from 1 to 0 the new DAC_OFS[n] values will be applied to both DACs in the same clock cycle.

7.5.3.58 DP_EN Register (Offset = 02E0h) [reset = 00h]

DP_EN is shown in 図 7-120 and described in 表 7-106.

Return to the Register Summary Table.

Datapath Enable.

図 7-120. DP_EN Register

7	6	5	4	3	2	1	0
RESERVED							DP_EN
R/W-00h							R/W-0b

Copyright © 2024 Texas Instruments Incorporated

表 7-106. DP_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	DP_EN	R/W	0b	Setting this bit enables datapath operation. When cleared, the datapath is held in reset. This bit should be set after the chip is configured for proper operation. Note: This register should only be changed from 0 to 1 when FUSE_DONE=1.

7.5.3.59 DUC_L Register (Offset = 02E1h) [reset = 00h]

DUC_L is shown in 図 7-121 and described in 表 7-107.

Return to the Register Summary Table.

DUC Interpolation Factor.

図 7-121. DUC_L Register

7	6	5	4	3	2	1	0
RESERVED				DUC_L			
R/W-0h				R/W-0h			

表 7-107. DUC_L Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-0	DUC_L	R/W	0h	DUC Interpolation Factor 0: 1x 1: 2x 2: 3x 3: 4x 4: 6x 5: 8x 6: 12x 7: 16x 8: 24x 9: 32x 10: 48x 11: 64x 12: 96x 13: 128x 14: 192x 15: 256x Note: This register should only be changed when JESD_EN=0 and DP_EN=0.

7.5.3.60 DUC_GAIN Register (Offset = 02E2h) [reset = 00h]

DUC_GAIN is shown in 図 7-122 and described in 表 7-108.

Return to the Register Summary Table.

図 7-122. DUC_GAIN Register

7	6	5	4	3	2	1	0

Copyright © 2024 Texas Instruments Incorporated

図 7-122. DUC_GAIN Register (続き)

DUC_GAIN3	DUC_GAIN2	DUC_GAIN1	DUC_GAIN0
R/W-00b	R/W-00b	R/W-00b	R/W-00b

表 7-108. DUC_GAIN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	DUC_GAIN3	R/W	00b	DUC_GAIN*n* adjusts the gain of DUC*n* (in the channel bonder) 0: 0dB 1: -6dB 2: -12dB 3: RESERVED Note: When the DUCs are configured for complex output (DUC_FORMAT=1), DUC2 and DUC3 cannot be used. In that case, DUC_GAIN2 and DUC_GAIN3 adjust the gain of the imaginary outputs of DUC0 and DUC1 respectively. Note: This register should only be changed when DP_EN=0.
5-4	DUC_GAIN2	R/W	00b	
3-2	DUC_GAIN1	R/W	00b	
1-0	DUC_GAIN0	R/W	00b	

7.5.3.61 DUC_FORMAT Register (Offset = 02E3h) [reset = 00h]

DUC_FORMAT is shown in 図 7-123 and described in 表 7-109.

Return to the Register Summary Table.

DUC Output Format

図 7-123. DUC_FORMAT Register

7	6	5	4	3	2	1	0
RESERVED							DUC_FORMAT
R/W-00h							R/W-0b

表 7-109. DUC_FORMAT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	DUC_FORMAT	R/W	0b	0: DUC outputs are real (DUC mixer converts complex to real by discarding the imaginary part). Up to 4 DUCs can be enabled. 1: DUC outputs are complex. Up to 2 DUCs can be enabled (DUC0 and DUC1). Note: This register should only be changed when DP_EN=0.

7.5.3.62 DAC_SRC Register (Offset = 02E4h) [reset = 00h]

DAC_SRC is shown in 図 7-124 and described in 表 7-110.

Return to the Register Summary Table.

DAC Source

図 7-124. DAC_SRC Register

7	6	5	4	3	2	1	0
DAC_SRC1				DAC_SRC0			
R/W-0h				R/W-0h			

Copyright © 2024 Texas Instruments Incorporated

表 7-110. DAC_SRC Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	DAC_SRC1	R/W	0h	When the DUCs are disabled (LT<=1), DAC_SRCn selects which input stream is sent to DACn. When the DUCs are enabled (LT>=2), DAC_SRCn controls which DUC outputs are routed (summed) to DACn (and the meaning of the bits depends on DUC_FORMAT). Signals Routed to DACn when DAC_SRCn[m] is set: LT=0.5 or 1 (DUCs disabled) DAC_SRCn[0]: Input Stream 0 (I) DAC_SRCn[1]: Input Stream 1 (Q) DAC_SRCn[2]: n/a DAC_SRCn[3]: n/a LT is 2 or higher (DUCs enabled) Register Bit DAC_SRCn[x] : DUC_FORMAT=0 (real) : DUC_FORMAT=1 (complex) DAC_SRCn[0] : DUC0 (real) : DUC0 (real) DAC_SRCn[1] : DUC1 (real) : DUC1 (real) DAC_SRCn[2] : DUC2 (real) : DUC0 (imag) DAC_SRCn[3] : DUC3 (real) : DUC1 (imag) If more than one signal is routed to the same DAC, the signals are summed together. Use DUC_GAIN to avoid saturation in this case. While it is possible to sum a real output with an imaginary output, no practical application requires that, so it is not tested or supported. When LT=0.5 or 1, no summing is supported. Only DAC_SRCn[0] or DAC_SRCn[1] should be set Note: This register should only be changed when DP_EN=0.
3-0	DAC_SRC0	R/W	0b	

7.5.3.63 MXMODE Register (Offset = 02E8h) [reset = 00h]

MXMODE is shown in 図 7-125 and described in 表 7-111.

Return to the Register Summary Table.

DAC Output Mode. Note: This register should only be changed when DP_EN=0.

図 7-125. MXMODE Register

7	6	5	4	3	2	1	0
RESERVED	MXMODE1			RESERVED	MXMODE0		
R/W-0b	R/W-000b			R/W-0b	R/W-000b		

表 7-111. MXMODE Register Field Descriptions

Bit	Field	Type	Reset	Description
7	RESERVED	R/W	0b	

表 7-111. MXMODE Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
6-4	MXMODE1	R/W	000b	Specify the DAC pulse format for DACB. 0: Normal mode (non-return-to-zero or NRZ) (sinc nulls at n*FS) 1: RF Mode (return to inverse or RTI) (sinc nulls at DC and 2n*FS) 2: Return-to-Zero (RTZ) (sinc nulls at 2n*FS) 3: DES2X – Samples provided by the DES interpolator (low-pass mode) 4: DES2XH – Samples provided by the DES interpolator (high-pass mode) 5: DES1X – Both samples are provided by the input stream 6: Disabled – DACA is disabled 7: RESERVED Note: If either MXMODE1 or MXMODE0 is set to DES1X, the other must be set to either DES1X or Disabled. User must also set DUC_L=0.
3	RESERVED	R/W	0b	
2-0	MXMODE0	R/W	0b	Specify the DAC pulse format for DACA. 0: Normal mode (non-return-to-zero or NRZ) (sinc nulls at n*FS) 1: RF Mode (return to inverse or RTI) (sinc nulls at DC and 2n*FS) 2: Return-to-Zero (RTZ) (sinc nulls at 2n*FS) 3: DES2X – Samples provided by the DES interpolator (low-pass mode) 4: DES2XH – Samples provided by the DES interpolator (high-pass mode) 5: DES1X – Both samples are provided by the input stream 6: Disabled – DACA is disabled 7: RESERVED Note: If either MXMODE1 or MXMODE0 is set to DES1X, the other must be set to either DES1X or Disabled. User must also set DUC_L=0.

7.5.3.64 TRUNC_HLSB Register (Offset = 02EAh) [reset = 00h]

TRUNC_HLSB is shown in 図 7-126 and described in 表 7-112.

Return to the Register Summary Table.

Truncation Half LSB Offset

図 7-126. TRUNC_HLSB Register

7	6	5	4	3	2	1	0
RESERVED							TRUNC_HLSB
R/W-00h							R/W-0b

表 7-112. TRUNC_HLSB Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1		R/W	0h	
0	TRUNC_HLSB	R/W	0b	adds ½ LSB offset for < 16-bit resolution modes or devices. For a mode or device with < 16-bit output resolution, setting this bit adds a 1/2 LSB offset to reduce the average offset introduced by truncation. Note: This register should only be changed when DP_EN=0

Copyright © 2024 Texas Instruments Incorporated

7.5.3.65 TX_EN_SEL Register (Offset = 02F8h) [reset = 03h]

TX_EN_SEL is shown in 図 7-127 and described in 表 7-113.

Return to the Register Summary Table.

Transmitter Enable Control Selection.

図 7-127. TX_EN_SEL Register

7	6	5	4	3	2	1	0
RESERVED				QUIET_TX_DISABLE	FAST_TX_EN	USE_TX_EN1	USE_TX_EN0
R/W-0h				R/W-0b	R/W-0b	R/W-1b	R/W-1b

表 7-113. TX_EN_SEL Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3	QUIET_TX_DISABLE	R/W	0b	0: Transmission is disabled after DEM and dither by sending a static aging safe code. For some configurations and frequencies, the outputs will have higher noise than a static mid-scale code would normally have. However, this mode has the lowest latency from transmit enable to DAC output. 1: When transmission is disabled, the input to DEM and dither is muted to minimize the output noise. This increases the latency from transmit enable to DAC output by 56 DAC clocks Note: This bit may only be set when FAST_TX_EN=1.
2	FAST_TX_EN	R/W	0b	0: When the transmit enables are both low, JESD and datapath clocks are shutdown to save power. When transmission is re-enabled the outputs remain muted until valid data is available at the output. 1: No power saving is performed and transmit enables can be used independently. Latency from transmit enable to DAC outputs is reduced in this mode.
1	USE_TX_EN1	R/W	1b	0: DACB is controlled by the TXEN1 ball. In this mode, TX_EN1 register is ignored. 1: DACB is controlled by the TX_EN1 register. In this mode the TXEN1 ball input does not affect the transmit enable for DACB. ***Note: USE_TX_EN1 and USE_TX_EN0 should be programmed to the same value (individual channel control is not supported).***
0	USE_TX_EN0	R/W	1b	0: DACA is controlled by the TXEN0 ball. In this mode, TX_EN0 register is ignored. 1: DACA is controlled by the TX_EN0 register. In this mode the TXEN0 ball input does not affect the transmit enable for DACA. ***Note: USE_TX_EN1 and USE_TX_EN0 should be programmed to the same value (individual channel control is not supported).***

7.5.3.66 TX_EN Register (Offset = 02F9h) [reset = 03h]

TX_EN is shown in 図 7-128 and described in 表 7-114.

Return to the Register Summary Table.

Transmitter Enable Control

Copyright © 2024 Texas Instruments Incorporated

図 7-128. TX_EN Register

7	6	5	4	3	2	1	0
						TX_EN1	TX_EN0
R/W-00h						R/W-1b	R/W-1b

表 7-114. TX_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
7-2	RESERVED	R/W	00h	
1	TX_EN1	R/W	1b	When USE_TX_EN1 = 1, this bit controls the transmit enable for DACB. ***Note: TX_EN1 and TX_EN0 should be programmed to the same value (individual channel control is not supported).***
0	TX_EN0	R/W	1b	When USE_TX_EN0 = 1, this bit controls the transmit enable for DACA ***Note: TX_EN1 and TX_EN0 should be programmed to the same value (individual channel control is not supported).***

7.5.3.67 NCO_CTRL Register (Offset = 0300h) [reset = 00h]

NCO_CTRL is shown in 図 7-129 and described in 表 7-115.

Return to the Register Summary Table. Note: This register should only be changed when DP_EN=0.

NCO Enable

図 7-129. NCO_CTRL Register

7	6	5	4	3	2	1	0
FR_EN	RESERVED				NCO_SC	DDS_EN	NCO_EN
R/W-0b	R/W-0h				R/W-0b	R/W-0b	R/W-0b

表 7-115. NCO_CTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
7	FR_EN	R/W	0b	When set, the Fast Reconfiguration (FR) interface is enabled and NCO frequency, phase, dither, and accumulator reset is controlled by the FR registers rather than the SPI registers.
6-3	RESERVED	R/W	0h	
2	NCO_SC	R/W	0b	Self-Coherent NCO Mode: When this bit is set, all NCOs use the reference counter from the NCO in DDS/DUC channel 0. This is typically used along with the NCO_SS register. This only impacts phase-coherent mode (NCO_CONT=0).
1	DDS_EN	R/W	0b	When set, all DUCs are configured for DDS operation once DP_EN is set. See DDS Operation in セクション 7.4.1 for details.
0	NCO_EN	R/W	0b	When set, DUC samples are mixed with the NCO.

7.5.3.68 NCO_CONT Register (Offset = 0301h) [reset = 00h]

NCO_CONT is shown in 図 7-130 and described in 表 7-116.

Return to the Register Summary Table.

NCO Phase Continuous Mode

図 7-130. NCO_CONT Register

7	6	5	4	3	2	1	0

Copyright © 2024 Texas Instruments Incorporated

図 7-130. NCO_CONT Register (続き)

RESERVED	NCO_CONT
R/W-0h	R/W-0h

表 7-116. NCO_CONT Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-0	NCO_CONT	R/W	0h	For each bit NCO_CONT[*n*], if set, NCO*n* operates in phase-continuous mode. This means that frequency changes occur without seeding the phase accumulator. If the bit is clear, NCO*n* operates in phase-coherent mode. During frequency changes, the phase accumulator is seeded from a main counter. This means that if changing from frequency A to B and then back to A, the phase returns to what it would have been if the change never occurred. Note: This register should only be changed when DP_EN=0.

7.5.3.69 NCO_SYNC Register (Offset = 0302h) [reset = 00h]

NCO_SYNC is shown in 図 7-131 and described in 表 7-117.

Return to the Register Summary Table.

NCO Synchronization Configuration

図 7-131. NCO_SYNC Register

7	6	5	4	3	2	1	0
RESERVED						NCO_SYNC_SRC	
R/W-00h						R/W-00b	

表 7-117. NCO_SYNC Register Field Descriptions

Bit	Field	Type	Reset	Description
7-2	RESERVED	R/W	00h	

Copyright © 2024 Texas Instruments Incorporated

表 7-117. NCO_SYNC Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
1-0	NCO_SYNC_SRC	R/W	00b	If FR_EN=0: This register determines how NCO synchronization events will be triggered. This includes both accumulator resets specified by NCO_AR and the application of changes to NCO_DITH_EN, FREQ, and PHASE. 0: Setting SPI_SYNC will immediately perform specified events. (All will occur in the same clock cycle.) 1: Setting SPI_SYNC will cause the specified events to occur on the next SYSREF rising edge. 2: While SPI_SYNC is high, the specified events will occur on every SYSREF rising edge. 3: While SPI_SYNC is high, the LSb of the “I” input to DUC0 will cause the specified events. To trigger the event, the LSb must be low for 4 or more consecutive samples and then high for 4 consecutive samples. The sync will occur coincident with the 4th high sample arriving at the DUC0 input. If FR_EN=1: This register determines how NCO synchronization events will be triggered. This includes both accumulator resets specified by FR_NCO_AR and the application of changes to FR_NCO_DITH_EN, FR_FREQL, FR_FREQS, and FR_PHASE. 0: If FRS is set, the specified events is performed at the rising edge of $\overline{\text{FRCS}}$. (All will occur in the same clock cycle.) 1: Reserved 2: RESERVED 3: If FRS is set, the LSb of the “I” input to DUC0 will cause the specified events following the rising edge of $\overline{\text{FRCS}}$. To trigger the event, the LSb must be low for 4 or more consecutive samples and then high for 4 consecutive samples. The sync will occur coincident with the 4th high sample arriving at the DUC0 input. While waiting for the LSb trigger, zero will be used for the LSb data. The LSb will immediately return to being used as data after the 4th consecutive high sample. Note: This register should only be changed when SPI_SYNC=0 and the FR interface is idle ($\overline{\text{FRCS}}$=1).

7.5.3.70 NCO_AR Register (Offset = 0303h) [reset = 0Fh]

NCO_AR is shown in 図 7-132 and described in 表 7-118.

Return to the Register Summary Table.

NCO Accumulator Reset

図 7-132. NCO_AR Register

7	6	5	4	3	2	1	0
RESERVED				NCO_AR			
R/W-0h				R/W-0h			

Copyright © 2024 Texas Instruments Incorporated

表 7-118. NCO_AR Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	0h	
3-0	NCO_AR	R/W	0h	For each bit NCO_AR[n], if set, the accumulator for NCOn will be reset on every sync event specified by NCO_SYNC_SRC. Note: This register has no effect when FR_EN=1.

7.5.3.71 SPI_SYNC Register (Offset = 0304h) [reset = 00h]

SPI_SYNC is shown in 図 7-133 and described in 表 7-119.

Return to the Register Summary Table.

SPI Sync Bit

図 7-133. SPI_SYNC Register

7	6	5	4	3	2	1	0
RESERVED							SPI_SYNC
R/W-00h							R/W-0b

表 7-119. SPI_SYNC Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	SPI_SYNC	R/W	0b	Writing ‘1’ to this register when it is ‘0’ will trigger synchronization events that are bound to this register (see NCO_SYNC_SRC). This register will return the last value written. Note: Whether this register is edge or level sensitive depends on the setting for NCO_SYNC_SRC. Note: This register has no effect when FR_EN=1.

NCO_SS Register (Offset = 0305h) [reset = 00h]

NCO_SS is shown in 図 7-134 and described in 表 7-120.

Return to the Register Summary Table.

NCO_SS Bit

図 7-134. NCO_SS Register

7	6	5	4	3	2	1	0
RESERVED							NCO_SS
R/W-00h							R/W-0b

表 7-120. NCO_SS Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	

Copyright © 2024 Texas Instruments Incorporated

表 7-120. NCO_SS Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
0	NCO_SS	R/W	0b	When this bit is set, all NCOs will continuously self-synchronize every 256 DAC clock cycles. NCO_SS can be changed while the NCOs are operating (DP_EN=1). To write a new FREQ, AMP, or PHASE value, clear NCO_SS first, and then set it again after the new values are written. All values go into effect simultaneously on all NCOs. The user should make sure that NCO_AR=0 whenever NCO_SS=1 (otherwise the NCO accumulators and/or reference counters keep getting reset). If the user also sets NCO_SC=1 and NCO_CONT=0, then all four NCOs maintain coherency with each other under radiation, but there may be no coherence with an external component. Each NCO accumulator is continuously seeded from the reference counter in DUC/DDS channel 0. This feature can be used to generate coherent harmonic tones to cancel out harmonic distortion in the DAC.

AMP[3:0] Register (Offset = 0318h) [reset = 0000h]

AMP[3:0] is described in 表 7-121. AMP[0] starts at address 0x0318, AMP[1] at address 0x031A, AMP[2] at address 0x031C and AMP[3] at address 0x031E.

Return to the Register Summary Table.

表 7-121. AMP[3:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	AMP[3:0]	R/W	0000h	Specifies the DDS amplitude for DDS channel n. 16-bit signed value. This register only applies to DDS Operation. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.)

7.5.3.72 FREQ[0] Register (Offset = 0320h) [reset = 0000000000000000h]

FREQ[0] is described in 表 7-122.

Return to the Register Summary Table.

FREQ for NCO*0* Accumulator.

Copyright © 2024 Texas Instruments Incorporated

表 7-122. FREQ[0] Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ[0]	R/W	0000 0000 0000 0000h	The NCO frequency (F_{NCO}) is: F_{NCO} = FREQ[0] * 2^{-64} * F_{CLK} where F_{CLK} is the sample frequency of the DAC. FREQ[0] is the integer value of this register. This register can be interpreted as signed or unsigned (both interpretations are valid). Use this equation to determine the value to program: FREQ[0] = 2^{64} * F_{NCO} /F_{CLK} Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

7.5.3.73 FREQ[1] Register (Offset = 0328h) [reset = 0000000000000000h]

FREQ[1] is described in 表 7-123.

Return to the Register Summary Table.

FREQ for NCO*1* Accumulator.

表 7-123. FREQ[1] Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ[1]	R/W	0000 0000 0000 0000h	The NCO frequency (F_{NCO}) is: F_{NCO} = FREQ[1] * 2^{-64} * F_{CLK} where F_{CLK} is the sample frequency of the DAC. FREQ[1] is the integer value of this register. This register can be interpreted as signed or unsigned (both interpretations are valid). Use this equation to determine the value to program: FREQ[1] = 2^{64} * F_{NCO} /F_{CLK} Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

7.5.3.74 FREQ[2] Register (Offset = 0330h) [reset = 0000000000000000h]

FREQ[2] is described in 表 7-124.

Return to the Register Summary Table.

FREQ for NCO*2* Accumulator.

Copyright © 2024 Texas Instruments Incorporated

表 7-124. FREQ[2] Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ[2]	R/W	0000 0000 0000 0000h	The NCO frequency (F_{NCO}) is: F_{NCO} = FREQ[2] * 2^{-64} * F_{CLK} where F_{CLK} is the sample frequency of the DAC. FREQ[2] is the integer value of this register. This register can be interpreted as signed or unsigned (both interpretations are valid). Use this equation to determine the value to program: FREQ[2] = 2^{64} * F_{NCO} /F_{CLK} Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

7.5.3.75 FREQ[3] Register (Offset = 0338h) [reset = 0000000000000000h]

FREQ[3] is described in 表 7-125.

Return to the Register Summary Table.

FREQ for NCO*3* Accumulator.

表 7-125. FREQ[3] Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ[3]	R/W	0000 0000 0000 0000h	The NCO frequency (F_{NCO}) is: F_{NCO} = FREQ[3] * 2^{-64} * F_{CLK} where F_{CLK} is the sample frequency of the DAC. FREQ[3] is the integer value of this register. This register can be interpreted as signed or unsigned (both interpretations are valid). Use this equation to determine the value to program: FREQ[3] = 2^{64} * F_{NCO} /F_{CLK} Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

7.5.3.76 PHASE0 Register (Offset = 0340h) [reset = 0000h]

PHASE0 is described in 表 7-126.

Return to the Register Summary Table.

Phase for NCO*0* Accumulator.

Copyright © 2024 Texas Instruments Incorporated

表 7-126. PHASE0 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE0	R/W	0h	Phase is added late so this register can be written during operation to change the phase without needing to reset the NCO. This value is left justified into a 32−bit field and then added to the phase accumulator. The phase (in radians) is PHASE0* 2^{-16} * 2π. This register can be interpreted as signed or unsigned. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

7.5.3.77 PHASE1 Register (Offset = 0342h) [reset = 0000h]

PHASE1 is described in 表 7-127.

Return to the Register Summary Table.

Phase for NCO*1* Accumulator.

表 7-127. PHASE1 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE1	R/W	0h	Phase is added late so this register can be written during operation to change the phase without needing to reset the NCO. This value is left justified into a 32−bit field and then added to the phase accumulator. The phase (in radians) is PHASE1 * 2^{-16} * 2π. This register can be interpreted as signed or unsigned. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

7.5.3.78 PHASE2 Register (Offset = 0344h) [reset = 0000h]

PHASE2 is described in 表 7-128.

Return to the Register Summary Table.

Phase for NCO*2* Accumulator.

Copyright © 2024 Texas Instruments Incorporated

表 7-128. PHASE2 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE2	R/W	0h	Phase is added late so this register can be written during operation to change the phase without needing to reset the NCO. This value is left justified into a 32−bit field and then added to the phase accumulator. The phase (in radians) is PHASE2 * 2^{-16} * 2π. This register can be interpreted as signed or unsigned. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

7.5.3.79 PHASE3 Register (Offset = 0346h) [reset = 0000h]

PHASE3 is described in 表 7-129.

Return to the Register Summary Table.

Phase for NCO*3* Accumulator.

表 7-129. PHASE3 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE3	R/W	0h	Phase is added late so this register can be written during operation to change the phase without needing to reset the NCO. This value is left justified into a 32−bit field and then added to the phase accumulator. The phase (in radians) is PHASE3 * 2^{-16} * 2π. This register can be interpreted as signed or unsigned. Note: Changes to this register do not take effect until the next sync event specified by NCO_SYNC_SRC. Note: This register should only be changed when DP_EN=0 or updates to the NCOs are scheduled to occur away from the change. (See NCO_SYNC.) Note: This register has no effect when FR_EN=1.

AMP_R[3:0] Register (Offset = 0378h) [reset = NA]

AMPR[3:0] is described in 表 7-130. AMP_R[0] starts at addess offset 0x0378, AMP_R[1] at address offset 0x37A, AMP_R[2] at address offset 0x37C and AMP_R[3] at address offset 0x37E

Return to the Register Summary Table.

表 7-130. AMP_R[3:0] Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	AMP_R[n]	R	NA	This provides a readback of the amplitude setting that is currently in use by the DDS channel n. Format is 16-bit signed. This register is only applicable when DDS_EN=1. When DDS_EN=0, the return value is undefined. The value is sampled as each byte is read, so it may return incoherent data if the amplitude changes during readback.

Copyright © 2024 Texas Instruments Incorporated

7.5.3.80 FREQ_R0 Register (Offset = 0380h) [reset = NA, read-only]

FREQ_R0 is described in 表 7-131.

Return to the Register Summary Table.

Readback for Frequency for NCO*0*

表 7-131. FREQ_R0 Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ_R0	R	NA	This provides a readback of the FREQ setting that is currently in used by the system for NCO*0*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

7.5.3.81 FREQ_R1 Register (Offset = 0388h) [reset = NA, read-only]

FREQ_R1 is described in 表 7-132.

Return to the Register Summary Table.

Readback for Frequency for NCO*1*

表 7-132. FREQ_R1 Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ_R1	R	NA	This provides a readback of the FREQ setting that is currently in used by the system for NCO*1*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

7.5.3.82 FREQ_R2 Register (Offset = 0390h) [reset = NA, read-only]

FREQ_R2 is described in 表 7-133.

Return to the Register Summary Table.

Readback for Frequency for NCO*2*

表 7-133. FREQ_R2 Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ_R2	R	NA	This provides a readback of the FREQ setting that is currently in used by the system for NCO*2*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

7.5.3.83 FREQ_R3 Register (Offset = 0398h) [reset = NA, read-only]

FREQ_R3 is described in 表 7-134.

Return to the Register Summary Table.

Readback for Frequency for NCO*3*

表 7-134. FREQ_R3 Register Field Descriptions

Bit	Field	Type	Reset	Description
63-0	FREQ_R3	R	NA	This provides a readback of the FREQ setting that is currently in used by the system for NCO*3*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

Copyright © 2024 Texas Instruments Incorporated

7.5.3.84 PHASE_R0 Register (Offset = 03A0h) [reset = NA, read-only]

PHASE_R0 is described in 表 7-135.

Return to the Register Summary Table.

Readback for Phase Word for NCO*0*

表 7-135. PHASE_R0 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE_R0	R/W	0h	This provides a readback of the PHASE setting that is currently in used by the system for NCO*0*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

7.5.3.85 PHASE_R1 Register (Offset = 03A2h) [reset = NA, read-only]

PHASE_R1 is described in 表 7-136.

Return to the Register Summary Table.

Readback for Phase Word for NCO*1*

表 7-136. PHASE_R1 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE_R1	R/W	NA	This provides a readback of the PHASE setting that is currently in used by the system for NCO*1*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

7.5.3.86 PHASE_R2 Register (Offset = 03A4h) [reset = NA, read-only]

PHASE_R2 is described in 表 7-137.

Return to the Register Summary Table.

Readback for Phase Word for NCO*2*

表 7-137. PHASE_R2 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE_R2	R/W	NA	This provides a readback of the PHASE setting that is currently in used by the system for NCO*2*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

7.5.3.87 PHASE_R3 Register (Offset = 03A6h) [reset = NA, read-only]

PHASE_R3 is described in 表 7-138.

Return to the Register Summary Table.

Readback for Phase Word for NCO*3*

表 7-138. PHASE_R3 Register Field Descriptions

Bit	Field	Type	Reset	Description
15-0	PHASE_R3	R/W	NA	This provides a readback of the PHASE setting that is currently in used by the system for NCO*3*. The value is sampled as each byte is read, so it may return incoherent data if the operating value changes during readback.

Copyright © 2024 Texas Instruments Incorporated

7.5.3.88 FR_FRS_R Register (Offset = 03E0h) [reset = NA, read-only]

FR_FRS_R is shown in 図 7-135 and described in 表 7-139.

Return to the Register Summary Table.

Readback for FR Syncrhonization

図 7-135. FR_FRS_R Register

7	6	5	4	3	2	1	0
FR_FRS_R	RESERVED						
R	R						

表 7-139. FR_FRS_R Register Field Descriptions

Bit	Field	Type	Reset	Description
7	FR_FRS_R	R	NA	This provides readback for the value of FRS in the last transaction. Note: This value is not synchronized and should only be read while the FR interface is static.
6-0	RESERVED	R	NA	

7.5.3.89 FR_NCO_AR_R Register (Offset = 03E1h) [reset = NA, read-only]

FR_NCO_AR_R is shown in 図 7-136 and described in 表 7-140.

Return to the Register Summary Table.

Readback for FR NCO Accumulator Reset

図 7-136. FR_NCO_AR_R Register

7	6	5	4	3	2	1	0
RESERVED				FR_NCO_AR_R			
R				R			

表 7-140. FR_NCO_AR_R Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R	NA	
3-0	FR_NCO_AR_R	R	NA	This provides readback for the last value that was written to FR_NCO_AR. Note: This value is not synchronized and should only be read while the FR interface is static.

7.5.3.90 TS_TEMP Register (Offset = 0400h) [reset = NA, read-only]

TS_TEMP is shown in 図 7-137 and described in 表 7-141.

Return to the Register Summary Table.

Temperature Reading in Celsius

図 7-137. TS_TEMP Register

7	6	5	4	3	2	1	0
TS_TEMP							
R							

Copyright © 2024 Texas Instruments Incorporated

表 7-141. TS_TEMP Register Field Descriptions

Bit	Field	Type	Reset	Description
7-0	TS_TEMP	R	NA	Returns the temperature sensor reading. This returns an unsigned value from 0 to 255. Subtract 80 from this value to get degrees Celsius. For example, a value of 110 indicates 30C. See Temperature Sensor. Note: Reads of this register require slower SPI timing. See Switching Characteristics. Note: This register will not return valid data unless TS_SLEEP=0.

7.5.3.91 TS_SLEEP Register (Offset = 0401h) [reset = 00h]

TS_SLEEP is shown in 図 7-138 and described in 表 7-142.

Return to the Register Summary Table.

Temperature Sensor Sleep

図 7-138. TS_SLEEP Register

7	6	5	4	3	2	1	0
RESERVED							TS_SLEEP
R/W-00h							R/W-0b

表 7-142. TS_SLEEP Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R/W	00h	
0	TS_SLEEP	R/W	0b	If temperature conversions are not needed, set this bit to sleep the temperature sensor.

7.5.3.92 SYNC_STATUS Register (Offset = 0410h) [reset = NA]

SYNC_STATUS is shown in 図 7-139 and described in 表 7-143.

Return to the Register Summary Table.

Synchronization Status

図 7-139. SYNC_STATUS Register

7	6	5	4	3	2	1	0
RESERVED				CLK_REALIGNED	CLK_ALIGNED	NCO_SYNC_DET	SYSREF_DET
R				R/W1C	R	R/W1C	R/W1C

表 7-143. SYNC_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	RESERVED	R/W	NA	
3	CLK_REALIGNED	R/W1C	NA	This bit is set any time the clock dividers associated with SYSREF (excluding LMFC/LEMC) are realigned to SYSREF. This bit is useful to confirm the internally sampled SYSREF signal has a correct and stable period in DDS mode (or for debug purposes in JESD204C mode). Write a 1 to clear this bit.

Copyright © 2024 Texas Instruments Incorporated

表 7-143. SYNC_STATUS Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
2	CLK_ALIGNED	R	NA	When set, indicates that the last SYSREF pulse was consistent with the SYSREF-associated clock dividers (except for the LMFC/LEMC). Since the LMFC/LEMC does not affect this bit, it is appropriate to use in DDS mode, but can also be used when the JESD204C interface is enabled. This bit is read-only (cannot be cleared via SPI).
1	NCO_SYNC_DET	R/W1C	NA	This bit is set any time one or more NCOs receives a sync event. Write a 1 to clear this bit.
0	SYSREF_DET	R/W1C	NA	This bit is set when a SYSREF is detected. Write a 1 to clear the bit and allow it to be re-detected.

7.5.3.93 SYS_ALM Register (Offset = 0430h) [reset = NA, read/write 1 to clear]

SYS_ALM is shown in 図 7-140 and described in 表 7-144.

Return to the Register Summary Table.

System Alarm Status

図 7-140. SYS_ALM Register

7	6	5	4	3	2	1	0
JESD_LINK_DOWN_ALM	JTIMER_EXPIRED_ALM	JESD_CRC_ALM	RESERVED			SYSRST_ALM	SYSREF_ALM
R/W1C	R/W1C	R/W1C	R			R/W1C	R/W1C

表 7-144. SYS_ALM Register Field Descriptions

Bit	Field	Type	Reset	Description
7	JESD_LINK_DOWN_ALM	R/W1C		This bit is set any time LINK_UP transitions from 1 to 0 while JESD_EN=1. Write 1 to clear the alarm.
6	JTIMER_EXPIRED_ALM	R/W1C		This bit is set if the JESD link has been down (LINK_UP=0 while JESD_EN=1) longer than allowed by JTIMER. Write 1 to clear the alarm.
5	JESD_CRC_ALM	R/W1C		This bit is set any time CRC_FAULT is detected on an enabled lane. Applies only to 64b/66b modes. Write 1 to clear the alarm.
4-2	RESERVED	R		
1	SYSRST_ALM	R/W1C		This bit is set any time the chip is reset due to the $\overline{\text{RESET}}$ ball, power on reset, or SOFT_RESET. Write 1 to clear the alarm.
0	SYSREF_ALM	R/W1C		This bit is set any time a SYSREF edge is detected at an incorrect alignment by either the clock dividers or by the JESD Subsystem (when JESD_EN=1). Write 1 to clear the alarm.

7.5.3.94 ALM_MASK Register (Offset = 0431h) [reset = 00h]

ALM_MASK is shown in 図 7-141 and described in 表 7-145.

Return to the Register Summary Table.

Alarm Mask

図 7-141. ALM_MASK Register

7	6	5	4	3	2	1	0
JESD_LINK_DOWN_MASK	JTIMER_EXPIRED_MASK	JESD_CRC_MASK	RESERVED				SYSREF_ALM_MASK
R/W-0b	R/W-0b	R/W-0b	R/W-0h				R/W-0b

Copyright © 2024 Texas Instruments Incorporated

表 7-145. ALM_MASK Register Field Descriptions

Bit	Field	Type	Reset	Description
7	JESD_LINK_DOWN_MASK	R/W	0h	When set, alarms from the JESD_LINK_DOWN_ALM register are masked and will not impact the alarm output.
6	JTIMER_EXPIRED_MASK	R/W	0b	When set, alarms from the JTIMER_EXPIRED_ALM register are masked and will not impact the alarm output.
5	JESD_CRC_MASK	R/W	0b	When set, alarms from the JESD_CRC_ALM register are masked and will not impact the alarm output.
4-1	RESERVED	R/W	0h	
0	SYSREF_ALM_MASK	R/W	0b	When set, alarms from the SYSREF_ALM register are masked and will not impact the alarm output.

7.5.3.95 MUTE_MASK Register (Offset = 0432h) [reset = 21h]

MUTE_MASK is shown in 図 7-142 and described in 表 7-146.

Return to the Register Summary Table.

DAC Mute Mask

図 7-142. MUTE_MASK Register

7	6	5	4	3	2	1	0
RESERVED		JESD_CRC_MUTE_MASK	RESERVED				SYSREF_MUTE_MASK
R/W-00b		R/W-1b	R/W-0h				R/W-1b

表 7-146. MUTE_MASK Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R/W	00b	
5	JESD_CRC_MUTE_MASK	R/W	1b	JESD CRC alarms will mute the DACs according to JESD_CRC_REC unless this bit is set.
4-1	RESERVED	R/W	0h	
0	SYSREF_MUTE_MASK	R/W	1b	Alarms from the SYSREF_ALM register will mute the DACs unless this bit is set.

7.5.3.96 MUTE_REC Register (Offset = 0433h) [reset = A0h]

MUTE_REC is shown in 図 7-143 and described in 表 7-147.

Return to the Register Summary Table.

DAC Mute Recovery

図 7-143. MUTE_REC Register

7	6	5	4	3	2	1	0
JESD_LINK_DOWN_REC	RESERVED	JESD_CRC_REC	RESERVED				
R/W-1b	R/W-0b	R/W-1b	R/W-00h				

表 7-147. MUTE_REC Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	JESD_LINK_DOWN_REC	R/W	1b	0: DAC will remain muted until the JESD_LINK_DOWN_ALM = 0. 1: DAC will unmute automatically when the JESD link recovers.
6	RESERVED	R/W	0b	

Copyright © 2024 Texas Instruments Incorporated

表 7-147. MUTE_REC Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
5	JESD_CRC_MUTE_MASK	R/W	1b	This bit is only used if JESD_CRC_MUTE_MASK = 0. 0: DAC will remain muted until the JESD_CRC_ALM=0 1: DAC will unmute automatically when CRC_FAULT=0.
4-0	RESERVED	R/W	0h	

7.5.3.97 FUSE_STATUS Register (Offset = 0600h) [reset = NA]

FUSE_STATUS is shown in 図 7-142 and described in 表 7-146.

Return to the Register Summary Table.

Fuse Status

図 7-144. FUSE_STATUS Register

7	6	5	4	3	2	1	0
RESERVED							FUSE_DONE
R-NA							R-NA

表 7-148. FUSE_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
7-1	RESERVED	R	NA	
0	FUSE_DONE	R	NA	Returns ‘1’ when the fuse controller is idle, meaning the controller has completed the fuse auto-load sequence. The sequence takes less than 523,000 CLK cycles to complete, or FUSE_DONE can be polled until it is '1'. When FUSE_DONE is ‘0’ the user should not read or write any fuse-backed registers.

7.5.3.98 FINE_CUR_A Register (Offset = 0723h) [reset = varies]

FINE_CUR_A is shown in 図 7-145 and described in 表 7-149.

Return to the Register Summary Table.

Fine Bias Current Control for DACA

図 7-145. FINE_CUR_A Register

7	6	5	4	3	2	1	0
RESERVED		FINE_CUR_A					
R-00b		R/W-varies					

表 7-149. FINE_CUR_A Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R	00b	
5-0	FINE_CUR_A	R/W	varies	Fine current control setting for DAC A. See セクション 7.3.2.2. The default values varies to match output current specification.

7.5.3.99 COARSE_CUR_A Register (Offset = 0724h) [reset = 0Fh]

COARSE_CUR_A is shown in 図 7-146 and described in 表 7-150.

Copyright © 2024 Texas Instruments Incorporated

Return to the Register Summary Table.

Coarse Bias Current Control for DACA

図 7-146. COARSE_CUR_A Register

7	6	5	4	3	2	1	0
DAC0_CBIAS_SLEEP				COARSE_CUR_A			
R/W-0h				R/W-0xF			

表 7-150. COARSE_CUR_A Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	DAC0_CBIAS_SLEEP	R/W	0h	DAC coarse current setting during sleep. See discussion for DC coupled outputs in セクション 8.1.6
3-0	COARSE_CUR_A	R/W	0xF	Coarse current control setting for DAC A. See セクション 7.3.2.2.

7.5.3.100 FINE_CUR_B Register (Offset = 0725h) [reset = varies]

FINE_CUR_B is shown in 図 7-147 and described in 表 7-151.

Return to the Register Summary Table.

Fine Bias Current Control for DAC B

図 7-147. FINE_CUR_B Register

7	6	5	4	3	2	1	0
RESERVED		FINE_CUR_B					
R-00b		R/W-varies					

表 7-151. FINE_CUR_B Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	RESERVED	R	00b	
5-0	FINE_CUR_B	R/W	varies	Fine current control setting for DAC B. See セクション 7.3.2.2. The default values varies to match output current specification.

7.5.3.101 COARSE_CUR_B Register (Offset = 0726h) [reset = 0Fh]

COARSE_CUR_B is shown in 図 7-148 and described in 表 7-152.

Return to the Register Summary Table.

Coarse Bias Current Control for DACB

図 7-148. COARSE_CUR_B Register

7	6	5	4	3	2	1	0
DAC1_CBIAS_SLEEP				COARSE_CUR_B			
R/W-0h				R/W-0xF			

表 7-152. COARSE_CUR_B Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	DAC1_CBIAS_SLEEP	R/W	0h	DAC coarse current setting during sleep. See discussion for DC coupled outputs in セクション 8.1.6
3-0	COARSE_CUR_B	R/W	0xF	Coarse current control setting for DAC B. See セクション 7.3.2.2.

Copyright © 2024 Texas Instruments Incorporated

7.5.3.102 DEM_ADJ Register (Offset = 0727h) [reset = 11h]

DEM_ADJ is shown in 図 7-148 and described in 表 7-152.

Return to the Register Summary Table

DEM Adjust

表 7-153. Single Edge DEM Adjust

7	6	5	4	3	2	1	0
DEM_ADJ1				DEM_ADJ0			
R/W-0x1				R/W-0x1			

表 7-154. DEM_ADJ Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	DEM_ADJ1	R/W	0x1	Adjust DEM behavior for single-edge data-independent DEM for DAC1. This register has no effect unless DAC1 is configured for single-edge data-independent DEM. Only 0 to 3 are valid settings, 4 through 15 are reserved.
3-0	DEM_ADJ0	R/W	0x1	Adjust DEM behavior for single-edge data-independent DEM for DAC0. This register has no effect unless DAC0 is configured for single-edge data-independent DEM. Only 0 to 3 are valid settings, 4 through 15 are reserved.

7.5.3.103 DEM_DITH Register (Offset = 0729h) [reset = 00h]

DEM_DITH is shown in 図 7-149 and described in 表 7-155.

Return to the Register Summary Table.

DAC DEM and Dither Control

図 7-149. DEM_DITH Register

7	6	5	4	3	2	1	0
DEM_DACB		DEM_DACA		DITHER_DACB		DITHER_DACA	
R/W-00b		R/W-00b		R/W-00b		R/W-00b	

表 7-155. DEM_DITH Register Field Descriptions

Bit	Field	Type	Reset	Description
7-6	DEM_DACB	R/W	00b	0 : Enable single-edge, data-independent DEM for DACB 1 : Enable dual-edge, data-independent DEM for DACB 2 : Enable data-dependent DEM for DACB 3 : DEM disabled for DACB
5-4	DEM_DACA	R/W	00b	0 : Enable single-edge, data-independent DEM for DACA 1 : Enable dual-edge, data-independent DEM for DACA 2 : Enable data-dependent DEM for DACA 3 : DEM disabled for DACA
3-2	DITHER_DACB	R/W	00b	0 : Enable single-edge dithering for DACB 1 : Enable dual-edge dithering for DACB 2 : RESERVED 3 : Dithering disabled for DACB

Copyright © 2024 Texas Instruments Incorporated

表 7-155. DEM_DITH Register Field Descriptions (続き)

Bit	Field	Type	Reset	Description
1-0	DITHER_DACA	R/W	00b	0 : Enable single-edge dithering for DACA 1 : Enable dual-edge dithering for DACA 2 : RESERVED 3 : Dithering disabled for DACA

7.5.3.104 DAC_OFS[0:1] Register (Offset = 072Ah) [reset = 00h]

DAC_OFS[0:1] is described in 表 7-156.

Return to the Register Summary Table.

DAC Offset Control. DAC_OFS[0] is at the lowest address.

表 7-156. DAC_OFS[0:1] Register Field Descriptions

Bit	Field	Type	Reset	Description
15-13	Reserved	R/W	000b	
12-0	DAC_OFS[n]	R/W	00b	Offset adjustment for DACn (n = 0 or 1). The value in this register is added to the DACn output. This is a 2's complement, 13-bit signed value. The LSB weight is one DAC LSB. The value programmed into this register passes through a saturation function to limit the adjustment to what is possible. If dithering is enabled on DACn (see DEM_DITH), DAC_OFS[n] is saturated to the range +/- 128. If dithering is disabled on DACn, the saturation range is +/-3968. See セクション 7.3.4. Note: This value should only be changed when DP_EN=0 or DAC_OFS_CHG_BLK=1.

Copyright © 2024 Texas Instruments Incorporated

8 Application and Implementation

注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

8.1 Application Information

8.1.1 Startup Procedure for DUC/Bypass Mode

The list below is the startup procedure for the device:

1. Power up the device with ball $\overline{\text{RESET}}$ asserted using the procedure in セクション 8.3.1.
2. Apply CLK and then de-assert $\overline{\text{RESET}}$.
3. Wait for fuse values to be loaded (register FUSE_DONE returns 1).
4. Set up all the operational parameters (registers can be programmed in any order):
   a. Program interpolation factor in the DUC_L register.
   b. Determine the total interpolation factor (LT), which is needed in the next steps. Except for DES1X mode (dual edge sampling with no interpolation), LT = DUC_L.
   c. Determine many sample streams are needed and program the JESD_M register.
   d. Select a JESD204C mode from 表 7-22. Make sure the selected mode supports the value of LT computed previously and the desired link layer encoding. Also make sure the mode supports the number of desired streams set in the JESD_M register. Program the mode number into the JMODE register.
   e. Program the JENC register to select 8b/10b or 64b/66b operation.
   f. Compute the value of R using 表 7-22 and the LT value computed earlier.
   g. Using 表 7-17 (8b/10b) or 表 7-18 (64b/66b), identify a row that matches the R value and DAC clock frequency. Program REFDIV, MPY, RATE and VRANGE according to the tables.
   h. If necessary, program LANE_SELn to bind the appropriate physical lanes to logical lanes. Program LANE_INV if necessary to account for any lane inversion (differential pairs swapped on PCB).
   i. Program other common settings according to your desired usage (SUBCLASS, SFORMAT, SCR in JCTRL).
   j. If using 8b/10b encoding, program the KM1 register to set the K parameter. KM1 must match the link partner. Be sure to honor the constraint imposed by the KR parameter from 表 7-22.
   k. If subclass 1 operation is desired (SUBCLASS=1), you must also program RBD. Determine the appropriate value for RBD by referring to: Programming RBD.
   l. Optional Serdes parameters can also be programmed if necessary (that is, JPHY_CNTL, EQ_CNTL, EQZERO, LANE_EQn).
   m. Program any DAC or DUC related registers, for example the DAC_SRC register to route data to your desired DACs and configure MXMODE to set the DAC output mode.
5. Program the transmitter (link partner, that is, FPGA or ASIC), and instruct the transmitter to begin transmission.
6. Program JESD_EN=1 to start up the receiver.
7. Program DP_EN=1 to enable the datapath. This is required to allow data to flow to the DAC. If only JESD204C diagnostics are performed, you can leave DP_EN at 0.
8. Wait for the VDDDIG supply voltage to re-stablize as the supply current transient can result in a dip in the supply voltage. 80 microseconds is be sufficient, but this can be optimized based on actual measurements.
9. If SUBCLASS=1, SYSREF is necessary to establish the LMFC/LEMC phase in the receiver. Follow this procedure:
   a. Using two separate transactions, program SYSREF_RECV_SLEEP=0 and then SYSREF_PROC_EN=1 (both in register SYSREF_CNTL).
   b. Program SYSREF_SEL to a known good value (see SYSREF Windowing for details on how to calculate SYSREF_SEL using the SYSREF windowing function).
   c. Program SYSREF_ALIGN_EN=1.

Copyright © 2024 Texas Instruments Incorporated

d. Apply at least five SYSREF pulses to the SYSREF input. The period of each SYSREF cycle must meet the requirements in 表 7-3.

10. Read the JESD_STATUS register to confirm operation of the link (LINK_UP field in JESD_STATUS = 1). If the LINK_UP field returns 0, verify these items:
    a. If the PLL_LOCKED field in JESD_STATUS returns 0, verify the correct PLL settings (REFDIV, MPY, RATE and VRANGE). Verify the CLK frequency is correct.
    b. If SUBCLASS = 1, and the ALIGNED field in JESD_STATUS returns 0, verify SYSREF has been applied and the SYSREF processor is enabled SYSREF_PROC_EN.
    c. If above are not the problem, then read the LANE_STATUSn (only read registers for logical lanes 0 to L-1). Identify if some lanes cannot acquire code group or block synchronization. If so, verify the transmitter has been programmed correctly. Verify LANE_SELn is programmed correctly. Consider performing PHY tests to verify/optimize PHY operation (PRBS testing using JTEST, eye-scan testing, or equalizer optimization).
11. If coherency between multiple NCOs is required, the NCOs must be re-synchronized using one of the methods described in section NCO Synchronization for multi-device/deterministic synchronization, or using SPI_SYNC with NCO_SYNC_SRC if only internal NCO phase is required.
12. To configure the part for a different mode, set DP_EN=0 and JESD_EN=0. Then return to step 4.

8.1.2 Startup Procedure for DDS Mode

The DUC channels can operate in DDS mode by setting the DDS_EN register before setting DP_EN.

To use DDS mode, perform these steps:

1. Program DDS_EN=1 (the DDS isn't enabled until DP_EN is set)
2. Program JESD_M to 2, 4, 6, or 8 to enable 1, 2, 3, or 4 DDS channels respectively
3. Program initial values for AMP, FREQ, and PHASE
4. There is no need to program NCO_EN (it's implied by DDS_EN=1)
5. Program DUC_FORMAT=1 if complex output is desired. If DUC_FORMAT=1, JESD_M must be set to 2 or 4 (1 or 2 channels).
6. Program DAC_SRC to bind DUC (DDS) channels to DACs
7. Leave JESD_EN=0
8. Program DP_EN=1
9. Wait for the VDDDIG supply voltage to re-stablize as the supply current transient can result in a dip in the supply voltage. 80 microseconds is be sufficent, but this can be optimized based on actual measurements.
10. If coherency between multiple NCO's is required, the NCO's must be re-synchronized using one of the methods described in section NCO Synchronization for multi-device/deterministic synchronization, or using SPI_SYNC with NCO_SYNC_SRC if only internal NCO phase is required.
11. The DUC channels now run in DDS mode and begin outputting tones. Use AMP, FREQ, and PHASE to update the waveform parameters. You must re-synchronize the NCOs to apply new values to the NCOs. Use AMP_R, FREQ_R, and PHASE_R to inspect the values that are currently in effect.
12. Other NCO settings also apply to DDS mode such as NCO_AR, and NCO_CONT. The NCOs can be synchronized in the same fashion as DUC mode.

8.1.3 Eye Scan Procedure

The PHY layer contains features for generating eye diagrams. A variety of different modes are supported (see ES register for list of modes). The following sections describe how to generate eye-scan data from the part and some approaches for building an eye-diagram.

1. Configure the part for JESD204C operation by following the steps in the Startup Procedure for DUC Mode. Return here after setting JESD_EN=1. Eye-scan can be run with JESD204C bitstreams, but can also work with general PRBS input stimulus. Eye-scan is run on all enabled physical lanes simultaneously.
2. Program ES to the desired eye-scan mode.
3. If ES is less than 8, you must program ESVO to the desired voltage offset. For other modes, the eye-scan logic automatically adjusts the voltage offset of the eye-scan sampler.
4. Program ESPO to the desired phase offset.

Copyright © 2024 Texas Instruments Incorporated

5. Program ES_BIT_SELECT to a value from 0 to 19. Eye-scan analyzes every 20th received bit (decimate-by-20). ES_BIT_SELECT adjusts this decimation phase. For random stimulus, this does not impact the results. If the input has repeating patterns, this can affect the results.
6. Program ESLEN to the desired number of samples. Higher settings give more consistent results.
7. Set ECOUNT_CLR = 1 then set ECOUNT_CLR to clear the error counter. This step is recommended, but can be skipped if desired (e.g. to add up counts from multiple eye scan runs). This can also be skipped if ECOUNT won't be used (for modes with ES of 8 or greater)
8. Program ESRUN = 1 to start the scan.
9. Poll ESDONE until ESDONE returns 1 for each of the lanes you want to run eye-scan on.
10. If the selected eye-scan mode modified the eye-scan voltage offset (inner/outer/average modes), read ESVO_S to get the inner/outer/average eye boundary. For other eye-scan modes, read ECOUNT to return the number of mismatches (or matches) recorded.
11. Program ESRUN = 0.
12. Return to step 2 to run another eye-scan data collection process. The receiver can remain enabled during multiple iterations of steps 2-12.

There are two basic approaches to build an eye diagram using the eye-scan feature.

1. 1. Fast approach using ESVO_S:
    a. Repeat the procedure above for each valid value of ESPO. For each value of ESPO, run an inner-eye analysis of zeros and ones. This locates the maximum zero ($ESVO_{max0}$) and minimum one ($ESVO_{min1}$) for each value of ESPO.
    b. All the cells of the eye between $ESVO_{max0}$ and $ESVO_{min1}$ (inclusive) can be colored black, and all other cells colored white.
    c. Additional detail can be added to the eye-diagram by including outer and/or average analysis (see ES). For example, the ESVO_S values produced from average analysis can be colored red, while all other values between and including the inner and outer values colored white.
2. Detailed approach using ECOUNT:
    a. select an eye-scan mode that counts mismatches. Repeat the procedure outlined above for each valid value of ESVO and ESPO.
    b. After each run, record the value of ECOUNT (resetting ECOUNT before each run).
    c. Each eye-scan run corresponds to one cell of the eye-diagram. ESPO is the x-coordinate of the cell. ESVO is the y-coordinate of the cell. The intensity of the cell is proportional to ECOUNT/Nsamples, where Nsamples is the number of analyzed samples per run (determined by ESLEN).
    d. This approach takes much more time to run, but can provide a more granular eye-diagram.

8.1.4 Pre/Post Cursor Analysis Procedure

Pre/Post Cursor Analysis can be used to determine an optimum setting for pre-emphasis in the transmitter.

1. Program JESD_EN = 0 if necessary. Program EQMODE = 1. Program JESD_EN = 1 and allow sufficient time for the equalizer to adapt and settle. You can read EQLEVEL_S multiple times to verify the value is stable or toggling between adjacent values.
2. Set EQHOLD = 1 to lock the equalizer (disable adaptation). This also causes EQOVER and EQUNDER fields to become low.
3. Wait at least 48UI, and proportionally longer if the CDR activity is less than 100% so the 1 on EQHOLD is sampled and acted upon. The SPI is slow enough that no explicit delay is be necessary.
4. Set EQMODE to 2 or 3 to select pre or post cursor analysis respectively. With a separate SPI transaction, set EQHOLD = 0. The equalization characteristics of the received signal are analyzed (the equalizer response continues to be locked).
5. Wait at least 150,000UI to allow time for the analysis to occur, proportionately longer if the CDR activity is less than 100%
6. Examine EQOVER and EQUNDER for results of analysis:
    a. EQOVER high indicates the signal is over equalized;
    b. EQUNDER high indicates the signal is under equalized;
7. Set EQHOLD = 1

Copyright © 2024 Texas Instruments Incorporated

8. Adjust the transmitter pre-emphasis and repeat steps 3 thru 7 if required.
9. Set EQMODE = 1, and with a separate SPI transaction, set EQHOLD = 0 to exit analysis mode and return to normal adaptive equalization.

8.1.5 Understanding Dual Edge Sampling Modes

Dual edge sampling modes (DES1X, DES2XL/H) outputs unique samples on both the rising and falling edge of CLK, doubling the sample rate for the same clock frequency compared to NRZ, RTZ or RF modes. DES1X mode requires input samples for both clock edges while DES2XL/H modes generate the falling edge samples by digital interpolation. The 2x DES interpolator has an 80% passband bandwidth, 55 dB stopband attenuation and can be configured as low pass or high pass (The response is shown in 図 8-1). The DES interpolator is lowpass in DES2XL mode, passing the signal below 0.4*F_{CLK} and removing the image above 0.6*F_{CLK}. IN DES2XH mode signals above 0.6*F_{CLK} are passed and the image below 0.4*F_{CLK} is removed. In the transition band between 0.4*F_{CLK} and 0.6*F_{CLK}, the passband is attenuated by up to 6 dB and the image attenuation is significantly reduce.

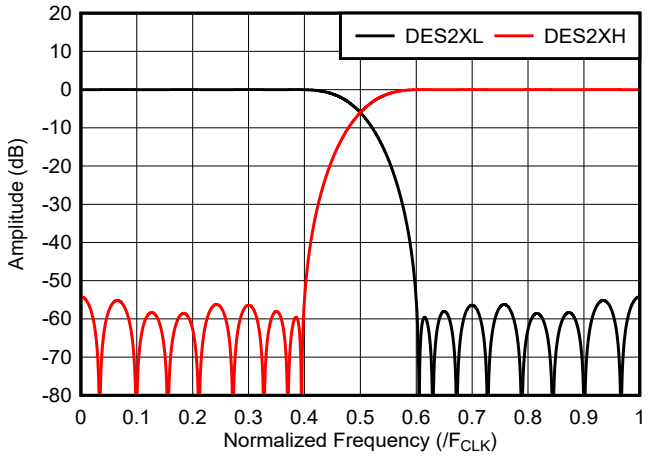


図 8-1. DES Interpolator Frequency Response

A non-50% CLK duty cycle results in an image of the signal at F_{CLK} - F_{OUT}. The amplitude of the image in DES2XL/H modes compared to NRZ/RF modes is shown in 図 8-2. DES2XL provides 30+ dB suppression over NRZ mode and DES2XH 20 to 30 dB suppression over RF mode. This reduces the analog filtering required after the DAC to remove the unwanted images.

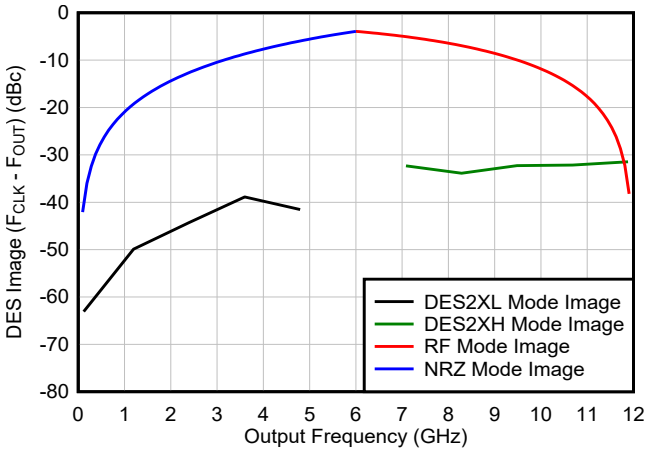


図 8-2. DES2XL/H Image compare to NRZ and RF Modes

Copyright © 2024 Texas Instruments Incorporated

The input clock frequency and input data rate is the same for NRZ, RF, RTZ, DES2XL and DES2XH modes - only the output waveform generated by the DAC is changed (See セクション 7.3.1). Changing between modes only requires a different setting of the MXMODE register.

図 8-3 shows a comparison of DES2XL and NRZ mode for a fullscale tone at 3497 MHz with 10 GSPS clock frequency. In addition to the reduction of the image at F_{CLK} - F_{OUT} = 6743 MHz, DES2XL mode can also suppress harmonics that in NRZ mode fold back below $F_{CLK}/2$. In the plot, HD2 has an image at 3006 MHz that is -65 dBc in NRZ mode and -80 dBc in DES2XL mode. Likewise, the HD3 image at 491 MHz improves from -70 dBc in NRZ mode to better than -90 dBc in DES2XL mode. SFDR between 0 and $F_{CLK}/2$ is limited by HD2 and therefore improves from 65 to 80 dBc. Note that the non-linearity specifications for DES2XL mode in セクション 6 are measured between 0 to $F_{CLK}/2$ (as is NRZ mode), and for DES2XH mode between $F_{CLK}/2$ and F_{CLK}.

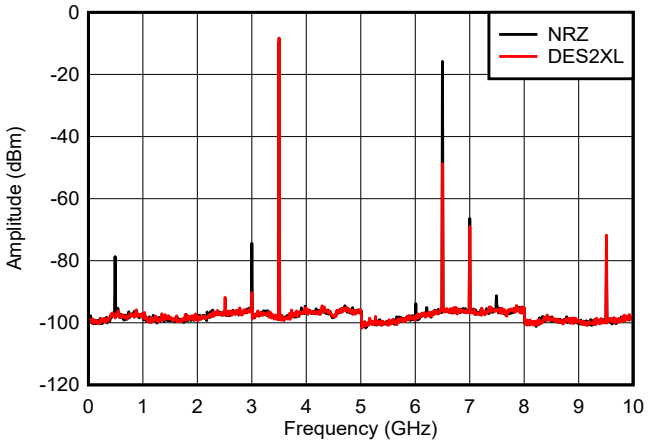


図 8-3. Output Spectra Comparing DES2XL and NRZ Modes

RF and DES2XH mode behave similarly. 図 8-4 shows a tone at 7997 MHz with 10 GHz clock in RF and DES2XH modes. HD2 and HD3 have folded frequencies around 6 GHz in NRZ mode, these are suppressed > 10 dB in DES2XH mode.

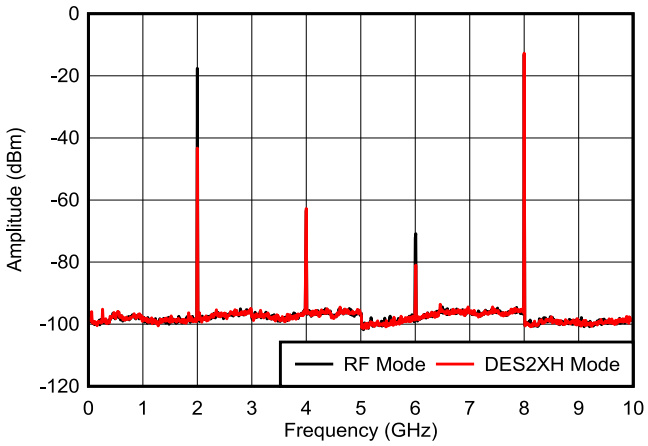


図 8-4. Output Spectra Comparing DES2XH and RF Modes

One additional benefit of DES2XL compared to NRZ mode is an improvement in additive phase noise of approximately 6 dB in the 1/f region of the offset frequency (see 図 8-5). This is due to DES2XL using both the rising and falling edges of the clock, which cancels some common mode noise in the clock path. Since RF mode also uses the falling edge to generate the inverse sample, there is no significant difference between RF mode and DES2XH mode.

Copyright © 2024 Texas Instruments Incorporated

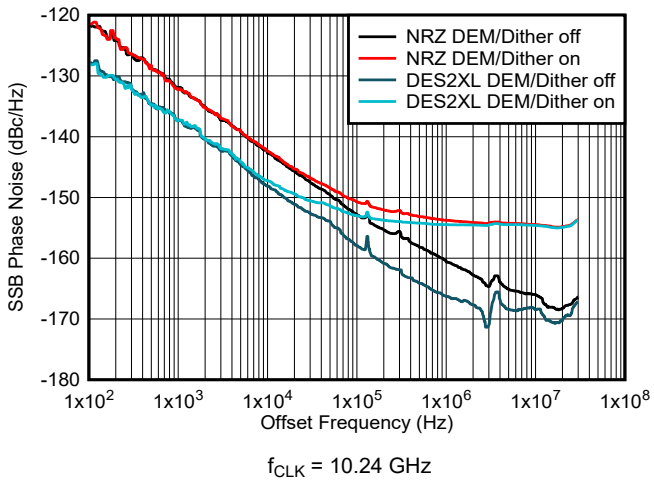


図 8-5. Phase Noise vs Offset Frequency at 1 GHz

There are 3 small disadvantages of DES2XL and DES2XH modes to be aware of:

1. the attenuation of the signal in the transition band of the DES interpolation filter between 0.4*F_{CLK} and 0.6*F_{CLK}
2. An increased latency of 97 clock cycles. or 9.7 ns with a 10 GHz clock, due to the DES interpolation filter
3. An increase in power of 250 mW with a 10 GHz clock, due to the DES interpolation filter

8.1.6 Sleep and Disable Modes

There are several methods to power down or temporarily disable the DAC outputs. To prevent asymmetric aging of the device circuits, in some options a low level output from the DACs is maintained. 表 8-1 lists the options for sleep or disabling the DAC outputs.

The most power is saved in full power down, which is enable by setting the MODE register to 0x3. In this mode a low level output signal is maintained to prevent asymmetric aging. Returning to full operation from full power down takes 100's of microseconds.

One or both DAC outputs can be disabled by setting the corresponding MXMODE register to 0x6. This saves some power and the DAC outputs a low level signal to prevent asymmetric aging. If only one channel is disabled, low level spurs from the disabled channel can feed into the active channel, creating spurs around -80 dBFS.

The TX ENABLE function, either through the TXEN0/1 balls or TX_EN registers, provides a method to quickly disable the DAC output by forcing the digital code to 0 (midscale) (see セクション 6.9 for the TX ENABLE latency). When the QUITE_TX_ENABLE register is 0, a low level signal is still maintained at the output to prevent saturation. When QUITE_TX_ENABLE is 1, if data independent DEM and Dither is enable, this prevents asymmetric aging. If DEM and dither are disabled or DEM is set to data dependent DEM, the DAC can degrade over the lifetime of the device if a significant faction of the lifetime is spent in this mode. The degradation is channel specific, only affecting the channel that is disabled.

表 8-1. DAC Sleep and Output Disable Options

Option	MXMODE	TX_EN	QUIET_TX_DISABLE	DEM	DITHER	Low level output	long term degradation	Power Savings
Device Full Power Down (MODE = 0b11)	-	-	-	-	-	yes	no	Most
DAC disable	6	1	-	-	-	yes	no	Some
TX Enable	any	0	0	-	-	yes	no	Least
TX Enable	0-5	0	1	0,1	0,1	no	no	Least
TX Enable	0-5	0	1	2, 3	3	no	yes	Least

Copyright © 2024 Texas Instruments Incorporated

表 8-1. DAC Sleep and Output Disable Options (続き)

Option	MXMODE	TX_EN	QUIET_TX_DISABLE	DEM	DITHER	Low level output	long term degradation	Power Savings
TX Enable	6	0	1	0,1	0,1	no	no	Least
TX Enable	6	0	1	2,3	3	no	yes	Least

When the DAC is in full power down, the common mode voltage at the DAC output during sleep needs to be maintained below 2-V. For AC coupled outputs, the bias is usually provided by an inductor or a balun center tap to 1.8-V which forces the common mode also to 1.8 V. For DC coupled output, which are typically terminated through a resistor to a voltage above 1.8-V (for example, 2.3 V), sufficient DAC output current must be provided to reduce the common mode voltage to less than 2-V. This is achieved by programming DACx_CBIAS_SLEEP (Address 0x724 bits 7:4 for DACA and Address 0x726 bits 7:4 for DACB) according to the following equation:

$$DAC_CBIAS_SLEEP = ceil\left(\frac{2 \cdot \frac{V_{BIAS} - V_{OUT_CM_SLEEP}}{R_{TERM}} - 7.36mA}{1.47mA}\right) \quad (4)$$

where:

- V_{OUT_SLEEP} is the DAC output common mode in sleep (≤ 2V)
- V_{BIAS} is the external DC bias
- R_{TERM} is the external bias resistor/termination to V_{BIAS}
- *ceil* is the ceiling operator (integer round up)

8.2 Typical Application

8.2.1 Design Requirements

S-band covers a frequency range of 2 GHz to 4 GHz. For this example, use a radar with signal bandwidth of 200 MHz and a center frequency of 3.2 GHz.

Doppler radars use the frequency shift in the returned signal to measure the velocity of object. Large reflected signals from for example ground clutter mix with the TX and RX phase noise, which can potentially swamp the return signal from a small moving object. This places a requirement on close in phase noise for the close in phase noise of the radar chirp.

Radars are also sensitive to spurious signals, and for this example we assume 90 dBFS is required for the inband SFDR.

8.2.2 Detailed Transmitter Design Procedure

A summary of the design parameters are listed in 表 8-2. A input sample rate of 250 MSPS complex covers the 200 MHz signal bandwidth, and interpolation by 32x is used to increase the TX sample rate to 8 GSPS. The device's numerically controlled oscillator (NCO) is used to place the signal at the TX output at 3.2 GHz. An addition 2x interpolation is applied in DES2XL mode, increasing the sample rate to 16 GSPS.

The suppression of the image at 4.7 - 4.9 GHz in DES2XL mode would be limited by the 2x DES interpolator to 40 dB.

To optimize the low offset frequency phase noise, DEM and dither are disabled.

The JESD204C interface is configured in JMODE 5 with 4 streams (2 IQ pairs) and 1 Serdes lane per IQ pair. With 64/66 bit encoding, the Serdes baud rate is 8.25 Gbps.

表 8-2. Design Parameters for an S-band Transmitter

Parameter	Value
Input Clock	8 GHz
DAC Sample Rate	16 GSPS
Output Mode	DES2XL

Copyright © 2024 Texas Instruments Incorporated

表 8-2. Design Parameters for an S-band Transmitter (続き)

Parameter	Value
DEM and Dither Settings	Off
TX Interpolation Factor	32x
TX Input Rate	250 MSPS Complex
NCO frequency	3.2 GHz
JMODE	5
# Streams	4 (2x IQ pairs, 1/DAC)
# Serdes Lanes	2
Encoding	64/66
Serdes Baud Rate	8.25 Gbps

8.2.2.1 Detailed Clocking Subsystem Design Procedure

One of the major advantages of the DAC39RF12 および RFS12 in applications like Doppler radar, Quantum Computing and Wireless Test is the ability to directly synthesize very low phase noise signals all the way through X-band (12 GHz). To take full advantage of the exceptionally low additive phase noise of the DAC, a very high-performance clock is required.

Equally important in most systems is the impact of Size, Weight, Area, Power and Cost (SWAP-C). This means each system architect must weight tradeoffs in performance vs. overall system SWAP-C based on system requirements. In this section we present three clocking examples based on SWAP-C vs. performance tradeoffs.

図 8-6 below shows a plot of phase noise for an 8 GHz sample clock produced by an integrated PLL+VCO, integrated PLL with external high performance VCO and a fully discrete high performance analog PLL. All examples assume a reference clock is provided as an input to the synthesizer, which can range from low cost surface mount crystal oscillators all the way to very expense reference subsystems. The DAC39RF12 および RFS12 additive phase noise at 8 GHz is also provided for comparison - even for the analog PLL, the clock phase noise degrades the DAC39RF12 および RFS12 output phase noise for offset frequencies below 5 MHz.

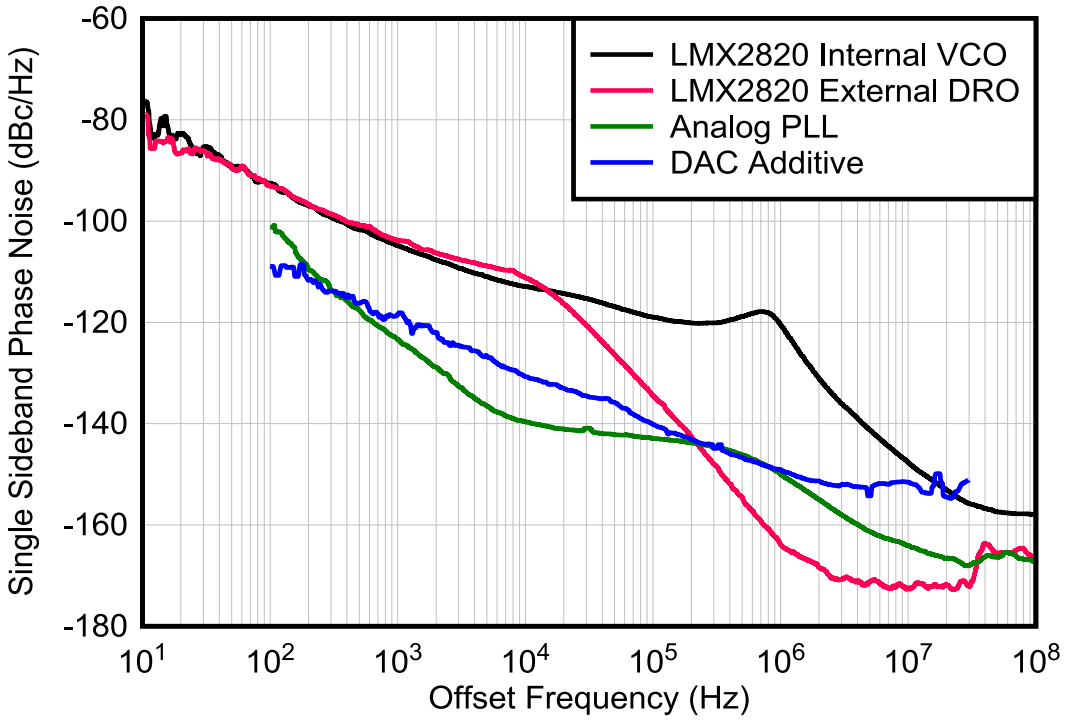


図 8-6. Phase Noise of DAC Clock Examples with the Device Additive Phase Noise

Copyright © 2024 Texas Instruments Incorporated

8.2.2.1.1 Example 1: SWAP-C Optimized

The best SWAP-C sub-system leverages the high levels of integration offered by modern PLL+VCO devices, such as the LMX2820. 図 8-7 shows a block diagram of the clocking sub-system. An external reference clock feeds the LMX2820 input, which is then used to lock the internal PLL+VCO before being fed to the output buffers. Only external passives are required to construct the loop filter and complete the sub-system system.

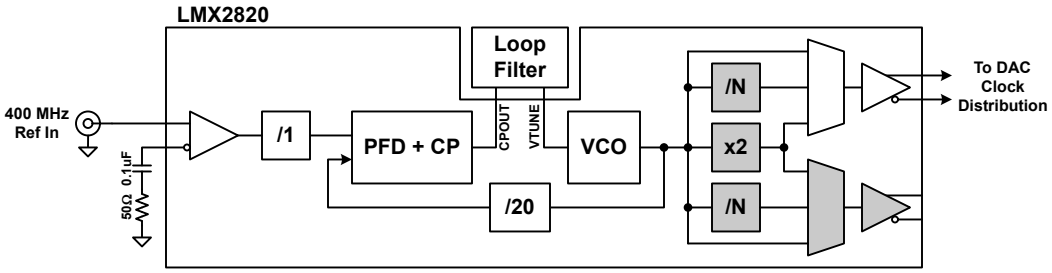


図 8-7. LMX2820 with Internal VCO

The LMX2820 is a flexible device and configuration can be overwhelming, for example deciding how to decipher configure dividers, set loop filter components, etc. A few high-level guidelines can be taken into consideration to optimize phase noise.

First,always operate the LMX2820 in integer mode when possible (as opposed to fractional mode). This implies that relationship between reference clock and output clock follows the general form:

$$F_{OUT} = (F_{REF}/N_{REF}) \times N_{DIV}/N_{OUT} \quad (5)$$

where N_{REF}, N_{DIV} and N_{OUT} are the reference, feedback and output dividers respectively. F_{REF} is the input reference frequency and F_{OUT} is the output frequency used as the DAC clock. If this ratio cannot be found, then fractional mode must be used at the expense of degraded overall phase noise.

Second, the best in-band phase noise is achieved when the phase detector frequency is maximized and the feedback divider is minimized. The LMX2820 has a maximum phase detector frequency of 400 MHz and an optional reference doubler is available for reference inputs up to 200 MHz. For the same output frequency, each doubling of phase detector frequency (while halving the feedback divider) results in 3 dB of in band phase noise reduction.

For an 8 GHz output, use the maximum phase detector frequency of 400 MHz. Set N_{REF} = 1, N_{DIV} = 20, and N_{OUT} = 1 (divider bypass). For a slight degradation in in-band noise, the input can be set to 200 MHz and the reference doubler is used.

Third, note that any noise on the reference input impacts close in phase noise before the in-band noise begins to dominate. In-band noise is a combination of PLL noise (phase detector, charge pump and dividers) and VCO noise, while wideband noise is limited by the noise floor of the output buffers. Close in noise is limited by the device flicker, which is independent of phase detector frequency and scales 20 x LOG_{base10} with output frequency.

Finally, when operating the LMX2820 above 11 GHz, the integrated output doubler must be used and this results in a sub-harmonic (that is, output frequency divided by 2) that possibly requires external filtering using either a high-pass or bandpass filter (depending on system requirements). Following the LMX2820 output with a narrow bandpass filter can also be used to suppress wideband noise.

The PLLatinumSim software is available from TI to design the external loop filter passive values.

8.2.2.1.2 Example 2: Improved Phase Noise LMX2820 with External VCO

An external VCO can significantly improve in-band and wideband noise, with best phase noise typically being achieved with narrow band VCOs such as Voltage Controlled Crystal Oscillators (VCXO), Voltage Controlled Surface Acoustic Wave Oscillators (VCSO) and Dielectric Resonance Oscillators (DRO). For this design, a

Copyright © 2024 Texas Instruments Incorporated

Synergy Microwave 8 GHz DRO (SDRO800-8), is used for the wideband noise (-170 dBc/Hz) and low flicker noise corner (-160 dBc/Hz at 1 MHz). DROs are typically available from about 5 to over 25 GHz.

図 8-8 shows a block diagram of the synthesizer. An external active loop filter is used to improve noise performance and extend the tuning voltage range required for the DRO (0 to 10 V). The DROs output is split, with one output feeding back into the LMX2820 and the other being sent to the DAC clock distribution network.

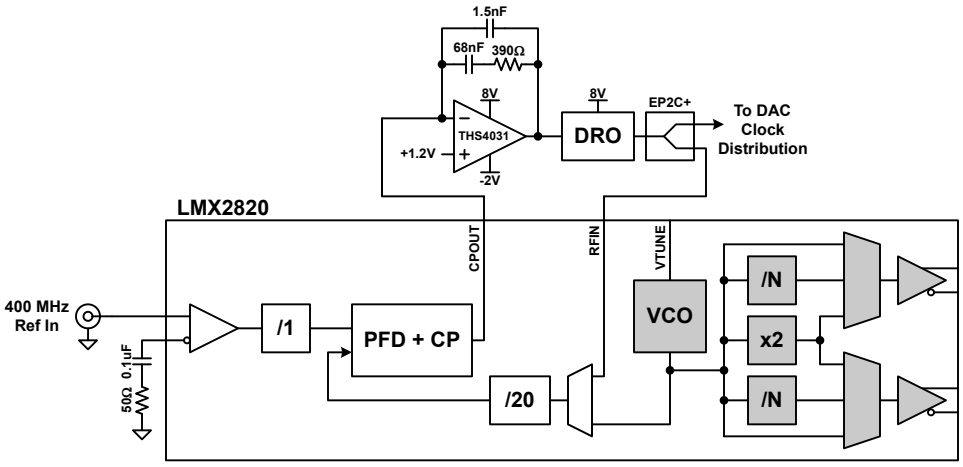


図 8-8. External LMX2820 with an External VCO

In this implementation, the loop bandwidth was set to around 24 kHz, where the flicker noise of the PLL intersects the open loop noise of the DRO. This offers the best overall integrated phase noise. The noise floor is improved by about 10 dB from the fully integrated example since the output buffers were not used and the DRO has exceptional broadband noise of around -170 dBc/Hz.

As with the integrated VCO, the loop filter components can be designed using PLLatinumSim software.

8.2.2.1.3 Example 3: Discrete Analog PLL for Best DAC Performance

When phase noise performance is paramount, a discrete analog PLL (APLL) offers substantially lower phase noise than the integrated examples. The trade off is increased SWAP-C. 図 8-9 shows the block diagram of such an implementation that uses the same Synergy Microwave 8 GHz DRO as the LMX2820 external VCO example discussed previously.

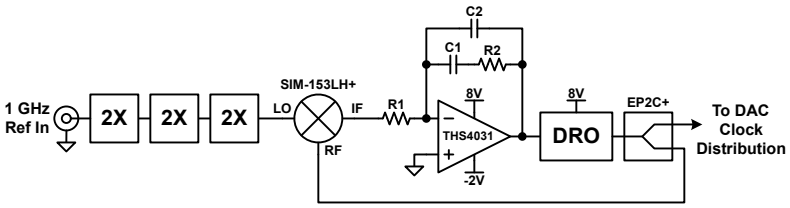


図 8-9. Discrete Analog PLL

The APLL outperforms the previous examples by avoiding use of digital dividers and phase detectors, which significantly degrade phase noise. Instead passive diode-based frequency multipliers and mixers are used, which contribute little additive phase noise. Like all synthesizers, a frequency reference with very good close in phase noise, below the loop bandwidth of the APLL, is required for best performance.

In this case, a 1 GHz reference was chosen as the reference is a convenient division of the sample rate and is available either as an output of an R&S SMA100B RF signal generator or as a standalone unit from Wenzel Associates.

Copyright © 2024 Texas Instruments Incorporated

As mentioned previously, the APLL does not use digital dividers or phase detectors, which significantly degrade phase noise. Instead the reference is multiplied up to the output frequency using passive multiplier stages (see 図 8-10). A passive mixer is used as a phase detector that feeds a low noise operational amplifier loop filter. The DRO output is split with one output going to the DAC clock distribution network and the other feeding back into the RF port of the mixer.

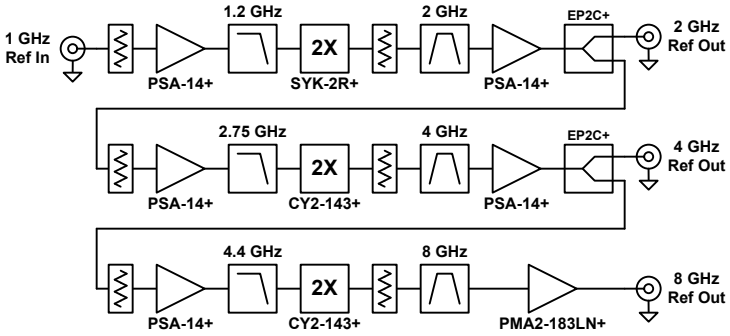


図 8-10. Reference Multiplier Chain

The multiplier chain uses low noise amplifiers, passive diode multipliers and bandpass filters. For this part of the circuit, what is most critical is the close in phase noise below the loop bandwidth of the PLL. Not all amplifiers demonstrate good close in noise, especially when driven near or into compression. Generally, heterojunction bipolar transistor (HBT) amplifiers, have low flicker noise and operate well when driven into compression.

Bandpass filters were selected to remove the F_{IN} and 3 x $F_{IN}/2$ harmonics that are only partially suppressed by the multipliers. In some implementations the driving amplifier can be filtered to prevent degradation of the harmonic suppression performance. This chain was experimentally optimized, but additional attenuation between stages can be added to manage reflections and amplifier operating conditions.

The loop filter bandwidth is set near where the open loop DRO phase noise crosses the multiplied reference noise with a damping factor set to give a smooth role off that minimizes integrated phase noise. An optional additional feedback cap can be used to speed up the role off if desired (C2 is set roughly to 1/10th to 1/100th of C1). The loop filter component values were determined experimentally for this design.

In some implementations a start-up circuit is needed to help the loop acquire lock. In practice we found that the initial power up was all that was needed to get the loop enough of a kick to get the loop to pull in and lock.

8.2.2.1.4 12 GHz Clock Generation

For higher sample rates several options are available. First, a DRO can be selected that operates directly at the desired frequency and the multiplier chain and or reference frequency can be modified accordingly.

An alternative is to use dividers and mixers to translate the APLL output to a new higher frequency. 図 8-11 shows an example for a 12 GHz clock synthesizer. This uses the same reference multiplier chain and APLL as described above and adds a mixing stage to translate the DAC clock from 8 to 12 GHz.

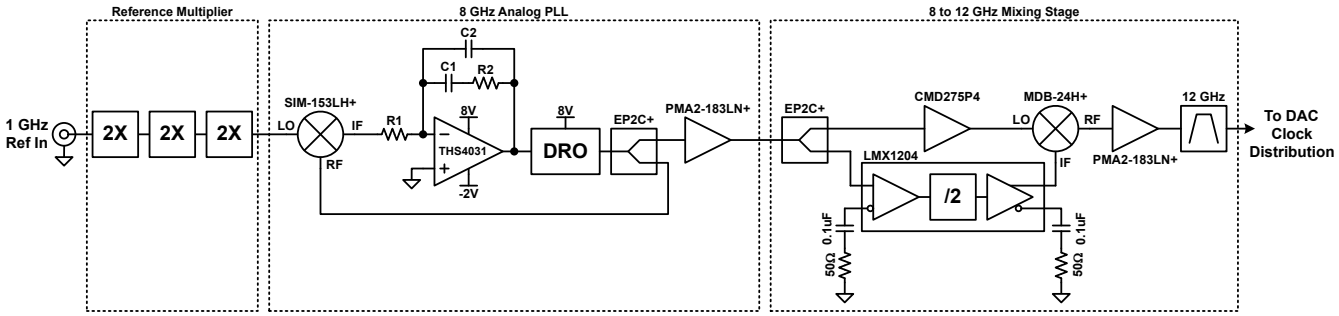


図 8-11. 12 GHz Clock Synthesizer

Copyright © 2024 Texas Instruments Incorporated

The LMX1204 can operate as a buffer, multiplier or divider. In this case the LMX1204 is used to divide the 8 GHz APLL output by 2, which is then mixed with the input to translate the clock to 12 GHz. A bandpass filter is required after mixing to remove the LO feedthrough and undesirable mixing products. 図 8-12 shows the input 8 GHz scaled to 12 GHz and resulting 12 GHz after mixing.

As with the reference multiplier chain, special care must be taken selecting the components and operating points for best phase noise. A slight improvement in noise floor was found by power combining two the of the LMX1204 outputs before feeding the IF input of the mixer.

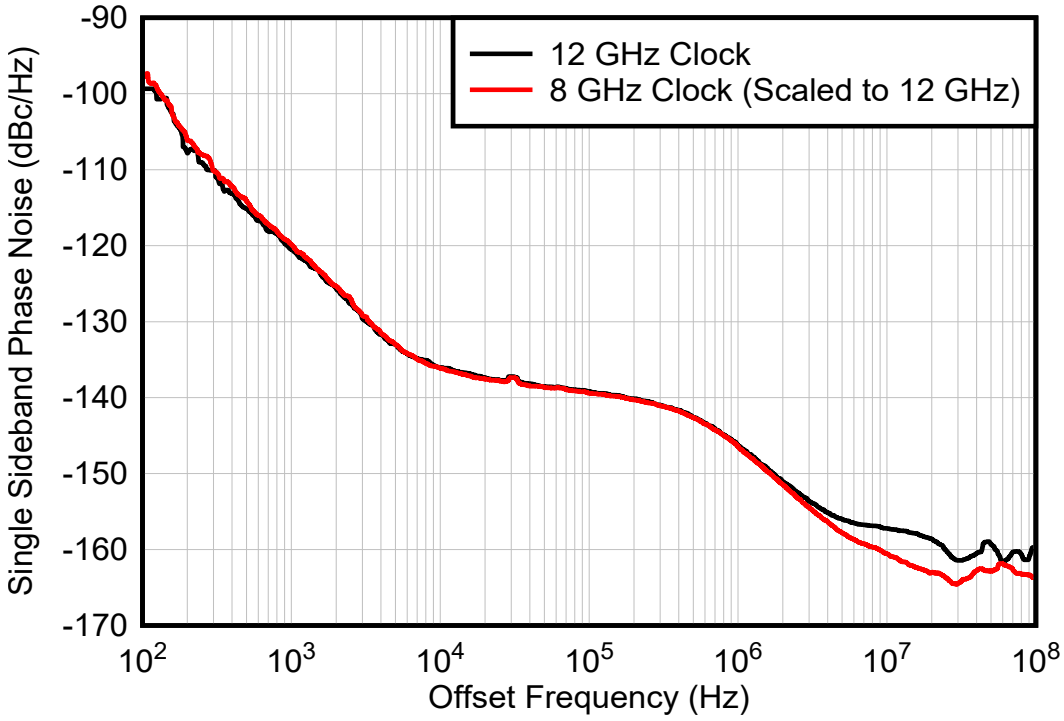


図 8-12. 8 GHz and 12 GHz Clock Phase Noise

8.2.3 Application Curves

The radar chip waveform used for testing is a non-linear frequency modulated (NLFM) pulse, lasting 4096 samples at the 250 MSPS complex input rate. At baseband the frequency ramps from -100 MHz to + 100MHz, following a frequency ramp curve developed by Price and shown in 式 6 [Price R. *Chebyshev Low Pulse Compression Sidelobes via a Nonlinear FM.* National Radio Science Meeting of URSI; PortSaid, Egypt: 1979.] with T = 4096 samples, B = 0.8, B_l = 0.5611 and B_c = 0.238.

$$f(f, B_l, B_c) = B \times \frac{t - T/2}{T} \times \left(B_l + \frac{B_c}{\sqrt{1 - 4\left(t - T/2\right)^2 / T^2}} \right) \quad (6)$$

The NLFM Chirp frequency ramp is shown in 図 8-13, complex time domain baseband waveform in 図 8-14, baseband frequency spectrum in 図 8-15 and auto-correlation in 図 8-16.

Copyright © 2024 Texas Instruments Incorporated

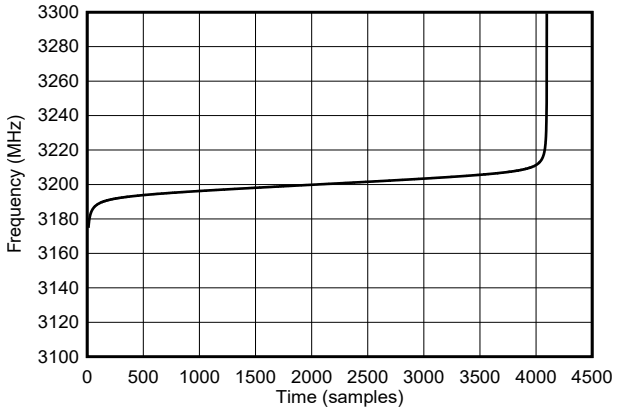


図 8-13. NLFM Frequency Ramp

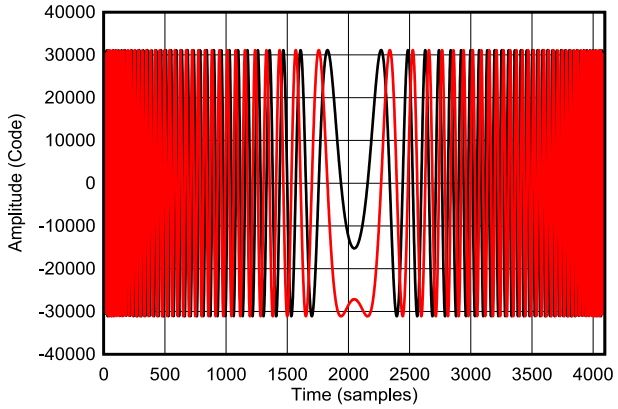


図 8-14. Complex Time Domain of NLFM Chirp (Red = real, Black = imag)

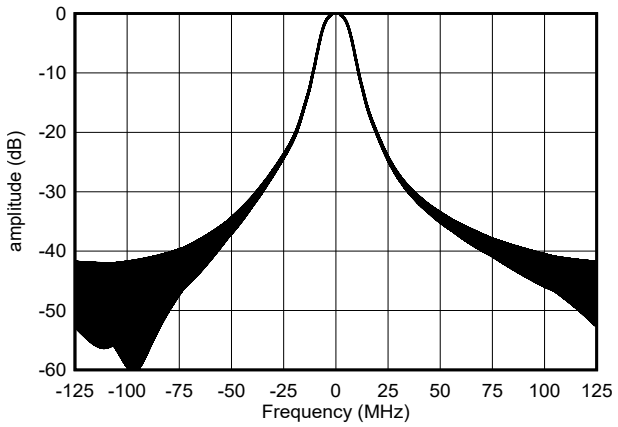


図 8-15. Digital Spectrum for NLFM Chirp

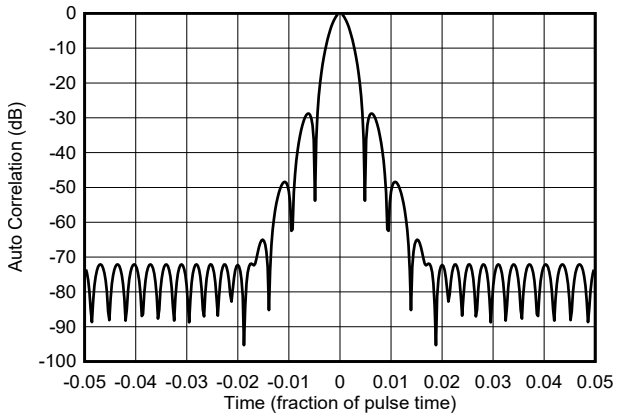


図 8-16. Auto-correlation of NLFM Chirp

The output spectra for the NLFM Chirp at 3.2 GHz is shown in 図 8-17. The largest spur is the duty-cycle image at 4.8 GHz, which is suppressed 50 dB. 図 8-18 shows a 1 GHz span centered at 3.2 GHz. the interpolation filters confine the output spectrum to a 250 MHz wide band at 3.2 GHz. The spectra purity of the 200 MHz is shown with a fullscale tone in 図 8-19. The largest spurs are ~ 80 dBc at 3.16 GHz, which is the 4th harmonic (aliased back into 1st Nyquist zone), and the 6th harmonic at ~ 86 dBc.

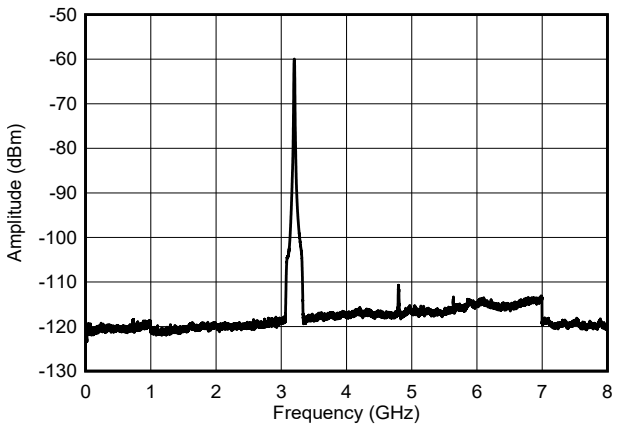


図 8-17. NLFM Chirp Output Spectra across 0 - 8 GHz

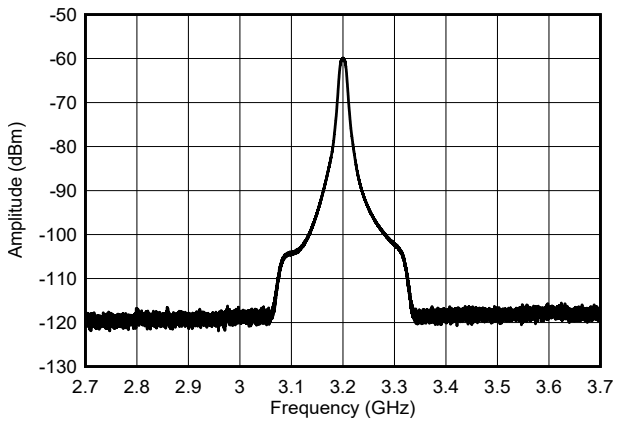


図 8-18. NLFM Chirp Output Spectra across 1 GHz

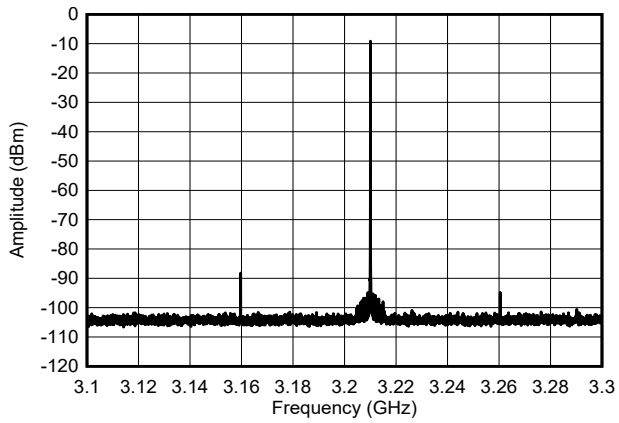


図 8-19. In Band Single Tone Frequency Spectra with f_{OUT} = 3.211 GHz

The output phase noise for a tone at 3.2 GHz using the recommended clocking circuit is shown in 図 8-20. The additive phase noise for the DAC by itself is shown in 図 8-21.

図 8-20. Output Phase Noise at 3.2 GHz using Recommended Clock Circuit

図 8-21. DAC Additive Phase Noise at 3.2 GHz

8.3 Power Supply Recommendations

The device has three supply voltages and requires seven supply domains to achieve data sheet performance as shown in 表 8-3:

表 8-3. Recommended Power Supply Domains

Voltage	Supply Domain	Device Supplies
+1.8V	VDDA	VDDA18A, VDDA18B
	VDDIO	VDDIO
	VDDCSR	VDDCLK, VDDSYS, VDDR
+1.0V	VDDL	VDDLA, VDDLB
	VDCCCLK	VDDCLK10
	DVDD	VDDDIG, VDDT, VDDDEA & VDDDEB
-1.8V	VEEx	VEEAM18, VEEBM18

The recommended power supply is shown in 図 8-22. The power-supply voltages must be low in noise and provide the needed current to achieve rated device performance. A step down high-efficiency switching converter is used first, followed by a second stage of regulation using LDOs to provide switching noise reduction and improved voltage accuracy. The user can also refer to the TI WEBENCH® Power Designer which can be used to select and design the individual power supply elements as needed. The recommended switching regulators are:

- TPSM82913 = +2.3 V for the VDDA, VDDIO, VDDCSR, VDDL and VDCCCLK domains
- TPS543620 = +1 V for DVDD
- TPSM82913 = +3.8 V for VEEx domain

and recommended LDOs include:

- TPS7A9401 for +1.8 V and +1 V
- LM27762 for -1.8 V

Copyright © 2024 Texas Instruments Incorporated

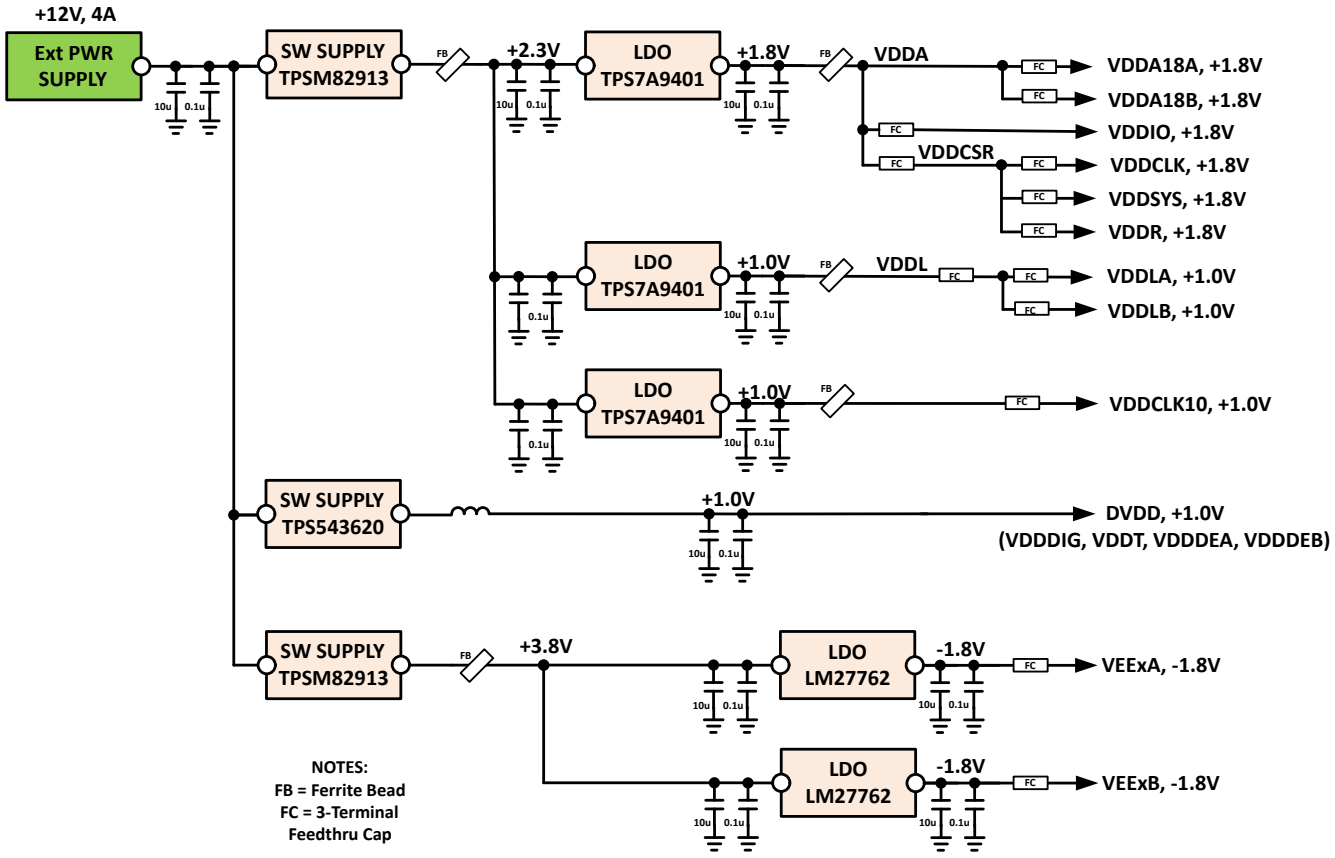


図 8-22. Recommended Power Supply Block Diagram

The VDDA supply is regulated by an LDO, or low-noise drop-out linear regulator, with a +1.8 V output and is further broken down into the following subgroup power domains:

- VDDA: VDDA18A, VDDA18B
- VDDIO
- VDDCSR: VDDCLK, VDDSYS, VDDR

Each device supply can be tied to a single LDO but are isolated with a ferrite bead and/or three-terminal capacitor or similar.

The VDDL supply is +1 V and is further broken down into VDDLA and VDDLB. Each device supply can be tied to a single LDO but are isolated with a ferrite bead and/or three-terminal capacitor or similar.

The VDDCLK10 supply is +1 V and is the most sensitive for achieving the best phase noise performance. VDDCLK10 should be isolated to a LDO by itself to prevent noise from other 1.0V supplies coupling into the clock path.

The DVDD supply is +1.0V and can be directly connected to a switching power supply. The DVDD encompasses the following device supplies, VDDDIG, VDDT, VDDDEA & VDDDEB, which can all be connected together. No further isolation with a ferrite bead and/or three-terminal capacitor or similar is required.

The VEEx supply is -1.8 V derived from a single LDO and is further broken down into VEEAM18 and VEEBM18, which are isolated with a ferrite bead and/or three-terminal capacitor or similar.

It is also highly recommended to follow these important power supply design considerations:

1. Decouple all power supply rails and bus voltages as they come onto the system board. Further place additional decoupling at or near the DAC itself for each power domain. Typically, one decoupling capacitor per power supply pin is suffice unless specified in the data sheet or EVM assembly.

Copyright © 2024 Texas Instruments Incorporated

2. Remember that approximately 20 dB/decade noise suppression is gained for each additional filtering stage.
3. Decouple for both high and low frequencies, which might require multiple capacitor values.
4. Series ferrite beads and feed through capacitors are commonly used at the power plain entry point and can be used for addition power domain isolation. This should be done for each individual supply voltage on the system board whether it comes from an LDO or a switching regulator.
5. For added capacitance, use tightly stacked power and ground plane pairs (≤4 mil spacing) this adds inherent high-frequency (>500 MHz) decoupling to the PCB design.
6. Keep supplies away from sensitive analog circuitry such as the front-end RF stage of the DAC and high-speed clocking and digital circuits if possible.
7. Keep power domains that demand higher currents, near the top of the stack-up or layer that has power plain entry point. This minimizes the overall loop inductance.
8. Any open or voided areas on power plane, fill with ground to provide additional isolation and shielding.
9. Keep a 20 to 25 mil gap between all adjacent power and/or ground plane fills. This helps eliminate all gap coupling between adjacent power domains and/or grounds within the same layer.
10. Some switcher regulator circuitry/components could be located on the opposite side of the PCB for added isolation.
11. Follow the IC manufacture recommendations; if they are not directly stated in an application note or data sheet, then study the evaluation board. These are great vehicles to learn from. Applying these points above can help provide a solid power supply design yielding data sheet performance in many applications.

Each application has different tolerances for noise on the supply voltage, so understanding these trades is best described in the following two application notes for more details:

- Clutter-free power supplies for RF converters in radar applications (Part 1)
- Clutter-free power supplies for RF converters in radar applications (Part 2)

Also refer to 図 8-30 through 図 8-33 to illustrate the one power supply layout and stack-up approach.

8.3.1 Power Up and Down Sequence

At power up, ramp up the power supplies in the following order:

1. Ramp 1.8V supplies, including the bias voltage for DACOUTA+/- and DACOUTB+/-
2. Ramp -1.8V supplies
3. Ramp 1.0V supplies

Use the reverse order for rampdown.

1. Ramp down 1.0V supplies
2. Ramp down -1.8V supplies
3. Ramp down 1.8V supplies, including the bias voltage for DACOUTA+/- and DACOUTB+/-

Copyright © 2024 Texas Instruments Incorporated

8.4 Layout

8.4.1 Layout Guidelines and Example

There are many critical signal connections that require specific care and attention during PC board design:

1. DAC analog output signals
2. Sampling clock
3. Serdes (JESD204x) data inputs
4. Power supplies
5. Power and grounding strategy

There are many considerations to take note of when developing a high-speed PCB design. Here are a few recommendations and example figures to follow for any high-speed PCB design:

1. Route using loosely coupled 100-Ω differential traces when possible on the Serdes inputs. This routing minimizes impact of corners and length-matching serpentines on pair impedance.
2. Provide adequate pair-to-pair spacing to minimize crosstalk, especially with loosely coupled differential traces. Tightly coupled differential traces can be used to reduce self-radiated noise or to improve neighboring trace noise immunity when adequate spacing cannot be provided.
3. Provide adequate ground plane pour spacing to minimize coupling with the high-speed traces. Any ground plane pour must have sufficient via connections to the main ground plane of the board. Do not use floating or poorly connected ground pours.
4. Use smoothly radiused corners and avoid 45- or 90-degree bends to reduce impedance mismatches on all high-speed inputs/outputs for both analog and digital signal traces. See 図 8-23 as an example.

Copyright © 2024 Texas Instruments Incorporated

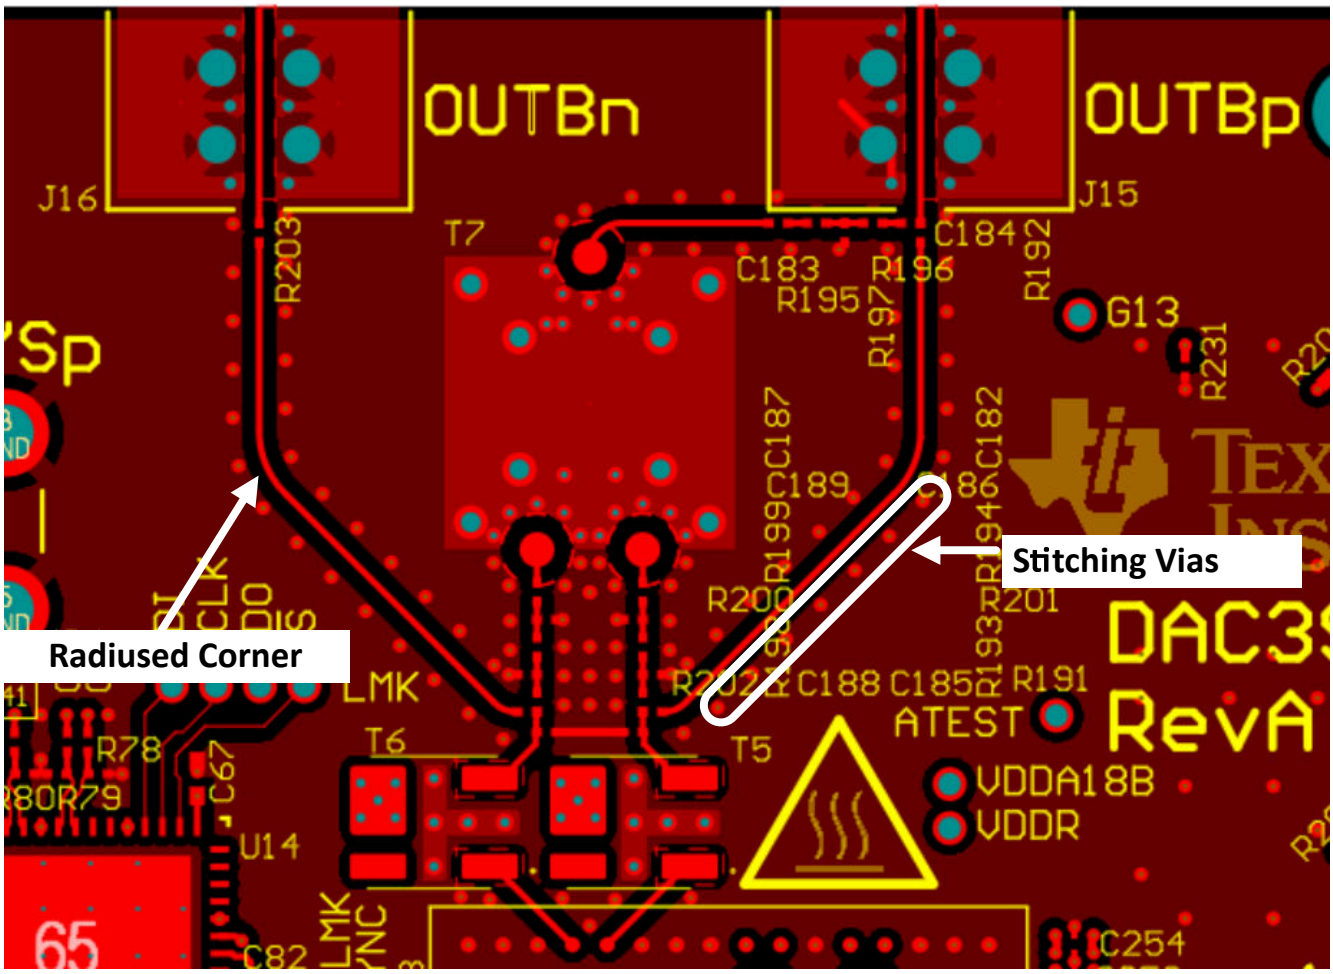


図 8-23. Radius Corner and Stitch Vias next to High_Speed Signal Trace

5. Incorporate any ground plane cutouts necessary at component landing pads, ie – SMA connectors, baluns, etc., to avoid impedance discontinuities at these locations. Cut-outs below these landing pads on one or multiple ground planes to achieve a pad size or stackup height that achieves the needed 50-Ω, single-ended impedance. See 図 8-24 and 図 8-25 as an examples.

Copyright © 2024 Texas Instruments Incorporated

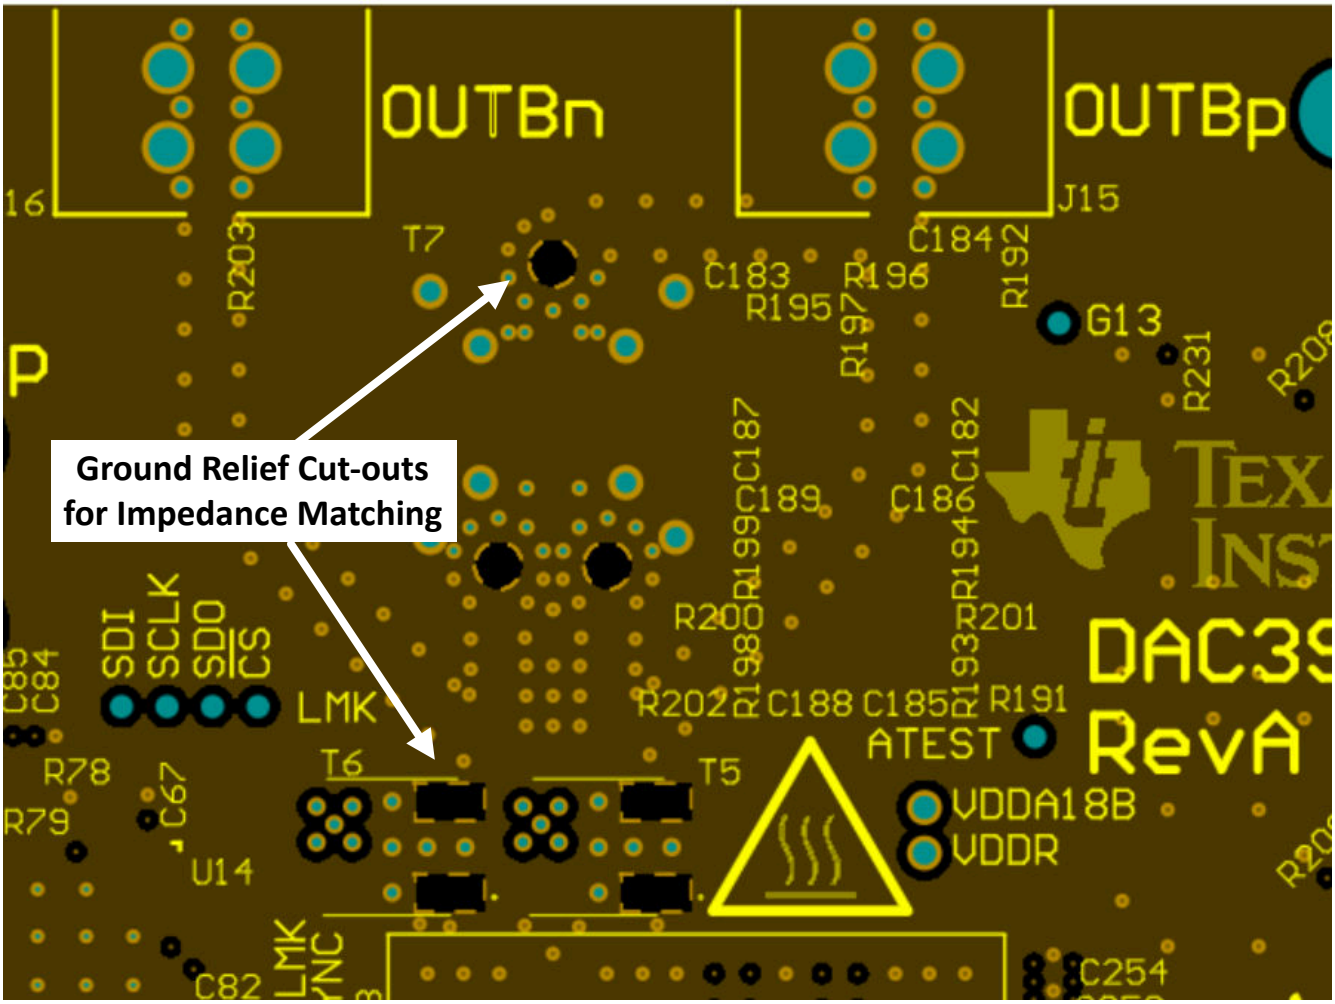


図 8-24. Ground Cut-outs below Balun and Bias-T Pins

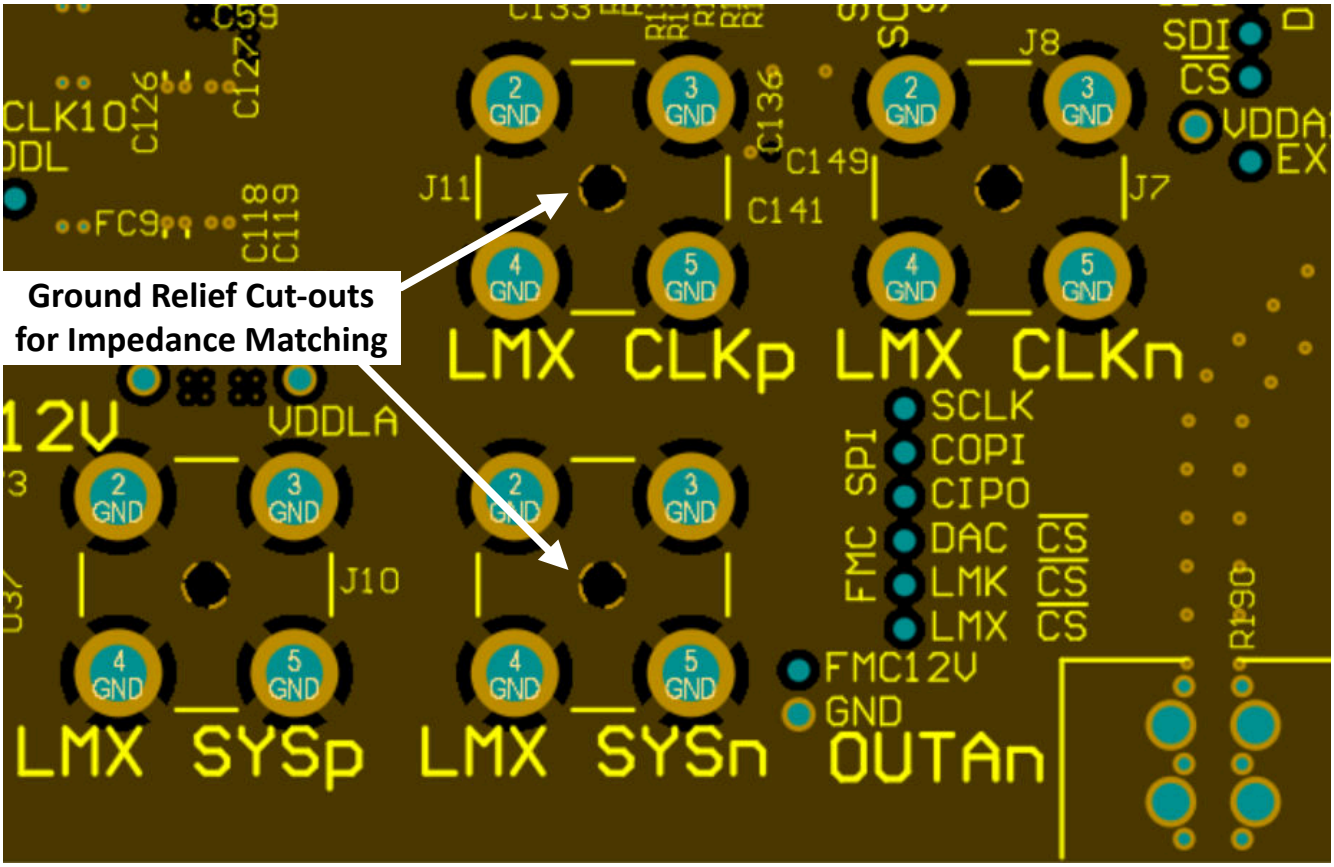


図 8-25. Ground Cut-out Below SMA Connector Center Pin

6. Avoid routing traces near irregularities in the reference ground planes. Irregularities include cuts in the ground plane or ground plane clearances associated with power and signal vias and through-hole component leads.
7. Provide symmetrically located ground tie stitching vias adjacent to any high-speed signal at an appropriate spacing as determined by the maximum frequency the trace transports (λ/4). See 図 8-23 as an example.
8. When high-speed signals must transition to another layer using vias, transition as far through the board as possible (top to bottom is best case) to minimize via stubs on top or bottom of the vias. If layer selection is not flexible, use back-drilled or buried, blind vias to eliminate stubs. Always place two ground vias (“return vias”) close to critical high-speed signal trace via when transitioning between layers to provide a nearby ground return path. See 図 8-26 and 図 8-27 as examples.

Copyright © 2024 Texas Instruments Incorporated

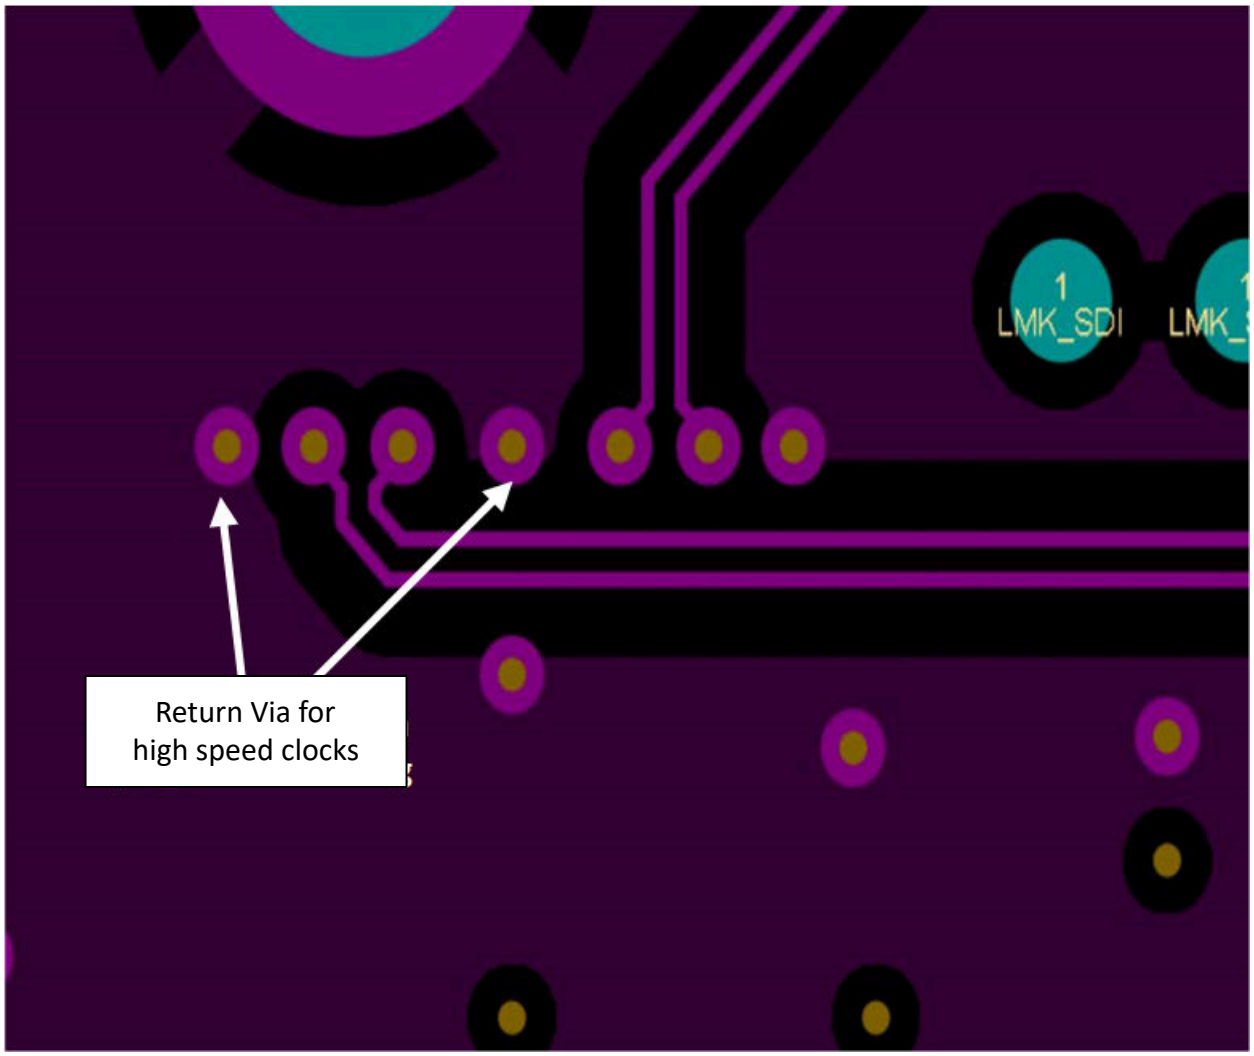


図 8-26. Return Vias for High Speed Clock

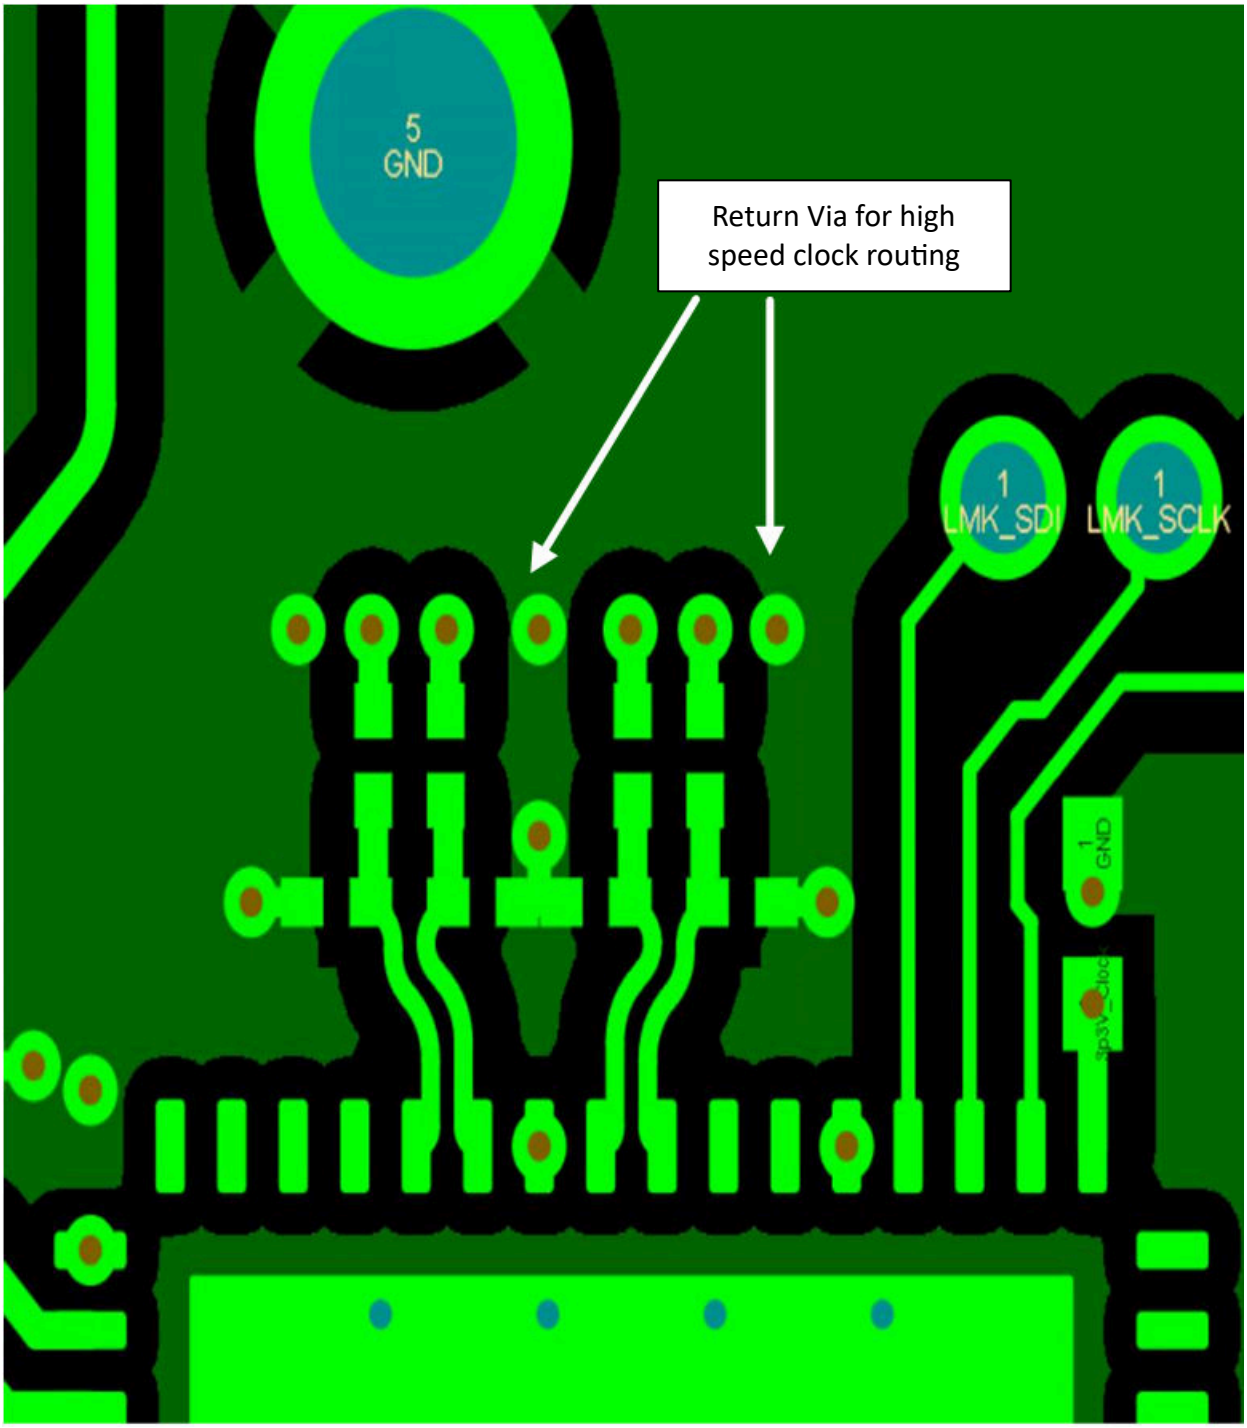


図 8-27. Return Vias for High Speed Clock Near Clock Generator

9. Pay particular attention to potential coupling between JESD204x data input routing and the analog output routing. Switching noise from the JESD204x inputs can couple into the analog output traces and show up as wideband noise due to the high bandwidth of the DAC. Route the Serdes JESD204x data inputs on a separate layer, if possible, from the DAC output traces to avoid noise coupling, see 図 8-28 and 図 8-29 as examples.

Copyright © 2024 Texas Instruments Incorporated

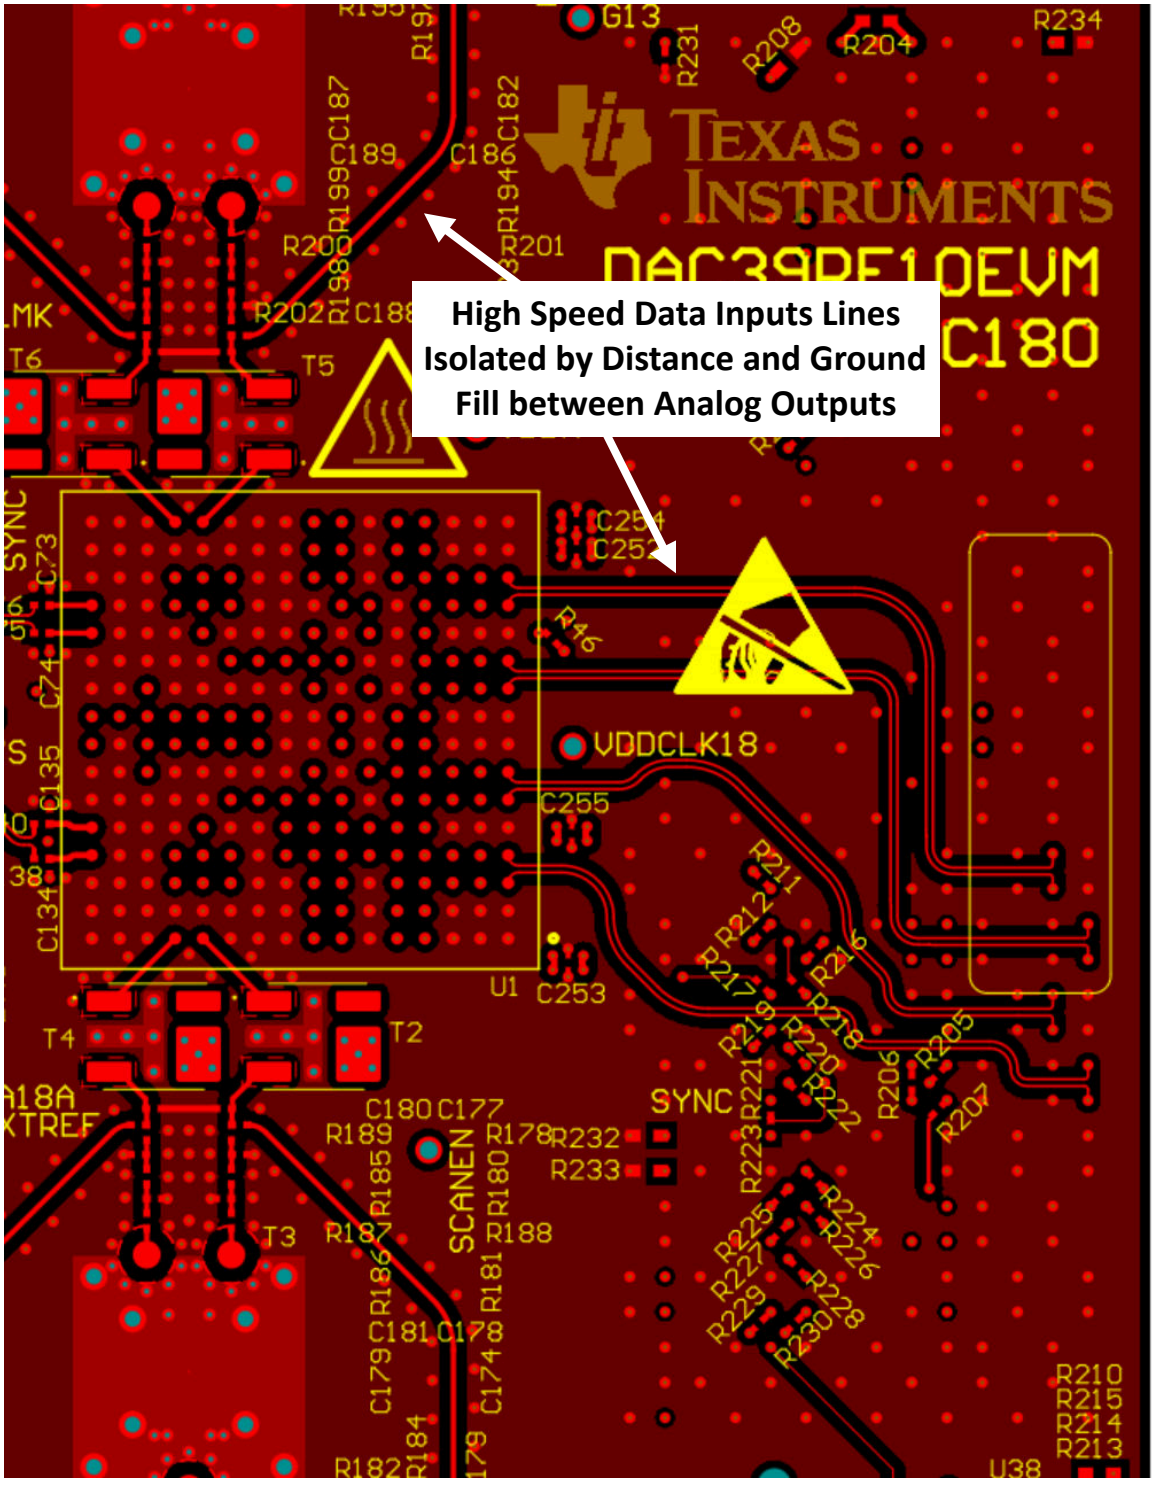


図 8-28. Serdes Top Layer Routing with Ground Fill Isolation

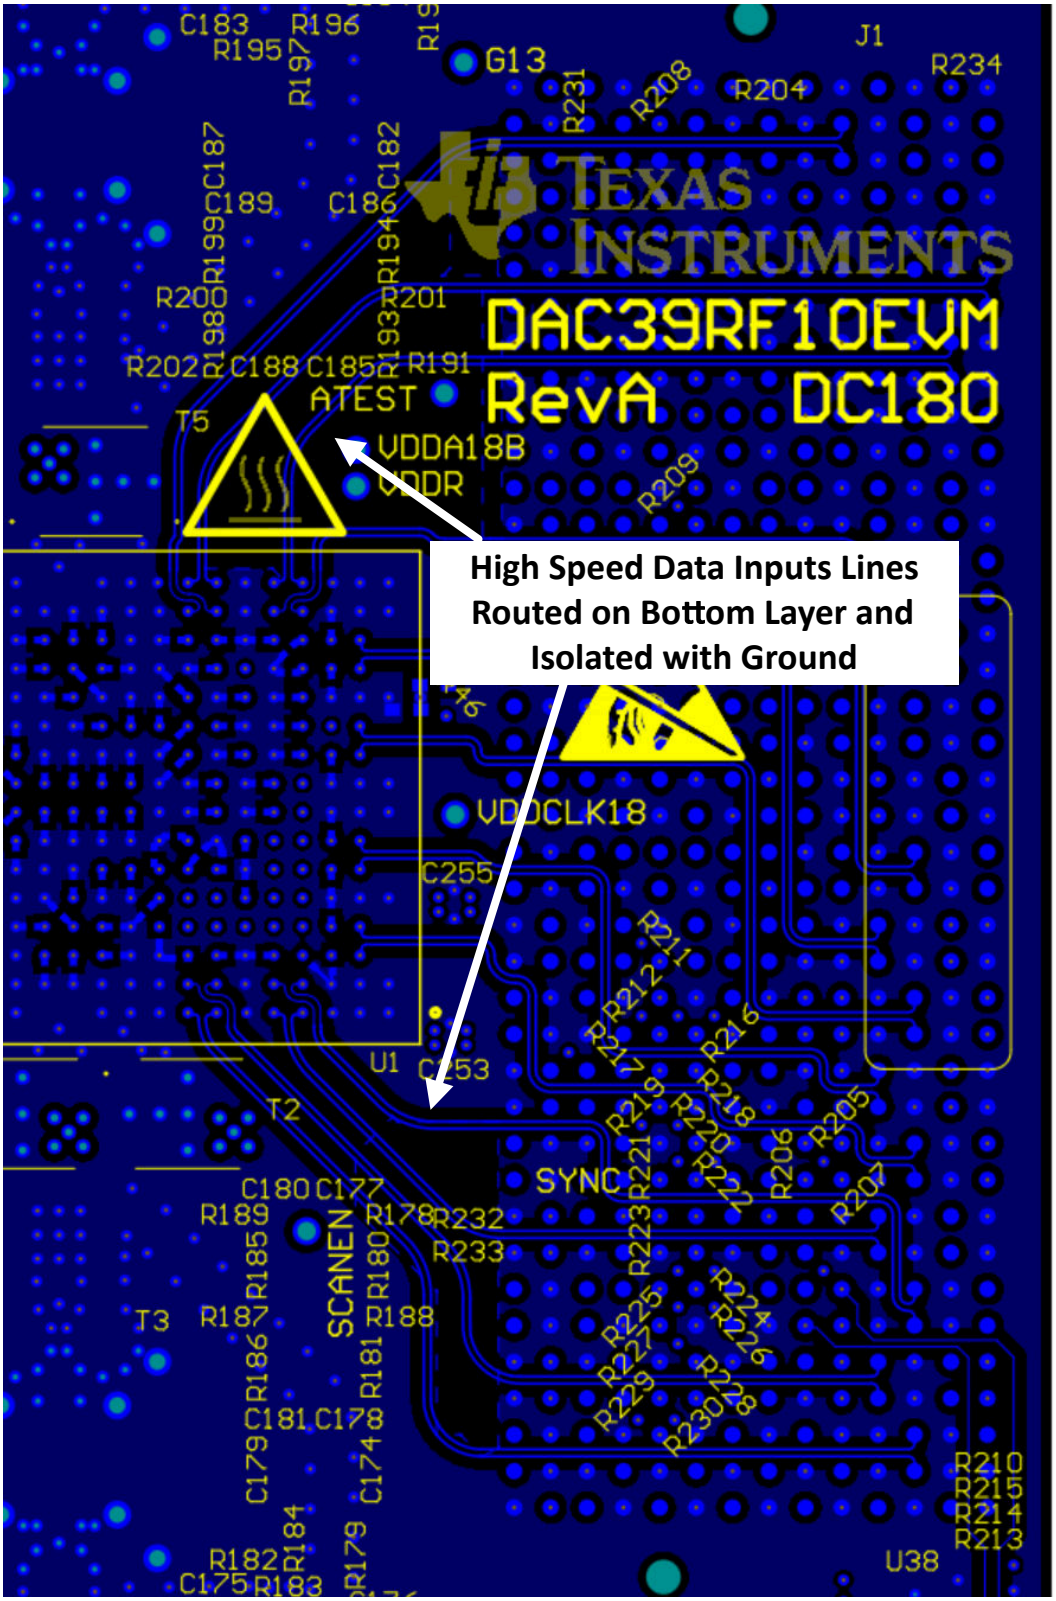



図 8-29. Serdes Bottom Layer Routing with Ground Isolation

10. A reduction in the clock amplitude can degrade the DAC noise performance, so make sure the clock signal has adequate drive strength, especially for high frequencies. To help avoid this, keep the clock source close to the DAC if using a passive balun to drive or interface with the sampling clock pins of the converter. If trace

Copyright © 2024 Texas Instruments Incorporated


routes are longer than a few inches, impedance matching at the DAC's sampling clock input pins can be necessary.

Examples of the power plane design is show in 図 8-30 through 図 8-33.

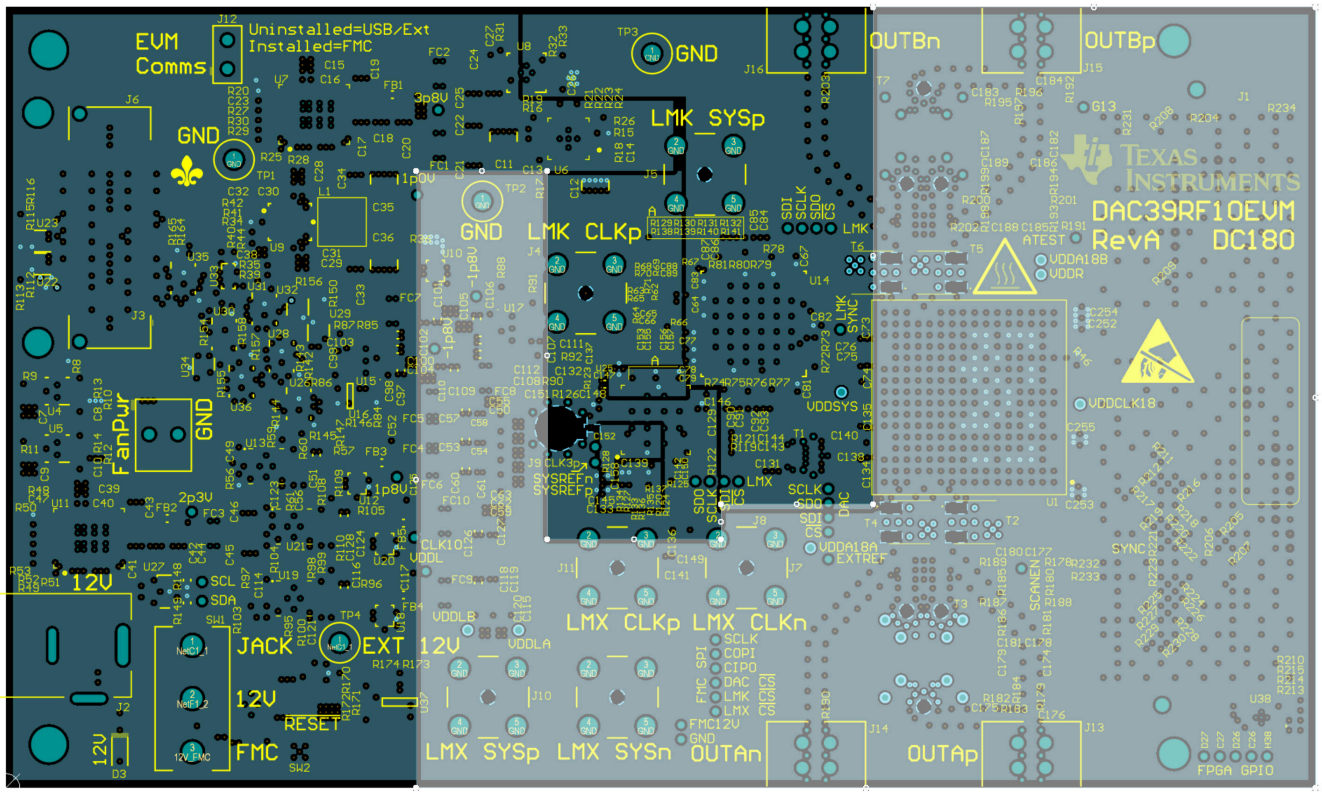

Layer3 / PWR1
DAC DVDD = WHITE
Other PWR Planes = AUX Supplies


図 8-30. Power Plane Layout for Layer 3

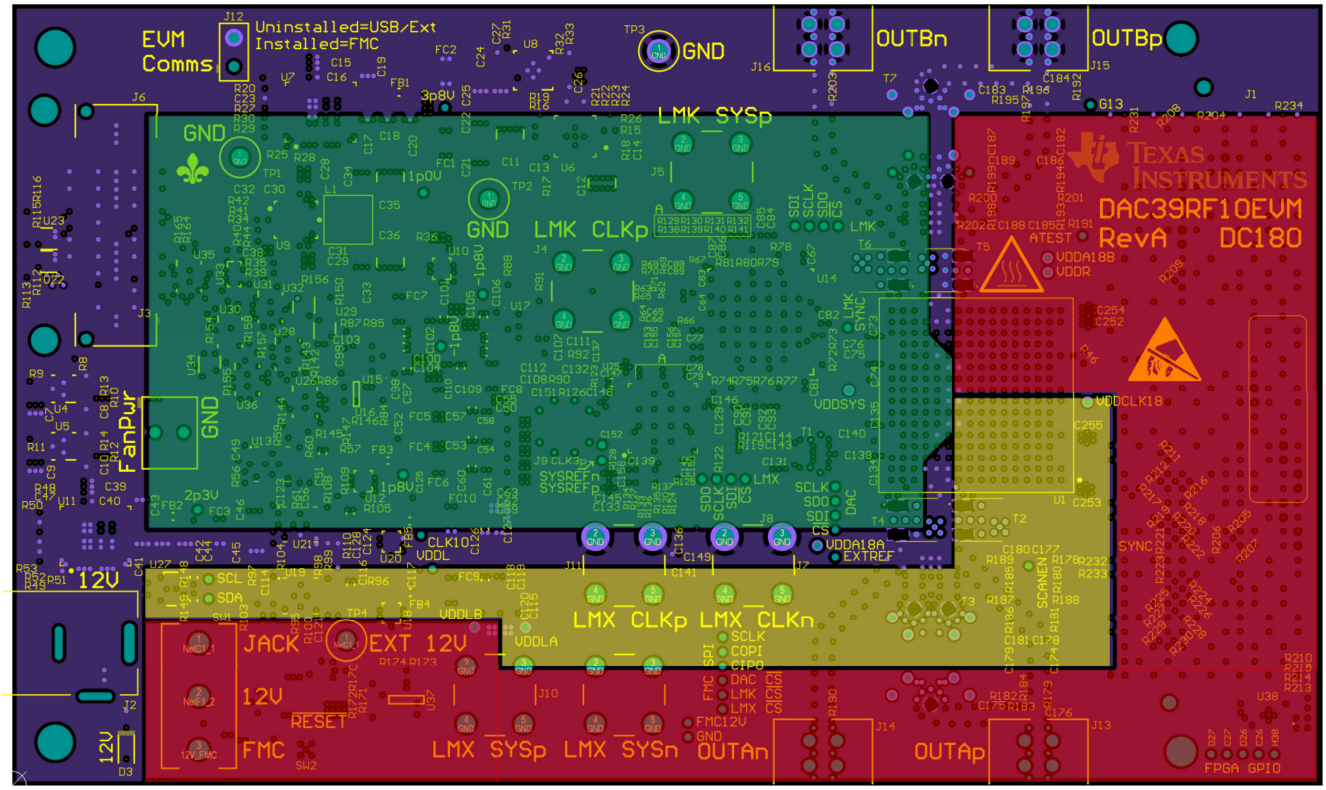

Layer5 / PWR2
DAC VDDLA = RED
DAC VDDLB = YELLOW
DAC VDDCLK1P0V = GREEN


図 8-31. Power Plane Layout for Layer 5

Copyright © 2024 Texas Instruments Incorporated

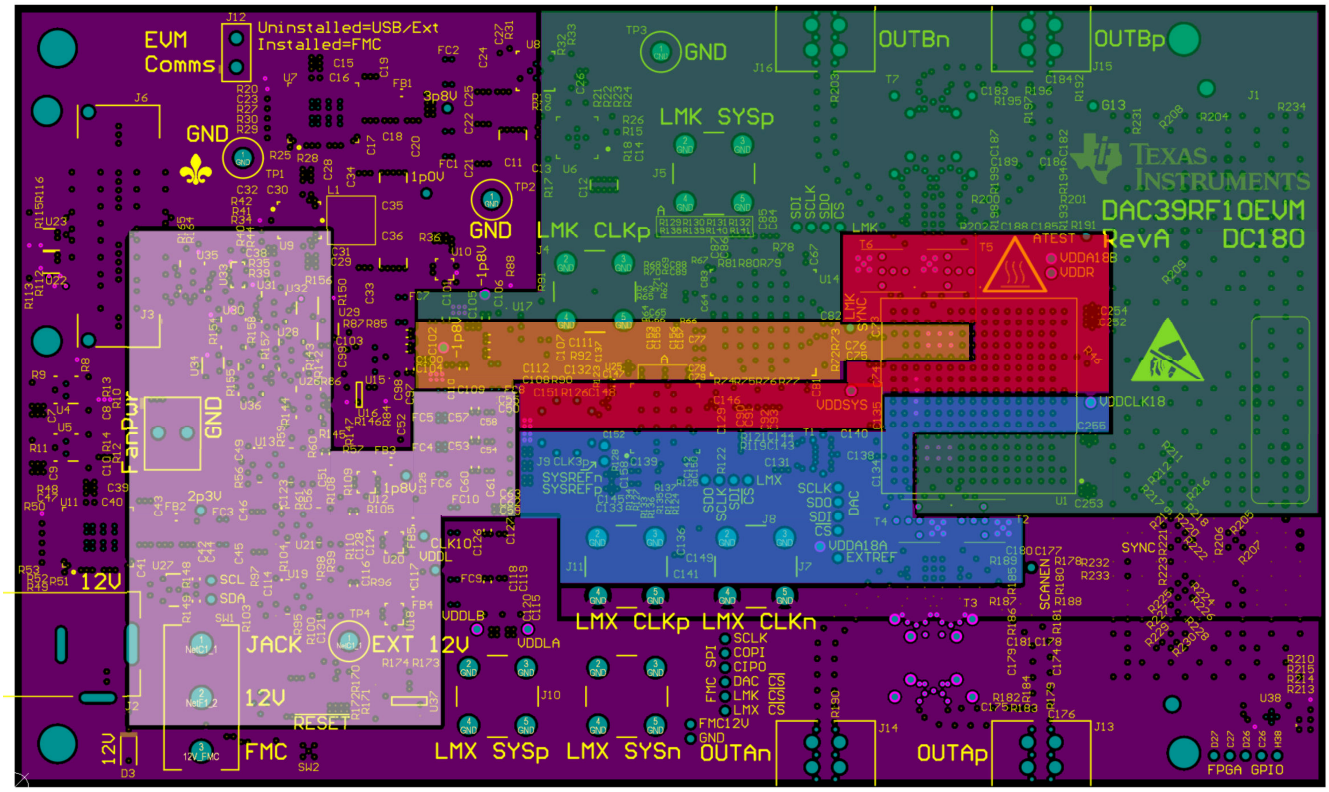

Layer12 / PWR3
DAC VDDA18A = RED
DAC VDDA18B = ORANGE
DAC VDDB = YELLOW
DAC VEExA = GREEN
DAC VEExB = BLUE
VDDIO = WHITE

図 8-32. Power Plane Layout for Layer 12

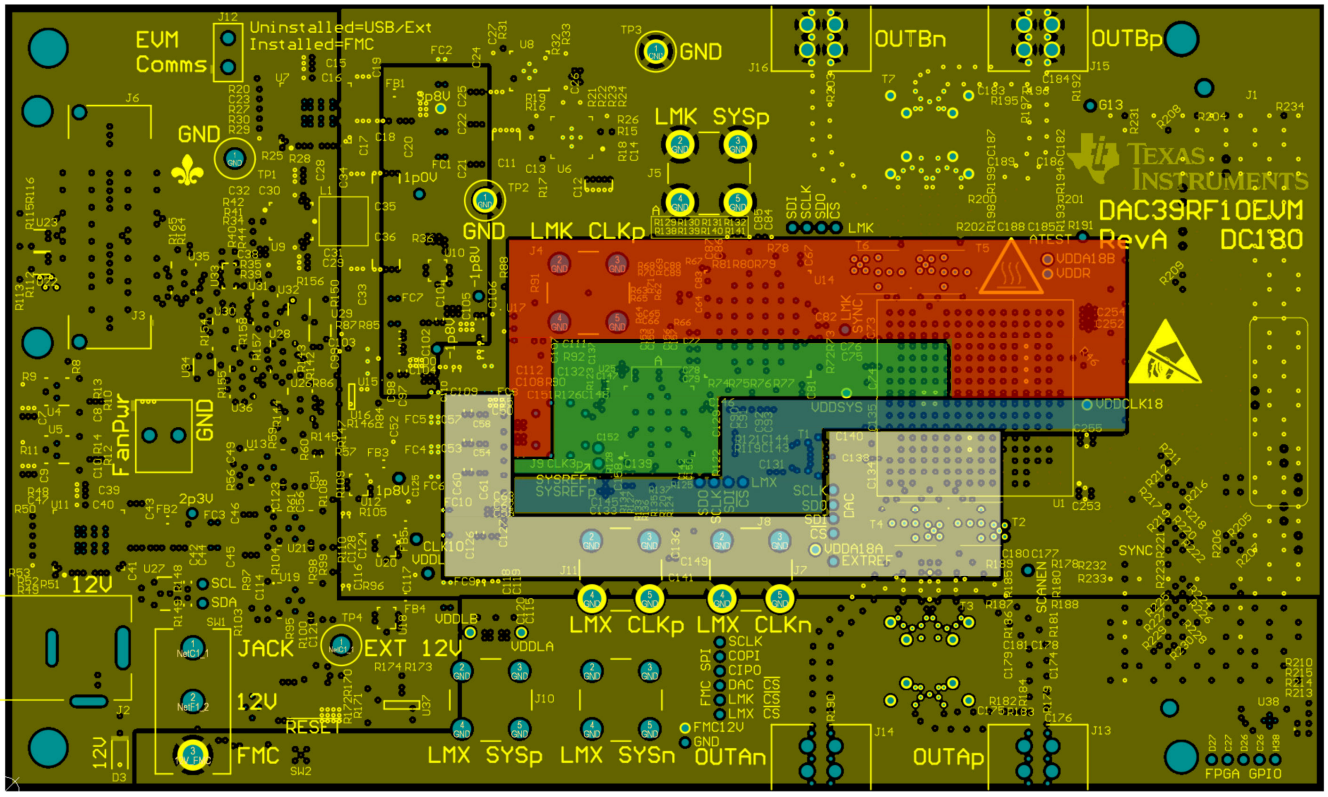

Layer14 / PWR4
DAC VDDR = RED
DAC VDDSYS18 = GREEN
DAC VDDCLK18 = BLUE
VDDIO = WHITE

図 8-33. Power Plane Layout for Layer 14

In addition, TI recommends the following general PCB fabrication considerations for all high-speed PCB designs:

1. Use high quality dielectric materials for any critical signal layers within the PCB stack-up. Typically, the top and bottom layers are the most critical and more board houses can implement a mix of high and standard quality dielectrics, also known as a hybrid stack-up.
2. Use multiple power layers if necessary to provide a robust power delivery system to the converter.
3. Use multiple ground/power/ground layer stacks within the PCB to develop high frequency decoupling within the PCB itself, it is recommended these layers are 4mils or less.
4. Use a solid ground plane, do not split or “slot” the ground plane to create an analog vs. digital grounding barrier or divider. This typically causes more harm than good.

Copyright © 2024 Texas Instruments Incorporated

9 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

9.1 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、ti.com のデバイス製品フォルダを開いてください。「更新の通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

9.2 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの使用条件を参照してください。

9.3 商標

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.
すべての商標は、それぞれの所有者に帰属します。

9.4 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

9.5 用語集

テキサス・インスツルメンツ用語集　　この用語集には、用語や略語の一覧および定義が記載されています。

10 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from October 14, 2023 to March 30, 2024 (from Revision * (November 2023) to Revision A (March 2024)) **Page**

- Added Interpolation Filter Coefficients and Filters Used to セクション 7.3.6.1.1 85
- Added DES2X Filter Coefficients to セクション 7.3.6.3 95
- Deleted sentence in note for 表 7-20 “For debugging purposes, specific ILAS octets can be captured and reported via SPI. See JCAP_PAGE and JCAP_OFFSET.” as this feature is TI only..... 105
- Added more significant digits to R value for JMODE 14 (0.515625) and change max input rate in JMODE 15 64b/66b to 12000 in the JESD Interface Modes table..... 105
- Changed description for MODE register to follow recommendations in セクション 8.1.6 when in full power down..... 120
- Changed FINE_CUR_A and FINE_CUR_B reset values to varies..... 120
- Changed SFORMAT and SCR reset values to 1b in 表 7-59 120
- Changed “JCNTL” to “JCTRL” in Sartup Procedure 177

Copyright © 2024 Texas Instruments Incorporated

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2024 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
DAC39RF12ACK	Active	Production	FCBGA (ACK) | 256	90 | JEDEC TRAY (5+1)	Yes	Call TI	Level-3-260C-168 HR	-40 to 85	DAC39RF 12
DAC39RF12ACL	Active	Production	FCBGA (ACL) | 256	90 | JEDEC TRAY (5+1)	No	Call TI	Level-3-260C-168 HR	-40 to 85	DAC39RF 12
DAC39RFS12ACK	Active	Production	FCBGA (ACK) | 256	90 | JEDEC TRAY (5+1)	Yes	Call TI	Level-3-260C-168 HR	-40 to 85	DAC39RF S12
DAC39RFS12ACL	Active	Production	FCBGA (ACL) | 256	90 | JEDEC TRAY (5+1)	No	Call TI	Level-3-260C-168 HR	-40 to 85	DAC39RF S12

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TRAY

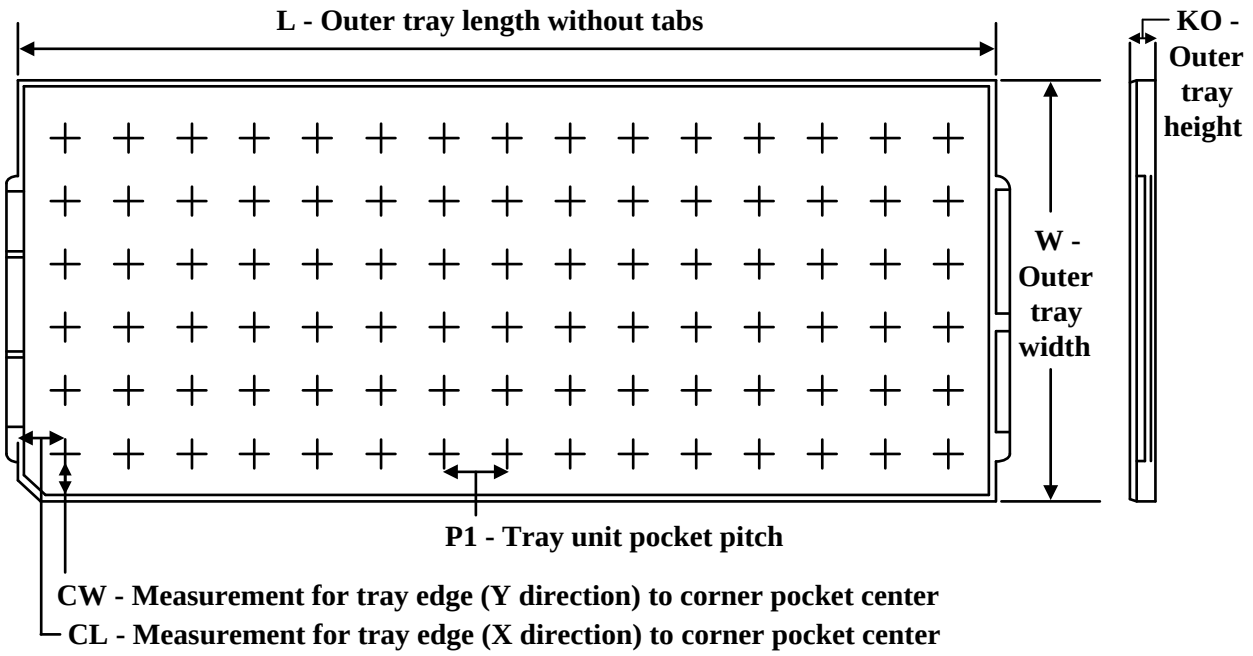

Chamfer on Tray corner indicates Pin 1 orientation of packed units.

*All dimensions are nominal


Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	K0 (µm)	P1 (mm)	CL (mm)	CW (mm)
DAC39RF12ACK	ACK	FCBGA	256	90	6 x 15	150	315	135.9	7620	19.5	21	19.2
DAC39RF12ACL	ACL	FCBGA	256	90	6 x 15	150	315	135.9	7620	19.5	21	19.2
DAC39RFS12ACK	ACK	FCBGA	256	90	6 x 15	150	315	135.9	7620	19.5	21	19.2
DAC39RFS12ACL	ACL	FCBGA	256	90	6 x 15	150	315	135.9	7620	19.5	21	19.2

PACKAGE OUTLINE

ACL0256A

FCBGA - 2.78 mm max height


BALL GRID ARRAY

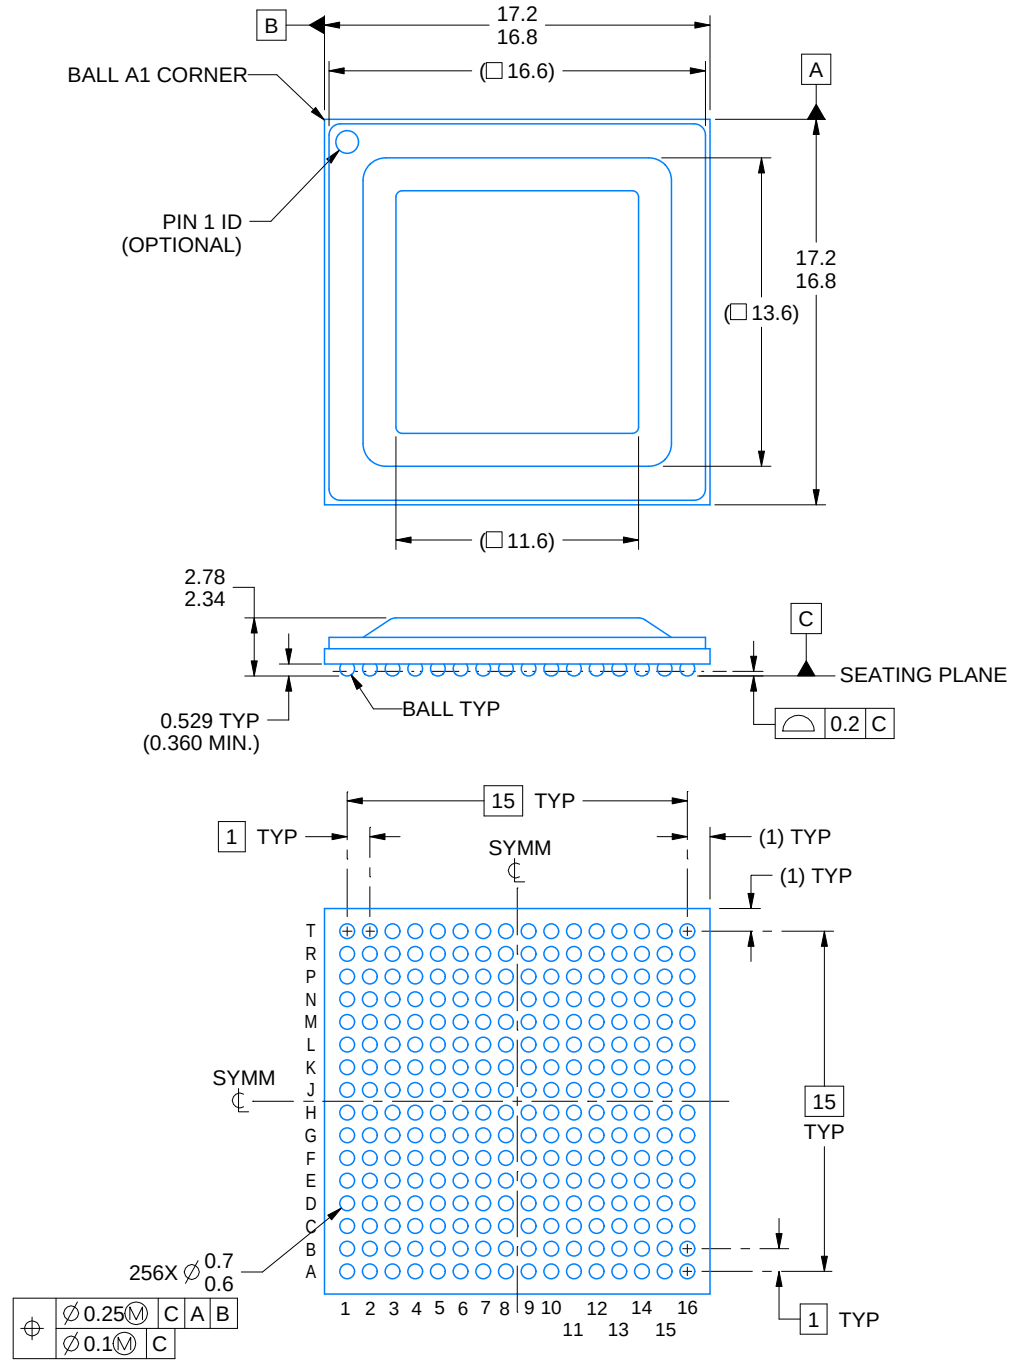


4229409/A 02/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

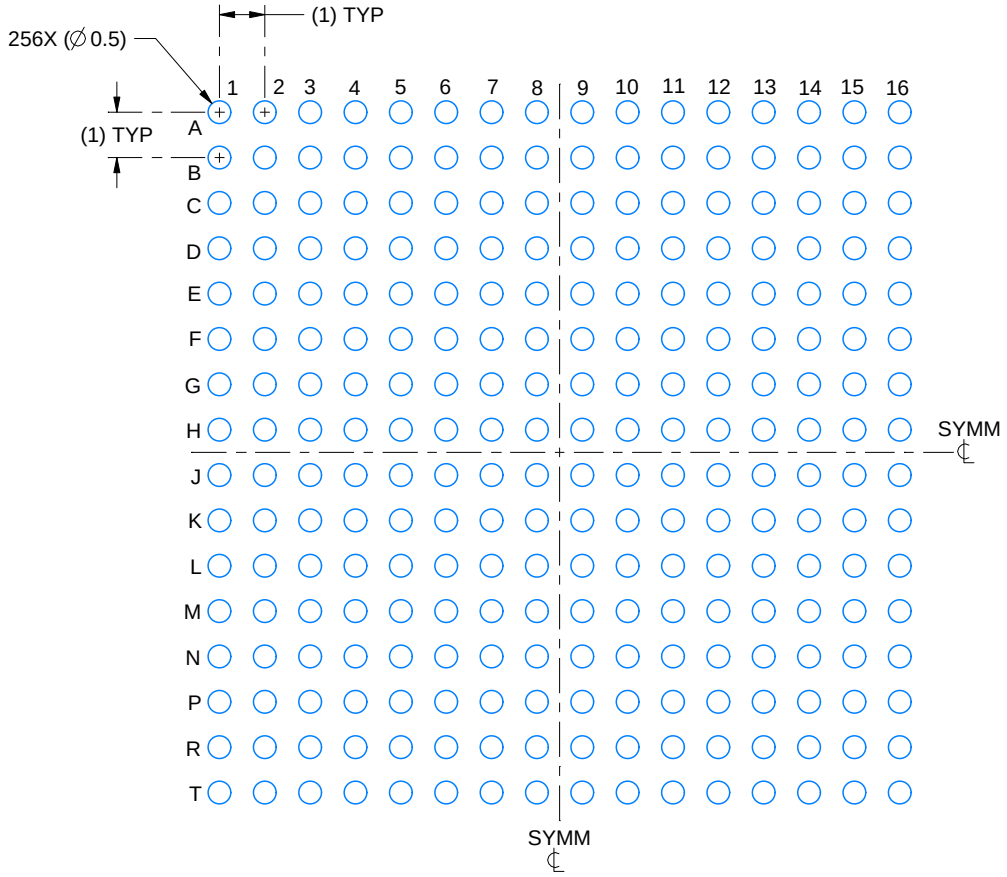

LAND PATTERN EXAMPLE
EXPOSED METAL SNOWN
SCALE:6X

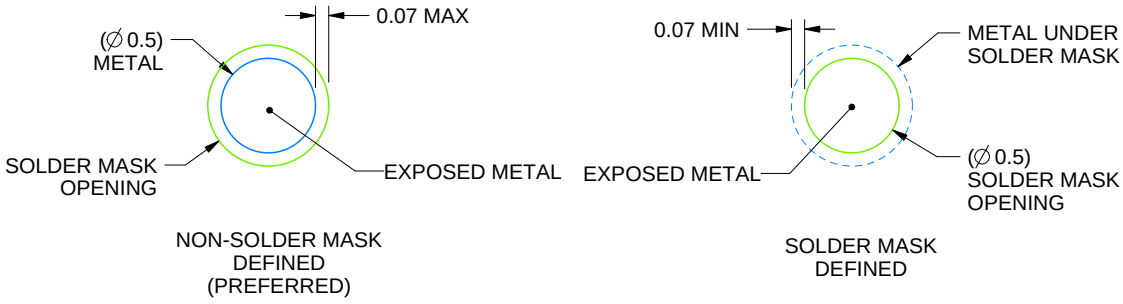


SOLDER MASK DETAILS
NOT TO SCALE

4229409/A 02/2023

NOTES: (continued)

3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints.
For more information, see Texas Instruments literature number SPRU811 (www.ti.com/lit/spru811).

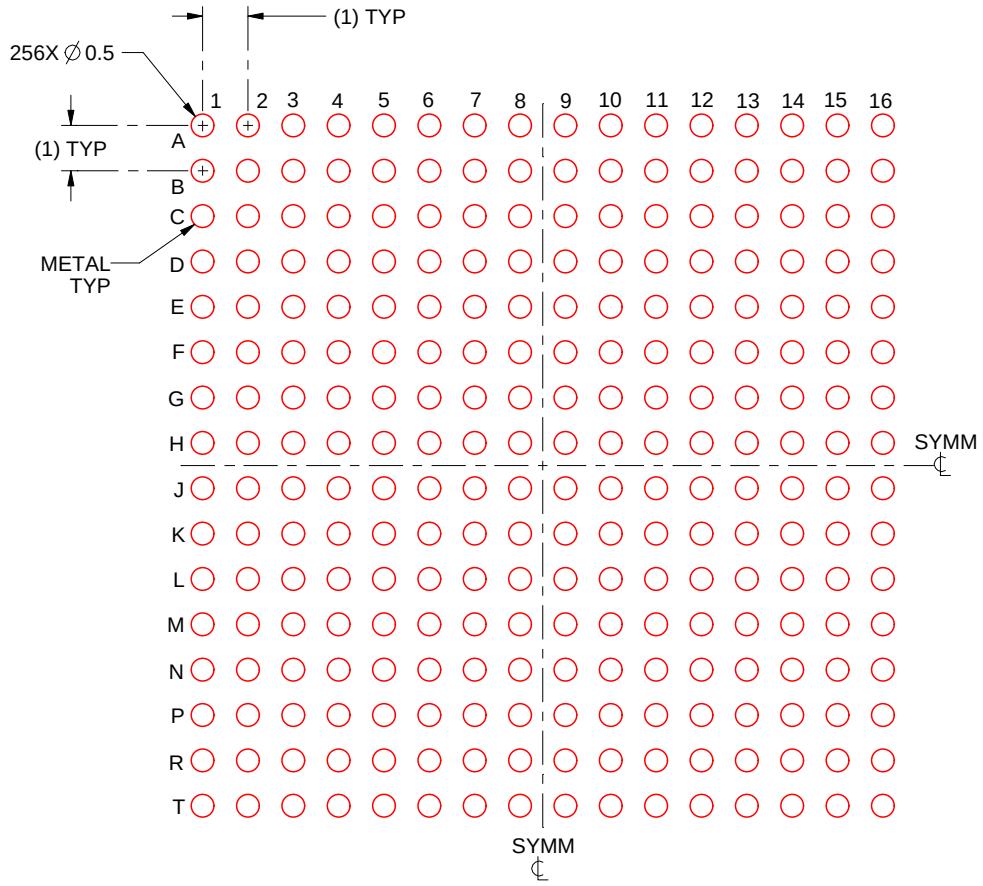

SOLDER PASTE EXAMPLE
BASED ON 0.15 mm THICK STENCIL
SCALE: 6X

4229409/A 02/2023

NOTES: (continued)


4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

PACKAGE OUTLINE

ACK0256A

FCBGA - 2.78 mm max height


BALL GRID ARRAY

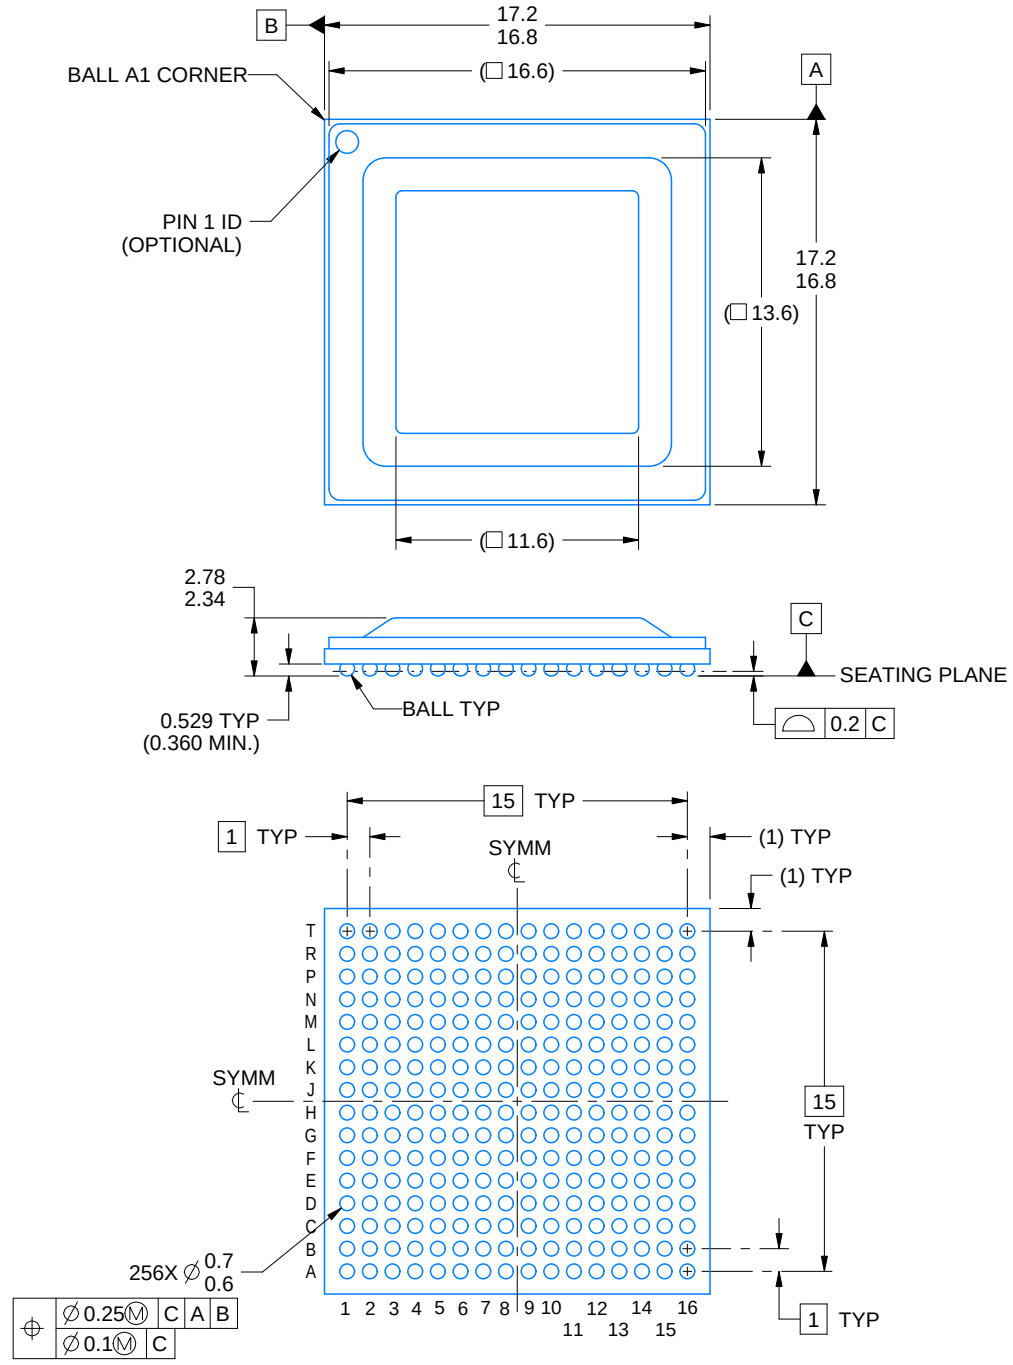


4226903/C 03/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The lids are electrically floating (e.g. not tied to GND).

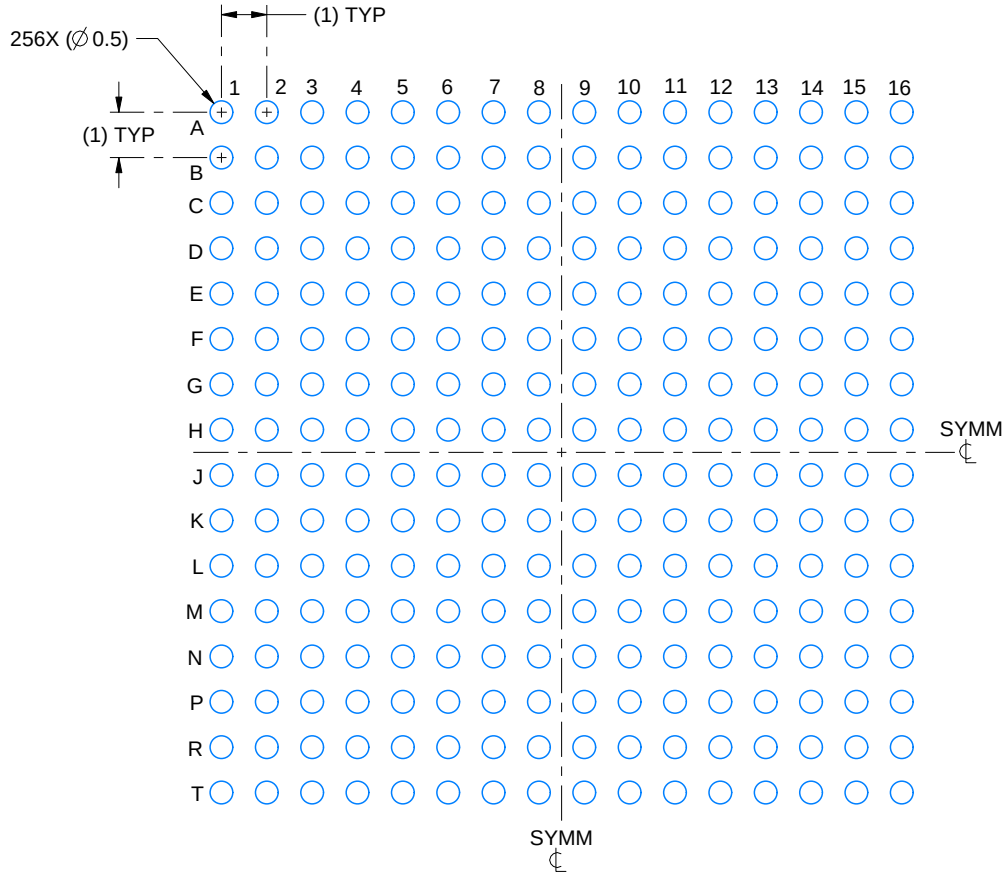

LAND PATTERN EXAMPLE
EXPOSED METAL SNOWN
SCALE:6X

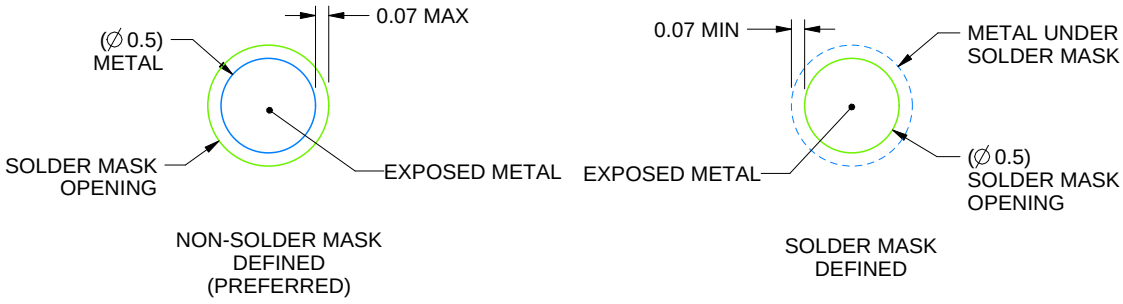


SOLDER MASK DETAILS
NOT TO SCALE

4226903/C 03/2023

NOTES: (continued)

4. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SPRU811 (www.ti.com/lit/spru811).

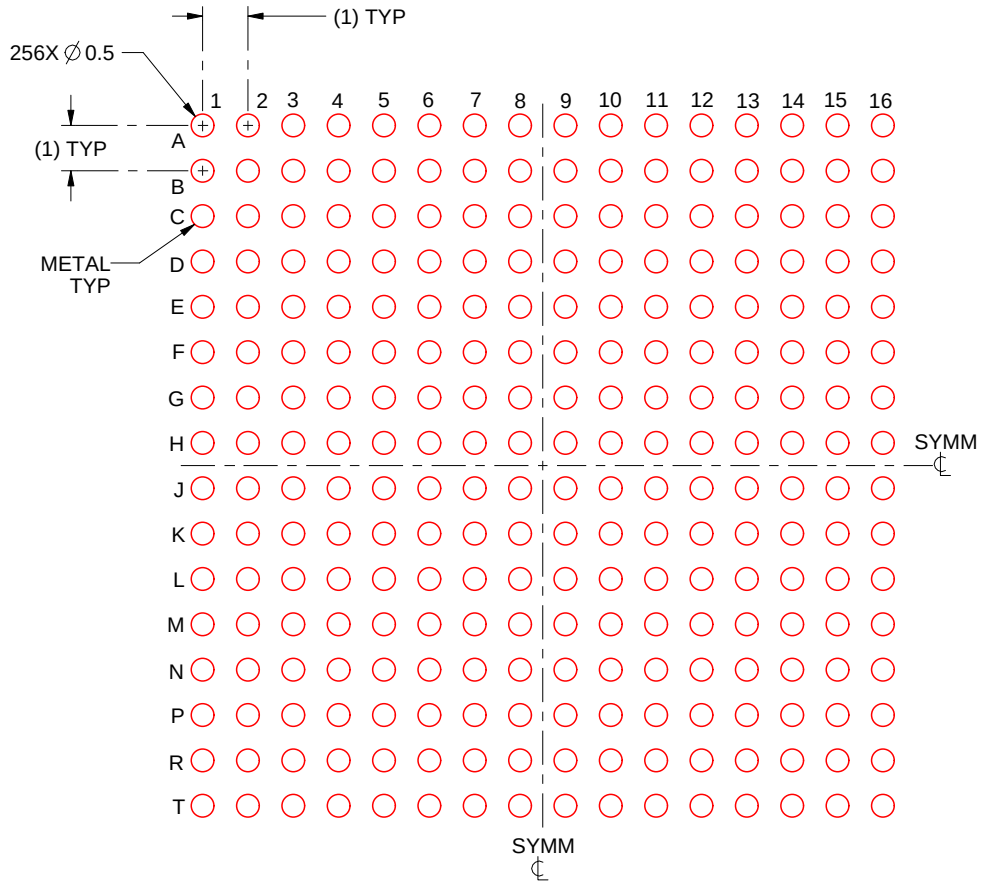

SOLDER PASTE EXAMPLE
BASED ON 0.15 mm THICK STENCIL
SCALE: 6X

4226903/C 03/2023

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、 TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月