

# **Enhanced Resolution Gauging for Low Current Applications Using Scaling**

*Battery Management Solutions/Battery Gauges*

## **ABSTRACT**

This application report aims to address key concerns and design limitations associated with using large (> 20 mΩ) current sense resistors to achieve greater current resolution on Texas Instruments battery gauge products. Using this method, it is possible to achieve < 1 mA current resolution and improve accuracy for systems with small battery capacities which experience very low charge and discharge currents. This document details the enhanced resolution process and highlights primary concerns associated with large sense resistors in battery gauging applications. An implementation example with a bq27426 Impedance Track gauge is included.

## **Contents**

|   |   |   |
|---|---|---|
| 1 | Introduction .....                      | 1 |
| 2 | Choosing A Calibration Ratio .....      | 2 |
| 3 | Hardware Considerations .....           | 2 |
| 4 | Current Calibration.....                | 2 |
| 5 | Gauge Configuration Considerations..... | 3 |
| 6 | Enhanced Resolution Example .....       | 3 |
| 7 | References .....                        | 6 |

## **List of Figures**

|   |   |   |
|---|---|---|
| 1 | Gauge Reported Current vs Applied Current ..... | 5 |
| 2 | Charging Profile .....                          | 6 |

## **List of Tables**

|   |                                  |   |
|---|----------------------------------|---|
| 1 | System Design Parameters .....   | 3 |
| 2 | Equipment List .....             | 3 |
| 3 | bq27426 Parameter Settings ..... | 4 |

## **1 Introduction**

Enhancing current resolution relies on increasing the input to the coulomb counter and adjusting the device configuration to accommodate this change. The coulomb counter determines the amount of passed charge by measuring the voltage across the sense resistor. Using a larger sense resistor results in a larger voltage for the coulomb counter to measure. By scaling the current during calibration, it is possible to decrease the least significant bit value to less than 1 mA. This process allows the gauge to measure currents less than 1 mA and enables gauging functionality for systems with < 1 mA discharge current.

## 2 Choosing A Calibration Ratio

The calibration ratio refers to the factor by which the reported gauge current will be scaled. This ratio is chosen by the user in order to meet their application's necessary resolution. The default resolution is 1 mA per LSB. The equation below is used to calculate the calibration ratio,  $K$ , where  $LSB_{value}$  is the user's desired resolution. For example, if the desired resolution is 100  $\mu$ A, a calibration ratio of 10x should be used.

$$K = \frac{1 \text{ mA}}{LSB_{value}} \quad (1)$$

## 3 Hardware Considerations

In order to improve resolution below 1 mA, it is recommended to use a larger sense resistor in order to create a larger voltage for the coulomb counter to measure. A general rule is to increase the resistance by the same factor as the calibration ratio. For example, if the default sense resistor value is 10 m $\Omega$  and a calibration ratio of 10x is needed, a 100 m $\Omega$  sense resistor is recommended.

### 3.1 Maximum Charge and Discharge Rate

A larger sense resistor will limit the maximum charge/discharge current rate that the fuel gauge can measure without saturating the coulomb counter. For proper operation, the maximum voltage range of the gauge coulomb counter, which is described in the device data sheet, must not be exceeded. This limit can be calculated using the equation shown in [Equation 2](#).

$$I_{max} = \frac{V_{range}}{R_{sense}} \quad (2)$$

For example, if a 200 m $\Omega$  current sense resistor is used and the voltage range of the gauge coulomb counter is  $\pm 125$  mV, the maximum measurable charge/discharge rate is 625 mA.

### 3.2 System Headroom Reduction

Using a large sense resistor will result in a larger  $I \times R$  drop across the sense resistor for a given current. The headroom available to the system would ultimately be less due to this increased voltage drop.

## 4 Current Calibration

The gain and offset of the gauge coulomb counter must be adjusted appropriately in order to measure the desired current range and achieve greater resolution. This is accomplished through current calibration using evaluation software such as bqStudio or bqEVSU. When calibrating, the reported current in the evaluation software should be equal to  $K \times I_{rate}$  where  $I_{rate}$  is the applied current and  $K$  is the user's chosen calibration ratio. For example, if calibration is performed at an actual current of 100 mA and the reported calibration current is 1000 mA, the calibration ratio is 10x and all current values will be reported as  $I_{actual}$  multiplied by the calibration ratio. The least significant bit is equal to 100  $\mu$ A in this example.

$$I_{GAUGE} = K * I_{rate} \quad (3)$$

## 5 Gauge Configuration Considerations

The gauge uses several parameters including FCC, Qstart and Passed Charge to calculate the current state of charge for the battery. If the current is multiplied by some scaling factor, these other parameters must also be multiplied by the same ratio. As such, all current and capacity related data flash parameters need to be multiplied by the calibration ratio to maintain proper operation and accuracy of the gauge. As an example, if a 200 mAh battery with a nominal voltage of 3.7 V is used with a calibration ratio of 10x, the user should set design energy to 2000 mAh and design energy to 7400 mWh. This does present a limitation on the maximum allowable calibration ratio in order to maintain all data flash parameters within their respective limits.

## 6 Enhanced Resolution Example

In this example, a bq27426 gauge is used with a 400 mAh battery with nominal voltage of 3.7 V. The desired resolution is 50  $\mu$ A. The maximum current the battery is expected to deliver is 400 mA with a termination voltage of 3.3 V. A CCCV charger is used with a charging current of 400 mA and charging voltage of 4.05 V.

**Table 1. System Design Parameters**

| DESIGN PARAMETER       | VALUE        |
|------------------------|--------------|
| Capacity               | 400 mAh      |
| Nominal Voltage        | 3.7 V        |
| Resolution             | 50 $\mu$ A   |
| Maximum System Current | $\pm$ 400 mA |
| Charging Voltage       | 4.05 V       |
| Charging Current       | 400 mA       |
| Termination Voltage    | 3.30 V       |

### 6.1 Equipment

Table 2 summarizes the equipment used in this example to perform current scaling.

**Table 2. Equipment List**

| MODEL NUMBER    | DESCRIPTION   |
|-----------------|---|
| Description     | Evaluation module for bq27426 Impedance Track gas gauge |
| bq27GDK000EVM   | TI Gauge Development Kit                                |
| Keithley 2400   | TI Gauge Development Kit                                |
| bqStudio 1.3.52 | Gauge development software                              |

### 6.2 Sense Resistor Selection

To achieve the desired 50  $\mu$ A resolution, a calibration ratio of 20x is needed. As the default value of the sense resistor is 10 m $\Omega$ , a 200 m $\Omega$ , 1% resistor is installed at R1 on the EVM. The maximum measurable current is 400 mA.

### 6.3 Calibration and Configuration

The gauge development kit was connected to Load+ and Load- on the EVM in order to perform the calibration. Using bqStudio, a board offset calibration is performed while there is no current flowing in the system. Once the offset calibration is completed, a charging current of 200 mA is applied to the EVM. On the calibration tab in bqStudio, type in the calibration current as 4000 mA. This sets the calibration ratio to 20x.

Table 3 summarizes the necessary configuration changes to implement the design parameters in Table 1 and to properly scale capacity and current parameters on the bq27426. Parameters with units of mA, mW or mAh should be multiplied by the calibration ratio accordingly. Parameters defer from gas gauge to gas gauge so great care must be taken when making adjustments. The technical reference manual should always be referenced. For the bq27426 gas gauge, current thresholds are in units of 0.1 Hr rate, meaning a value of 100 is equivalent to C/10, 200 is equivalent to C/20, and so on. As the design capacity is already scaled, the threshold rates should not be scaled.

**Table 3. bq27426 Parameter Settings**

| PARAMETER                            | CLASS          | SUBCLASS           | STANDARD VALUE | SCALED VALUE |
|--------------------------------------|----------------|--------------------|----------------|--------------|
| Taper Capacity (mAh)                 | Configuration  | Charge Termination | 50             | 1000         |
| Taper Rate (0.1 Hr Rate)             | Gas Gauging    | State              | 100            | 100          |
| Chg Current Threshold (0.1 Hr Rate)  | Gas Gauging    | Current Thresholds | 167            | 167          |
| Dsg Current Threshold (0.1 Hr Rate)  | Gas Gauging    | Current Thresholds | 100            | 100          |
| Quit Current Threshold (0,1 Hr Rate) | Gas Gauging    | Current Thresholds | 250            | 250          |
| Design Capacity (mAh)                | Gas Gauging    | State              | 400            | 8000         |
| Design Energy (mWh)                  | Gas Gauging    | State              | 1480           | 29600        |
| V at Chg Term (mV)                   | Chemistry Info | Chem Data          | 4050           | 4050         |
| Taper Voltage (mV)                   | Chemistry Info | Chem Data          | 3950           | 3950         |

### 6.4 Results and Discussion

To verify the resolution, the Keithley source meter was connected to Load+ and Load- on the EVM. Using the source meter, current ranging from -1 mA (discharging) to 1 mA (charging) were applied to the EVM while reading the gauge Current() output.

As shown in Figure 1, the gauge reports the measured current with the expected 20X scale factor. The data readings obtained for current in the range -200  $\mu$ A to +200  $\mu$ A is expected to be zero from the gauge Deadband setting of 200  $\mu$ A, which limits the gauge from reporting any current below this level.

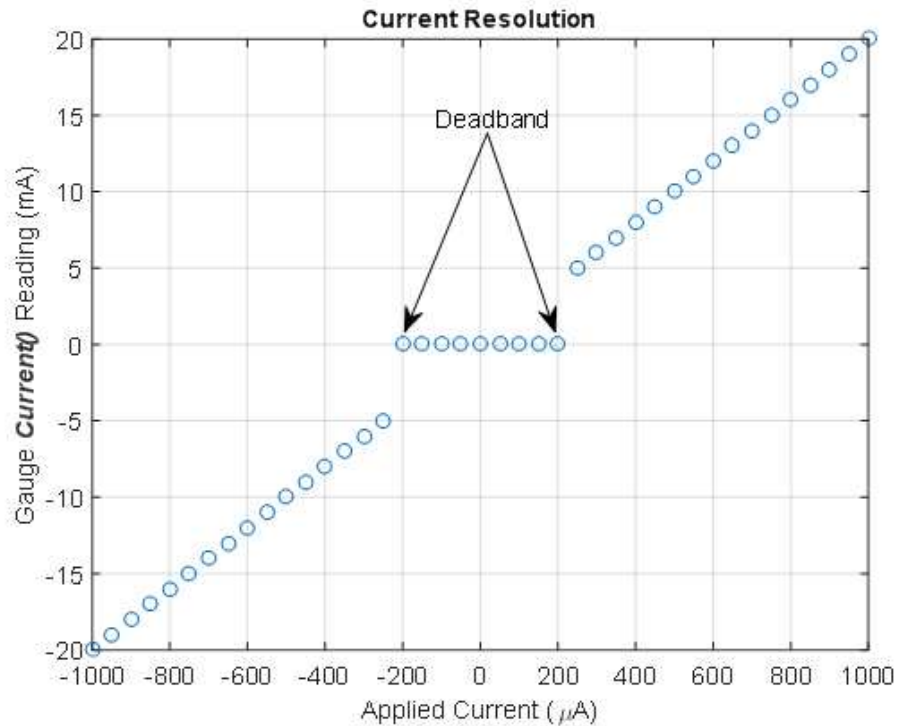


Figure 1. Gauge Reported Current vs Applied Current

Figure 2 shows the charging profile for the implemented gauge configuration. The current and voltage waveforms are consistent with a constant current, constant voltage profile (CCCV). The GDK charges the battery at a constant current of 400 mA until the battery voltage is greater than the taper voltage threshold set in data memory. The charger then provides a constant voltage until the charge current has fallen below 50 mA.

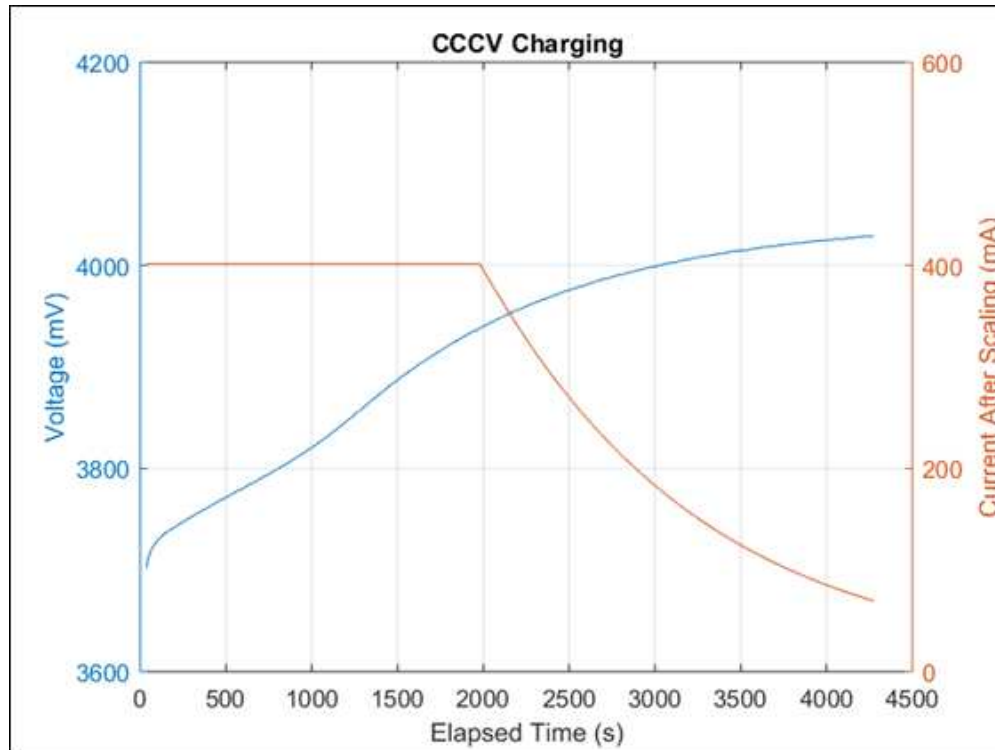


Figure 2. Charging Profile

## 7 References

*bq34z100-G1 High Cell Count and High Capacity Applications* (SLUA760)

*bq27426 System-Side Impedance Track™ Fuel Gauge*, data sheet (SLUSC91)

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |  |
|------------------------------|--|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>   |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>   |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |  |
|-------------------------------|--|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)