ISO1176 絶縁型 RS-485 Profibus トランシーバ

1 特長

- EN 50170 および TIA/EIA-485-A の要件を満たす、または超える性能
- 最大 40Mbps の信号速度
- 2.1V を超える差動出力 (54Ω の負荷)
- 低バス容量:10pF (最大値)
- バス上のトランシーバ数は最大 160 個
- 50kV/μs の標準過渡電圧耐性
- バスの開放、短絡、またはアイドル時のフェイル・セーフを備えるレシーバ
- 3.3V 入力は 5V 許容
- バス・ピンの ESD 保護
  - バス・ピンと GND2 間で 16kV HBM
  - バス・ピンと GND1 間で 6kV HBM
- 安全および規制当局の承認
  - DIN EN IEC 60747-17 (VDE 0884-17) に準拠した 4000V_{PK} の絶縁、560V_{PK} V_{IORM}
  - UL 1577 に準拠した 2500V_{RMS} の絶縁定格
  - CSA 62368-1 に準拠した 4000V_{PK} の絶縁定格

2 アプリケーション

- Profibus
- ファクトリ・オートメーション
- ネットワーク接続センサ
- モータおよびモーション制御
- HVA およびビルディング・オートメーション・ネットワーク
- ネットワーク接続セキュリティ・ステーション

3 概要

ISO1176 デバイスは、PROFIBUS アプリケーションでの使用を目的として設計された絶縁型差動ライン・トランシーバです。このデバイスは、大きな同相電圧範囲で動作できるようにグランド・ループが遮断されているため、長い伝送ラインに最適です。各デバイスの対称型絶縁バリアは、ライン・トランシーバとロジック・レベル・インターフェイスとの間で、UL に従い、2500V_{RMS} で絶縁を行うことがテスト済みです。

ガルバニック絶縁された差動バス・トランシーバは、マルチポイント・バス伝送ライン上での双方向データ通信を目的として設計された IC です。このトランシーバは、ガルバニック絶縁された差動ライン・ドライバと差動入力ライン・レシーバを組み合わせたものです。このドライバは、アクティブ・ハイのイネーブルとともに、絶縁されたイネーブル状態出力を ISODE ピン (ピン 10) に備え、方向制御が容易になっています。ドライバの差動出力とレシーバの差動入力は、差動入出力 (I/O) バス・ポートを構成するように内部で接続されています。このポートは、最大 160 ノードを許容するバスへの負荷を最小化するように設計されています。

PV ピン (ピン 7) は、フルチップ・イネーブル・オプションとして提供されています。PV ピンにロジック・ローが印加されると、すべてのデバイス出力が高インピーダンスになります。詳細については、*セクション 8.3* の機能表を参照してください。


ケーブル接続されたすべての I/O は、各種ノイズ源からの電気的ノイズの過渡現象にさらされる可能性があります。このようなノイズ過渡は、十分な大きさと持続時間を持つ場合、トランシーバや近くにある感度の高い回路に損傷を与える可能性があります。ISO1176 は、データの破損や高価な制御回路の損傷が発生する危険性を大幅に低減できます。

このデバイスは、-40℃～+85℃の周囲温度範囲で動作が規定されています。

製品情報(1)

部品番号	パッケージ	本体サイズ (公称)
ISO1176	SOIC (16)	10.30mm × 7.50mm

(1) 利用可能なすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。

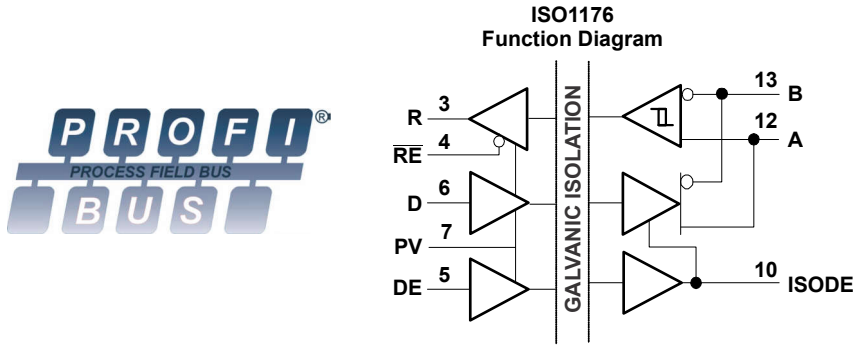

概略回路図

英語版の TI 製品についての情報を翻訳したこの資料は、製品の概要を確認する目的で便宜的に提供しているものです。該当する正式な英語版の最新情報は、www.ti.com で閲覧でき、その内容が常に優先されます。TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、必ず最新版の英語版をご参照くださいますようお願いいたします。

Table of Contents

1 特長 ... 1
2 アプリケーション ... 1
3 概要 ... 1
4 Revision History ... 2
5 Pin Configuration and Functions ... 3
6 Specifications ... 4
6.1 Absolute Maximum Ratings ... 4
6.2 ESD Ratings ... 4
6.3 Recommended Operating Conditions ... 4
6.4 Thermal Information ... 5
6.5 Power Ratings ... 5
6.6 Insulation Specifications ... 5
6.7 Safety-Related Certifications ... 6
6.8 Safety Limiting Values ... 6
6.9 Electrical Characteristics: Driver ... 7
6.10 Electrical Characteristics: Receiver ... 7
6.11 Supply Current ... 9
6.12 Electrical Characteristics: ISODE-Pin ... 9
6.13 Switching Characteristics: Driver ... 10
6.14 Switching Characteristics: Receiver ... 10
6.15 Insulation Characteristics Curves ... 11
6.16 Typical Characteristics ... 12
7 Parameter Measurement Information ... 14
8 Detailed Description ... 20
8.1 Overview ... 20
8.2 Functional Block Diagram ... 20
8.3 Device Functional Modes ... 21
9 Application and Implementation ... 24
9.1 Application Information ... 24
9.2 Typical Application ... 24
10 Power Supply Recommendations ... 27
11 Layout ... 28
11.1 Layout Guidelines ... 28
11.2 Layout Example ... 29
12 Device and Documentation Support ... 30
12.1 Documentation Support ... 30
12.2 サポート・リソース ... 30
12.3 Trademarks ... 30
12.4 静電気放電に関する注意事項 ... 30
12.5 用語集 ... 30
13 Mechanical, Packaging, and Orderable Information ... 30

4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision E (June 2015) to Revision F (August 2023) — **Page**

- ドキュメント全体にわたって表、図、相互参照の採番方法を更新 ... 1
- Updated Thermal Characteristics, Safety Limiting Values, and Thermal Derating Curves to provide more accurate system-level thermal calculations ... 5
- Updated electrical and switching characteristics to match device performance ... 7

Changes from Revision D (March 2010) to Revision E (June 2015) — **Page**

- 「ピン構成と機能」セクション、「ESD 定格」表、「機能説明」セクション、「デバイスの機能モード」セクション、「アプリケーションと実装」セクション、「電源に関する推奨事項」セクション、「レイアウト」セクション、「デバイスおよびドキュメントのサポート」セクション、「メカニカル、パッケージ、および注文情報」セクションを追加 ... 1
- VDE 標準を「DIN V VDE V 0884-10 (VDE V 0884-10): 2006-12」に変更 ... 1

Changes from Revision C (October 2008) to Revision D (March 2010) — **Page**

- 「特長」の最初の一覧に「560Vpeak V_{IORM}」を追加 ... 1
- 「特長」の一覧に UL 1577、IEC 60747-5-2 (VDE 0884、Rev. 2) を追加 ... 1
- Changed the ISO1176 “Sticky Bit” Issue section ... 26

Changes from Revision B (June 2008) to Revision C (October 2008) — **Page**

- 「概要」セクションの第 2 段落の文章を次のように変更：「ドライバがディセーブルされているか V_{CC2} = 0 のとき」から「最大 160 ノードを許容する」に変更 ... 1

Changes from Revision A (May 2008) to Revision B (June 2008) — **Page**

Changes from Revision * (March 2008) to Revision A (May 2008) — **Page**

- 「特長」の一覧に「3.3V 入力は 5V 許容」を追加 ... 1
- 「特長」の一覧に「バス・ピンの ESD 保護」の箇条書き項目と副項目を追加 ... 1

Copyright © 2023 Texas Instruments Incorporated

- Added the APPLICATION INFORMATION section.....24

5 Pin Configuration and Functions

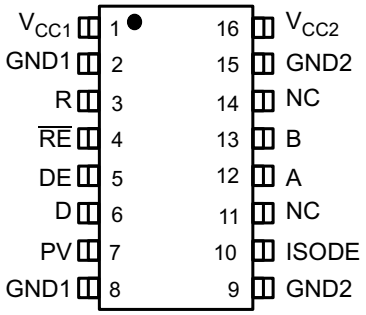


図 5-1. DW Package
16-Pin SOIC
Top View

表 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
A	12	I/O	Noninverting bus output
B	13	I/O	Inverting bus output
D	6	I	Driver input
DE	5	I	Driver logic-high enable
GND1	2, 8	—	Logic-side ground; internally connected
GND2	9, 15	—	Bus-side ground; internally connected
ISODE	10	—	Bus-side driver enable output
NC	11, 14	—	Not connected internally; may be left floating
PV	7	I	ISO1176 chip enable, logic high applied immediately after power up for device operation. A logic low 3-states all outputs.
R	3	O	Receiver output
$\overline{RE}$	4	I	Receiver logic-low enable
V_{CC1}	1	—	Logic side power supply
V_{CC2}	16	—	Bus side power supply

Copyright © 2023 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT
V_{CC}	Supply voltage(2)	V_{CC1}, V_{CC2}	-0.5	6	V
V_O	Voltage at any bus I/O terminal		-9	14	V
V_I	Voltage input	D, DE or $\overline{RE}$	-0.5	6	V
I_O	Receiver output current		-10	10	mA
T_J	Junction temperature			150	℃
T_{stg}	Storage temperature		-65	150	℃

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) All voltage values except differential I/O bus voltages are with respect to the referenced network ground terminal and are peak voltage values

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$ Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	Bus pins to 2, 8	±6000	V
		Bus pins to 9, 15	±16000	V
		All pins	±4000	V
	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins(2)		±1000	V
	Machine model ANSI/ESDS5.2-1996		±200	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

			MIN	TYP	MAX	UNIT
V_{CC}	Logic-side supply voltage, V_{CC1} (with respect to GND1)		3.15		5.5	V
	Bus-side supply voltage, V_{CC2} (with respect to GND2)		4.75		5.25	V
V_{CM}	Voltage at either bus I/O terminal	A or B	-7		12	V
V_{IH}	High-level input voltage	PV, $\overline{RE}$	2		5.5	V
V_{IH}	High-level input voltage	D, DE	0.7*V_{CC1}			V
V_{IL}	Low-level input voltage	PV, $\overline{RE}$	0		0.8	V
V_{IL}	Low-level input voltage	D, DE			0.3*V_{CC1}	V
V_{ID}	Differential input voltage	A with respect to B	-12		12	V
I_O	Output current	Driver	-70		70	mA
I_O	Output current	Receiver	-8		8	mA
	Input pulse width		10			ns
T_A	Ambient temperature		-40	25	85	°C

Copyright © 2023 Texas Instruments Incorporated

6.4 Thermal Information

THERMAL METRIC[1]		ISO1176 DW (SOIC) 16 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	81.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	41.4	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	46.4	°C/W
ψ_{JT}	Junction-to-top characterization parameter	15.0	°C/W
ψ_{JB}	Junction-to-board characterization parameter	45.8	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	n/a	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report.

6.5 Power Ratings

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_D	Maximum power dissipation (both sides)	$V_{CC1} = V_{CC2} = 5.25$ V, $T_J = 150$°C, $C_L =$ 15 pF, Input at 20 MHz 50% duty cycle square wave			283	mW

6.6 Insulation Specifications

PARAMETER		TEST CONDITIONS	VALUE DW-16	UNIT
CLR	External clearance[1]	Shortest terminal-to-terminal distance through air	8	mm
CPG	External creepage[1]	Shortest terminal-to-terminal distance across the package surface	8	mm
DTI	Distance through the insulation	Minimum internal gap (internal clearance)	8	um
CTI	Comparative tracking index	DIN EN 60112 (VDE 0303-11); IEC 60112	>400	V
	Material group	According to IEC 60664-1	II	
	Overvoltage category per IEC 60664-1	Rated mains voltage ≤ 150 V_{RMS}	I-IV	
		Rated mains voltage ≤ 300 V_{RMS}	I-III	
DIN EN IEC 60747-17 (VDE 0884-17) [2]				
V_{IORM}	Maximum repetitive peak isolation voltage	AC voltage (bipolar)	560	V_{PK}
V_{IOTM}	Maximum transient isolation voltage	$V_{TEST} = V_{IOTM}$, t = 60 s (qualification); $V_{TEST} = 1.2 \times V_{IOTM}$, t= 1 s (100% production)	4000	V_{PK}
q_{pd}	Apparent charge[3]	Method b; At routine test (100% production) $V_{ini} = 1.2 \times V_{IOTM}$, $t_{ini} = 1$ s; $V_{pd(m)} = 1.5 \times V_{IORM}$, $t_m = 1$ s	≤5	pC
C_{IO}	Barrier capacitance, input to output[4]	$V_{IO} = 0.4 \times \sin(2\pi ft)$, f = 1 MHz	2	pF
C_I	Input capacitance to ground	$V_I = VCC/2 + 0.4 \times \sin(2\pi ft)$, f = 1 MHz, VCC = 5 V	2	pF
R_{IO}	Isolation resistance[4]	$V_{IO} = 500$ V, $T_A = 25$°C	$>10^{12}$	Ω
	Pollution degree		2	
	Climatic category		40/125/21	
UL 1577				
V_{ISO}	Maximum withstanding isolation voltage	$V_{TEST} = V_{ISO}$, t = 60 s (qualification), $V_{TEST} = 1.2 \times V_{ISO}$, t = 1 s (100% production)	2500	V_{RMS}

(1) Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the

Copyright © 2023 Texas Instruments Incorporated

isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves and/or ribs on a printed-circuit board are used to help increase these specifications.

(2) This coupler is suitable for *basic electrical insulation* only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.

(3) Apparent charge is electrical discharge caused by a partial discharge (pd).

(4) All pins on each side of the barrier tied together creating a two-terminal device.

6.7 Safety-Related Certifications

VDE	CSA	UL
Certified according to DIN EN IEC 60747-17 (VDE 0884-17)	Certified according to IEC 60950-1 and IEC 62368-1	Certified according to UL 1577 Component Recognition Program
Basic insulation, 4000 V_{PK} Maximum transient isolation voltage, 560 V_{PK} Maximum repetitive peak isolation voltage	4000 VPK Isolation Rating; Reinforced insulation per CSA 60950-1 and IEC 60950-1 148 V_{RMS} working voltage; Basic insulation per CSA 62368-1 and IEC 62368-1 300V_{RMS} working voltage	Single protection, 2500 V_{RMS}
Certificate number: 40047657	Master contract number: 220991	File number: E181974

6.8 Safety Limiting Values

Safety limiting(1) intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DW-16 PACKAGE						
I_S	Safety input, output, or supply current	$R_{\theta JA}$ = 81.4°C/W, V_I = 5.5 V, T_J = 150°C, T_A = 25°C,			279	mA
T_S	Maximum case temperature				150	°C

(1) The maximum safety temperature, T_S, has the same value as the maximum junction temperature, T_J, specified for the device. The I_S and P_S parameters represent the safety current and safety power respectively. The maximum limits of I_S and P_S should not be exceeded. These limits vary with the ambient temperature, T_A.
The junction-to-air thermal resistance, $R_{\theta JA}$, in the table is that of a device installed on a high-K test board for leaded surface-mount packages. Use these equations to calculate the value for each parameter:
$T_J = T_A + R_{\theta JA} \times P$, where P is the power dissipated in the device.
$T_{J(max)} = T_S = T_A + R_{\theta JA} \times P_S$, where $T_{J(max)}$ is the maximum allowed junction temperature.
$P_S = I_S \times V_I$, where V_I is the maximum input voltage.

Copyright © 2023 Texas Instruments Incorporated

6.9 Electrical Characteristics: Driver

All typical specs are at V_{CC1}=3.3V, V_{CC2}=5V, T_A=27°C, (Min/Max specs are over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$\|V_{OD}\|$	Open-circuit differential output voltage	$\|V_A-V_B\|$, Figure 8	1.8		V_{CC2}	V
$\|V_{OD(SS)}\|$	Steady state differential output voltage magnitude	See Figure 9 and Figure 13	2.1			V
	Steady state differential output voltage magnitude	Common mode loading with V_{test} from -7V to 12V, See figure 10	2.1			V
$\Delta\|V_{ODSS}\|$	Change in differential output voltage between two states	R_L = 54 ohms, See Figure 11 and Figure 12	–200		200	mV
$V_{OC(SS)}$	Steady state common-mode output voltage	R_L = 54 ohms, See Figure 11 and Figure 12	2		3	V
$\Delta V_{OC(SS)}$	change in steady-state common-mode output voltage between two states	R_L = 54 ohms, See Figure 11 and Figure 12	–200		200	mV
$V_{OC(PP)}$	Peak-to-peak common-mode output voltage	R_L = 54 ohms, See Figure 11 and Figure 12		0.5		V
$V_{OD(RING)}$	Differential output voltage over and undershoot	See Figure 13 and Figure 17			10	$\%V_{OD(PP)}$
$V_{I(HYS)}$	Input voltage hysteresis	See Figure 14		150		mV
I_I	Input current	D, DE at 0 V or V_{CC1}	–10		10	µA
		PV[(1)] at 0 V or V_{CC1}			120	µA
$I_{O(OFF)}$	Output current with power off	Vcc ≤ 2.5V	See receiver input current in Electrical Characteristics: Receiver			
I_{OZ}	High-impedance state output current	DE at 0 V				
$I_{OS(P)}$	Peak short circuit output current	DE at V_{CC}, See Figure 15 and Figure 16: V_{OS} = -7 to 12 V	–250		250	mA
$I_{OS(SS)}$	Steady state short-circuit output current	DE at V_{CC}, See Figure 15 and Figure 16: V_{OS} = 12 V, D at GND1			150	mA
		DE at V_{CC}, See Figure 15 and Figure 16: V_{OS} = -7 V, D at V_{CC1}	–150			mA
C_{OD}	Differential output capacitance			7	10	pF
CMTI	Common-mode transient immunity	See Figure 27	25			kV/µs

(1) The PV pin has a 50-kΩ pullup resistor and leakage current depends on supply voltage.

6.10 Electrical Characteristics: Receiver

All typical specs are at V_{CC1}=3.3V, V_{CC2}=5V, T_A=27°C, (Min/Max specs are over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{IT+}	Positive-going input threshold voltage	I_O = –8 mA, See Figure 22		-80	–10	mV
V_{IT-}	Negative-going input threshold voltage	I_O = 8 mA, See Figure 22	–200	-120		mV
V_{hys}	Input hysteresis ($V_{IT+} – V_{IT-}$)			40		mV
V_{OH}	Output Voltage	V_{CC1} at 3.3 V and V_{CC2} at 5V, V_{ID} = 200mV, I_O = -8mA	V_{CC1}-0.4	3		V
V_{OH}	Output Voltage	V_{CC1} at 3.3 V and V_{CC2} at 5V, V_{ID} = 200mV, I_O = -20uA	V_{CC1}-0.1	3.3		V
V_{OL}	Output Voltage	V_{CC1} at 3.3 V and V_{CC2} at 5V, V_{ID} = -200mV, I_O = 8mA		0.2	0.4	V
V_{OL}	Output Voltage	V_{CC1} at 3.3 V and V_{CC2} at 5V, V_{ID} = -200mV, I_O = 20uA		0	0.1	V
V_{OH}	Output Voltage	V_{CC1} at 5 V and V_{CC2} at 5V, V_{ID} = 200mV, I_O = -8mA	V_{CC1}-0.8	4.6		V

Copyright © 2023 Texas Instruments Incorporated

All typical specs are at V_{CC1}=3.3V, V_{CC2}=5V, T_A=27°C, (Min/Max specs are over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OH}	Output Voltage	V_{CC1} at 5 V and V_{CC2} at 5V, V_{ID} = 200mV, I_O = -20uA	V_{CC1}-0.1	5		V
V_{OL}	Output Voltage	V_{CC1} at 5 V and V_{CC2} at 5V, V_{ID} = -200mV, I_O = 8mA		0.2	0.4	V
V_{OL}	Output Voltage	V_{CC1} at 5 V and V_{CC2} at 5V, V_{ID} = -200mV, I_O = 20uA		0	0.1	V
I_A or I_B	Bus pin input current	V_I = -7 V or 12 V, other input = 0V: V_{CC} = 4.75 V or 5.25 V	-160		200	µA
$I_{A(OFF)}$ or $I_{B(OFF)}$		V_I = -7 V or 12 V, other input = 0V: V_{CC2} = 0 V				
I_I	Receiver enable input current	$\overline{RE}$ = 0 V or V_{CC1}	-50		50	µA
I_{OZ}	High impedance state output current	$\overline{RE}$ = V_{CC1}	–1		1	µA
R_{ID}	Differential input resistance	A, B	48			kohm
C_{ID}	Differential input capacitance	Test input signal is a 1.5MHz sine wave with 1V_{PP} amplitude, C_D is measured across A and B		7	10	pF
CMR	Common mode rejection	See Figure 26		4		V

Copyright © 2023 Texas Instruments Incorporated

6.11 Supply Current

Bus loaded or unloaded (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
DRIVER ENABLED, RECEIVER DISABLED					
I_{CC1}	3 V: DE at 0 V		4	6	mA
	3 V: DE at V_{CC1}, 2 Mbps		5		mA
	3 V: DE at $_{VCC1}$, 25 Mbps		6		mA
	5.5 V: DE at 0 V		7	10	mA
	5.5 V: DE at V_{CC1}, 2 Mbps		8		mA
	5.5 V: DE at V_{CC1}, 25 Mbps		11		mA
I_{CC2}	5.25 V: DE at 0 V		15	18	mA
	5.25 V: DE at V_{CC1}, 2 Mbps, 54 ohm load		70		mA
	5.25 V: DE at V_{CC1}, 25 Mbps, 54 load ohm		75		mA

6.12 Electrical Characteristics: ISODE-Pin

All typical specs are at V_{CC1}=3.3V, V_{CC2}=5V, T_A=27°C, (Min/Max specs are over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OH}	High-level output voltage	I_{OH} = –8 mA	V_{CC2} – 0.4	4.6		V
		I_{OH} = –20 µA	V_{CC2} – 0.1	5		V
V_{OL}	Low-level output voltage	I_{OL} = –8 mA		0.2	0.4	V
		I_{OL} = –20 µA		0	0.1	V

Copyright © 2023 Texas Instruments Incorporated

6.13 Switching Characteristics: Driver

All typical specs are at V_{CC1}=3.3V, V_{CC2}=5V, T_A=27°C, (Min/Max specs are over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
ISO1176						
t_{PHL}, t_{PLH}	Propagation delay	V_{CC1} at 5 V, V_{CC2} at 5 V			35	ns
tsk(p)	Pulse skew ($\|t_{PHL} - t_{PLH}\|$)			2	7.5	ns
t_{PHL}, t_{PLH}	Propagation delay	V_{CC1} at 3.3 V, V_{CC2} at 5 V			40	ns
tsk(p)	Pulse skew ($\|t_{PHL} - t_{PLH}\|$)			2	7.5	ns
t_r, t_f	Differential output rise time and fall time	See Figure 17	2	3	7.5	ns
t_{pDE}	DE to ISODE prop delay	See Figure 21			30	ns
$t_{t(MLH)}$, $t_{t(MHL)}$	Output transition skew	See Figure 18			1	ns
$t_{P(AZH)}$, $t_{P(BZH)}$, $t_{P(AZL)}$, $t_{P(BZL)}$	Propagation delay, high-impedance-to-active output	C_L = 50 pF, $\overline{RE}$ at 0 V, See Fgure 19 and Figure 20			80	ns
$t_{P(AHZ)}$, $t_{P(BHZ)}$, $t_{P(ALZ)}$, $t_{P(BLZ)}$	Propagation delay time, active-to-high-impedance output				80	ns
$\|t_{P(AZL)} - t_{P(BZH)}\|$, $\|t_{P(AZH)} - t_{P(BZL)}\|$	Enable skew time			0.55	1.5	ns
$t_{(CFB)}$	Time from application of short-circuit to current foldback	See Figure 16		0.5		µs
$t_{(TSD)}$	Time from application of short-circuit to thermal shutdown	T_A = 25°C, See Figure 16	100			µs

6.14 Switching Characteristics: Receiver

All typical specs are at V_{CC1}=3.3V, V_{CC2}=5V, T_A=27°C, (Min/Max specs are over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
ISO1176						
t_{PHL}, t_{PLH}	Propagation delay	V_{CC1} at 5 V, V_{CC2} at 5 V			50	ns
tsk(p)	Pulse skew ($\|t_{PHL} - t_{PLH}\|$)	V_{CC1} at 5 V, V_{CC2} at 5 V		2	7.5	ns
t_{PHL}, t_{PLH}	Propagation delay	V_{CC1} at 3.3 V, V_{CC2} at 5 V			55	ns
tsk(p)	Pulse skew ($\|t_{PHL} - t_{PLH}\|$)	V_{CC1} at 3.3 V, V_{CC2} at 5 V		2	7.5	ns
t_r, t_f	Differential output rise time and fall time	See Figure 17		2	4	ns
t_{PZH}	Propagation delay time, high-impedance-to-high-level output	DE at V_{CC1}, See Figure 24		13	25	ns
t_{PHZ}	Propagation delay time, high-level-to-high-impedance output			13	25	ns
t_{PZL}	Propagation delay time, high-impedance-to-low-level output	DE at V_{CC}, See Figure 25		13	25	ns
t_{PLZ}	Propagation delay time, low-level-to-high-impedance output			13	25	ns

Copyright © 2023 Texas Instruments Incorporated

6.15 Insulation Characteristics Curves

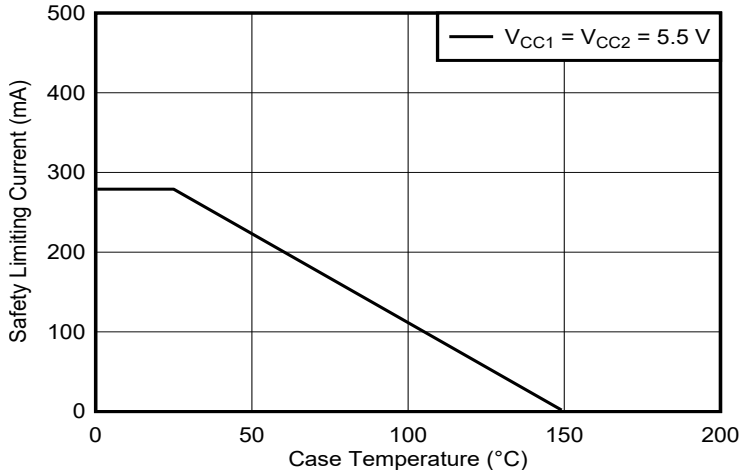


図 6-1. Thermal Derating Curve for Limiting Power per VDE

6.16 Typical Characteristics



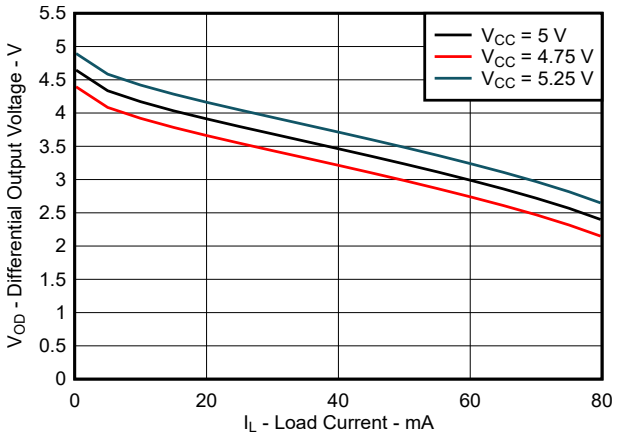


図 6-2. Differential Output Voltage vs Load Current

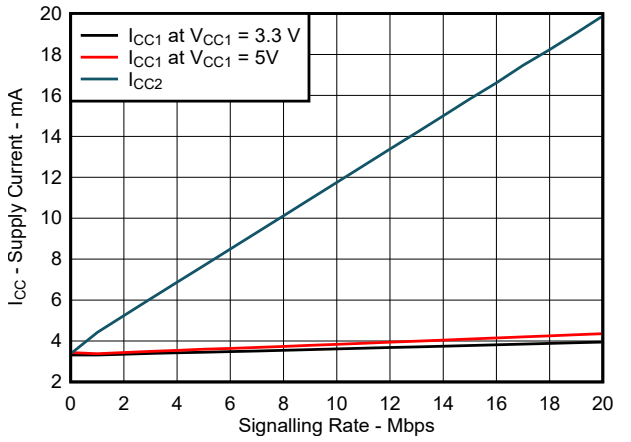


TA = 25°C

図 6-3. RMS Supply Current vs Signaling Rate

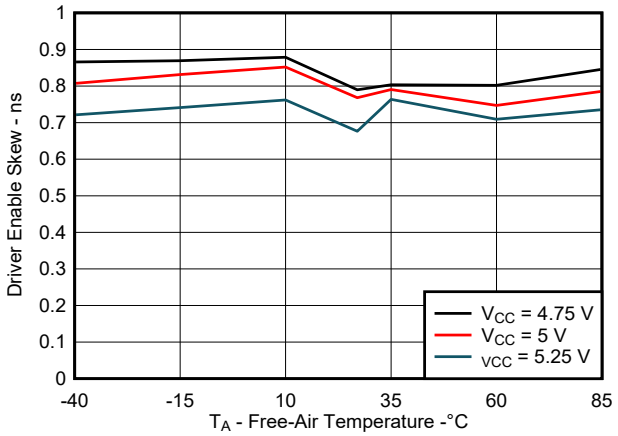


CL = 50 pF RL = 54Ω

図 6-4. Driver Output Transition Skew vs Free-Air Temperature

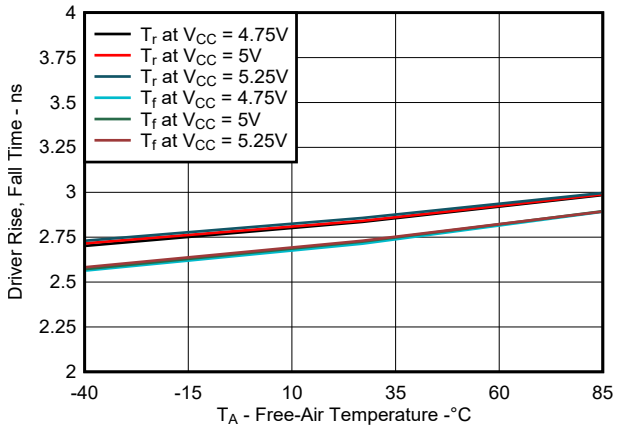


CL = 50 pF RL = 54Ω

図 6-5. Driver Rise and Fall Time vs Free-Air Temperature

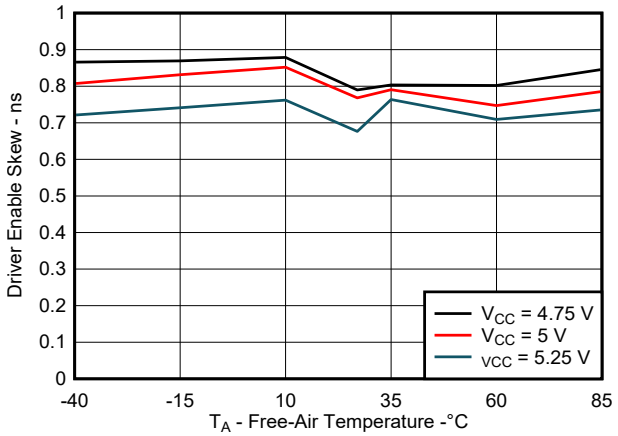

CL = 50 pF RL = 110Ω

図 6-6. Driver Enable Skew vs Free-Air Temperature

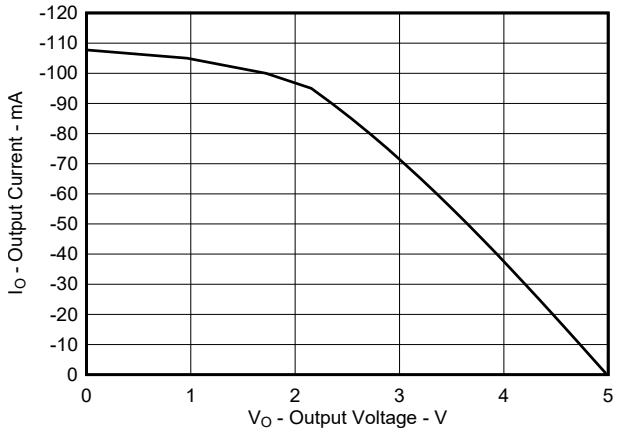


CL = 15 pF TA= 25 °C

図 6-7. High-Level Output Voltage vs High-Level Output Current

Copyright © 2023 Texas Instruments Incorporated

6.16 Typical Characteristics (continued)

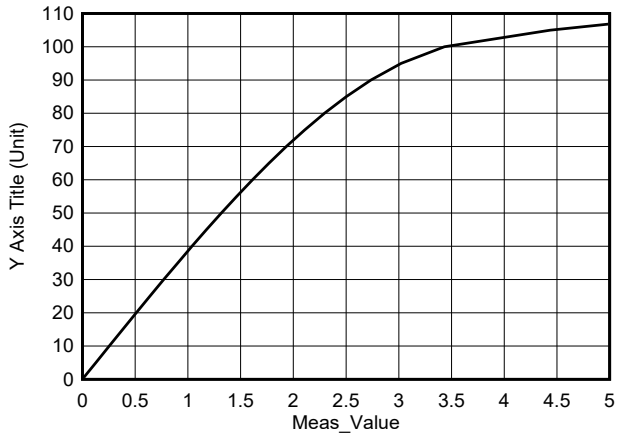

C_L = 15 pF

T_A= 25 °C

6-8. Low-Level Output Voltage vs Low-Level Output Current

7 Parameter Measurement Information

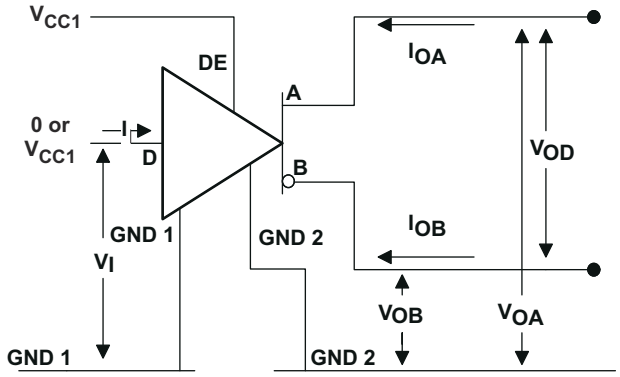


図 7-1. Open Circuit Voltage Test Circuit

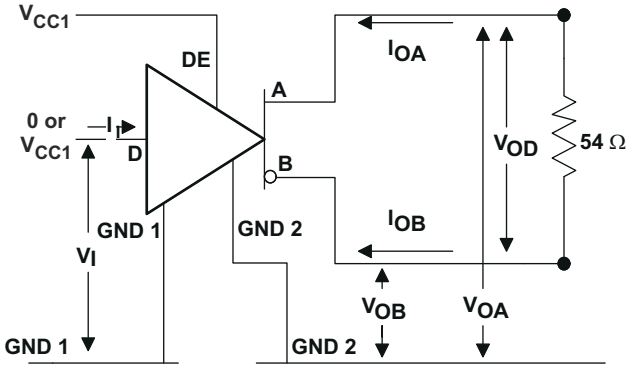


図 7-2. V_{OD} Test Circuit

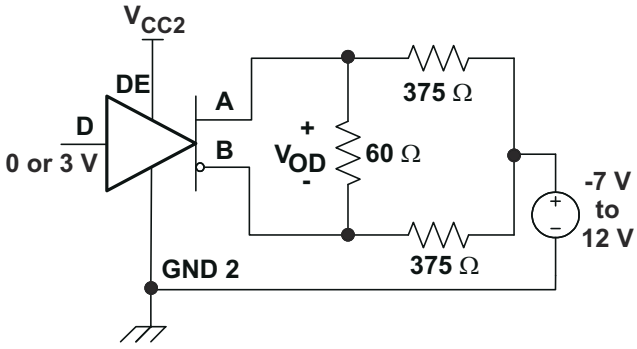


図 7-3. Driver V_{OD} With Common-Mode Loading Test Circuit

Copyright © 2023 Texas Instruments Incorporated

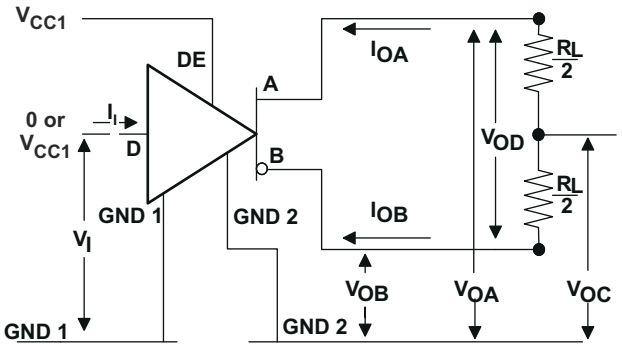


図 7-4. Driver V_{OD} and V_{OC} Without Common-Mode Loading Test Circuit

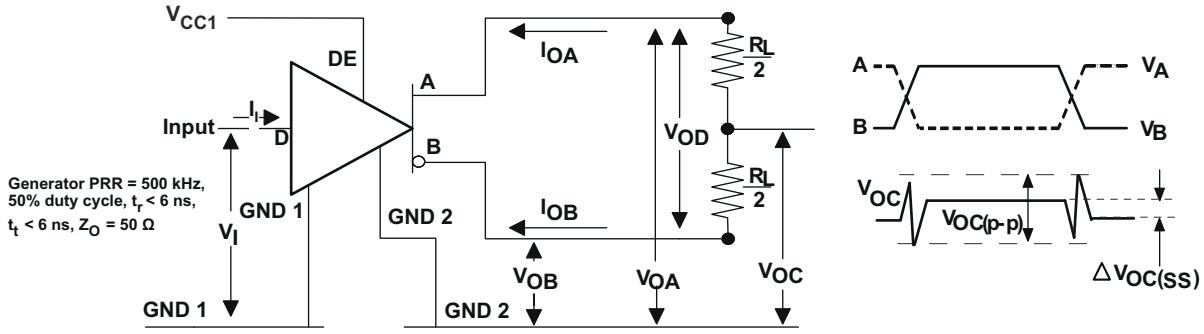


図 7-5. Steady-State Output Voltage Test Circuit and Voltage Waveforms

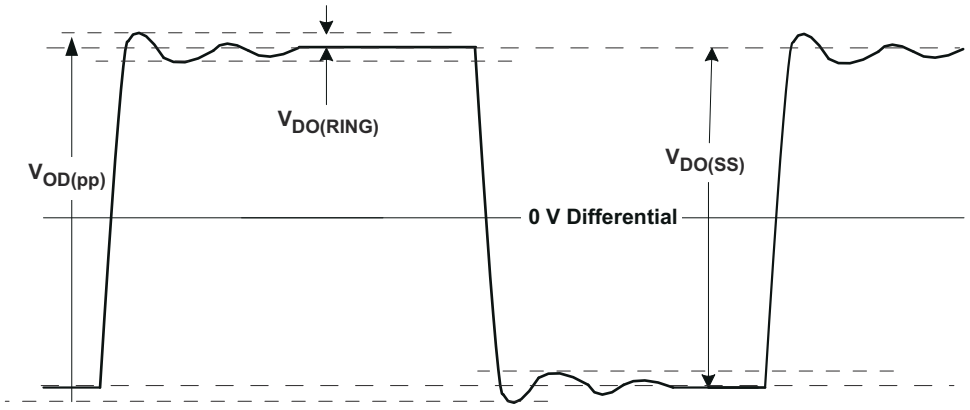


図 7-6. $V_{OD(RING)}$ Waveform and Definitions

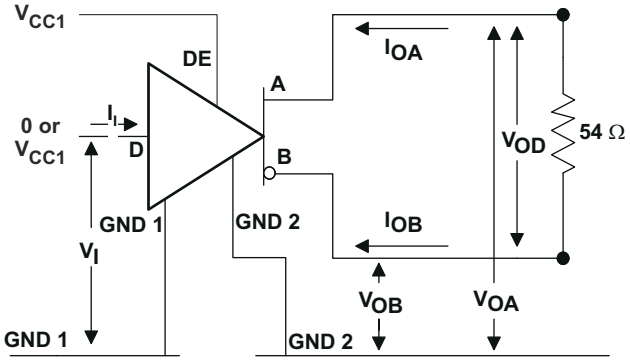


図 7-7. Input Voltage Hysteresis Test Circuit

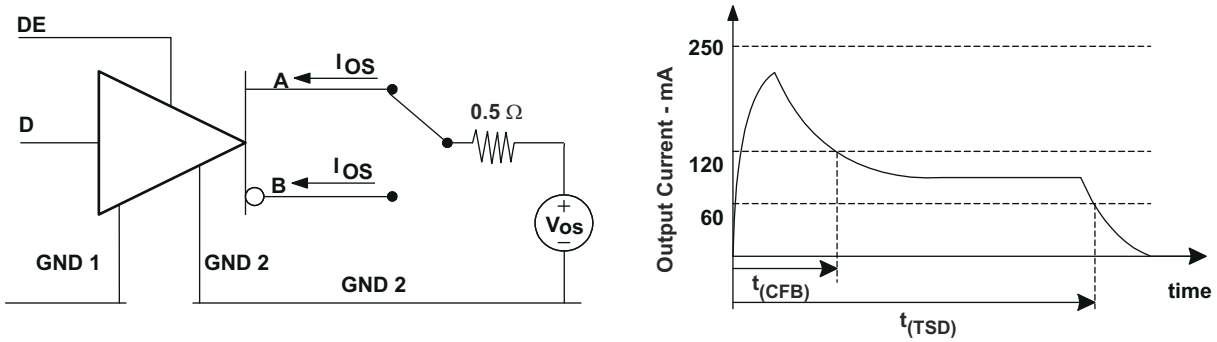


図 7-8. Driver Short-Circuit Test Circuit and Waveforms (Short-Circuit Applied at Time t=0)

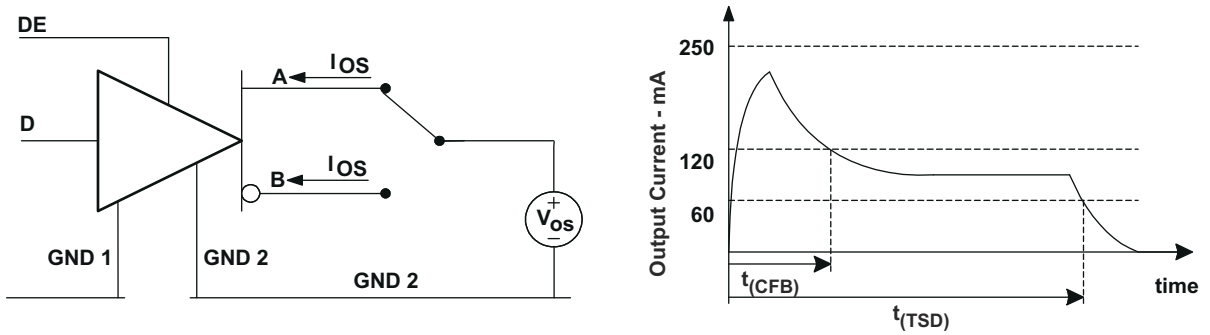


図 7-9. $I_{OS(SS)}$ Steady State Short-Circuit Output Current Test Circuit

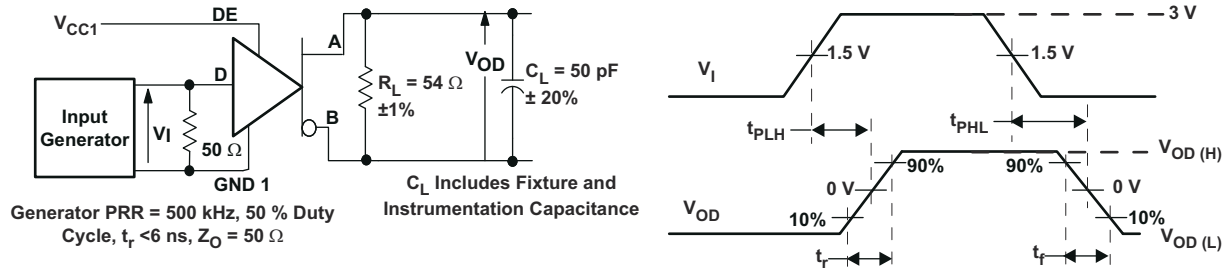


図 7-10. Driver Switching Test Circuit and Waveforms

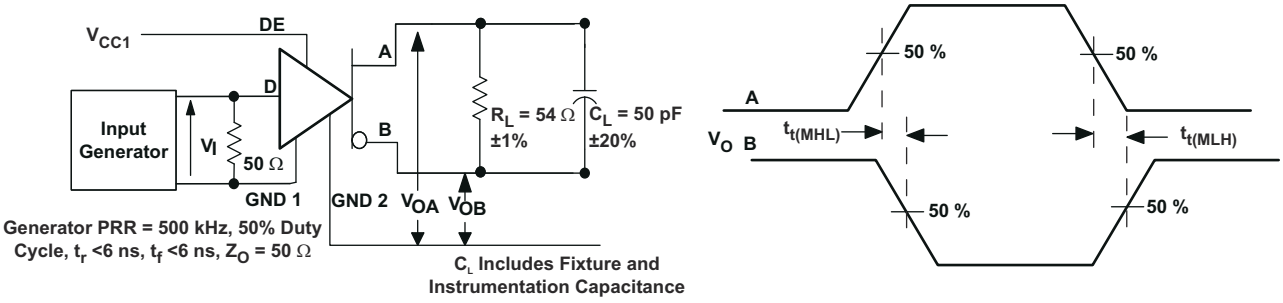


図 7-11. Driver Output Transition Skew Test Circuit and Waveforms

Copyright © 2023 Texas Instruments Incorporated

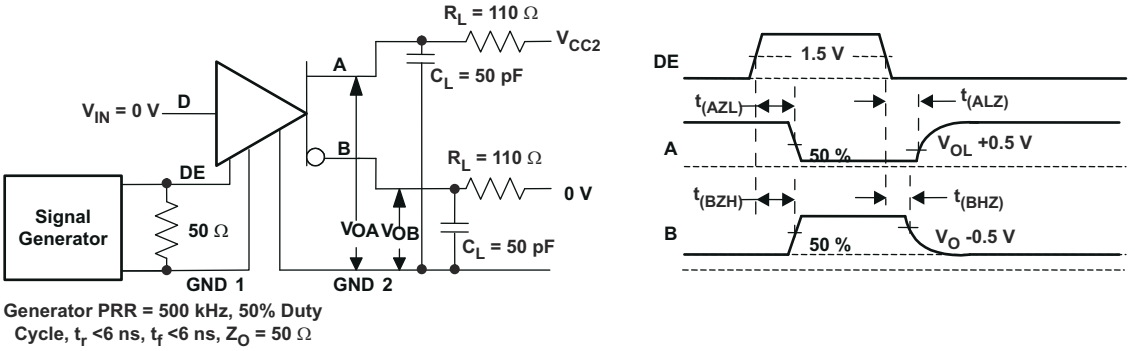


図 7-12. Driver Enable and Disable Test, D at Logic Low Test Circuit and Waveforms

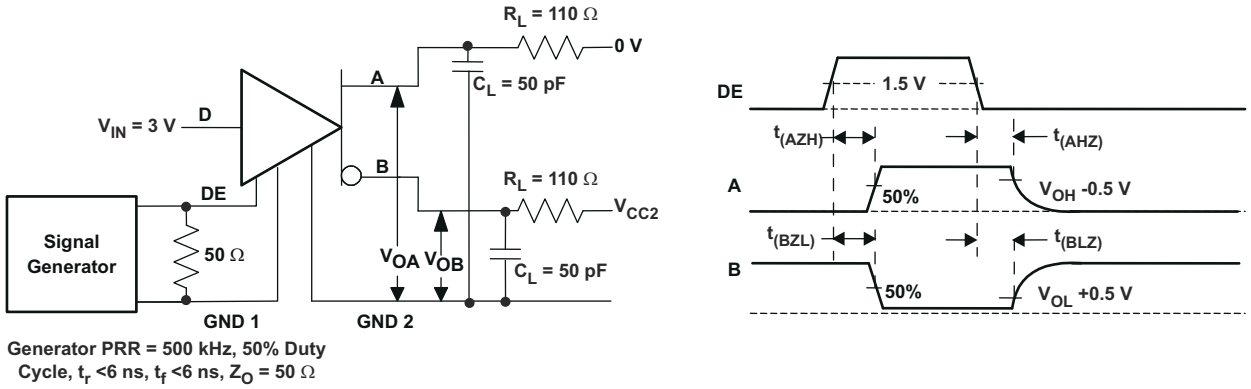


図 7-13. Driver Enable and Disable Test, D at Logic High Test Circuit and Waveforms

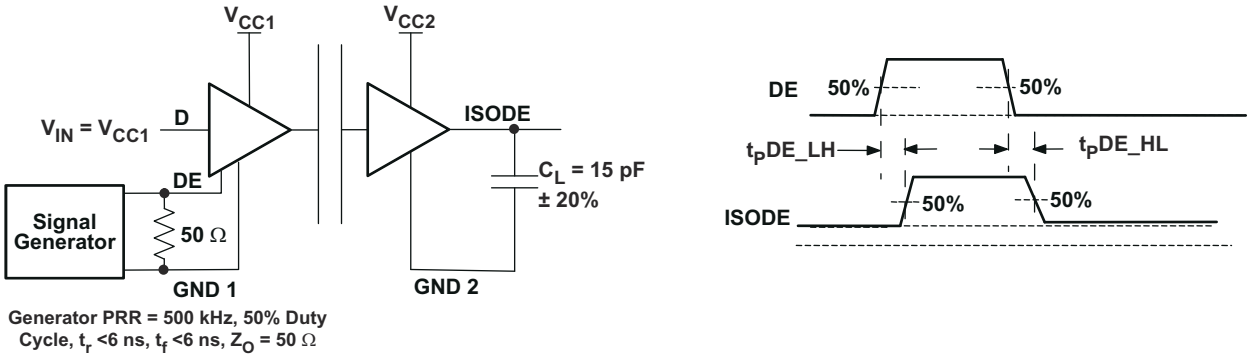


図 7-14. DE to ISODE Prop Delay Test Circuit and Waveforms

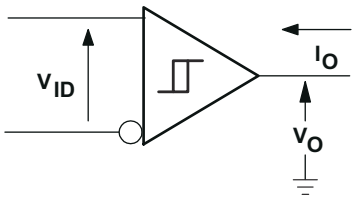


図 7-15. Receiver DC Parameter Definitions

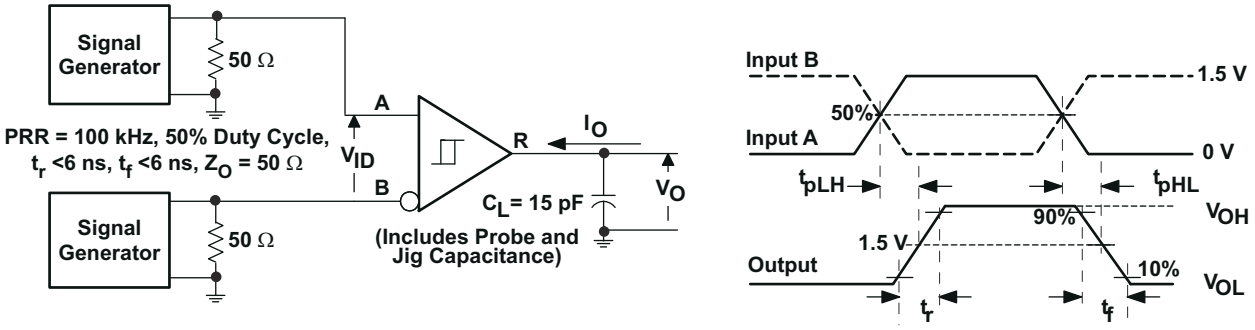


図 7-16. Receiver Switching Test Circuit and Waveforms

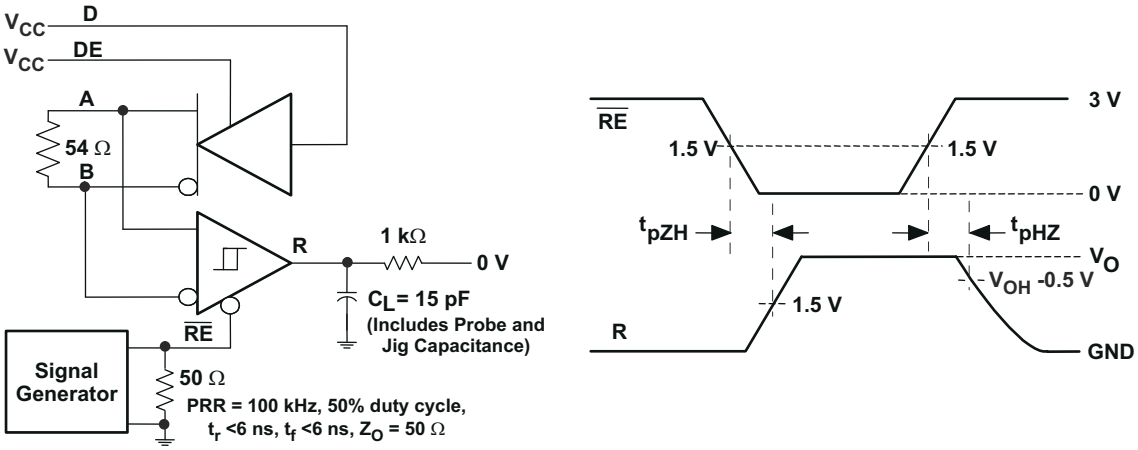


図 7-17. Receiver Enable Test Circuit and Waveforms, Data Output High

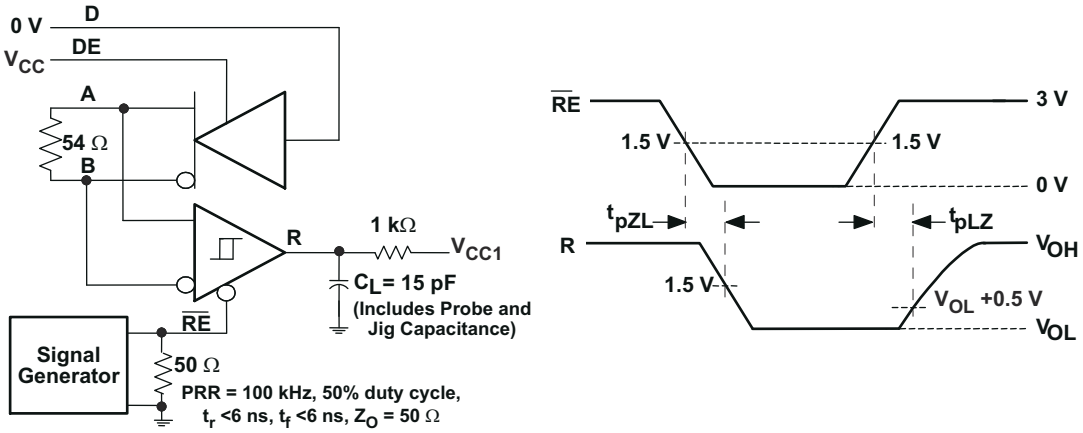


図 7-18. Receiver Enable Test Circuit and Waveforms, Data Output Low

Copyright © 2023 Texas Instruments Incorporated

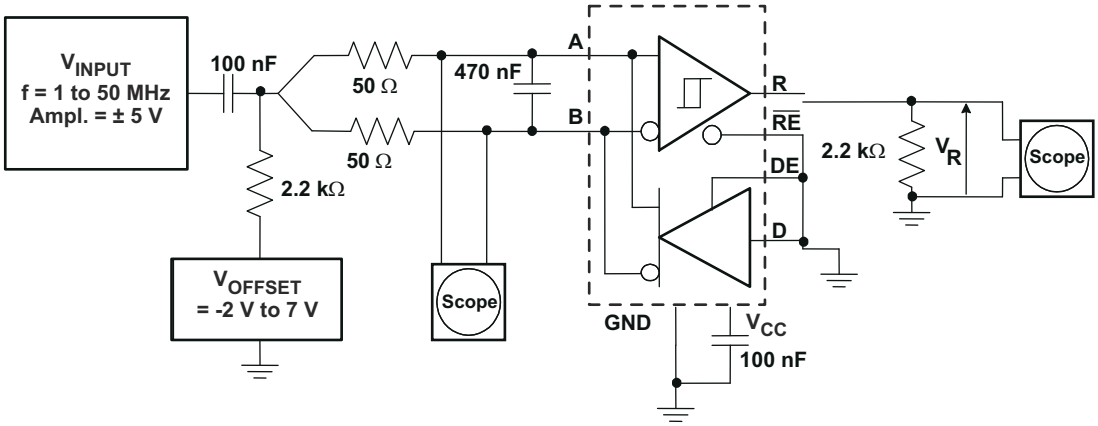


図 7-19. Common-Mode Rejection Test Circuit

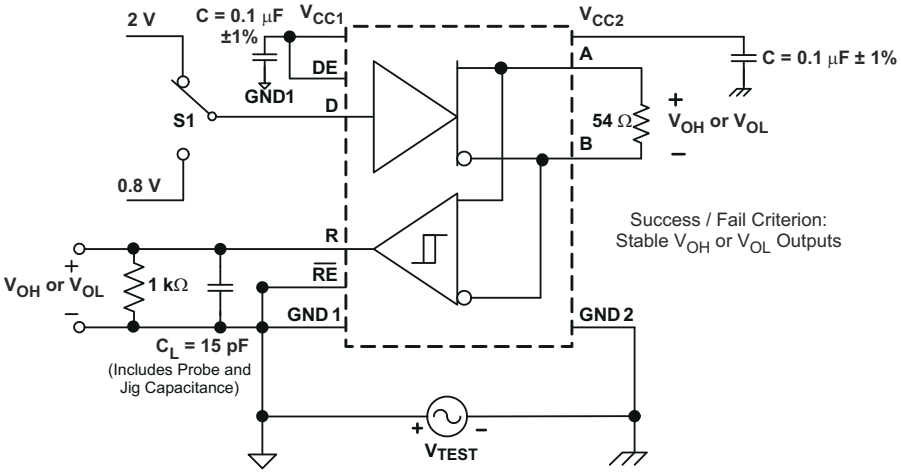


図 7-20. Common-Mode Transient Immunity Test Circuit

8 Detailed Description


8.1 Overview

The ISO1176 is an isolated half-duplex differential line transceiver that meets the requirements of EN 50170 and TIA/EIA 485/422 applications. The device is rated to provide galvanic isolation of up to 2500 V_{RMS} for 60 s per UL 1577. The device has active-high driver enable and active-low receiver enable functions to control the data flow. The device has maximum data transmission speed of 40 Mbps.

When the driver enable pin, DE, is logic high, the differential outputs A and B follow the logic states at data input D. A logic high at D causes A to turn high and B to turn low. In this case, the differential output voltage defined as $V_{OD} = V_{(A)} – V_{(B)}$ is positive. When D is low, the output states reverse, B turns high, A becomes low, and V_{OD} is negative. When DE is low, both outputs turn high-impedance. In this condition, the logic state at D is irrelevant. The DE pin has an internal pulldown resistor to ground, thus when left open the driver is disabled (high-impedance) by default. The D pin has an internal pullup resistor to V_{CC}, thus, when left open while the driver is enabled, output A turns high and B turns low.

When the receiver enable pin, $\overline{RE}$, is logic low, the receiver is enabled. When the differential input voltage defined as $V_{ID} = V_{(A)} – V_{(B)}$ is positive and higher than the positive input threshold, V_{IT+}, the receiver output, R, turns high. When V_{ID} is negative and less than the negative and lower than the negative input threshold, $V_{IT–}$, the receiver output, R, turns low. If V_{ID} is between V_{IT+} and $V_{IT–}$ the output is indeterminate. When $\overline{RE}$ is logic high or left open, the receiver output is high-impedance and the magnitude and polarity of V_{ID} are irrelevant. Internal biasing of the receiver inputs causes the output to go failsafe-high when the transceiver is disconnected from the bus (open-circuit), the bus lines are shorted (short-circuit), or the bus is not actively driven (idle bus).

8.2 Functional Block Diagram

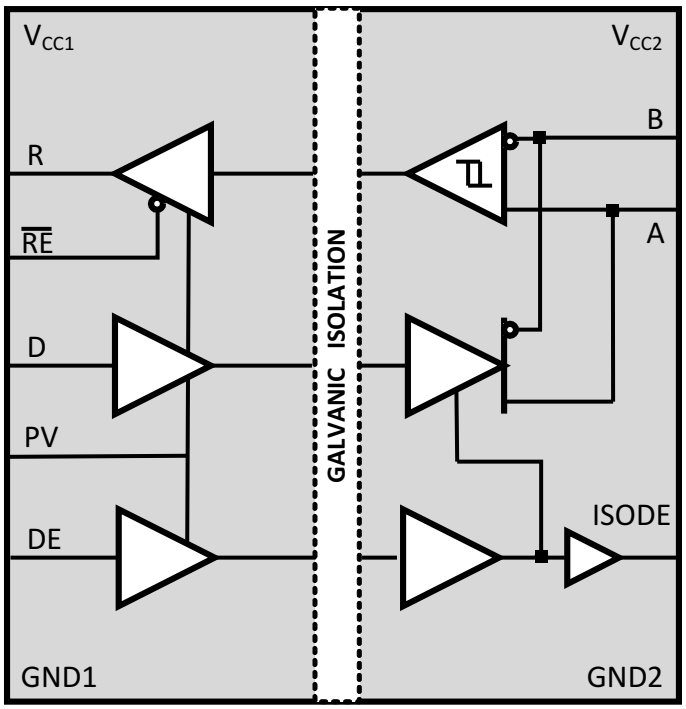

Copyright © 2023 Texas Instruments Incorporated

8.3 Device Functional Modes

表 8-1. Driver Function Table

V_{CC1}	V_{CC2}	POWER VALID (PV) (ISO1176)	INPUT (D)	ENABLE INPUT (DE)	ENABLE OUTPUT (ISODE)	OUTPUTS	
						A	B
PU	PU	H or open	H	H	H	H	L
PU	PU	H or open	L	H	H	L	H
PU	PU	H or open	X	L	L	Z	Z
PU	PU	H or open	X	open	L	Z	Z
PU	PU	H or open	open	H	H	H	L
PD	PU	X	X	X	L	Z	Z
PU	PD	X	X	X	L	Z	Z
PD	PD	X	X	X	L	Z	Z
X	X	L	X	X	L	Z	Z

表 8-2. Receiver Function Table

V_{CC1}	V_{CC2}	POWER VALID (PV) (ISO1176)	DIFFERENTIAL INPUT $V_{ID} = (V_A – V_B)$	ENABLE ($\overline{RE}$)	OUTPUT (R)
PU	PU	H or open	$–0.01\ V \le V_{ID}$	L	H
PU	PU	H or open	$–0.2\ V < V_{ID} < –0.01\ V$	L	?
PU	PU	H or open	$V_{ID} \le –0.2\ V$	L	L
PU	PU	H or open	X	H	Z
PU	PU	H or open	X	open	Z
PU	PU	H or open	Open-circuit	L	H
PU	PU	H or open	Short-circuit	L	H
PU	PU	H or open	Idle (terminated) bus	L	H
PD	PU	X	X	X	Z
PU	PD	H or open	X	L	H
PD	PD	X	X	X	Z
X	X	L	X	X	Z

Copyright © 2023 Texas Instruments Incorporated

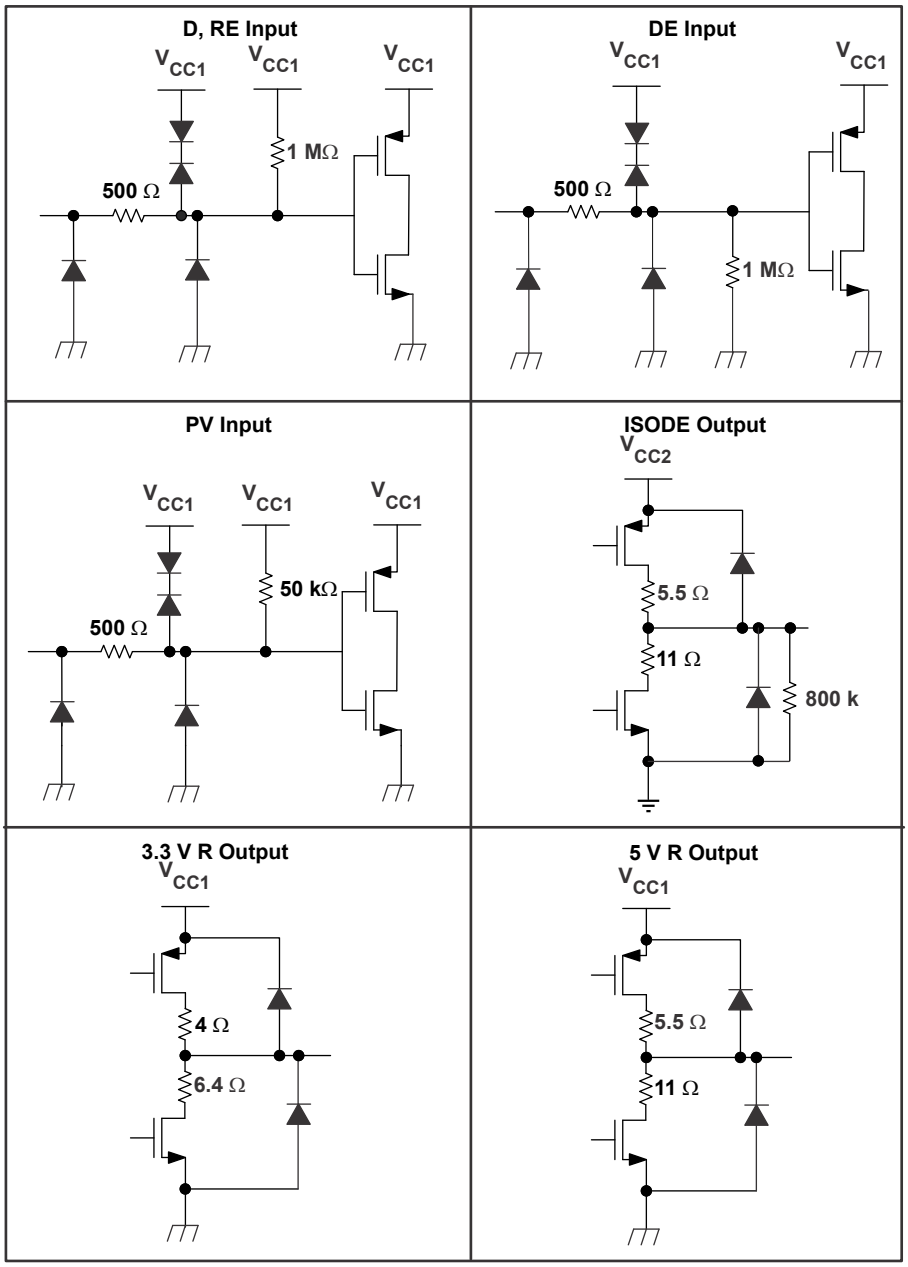


図 8-1. Equivalent I/O Schematics

Copyright © 2023 Texas Instruments Incorporated

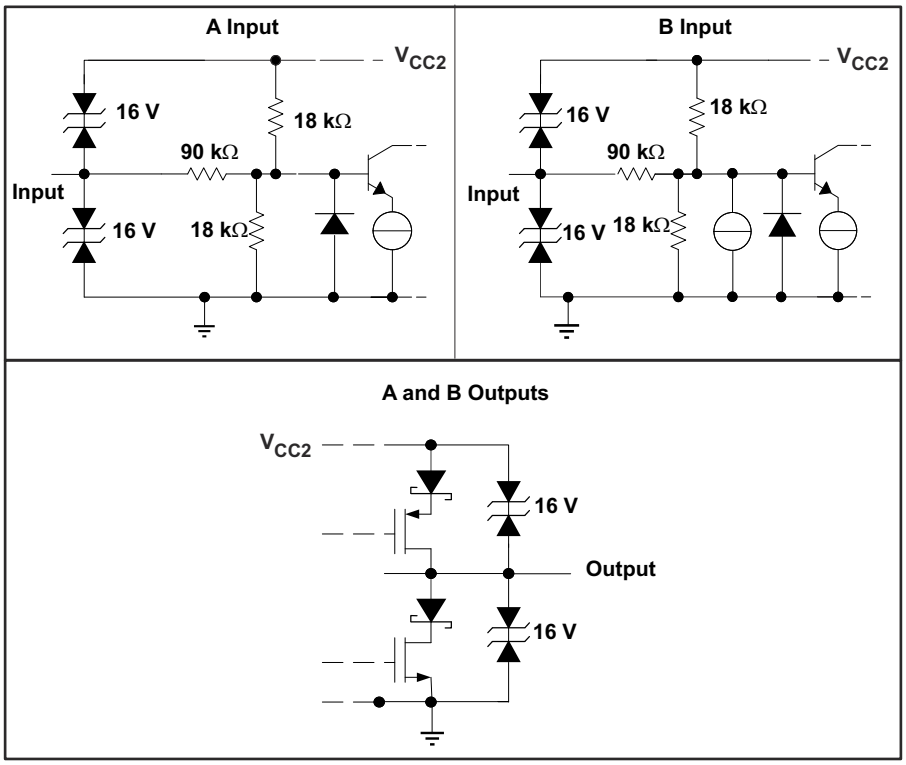


図 8-2. Equivalent I/O Schematics for A and B Inputs and Outputs

9 Application and Implementation


注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

9.1 Application Information

The ISO1176 device consists of a RS-485 transceiver, commonly used for asynchronous data transmissions. For half-duplex transmission, only one pair is shared for both transmission and reception of data. To eliminate line reflections, each cable end is terminated with a termination resistor, R(T), whose value matches the characteristic impedance, Z0, of the cable. This method, known as parallel termination, allows for higher data rates over longer cable length.

9.2 Typical Application

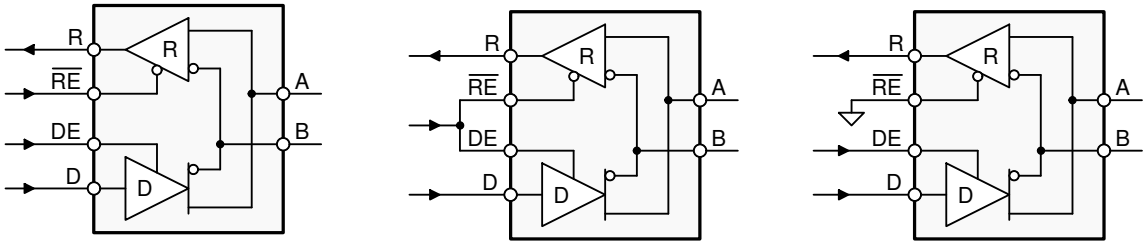

a) Independent driver and receiver enable signals

b) Combined enable signals for use as directional control pin

c) Receiver always on

Copyright © 2016, Texas Instruments Incorporated

図 9-1. Half-Duplex Transceiver Configurations

9.2.1 Design Requirements

RS-485 is a robust electrical standard suitable for long-distance networking that may be used in a wide range of applications with varying requirements, such as distance, data rate, and number of nodes.

表 9-1. Design Parameters

PARAMETER	VALUE
Pullup and Pulldown Resistors	1 kΩ to 10 kΩ
Decoupling Capacitors	100 nF

9.2.2 Detailed Design Procedure

Isolating of a circuit insulates it from other circuits and earth, so that noise voltage develops across the insulation rather than circuit components. The most common noise threat to data-line circuits is voltage surges or electrical fast transients that occur after installation. The transient ratings of the ISO1176 standard are sufficient for all but the most severe installations. However, some equipment manufacturers use ESD generators to test equipment transient susceptibility. This practice can exceed insulation ratings. ESD generators simulate static discharges that may occur during device or equipment handling with low-energy but high-voltage transients.

Copyright © 2023 Texas Instruments Incorporated

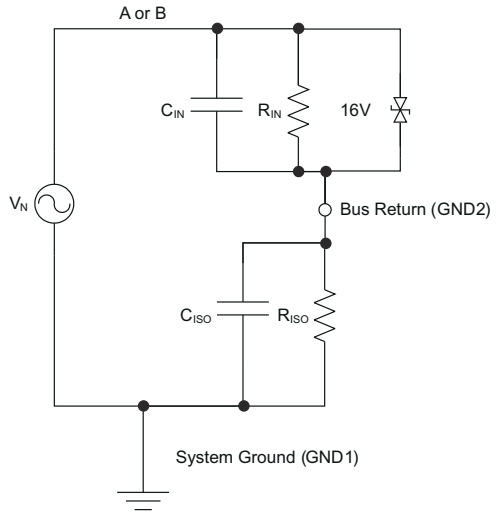


図 9-2. Device Model for Static Discharge Testing

図 9-2 models the ISO1176 bus IO connected to a noise generator. C_{IN} and R_{IN} is the device, and any other stray or added capacitance or resistance across the A or B pin to GND2. C_{ISO} and R_{ISO} is the capacitance and resistance between GND1 and GND2 of the ISO1176, plus those of any other insulation (transformer, and so forth). Stray inductance is assumed to be negligible.

9.2.2.1 Transient Voltages

From this model, the voltage at the isolated bus return is

$$v_{GND2} = v_N \frac{Z_{ISO}}{Z_{ISO} + Z_{IN}} \tag{1}$$

and is always less than 16 V from V_N. If the ISO1176 is tested as a stand-alone device,

- R_{IN}= 6 x 10^4 Ω,
- C_{IN}= 16 x 10^{-12} F,
- R_{ISO}= 10^9 Ω and
- C_{ISO}= 10^{-12} F.

Notice from 図 9-2 that the resistor ratio determines the voltage ratio at low frequencies, and that the inverse capacitance ratio determines the voltage ration at high frequencies. In the stand-alone case and for low frequencies,

$$\frac{v_{GND2}}{v_N} = \frac{R_{ISO}}{R_{ISO} + R_{IN}} = \frac{10^9}{10^9 + 6x10^4} \tag{2}$$

or essentially all of the noise appears across the barrier.

At high frequencies,

$$\frac{v_{GND2}}{v_N} = \frac{1/C_{ISO}}{1/C_{ISO} + 1/C_{IN}} = \frac{1}{1 + C_{ISO}/C_{IN}} = \frac{1}{1 + 1/16} = 0.94 \tag{3}$$

and 94% of V_N appears across the barrier. As long as R_{ISO} is greater than R_{IN} and C_{ISO} is less than C_{IN}, most of the transient noise appears across the isolation barrier, as it should.

Copyright © 2023 Texas Instruments Incorporated

Using ESD generators to test equipment transient susceptibility, or considering product claims of ESD ratings greater than the barrier transient ratings of an isolated interface is not recommended. ESD is best managed through recessing or covering connector pins in a conductive connector shell, and by proper installer training.

9.2.2.2 ISO1176 "Sticky Bit" Issue (Under Certain Conditions)

Summary: In applications with sufficient differential noise on the bus, the output of the ISO1176 receiver may "stick" at an incorrect state for up to 30 µs.

Description: The ISO1176 isolated Profibus (RS-485) transceiver is rated for signaling up to 40 Mbps on twisted-pair bus lines. The receiver thresholds comply with RS-485 and Profibus specifications; an input differential voltage $V_{ID} = V_A – V_B > 200$ mV causes a logic High on the R output, and $V_{ID} < –200$ mV causes a logic Low on the R output. To assure a known receiver output when the bus is shorted or idle, the upper threshold is set below zero, such that $V_{ID} = 0$ mV causes a logic High on the R output. The data sheet specifies a typical upper threshold (V_{IT+}) of –80 mV and a typical lower threshold (V_{IT-}) of –120 mV.

At a signaling rate of 40 Mbps, each valid data bit has a duration of 25 ns. At typical Profibus signaling rates of 12 Mbps or lower, each valid data bit has a duration of 83 ns or more. The ISO1176 correctly sets the R output for each of these valid data bits.

In applications with a high degree of differential noise on the bus lines, it is possible to get short periods when an invalid bus voltage triggers a change in state of the internal receiver circuits. An issue with the digital isolation channel in the ISO1176 may cause the invalid receiver state to "stick" rather than immediately transition back to the correct state. The receiver output will always transition to the correct state, but may stick in the incorrect state for up to 30 µs. This can cause a temporary loss of data.

図 9-3 shows two cases which could result in temporary loss of data.

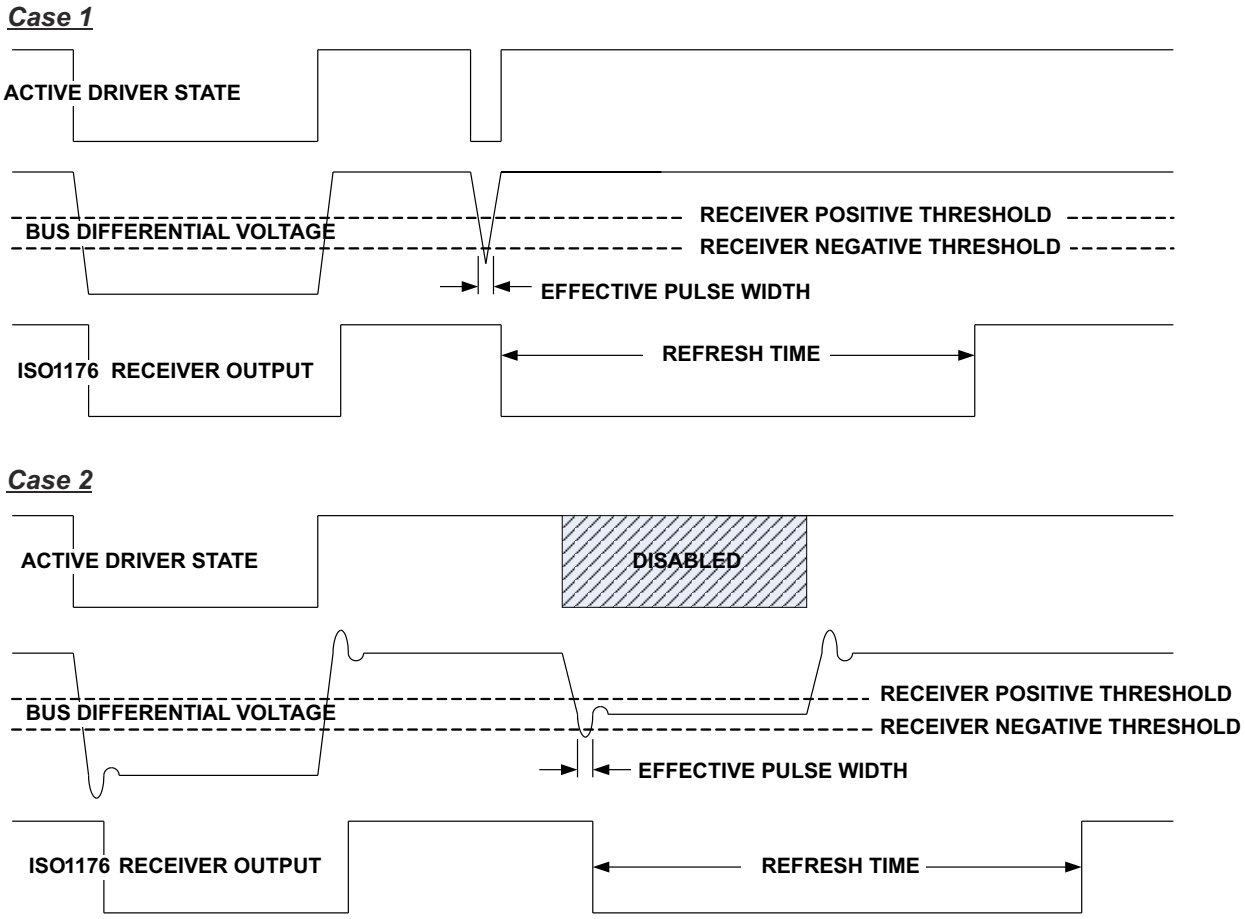


図 9-3. "Sticky Bit" Issue Waveforms

Copyright © 2023 Texas Instruments Incorporated

9.2.3 Application Curve

At maximum working voltage, ISO1176 isolation barrier has more than 28 years of life.

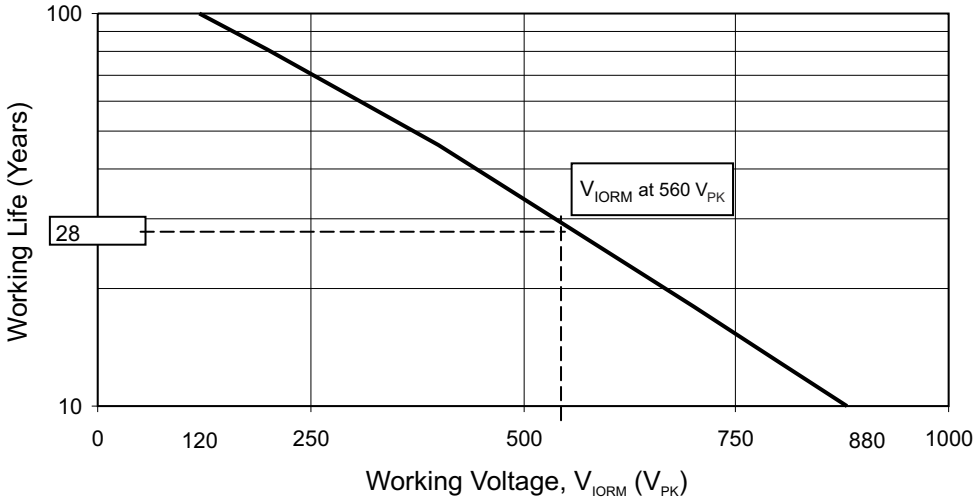


図 9-4. Time-Dependent Dielectric Breakdown Test Results

10 Power Supply Recommendations

To ensure reliable operation at all data rates and supply voltages, TI recommends a 0.1 µF bypass capacitor at input and output supply pins (V_{CC1} and V_{CC2}). The capacitors should be placed as close to the supply pins as possible. If only a single primary-side power supply is available in an application, isolated power can be generated for the secondary-side with the help of a transformer driver such as TI's SN6501. For such applications, detailed power supply design and transformer selection recommendations are available in SN6501 data sheet (SLLSEA0).

Copyright © 2023 Texas Instruments Incorporated

11 Layout

11.1 Layout Guidelines

ON-chip IEC-ESD protection is good for laboratory and portable equipment but never sufficient for EFT and surge transients occurring in industrial environments. Therefore, robust and reliable bus node design requires the use of external transient protection devices. Because ESD and EFT transients have a wide frequency bandwidth from approximately 3-MHz to 3-GHz, high-frequency layout techniques must be applied during PCB design. A minimum of four layers is required to accomplish a low EMI PCB design (see 図 11-1).

- Layer stacking should be in the following order (top-to-bottom): high-speed signal layer, ground plane, power plane, and low-frequency signal layer.
- Placing a solid ground plane next to the high-speed signal layer establishes controlled impedance for transmission line interconnects and provides an excellent low-inductance path for the return current flow.
- Placing the power plane next to the ground plane creates additional high-frequency bypass capacitance of approximately 100 pF/in^2.
- Routing the slower speed control signals on the bottom layer allows for greater flexibility as these signal links usually have margin to tolerate discontinuities such as vias.
- Place the protection circuitry close to the bus connector to prevent noise transients from penetrating your board.
- Use V_{CC} and ground planes to provide low-inductance. High-frequency currents might follow the path of least inductance and not necessarily the path of least resistance.
- Design the protection components into the direction of the signal path. Do not force the transient currents to divert from the signal path to reach the protection device.
- Apply 0.1-µF bypass capacitors as close as possible to the V_{CC}-pins of transceiver, UART, and controller ICs on the board.
- Use at least two vias for V_{CC} and ground connections of bypass capacitors and protection devices to minimize effective via-inductance.
- Use 1-kΩ to 10-kΩ pullup and pulldown resistors for enable lines to limit noise currents in theses lines during transient events.
- Insert pulse-proof resistors into the A and B bus lines if the TVS clamping voltage is higher than the specified maximum voltage of the transceiver bus pins. These resistors limit the residual clamping current into the transceiver and prevent it from latching up.
- While pure TVS protection is sufficient for surge transients up to 1 kV, higher transients require metal-oxide varistors (MOVs) which reduce the transients to a few hundred volts of clamping voltage, and transient blocking units (TBUs) that limit transient current to less than 1 mA.
- Routing the high-speed traces on the top layer avoids the use of vias (and the introduction of their inductances) and allows for clean interconnects between the isolator and the transmitter and receiver circuits of the data link.

If an additional supply voltage plane or signal layer is needed, add a second power and ground plane system to the stack to keep it symmetrical. This makes the stack mechanically stable and prevents it from warping. Also the power and ground plane of each power system can be placed closer together, thus increasing the high-frequency bypass capacitance significantly.

注

For detailed layout recommendations, see Application Note *Digital Isolator Design Guide*, SLLA284.

Copyright © 2023 Texas Instruments Incorporated

11.2 Layout Example

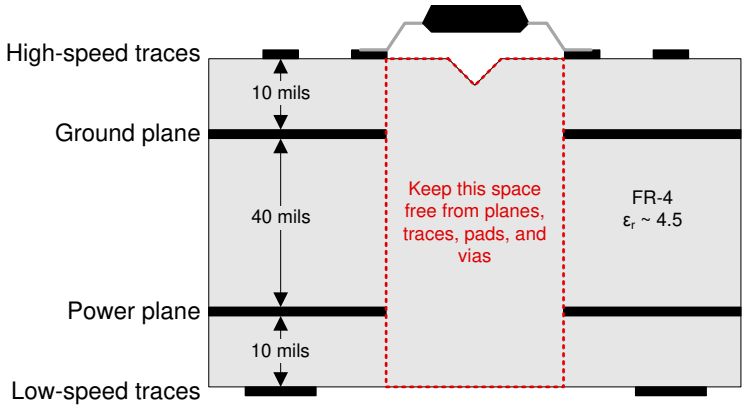


図 11-1. Recommended Layer Stack

12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, *Digital Isolator Design Guide* application report
- Texas Instruments, *Transformer Driver for Isolated Power Supplies* data sheet
- Texas Instruments, *Isolation Glossary* application report

12.2 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の使用条件を参照してください。

12.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.
すべての商標は、それぞれの所有者に帰属します。

12.4 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

12.5 用語集

テキサス・インスツルメンツ用語集　　この用語集には、用語や略語の一覧および定義が記載されています。

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2023 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
ISO1176DW	Obsolete	Production	SOIC (DW) | 16	-	-	Call TI	Call TI	-40 to 85	ISO1176
ISO1176DWR	Active	Production	SOIC (DW) | 16	2000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	ISO1176
ISO1176DWR.A	Active	Production	SOIC (DW) | 16	2000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	ISO1176

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

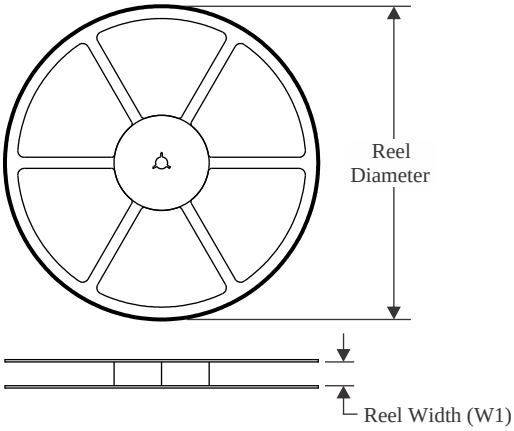


TAPE DIMENSIONS

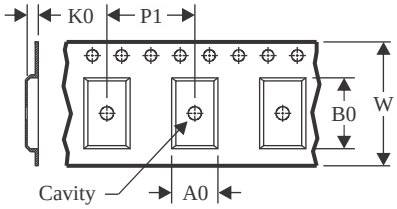

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

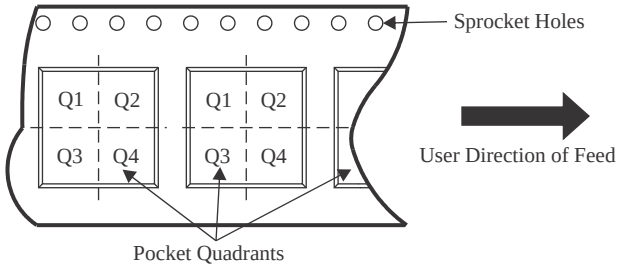

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ISO1176DWR	SOIC	DW	16	2000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

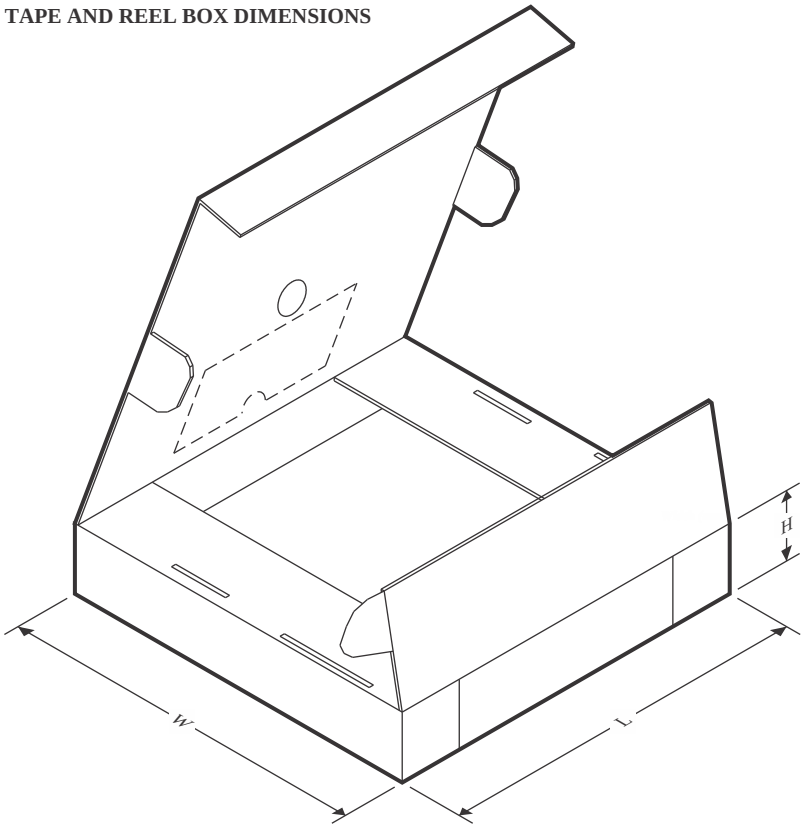

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ISO1176DWR	SOIC	DW	16	2000	353.0	353.0	32.0

GENERIC PACKAGE VIEW


DW 16

SOIC - 2.65 mm max height

7.5 x 10.3, 1.27 mm pitch

SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

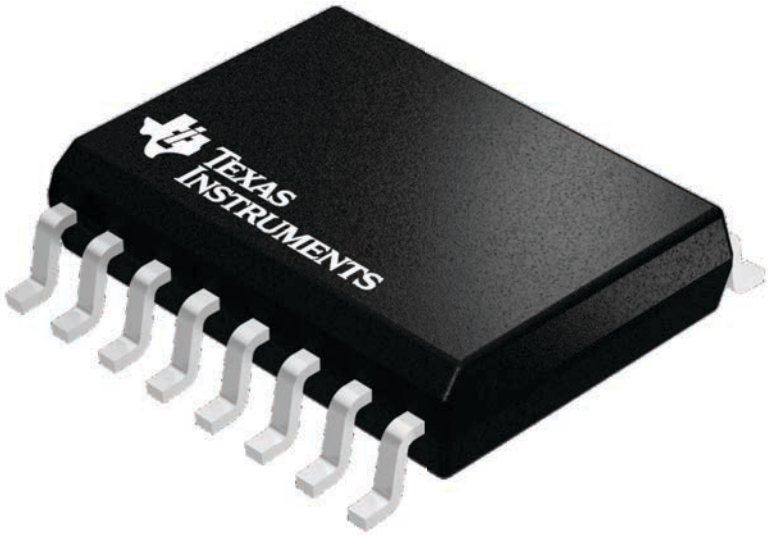

4224780/A

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、 TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月