
LMx38 5A 可変レギュレータ

1 特長

- 7A のピーク出力電流を保証
- 5A の出力電流を保証
- 可変出力電圧：最小 1.2V
- 熱レギュレーションを規定
- 温度に対して一定の電流制限
- P+ 製品拡張テスト済み
- 出力の短絡保護

2 アプリケーション

- 可変電源
- 定電流レギュレータ
- バッテリ チャージャ

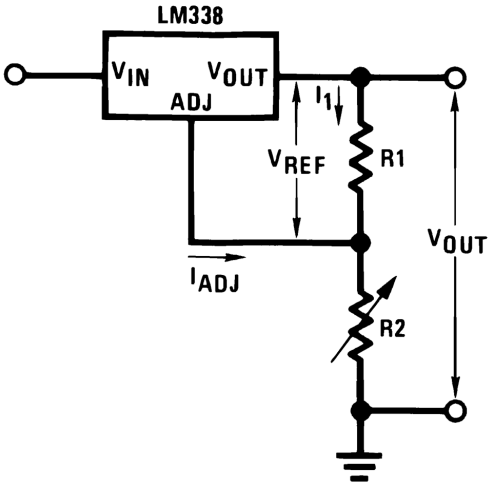

代表的なアプリケーション回路

3 説明

LM138 シリーズは、可変 3 ピン正電圧レギュレータで、1.2V ～ 32V の出力範囲で 5A 以上を供給できます。このデバイスは非常に簡単に使用でき、2 つの抵抗だけで出力電圧を設定できます。周到な回路設計により、負荷およびライン レギュレーションが非常に優れており、多くの商用電源に匹敵します。LM138 ファミリは、標準の 3 リードのトランジスタ パッケージで供給されます。

LM138 ファミリ独自の機能として、時間依存の電流制限が挙げられます。電流制限回路により、短い時間ならレギュレータから最高 12A のピーク電流を出力できます。この機能により、LM138 は最大負荷の状況で大きな過渡負荷に対応でき、スタートアップを高速化できます。持続的な負荷状況では、レギュレータを保護するために電流制限が安全な値まで低下します。チップには熱過負荷保護機能と、電力トランジスタの安全領域保護も組み込まれています。過負荷保護機能は、調整 (ADJ) ピンが誤って接続解除された場合でも動作し続けます。

デバイスが入力フィルタ コンデンサから 6 インチ以上離れていない限り、通常はコンデンサ不要です。6 インチ以上離れている場合には、入力バイパス コンデンサが必要です。出力コンデンサを追加すると過渡応答を改善できます。また、調整ピンをバイパスするとレギュレータのリップル除去率が改善されます。

パッケージ情報

部品番号	パッケージ (1)	パッケージ サイズ(2)
LM138	NDS (TO-CAN、2)	38.94mm × 24.89mm
LM338	NDE (TO-220、3)	10.16mm × 4.58mm
	NDS (TO-CAN、2)	38.94mm × 24.89mm

(1) 詳細については、*メカニカル、パッケージ、および注文情報*をご覧ください。
(2) パッケージ サイズ (長さ × 幅) は公称値であり、該当する場合はピンも含まれます。

このリソースの元の言語は英語です。翻訳は概要を便宜的に提供するもので、自動化ツール (機械翻訳) を使用していることがあり、TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、ti.com で必ず最新の英語版をご参照くださいますようお願いいたします。

LM138 は、固定レギュレータやディスクリート設計の置き換え以外にも、広範なアプリケーションに有用です。本レギュレータはフローティング状態で実装され、入出力電圧差のみを受けるため、入出力電圧差の最大値を超過しない限り、数百ボルトの電源でもレギュレート可能です。ただし、出力をグランドに短絡しないでください。LM138 シリーズの部品番号で、接尾辞 *K* があるものは標準のスチール製 TO-CAN パッケージで供給され、接尾辞 *T* があるものは TO-220 プラスチックパッケージで供給されます。LM138 は T_J = –55°C ～ 150°C の定格であり、LM338 は T_J = 0°C ～ 125°C の定格です。


Copyright © 2025 Texas Instruments Incorporated

Table of Contents

1 特長 ... 1
2 アプリケーション ... 1
3 説明 ... 1
4 Pin Configuration and Functions ... 4
5 Specifications ... 5
5.1 Absolute Maximum Ratings ... 5
5.2 Recommended Operating Conditions ... 5
5.3 Thermal Information ... 5
5.4 Electrical Characteristics: LM138 ... 6
5.5 Electrical Characteristics: LM338 ... 7
5.6 Typical Characteristics ... 8
6 Detailed Description ... 11
6.1 Overview ... 11
6.2 Functional Block Diagram ... 11
6.3 Feature Description ... 11
6.4 Device Functional Modes ... 12
7 Application and Implementation ... 13
7.1 Application Information ... 13
7.2 Typical Applications ... 14
7.3 System Examples ... 18
7.4 Power Supply Recommendations ... 28
7.5 Layout ... 28
8 Device and Documentation Support ... 30
8.1 ドキュメントの更新通知を受け取る方法 ... 30
8.2 サポート・リソース ... 30
8.3 Trademarks ... 30
8.4 静電気放電に関する注意事項 ... 30
8.5 用語集 ... 30
9 Revision History ... 30
10 Mechanical, Packaging, and Orderable Information ... 30


Copyright © 2025 Texas Instruments Incorporated

4 Pin Configuration and Functions

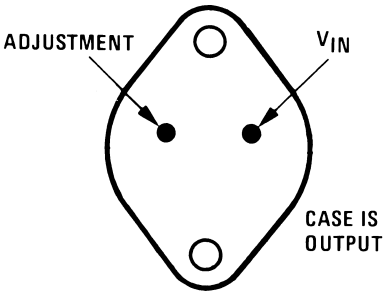

Package Number NDS0002A

図 4-1. NDS Package, 2-Pin TO-CAN (Bottom View)

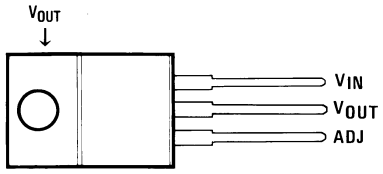

Package Number NDE0003B

図 4-2. NDE Package, 3-Pin TO-220 (Front View)

表 4-1. Pin Functions

PIN			TYPE	DESCRIPTION
NAME	TO-220	TO-CAN		
ADJ	1	1	I	Output voltage adjustment pin. Connect to a resistor divider to set V_O.
V_{IN}	3	2	I	Supply input pin.
V_{OUT}	2	Case	O	Voltage output pin.

Copyright © 2025 Texas Instruments Incorporated

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
Input and output voltage differential		–0.3	40	V
Power dissipation		Internally limited		
Lead temperature	TO-3 package (soldering, 10 s)		300	°C
	TO-220 package (soldering, 4 s)		260	
Operating temperature, T_J	LM138	–55	150	°C
	LM338	0	125	
Storage temperature, T_{stg}		–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

5.2 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
Input-to-output voltage differential	3	40	V
Output current		5	A

5.3 Thermal Information

THERMAL METRIC(1)		LM338	LM338		UNIT
		NDS (TO-CAN)	NDE (TO-220)	NDS (TO-CAN)	
		2 PINS	3 PINS	2 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	35	22.9	35	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	1	15.7	1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	—	4.1	—	°C/W
ψ_{JT}	Junction-to-top characterization parameter	—	2.1	—	°C/W
ψ_{JB}	Junction-to-board characterization parameter	—	4.1	—	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	—	0.7	—	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application note.

Copyright © 2025 Texas Instruments Incorporated

5.4 Electrical Characteristics: LM138

Values apply for T_J = 25°C; $V_{IN} – V_{OUT}$ = 5 V; and I_{OUT} = 10 mA (unless otherwise noted).(1)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{REF}	Reference voltage	3 V ≤ ($V_{IN} – V_{OUT}$) ≤ 35 V, 10 mA ≤ I_{OUT} ≤ 5 A, P ≤ 50 W, T_J = –55°C to 150°C		1.19	1.24	1.29	V
V_{RLINE}	Line regulation	3 V ≤ ($V_{IN} – V_{OUT}$) ≤ 35 V(2)	T_J = 25°C		0.005%	0.01%	V
			T_J = –55°C to 150°C		0.02%	0.04%	V
V_{RLOAD}	Load regulation	10 mA ≤ I_{OUT} ≤ 5 A(2)	T_J = 25°C		0.1%	0.3%	
			T_J = –55°C to 150°C		0.3%	0.6%	
	Thermal regulation	20 ms pulse			0.002%	0.01%	W
I_{ADJ}	Adjustment pin current	T_J = –55°C to 150°C			45	100	µA
ΔI_{ADJ}	Adjustment pin current change	10 mA ≤ I_{OUT} ≤ 5 A, 3 V ≤ ($V_{IN} – V_{OUT}$) ≤ 35 V, T_J = –55°C to 150°C			0.2	5	µA
$\Delta V_{R/T}$	Temperature stability	T_J = –55°C to 150°C			1%		
$I_{LOAD(MIN)}$	Minimum load current	$V_{IN} – V_{OUT}$ = 35 V, T_J = –55°C to 150°C			3.5	5	mA
I_{CL}	Current limit	$V_{IN} – V_{OUT}$ ≤ 10 V					
		DC, T_J = –55°C to 150°C		5	8		A
		0.5-ms peak, T_J = –55°C to 150°C		7	12		A
		$V_{IN} – V_{OUT}$ = 30 V			1	1	A
V_N	RMS output noise (percent of V_{OUT})	10 Hz ≤ f ≤ 10 kHz			0.003%		
$\Delta V_R/\Delta V_{IN}$	Ripple rejection ratio	V_{OUT} = 10 V, f = 120 Hz, C_{ADJ} = 0 µF, T_J = –55°C to 150°C			60		dB
		V_{OUT} = 10 V, f = 120 Hz, C_{ADJ} = 10 µF, T_J = –55°C to 150°C		60	75		dB
	Long-term stability	T_J = 125°C, 1000 Hrs			0.3%	1%	

(1) These specifications are applicable for power dissipation up to 50 W for the TO-3 (NDS) package and 25 W for the TO-220 (NDE) package. Power dissipation is specified at these values up to 15-V input-output differential. Above 15-V differential, power dissipation is limited by internal protection circuitry. All limits (that is, the numbers in the minimum and maximum columns) are specified to TI's AOQL (Average Outgoing Quality Level).

(2) Regulation is measured at a constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specifications for thermal regulation.

Copyright © 2025 Texas Instruments Incorporated

5.5 Electrical Characteristics: LM338

Values apply for T_J = 25°C; $V_{IN} – V_{OUT}$ = 5 V; and I_{OUT} = 10 mA (unless otherwise noted).(1)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{REF}	Reference voltage	3 V ≤ ($V_{IN} – V_{OUT}$) ≤ 35 V, 10 mA ≤ I_{OUT} ≤ 5 A, P ≤ 50 W, T_J = 0°C to 125°C		1.19	1.24	1.29	V
V_{RLINE}	Line regulation	3 V ≤ ($V_{IN} – V_{OUT}$) ≤ 35 V(2)	T_J = 25°C		0.005%	0.03%	V
			T_J = 0°C to 125°C		0.02%	0.06%	V
V_{RLOAD}	Load regulation	10 mA ≤ I_{OUT} ≤ 5 A(2)	T_J = 25°C		0.1	0.5	
			T_J = 0°C to 125°C		0.3	1	
	Thermal regulation	20-ms pulse			0.002%	0.02%	W
I_{ADJ}	Adjustment pin current	T_J = 0°C to 125°C			45	100	µA
ΔI_{ADJ}	Adjustment pin current change	10 mA ≤ I_{OUT} ≤ 5 A, 3 V ≤ ($V_{IN} – V_{OUT}$) ≤ 35 V, T_J = 0°C to 125°C			0.2	5	µA
$\Delta V_{R/T}$	Temperature stability	T_J = 0°C to 125°C			1		
$I_{LOAD(MIN)}$	Minimum load current	$V_{IN} – V_{OUT}$ = 35 V, T_J = 0°C to 125°C			3.5	10	mA
I_{CL}	Current limit	$V_{IN} – V_{OUT}$ ≤ 10 V					
		DC, T_J = 0°C to 125°C		5	8		A
		0.5-ms peak, T_J = 0°C to 125°C		7	12		A
		$V_{IN} – V_{OUT}$ = 30 V				1	A
V_N	RMS output noise (percent of V_{OUT})	10 Hz ≤ f ≤ 10 kHz			0.003%		
$\Delta V_R/\Delta V_{IN}$	Ripple rejection ratio	V_{OUT} = 10 V, f = 120 Hz, C_{ADJ} = 0 µF, T_J = 0°C to 125°C			60		dB
		V_{OUT} = 10 V, f = 120 Hz, C_{ADJ} = 10 µF, T_J = 0°C to 125°C		60	75		dB
	Long-term stability	T_J = 125°C, 1000 Hrs			0.3%	1%	

(1) These specifications are applicable for power dissipation up to 50 W for the TO-3 (NDS) package and 25 W for the TO-220 (NDE) package. Power dissipation is specified at these values up to 15-V input-output differential. Above 15-V differential, power dissipation is limited by internal protection circuitry. All limits (that is, the numbers in the minimum and maximum columns) are specified to TI's AOQL (Average Outgoing Quality Level).

(2) Regulation is measured at a constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specifications for thermal regulation.

Copyright © 2025 Texas Instruments Incorporated

5.6 Typical Characteristics

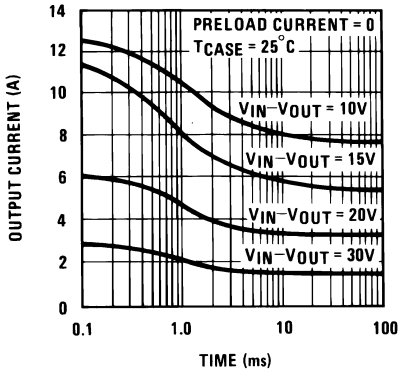


図 5-1. Current Limit

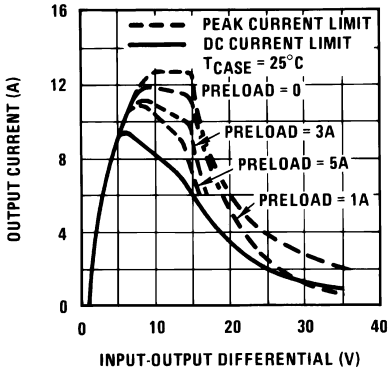


図 5-2. Current Limit

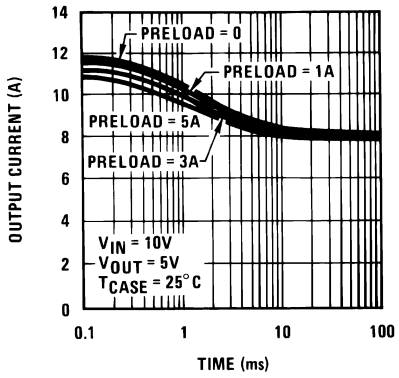


図 5-3. Current Limit

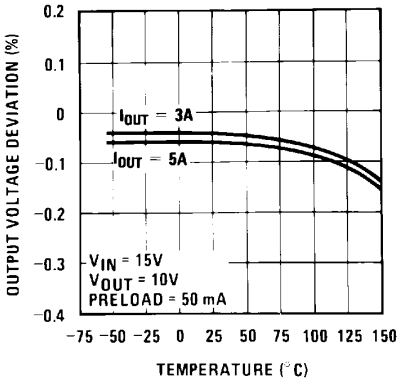


図 5-4. Load Regulation

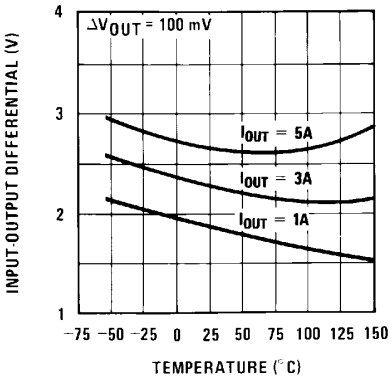


図 5-5. Dropout Voltage

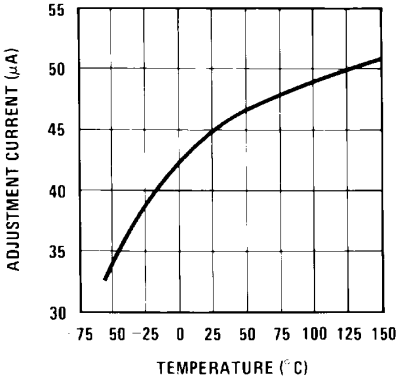


図 5-6. Adjustment Current

Copyright © 2025 Texas Instruments Incorporated

5.6 Typical Characteristics (continued)

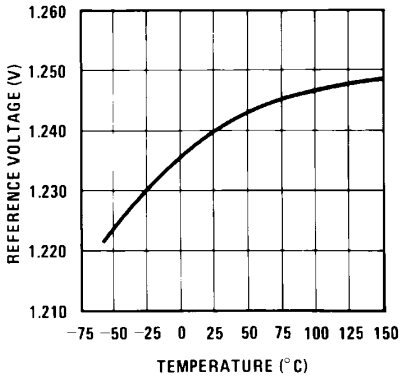


図 5-7. Temperature Stability

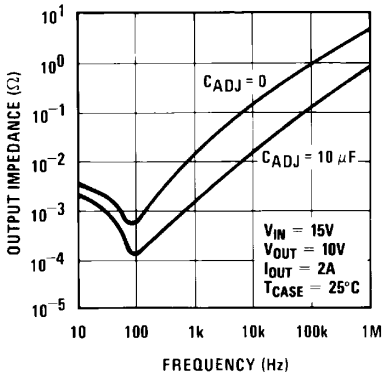


図 5-8. Output Impedance

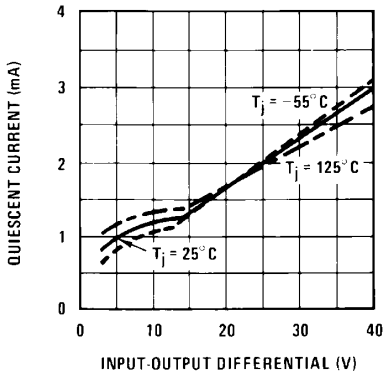


図 5-9. Minimum Operating Current

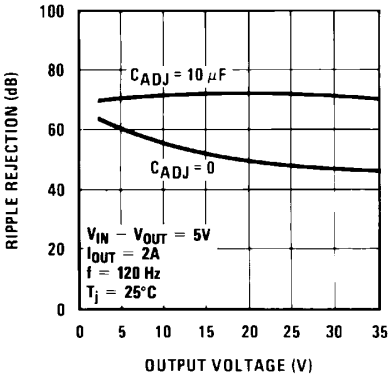


図 5-10. Ripple Rejection

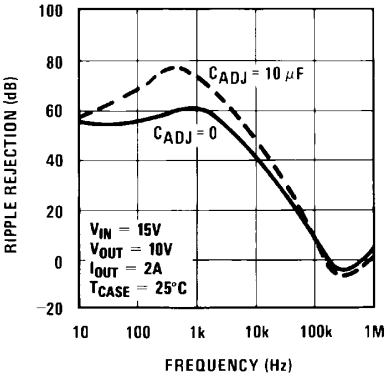


図 5-11. Ripple Rejection

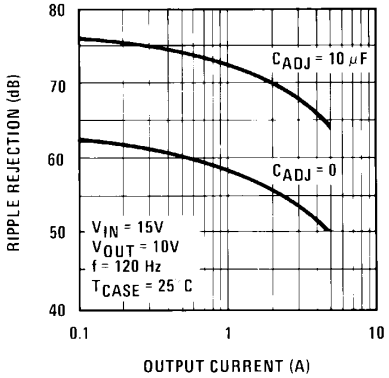


図 5-12. Ripple Rejection

Copyright © 2025 Texas Instruments Incorporated

5.6 Typical Characteristics (continued)

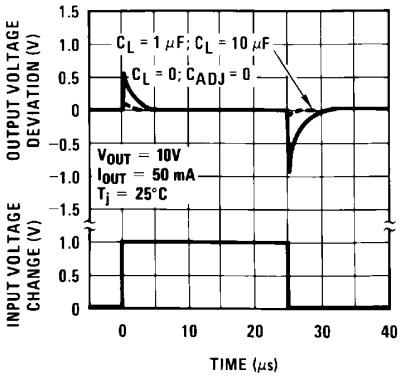


図 5-13. Line Transient Response

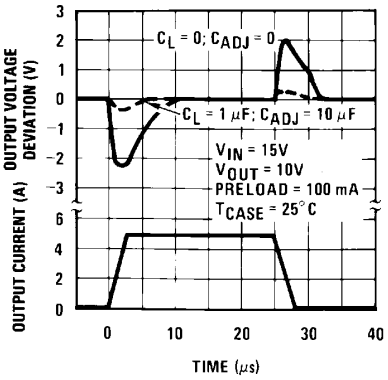


図 5-14. Load Transient Response

Copyright © 2025 Texas Instruments Incorporated


6 Detailed Description

6.1 Overview

The LM138 and LM338 devices are adjustable, three-terminal, positive-voltage regulators capable of supplying more than 5 A over an output-voltage range of 1.2 V to 32 V. It requires only two external resistors to set the output voltage. These devices feature a typical line regulation of 0.005% and typical load regulation of 0.1%. It includes time-dependent current limiting, thermal overload protection, and safe operating area protection. Overload protection remains functional even if the ADJUST terminal is disconnected.

The LM138 and LM338 devices are versatile in their applications, including uses in programmable output regulation and local on-card regulation. Or, by connecting a fixed resistor between the ADJUST and OUTPUT terminals, the LM138 and LM338 devices can function as a precision current regulators. An optional output capacitor can be added to improve transient response. The ADJUST terminal can be bypassed to achieve very high ripple-rejection ratios, which are difficult to achieve with standard three-terminal regulators.

6.2 Functional Block Diagram

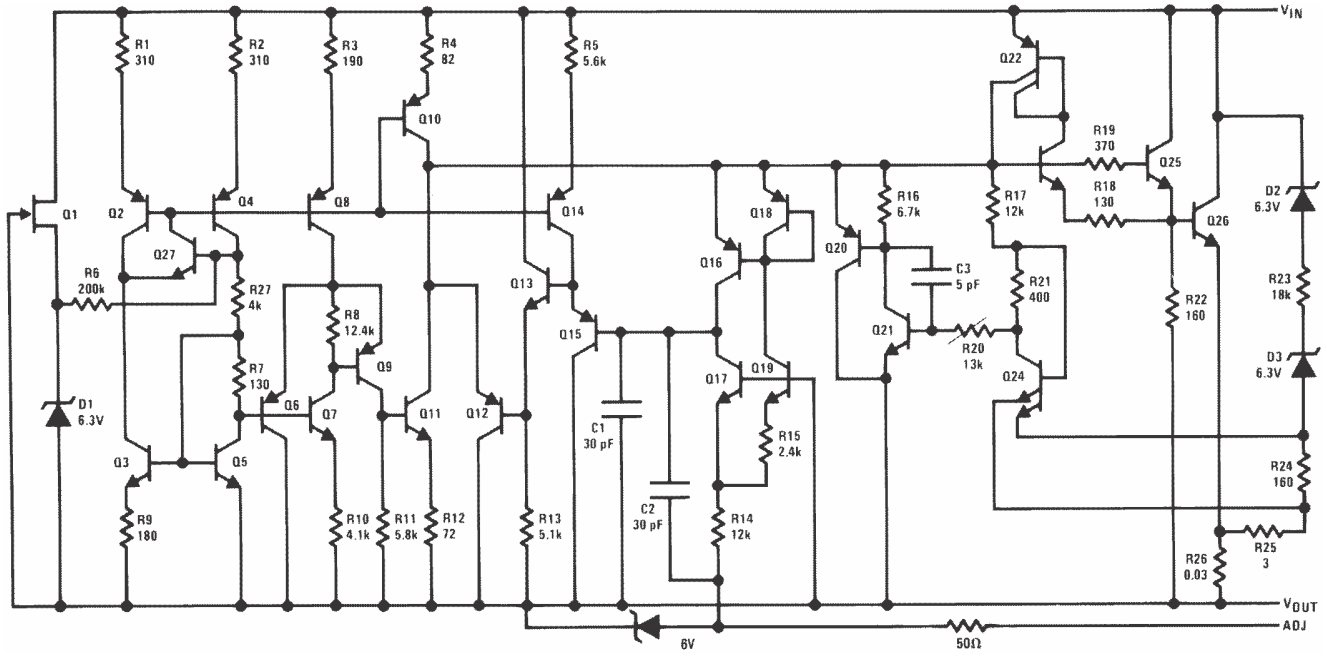

6.3 Feature Description

6.3.1 NPN Darlington Output Drive

NPN Darlington output topology provides naturally low output impedance and an output capacitor is optional. To support maximum current and lowest temperature, 3-V headroom is recommended ($V_I – V_O$).

6.3.2 Overload Block

Overcurrent and overtemperature shutdown protects the device against overload or damage from operating in excessive heat.

6.3.3 Programmable Feedback

Op amp with 1.25-V offset input at the ADJUST terminal provides easy output voltage or current (not both) programming. For current regulation applications, a single resistor whose resistance value is 1.25 V/IO and power rating is greater than 1.25 V^2/R must be used. For voltage regulation applications, two resistors set the output voltage.

Copyright © 2025 Texas Instruments Incorporated

6.4 Device Functional Modes

6.4.1 Normal Operation

The device OUTPUT pin sources current necessary to make OUTPUT pin 1.25 V greater than ADJUST terminal to provide output regulation.

6.4.2 Operation With Low Input Voltage

The device requires up to 3-V headroom ($V_I – V_O$) to operate in regulation. With less headroom, the device may drop out and OUTPUT voltage is INPUT voltage minus drop out voltage.

6.4.3 Operation at Light Loads

The device passes its bias current to the OUTPUT pin. The load or feedback must consume this minimum current for regulation or the output may be too high. A 250-Ω feedback resistor between OUTPUT and ADJUST consumes the worst case minimum load current of 5 mA.

6.4.4 Operation in Self Protection

When an overload occurs, the device shuts down Darlington NPN output stage or reduces the output current to prevent device damage. The device automatically resets from the overload. The output may be reduced or alternate between on and off until the overload is removed.

Copyright © 2025 Texas Instruments Incorporated

7 Application and Implementation

注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

7.1 Application Information

In operation, the LM138 develops a nominal 1.25-V reference voltage (V_{REF}) between the output and adjustment terminal. The reference voltage is impressed across program resistor R_1 and, since the voltage is constant, a constant current I_1 then flows through the output set resistor R_2, giving an output voltage calculated with 式 1.

$$V_{OUT} = V_{REF}\left(1 + \frac{R2}{R1}\right) + I_{ADJ}R2 \quad (1)$$


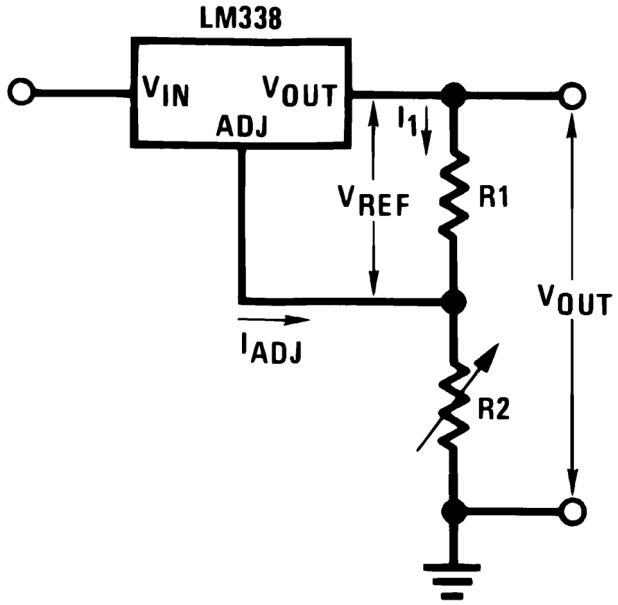


図 7-1. Typical Application Circuit

Because the 50-µA current from the adjustment terminal represents an error term, the LM138 was designed to minimize I_{ADJ} and make it very constant with line and load changes. To do this, all quiescent operating current is returned to the output establishing a minimum load current requirement. If there is insufficient load on the output, the output rises.

7.2 Typical Applications

7.2.1 Constant 5-V Regulator

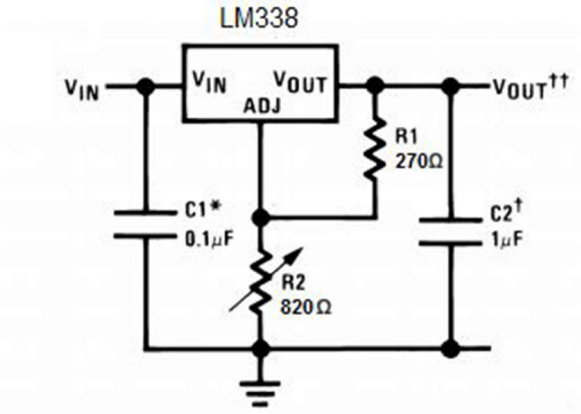

*Needed if device is more than 6 inches from filter capacitors.

†Optional—improves transient response

†† $V_{OUT} = 1.25\ V\left(1+\frac{R2}{R1}\right)+I_{ADJ}(R_2)$

図 7-2. Constant 5-V Regulator

7.2.1.1 Design Requirements

R1: Because the LM138 produces a typical 1.24 V potential between the OUTPUT and ADJUST pins, placing a 270-Ω resistor between them causes 4.6 mA to flow through R1 and R2.

R2: To achieve a 5-V output, the sum of the voltages across R1 and R2 must equal 5 V. Therefore, Vr2 must equal 3.76 V when 4.6 mA is flowing through it. R2 = Vr2 / I = 3.76 V / 4.6 mA = ~820 Ω.

C_{IN}: 0.1 µF of input capacitance helps filter out unwanted noise, especially if the regulator is located far from the power supply filter capacitors.

C_{OUT}: The regulator is stable without any output capacitance, but adding a 1-µF capacitor improves the transient response.

C_{ADJ}: A 10-µF capacitor bypassing the ADJUST pin to ground improves the regulators ripple rejection.

D1: Protection diode D1 is recommended if C_{OUT} is used. The diode provides a low-impedance discharge path to prevent the capacitor from discharging into the output of the regulator (see the *Protection Diodes* section).

D2: Protection diode D2 is recommended if C_{ADJ} is used. The diode provides a low-impedance discharge path to prevent the capacitor from discharging into the output of the regulator (see the *Protection Diodes* section).

表 7-1 lists the design parameters for this typical application.

Copyright © 2025 Texas Instruments Incorporated

表 7-1. Design Parameters

PARAMETER	VALUE
Feedback resistor 1 (R1)	270 Ω
Feedback resistor 2 (R2)	820 Ω
Input capacitor (C_{IN})	0.1 µF
Output capacitor (C_{OUT})	1 µF
Adjust capacitor(C_{ADJ})	10 µF

7.2.1.2 Detailed Design Procedure

7.2.1.2.1 External Capacitors

An input bypass capacitor is recommended. A 0.1-µF disc or 1-µF solid tantalum on the input is suitable input bypassing for almost all applications. The device is more sensitive to the absence of input bypassing when adjustment or output capacitors are used but the above values eliminate the possibility of problems.

The adjustment terminal can be bypassed to ground on the LM138 to improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. With a 10-µF bypass capacitor, 75-dB ripple rejection is obtainable at any output level. Increases over 20 µF do not appreciably improve the ripple rejection at frequencies above 120 Hz. If the bypass capacitor is used, it is sometimes necessary to include protection diodes to prevent the capacitor from discharging through internal low current paths and damaging the device.

In general, the best type of capacitors to use are solid tantalum. Solid tantalum capacitors have low impedance even at high frequencies. Depending upon capacitor construction, it takes about 25 µF in aluminum electrolytic to equal 1-µF solid tantalum at high frequencies. Ceramic capacitors are also good at high frequencies; but some types have a large decrease in capacitance at frequencies around 0.5 MHz. For this reason, 0.01-µF disc may seem to work better than a 0.1-µF disc as a bypass.

Although the LM138 is stable with no output capacitors, like any feedback circuit, certain values of external capacitance can cause excessive ringing. This occurs with values between 500 pF and 5000 pF. A 1-µF solid tantalum (or 25-µF aluminum electrolytic) on the output swamps this effect and insures stability.

7.2.1.2.2 Load Regulation

The LM138 is capable of providing extremely good load regulation but a few precautions are needed to obtain maximum performance. The current set resistor connected between the adjustment terminal and the output terminal (usually 240 Ω) must be tied directly to the output of the regulator (case) rather than near the load. This eliminates line drops from appearing effectively in series with the reference and degrading regulation. For example, a 15-V regulator with 0.05-Ω resistance between the regulator and load has a load regulation due to line resistance of 0.05 Ω × I_L. If the set resistor is connected near the load, the effective line resistance is 0.05 Ω (1 + R2/R1) or in this case, 11.5 times worse.

図 7-3 shows the effect of resistance between the regulator and 240-Ω set resistor.

Copyright © 2025 Texas Instruments Incorporated

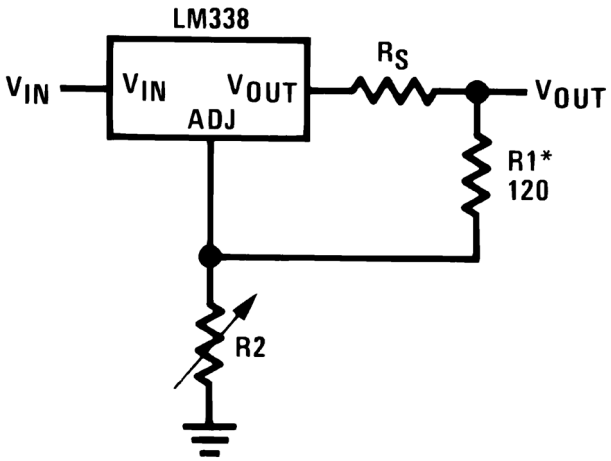


図 7-3. Regulator With Line Resistance in Output Lead


With the TO-3 package, it is easy to minimize the resistance from the case to the set resistor, by using 2 separate leads to the case. The ground of R2 can be returned near the ground of the load to provide remote ground sensing and improve load regulation.

7.2.1.2.3 Protection Diodes

When external capacitors are used with *any* IC regulator it is sometimes necessary to add protection diodes to prevent the capacitors from discharging through low current points into the regulator. Most 20-µF capacitors have low enough internal series resistance to deliver 20-A spikes when shorted. Although the surge is short, there is enough energy to damage parts of the IC.

When an output capacitor is connected to a regulator and the input is shorted, the output capacitor discharges into the output of the regulator. The discharge current depends on the value of the capacitor, the output voltage of the regulator, and the rate of decrease of V_{IN}. In the LM138 this discharge path is through a large junction that is able to sustain 25-A surge with no problem. This is not true of other types of positive regulators. For output capacitors of 100 µF or less at output of 15 V or less, there is no need to use diodes.

The bypass capacitor on the adjustment terminal can discharge through a low current junction. Discharge occurs when *either* the input or output is shorted. Internal to the LM138 is a 50-Ω resistor which limits the peak discharge current. No protection is needed for output voltages of 25-V or less and 10-µF capacitance. 図 7-4 shows an LM138 with protection diodes included for use with outputs greater than 25 V and high values of output capacitance.

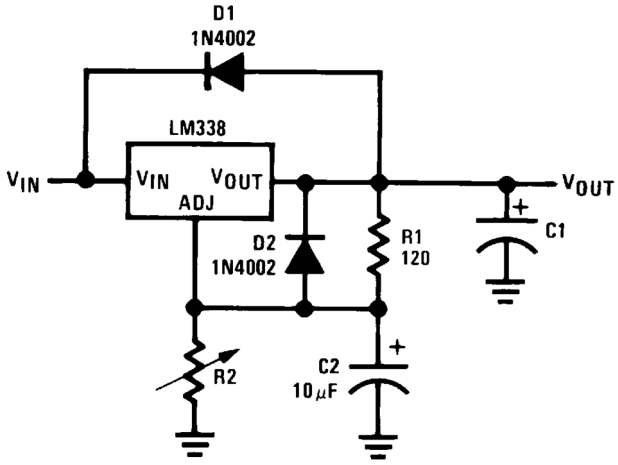

Copyright © 2025 Texas Instruments Incorporated

$$V_{OUT} = 1.25V \left(1 + \frac{R2}{R1}\right) + I_{ADJ}R2$$

D1 protects against C1, D2 protects against C2.

図 7-4. Regulator With Protection Diodes

7.2.1.3 Application Curves

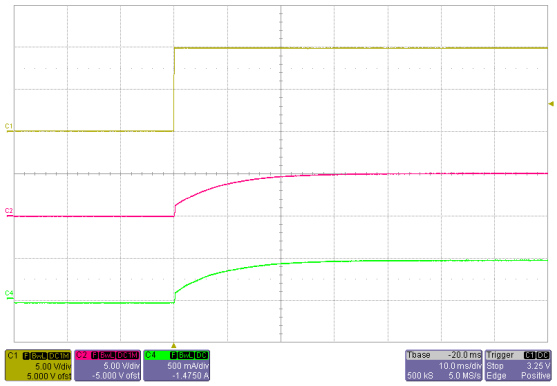


図 7-5. Regulator Start-Up

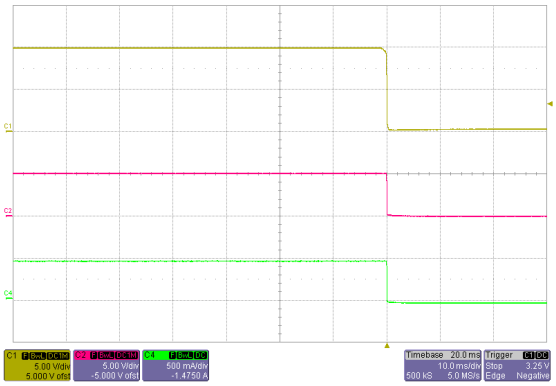


図 7-6. Regulator Shutdown

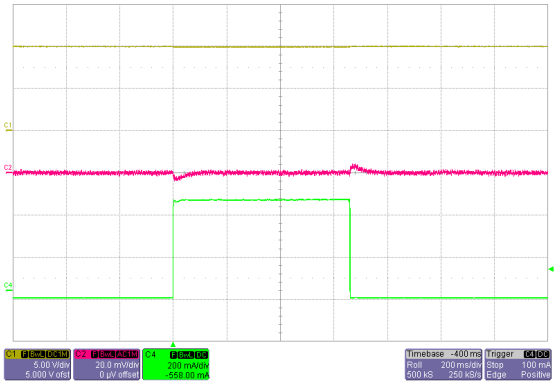


図 7-7. Regulator Response to Load Step

Copyright © 2025 Texas Instruments Incorporated

7.3 System Examples

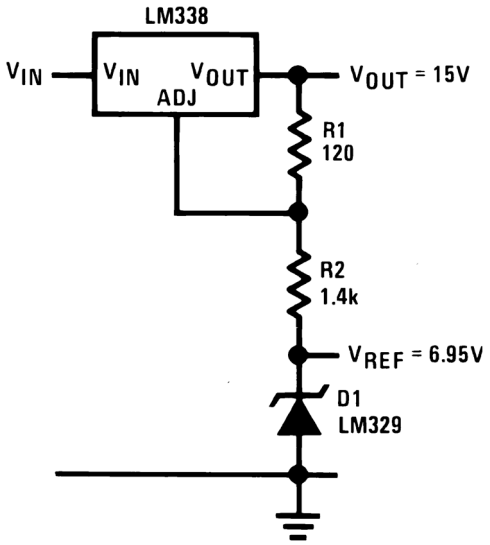


図 7-8. Regulator and Voltage Reference


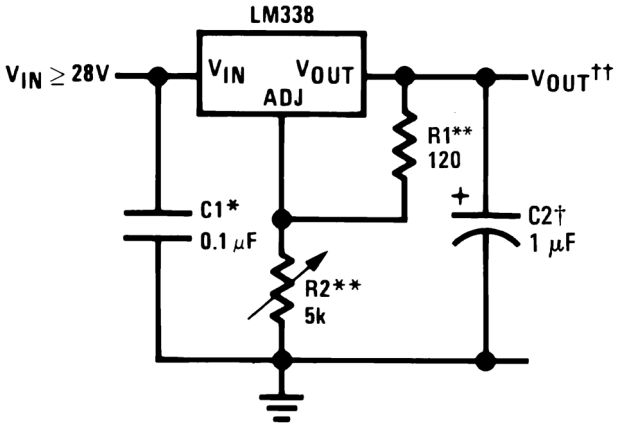


図 7-9. 1.2-V to 25-V Adjustable Regulator

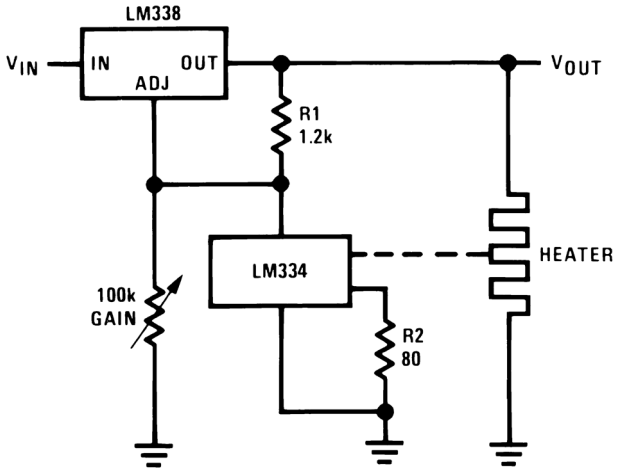

Full output current not available at high input-output voltages †Optional—improves transient response. Output capacitors in the range of 1 µF to 1000 µF of aluminum or tantalum electrolytic are commonly used to provide improved output impedance and rejection of


Copyright © 2025 Texas Instruments Incorporated

transients. *Needed if device is more than 6 inches from filter capacitors.

$$\dagger\dagger V_{OUT} = 1.25V \left(1 + \frac{R2}{R1}\right) + I_{ADJ}(R_2)$$

**R1 = 240 Ω for LM138. R1, R2 as an assembly can be ordered from Bourns: MIL part no. 7105A-AT2-502 COMM part no. 7105A-AT7-502

図 7-10. Temperature Controller

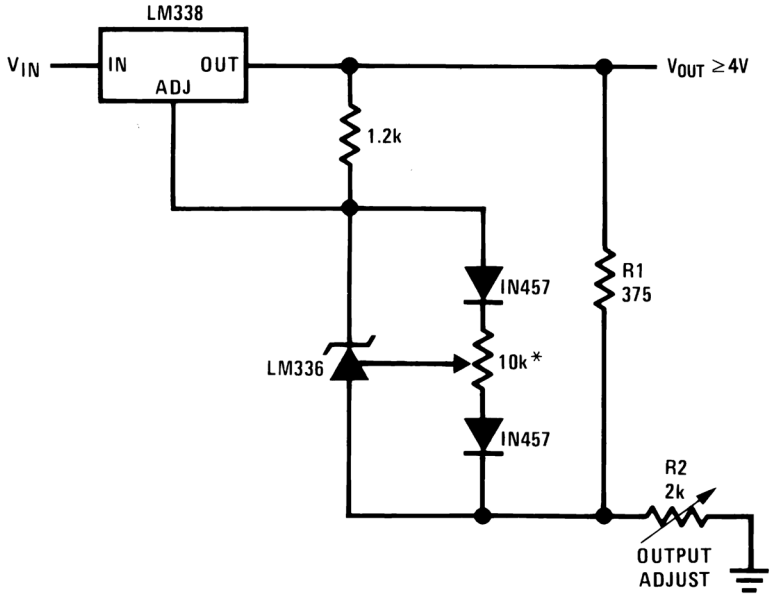

* Adjust for 3.75 across R1

図 7-11. Precision Power Regulator With Low Temperature Coefficient


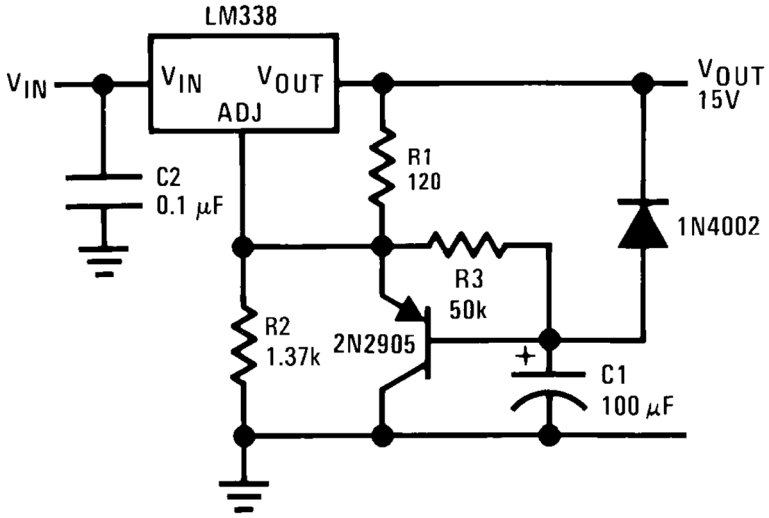


図 7-12. Slow Turnon 15-V Regulator

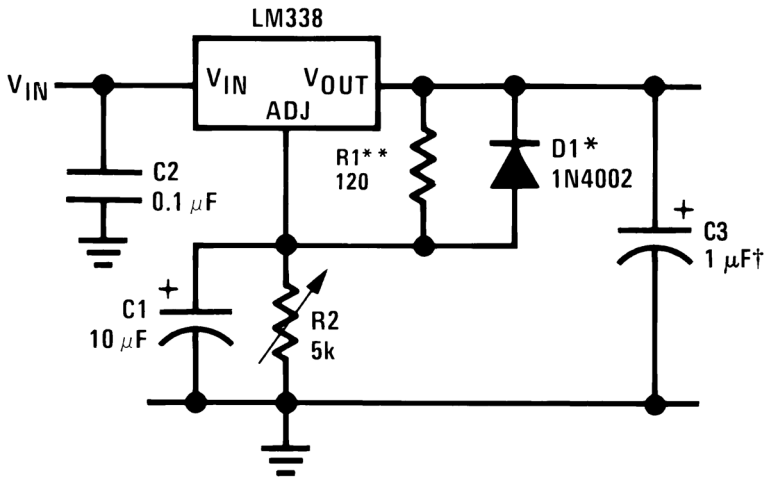

†Solid tantalum *Discharges C1 if output is shorted to ground **R1 = 240 Ω for LM138

図 7-13. Adjustable Regulator With Improved Ripple Rejection


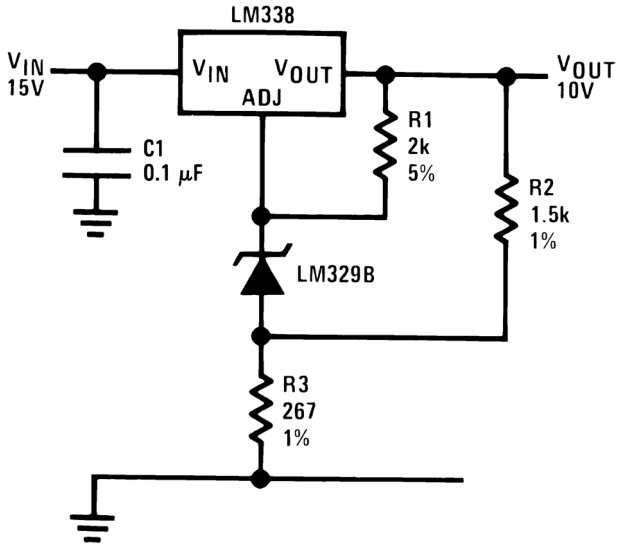



図 7-14. High Stability 10-V Regulator

Copyright © 2025 Texas Instruments Incorporated

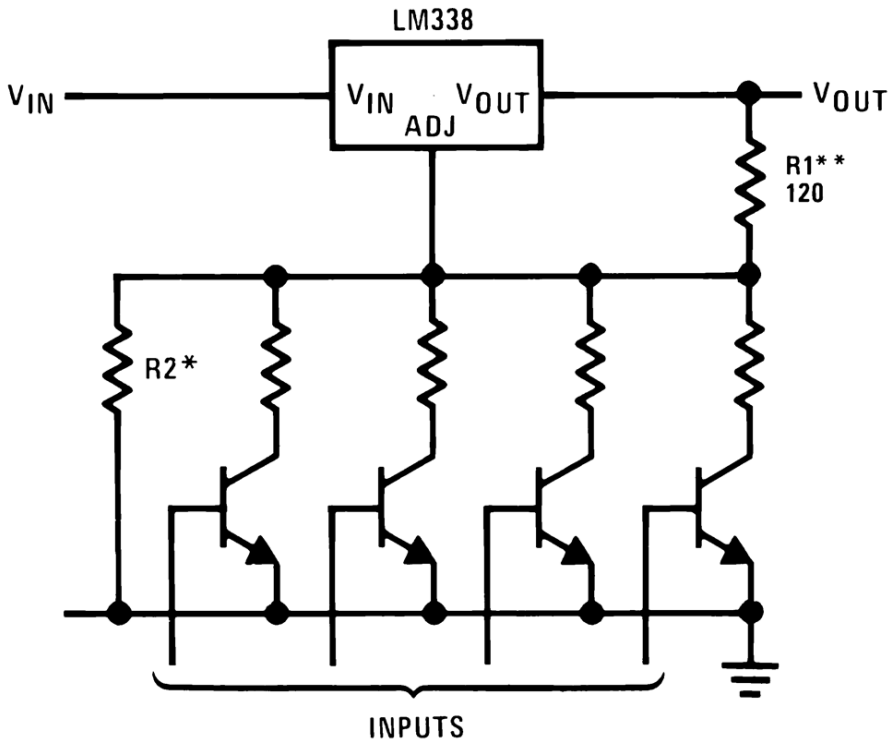


*Sets maximum V_{OUT} **R1 = 240 Ω for LM138

図 7-15. Digitally Selected Outputs

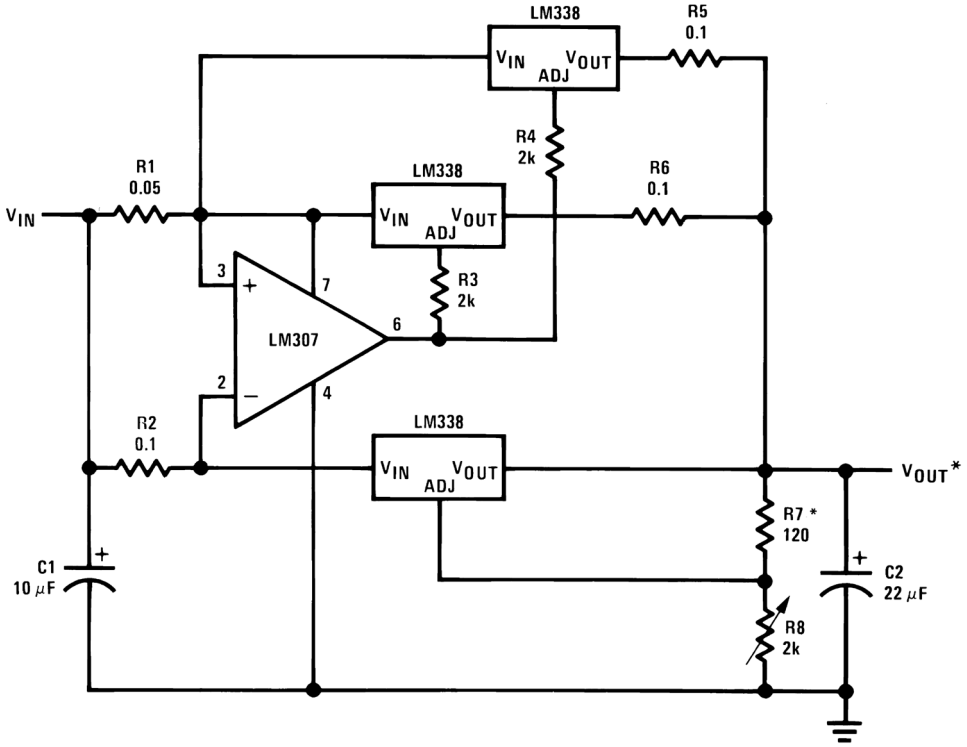

* Minimum load—100 mA

図 7-16. 15-A Regulator

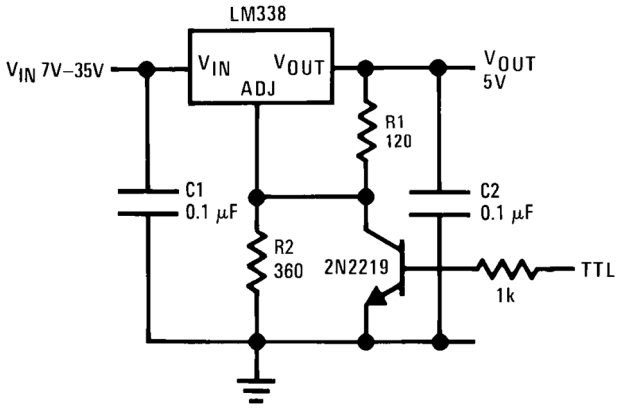

** Minimum output ≈ 1.2 V

図 7-17. 5-V Logic Regulator With Electronic Shutdown**


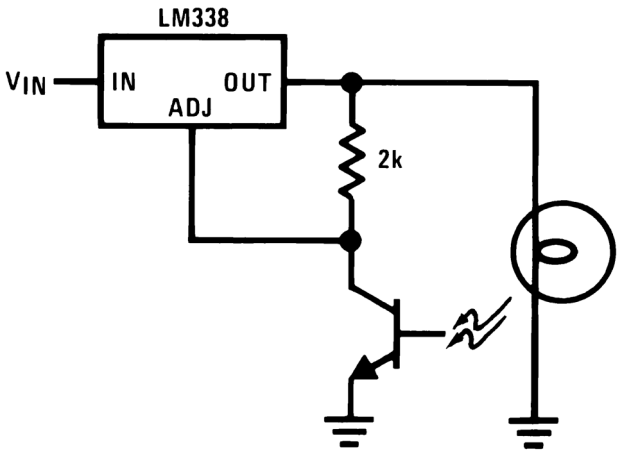


図 7-18. Light Controller

Copyright © 2025 Texas Instruments Incorporated

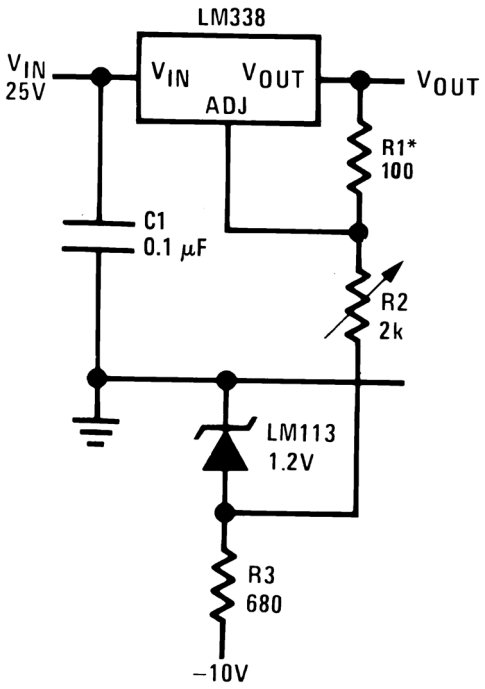

* R1 = 240 Ω, R2 = 5k for LM138 Full output current not available at high input-output voltages

図 7-19. 0 to 22-V Regulator

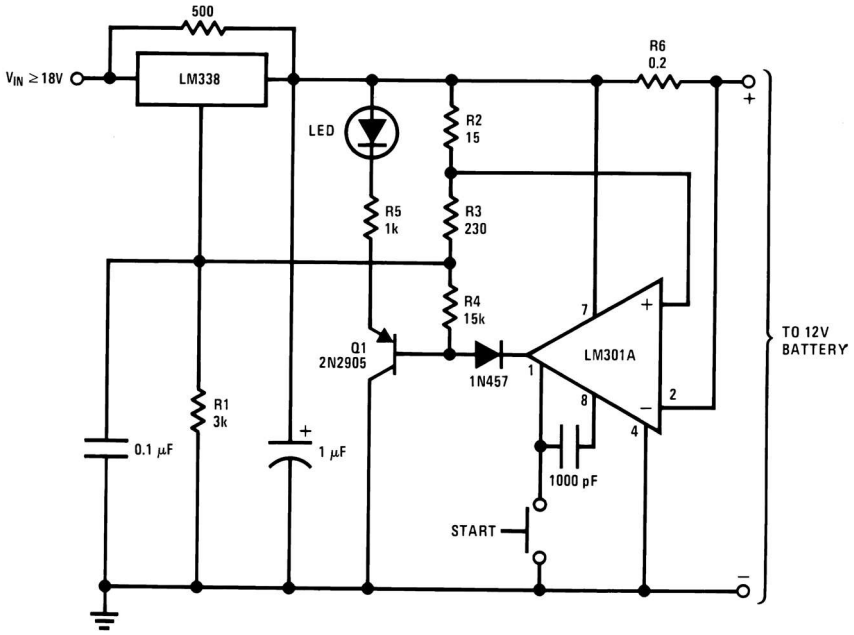


図 7-20. 12-V Battery Charger

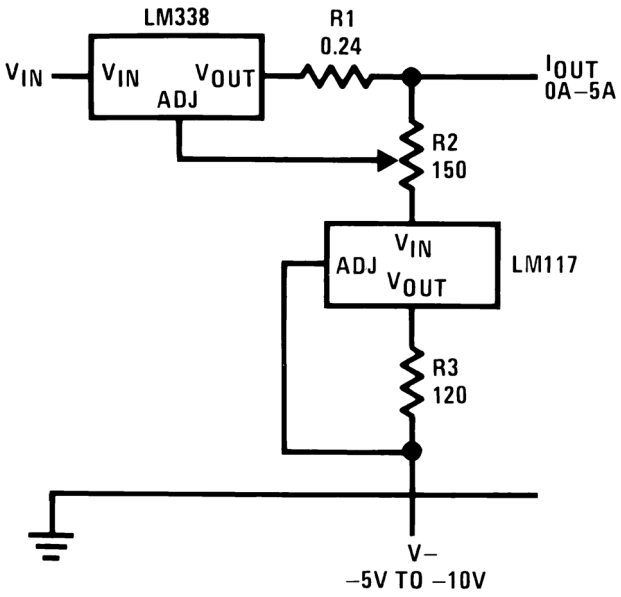


図 7-21. Adjustable Current Regulator

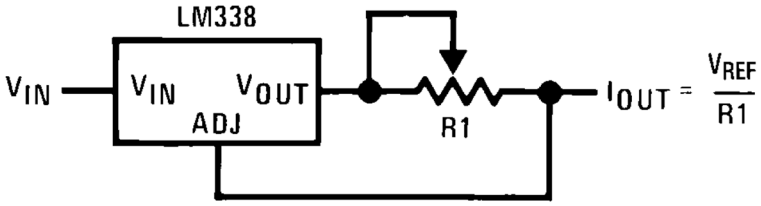


図 7-22. Precision Current Limiter

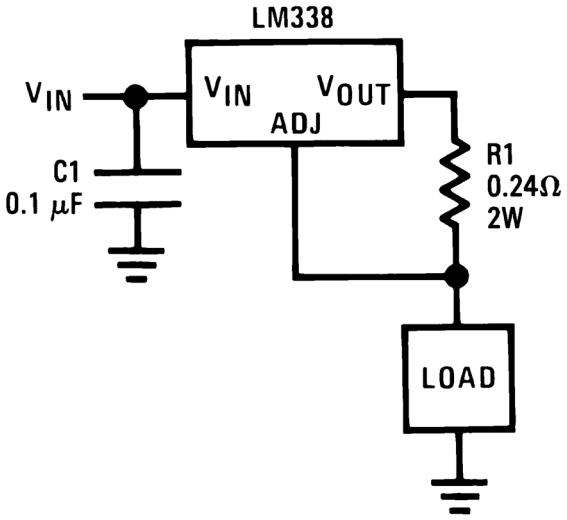


図 7-23. 5-A Current Regulator

Copyright © 2025 Texas Instruments Incorporated



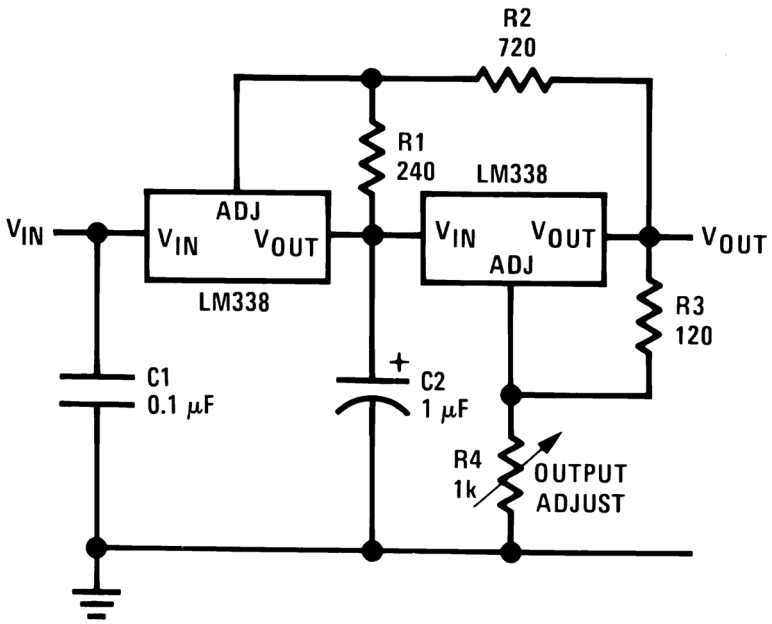


図 7-24. Tracking Preregulator

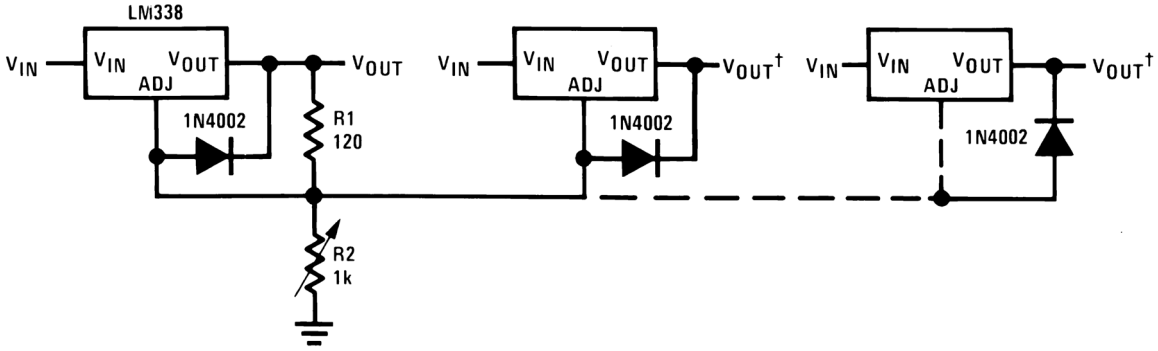


† Minimum load—10 mA * All outputs within ±100 mV

図 7-25. Adjusting Multiple On-Card Regulators With Single Control*

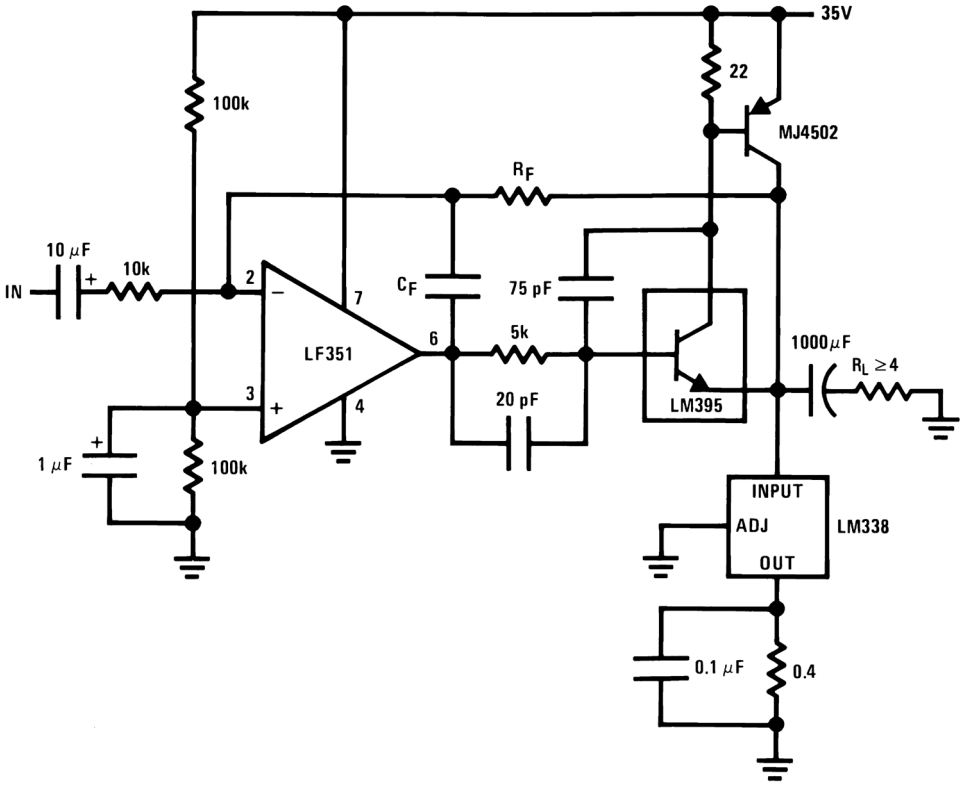

A_V = 1, R_F = 10k, C_F = 100 pF A_V = 10, R_F = 100k, C_F = 10 pF Bandwidth ≥ 100 kHz Distortion ≤ 0.1%

図 7-26. Power Amplifier

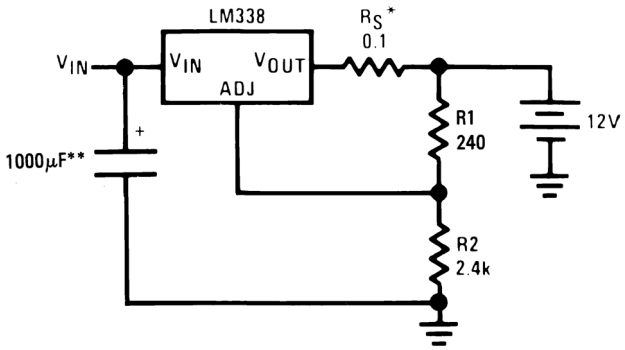

$$*R_S\text{—sets output impedance of charger } Z_{OUT} = R_S\left(1 + \frac{R2}{R1}\right)$$

Use of R_S allows low charging rates with fully charged battery. **The 1000 µF is recommended to filter out input transients

Copyright © 2025 Texas Instruments Incorporated

$$*R_S\text{—sets output impedance of charger } Z_{OUT} = R_S\left(1 + \frac{R2}{R1}\right)$$

Use of R_S allows low charging rates with fully charged battery. **The 1000 µF is recommended to filter out input transients

図 7-27. Simple 12-V Battery Charger



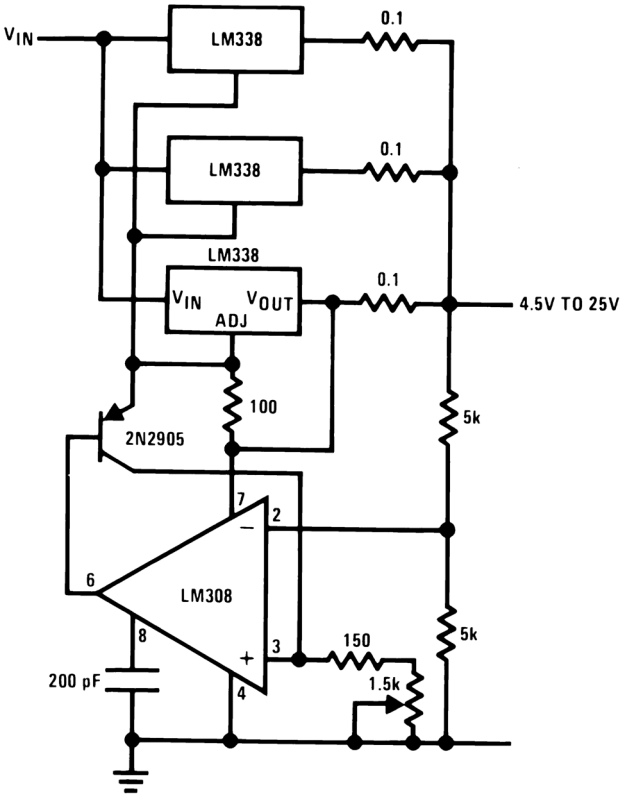


図 7-28. Adjustable 15-A Regulator

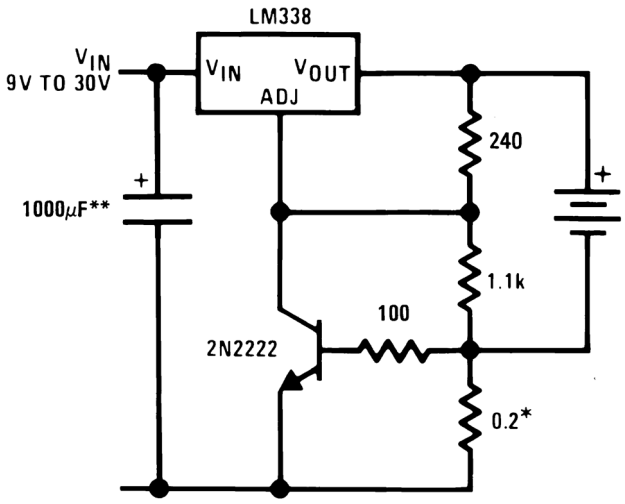

* Set max charge current to 3 A ** The 1000 μF is recommended to filter out input transients.

図 7-29. Current Limited 6-V Charger

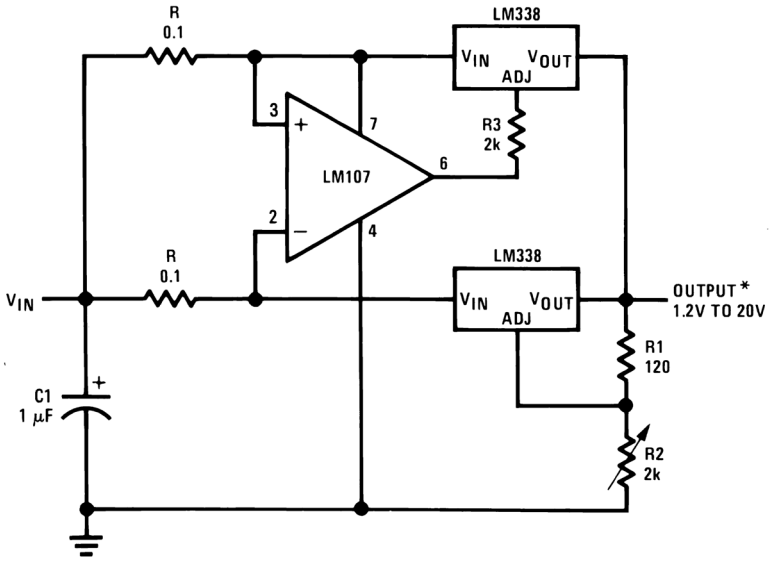

* Minimum load—100 mA

図 7-30. 10-A Regulator

7.4 Power Supply Recommendations

The input supply to LM138 and LM338 must be kept at a voltage level such that its maximum input to output differential voltage rating is not exceeded. The minimum dropout voltage must also be met with extra headroom when possible to keep the LM138 and LM338 in regulation. TI recommends a capacitor be placed at the input to bypass noise.

7.5 Layout

7.5.1 Layout Guidelines

Some layout guidelines must be followed to ensure proper regulation of the output voltage with minimum noise. Traces carrying the load current must be wide to reduce the amount of parasitic trace inductance and the feedback loop from V_{OUT} to ADJ must be kept as short as possible. To improve PSRR, a bypass capacitor can

Copyright © 2025 Texas Instruments Incorporated

be placed at the ADJ pin and must be placed as close as possible to the IC. In cases when V_{IN} shorts to ground, an external diode must be placed from V_{OUT} to V_{IN} to divert the surge current from the output capacitor and protect the IC. Similarly, in cases when a large bypass capacitor is placed at the ADJ pin and VOUT shorts to ground, an external diode must be placed from ADJ to V_{OUT} to provide a path for the bypass capacitor to discharge. These diodes must be placed close to the corresponding IC pins to increase their effectiveness.

7.5.2 Layout Example

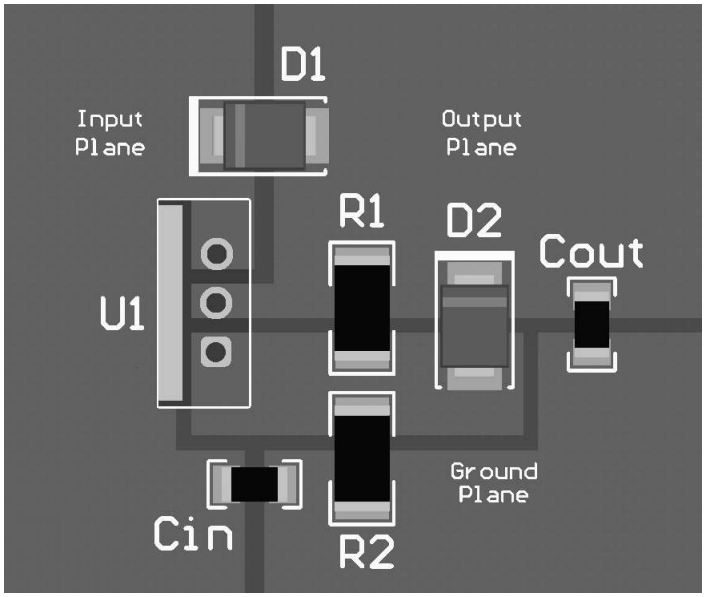


図 7-31. LMx38 Layout

8 Device and Documentation Support

8.1 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

8.2 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの使用条件を参照してください。

8.3 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.
すべての商標は、それぞれの所有者に帰属します。

8.4 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

8.5 用語集

テキサス・インスツルメンツ用語集　　この用語集には、用語や略語の一覧および定義が記載されています。

9 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision C (December 2016) to Revision D (May 2025)	Page
• 「*利用可能なパッケージ*」の図を削除	1
• Changed denominator to R1 in 式 1	13

Changes from Revision B (April 2013) to Revision C (December 2016)	Page
• 「*デバイス情報*」表、「*ピン構成および機能*」セクション、「*仕様*」セクション、「*推奨動作条件*」表、「*熱に関する情報*」表、「*詳細説明*」セクション、「*アプリケーションと実装*」セクション、「*電源に関する推奨事項*」セクション、「*レイアウト*」セクション、「*デバイスおよびドキュメントのサポート*」セクション、「*メカニカル、パッケージ、および注文情報*」セクションを追加	1
• Deleted RETS138K military specification reference from *Absolute Maximum Ratings* table	5
• Changed Junction to Ambient, $R_{\theta JA}$, value in *Thermal Information* table From: 50°C/W To: 22.9°C/W (NDE)	5
• Changed Junction to Case, $R_{\theta JC(top)}$, value in *Thermal Information* table From: 4°C/W To: 15.7°C/W (NDE)	5

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2025 Texas Instruments Incorporated

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、テキサス・インスツルメンツの販売条件、または ti.com やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所:Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LM138K STEEL	Active	Production	TO-3 (NDS) | 2	50 | TRAY NON-STD	No	Call TI	Call TI	-55 to 125	LM138K STEELP+
LM138K STEEL/NOPB	Active	Production	TO-3 (NDS) | 2	50 | TRAY NON-STD	Yes	Call TI	Level-1-NA-UNLIM	-55 to 125	LM138K STEELP+
LM338T/NOPB	Active	Production	TO-220 (NDE) | 3	45 | TUBE	Yes	SN	Level-1-NA-UNLIM	0 to 125	LM338T P+
LM338T/NOPB.B	Active	Production	TO-220 (NDE) | 3	45 | TUBE	Yes	SN	Level-1-NA-UNLIM	0 to 125	LM338T P+

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TUBE

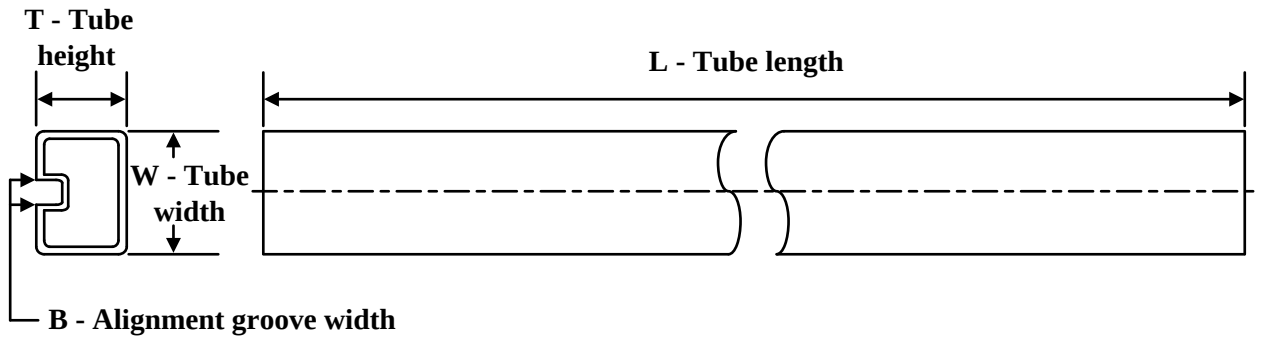

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
LM338T/NOPB	NDE	TO-220	3	45	502	33	6985	4.06
LM338T/NOPB.B	NDE	TO-220	3	45	502	33	6985	4.06

TRAY

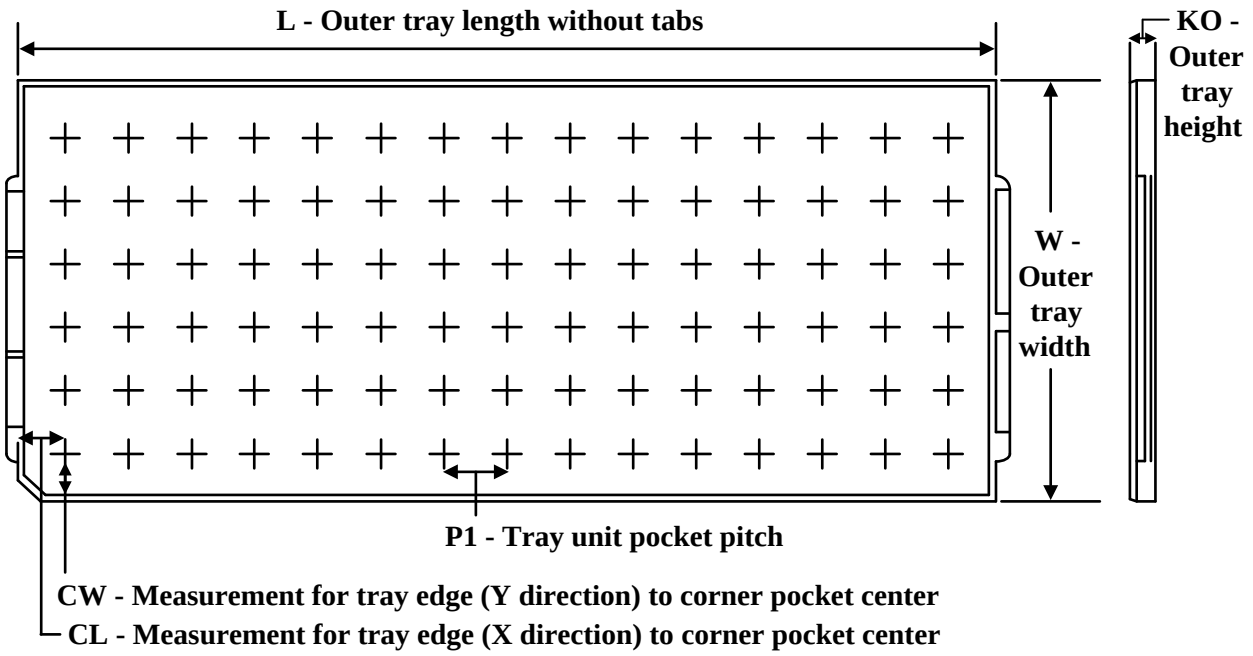


Chamfer on Tray corner indicates Pin 1 orientation of packed units.

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	K0 (µm)	P1 (mm)	CL (mm)	CW (mm)
LM138K STEEL	NDS	TO-CAN	2	50	9 X 6	NA	292.1	215.9	25654	3.87	22.3	25.4
LM138K STEEL/NOPB	NDS	TO-CAN	2	50	9 X 6	NA	292.1	215.9	25654	3.87	22.3	25.4

NDE0003B

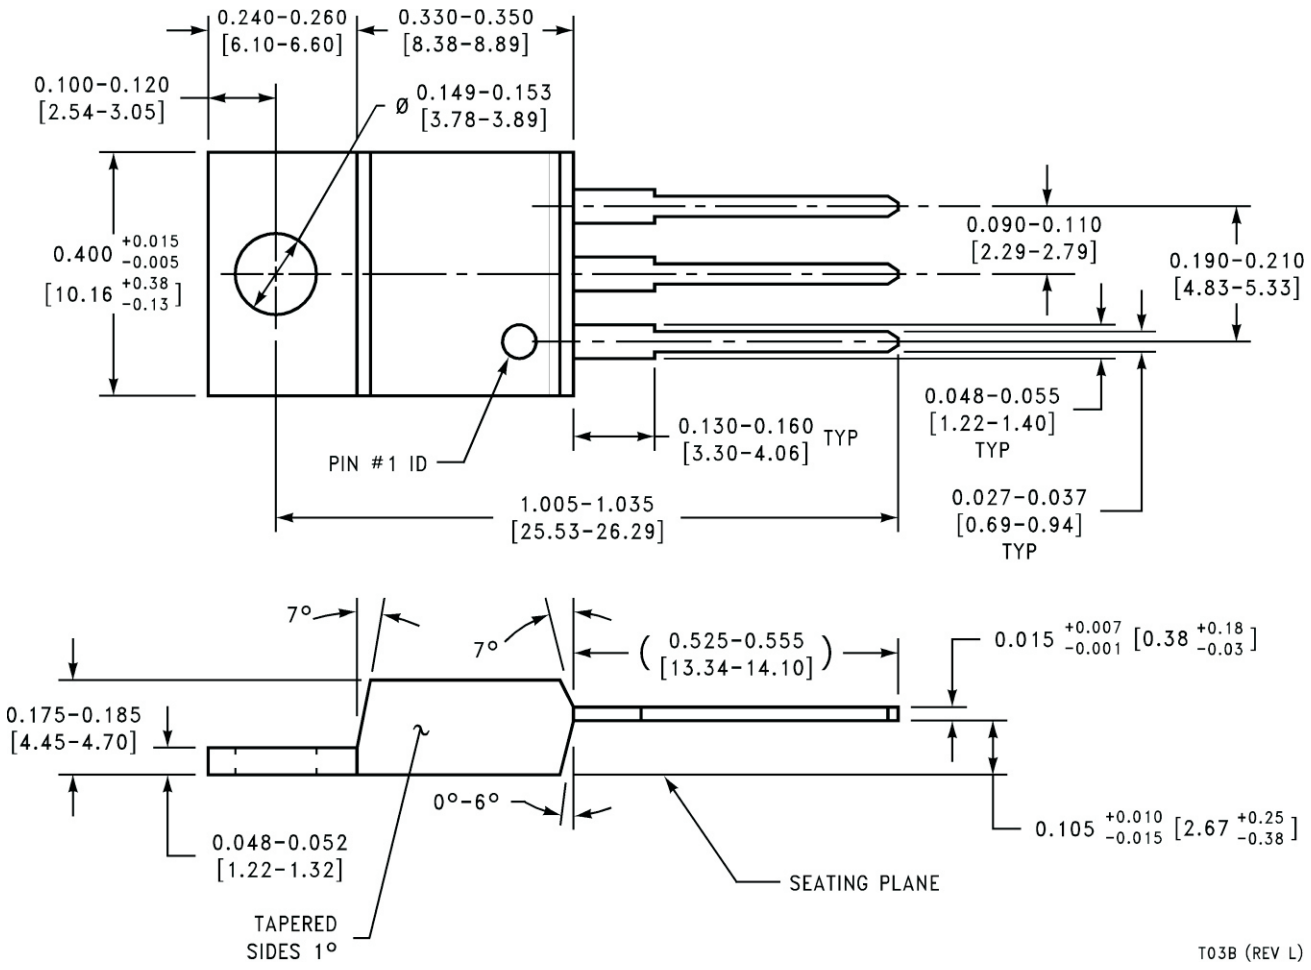
0.240-0.260
[6.10-6.60]
0.330-0.350
[8.38-8.89]
0.100-0.120
[2.54-3.05]
Ø 0.149-0.153
[3.78-3.89]
0.400 +0.015 -0.005
[10.16 +0.38 -0.13]
0.090-0.110
[2.29-2.79]
0.190-0.210
[4.83-5.33]
PIN #1 ID
0.130-0.160 TYP
[3.30-4.06]
0.048-0.055
[1.22-1.40]
TYP
1.005-1.035
[25.53-26.29]
0.027-0.037
[0.69-0.94]
TYP
7°
7°
(0.525-0.555
[13.34-14.10])
0.015 +0.007 -0.001 [0.38 +0.18 -0.03]
0.175-0.185
[4.45-4.70]
0°-6°
0.105 +0.010 -0.015 [2.67 +0.25 -0.38]
0.048-0.052
[1.22-1.32]
SEATING PLANE
TAPERED
SIDES 1°
T03B (REV L)


PACKAGE OUTLINE

NDS0002A



TO-CAN - 8.94 mm max height

TRANSISTOR OUTLINE

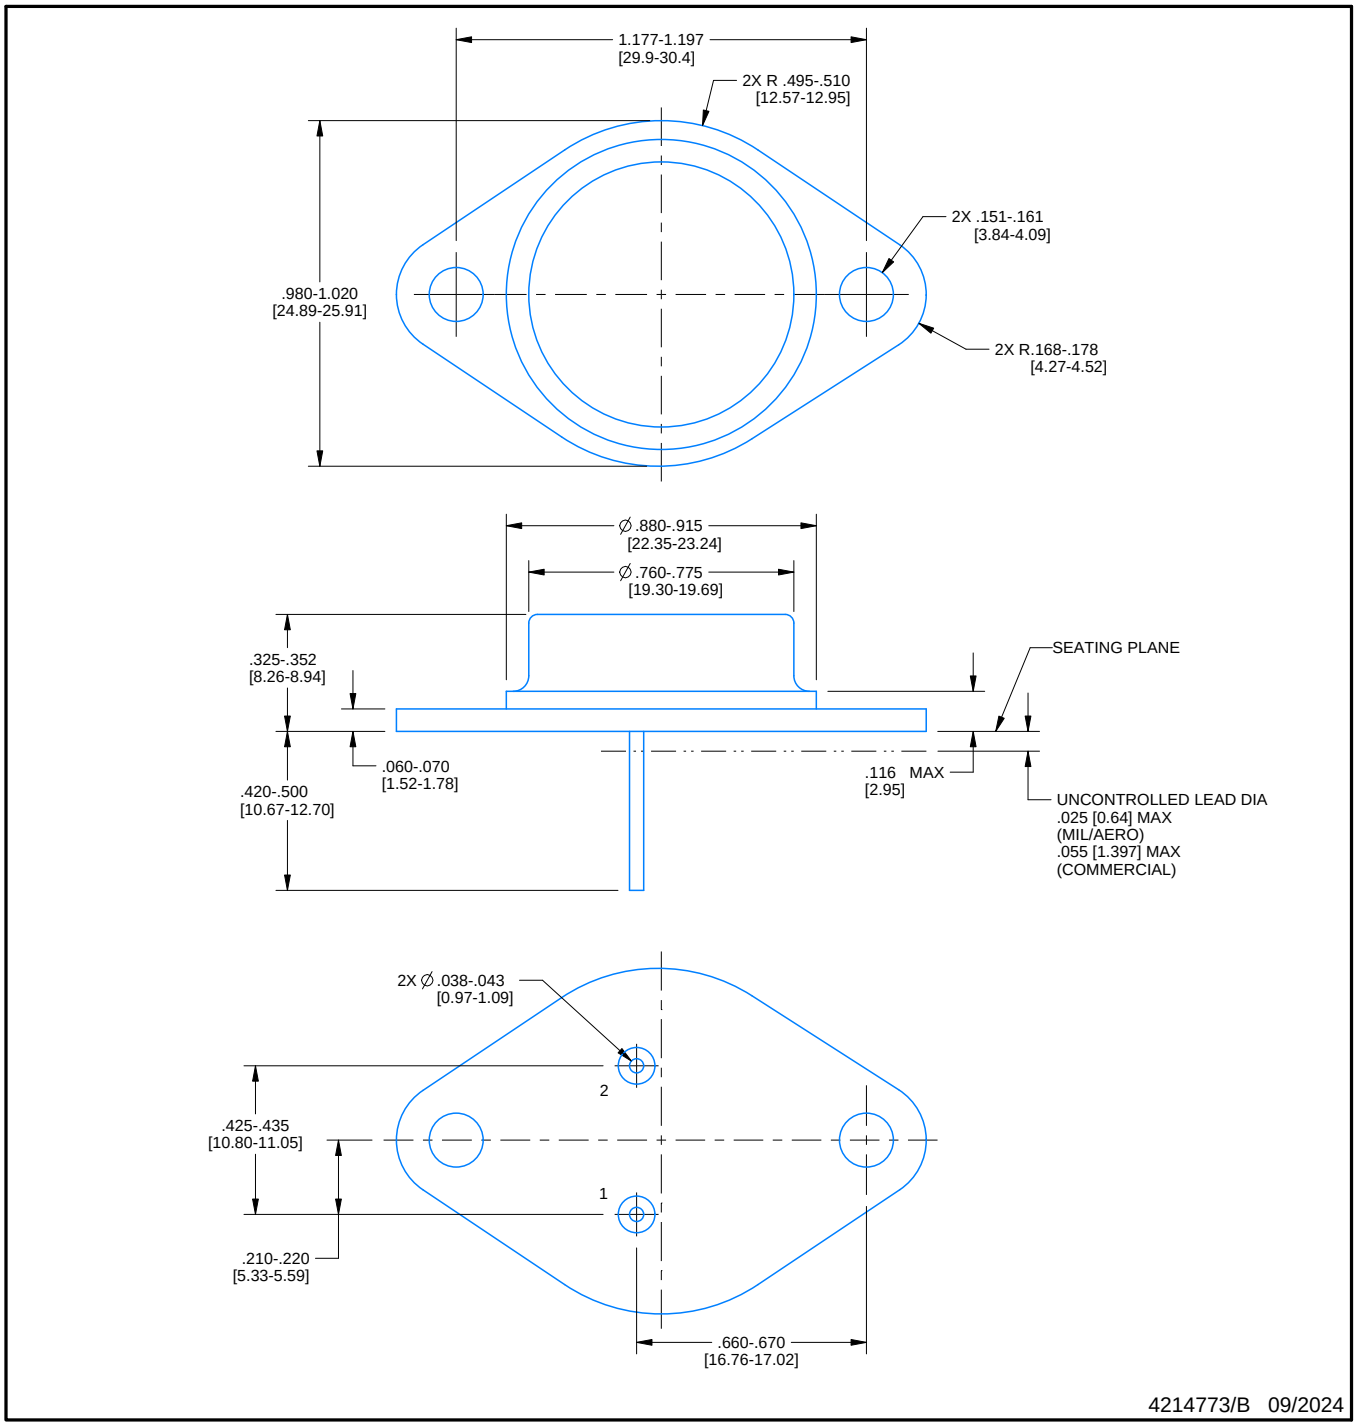

4214773/B 09/2024

NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、 TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月