

# TCA39306 デュアル双方向 I<sup>2</sup>C バス / SMBus 電圧レベル・シフタ

## 1 特長

- 混在モードの I<sup>2</sup>C アプリケーションで、SDA および SCL ライン用の 2 ビット双方向トランスレータ
- 標準モード、ファースト・モード、ファースト・モード・プラスの I<sup>2</sup>C および SMBus と互換
- I<sup>3</sup>C 互換 (12.5MHz 対応)
- 次の電圧レベル変換が可能
  - 0.9V の V<sub>REF1</sub> と、1.8V、2.5V、3.3V、5V の V<sub>REF2</sub>
  - 1.2V の V<sub>REF1</sub> と、1.8V、2.5V、3.3V、5V の V<sub>REF2</sub>
  - 1.8V の V<sub>REF1</sub> と、2.5V、3.3V、5V の V<sub>REF2</sub>
  - 2.5V の V<sub>REF1</sub> と、3.3V または 5V の V<sub>REF2</sub>
  - 3.3V の V<sub>REF1</sub> と、5V の V<sub>REF2</sub>
- 方向ピンを必要としない双方向電圧レベル変換
- オン状態での入力と出力ポート間の低抵抗により信号の歪みを低減
- オープン・ドレインの I<sup>2</sup>C I/O ポート (SCL1、SDA1、SCL2、SDA2)
- 5V 許容の I<sup>2</sup>C I/O ポートにより、混在モード信号動作をサポート
- EN = LOW のとき、SCL1、SDA1、SCL2、SDA2 ピンが高インピーダンス
- EN = LOW のとき、絶縁のためのロックアップ・フリー動作
- フロースルー・ピン配置によりプリント基板の配線を簡素化
- JESD 22 を超える ESD 保護
  - 人体モデル 2000V (A114-A)
  - デバイス帯電モデル 1000V (C101)

## 2 アプリケーション

- I<sup>2</sup>C、SMBus、PMBus、MDIO、UART、低速 SDIO、GPIO、その他の 2 信号インターフェイス
- サーバー
- ルーター (テレコム・スイッチング機器)
- パーソナル・コンピュータ
- 産業用オートメーション

## 3 概要

TCA39306 は、I<sup>2</sup>C、SMBus、I<sup>3</sup>C と互換性のあるデュアル双方向電圧レベル・シフタであり、イネーブル (EN) 入力付きで、0.9V～3.3V の V<sub>REF1</sub> と、1.8V～5.5V の V<sub>REF2</sub> で動作します。


このデバイスは、方向ピンを使用せず、0.85V と 5V の間の電圧を双方向に変換できます。スイッチのオン抵抗 (R<sub>ON</sub>) が低いため、最小の伝播遅延で接続が可能です。EN を HIGH にすると、トランスレータ・スイッチがオンになり、SCL1 および SDA1 I/O がそれぞれ SCL2 および SDA2 I/O に接続され、ポート間の双方向データ・フローが可能になります。EN が LOW のとき、トランスレータ・スイッチはオフになり、ポート間が高インピーダンス状態になります。

電圧変換に加えて、TCA39306 は、EN ピンを制御してファーストモード通信中に低速なバスを切断することにより、高速なバスを低速なバスから分離できます。

### パッケージ情報

| 部品番号     | パッケージ <sup>(1)</sup> | 本体サイズ (公称)      |
|----------|----------------------|-----------------|
| TCA39306 | VSSOP (8)            | 2.30mm × 2.00mm |
|          | SOT-23 (8)           | 2.90mm × 1.60mm |
|          | X2SON (8)            | 1.35mm × 0.80mm |

(1) 利用可能なパッケージについては、このデータシートの末尾にある注文情報を参照してください。

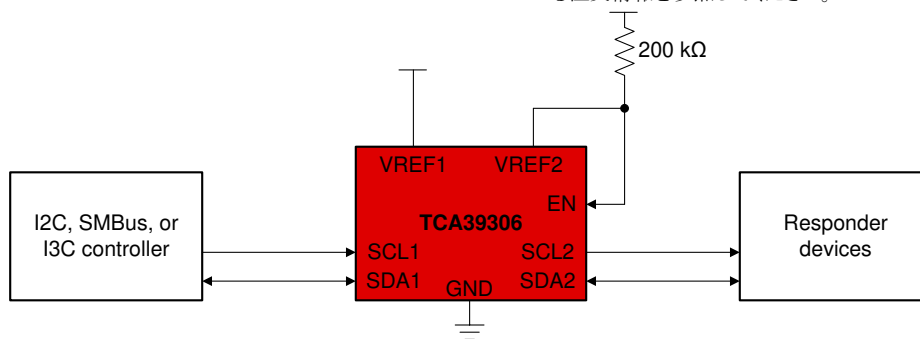

アプリケーション概略図



## Table of Contents

|                                                  |           |                                                                  |           |
|--------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特長</b> .....                                | <b>1</b>  | 8.3 Feature Description.....                                     | <b>16</b> |
| <b>2 アプリケーション</b> .....                          | <b>1</b>  | 8.4 Device Functional Modes.....                                 | <b>16</b> |
| <b>3 概要</b> .....                                | <b>1</b>  | <b>9 Application and Implementation</b> .....                    | <b>17</b> |
| <b>4 Revision History</b> .....                  | <b>2</b>  | 9.1 Application Information.....                                 | <b>17</b> |
| <b>5 Pin Configuration and Functions</b> .....   | <b>3</b>  | 9.2 Typical Application.....                                     | <b>17</b> |
| <b>6 Specifications</b> .....                    | <b>4</b>  | 9.3 Systems Examples: I3C Usage Considerations.....              | <b>20</b> |
| 6.1 Absolute Maximum Ratings.....                | <b>4</b>  | 9.4 Power Supply Recommendations.....                            | <b>22</b> |
| 6.2 ESD Ratings.....                             | <b>4</b>  | 9.5 Layout.....                                                  | <b>22</b> |
| 6.3 Recommended Operating Conditions.....        | <b>4</b>  | <b>10 Device and Documentation Support</b> .....                 | <b>24</b> |
| 6.4 Thermal Information.....                     | <b>5</b>  | 10.1 Receiving Notification of Documentation Updates.....        | <b>24</b> |
| 6.5 Electrical Characteristics.....              | <b>5</b>  | 10.2 サポート・リソース.....                                              | <b>24</b> |
| 6.6 Switching Characteristics.....               | <b>6</b>  | 10.3 Trademarks.....                                             | <b>24</b> |
| 6.7 Typical Characteristics.....                 | <b>8</b>  | 10.4 静電気放電に関する注意事項.....                                          | <b>24</b> |
| <b>7 Parameter Measurement Information</b> ..... | <b>9</b>  | 10.5 用語集.....                                                    | <b>24</b> |
| <b>8 Detailed Description</b> .....              | <b>11</b> | <b>11 Mechanical, Packaging, and Orderable Information</b> ..... | <b>24</b> |
| 8.1 Overview.....                                | <b>11</b> |                                                                  |           |
| 8.2 Functional Block Diagram.....                | <b>16</b> |                                                                  |           |

## 4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

### Changes from Revision A (August 2021) to Revision B (March 2023) Page

|                                                                   |          |
|-------------------------------------------------------------------|----------|
| • 「製品情報」表の SOT-23 から「製品プレビュー」の注を削除.....                           | <b>1</b> |
| • Added DDF (SOT-23) to the <i>Thermal Information</i> table..... | <b>5</b> |

### Changes from Revision \* (June 2021) to Revision A (August 2021) Page

|                                        |          |
|----------------------------------------|----------|
| • ドキュメントのステータスを「事前情報」から「量産データ」に変更..... | <b>1</b> |
|----------------------------------------|----------|

## 5 Pin Configuration and Functions


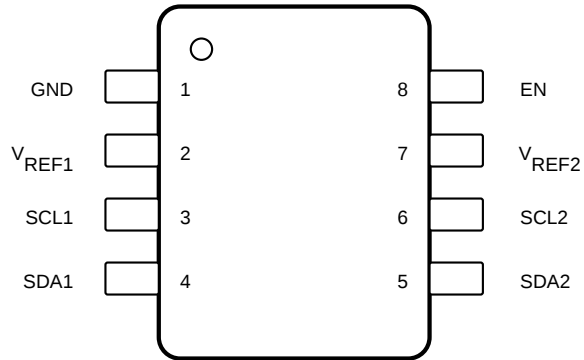


图 5-1. DDF Package, 8-Pin SOT, Top View



图 5-2. DCU Package, 8-Pin VSSOP, Top View

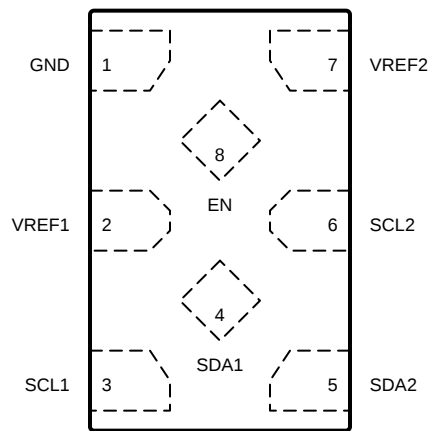

Not to scale

图 5-3. DTM Package, 8-Pin X2SON, Top View

表 5-1. Pin Functions

| PIN               |          |     | I/O | DESCRIPTION                                                  |
|-------------------|----------|-----|-----|--------------------------------------------------------------|
| NAME              | NO.      |     |     |                                                              |
|                   | DCU, DDF | DTM |     |                                                              |
| EN                | 8        | 8   | I   | Switch enable input                                          |
| GND               | 1        | 1   | —   | Ground, 0 V                                                  |
| SCL1              | 3        | 3   | I/O | Serial clock, low-voltage side                               |
| SCL2              | 6        | 6   | I/O | Serial clock, high-voltage side                              |
| SDA1              | 4        | 4   | I/O | Serial data, low-voltage side                                |
| SDA2              | 5        | 5   | I/O | Serial data, high-voltage side                               |
| V <sub>REF1</sub> | 2        | 2   | I   | Low-voltage-side reference supply voltage for SCL1 and SDA1  |
| V <sub>REF2</sub> | 7        | 7   | I   | High-voltage-side reference supply voltage for SCL2 and SDA2 |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                     |                                           | MIN  | MAX | UNIT |
|---------------------|-------------------------------------------|------|-----|------|
| V <sub>REF1</sub>   | DC reference voltage range                | –0.5 | 7   | V    |
| V <sub>REF2</sub>   | DC reference bias voltage range           | –0.5 | 7   | V    |
| V <sub>I</sub>      | Input voltage range <sup>(2)</sup>        | –0.5 | 7   | V    |
| V <sub>I/O</sub>    | Input-output voltage range <sup>(2)</sup> | –0.5 | 7   | V    |
|                     | Continuous channel current                |      | 128 | mA   |
| I <sub>IK</sub>     | Input Clamp Current (V <sub>I</sub> < 0 ) |      | –50 | mA   |
| T <sub>J(Max)</sub> | Junction temperature                      |      | 150 | °C   |
| T <sub>stg</sub>    | Storage temperature                       | –65  | 150 | °C   |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) The input and input-output negative voltage ratings may be exceeded if the input and output current ratings are observed.

### 6.2 ESD Ratings

|                    |                         |                                                                       | VALUE | UNIT |
|--------------------|-------------------------|-----------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>     | ±2000 | V    |
|                    |                         | Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup> | ±1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                                  |                                                         |                        | MIN | MAX | UNIT |
|----------------------------------|---------------------------------------------------------|------------------------|-----|-----|------|
| V <sub>I/O</sub>                 | Input-output voltage                                    | SCL1, SDA1, SCL2, SDA2 | 0   | 5.5 | V    |
| V <sub>REF1</sub> <sup>(1)</sup> | Reference Voltage                                       |                        | 0   | 5.5 | V    |
| V <sub>REF2</sub> <sup>(1)</sup> | Reference Voltage                                       |                        | 0   | 5.5 | V    |
| EN-Switch <sup>(2)</sup>         | Switch mode enable voltage (Switch mode enable voltage) |                        | 1.5 | 5.5 | V    |
| EN                               | Enable input voltage                                    |                        | 0   | 5.5 | V    |
| I <sub>PASS</sub>                | Pass switch current                                     |                        |     | 64  | mA   |
| T <sub>A</sub>                   | Ambient temperature                                     |                        | –40 | 125 | °C   |

- (1) To support translation, V<sub>REF1</sub> supports 0.85 V to V<sub>REF2</sub> - 0.6 V. V<sub>REF2</sub> must be between V<sub>REF1</sub> + 0.6 V to 5.5 V. See Typical Application for more information.
- (2) To support switching, V<sub>REF1</sub> and V<sub>REF2</sub> Do not need to be connected. EN pin should use a voltage not less than 1.5V when the switch mode is to be enabled. Enabled voltage on this pin should be equal to 1.5V or I/O supply voltage, whichever is higher.

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TCA39306 |        |        | UNIT |
|-------------------------------|----------------------------------------------|----------|--------|--------|------|
|                               |                                              | DCU      | DDF    | DTM    |      |
|                               |                                              | 8 PINS   | 8 PINS | 8 PINS |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 275.5    | 273.0  | 289.5  | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 127.1    | 180.7  | 185.5  | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 186.9    | 188.4  | 193.8  | °C/W |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 65.7     | 47.8   | 27.4   | °C/W |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 185.9    | 187.8  | 193.2  | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                      |                       |                           | TEST CONDITIONS                            |                                                                                      |            | MIN  | TYP<br>(1) | MAX  | UNIT |
|--------------------------------|-----------------------|---------------------------|--------------------------------------------|--------------------------------------------------------------------------------------|------------|------|------------|------|------|
| V <sub>IK</sub>                | Input clamp voltage   |                           | I <sub>I</sub> = -18 mA                    | EN = 0 V                                                                             |            | -1.2 |            | 0    | V    |
| I <sub>IH</sub>                | Input leakage current |                           | V <sub>I</sub> = 5 V, V <sub>O</sub> = 0 V | EN = 0 V                                                                             |            |      |            | 5    | μA   |
| V <sub>T</sub>                 | Threshold voltage     |                           | I <sub>O</sub> = 500 μA                    | V <sub>I</sub> = 0.1 V, V <sub>O</sub> = 0 V, Find V <sub>EN</sub> where IO = 500 μA |            |      | 0.7        | 1.0  | V    |
| C <sub>I(EN)</sub>             | Input capacitance     |                           | V <sub>I</sub> = 3 V or 0 V                |                                                                                      |            |      | 11         |      | pF   |
| C <sub>IO(off)</sub>           | Off capacitance       | SCLn, SDAn                | V <sub>O</sub> = 3 V or 0 V                | EN = 0 V                                                                             |            |      | 4          | 6    | pF   |
| C <sub>IO(on)</sub>            | On capacitance        | SCLn, SDAn                | V <sub>O</sub> = 3 V or 0 V                | EN = 3 V                                                                             |            |      | 10.5       | 12.5 | pF   |
| R <sub>ON</sub> <sup>(2)</sup> | On-state resistance   | SCLn, SDAn (-40 to 125°C) | V <sub>I</sub> = 0 V <sup>(3)</sup>        | I <sub>O</sub> = 64 mA                                                               | EN = 4.5 V |      | 3.5        | 5.5  | Ω    |
|                                |                       |                           | V <sub>I</sub> = 0 V <sup>(3)</sup>        | I <sub>O</sub> = 64 mA                                                               | EN = 3 V   |      | 4.7        | 7    | Ω    |
|                                |                       |                           | V <sub>I</sub> = 0 V <sup>(3)</sup>        | I <sub>O</sub> = 64 mA                                                               | EN = 2.3 V |      | 6.3        | 9.5  | Ω    |
|                                |                       |                           | V <sub>I</sub> = 0 V <sup>(3)</sup>        | I <sub>O</sub> = 15 mA                                                               | EN = 1.5 V |      | 25.5       | 32   | Ω    |
|                                |                       |                           | V <sub>I</sub> = 2.4 V <sup>(4)</sup>      | I <sub>O</sub> = 15 mA                                                               | EN = 4.5 V | 1    | 6          | 15   | Ω    |
|                                |                       |                           | V <sub>I</sub> = 2.4 V <sup>(4)</sup>      | I <sub>O</sub> = 15 mA                                                               | EN = 3 V   | 20   | 50         | 75   | Ω    |
|                                |                       |                           | V <sub>I</sub> = 1.7 V <sup>(4)</sup>      | I <sub>O</sub> = 15 mA                                                               | EN = 2.3 V | 20   | 55         | 75   | Ω    |

## 6.5 Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)

| PARAMETER       |                     |            | TEST CONDITIONS                                      |                        |              | MIN | TYP<br>(1) | MAX | UNIT |
|-----------------|---------------------|------------|------------------------------------------------------|------------------------|--------------|-----|------------|-----|------|
| R <sub>ON</sub> | On-state resistance | SCLn, SDAn | V <sub>I</sub> = 0 V,<br>VCC2 = 5 V <sup>(5)</sup>   | I <sub>O</sub> = 64 mA | VCC1 = 1 V   |     | 5          | 25  | Ω    |
|                 |                     |            |                                                      |                        | VCC1 = 1.8 V |     | 4          | 10  |      |
|                 |                     |            |                                                      |                        | VCC1 = 2.5 V |     | 3          | 8   |      |
|                 |                     |            |                                                      |                        | VCC1 = 3.3 V |     | 3          | 7   |      |
|                 |                     |            | I <sub>O</sub> = 32 mA                               |                        | VCC1 = 1 V   |     | 5          | 10  | Ω    |
|                 |                     |            |                                                      |                        | VCC1 = 1.8 V |     | 4          | 9   |      |
|                 |                     |            |                                                      |                        | VCC1 = 2.5 V |     | 3          | 8   |      |
|                 |                     |            |                                                      |                        | VCC1 = 3.3 V |     | 3          | 7   |      |
|                 |                     |            | V <sub>I</sub> = 1.8 V,<br>VCC2 = 5 V <sup>(5)</sup> | I <sub>O</sub> = 15 mA | VCC1 = 3.3 V |     | 4          | 13  | Ω    |
|                 |                     |            | V <sub>I</sub> = 1 V,<br>VCC2 = 3.3 V <sup>(5)</sup> | I <sub>O</sub> = 10 mA | VCC1 = 1.8 V |     | 7          | 24  | Ω    |
|                 |                     |            | V <sub>I</sub> = 0 V,<br>VCC2 = 3.3 V <sup>(5)</sup> | I <sub>O</sub> = 10 mA | VCC1 = 1 V   |     | 5          | 18  | Ω    |
|                 |                     |            | V <sub>I</sub> = 0 V,<br>VCC2 = 1.8 V <sup>(5)</sup> | I <sub>O</sub> = 10 mA | VCC1 = 1 V   |     | 6          | 19  | Ω    |

(1) All typical values are at T<sub>A</sub> = 25°C.

(2) Measured by the voltage drop between the SCL1 and SCL2, or SDA1 and SDA2 terminals, at the indicated current through the switch. Minimum ON-state resistance is determined by the lowest voltage of the two terminals.

(3) Measured in current source configuration only. See [Figure 7-1](#)

(4) Measured in current sink configuration only. See [Figure 7-1](#)

(5) Measured in application connected current source configuration only. See [Figure 7-2](#)

## 6.6 Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER        |                                              | TEST CONDITIONS                                                                         |                        | MIN | TYP | MAX | UNIT |
|------------------|----------------------------------------------|-----------------------------------------------------------------------------------------|------------------------|-----|-----|-----|------|
| T <sub>PLH</sub> | Low-to-high propagation delay <sup>(1)</sup> | V <sub>CC1</sub> = 0.85 V, V <sub>CC2</sub> = 1.98 V,<br>R <sub>L_Input</sub> = 1.35 kΩ | C <sub>L</sub> = 15 pF |     |     | 13  | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 32  |      |
|                  |                                              | V <sub>CC1</sub> = 0.85 V, V <sub>CC2</sub> = 3.6 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 15  | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 45  |      |
|                  |                                              | V <sub>CC1</sub> = 0.85 V, V <sub>CC2</sub> = 5.5 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 20  | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 46  |      |
|                  |                                              | V <sub>CC1</sub> = 1.65 V, V <sub>CC2</sub> = 3.6 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 8   | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 20  |      |
|                  |                                              | V <sub>CC1</sub> = 1.65 V, V <sub>CC2</sub> = 5.5 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 15  | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 35  |      |
|                  |                                              | V <sub>CC1</sub> = 3 V, V <sub>CC2</sub> = 5.5 V, R <sub>L_Input</sub> = 1.35 kΩ        | C <sub>L</sub> = 15 pF |     |     | 2   | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 5   |      |


## 6.6 Switching Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)


| PARAMETER        |                                              | TEST CONDITIONS                                                                         |                        | MIN | TYP | MAX | UNIT |
|------------------|----------------------------------------------|-----------------------------------------------------------------------------------------|------------------------|-----|-----|-----|------|
| T <sub>PHL</sub> | High-to-low propagation delay <sup>(1)</sup> | V <sub>CC1</sub> = 0.85 V, V <sub>CC2</sub> = 1.98 V,<br>R <sub>L_Input</sub> = 1.35 kΩ | C <sub>L</sub> = 15 pF |     |     | 3   | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 4   |      |
|                  |                                              | V <sub>CC1</sub> = 0.85 V, V <sub>CC2</sub> = 3.6 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 3   | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 5   |      |
|                  |                                              | V <sub>CC1</sub> = 0.85 V, V <sub>CC2</sub> = 5.5 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 3   | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 5   |      |
|                  |                                              | V <sub>CC1</sub> = 1.65 V, V <sub>CC2</sub> = 3.6 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 2   | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 3   |      |
|                  |                                              | V <sub>CC1</sub> = 1.65 V, V <sub>CC2</sub> = 5.5 V, R <sub>L_Input</sub> = 1.35 kΩ     | C <sub>L</sub> = 15 pF |     |     | 3   | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 3   |      |
|                  |                                              | V <sub>CC1</sub> = 3 V, V <sub>CC2</sub> = 5.5 V, R <sub>L_Input</sub> = 1.35 kΩ        | C <sub>L</sub> = 15 pF |     |     | 1.5 | ns   |
|                  |                                              |                                                                                         | C <sub>L</sub> = 50 pF |     |     | 2   |      |

(1) Measured with an application propagation delay setup. See [Figure 7-3](#)

## 6.7 Typical Characteristics

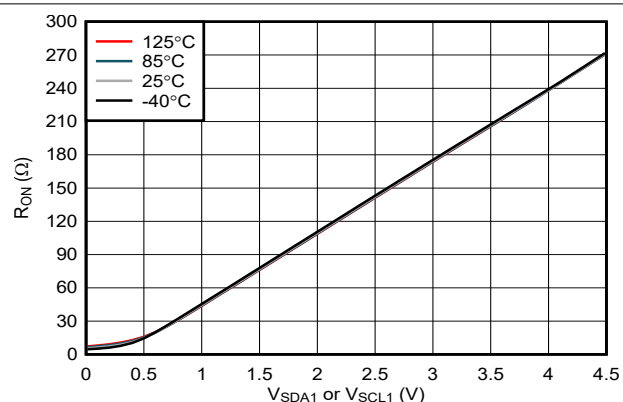

6-1. On-Resistance ( $R_{ON}$ ) vs Input Voltage ( $V_{SDA1}$  or  $V_{SCL1}$ )

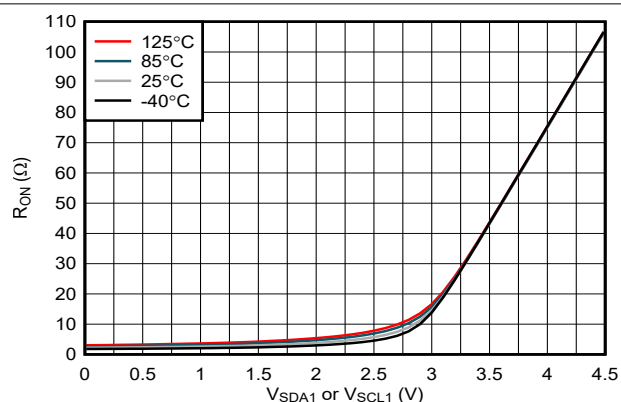

6-2. On-Resistance ( $R_{ON}$ ) vs Input Voltage ( $V_{SDA1}$  or  $V_{SCL1}$ )



## 7 Parameter Measurement Information

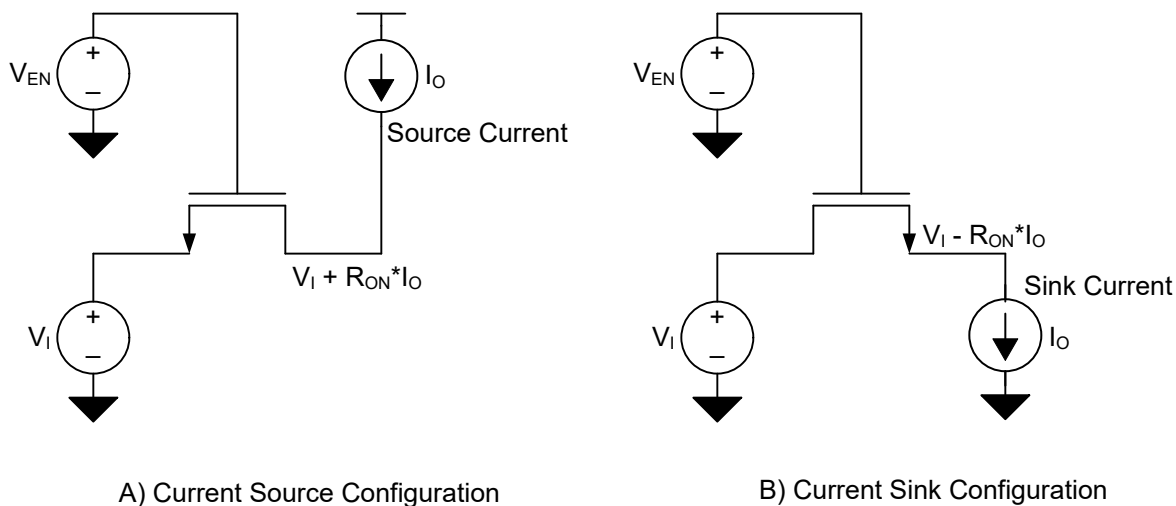


FIG 7-1. Current Source and Current Sink Configurations for Direct  $R_{ON}$  Measurements



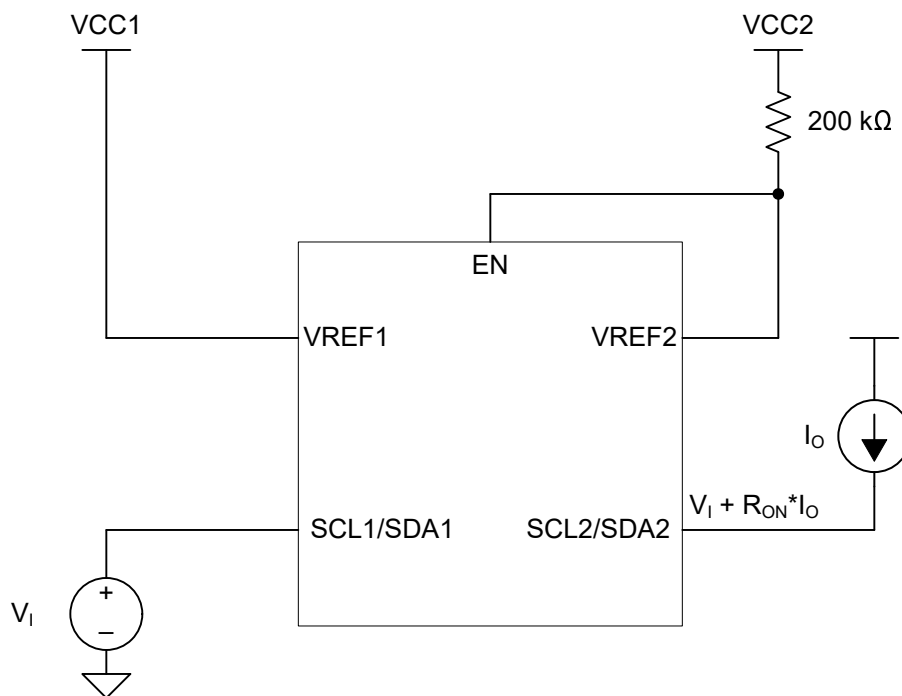


FIG 7-2. Application Setup for  $R_{ON}$  Delay

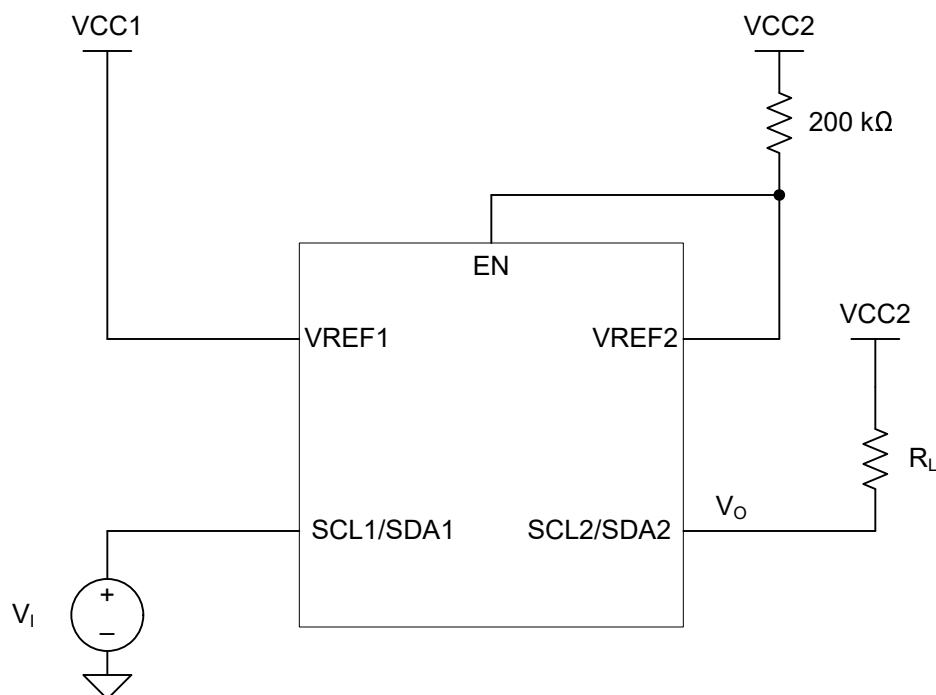

7-3. Application Setup for Propagation Delays Delay

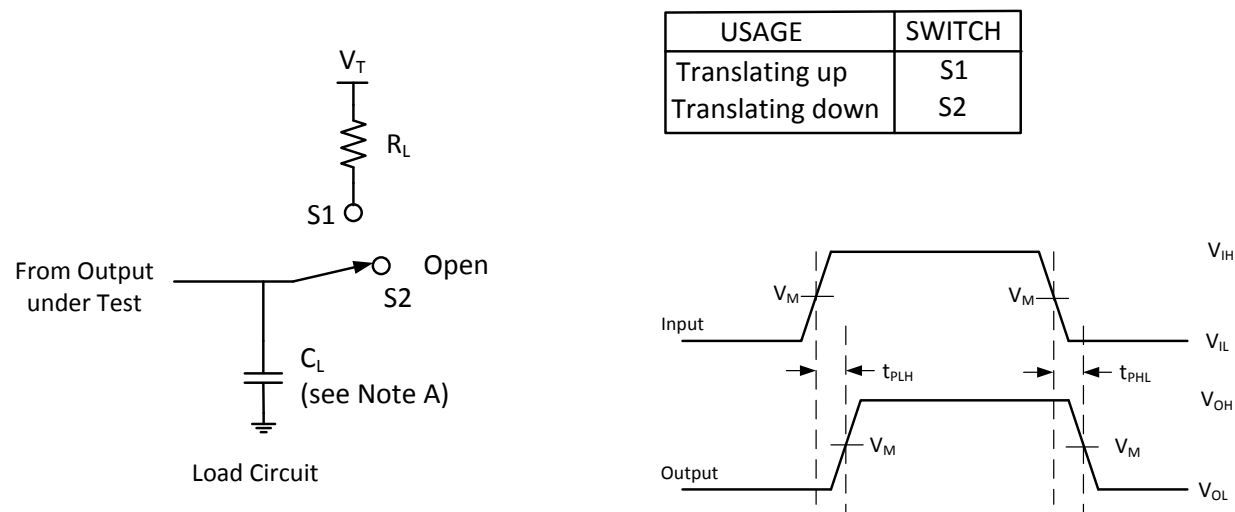

NOTES: A.  $C_L$  includes probe and jig capacitance

B. All input pulses are supplied by generators having the following characteristics:  $PRR \leq 10 \text{ MHz}$ ,  $Z_0 = 50 \Omega$ ,  $t_r \leq 2 \text{ ns}$ ,  $t_f \leq 2 \text{ ns}$ .

C. The outputs are measured one at a time, with one transition per measurement.

7-4. Load Circuit for Outputs

## 8 Detailed Description

### 8.1 Overview

The TCA39306 is a dual bidirectional voltage-level translator compatible with I<sup>2</sup>C, SMBus, and I<sup>3</sup>C with an enable (EN) input, and is operational from 0.9-V to 3.3-V  $V_{REF1}$  and 1.8-V to 5.5-V  $V_{REF2}$ .

The device allows bidirectional voltage translations between 0.85 V and 5 V, without the use of a direction pin. The low ON-state resistance ( $R_{ON}$ ) of the switch allows connections to be made with minimal propagation delay. When EN is high, the translator switch is ON, and the SCL1 and SDA1 I/O are connected to the SCL2 and SDA2 I/O, respectively, allowing bidirectional data flow between ports. When EN is low, the translator switch is off, and a high-impedance state exists between ports.

In addition to voltage translation, the TCA39306 can be used to isolate a higher speed bus from a lower speed bus by controlling the EN pin to disconnect the slower bus during fast-mode communication.

In I<sup>2</sup>C applications, the bus capacitance limit of 400 pF for Standard and Fast Modes, 550 pF for Fast Mode Plus restricts the number of devices and bus length. The capacitive load on both sides of the device must be taken into account when approximating the total load of the system, specifying the sum of both sides is under 400/550 pF.

Both the SDA and SCL channels of the device have the same electrical characteristics, and there is minimal deviation from one output to another in voltage or propagation delay. This is a benefit over discrete-transistor voltage-translation solutions, because the fabrication of the switch is symmetrical.

#### 8.1.1 Definition of threshold voltage

This document references a threshold voltage denoted as  $V_{th}$ , which appears multiple times throughout this document when discussing the NFET between  $V_{REF1}$  and  $V_{REF2}$ . The value of  $V_{th}$  is approximately 0.6 V at room temperature.

#### 8.1.2 Correct Device Set Up

In a normal set up shown in [Figure 8-1](#), the enable pin and  $V_{REF2}$  are shorted together and tied to a 200-k $\Omega$  resistor, and a reference voltage equal to  $V_{REF1}$  plus the FET threshold voltage is established. This reference voltage is used to help pass lows from one side to another more effectively while still separating the different pull up voltages on both sides.


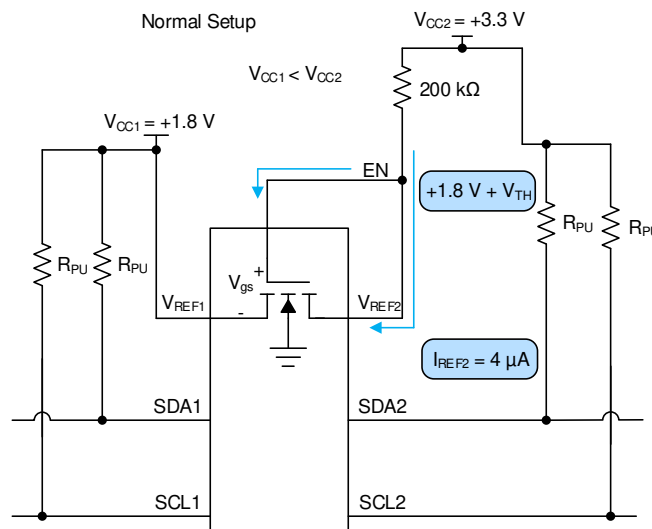


Figure 8-1. Normal Setup

Care should be taken to make sure  $V_{REF2}$  has an external resistor tied between it and  $V_{CC2}$ . If  $V_{REF2}$  is tied directly to the  $V_{CC2}$  rail without a resistor, then there is no external resistance from the  $V_{CC2}$  to  $V_{CC1}$  to limit the

current such as in [Figure 8-2](#). This effectively looks like a low impedance path for current to travel through and potentially break the pass FET if the current flowing through the pass FET is larger than the absolute maximum continuous channel current specified in the [Absolute Maximum Ratings](#). The continuous channel current is larger with a higher voltage difference between  $V_{CC1}$  and  $V_{CC2}$ .


Figure 8-2 shows an improper set up. If  $V_{CC2}$  is larger than  $V_{CC1}$  but less than  $V_{th}$ , the impedance between  $V_{CC1}$  and  $V_{CC2}$  is high resulting in a low drain to source current, which does not cause damage to the device. Concern arises when  $V_{CC2}$  becomes larger than  $V_{CC1}$  by  $V_{th}$ . During this event, the NFET turns on and begin to conduct current. This current is dependent on the gate to source voltage and drain to source voltage.

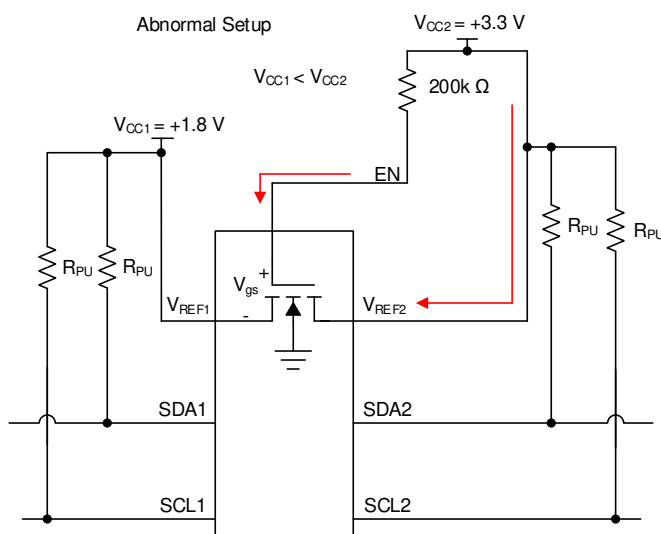

## 8-2. Abnormal Setup

### 8.1.3 Disconnecting a Responder from the Main Bus Using the EN Pin

TCA39306 can be used as a switch to disconnect one side of the device from the main bus, whether isolating I3C and I2C devices or different speed groups. This can be advantageous in multiple situations. One instance of this situation is if there are devices on the I2C bus which only supports fast mode (400 kHz) while other devices on the bus support fast mode plus (1 MHz). An example of this is displayed in [Figure 8-3](#).

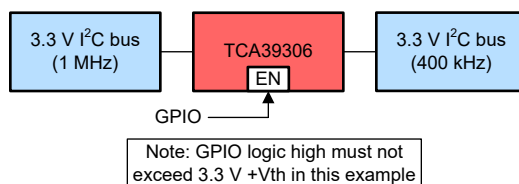


### 8-3. Example of an I2C bus with multiple supported frequencies

In this situation, if the controller is on the 1 MHz side then communicating at 1 MHz should not be attempted if TCA39306 were enabled. It needs to be disabled for the device to avoid possibly glitching state machines in devices which were designed to operate correctly at 400 kHz or slower. When the device is disabled, the controller can communicate with the 1 MHz devices without disturbing the 400 kHz bus. When the device is enabled, communication across both sides at 400 kHz is acceptable.

### 8.1.4 Supporting Remote Board Insertion to Backplane with TCA39306

Another situation where TCA39306 is advantageous when using its enable feature is when a remote board with I2C lines needs to be attached to a main board (backplane) with an I2C bus such as in [Figure 8-4](#). If connecting a remote board to a backplane is not done properly, the connection could result in data corruption during a transaction or the insertion could generate an unintended pulse on the SCL line. Which could glitch an I2C device state machine causing the I2C bus to get stuck.

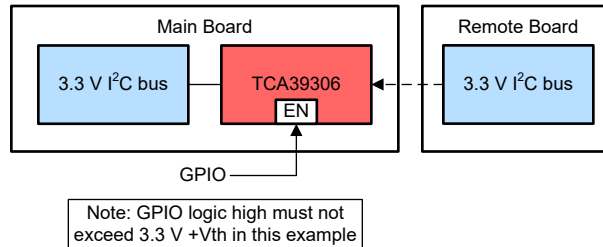


**8-4. An example of connecting a remote board to a main board (backplane)**


TCA39306 can be used to support this application because it can be disabled while making the connection. Then it is enabled once the remote board is powered on and the buses on both sides are IDLE.

### 8.1.5 Switch Configuration

TCA39306 has the capability of being used with its  $V_{REF1}$  voltage equal to  $V_{REF2}$ . This essentially turns the device from a translator to a device which can be used as a switch, and in some situations this can be useful. The switch configuration is shown in 8-5 and translation mode is shown in 8-6.

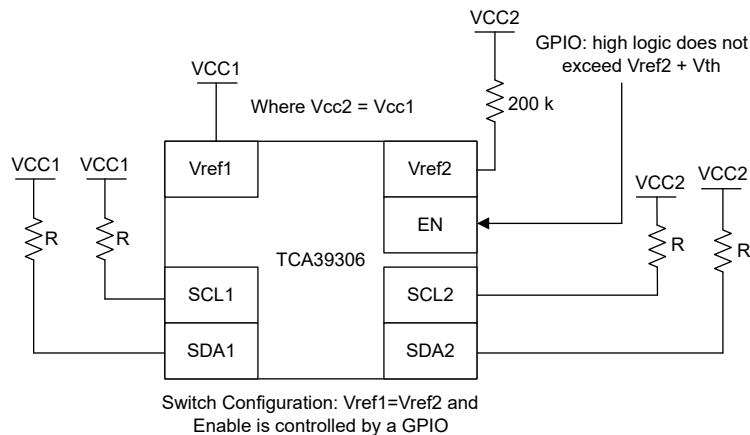

**8-5. Switch Configuration**

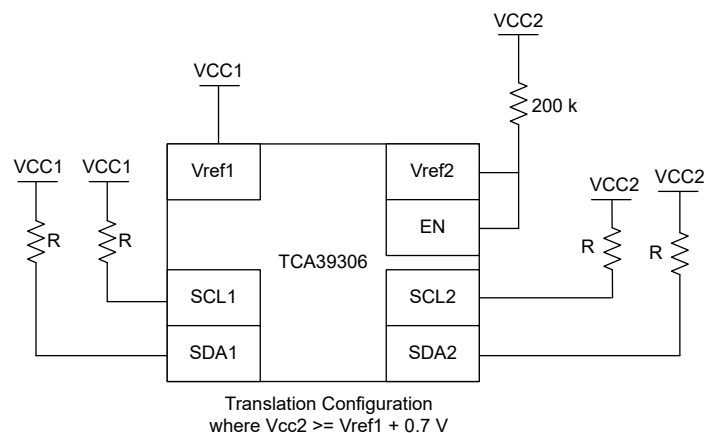


**8-6. Translation Configuration**

When TCA39306 is in the switch configuration ( $V_{REF1} = V_{REF2}$ ), the propagation delays are different compared to the translator configuration. Taking a look at the propagation delays, if the pull up resistance and capacitance on both sides of the bus are equal, then in switch mode the device has the same propagation delay from side one to two and side two to one. The propagation delays become lower when  $V_{CC1}/V_{CC2}$  is larger. For example, the propagation delay at 1.8 V is longer than at 5 V in the switching configuration. When the device is in translation

mode, side one propagate lows to side two faster than side two can propagate lows to side 1. This time difference becomes larger the larger the difference between  $V_{CC2}$  and  $V_{CC1}$  becomes.

### 8.1.6 Controller on Side 1 or Side 2 of Device


I2C and SMBus are bidirectional protocol meaning devices on the bus can both transmit and receive data. TCA39306 was designed to allow for signals to be able to be transmitted from either side, thus allowing for the controller to be able to place on either side of the device. [Figure 8-7](#) shows the controller on side two as opposed to the diagram on page 1 of this data sheet.

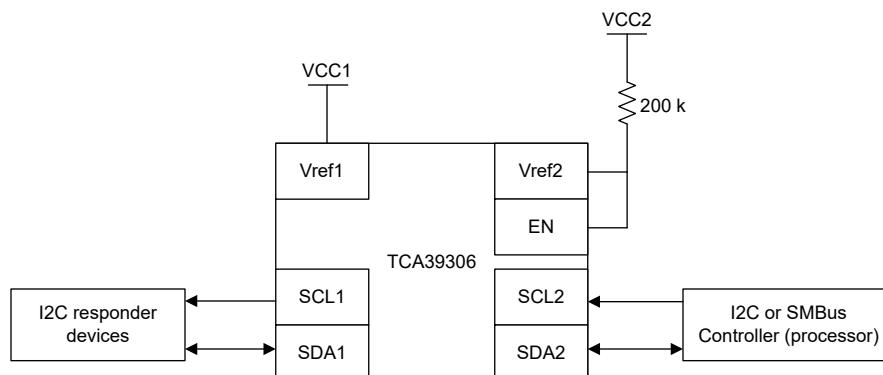

**Figure 8-7. Controller on side 2**


### 8.1.7 LDO and TCA39306 Concerns

The  $V_{REF1}$  pin can be supplied by a low-dropout regulator (LDO), but in some cases the LDO may lose its regulation because of the bias current from  $V_{REF2}$  to  $V_{REF1}$ . If the LDO cannot sink the bias current, then the current has no other paths to ground and instead charges up the capacitance on the  $V_{REF1}$  node (both external and parasitic). This results in an increase in voltage on the  $V_{REF1}$  node. If no other paths for current to flow are established (such as back biasing of body diodes or clamping diodes through other devices on the  $V_{REF1}$  node), then the  $V_{REF1}$  voltage ends up stabilizing when  $V_{gs}$  of the pass FET is equal to  $V_{th}$ . This means  $V_{REF1}$  node voltage is  $V_{CC2} - V_{th}$ . Note that any secondary or primaries running off of the LDO now see the  $V_{CC2} - V_{th}$  voltage which may cause damage to those secondary or primaries if they are not rated to handle the increased voltage.

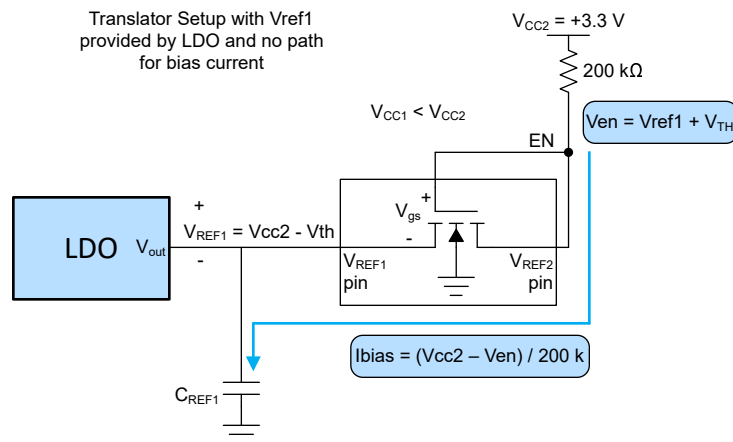

**Figure 8-8. Example of no leakage current path when using LDO**

To make sure the LDO does not lose regulation due to the bias current of TCA39306, a weak pull down resistor can be placed on  $V_{REF1}$  to ground to provide a path for the bias current to travel. The recommended pull down resistor is calculated by [Equation 4](#) where 0.75 gives about 25% margin for error incase bias current increases during operation.

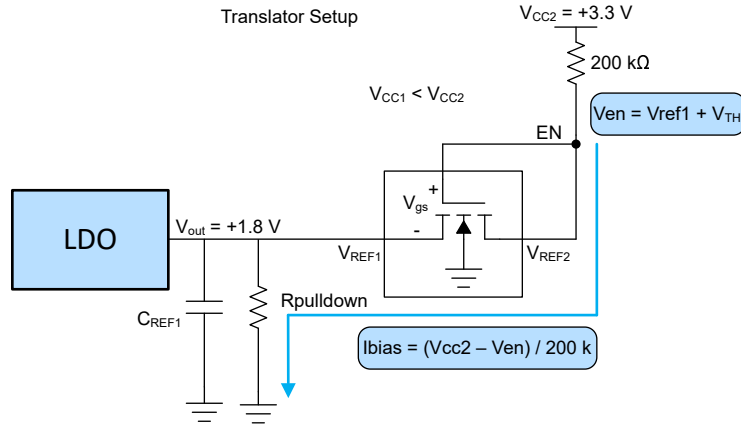

**8-9. Example with Leakage current path when using an LDO**

$$V_{en} = V_{REF1} + V_{th} \quad (1)$$

where

- $V_{th}$  is approximately 0.6 V

$$I_{bias} = (V_{CC2} - V_{en})/200 \text{ k} \quad (2)$$

$$R_{pulldown} = V_{OUT}/I_{bias} \quad (3)$$

$$\text{Recommended } R_{pulldown} = R_{pulldown} \times 0.75 \quad (4)$$

### 8.1.8 Current Limiting Resistance on $V_{REF2}$

The resistor is used to limit the current between  $V_{REF2}$  and  $V_{REF1}$  (denoted as  $R_{CC}$ ) and helps to establish the reference voltage on the enable pin. The 200k resistor can be changed to a lower value; however, the bias current proportionally increases as the resistor decreases.

$$I_{bias} = (V_{CC2} - V_{en})/R_{CC} : V_{en} = V_{REF1} + V_{th} \quad (5)$$

where

- $V_{th}$  is approximately 0.6 V


Keep in mind  $R_{CC}$  should not be sized low enough that  $I_{CC}$  exceeds the absolute maximum continuous channel current specified in the *Absolute Maximum Ratings* which is described in 式 6.

$$R_{CC}(\min) \geq (V_{CC2} - V_{en})/0.128 : V_{en} = V_{REF1} + V_{th} \quad (6)$$

where

- $V_{th}$  is approximately 0.6 V

## 8.2 Functional Block Diagram

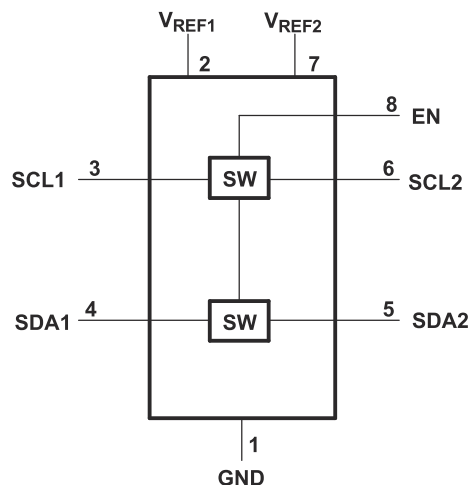

## 8.3 Feature Description

### 8.3.1 Enable (EN) Pin

The device is a double-pole, single-throw switch in which the gate of the transistors is controlled by the voltage on the EN pin. In [Figure 9-1](#), the device is always enabled when power is applied to  $V_{REF2}$ . In [Figure 9-2](#), the device is enabled when a control signal from a processor is in a logic-high state.

### 8.3.2 Voltage Translation

The primary feature of the device is translating voltage from an I<sup>2</sup>C bus referenced to  $V_{REF1}$  up to an I<sup>2</sup>C bus referenced to  $V_{DPU}$ , to which  $V_{REF2}$  is connected through a 200-k $\Omega$  pullup resistor. Translation on a standard, open-drain I<sup>2</sup>C bus is achieved by simply connecting pullup resistors from SCL1 and SDA1 to  $V_{REF1}$  and connecting pullup resistors from SCL2 and SDA2 to  $V_{DPU}$ . Information on sizing the pullup resistors can be found in the [Sizing Pullup Resistors](#) section.

## 8.4 Device Functional Modes

| INPUT<br>EN <sup>(1)</sup> | TRANSLATOR FUNCTION                                                                                                                     |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| H                          | Logic Lows are propagated from one side to the other, Logic Highs blocked (independent pull up resistors passively drive the line high) |
| L                          | Disconnect                                                                                                                              |

(1) The SCL switch conducts if EN is  $\geq 0.6$  V higher than SCL1 or SCL2. The same is true of SDA.



## 9 Application and Implementation

### 注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

### 9.1 Application Information

#### 9.1.1 General Applications of I<sup>2</sup>C

As with the standard I<sup>2</sup>C system, pullup resistors are required to provide the logic-high levels on the translator bus. The size of these pullup resistors depends on the system, but each side of the repeater must have a pullup resistor. The device is designed to work with standard-mode and fast-mode I<sup>2</sup>C devices in addition to SMBus devices. Standard-mode I<sup>2</sup>C devices only specify 3 mA in a generic I<sup>2</sup>C system where standard-mode devices and multiple controllers are possible. Under certain conditions, high termination currents can be used. When the SDA1 or SDA2 port is low, the clamp is in the ON state, and a low-resistance connection exists between the SDA1 and SDA2 ports. Assuming the higher voltage is on the SDA2 port when the SDA2 port is high, the voltage on the SDA1 port is limited to the voltage set by  $V_{REF1}$ . When the SDA1 port is high, the SDA2 port is pulled to the pullup supply voltage of the drain ( $V_{DPU}$ ) by the pullup resistors. This functionality allows a seamless translation between higher and lower voltages selected by the user, without the need for directional control. The SCL1-SCL2 channel also functions in the same way as the SDA1-SDA2 channel.

### 9.2 Typical Application

図 9-1 和 図 9-2 show how these pullup resistors are connected in a typical application, as well as two options for connecting the EN pin.

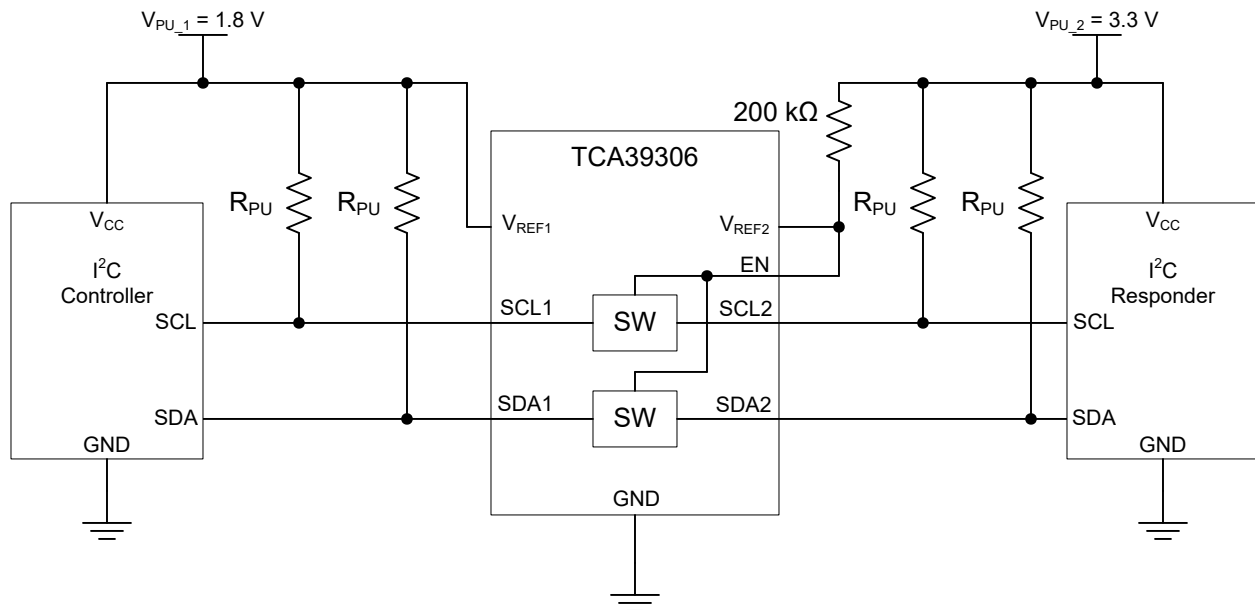


図 9-1. Typical Application Circuit (Switch Always Enabled)

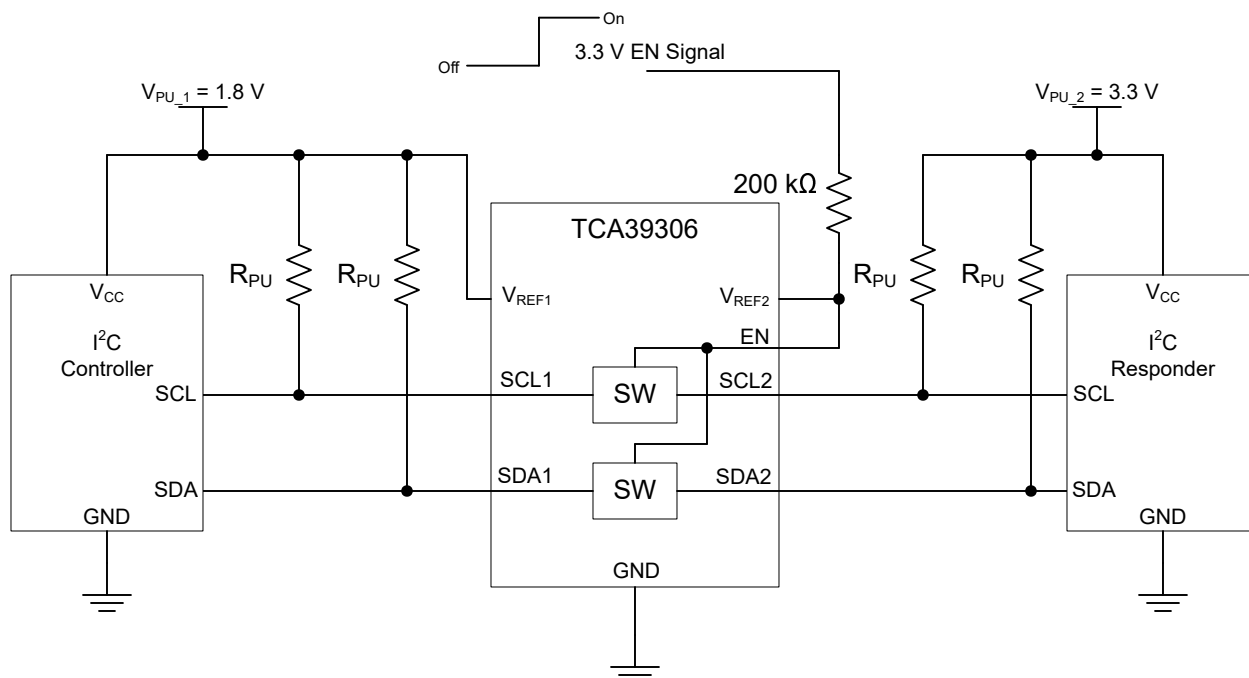


Figure 9-2. Typical Application Circuit (Switch Enable Control)

### 9.2.1 Design Requirements

|                   |                              | MIN                     | TYP <sup>(1)</sup> | MAX | UNIT |
|-------------------|------------------------------|-------------------------|--------------------|-----|------|
| V <sub>REF2</sub> | Reference voltage            | V <sub>REF1</sub> + 0.6 | 2.1                | 5   | V    |
| EN                | Enable input voltage         | V <sub>REF1</sub> + 0.6 | 2.1                | 5   | V    |
| V <sub>REF1</sub> | Reference voltage            | 0.9                     | 1.5                | 4.4 | V    |
| I <sub>PASS</sub> | Pass switch current          |                         | 6                  |     | mA   |
| I <sub>REF</sub>  | Reference-transistor current |                         | 5                  |     | μA   |

(1) All typical values are at T<sub>A</sub> = 25°C.

### 9.2.2 Detailed Design Procedure

#### 9.2.2.1 Bidirectional Voltage Translation

For the bidirectional clamping configuration (higher voltage to lower voltage or lower voltage to higher voltage), the EN input must be connected to V<sub>REF2</sub> and both pins pulled to high-side V<sub>DDPU</sub> through a pullup resistor (typically 200 kΩ). This allows V<sub>REF2</sub> to regulate the EN input. A 100-pF filter capacitor connected to V<sub>REF2</sub> is recommended. The I²C bus controller output can be push-pull or open-drain (pullup resistors may be required) and the I²C bus device output can be open-drain (pullup resistors are required to pull the SCL2 and SDA2 outputs to V<sub>DDPU</sub>). However, if either output is push-pull, data must be unidirectional or the outputs must be 3-state capable and be controlled by some direction-control mechanism to prevent high-to-low contentions in either direction. If both outputs are open-drain, no direction control is needed.

#### 9.2.2.2 Sizing Pullup Resistors

To get an estimate for the range of values that can be used for the pullup resistor, please refer to the application note [SLVA689](#). Figure 9-3 and Figure 9-4 respectively show the maximum and minimum pullup resistance allowable by the I²C specification for standard-mode (100 kHz) and fast-mode (400 kHz) operation.

### 9.2.2.3 Bandwidth

The maximum frequency of the device depends on the application. The device can operate at speeds of > 100 MHz given the correct conditions. The maximum frequency is dependent upon the loading of the application.

However, this is an analog type of measurement. For digital applications, the signal should not degrade up to the fifth harmonic of the digital signal. The frequency bandwidth should be at least five times the maximum digital clock rate. This component of the signal is important in determining the overall shape of the digital signal. In the case of the device, digital clock frequency of >100 MHz can be achieved.

The device does not provide any drive capability like the TCA9517 or other buffered translators. Therefore, higher-frequency applications require higher drive strength from the host side. No pullup resistor is needed on the host side (3.3 V) if the device is being driven by standard CMOS push-pull output driver. Ideally, it is best to minimize the trace length from device on the sink side (1.8 V) to minimize signal degradation.

You can then use a simple formula to compute the maximum *practical* frequency component or the *knee* frequency ( $f_{knee}$ ). All fast edges have an infinite spectrum of frequency components. However, there is an inflection (or *knee*) in the frequency spectrum of fast edges where frequency components higher than  $f_{knee}$  are insignificant in determining the shape of the signal.

To calculate  $f_{knee}$ :

$$f_{knee} = 0.5 / RT \text{ (10\%–90\%)} \quad (7)$$


$$f_{knee} = 0.4 / RT \text{ (20\%–80\%)} \quad (8)$$

For signals with rise-time characteristics based on 10- to 90-percent thresholds,  $f_{knee}$  is equal to 0.5 divided by the rise time of the signal. For signals with rise-time characteristics based on 20- to 80-percent thresholds, which is very common in many current device specifications,  $f_{knee}$  is equal to 0.4 divided by the rise time of the signal.

Some guidelines to follow that help maximize the performance of the device:

- Keep trace length to a minimum by placing the device close to the I<sup>2</sup>C output of the processor.
- The trace length should be less than half the time of flight to reduce ringing and line reflections or non-monotonic behavior in the switching region.
- To reduce overshoots, a pullup resistor can be added on the 1.8 V side; be aware that a slower fall time is to be expected.

### 9.2.3 Application Curve

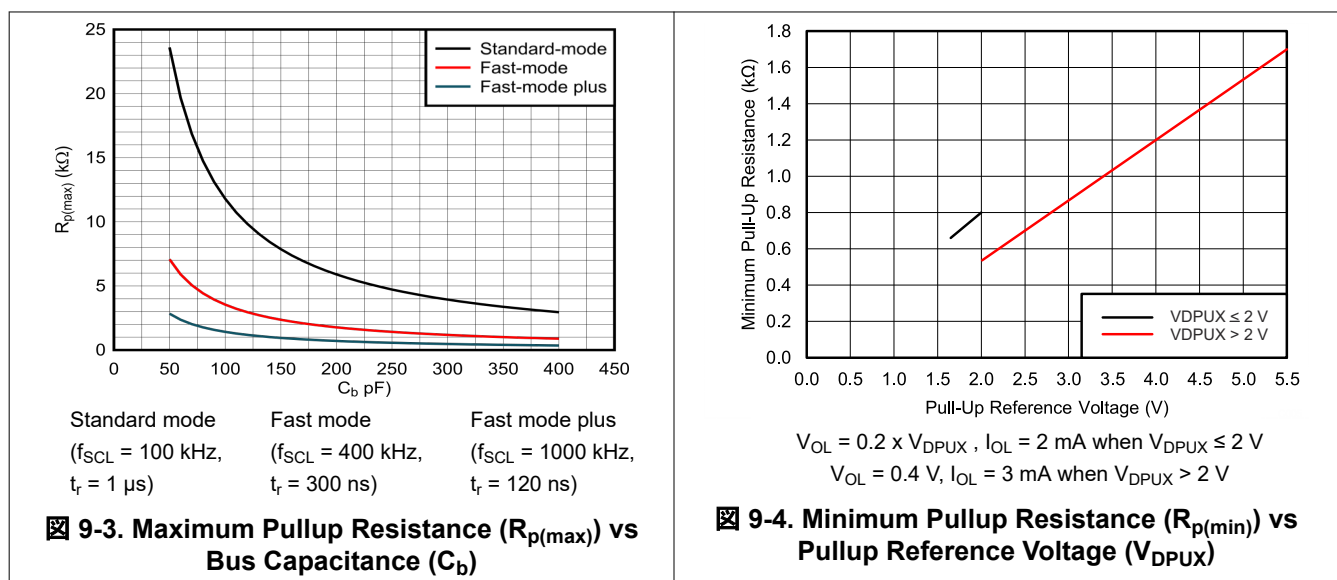

### 9.3 Systems Examples: I3C Usage Considerations

The TCA39306 has bandwidth to support the high speeds needed for I3C, but there are special considerations which are required. Since I3C uses both push-pull and open-drain, it may not be possible to support all I3C applications with a FET-based translator.

#### 9.3.1 I3C Bus Switching

Bus switching is when the bus path is enabled or disabled, but does not translate the bus voltage. External pull-up resistors are not needed for I3C, because the controller enables or disables the pull-up resistor on the SDA line. This presents a unique challenge for FET-based translators, like the TCA39306, because they rely on a pull-up resistor to pull the output side of the switch all the way to supply. For the switching use case, there is no translation, but the enable voltage must be high enough for the switch to stay on for the entire voltage range of the bus (0 V to bus voltage).

$R_{ON}$  must be low enough for the full push-pull voltage range. The EN voltage must be at least  $1 V_t$  (~0.6 V) above the maximum desired pass-voltage. This comes out to  $V_{EN} \geq V_{BUS} + 0.6 V$ . Since the switch enable voltage is being directly controlled, the  $V_{REF1}$  and  $V_{REF2}$  pins are not needed, and can be shorted to ground to improve power consumption.

It is possible to control the EN pin with a voltage equal to  $V_{BUS}$ , but external pull-up resistors on the downstream side are a requirement to ensure the bus is pulled entirely to  $V_{BUS}$ .


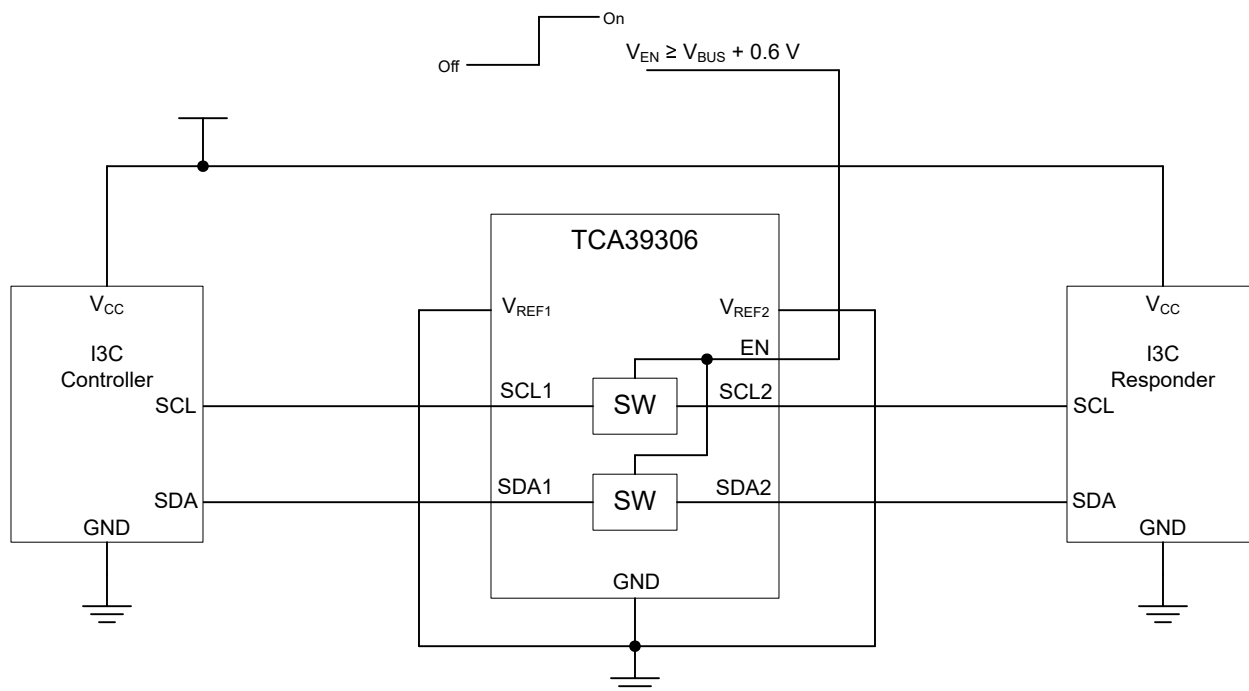


FIG 9-5. I3C Bus Switching Application (Without Pull-up Resistors)

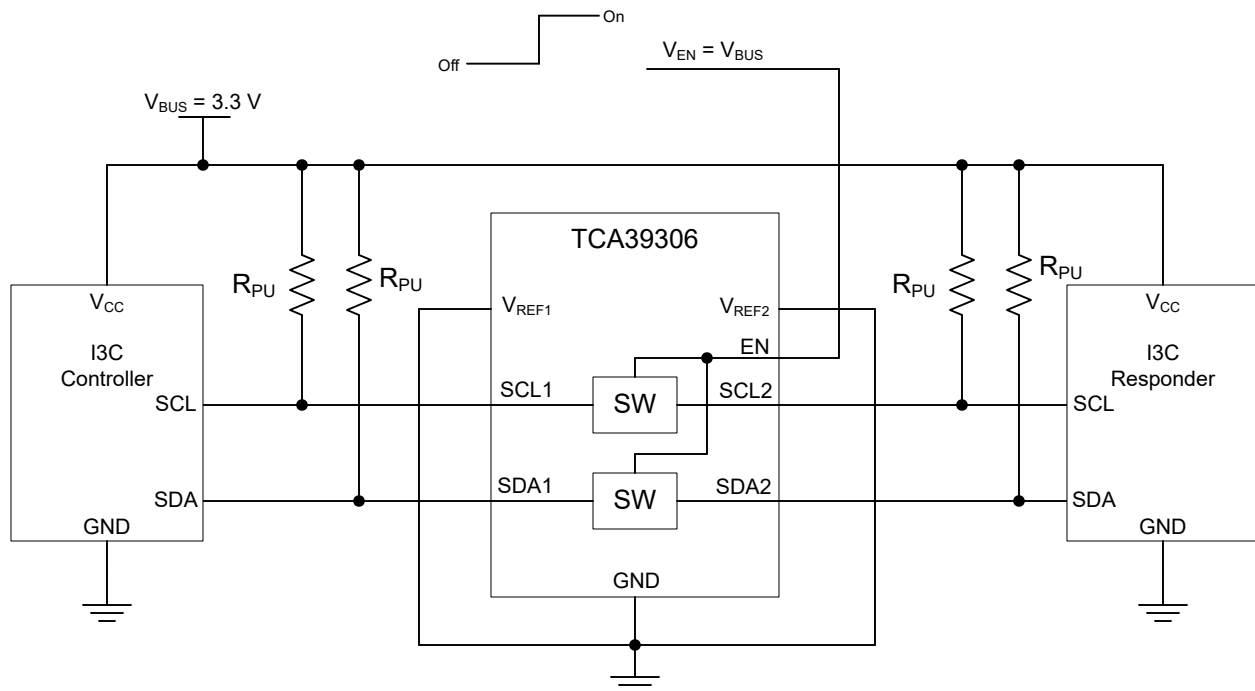

**FIG 9-6. I3C Bus Switching Application (With Pull-up Resistors)**

### 9.3.2 I3C Bus Voltage Translation

Bus voltage translation is when the bus voltage is translated up or down. This presents a unique challenge with I3C for FET-based translators, like the TCA39306, because they rely on a pull-up resistor to translate the voltage up from the low-voltage side. The pull-up resistor selected must be strong enough to meet the timing requirements (based on bus capacitance and translation voltages), but not so strong to violate the  $V_{IL}$  requirements of the I3C devices.

The pull-up resistors are needed on both sides. The reason for this is that with the normal translation setup, the switch is "on" when either side's bus voltage drops to roughly  $V_{PU\_1}$ . This means that the pull-up resistors are required to pull the bus voltage on the high-voltage side from  $V_{PU\_1}$  to  $V_{PU\_2}$ . When the device on the high-voltage side is controlling the bus, the switch will turn off at  $V_{PU\_1}$ . The pull-up resistors on the low-voltage side are used to bleed off any additional current that might "leak" through the switch.

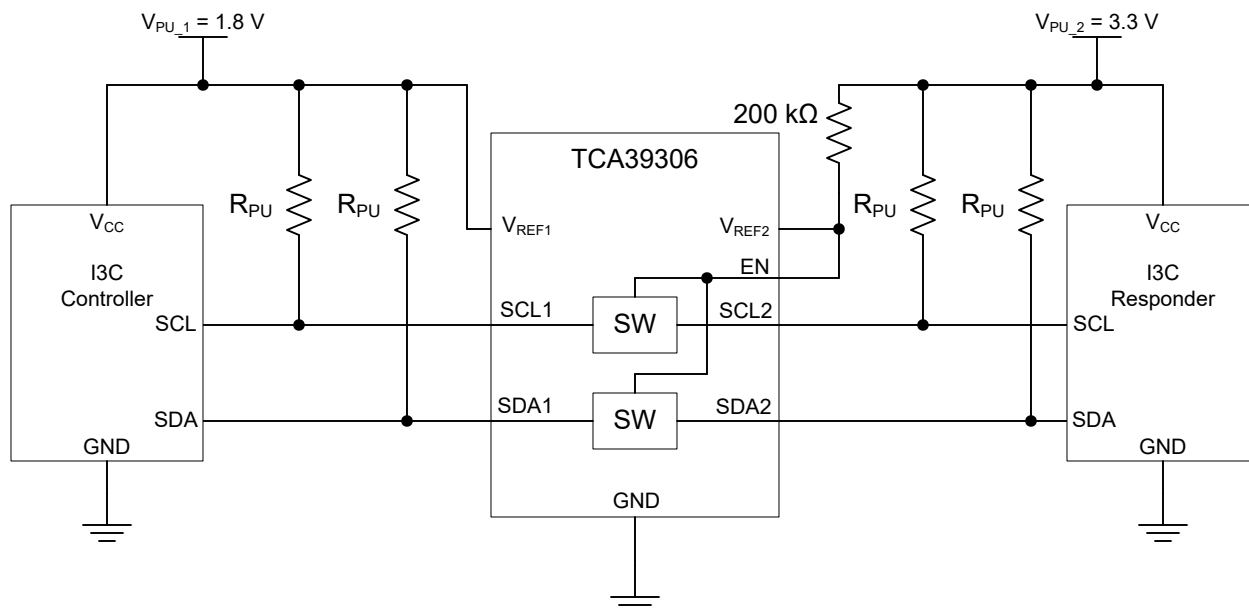


FIG 9-7. I3C Bus Translation

## 9.4 Power Supply Recommendations

For supplying power to the device, the  $V_{REF1}$  pin can be connected directly to a power supply. The  $V_{REF2}$  pin must be connected to the  $V_{DPU}$  power supply through a 200-kΩ resistor. Failure to have a high-impedance resistor between  $V_{REF2}$  and  $V_{DPU}$  results in excessive current draw and unreliable device operation. It is also worth noting, that in order to support voltage translation, the device must have the EN and VREF2 pins shorted and then pulled up to  $V_{DPU}$  through a high-impedance resistor.

## 9.5 Layout

### 9.5.1 Layout Guidelines

For printed-circuit board (PCB) layout of the device, common PCB layout practices should be followed, but additional concerns related to high-speed data transfer such as matched impedances and differential pairs are not a concern for I<sup>2</sup>C signal speeds.

In all PCB layouts, it is a best practice to avoid right angles in signal traces, to fan out signal traces away from each other on leaving the vicinity of an integrated circuit (IC), and to use thicker trace widths to carry higher amounts of current that commonly pass through power and ground traces. The 100-pF filter capacitor should be placed as close to  $V_{REF2}$  as possible. A larger decoupling capacitor can also be used, but a longer time constant of two capacitors and the 200-kΩ resistor results in longer turnon and turnoff times for the TCA39306 device. These best practices are shown in FIG 9-8.

For the layout example provided in FIG 9-8, it would be possible to fabricate a PCB with only two layers by using the top layer for signal routing and the bottom layer as a split plane for power ( $V_{CC}$ ) and ground (GND). However, a four-layer board is preferable for boards with higher-density signal routing. On a four-layer PCB, it is common to route signals on the top and bottom layer, dedicate one internal layer to a ground plane, and dedicate the other internal layer to a power plane. In a board layout using planes or split planes for power and ground, vias are placed directly next to the surface-mount component pad, which must attach to  $V_{CC}$  or GND, and the via is connected electrically to the internal layer or the other side of the board. Vias are also used when a signal trace must be routed to the opposite side of the board, but this technique is not demonstrated in FIG 9-8.

## 9.5.2 Layout Example

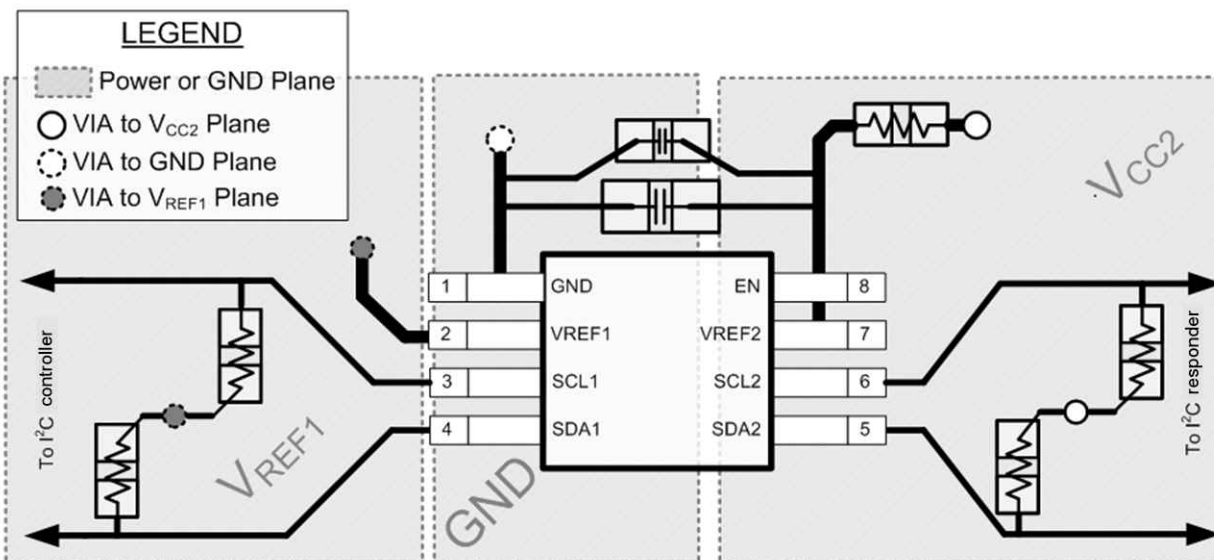


図 9-8. Layout Example

## 10 Device and Documentation Support

### 10.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 10.2 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の [使用条件](#) を参照してください。

### 10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

### 10.4 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

### 10.5 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most-current data available for the designated device. This data is subject to change without notice and without revision of this document. For browser-based versions of this data sheet, see the left-hand navigation pane.



## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins        | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|-----------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TCA39306DCUR</a> | Active        | Production           | VSSOP (DCU)   8       | 3000   LARGE T&R      | Yes         | NIPDAU   SN<br>  NIPDAUAG            | Level-1-260C-UNLIM                | -40 to 125   | (2GPT, 2GVI)        |
| TCA39306DCUR.A               | Active        | Production           | VSSOP (DCU)   8       | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | (2GPT, 2GVI)        |
| <a href="#">TCA39306DDFR</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 2M9H                |
| TCA39306DDFR.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | 2M9H                |
| <a href="#">TCA39306DTMR</a> | Active        | Production           | X2SON (DTM)   8       | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 1IH                 |
| TCA39306DTMR.A               | Active        | Production           | X2SON (DTM)   8       | 5000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 1IH                 |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**OTHER QUALIFIED VERSIONS OF TCA39306 :**

- Automotive : [TCA39306-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects


## TAPE AND REEL INFORMATION

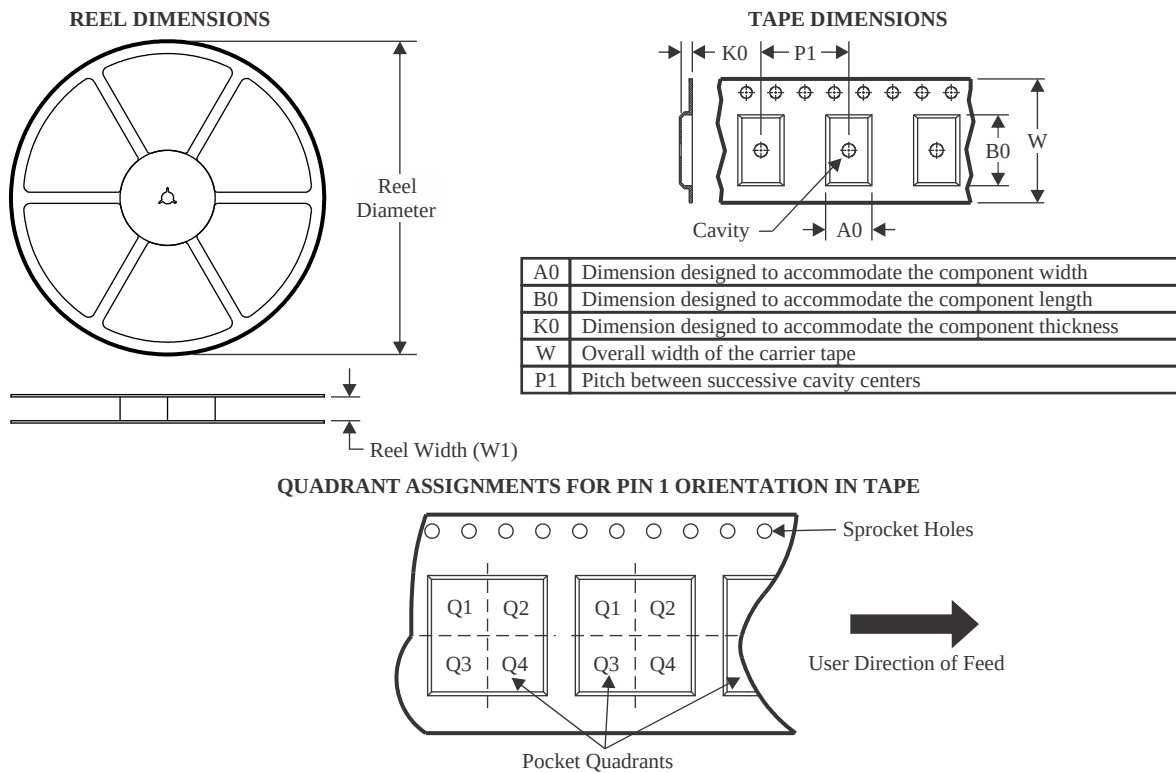

\*All dimensions are nominal


| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TCA39306DCUR | VSSOP        | DCU             | 8    | 3000 | 178.0              | 9.0                | 2.25    | 3.35    | 1.05    | 4.0     | 8.0    | Q3            |
| TCA39306DTMR | X2SON        | DTM             | 8    | 5000 | 178.0              | 8.4                | 0.93    | 1.49    | 0.43    | 2.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS

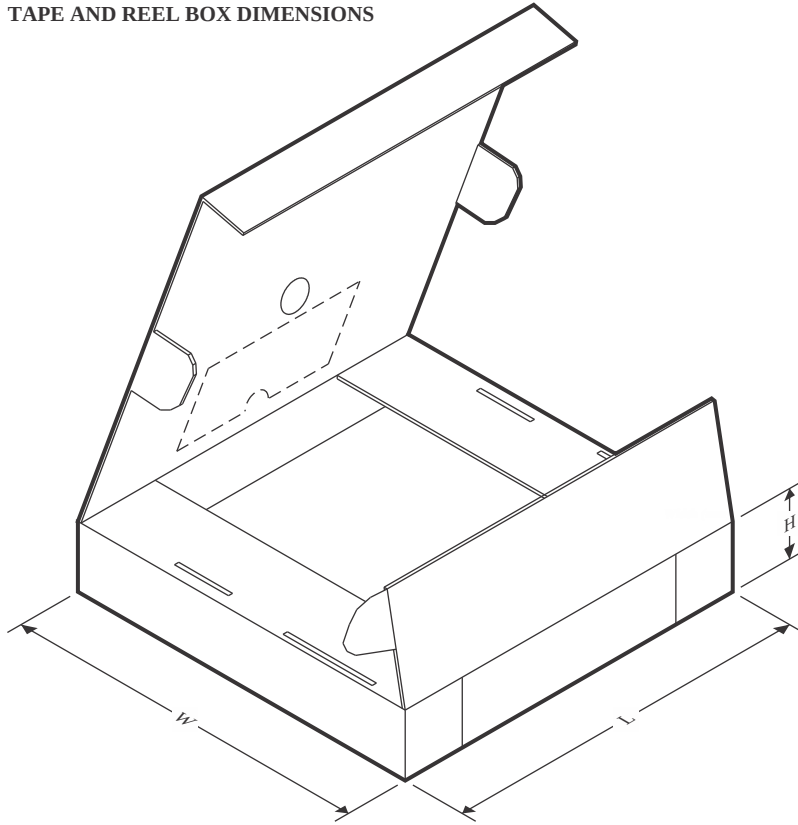

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TCA39306DCUR | VSSOP        | DCU             | 8    | 3000 | 180.0       | 180.0      | 18.0        |
| TCA39306DTMR | X2SON        | DTM             | 8    | 5000 | 205.0       | 200.0      | 33.0        |

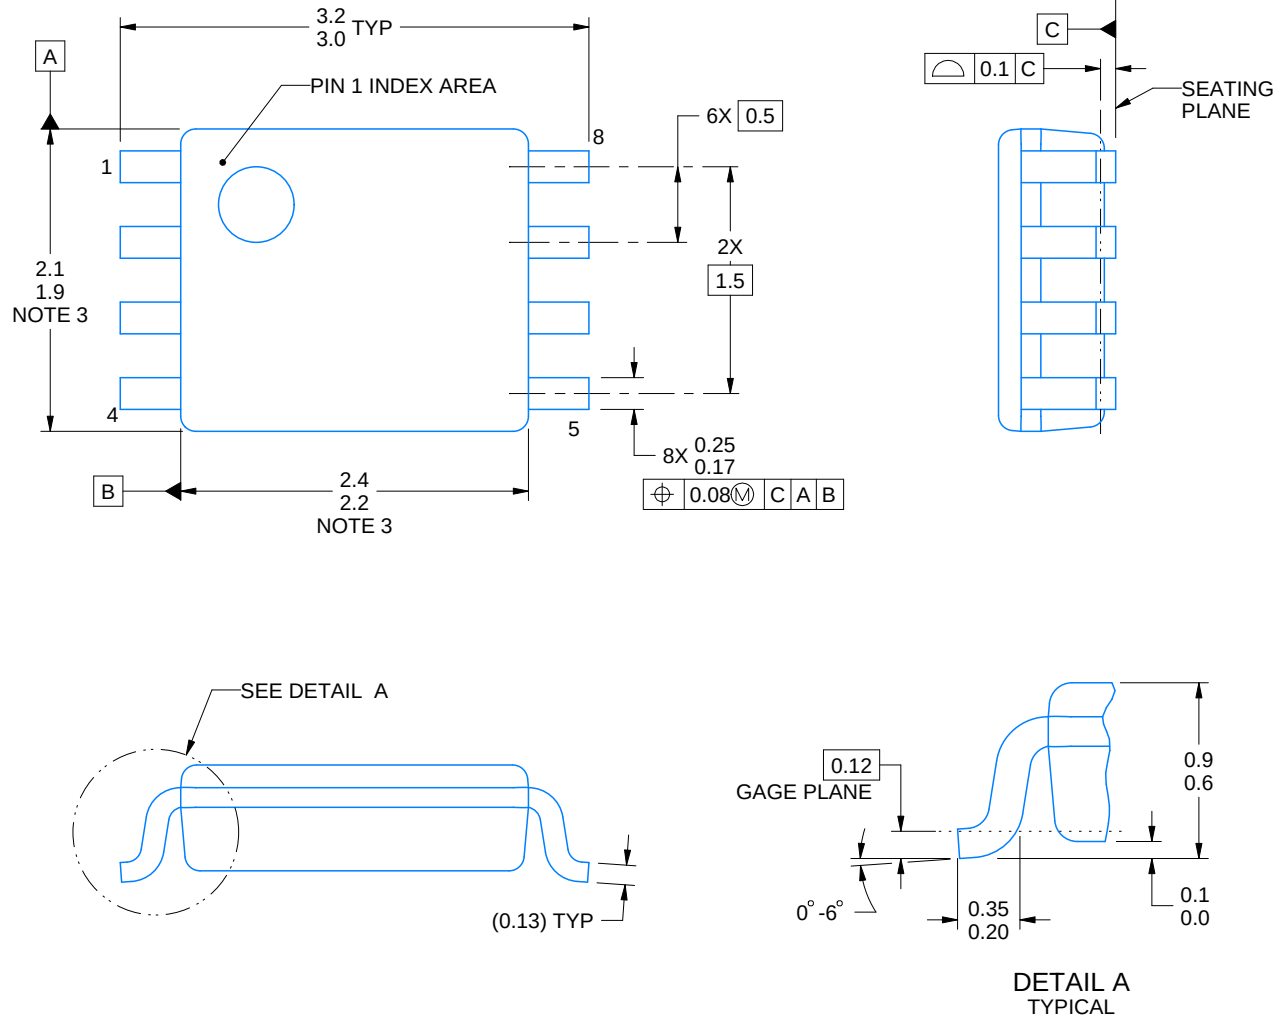

4225266/A 09/2014

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-187 variation CA.

# EXAMPLE BOARD LAYOUT


DCU0008A

VSSOP - 0.9 mm max height

SMALL OUTLINE PACKAGE

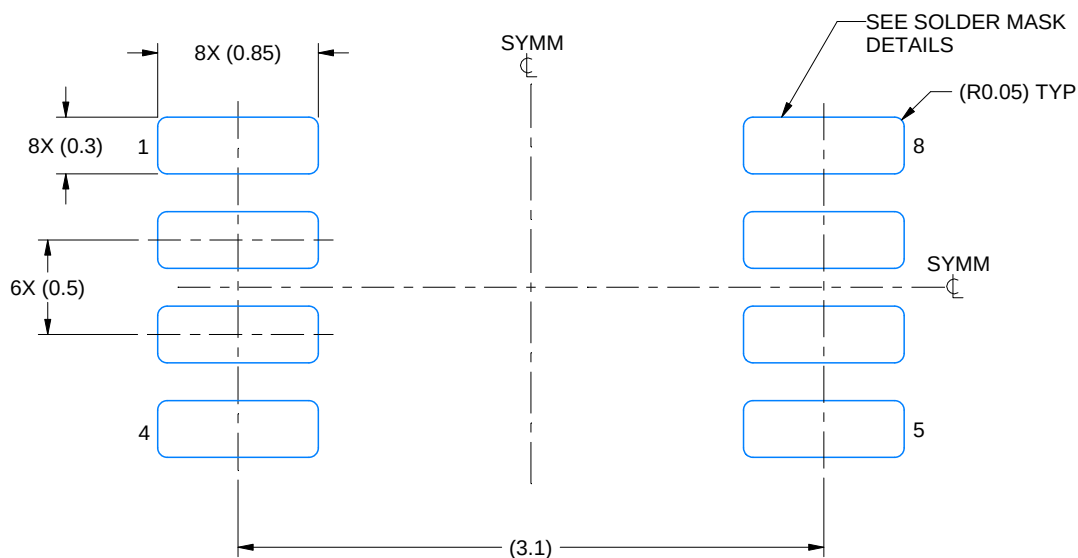

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 25X

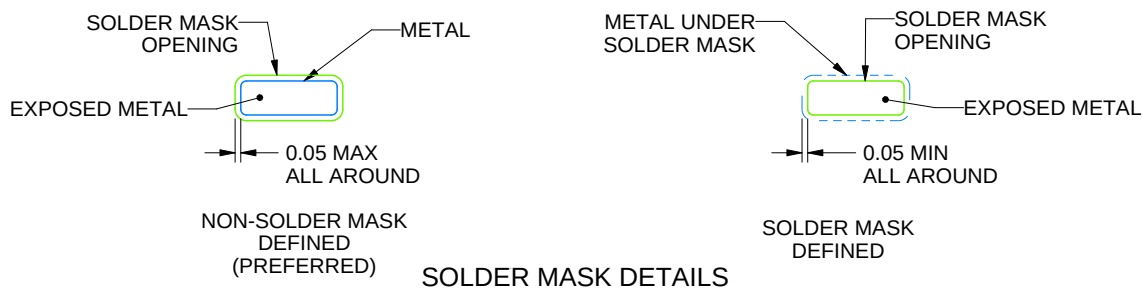

4225266/A 09/2014

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.


6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DCU0008A

VSSOP - 0.9 mm max height

SMALL OUTLINE PACKAGE

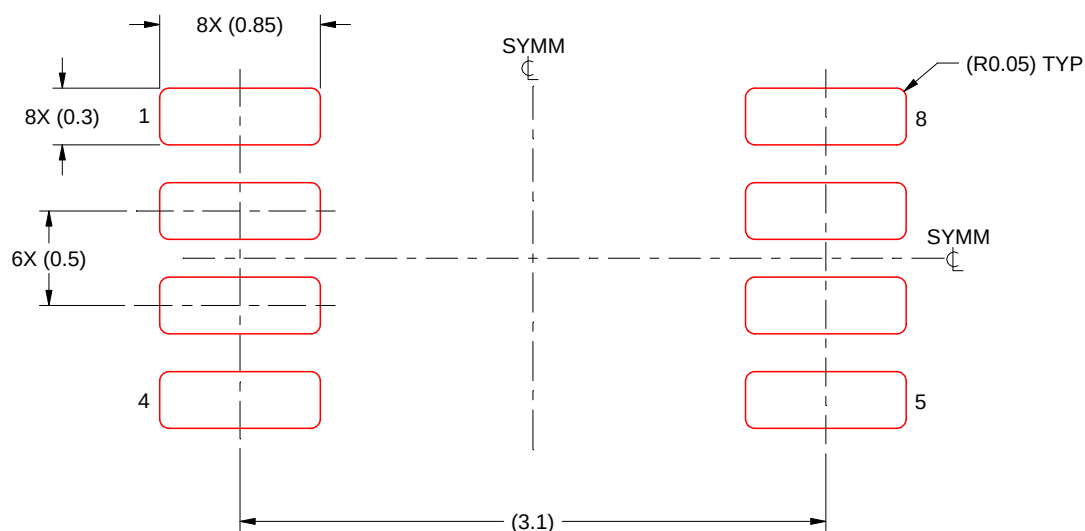


SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 25X

4225266/A 09/2014

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.




DTM0008A

# PACKAGE OUTLINE

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

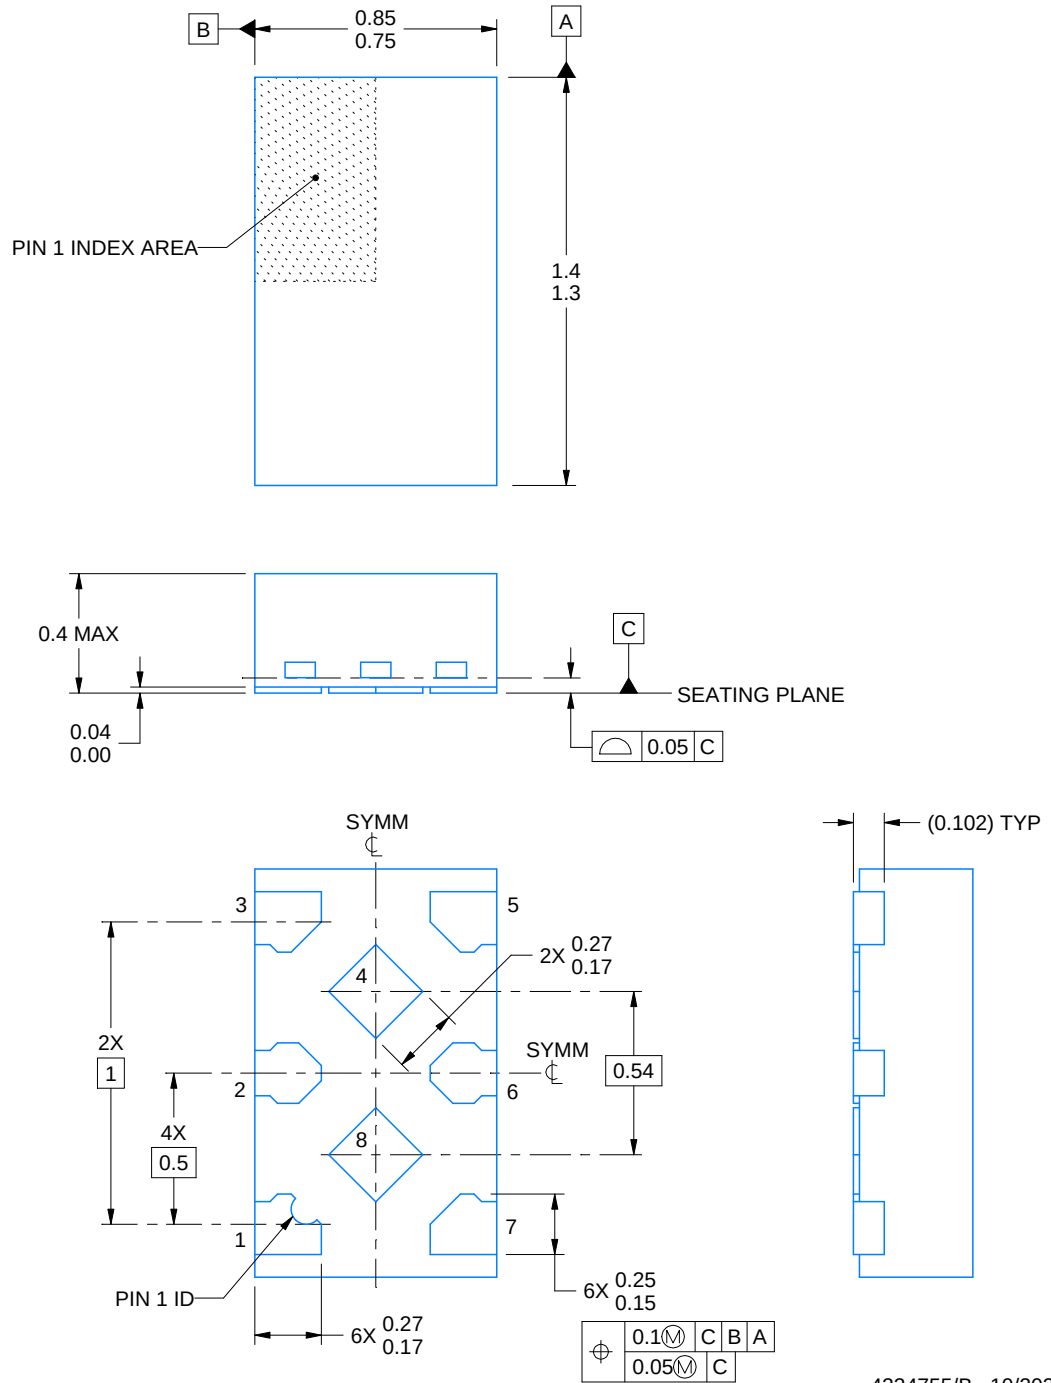

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad(s) must be soldered to the printed circuit board for thermal and mechanical performance.




# EXAMPLE BOARD LAYOUT

DTM0008A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

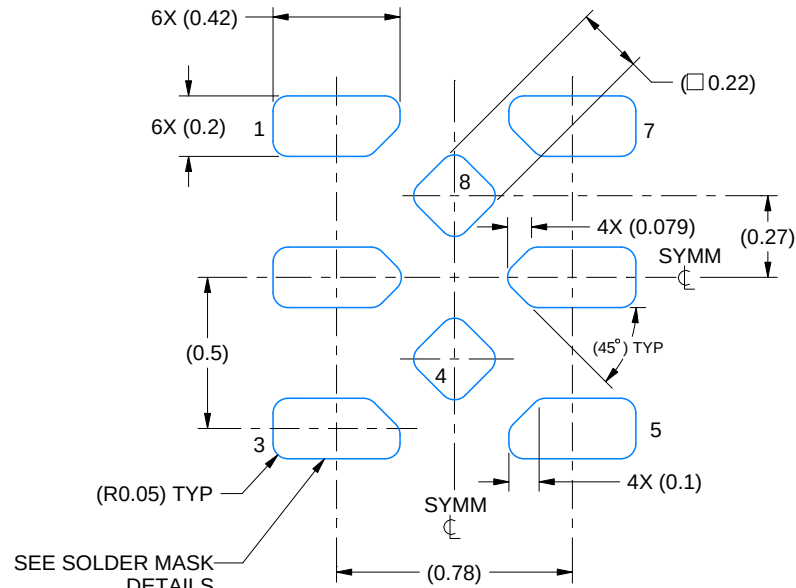

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:40X



SOLDER MASK DETAILS

4224755/B 10/2022

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slue271](http://www.ti.com/lit/slue271)).

# EXAMPLE STENCIL DESIGN

DTM0008A

X2SON - 0.4 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

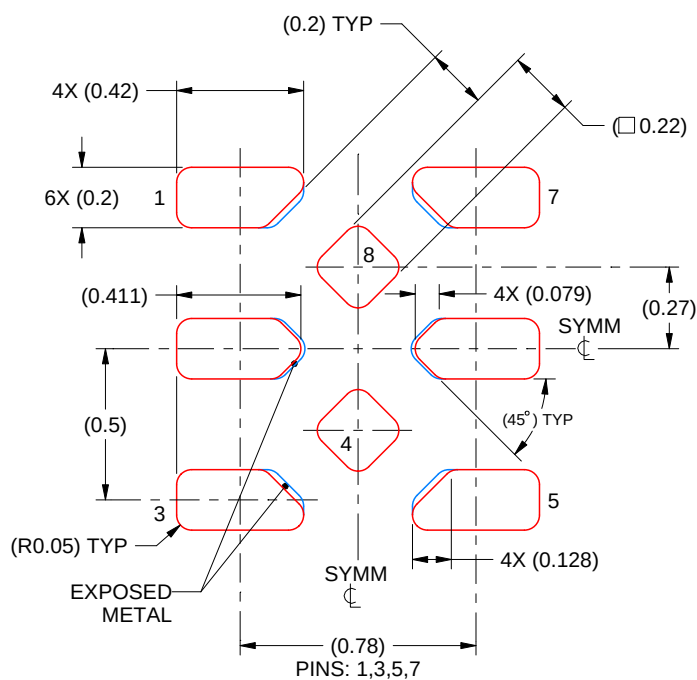

**SOLDER PASTE EXAMPLE**  
 BASED ON 0.075 mm THICK STENCIL  
 SCALE: 40X


4224755/B 10/2022

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.




## SOT-23-THIN - 1.1 mm max height

## PLASTIC SMALL OUTLINE


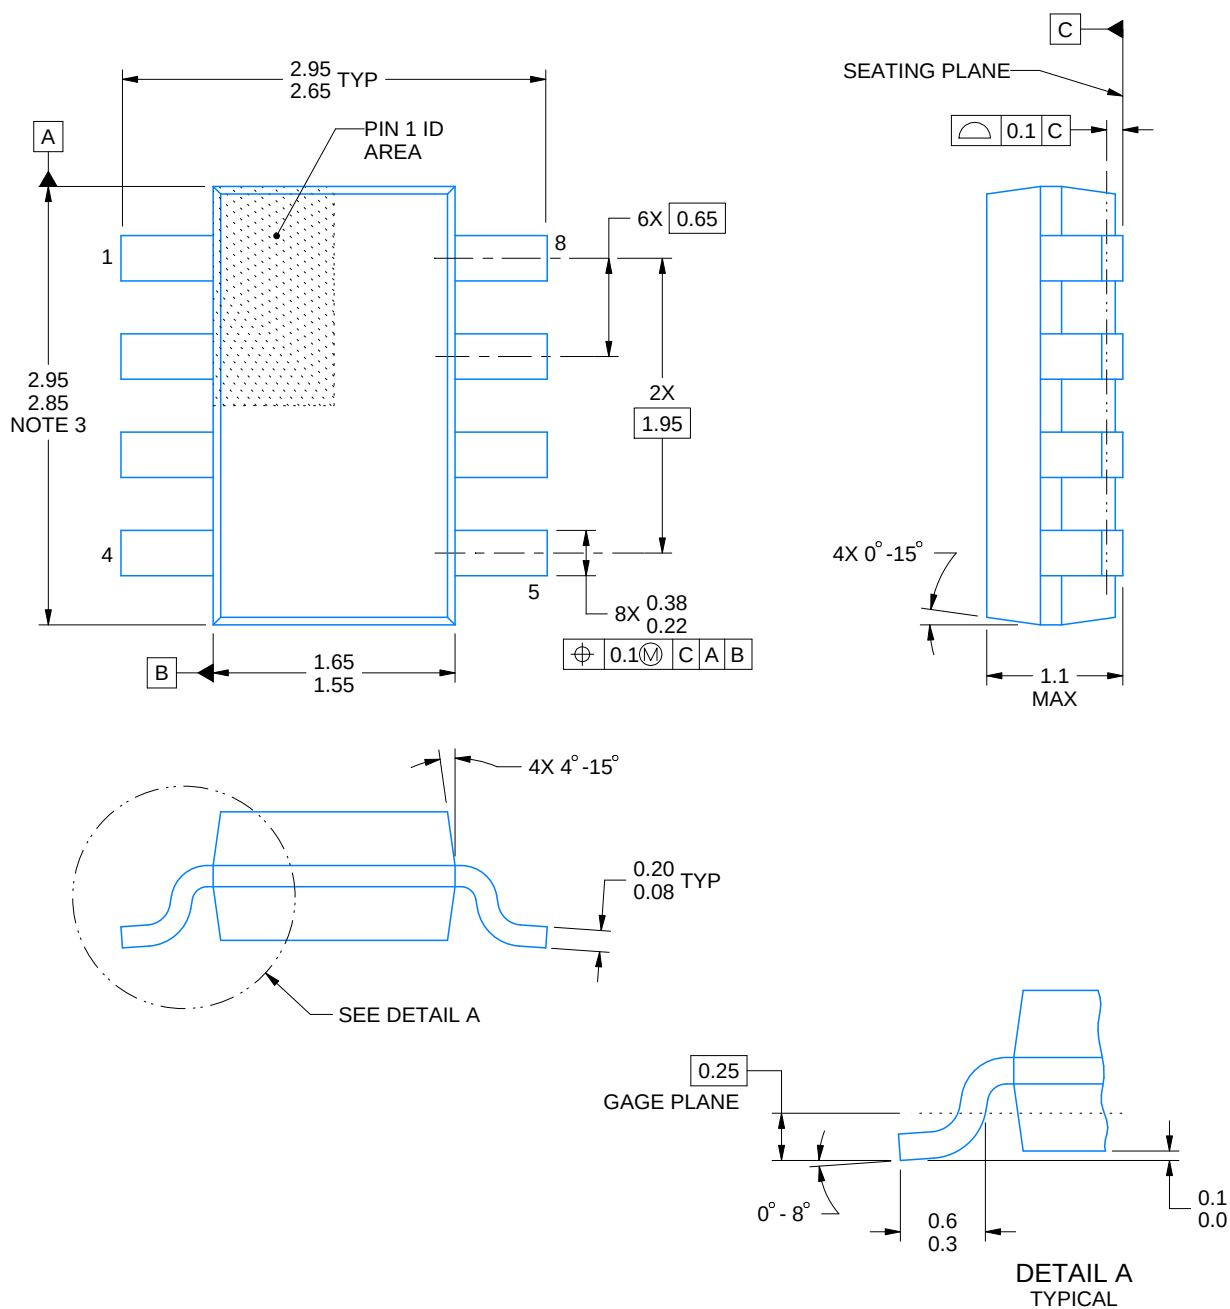


4222047/E 07/2024

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.

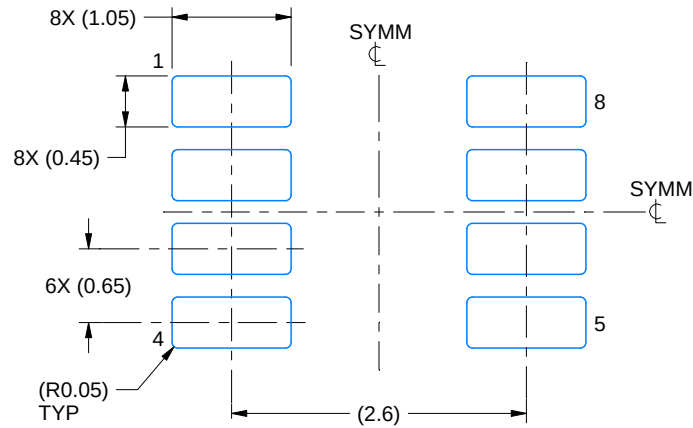

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

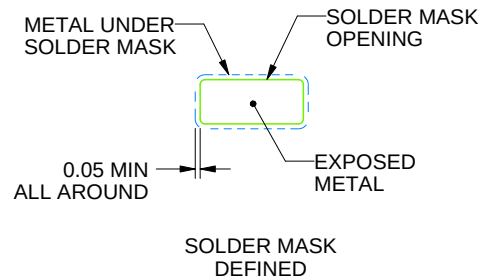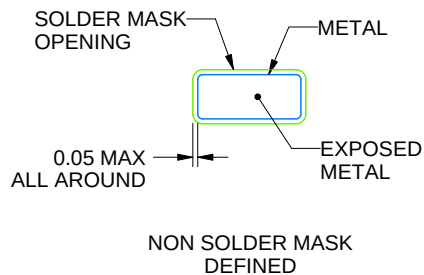

SOLDER MASK DETAILS

4222047/E 07/2024

NOTES: (continued)


4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DDF0008A

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

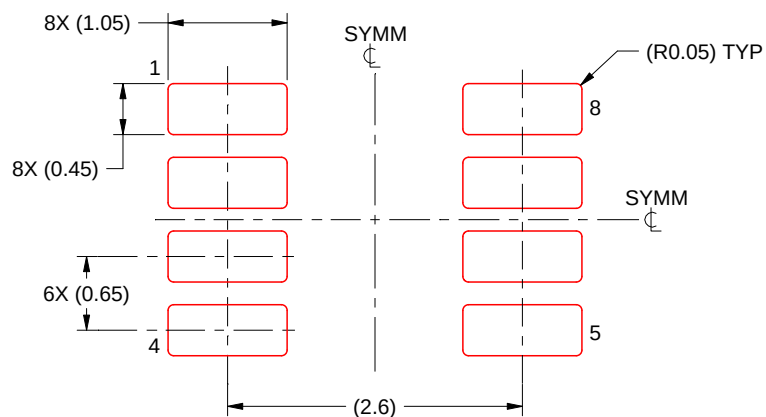

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4222047/E 07/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含みいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](https://www.ti.com) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月