THVD1505 IEC-ESD 保護機能およびバス極性訂正機能を備えた RS-485 トランシーバ

1 特長

- TIA/EIA-485A 規格、および SGCC (State Grid Corporation of China) Part 11 シリアル通信プロトコル RS-485 規格の要件を満たすか、それを上回る性能
- 電源電圧：4.5V～5.5V
- 半二重 RS-422/RS-485
- 45ms 以内のバス極性訂正機能
- フェイルセーフ・バイアス抵抗あり/なしで動作
- データレート：最高 1Mbps
- バス I/O 保護
  - ±16kV HBM ESD
  - ±8kV IEC 61000-4-2 接触放電
  - ±8kV IEC 61000-4-2 エアギャップ放電
  - ±2kV IEC 61000-4-4 高速過渡バースト
- 開放、短絡、アイドル・バスのフェイルセーフ
- レシーバの大きなヒステリシスによるノイズ除去：120mV
- 1 つのバスで最大 256 のノードに対応 (1/8 単位負荷)
- 拡張周囲温度範囲：-40℃～125℃
- 低消費電力
  - スタンバイ時消費電流:1μA 未満
  - 動作時消費電流:1.1mA 未満
- グリッチなしの電源オン/オフによるホット・プラグイン機能

2 アプリケーション

- 電気メータ
- HVAC システム
- インバータ
- ビデオ監視

3 概要

THVD1505 は、自動バス極性訂正機能と過渡保護機能を備えた低消費電力の RS-485 トランシーバです。ホットプラグ時に、45ms 以内のバス・アイドル時間で、バス極性の検出と訂正を行います。バスのピンは静電放電 (ESD) 事象に対する耐性を備えており、人体モデル (HBM)、IEC 61000-4-2 接触放電およびエアギャップ放電の仕様に関して高レベルの保護を実現しています。


差動ドライバと差動レシーバを組み合わせており、ともに 5Vの単一電源で動作します。ドライバの差動出力とレシーバの差動入力は内部的に接続され、半二重(2線式バス)通信に適したバス・ポートを形成しています。同相電圧範囲が広いことから、このデバイスは長いケーブルを使用するマルチポイント・アプリケーションに適しています。THVD1505 は SOIC-8 パッケージで供給され、–40℃～125℃の周囲温度範囲で仕様が規定されています。

製品情報(1)

型番	パッケージ	本体サイズ(公称)
THVD1505	SOIC (8)	4.90mm×3.91mm

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

極性訂正機能(POLCOR)を備えた標準的なネットワーク・アプリケーション

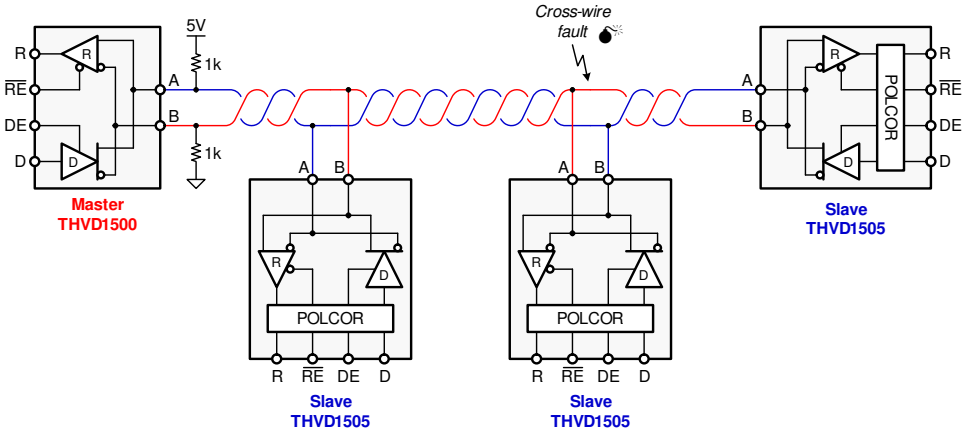

Copyright © 2018, Texas Instruments Incorporated

英語版のTI製品についての情報を翻訳したこの資料は、製品の概要を確認する目的で便宜的に提供しているものです。該当する正式な英語版の最新情報は、www.ti.comで閲覧でき、その内容が常に優先されます。TIでは翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、必ず最新版の英語版をご参照くださいますようお願いいたします。

目次

1 特長 ... 1
2 アプリケーション ... 1
3 概要 ... 1
4 改訂履歴 ... 2
5 **Pin Configuration and Functions** ... 3
6 **Specifications** ... 3
6.1 Absolute Maximum Ratings ... 3
6.2 ESD Ratings ... 3
6.3 ESD Ratings [IEC] ... 4
6.4 Recommended Operating Conditions ... 4
6.5 Thermal Information ... 4
6.6 Electrical Characteristics ... 5
6.7 Power Dissipation Characteristics ... 6
6.8 Switching Characteristics ... 6
6.9 Typical Characteristics ... 7
7 **Parameter Measurement Information** ... 8
7.1 Driver ... 8
7.2 Receiver ... 9
8 **Detailed Description** ... 11
8.1 Overview ... 11
8.2 Functional Block Diagram ... 11
8.3 Feature Description ... 11
8.4 Device Functional Modes ... 15
9 **Application and Implementation** ... 16
9.1 Application Information ... 16
9.2 Typical Application ... 21
10 **Power Supply Recommendations** ... 23
11 **Layout** ... 24
11.1 Layout Guidelines ... 24
11.2 Layout Example ... 24
12 デバイスおよびドキュメントのサポート ... 25
12.1 デバイス・サポート ... 25
12.2 ドキュメントの更新通知を受け取る方法 ... 25
12.3 コミュニティ・リソース ... 25
12.4 商標 ... 25
12.5 静電気放電に関する注意事項 ... 25
12.6 Glossary ... 25
13 メカニカル、パッケージ、および注文情報 ... 25

4 改訂履歴


資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

日付	リビジョン	注
2019 年 9 月	*	初版

Copyright © 2019, Texas Instruments Incorporated

5 Pin Configuration and Functions

D Package
8-Pin SOIC
Top View

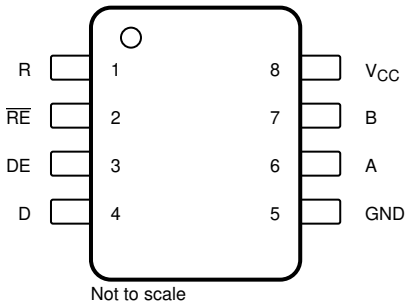

Not to scale

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
A	6	Bus input/output	Driver output or receiver input (complementary to B)
B	7	Bus input/output	Driver output or receiver input (complementary to A)
D	4	Digital input	Driver data input (internal 5-MΩ pull-up)
DE	3	Digital input	Driver enable, active high (internal 5-MΩ pull-down)
GND	5	Ground	Device ground
R	1	Digital output	Receive data output
$\overline{RE}$	2	Digital input	Receiver enable, active low (internal 5-MΩ pull-up)
V_{CC}	8	Supply	4.5-V to 5.5-V supply

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
V_{CC}	Supply voltage	–0.5	7	V
V_L	Input voltage at any logic pin (D, DE or $\overline{RE}$)	–0.3	5.7	V
V_A, V_B	Voltage at A or B inputs, as differential or common-mode with respect to GND	–18	18	V
I_O	Receiver output current	–24	24	mA
T_J	Junction temperature		170	°C
T_{STG}	Storage temperature	–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditionsbeyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions forextended periods may affect device reliability.

6.2 ESD Ratings

				VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	Bus terminals and GND	±16,000	V
			All other pins	±4,000	
		Charged-device model (CDM), per JEDEC specification JESD22-C101(2)		±1,500	
		Machine model (MM), per JEDEC JESD22-A115-A		±400	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Copyright © 2019, Texas Instruments Incorporated

6.3 ESD Ratings [IEC]

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	IEC 61000-4-2 ESD contact discharge, bus terminals and GND	±8,000	V
		IEC 61000-4-2 ESD air-gap discharge, bus terminals and GND	±8,000	
		IEC 61000-4-4 EFT fast transient, bus terminals and GND	±2,000	

6.4 Recommended Operating Conditions

			MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage		4.5	5	5.5	V
V_{ID}	Differential input voltage		–12		12	V
V_I	Input voltage at any bus terminal (1)		–7		12	V
V_{IH}	High-level input voltage (driver, driver-enable, and receiver-enable inputs)		2		V_{CC}	V
V_{IL}	Low-level input voltage (driver, driver-enable, and receiver-enable inputs)		0		0.8	V
I_O	Output current	Driver	–60		60	mA
		Receiver	–8		8	
R_L	Differential load resistance		54	60		Ω
$1/t_{UI}$	Signaling rate		0.3		1000	kbps
T_J	Junction temperature		–40		150	°C
T_A (2)	Operating ambient temperature (see *Thermal Information* for additional information)		–40		125	°C

(1) The algebraic convention in which the least positive (most negative) limit is designated as minimum is used in this datasheet.
(2) Operation is specified for internal (junction) temperatures upto 150°C. Self-heating due to internal power dissipation should be considered for each application. Maximum junction temperature is internally limited by the thermal shutdown (TSD) circuit which disables the device when the junction temperature reaches 170°C.

6.5 Thermal Information

THERMAL METRIC (1)		THVD1505 D (SOIC) 8 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	125.3	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	67.6	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	68.6	°C/W
ψ_{JT}	Junction-to-top characterization parameter	20.4	°C/W
ψ_{JB}	Junction-to-board characterization parameter	67.8	°C/W

(1) For more information about traditional and new thermalmetrics, see the *Semiconductor and ICPackage Thermal Metrics* application report.

Copyright © 2019, Texas Instruments Incorporated

6.6 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Driver							
$\lvert V_{OD} \rvert$	Driver differential-output voltage magnitude	V_{test} from –7 to +12 V	See 図 7	1.5	2.5		V
		R_L = 54 Ω (RS-485), C_L = 50 pF	See 図 8	1.5	2.5		
		R_L = 100 Ω (RS-422), C_L = 50 pF		2	3		
$\Delta\lvert V_{OD} \rvert$	Change in magnitude of driver differential-output voltage	R_L = 54 Ω, C_L = 50 pF	See 図 8	–50		50	mV
$V_{OC(SS)}$	Steady-state common-mode output voltage	R_L = 54 Ω, C_L = 50 pF	See 図 8	1	V_{CC} / 2	3	V
ΔV_{OC}	Change in differential driver common-mode output voltage			–50		50	mV
$V_{OC(PP)}$	Peak-to-peak driver common-mode output voltage				250		mV
$\lvert I_{OS} \rvert$	Driver short-circuit output current	DE = V_{CC}, -7 V ≤ [V_A or V_B] ≤ 12 V, or A pin shorted to B pin				150	mA
C_{OD}	Differential output capacitance				8		pF
Receiver							
I_I	Bus input current (driver disabled)	DE = 0 V, V_{CC} = 0 V or 5.5 V	V_I = 12 V		75	110	µA
			V_I = –7 V	–90	–70		
R_A, R_B	Bus input impedance	V_A = -7 V, V_B = 12 V and V_A = 12 V, V_B = -7 V	See 図 12	96			kΩ
V_{IT+}	Positive-going receiver differential-input voltage threshold				60	100	mV
$V_{IT–}$	Negative-going receiver differential-input voltage threshold			–100	–60		mV
V_{HYS} (1)	Receiver differential-input voltage threshold hysteresis (V_{IT+} – $V_{IT–}$)			40	120		mV
V_{OH}	Receiver high-level output voltage	I_{OH} = –8 mA		4	V_{CC} – 0.3		V
V_{OL}	Receiver low-level output voltage	I_{OL} = 8 mA			0.2	0.4	V
I_{OZ}	Receiver high-impedance output current	V_O = 0 V or V_{CC}, $\overline{RE}$ = V_{CC}		–1		1	µA
I_{OSR}	Receiver output short-circuit current	$\overline{RE}$ = 0, DE = 0	See 図 13			95	mA
Logic							
I_{IN}	Input current (D, DE, $\overline{RE}$)			–2		2	µA
Supply							
I_{CC}	Supply current (quiescent)	Driver and receiver enabled	DE = V_{CC}, $\overline{RE}$ = 0, no load		820	1100	µA
		Driver enabled, receiver disabled	DE = V_{CC}, $\overline{RE}$ = V_{CC}, no load		520	660	
		Driver disabled, receiver enabled	DE = 0, $\overline{RE}$ = 0, no load		520	660	
		Driver and receiver disabled	DE = 0, $\overline{RE}$ = V_{CC}, no load		0.03	1	

(1) Under any specific conditions, V_{IT+} is specified to be at least V_{HYS} higher than$V_{IT–}$.

Copyright © 2019, Texas Instruments Incorporated

6.7 Power Dissipation Characteristics

PARAMETER			TEST CONDITIONS	VALUE	UNIT
PD	Power dissipation, driver and receiver enabled, V_{CC} = 5.5 V, T_A = 125°C, 50% duty cycle square-wave signal at maximum signaling rate	Unterminated	R_L = 300 Ω, C_L = 50 pF	120	mW
		RS-422 load	R_L = 100 Ω, C_L = 50 pF	160	
		RS-485 load	R_L = 54 Ω, C_L = 50 pF	200	

6.8 Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Driver							
t_r, t_f	Driver differential output rise and fall times		See 図 9	100	115	300	ns
t_{PHL}, t_{PLH}	Driver propagation delay		See 図 9		90	350	ns
$t_{SK(P)}$	Driver pulse skew, $\lvert t_{PHL} - t_{PLH} \rvert$		See 図 9		25	40	ns
t_{PHZ}, t_{PLZ}	Driver disable time		See 図 10 and 図 11		70	160	ns
t_{PHZ}, t_{PLZ}	Driver enable time	Receiver enabled	See 図 10 and 図 11		220	400	ns
		Receiver disabled	See 図 10 and 図 11		1.5	3	µs
Receiver							
t_r, t_f	Receiver output rise and fall times		See 図 14		6	30	ns
t_{PHL}, t_{PLH}	Receiver propagation delay time		See 図 14		80	120	ns
$t_{SK(P)}$	Receiver pulse skew, $\lvert t_{PHL} - t_{PLH} \rvert$		See 図 14		2	7	ns
t_{PHZ}, t_{PLZ}	Receiver disable time		See 図 15		15	30	ns
$t_{PZL(1)}$, $t_{PZH(1)}$ $t_{PZL(2)}$, $t_{PZH(2)}$	Receiver enable time	Driver enabled	See 図 15		180	370	ns
		Driver disabled	See 図 16		1	5	µs
t_{FS}	Bus fail-safe time	Driver disabled	See 図 17	25	35	45	ms

Copyright © 2019, Texas Instruments Incorporated

6.9 Typical Characteristics

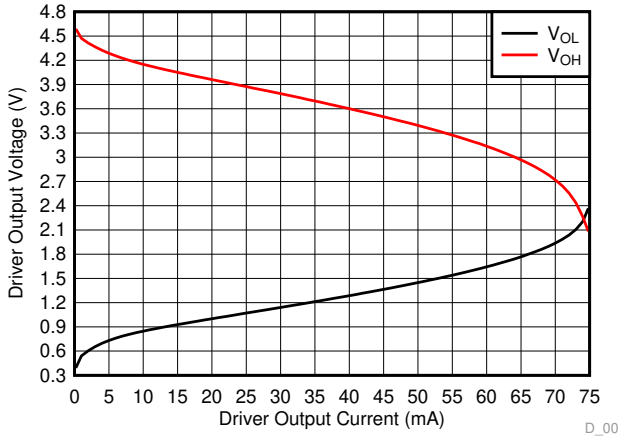


図 1. Driver Output Voltage vs Driver Output Current

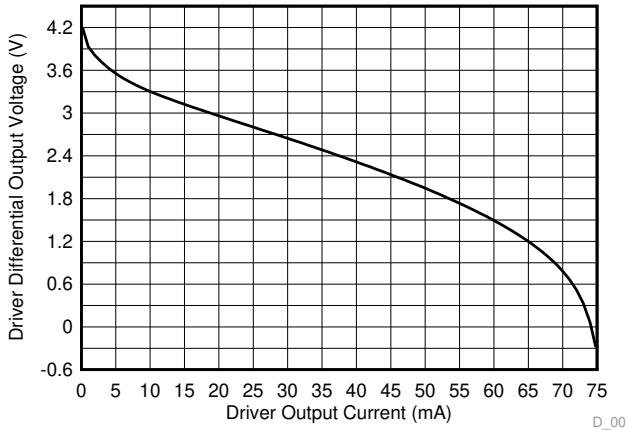


図 2. Driver Differential Output Voltage vs Driver Output Current

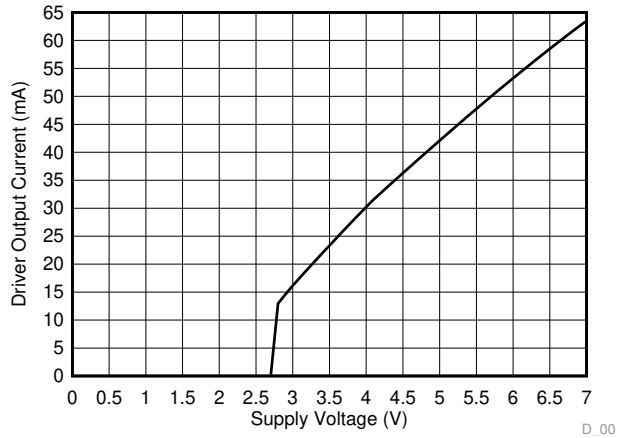


図 3. Driver Output Current vs Supply Voltage

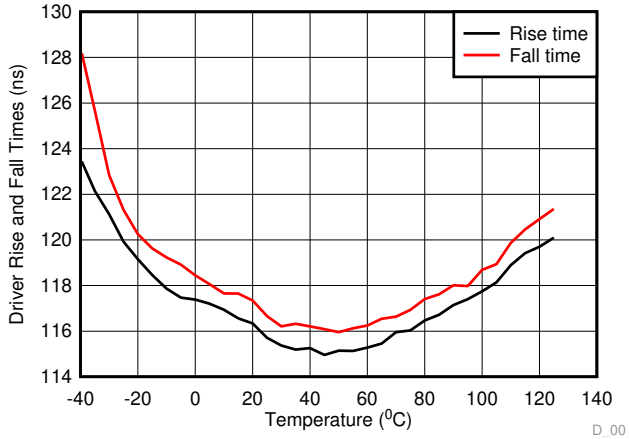


図 4. Driver Rise or Fall Time vs Temperature

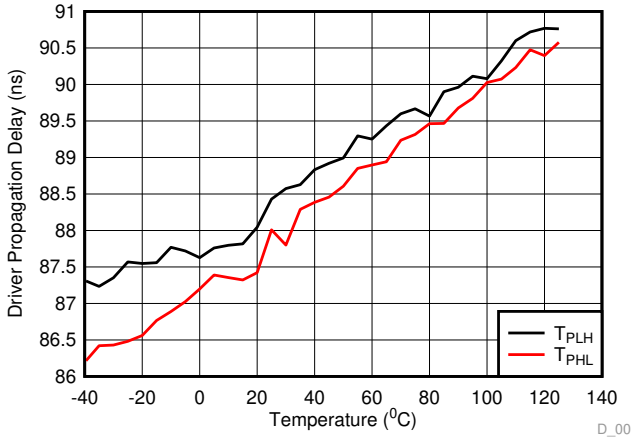


図 5. Driver Propagation Delay vs Temperature

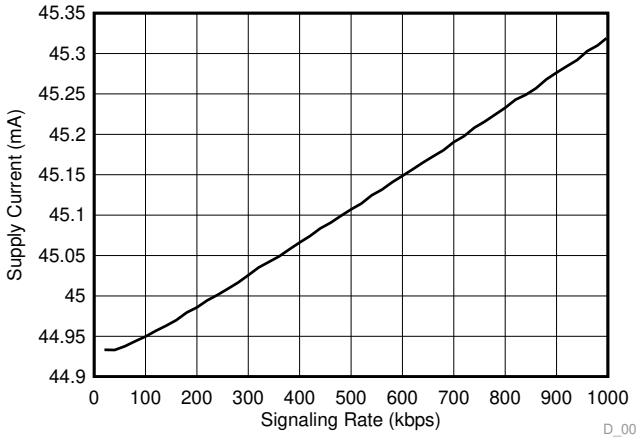


図 6. Supply Current vs Signaling Rate

Copyright © 2019, Texas Instruments Incorporated

7 Parameter Measurement Information

7.1 Driver

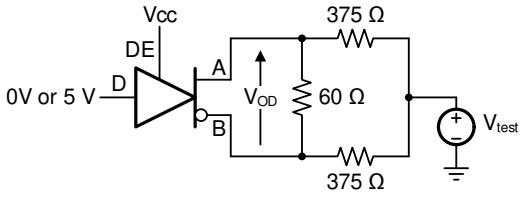


図 7. Measurement of Driver Differential-Output Voltage With Common-Mode Load

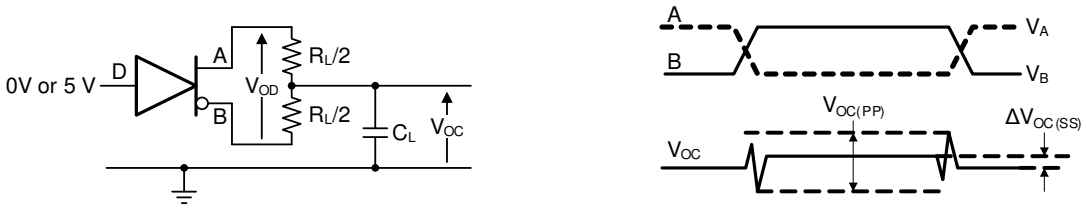


図 8. Measurement of Driver Differential and Common-Mode Output With RS-485 Load

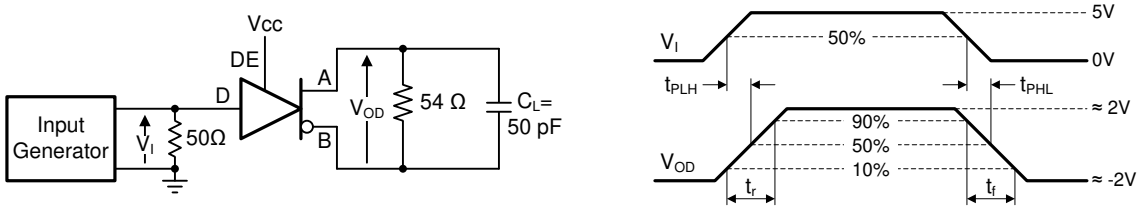


図 9. Measurement of Driver Differential-Output Rise and Fall Times and Propagation Delays

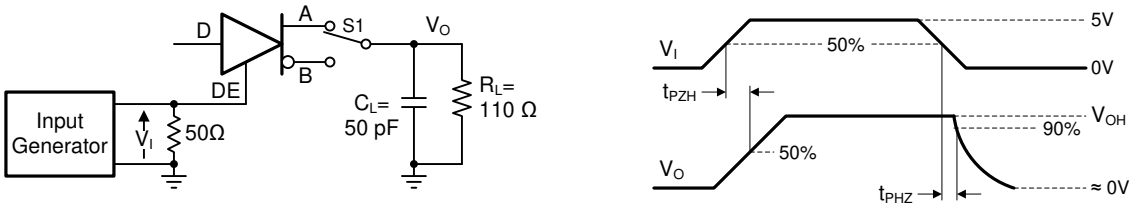


図 10. Measurement of Driver Enable and Disable Times With Active-High Output and Pull-Down Load

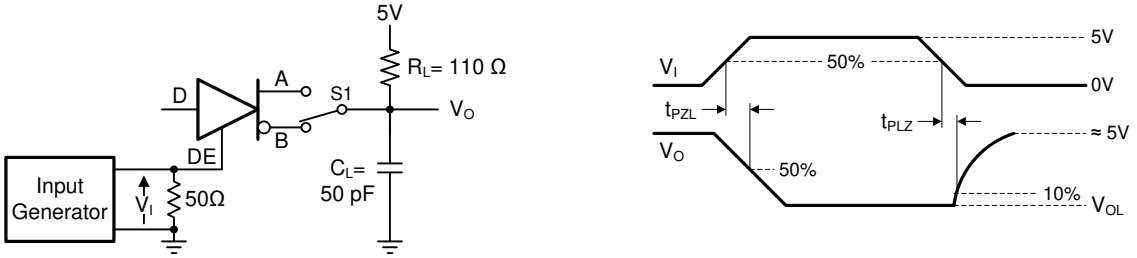


図 11. Measurement of Driver Enable and Disable Times With Active-Low Output and Pull-up Load

Copyright © 2019, Texas Instruments Incorporated

7.2 Receiver

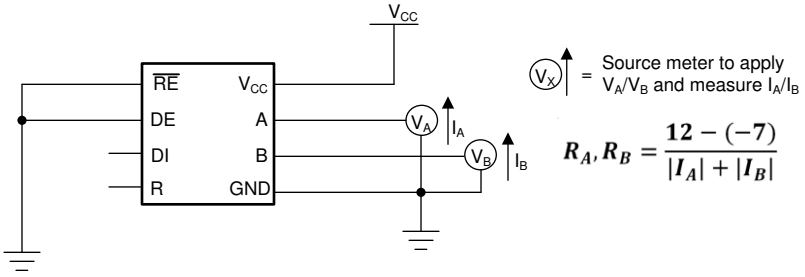


図 12. Measurement of Bus Impedance

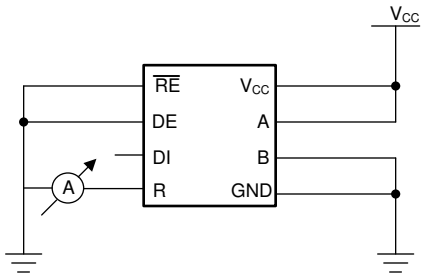


図 13. Measurement of Receiver Output Short Circuit Current

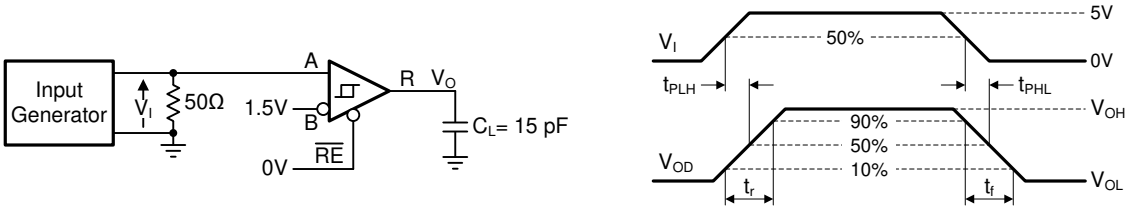


図 14. Measurement of Receiver Output Rise and Fall Times and Propagation Delays

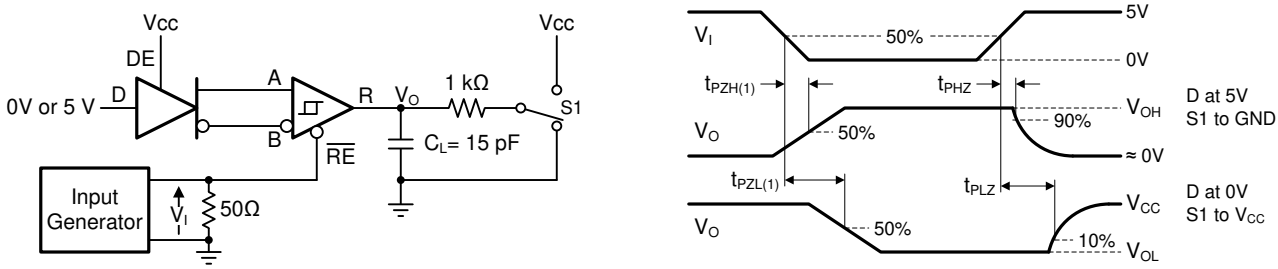


図 15. Measurement of Receiver Enable and Disable Times With Driver Enabled

Copyright © 2019, Texas Instruments Incorporated

Receiver (continued)

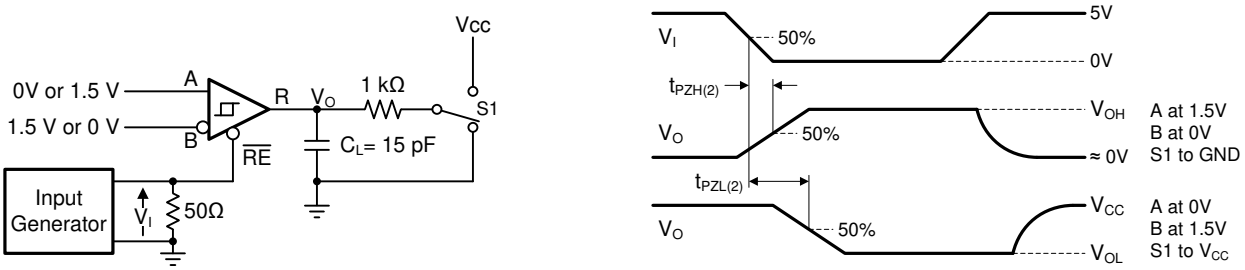


図 16. Measurement of Receiver Enable Times With Driver Disabled

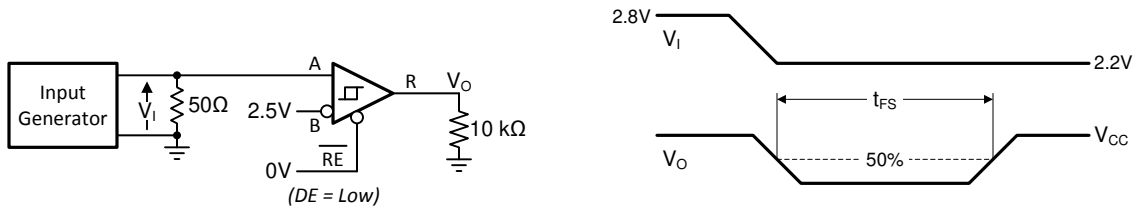


図 17. Measurement of Receiver Polarity-Correction Time With Driver Disabled


Copyright © 2019, Texas Instruments Incorporated

8 Detailed Description

8.1 Overview

The THVD1505 device is a half-duplex RS-485 transceiver suitable for data transmission at rates up to 1 Mbps over controlled-impedance transmission media (such as twisted-pair cabling). The device features a high level of internal transient protection, making it able to withstand ESD strikes up to ±8 kV (per IEC 61000-4-2) and EFT transients up to ±2 kV (per IEC 61000-4-4) without incurring damage. Up to 256 units of THVD1500 and/or THVD1505 may share a common RS-485 bus due to the devices' low bus input currents. THVD1505 features automatic polarity correction, which detects bus mis-wiring and swaps A and B.

8.2 Functional Block Diagram



Copyright © 2018, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Bus Polarity Correction

THVD1505 automatically corrects a wrong bus-signal polarity caused by a mis-wire fault. In order to detect the bus polarity, the following conditions must be met.

- A slave node must enable the receiver ($\overline{RE}$ = low). Driver can be in either enabled or disabled state
- A and B signals should be static for longer than fail-safe time (t_{FS})
- The absolute value of the differential voltage at the receiver input should be greater than the receiver thresholds ($|V_{IT+}|$ or $|V_{IT-}|$)

The receiver input voltage can be defined either by using passive fail-safe resistors or by the master node actively driving the bus.

8.3.1.1 Passive Polarity Definition Using Fail-Safe Biasing Network

図 18 shows a simple point-to-point data link between a master node and a slave node with mis-wire fault.

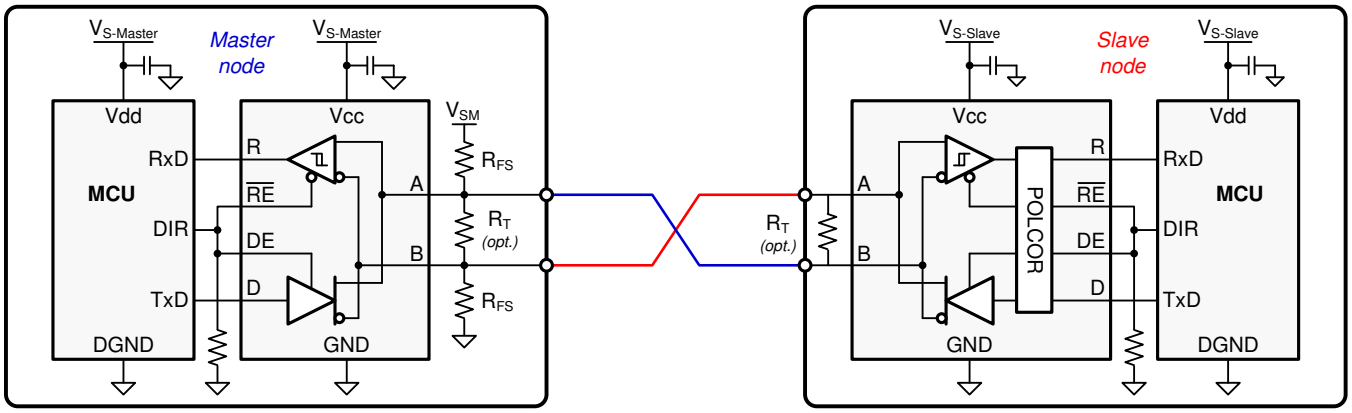


図 18. Passive Polarity Definition

Feature Description (continued)

During passive polarity definition, an external fail-safe resistor network (R_{FS}) must be used to ensure fail-safe operation during an idle bus state. When the bus is not actively driven, the differential receiver inputs could float allowing the receiver output to assume a random output. A proper fail-safe network forces the receiver inputs to exceed the V_{IT} threshold, thus forcing the THVD1505 receiver output into the high state.

図 19 shows the timing diagram for passive polarity definition.

Prior to initiating data transmission the master transceiver must idle for a time span that exceeds the maximum fail-safe time, t_{FS}, of a slave transceiver. This idle time is accomplished by driving the direction control line (the output of the MCU in 図 19 that is driving DE and $\overline{RE}$ pins), DIR, low. After a time, t > t_{FS}, the master begins transmitting data.

Because of the indicated mis-wire fault between master and slave, the slave node receives bus signals with reversed polarity. Assuming the slave node has just been connected to the bus, the direction-control pin is pulled-down during power-up and then is actively driven low by the slave MCU. The polarity correction begins as soon as the slave supply is established and ends after t_{FS}.

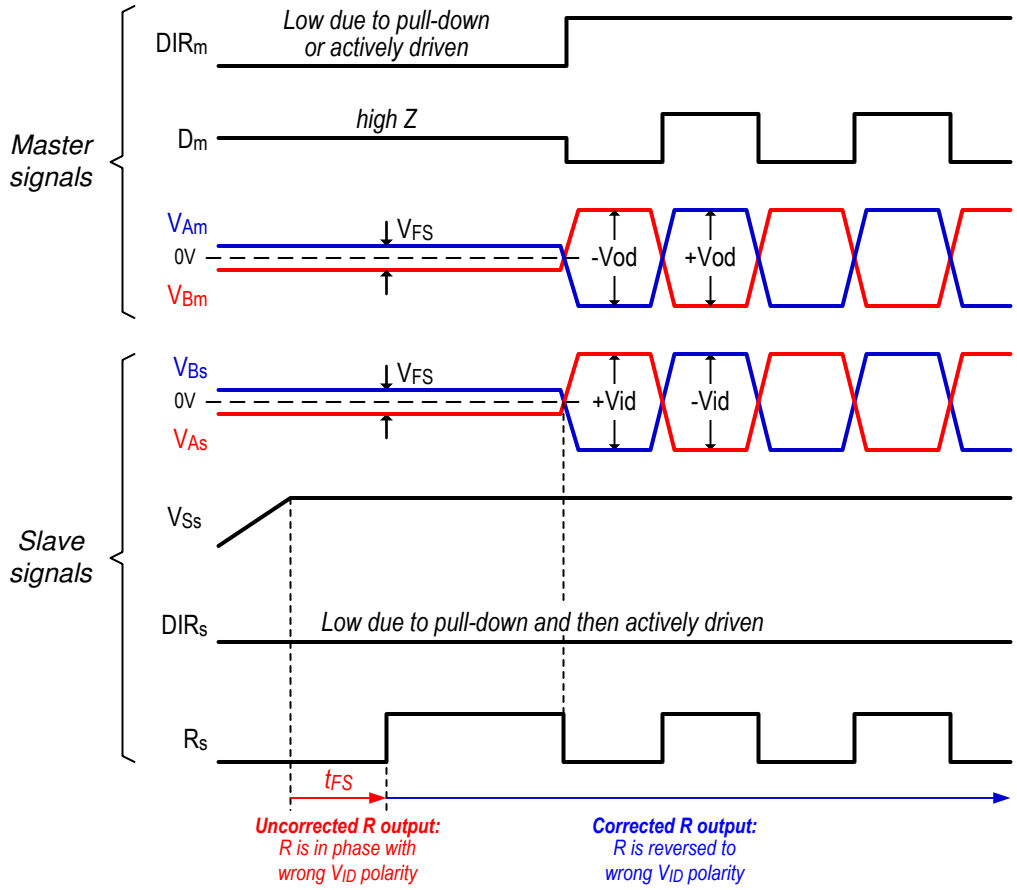


図 19. Polarity Correction Timing With Passive Polarity Definition

Initially, the slave receiver assumes that the correct bus polarity is applied to the inputs and performs no polarity reversal. Because of the reversed polarity of the bus-failsafe voltage, the output of the slave receiver, R_S, turns low. After t_{FS} has passed and the receiver has detected the wrong bus polarity, the internal POLCOR logic reverses the input signal and R_S turns high.

At this point, all incoming bus data with reversed polarity are polarity corrected within the transceiver. Because polarity correction is also applied to the transmit path, the data sent by the slave MCU are reversed by the POLCOR logic and then fed into the driver.

Copyright © 2019, Texas Instruments Incorporated

Feature Description (continued)

The reversed data from the slave MCU are reversed again by the mis-wire fault in the bus, and the correct bus polarity is reestablished at the master end.

THVD1505 retains the state of the polarity logic as long as V_{CC} is present to the device. However, the device POLCOR logic powers up in the default no polarity reversal mode at each device power up. POLCOR logic remains active as long as V_{CC} is applied to the device.

注

Data string durations of consecutive 0s or 1s exceeding the minimum t_{FS} can accidently trigger a wrong polarity correction and must be avoided.

8.3.1.2 Active Polarity Definition by the Master Node

THVD1505 polarity correction can also work without a fail-safe resistor network. See 図 20.

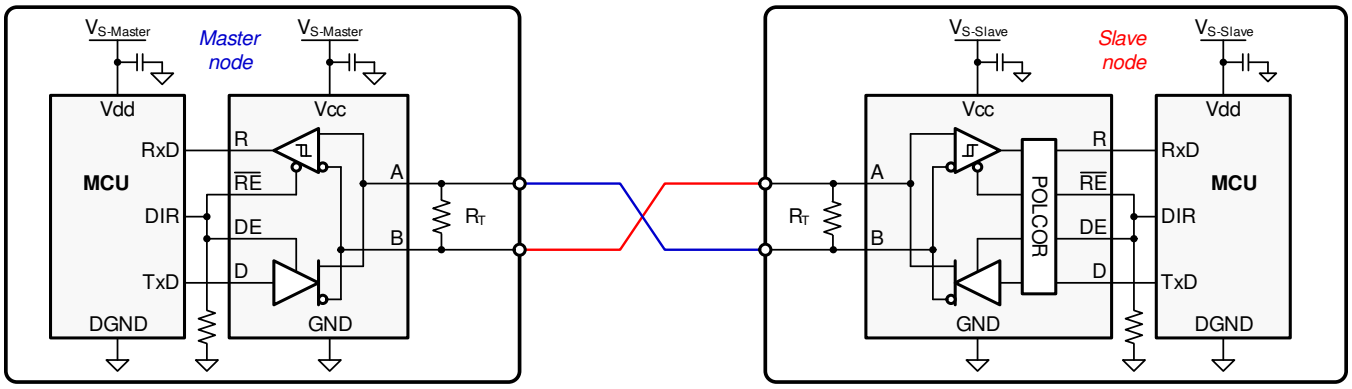


図 20. Active Polarity Definition

In this scenario, the master node drives the bus for longer than t_{FS}. After a time, $t > t_{FS}$, the master begins transmitting data. 図 21 shows the timing diagram for active polarity definition. DIR pin refers to the output of the MCU that is driving DE and $\overline{RE}$ pins in 図 21.

Copyright © 2019, Texas Instruments Incorporated

Feature Description (continued)

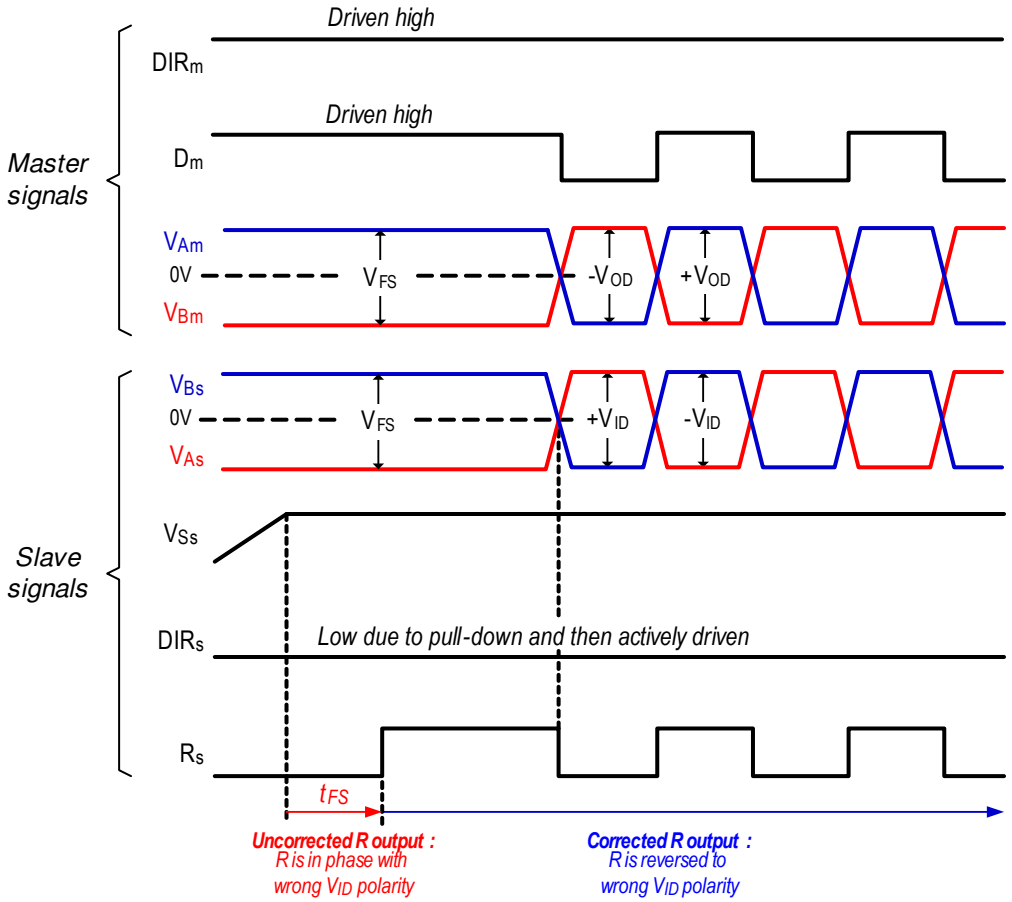


図 21. Polarity Correction Timing With Active Polarity Definition

POLCOR logic behavior with active polarity definition is identical to the POLCOR logic behavior with passive polarity definition.

Copyright © 2019, Texas Instruments Incorporated

8.4 Device Functional Modes

表 1. Driver Pin Functions

INPUT	ENABLE	OUTPUTS		DESCRIPTION
D	DE	A	B	
NORMAL MODE				
H	H	H	L	Actively drives bus high
L	H	L	H	Actively drives bus low
X	L	Z	Z	Driver disabled
X	OPEN	Z	Z	Driver disabled by default
OPEN	H	H	L	Actively drives bus high
POLARITY-CORRECTING MODE				
H	H	L	H	Actively drives bus low
L	H	H	L	Actively drives bus high
X	L	Z	Z	Driver disabled
X	OPEN	Z	Z	Driver disabled by default
OPEN	H	L	H	Actively drives bus low

表 2. Receiver Pin Functions

DIFFERENTIAL INPUT	ENABLE		OUTPUT	DESCRIPTION
$V_{ID} = V_A - V_B$	$\overline{RE}$	DE	R	
$V_{ID} > V_{IT+}$	L	X	H	Receive valid bus high
$V_{IT-} > V_{ID}$	L	X	L during t_{FS} H after t_{FS}	Receive valid bus low if lasting for less than t_{FS}, polarity correcting if lasting for more than t_{FS}
X	H	X	Z	Receiver disabled
X	OPEN	X	Z	Receiver disabled
Open, short or $V_{IT+} > V_{ID} > V_{IT-}$	L	X	H after t_{FS}	Receiver fail-safe high

Copyright © 2019, Texas Instruments Incorporated

9 Application and Implementation


注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 Device Configuration

The THVD1505 is a half-duplex RS-485 transceiver operating from a single 5-V ±10% supply. The driver and receiver enable pins allow for the configuration of different operating modes.

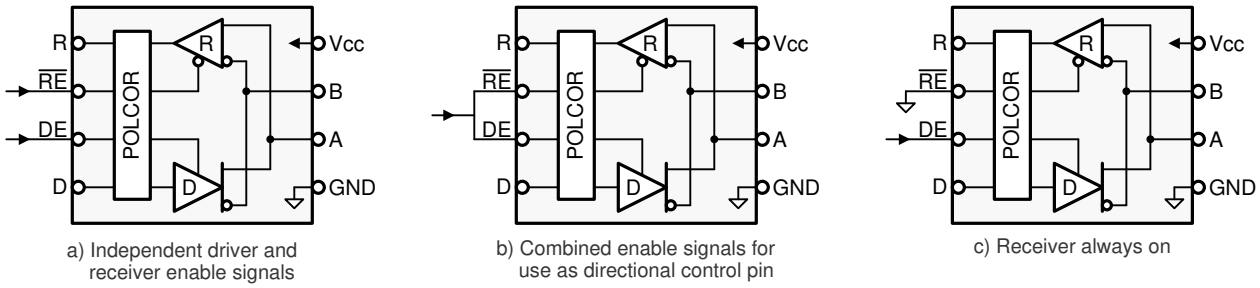

Copyright © 2018, Texas Instruments Incorporated

図 22. Transceiver Configurations

Using independent enable lines provides the most flexible control as the lines allow for the driver and the receiver to be turned on and turned off individually. While this configuration requires two control lines, it allows for selective listening to the bus traffic, whether the driver is transmitting data or not. Only this configuration allows the THVD1505 to enter low-power standby mode because it allows both the driver and receiver to be disabled simultaneously.

Combining the enable signals simplifies the interface to the controller by forming a single direction-control signal. Thus, when the direction-control line is high, the transceiver is configured as a driver, while for a low the device operates as a receiver.

Tying the receiver enable to ground and controlling only the driver-enable input also uses only one control line. In this configuration, a node not only receives the data on the bus sent by other nodes but also receives the data sent on the bus, enabling the node to verify the correct data has been transmitted.

9.1.2 Bus Design

An RS-485 bus consists of multiple transceivers connected in parallel to a bus cable. To eliminate line reflections, each cable end is terminated with a termination resistor, R_T, whose value matches the characteristic impedance, Z_0, of the cable. This method, known as parallel termination, allows for relatively high data rates over long cable length.

Common cables used are unshielded twisted pair (UTP), such as low-cost CAT-5 cable with Z_0 = 100 Ω, and RS-485 cable with Z_0 = 120 Ω. Typical cable sizes are AWG 22 and AWG 24.

The maximum bus length is typically given as 4000 ft or 1200 m, and represents the length of an AWG 24 cable whose cable resistance approaches the value of the termination resistance, thus reducing the bus signal by half or 6 dB. Actual maximum usable cable length depends on the signaling rate, cable characteristics, and environmental conditions.

Copyright © 2019, Texas Instruments Incorporated

Application Information (continued)

9.1.3 Fail-Safe Biasing for Passive Polarity Definition

External biasing resistor network of R_{FS} along with R_T define the V_{FS} during the polarity correction time, t_{FS}. See Passive Polarity Definition Using Fail-Safe Biasing Network for more details.

R_{FS} resistors should be selected such that $V_{FS} > |V_{IT}| = 100$ mV. The equation below can be used to calculate R_{FS}. Note that too low of a R_{FS} value increases the bus loading that reduces the number of nodes on the RS-485 bus.

$$R_{FS} < 0.5 \times [(R_T \times V_{CC\text{-}min}) / 0.1 - R_T] \quad (1)$$

9.1.4 Cable Length Versus Data Rate

There is an inverse relationship between data rate and cable length, which means the higher the data rate, the shorter the cable length; and conversely, the lower the data rate the longer the cable length. While most RS-485 systems use data rates between 10 kbps and 100 kbps, applications such as e-metering often operate at rates of up to 250 kbps even at distances of 4000 ft and longer. Longer distances are possible by allowing for small signal jitter of up to 5 or 10%.

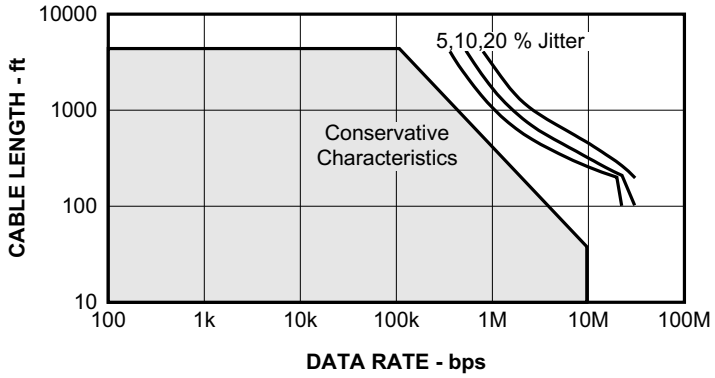


図 23. Cable Length vs Data Rate Characteristic

9.1.5 Stub Length

When connecting a node to the bus, the distance between the transceiver inputs and the cable trunk, known as the stub, should be as short as possible. The reason for the short distance is because a stub presents a non-terminated piece of bus line which can introduce reflections if the distance is too long. As a general guideline, the electrical length or round-trip delay of a stub should be less than one-tenth of the rise time of the driver, thus leading to a maximum physical stub length of as shown in 式 2.

$$L_S \le 0.1 \times t_r \times v \times c$$

where

- t_r is the 10/90 rise time of the driver
- c is the speed of light (3×10^8 m/s or 9.8×10^8 ft/s)
- v is the signal velocity of the cable (v = 78%) or trace (v = 45%) as a factor of c (2)

Based on 式 2, with a minimum rise time of 400 ns, 式 3 shows the maximum cable-stub length of the THVD1505.

$$L_S \le 0.1 \times 400 \times 10^{-9} \times 3\ 10^8 \times 0.78 = 9.4 \text{ m (or } 30.6 \text{ ft)} \quad (3)$$

Copyright © 2019, Texas Instruments Incorporated

Application Information (continued)





図 24. Stub Length

9.1.6 Transient Protection

The bus terminals of the THVD1505 transceiver family possess on-chip ESD protection against ±16 kV HBM, ±8 kV IEC 61000-4-2 contact discharge and ±2 kV IEC 61000-4-4 EFT. The International Electrotechnical Commission (IEC) ESD test is far more severe than the HBM ESD test. The 50% higher charge capacitance, C_S, and 78% lower discharge resistance, R_D of the IEC model produce significantly higher discharge currents than the HBM model.

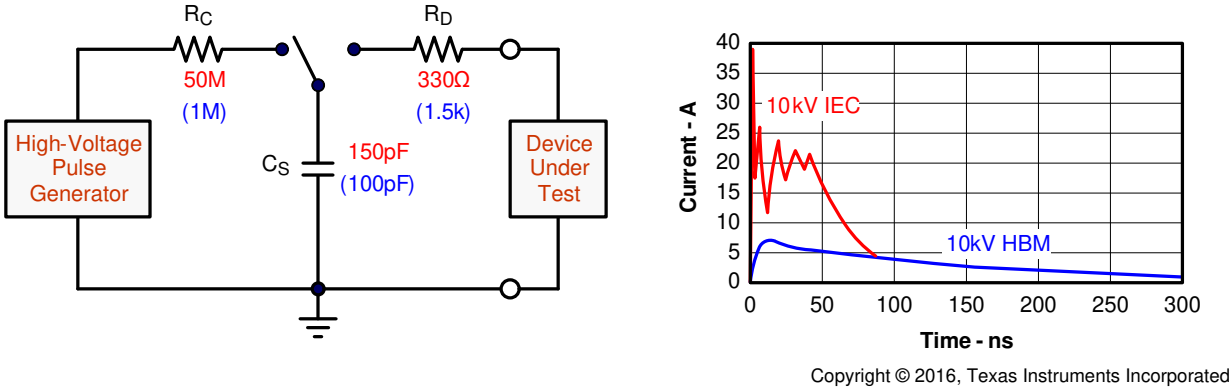

Copyright © 2016, Texas Instruments Incorporated

図 25. HBM and IEC ESD Models and Currents in Comparison (HBM Values in Parenthesis)

The on-chip implementation of IEC ESD and EFT protection significantly increases the robustness of equipment. Common discharge events occur because of human contact with connectors and cables. EFTs are generally caused by relay-contact bounce or the interruption of inductive loads.

Surge transients often result from lightning strikes (direct strike or an indirect strike which induce voltages and currents), or the switching of power systems, including load changes and short circuit switching. These transients are often encountered in industrial environments, such as factory automation and power-grid systems.

図 26 compares the pulse-power of the EFT and surge transients with the power caused by an IEC ESD transient. The left hand diagram shows the relative pulse-power for a 0.5-kV surge transient and 4-kV EFT transient, both of which dwarf the 10-kV ESD transient visible in the lower-left corner. 500-V surge transients are representative of events that may occur in factory environments in industrial and process automation. The right hand diagram shows the pulse-power of a 6-kV surge transient, relative to the same 0.5-kV surge transient. 6-kV surge transients are most likely to occur in power generation and power-grid systems.

Designers may choose to implement protection against longer duration surge transients. 図 28 suggests two circuit designs providing protection against short and long duration surge transients. 表 3 lists the bill of materials for the external protection devices.

Copyright © 2019, Texas Instruments Incorporated

Application Information (continued)

注

The unit of the pulse-power changes from kW to MW, thus making the power of the 500-V surge transient almost dropping off the scale.

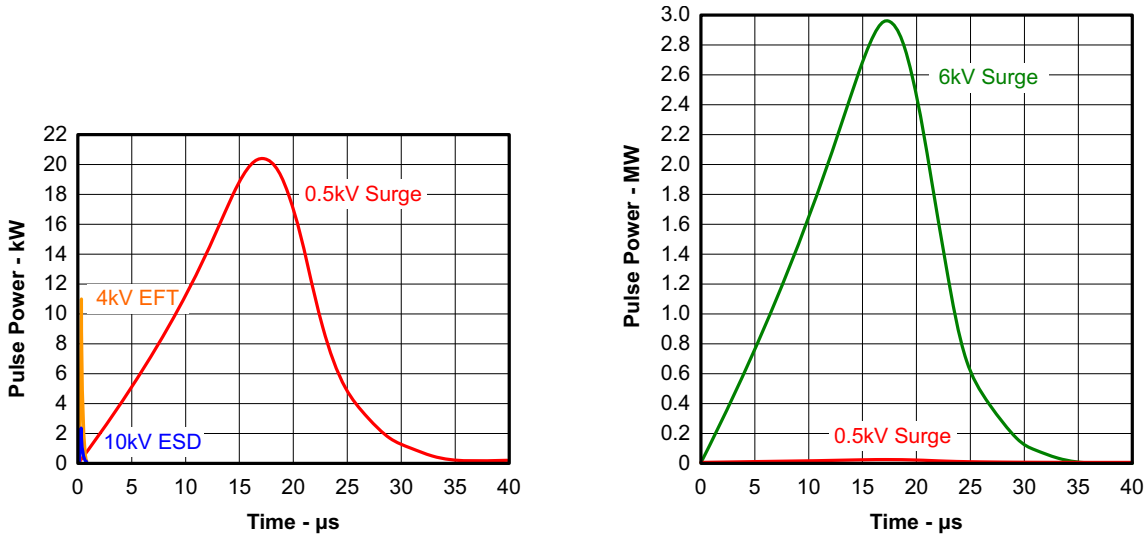


図 26. Power Comparison of ESD, EFT, and Surge Transients

In the case of surge transients, high-energy content is signified by long pulse duration and slow decaying pulse power.

The electrical energy of a transient that is dumped into the internal protection cells of the transceiver is converted into thermal energy. This thermal energy heats the protection cells and literally destroys them, thus destroying the transceiver. 図 27 shows the large differences in transient energies for single ESD, EFT, and surge transients as well as for an EFT pulse train, commonly applied during compliance testing.

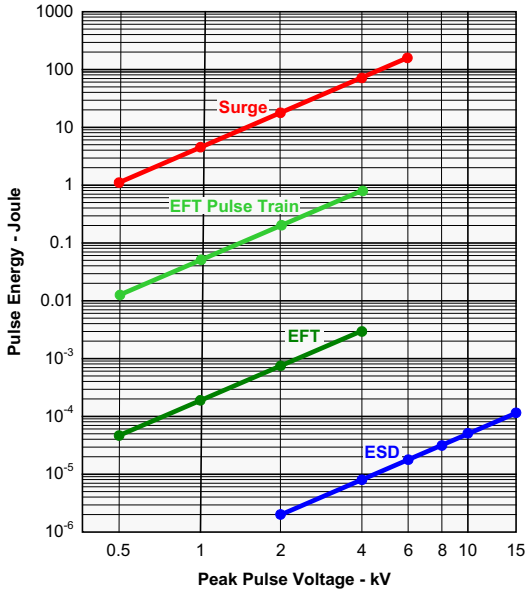


図 27. Comparison of Transient Energies


Copyright © 2019, Texas Instruments Incorporated

Application Information (continued)

表 3. List of Components

DEVICE	FUNCTION	ORDER NUMBER(1)	MANUFACTURER
XCVR	5-V, 1-Mbps RS-485 Transceiver	THVD1505DR	TI
R1, R2	10-Ω, Pulse-Proof Thick-Film Resistor	CRCW0603010RJNEAHP	Vishay
TVS	Bidirectional 400-W Transient Voltage Suppressor	CDSOT23-SM712	Bourns
TBU1, TBU2	Bidirectional 200mA Transient Blocking Unit	TBU-CA-065-200-WH	Bourns
MOV1, MOV2	200-mA Transient Blocking Unit 200-V, Metal-Oxide Varistor	MOV-10D201K	Bourns

(1) See Third Party Disclaimer

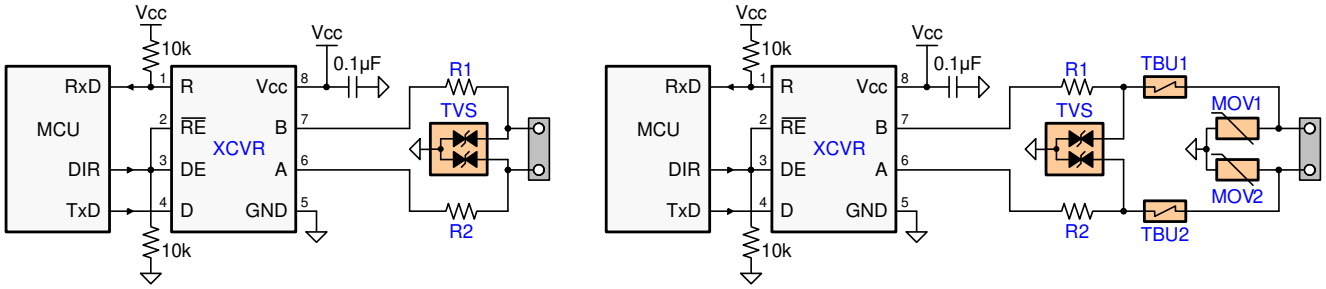

Copyright © 2016, Texas Instruments Incorporated


図 28. Transient Protections Against Surge Transients

The left circuit shown in 図 28 provides surge protection of 1-kV transients, while the right protection circuits can withstand surge transients of 5 kV.

Copyright © 2019, Texas Instruments Incorporated

9.2 Typical Application

Many RS-485 networks use isolated bus nodes to prevent the creation of unintended ground loops and their disruptive impact on signal integrity. An isolated bus node typically includes a micro controller that connects to the bus transceiver through a multi-channel, digital isolator (図 29).

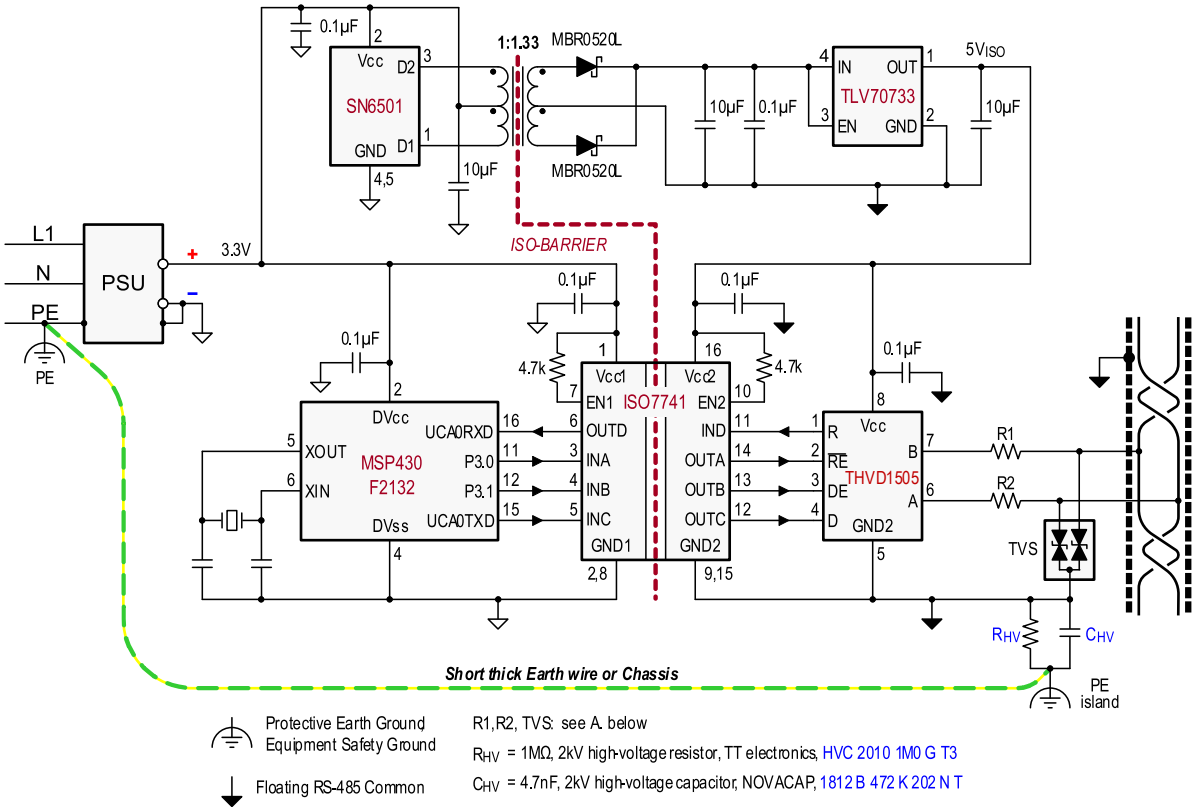

A. See 表 3.

図 29. Isolated Bus Node With Transient Protection

9.2.1 Design Requirements

Example Application: Isolated Bus Node with Transient Protection

- RS-485-compliant bus interface.
- Galvanic isolation of both signal and power supply lines.
- Able to withstand surge transients up to 1 kV (per IEC 61000-4-5).
- Full control of data flow on bus in order to prevent contention (for half-duplex communication).

9.2.2 Detailed Design Procedure

Power isolation is accomplished using the push-pull transformer driver SN6501, a low-cost LDO and TLV70733.

Signal isolation uses the quadruple digital isolator ISO7741. Notice that both enable inputs, EN1 and EN2, are pulled-up via 4.7-kΩ resistors to limit input currents during transient events.

While the transient protection is similar to the one in 図 28 (left circuit), an additional high-voltage capacitor diverts transient energy from the floating RS-485 common further towards protective earth (PE) ground. This diversion is necessary as noise transients on the bus are usually referred to Earth potential.

R_{VH} refers to a high-voltage resistor, and in some applications even a varistor. This resistance is applied to prevent charging of the floating ground to dangerous potentials during normal operation.

Occasionally varistors are used instead of resistors in order to rapidly discharge C_{HV}, if expected that fast transients might charge C_{HV} to high-potentials.

Copyright © 2019, Texas Instruments Incorporated

Typical Application (continued)

Note that the PE island represents a copper island on the PCB for the provision of a short, thick Earth wire connecting this island to PE ground at the entrance of the power supply unit (PSU).

In equipment designs using a chassis, the PE connection is usually provided through the chassis itself. Typically the PE conductor is tied to the chassis at one end while the high-voltage components, C_{HV} and R_{HV}, are connecting to the chassis at the other end.

9.2.3 Application Curve

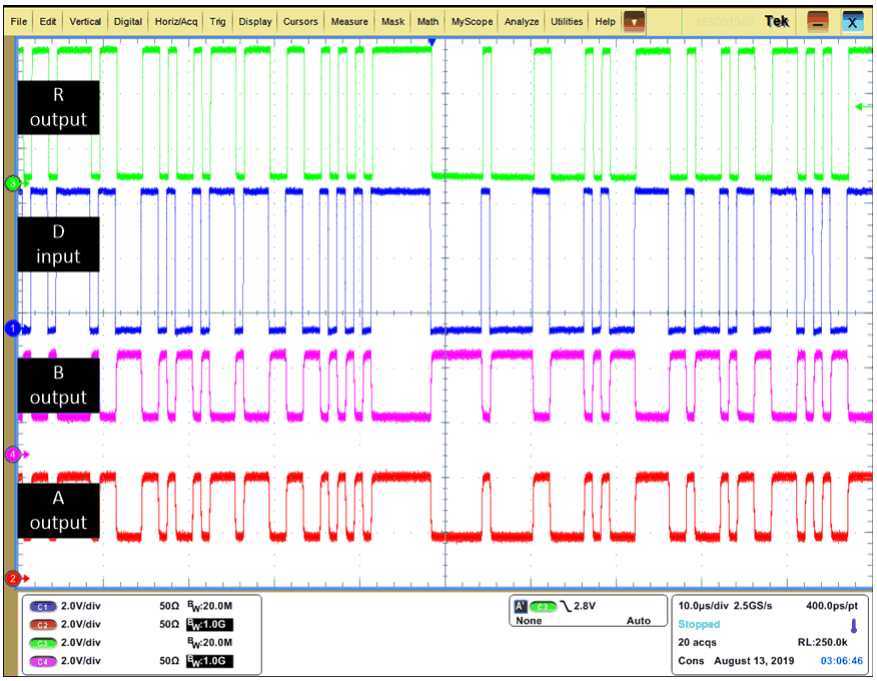


図 30. Waveforms at 1 Mbps Operation, PRBS7 Data Pattern

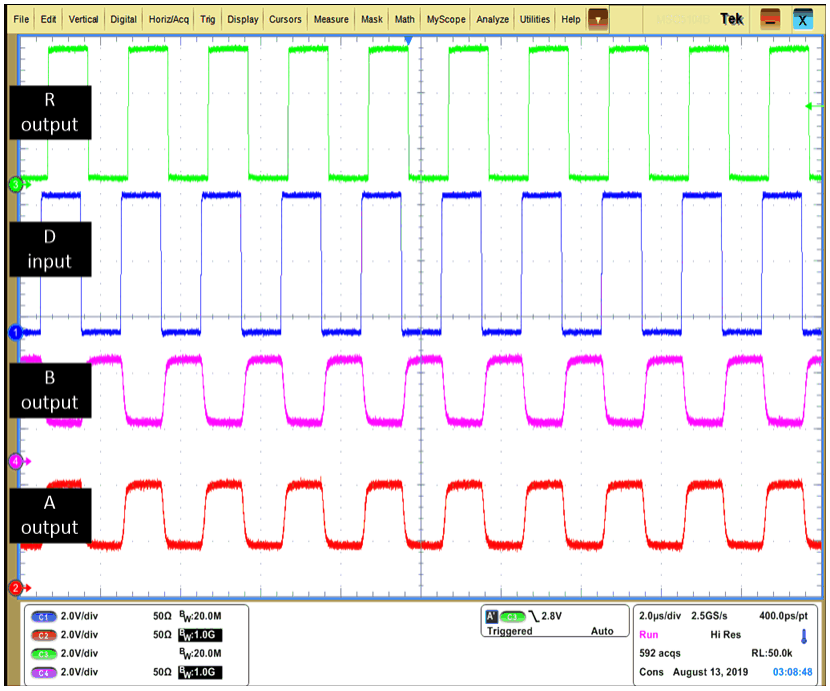


図 31. Waveforms at 1 Mbps Operation, Clock Data Pattern

Copyright © 2019, Texas Instruments Incorporated

10 Power Supply Recommendations

To ensure reliable operation at all data rates and supply voltages, each supply should be decoupled with a 100-nF ceramic capacitor located as close to the supply pins as possible. This helps to reduce supply voltage ripple present on the outputs of switched-mode power supplies and also helps to compensate for the resistance and inductance of the PCB power planes.

Copyright © 2019, Texas Instruments Incorporated

11 Layout

11.1 Layout Guidelines

11.1.1 Design and Layout Considerations For Transient Protection

Robust and reliable bus node design often requires the use of external transient protection devices in order to protect against surge transients that may occur in industrial environments. Since these transients have a wide frequency bandwidth (from approximately 3 MHz to 300 MHz), high-frequency layout techniques should be applied during PCB design.

1. Place the protection circuitry close to the bus connector to prevent noise transients from propagating across the board.
2. Use Vcc and ground planes to provide low inductance. Note that high frequency currents follow the path of least impedance and not the path of least resistance.
3. Design the protection components into the direction of the signal path. Do not force the transients currents to divert from the signal path to reach the protection device.
4. Apply 100 to 220-nF decoupling capacitors as close as possible to the V_{CC} pins of transceiver and UART or controller ICs on the board.
5. Use at least two vias for V_{CC} and ground connections of decoupling capacitors and protection devices to minimize effective via inductance.
6. Use 1 to 10-k pull-up or pull-down resistors for enable lines to limit noise currents in theses lines during transient events.
7. Insert pulse-proof resistors into the A and B bus lines if the TVS clamping voltage is higher than the specified maximum voltage of the transceiver bus terminals. These resistors limit the residual clamping current into the transceiver and prevent it from latching up.
   – While pure TVS protection is sufficient for surge transients up to 1 kV, higher transients require metal-oxide varistors (MOVs) which reduce the transients to a few-hundred volts of clamping voltage, and transient blocking units (TBUs) that limit transient current to about 200 mA.

11.2 Layout Example

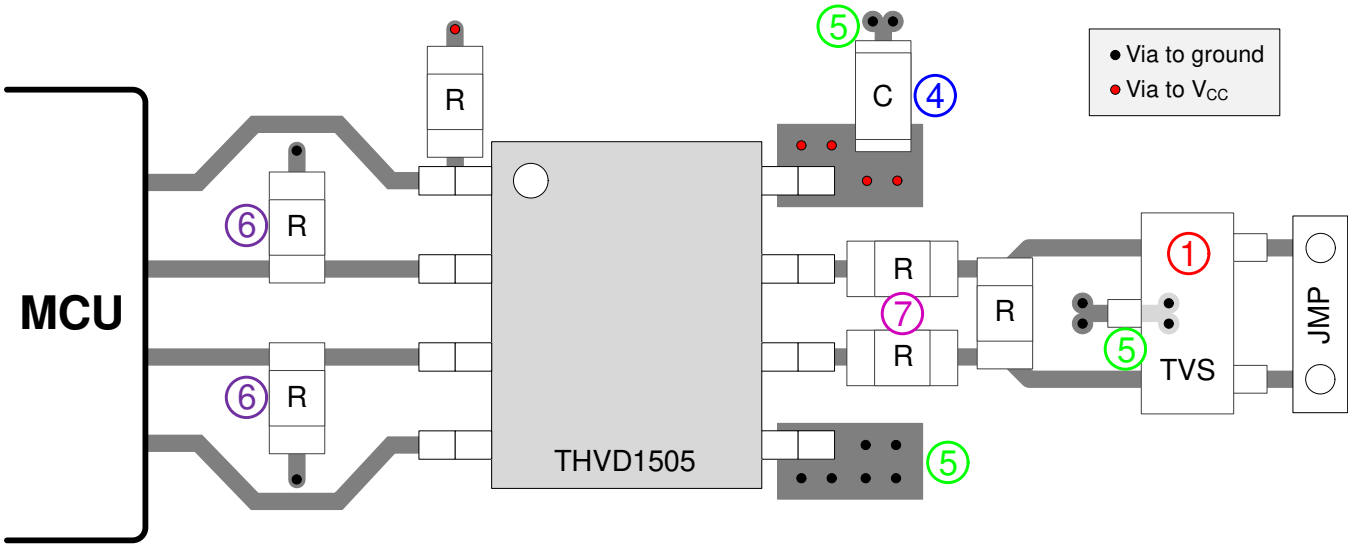


図 32. THVD1505 Layout Example

Copyright © 2019, Texas Instruments Incorporated

12 デバイスおよびドキュメントのサポート

12.1 デバイス・サポート

12.1.1 デベロッパー・ネットワークの製品に関する免責事項

デベロッパー・ネットワークの製品またはサービスに関するTIの出版物は、単独またはTIの製品、サービスと一緒に提供される場合に関係なく、デベロッパー・ネットワークの製品またはサービスの適合性に関する是認、デベロッパー・ネットワークの製品またはサービスの是認の表明を意味するものではありません。

12.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、ti.comのデバイス製品フォルダを開いてください。右上の「アラートを受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

12.3 コミュニティ・リソース

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

12.4 商標

E2E is a trademark of Texas Instruments.

12.5 静電気放電に関する注意事項



これらのデバイスは、限定的なESD（静電破壊）保護機能を内 蔵しています。保存時または取り扱い時は、MOSゲートに対す る静電破壊を防止するために、リード線同士をショートさせて おくか、デバイスを導電フォームに入れる必要があります。

12.6 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

Copyright © 2019, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
THVD1505DR	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1505
THVD1505DR.A	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1505

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

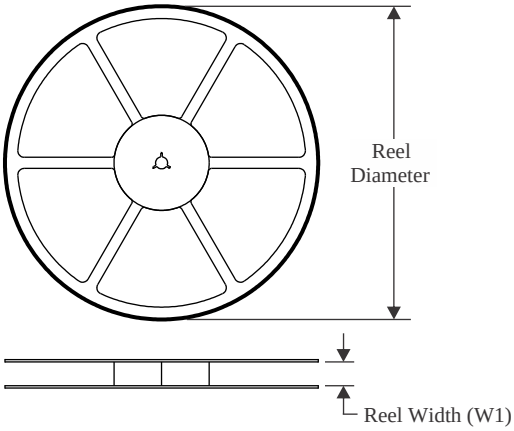


TAPE DIMENSIONS

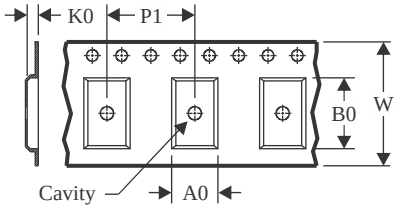

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

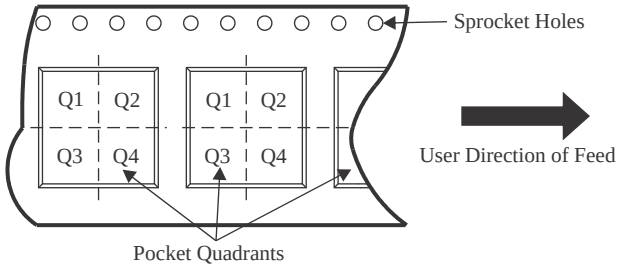

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THVD1505DR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

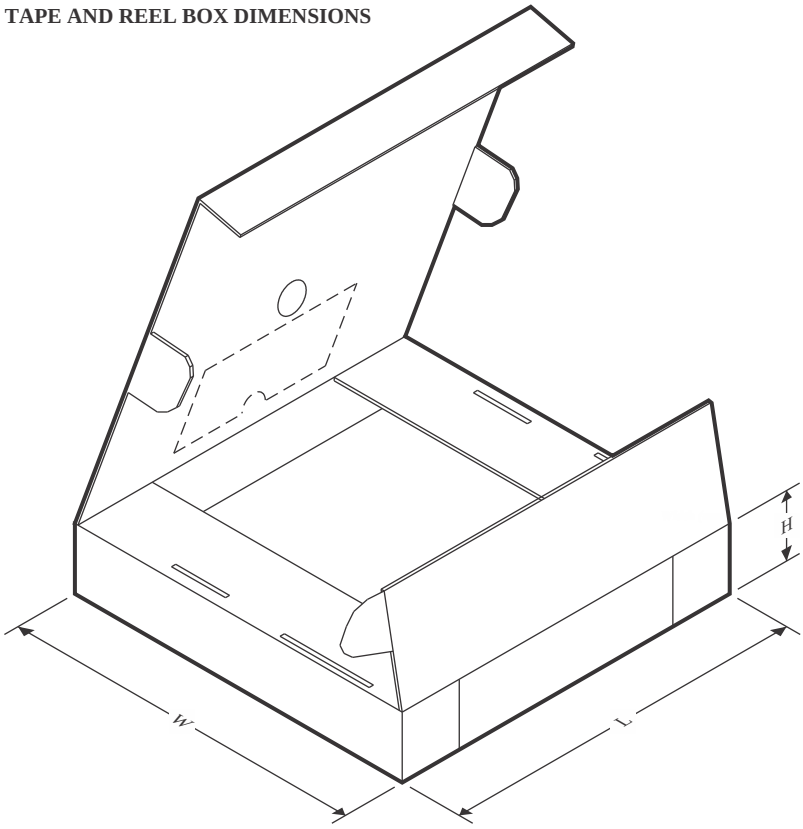

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THVD1505DR	SOIC	D	8	2500	353.0	353.0	32.0




PACKAGE OUTLINE

D0008A


SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

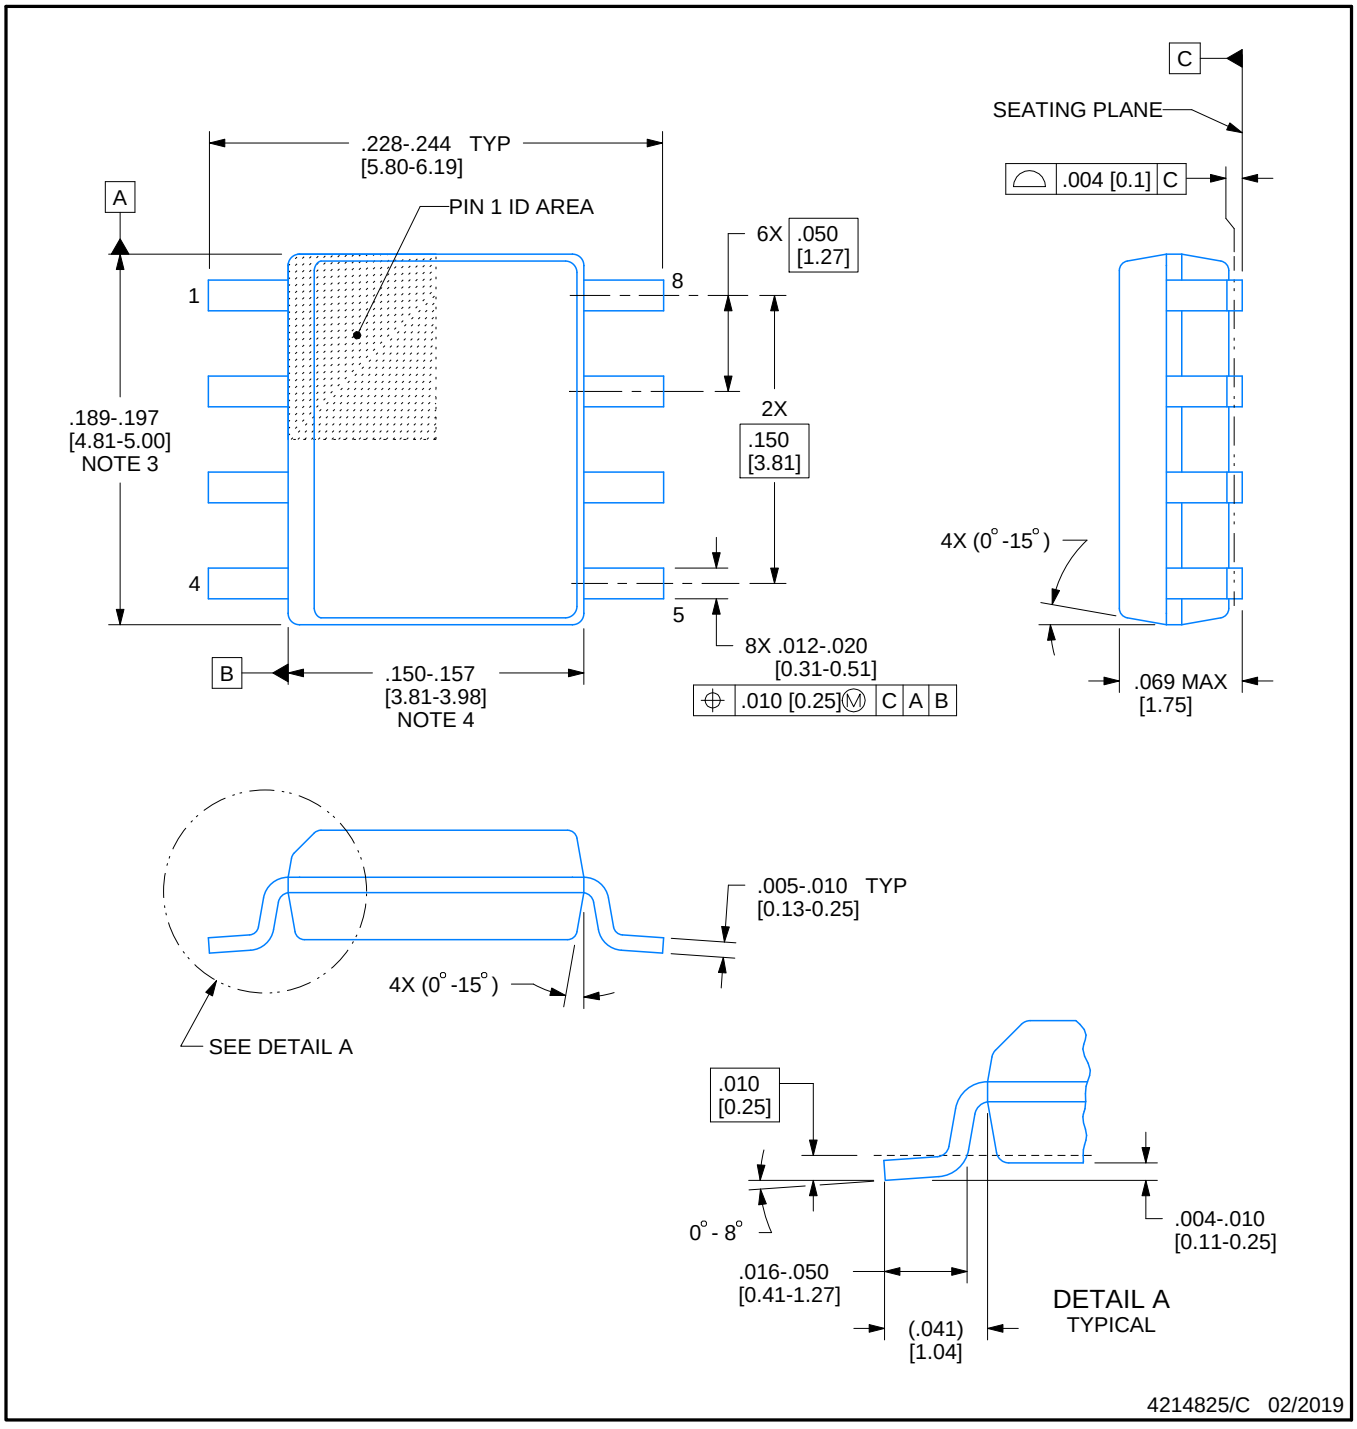


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

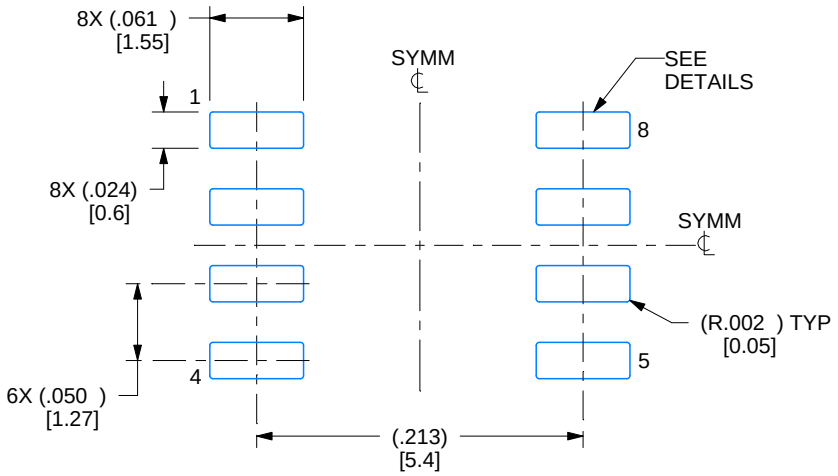

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

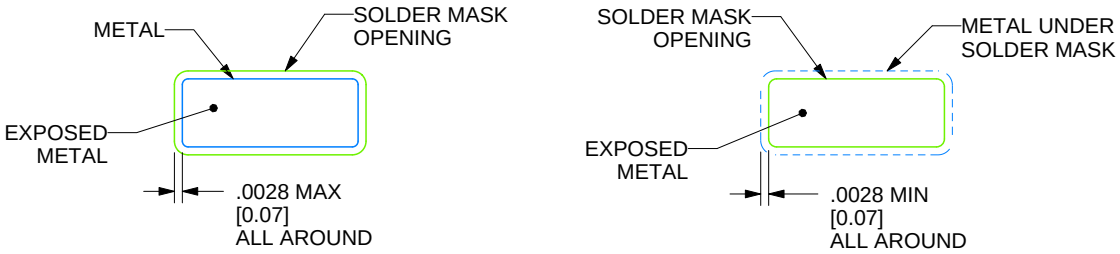

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

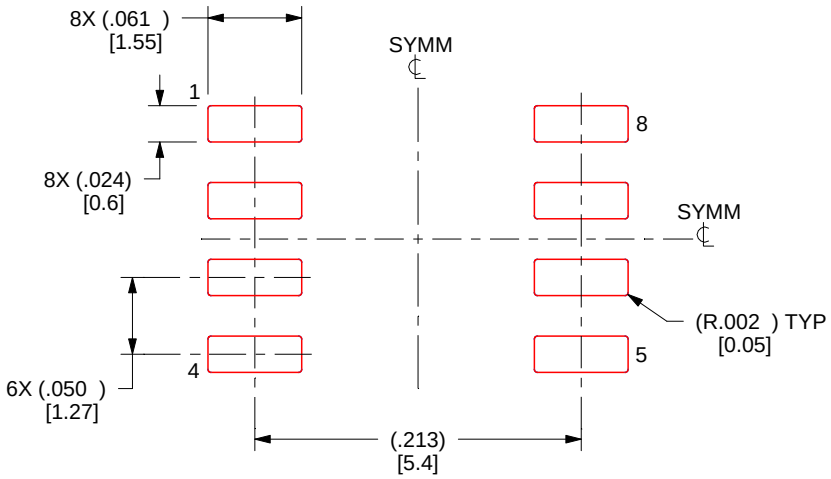

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月