

TPS3704-Q1 車載対応、クワッド/トリプル/デュアル/シングル・チャンネル、ウィンドウ形式または標準形式の電圧スーパーバイザ

1 特長

- **ASIL-A 機能安全準拠**
 - 機能安全アプリケーション向け開発
 - ISO 26262 システムの設計に役立つ資料
 - ASIL D までの決定論的対応能力
 - ASIL A までのハードウェア機能
- 車載アプリケーション向けに **AEC-Q100** 認証済み
 - デバイス温度グレード 1: -40°C ~ +125°C
- 1~4 チャンネルで最新の SoC を監視
 - $\pm 0.25\%$ (標準値) の高いスレッシュホールド精度
 - ウィンドウ、UV、または OV 電圧監視用に各チャンネルを構成
 - チャンネルごとにウィンドウ許容範囲 [3%~11% (標準値*)] をプログラム可能
 - 可変バージョン用の使いやすい計算ツール
 - テキサス・インスツルメンツの各種プロセッサ (AM26x、AM62x、TDA4) のコアと GPIO の各レールを監視する目的で設計
- 低消費電力の小型ソリューション
 - 静止電流 5.5 μ A (標準値)
 - 小型 6 ピン SOT23 パッケージ (2.9mm $\times$ 1.6mm)
- 追加機能
 - 内蔵のヒステリシスにより、リセット時の誤トリップを防止: 0.75% (標準値)
 - 23 の固定時間遅延オプション (20 μ s から 1200ms まで選択可能)
 - オープンドレインまたはプッシュプル出力トポロジを利用可能

2 アプリケーション

- 先進運転支援システム (ADAS)
- 車載用インフォテインメントおよびクラスタ
- HEV/EV
- ボディ・エレクトロニクスおよび照明

3 概要

TPS3704-Q1 は ASIL-A に準拠した低消費電力の高精度ウィンドウ (UV +OV) 電圧スーパーバイザであり、構成可能で、8 ピン (1.6mm $\times$ 2.9mm) の SOT-23 パッケージで供給されます。この高精度 ($\pm 0.25\%$) スーパーバイザは、クワッド、トリプル、デュアル、またはシングル チャンネル オプションで供給されます。各チャンネルは、対称型または非対称型にすることができる上限スレッシュホールドと下限スレッシュホールドの許容誤差により、過電圧 / 低電圧ウィンドウ検出を独自にカスタマイズできます。


TPS3704-Q1 は高分解能で解高精度のスレッシュホールド検出を採用しており、低電圧の電源レールで動作し、電源許容誤差が狭いシステム向けに設計されています。また、低いスレッシュホールド ヒステリシスと固定のリセット遅延機能が組み込まれているため、複数の電圧レール監視中の誤ったリセット信号の発生が防止されます。

TPS3704-Q1 は、外付け抵抗なしで過電圧および低電圧リセットのスレッシュホールドを設定できるため、安全性システムの信頼性が向上し、精度、コスト、ソリューション サイズ全体が最適化されます。SENSEx ピンでは、柔軟性ある設計を目指し、外部抵抗のオプション使用がサポートされています。VDD ピンと SENSEx ピンは独立しており、VDD 以外のレール電圧を監視することや、プッシュ ボタン入力を使用することもできます。

製品情報

部品番号	パッケージ (1)	本体サイズ (公称)
TPS3704-Q1	DDF (8 ピン SOT-23)	1.6mm $\times$ 2.9mm

- (1) 利用可能なすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。

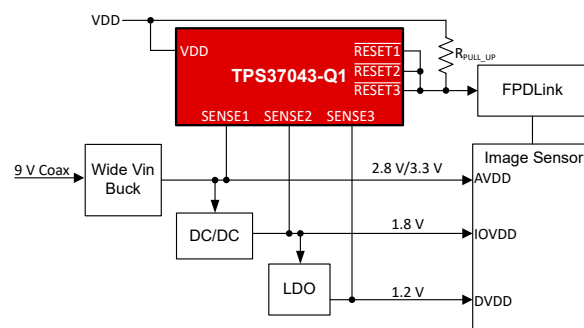

代表的なアプリケーション回路



Table of Contents

1 特長	1	7.3 Feature Description.....	20
2 アプリケーション	1	7.4 Device Functional Modes.....	22
3 概要	1	8 Application and Implementation	23
4 Device Nomenclature	3	8.1 Application Information.....	23
5 Pin Configuration and Functions	5	8.2 Typical Applications.....	25
6 Specifications	7	8.3 Power Supply Recommendations.....	28
6.1 Absolute Maximum Ratings.....	7	8.4 Layout.....	28
6.2 ESD Ratings.....	7	9 Device and Documentation Support	30
6.3 Recommended Operating Conditions.....	7	9.1 Device Nomenclature.....	30
6.4 Thermal Information.....	8	9.2 ドキュメントの更新通知を受け取る方法.....	31
6.5 Electrical Characteristics.....	8	9.3 サポート・リソース.....	31
6.6 Timing Requirements.....	10	9.4 Trademarks.....	31
6.7 Timing Diagrams	11	9.5 静電気放電に関する注意事項.....	32
6.8 Typical Characteristics.....	13	9.6 用語集.....	32
7 Detailed Description	17	10 Revision History	32
7.1 Overview.....	17	11 Mechanical, Packaging, and Orderable Information	32
7.2 Functional Block Diagrams.....	17		

4 Device Nomenclature


☒ 4-1 shows the device naming nomenclature to compare the different device variants. See 表 9-1 for a more detailed explanation. See 表 4-1 or 表 9-2 for the available device variants.

表 4-1. Device Threshold Table

ORDERABLE PART NAME	VARIANT ⁽³⁾	OUTPUT TYPE ⁽⁴⁾	NUM OF CHAN.	RESET TIME	SENSE1 ^{(1) (2)}	SENSE2 ^{(1) (2)}	SENSE3 ^{(1) (2)}	SENSE4 ^{(1) (2)}
TPS37041BPLEDFFRQ1	Fixed	L	1	5ms	0.9V (±7%)	-	-	-
TPS37042A3OFDDFRQ1	Fixed	O	2	10ms	3.3V (±5%)	1.2V (±5%)	-	-
TPS37042ZJOFDDFRQ1	Fixed	O	2	10ms	1.95V (±4%)	3.8V (±6%)	-	-
TPS37043DJOFDDFR	ADJ/Fixed	O	3	10ms	3.3V (-11%)	1.2V (-11%)	0.8V (-8%)	-
TPS37043A4OFDDFRQ1	Fixed	O	3	10ms	2.8V (±5%)	1.8V (±5%)	1.2V (±5%)	-
TPS37043A8OFDDFRQ1	Fixed	O	3	10ms	3.3V (±5%)	1.8V (±5%)	1.0V (±5%)	-
TPS37043CPOFDDFRQ1	ADJ/Fixed	O	3	10ms	3.3V (±4%)	0.75V (±4%)	0.8V (±3%)	-
TPS37043ZJOFDDFRQ1	Fixed	O	3	10ms	0.95V (±4%)	1.35V (±4%)	1.8V (±4%)	-
TPS37043LJOFDDFRQ1	ADJ	O	3	10ms	0.4V (±5%)	0.4V (±5%)	0.8V (±5%)	-
TPS37043CJOFDDFRQ1	ADJ	O	3	10ms	0.8V (±6%)	0.8V (±6%)	0.8V (±6%)	-
TPS37043MJOFDDFRQ1	ADJ	O	3	10ms	0.4V (±7%)	0.4V (±7%)	0.8V (±7%)	-
TPS37043A5OFDDFRQ1	Fixed	O	3	10ms	3.3V (±4%)	1.8V (±4%)	1.2V (±4%)	-
TPS37043BJOFDDFRQ1	ADJ	O	3	10ms	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)	-
TPS37044BJOFDDFR	ADJ	O	4	10ms	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)
TPS37044LJOJDDFR	ADJ	O	4	35ms	0.4V (±5%)	0.4V (±5%)	0.8V (±5%)	0.8V (±5%)
TPS37044BJOFDDFRQ1	ADJ	O	4	10ms	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)
TPS37044CJOFDDFRQ1	ADJ	O	4	10ms	0.8V (±6%)	0.8V (±6%)	0.8V (±6%)	0.8V (±6%)
TPS37044MJOFDDFRQ1	ADJ	O	4	10ms	0.4V (±7%)	0.4V (±7%)	0.8V (±7%)	0.8V (±7%)
TPS37044A4OGDDFRQ1	Fixed	O	4	15ms	3.3V (±8%)	1.8V (±4%)	1.15V (±6%)	1.15V (±6%)


- (1) Listed percentage denotes window tolerance, see ☒ 6-1 for more information
 (2) VIT threshold of 0.8V and 0.4V signifies an adjustable channel
 (3) ADJ denotes an adjustable voltage threshold set by an external resistor divider, see [Adjustable Voltage Thresholds](#) for more information
 (4) Output type "L" designates Push Pull Active Low and "O" designates Open Drain Active Low. Reference ☒ 4-1 for more information

TPS3704 X XX X X XXXR – Q1

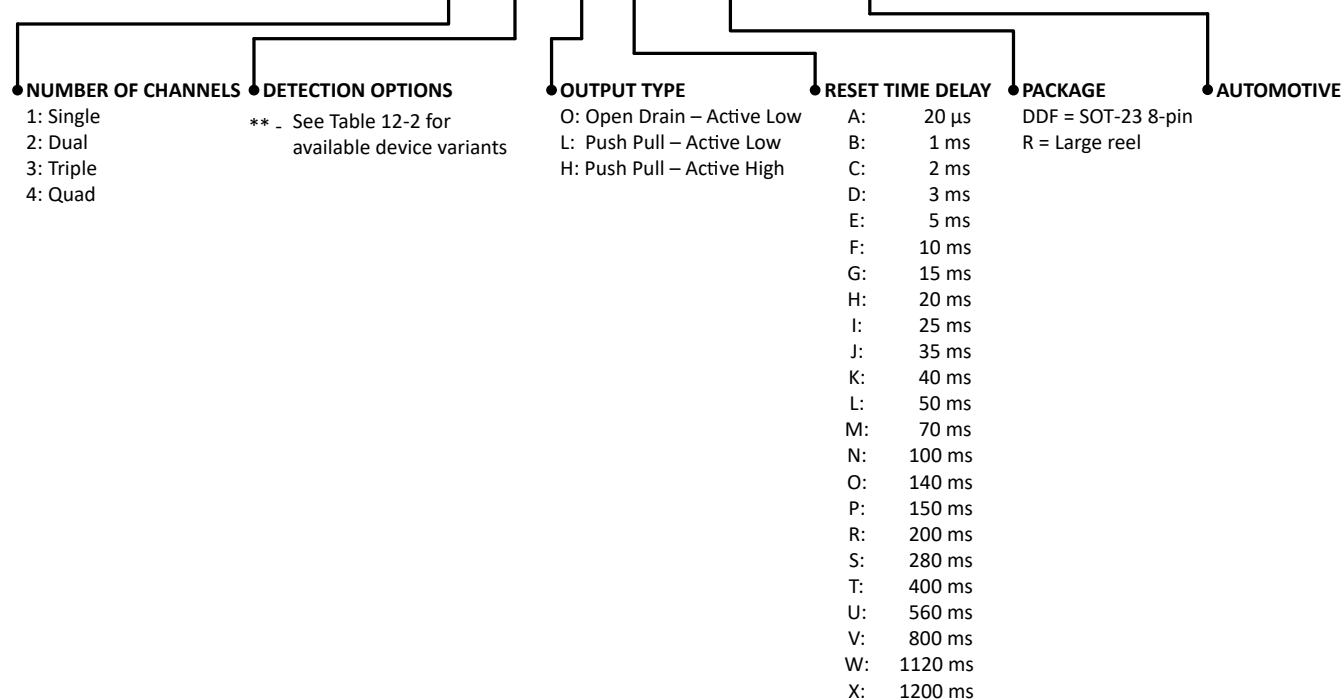


☒ 4-1. Device Naming Convention


5 Pin Configuration and Functions

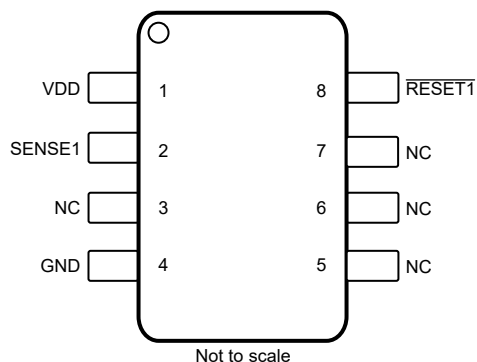


**図 5-1. DDF Package
8-PIN SOT23
TPS37041-Q1 (Top View)**

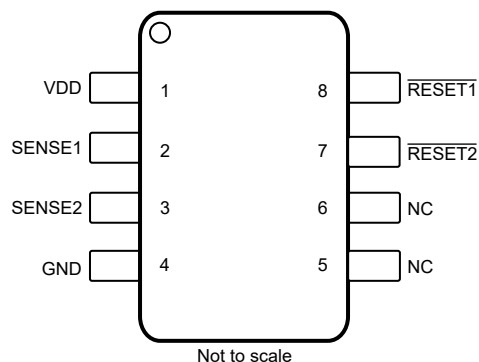

**図 5-2. DDF Package
8-PIN SOT23
TPS37042-Q1 (Top View)**

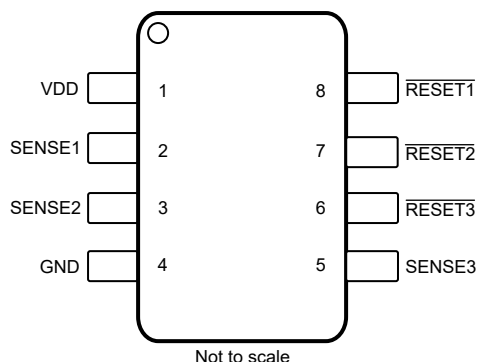

**図 5-3. DDF Package
8-PIN SOT23
TPS37043-Q1 (Top View)**

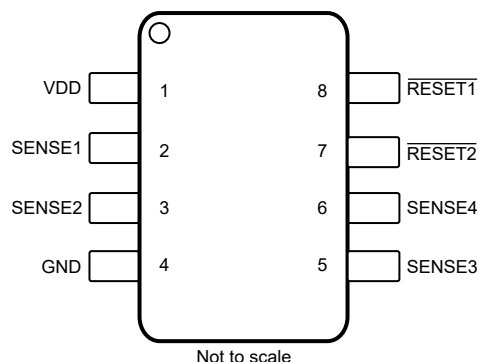

**図 5-4. DDF Package
8-PIN SOT23
TPS37044-Q1 (Top View)**

表 5-1. Pin Functions

NAME	PIN				I/O	DESCRIPTION
	TPS37041-Q1	TPS37042-Q1	TPS37043-Q1	TPS37044-Q1		
VDD	1	1	1	1	I	Supply Input. Bypass with a 0.1μF capacitor to GND.
SENSE1	2	2	2	2	I	Connect directly to a monitored voltage. RESET1/RESET1 is asserted when SENSE1 falls outside of the window threshold. No external capacitor is required for this SENSE1 pin. For the TPS37044-Q1 (quad version) RESET1/RESET1 asserts when either SENSE1 or SENSE2 fall outside of the window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. Leave this pin floating if not used.
SENSE2	—	3	3	3	I	Connect directly to a monitored voltage. RESET2/RESET2 is asserted when SENSE2 falls outside of window threshold. No external capacitor is required for the SENSE2 pin. For the TPS37044-Q1 (quad version) RESET1/RESET1 asserts when either SENSE1 or SENSE2 fall outside of the window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. Leave this pin floating if not used.
SENSE3	—	—	5	5	I	Connect directly to monitored voltage. RESET3/RESET3 is asserted when SENSE3 falls outside of window threshold. No external capacitor is required for SENSE3 pin. For TPS37044-Q1 (quad version) RESET2/RESET2 asserts when either SENSE3 or SENSE4 falls outside of window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. If the input pin is not being used, it can be left floating.
SENSE4	—	—	—	6	I	Connect directly to a monitored voltage. For TPS37044-Q1 (quad version) RESET2/RESET2 asserts when either SENSE3 or SENSE4 fall outside of the window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. Leave this pin floating if not used.
RESET1	8	8	8	8	O	RESET1/RESET1 asserts when SENSE1 falls outside of the overvoltage or undervoltage threshold window. RESET1/RESET1 stays asserted for the reset timeout period after SENSE1 fall back within the window threshold. Active-low, open-drain reset output, requires an external pullup resistor. For the TPS37044-Q1, RESET1/RESET1 asserts when either SENSE1 or SENSE2 falls outside of the window threshold. Leave this pin floating if not used. For the TPS37044F-Q1 option, any SENSEx channels that detect an overvoltage (OV) fault, this pin is asserted.
RESET2	—	7	7	7	O	RESET2/RESET2 asserts when SENSE2 falls outside of the overvoltage or undervoltage threshold window. RESET2/RESET2 stays asserted for the reset timeout period after SENSE2 falls back within the window threshold. Active-low, open-drain reset output, requires an external pullup resistor. For the TPS37044-Q1, RESET2/RESET2 asserts when either SENSE3 or SENSE4 fall outside of the window threshold. Leave this pin floating if not used. For the TPS37044F-Q1 option, any SENSEx channels that detect an undervoltage (UV) fault, this pin is asserted.
RESET3	—	—	6	—	O	RESET3/RESET3 asserts when SENSE3 falls outside of the overvoltage or undervoltage threshold window. RESET3/RESET3 stays asserted for the reset timeout period after SENSE3 falls back within the window threshold. Active-low, open-drain reset output, requires an external pullup resistor. Leave this pin floating if not being used.
GND	4	4	4	4	—	Ground
NC	3,5,6,7	5,6	—	—	—	No connect

6 Specifications

6.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		MIN	MAX	UNIT
Voltage	V _{DD}	−0.3	6.5	V
	V _{RESET1} , V _{RESET2} , V _{RESET3}	−0.3	6.5	V
	V _{SENSE1} , V _{SENSE2} , V _{SENSE3} , V _{SENSE4}	−0.3	6.5	V
Current	I _{RESET1} , I _{RESET2} , I _{RESET3} SINK		±20	mA
Temperature ⁽²⁾	Continuous total power dissipation	See the Thermal Information		
	Operating junction temperature, T _J	−40	150	°C
	Operating free-air temperature, T _A	−40	150	°C
	Storage temperature, T _{stg}	−65	150	°C

- (1) Stresses beyond values listed under Absolute Maximum Ratings (AMR) may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to AMR-rated conditions for extended periods may affect device reliability.
- (2) As a result of the low dissipated power in this device, it is assumed that T_J = T_A.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
		Charged-device model (CDM), per AEC Q100-011	±750	

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification

6.3 Recommended Operating Conditions

		MIN	NOM	MAX	UNIT
V _{DD}	Supply pin voltage	1.7		6.0	V
V _{SENSE1,2,3,4}	Input pin voltage	0		6.0	V
V _{RESET1} , V _{RESET2} , V _{RESET3}	Output pin voltage	0		6.0	V
I _{RESET1} , I _{RESET2} , I _{RESET3} SINK	Output pin current sink	0.3		5	mA
T _A	Operating free air temperature	−40		125	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS3704x-Q1	UNIT
		DDF	
		PINS	
R _{θJA}	Junction-to-ambient thermal resistance	121.5	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	60.6	°C/W
R _{θJB}	Junction-to-board thermal resistance	42.3	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	2.2	°C/W
Ψ _{JB}	Junction-to-board characterization parameter	42.1	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

At $1.7V \leq V_{DD} \leq 6.0V$, RESET $\bar{x}$ Voltage ($V_{RESET\bar{x}}$) = 10kΩ to V_{DD} , RESET $\bar{x}$ load = 10pF, and over the operating free-air temperature range of – 40°C to 125°C, unless otherwise noted. Typical values are at $T_A = 25^\circ\text{C}$, typical conditions at $V_{DD} = 3.3V$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{DD}	Supply Voltage		1.7		6.0	V
UVLO	Under Voltage Lockout ⁽¹⁾	V _{DD} falling below 1.7V	1.2	1.4	1.6	V
UVLO _(HYS)	UVLO Hysteresis ⁽²⁾	V _{DD} rising below 1.7V		65		mV
V _{POR}	Power on reset voltage ⁽³⁾	V _{OL (MAX)} = 0.3V, I _{OUT} = 15μA			0.7	V
V _{IT} Range	Threshold Programming Range		0.4		5.55	V
V _{IT- (UV)}	UV accuracy (25°C)			0.1		%
V _{IT+ (OV)}	OV accuracy (25°C)			0.1		%
TOL _{min}	Tolerance Programming minimum			3		%
TOL _{max}	Tolerance Programming maximum			11		%
THR RES Low	Threshold Programming Resolution Low	V _{IT} ≤ 0.8V		20		mV / step
THR RES Mid	Threshold Programming Resolution Mid	0.8V < V _{IT} ≤ 4.0V		0.5		% / step
THR RES High	Threshold Programming Resolution High	V _{IT} > 4.0V		20		mV / step
V _{IT}	Accuracy for absolute threshold including tolerance	V _{IT} < 0.8V	-1.6		1.6	%
V _{IT}	Accuracy for absolute threshold including tolerance	V _{IT} = 0.8V - 5.55V	-1		1	%
V _{HYS}	V _{IT} < 0.80V		1.1	1.4	1.7	%
V _{HYS}	V _{IT} ≥ 0.80V		0.40	0.75	1	%
I _{DD}	TPS3704x	V _{DD} ≤ 6.0V		5.5	15	μA
I _{SENSEX}	Input current, SENSEx pin	V _{SENSEX} = 5.5V		1	2.5	μA
I _{SENSE_ADJ}	Input current, SENSE pin (Bypass internal resistor divider)- Adjustable version	V _{SENSEX} = 5.5V			350	nA
V _{OL}	Low level output voltage	V _{DD} = 1.7V, I _{SINK} = 0.4mA			300	mV
V _{OL}	Low level output voltage	V _{DD} = 2V, I _{SINK} = 3mA			300	mV
V _{OL}	Low level output voltage	V _{DD} = 6.0V, I _{SINK} = 5mA			300	mV
V _{OH}	High level output voltage (push pull)		0.8*V _{DD}			V
V _{OH}	High level output voltage (push pull)	V _{DD} = 1.7V, I _{SOURCE} = 0.4mA	1.36			V
V _{OH}	High level output voltage (push pull)	V _{DD} = 6V, I _{SOURCE} = 2mA	4.8			V

6.5 Electrical Characteristics (続き)

At $1.7V \leq V_{DD} \leq 6.0V$, $\overline{RESET}$ Voltage ($V_{\overline{RESET}}$) = $10k\Omega$ to V_{DD} , $\overline{RESET}$ load = $10pF$, and over the operating free-air temperature range of $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at $T_A = 25^{\circ}C$, typical conditions at $V_{DD} = 3.3V$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{(lk)}$	Open drain output leakage current	$V_{DD} = V_{\overline{RESET}} = 6.0V$			350	nA

- (1) $\overline{RESET}$ pin is driven low when V_{DD} falls below UVLO.
- (2) Hysteresis is with respect of the tripoint ($V_{IT- (UV)}$, $V_{IT+ (OV)}$).
- (3) V_{POR} is the minimum V_{DD} voltage level for a controlled output state. Slew rate = $100mV / \mu s$.

6.6 Timing Requirements

At $1.7V \leq V_{DD} \leq 6.0V$, $RESET\bar{x}$ voltage ($V_{RESET\bar{x}}$) = $10k\Omega$ to V_{DD} , $RESET\bar{x}$ load = $10pF$, and over the operating free-air temperature range of $-40^{\circ}C$ to $125^{\circ}C$, unless otherwise noted. Typical values are at $T_A = 25^{\circ}C$, typical conditions at $V_{DD} = 3.3V$.

PARAMETER		TEST CONDITIONS	MIN	NOM	MAX	UNIT
t_D	Reset release time delay	Fixed delay option $t_D < 4ms$, overdrive = 10%	-40	t_D	40	%
t_D	Reset release time delay	Fixed delay option $t_D > 5ms$, overdrive = 10%	-30	t_D	30	%
t_{PD}	Propagation detect delay ⁽¹⁾	Fixed time delay $t_D > 1ms$, overdrive 10%			10	μs
$t_{GI(VIT-)}$	Glitch Immunity Undervoltage (5% overdrive) ⁽²⁾			2		μs
$t_{GI(VIT+)}$	Glitch Immunity Overvoltage (5% overdrive) ⁽²⁾			2		μs
t_R	Ouptut rise (Push-Pull) ^{(2) (3)}			25		ns
t_R	Output rise time (Open-Drain) ^{(2) (3)}			2.2		μs
t_F	Output fall time ^{(2) (3)}			0.2		μs
t_{STRT}	Startup delay ⁽⁴⁾			1		ms

- (1) t_{PD} measured from threshold trip point ($V_{IT-(UV)}$ or $V_{IT+(OV)}$) to $RESET\bar{x}$ V_{OL} voltage
- (2) 5% Overdrive from threshold. Overdrive % = $[(V_{SENSEX} - V_{IT}) / V_{IT}]$; Where V_{IT} stands for $V_{IT-(UV)}$ or $V_{IT+(OV)}$
- (3) Output transitions from V_{OL} to V_{OH} or ($V_{RESET\bar{x}}$) for rise times and V_{OH} or ($V_{RESET\bar{x}}$) to V_{OL} for fall times.
- (4) During the power-on sequence, V_{DD} must be at or above $V_{DD(MIN)}$ for at least $t_{STRT} + t_D$ before the output is in the correct state. when V_{DD} is between $V_{DD(MIN)}$ and V_{POR} the $RESET\bar{x}$ pin will be engaged

6.7 Timing Diagrams


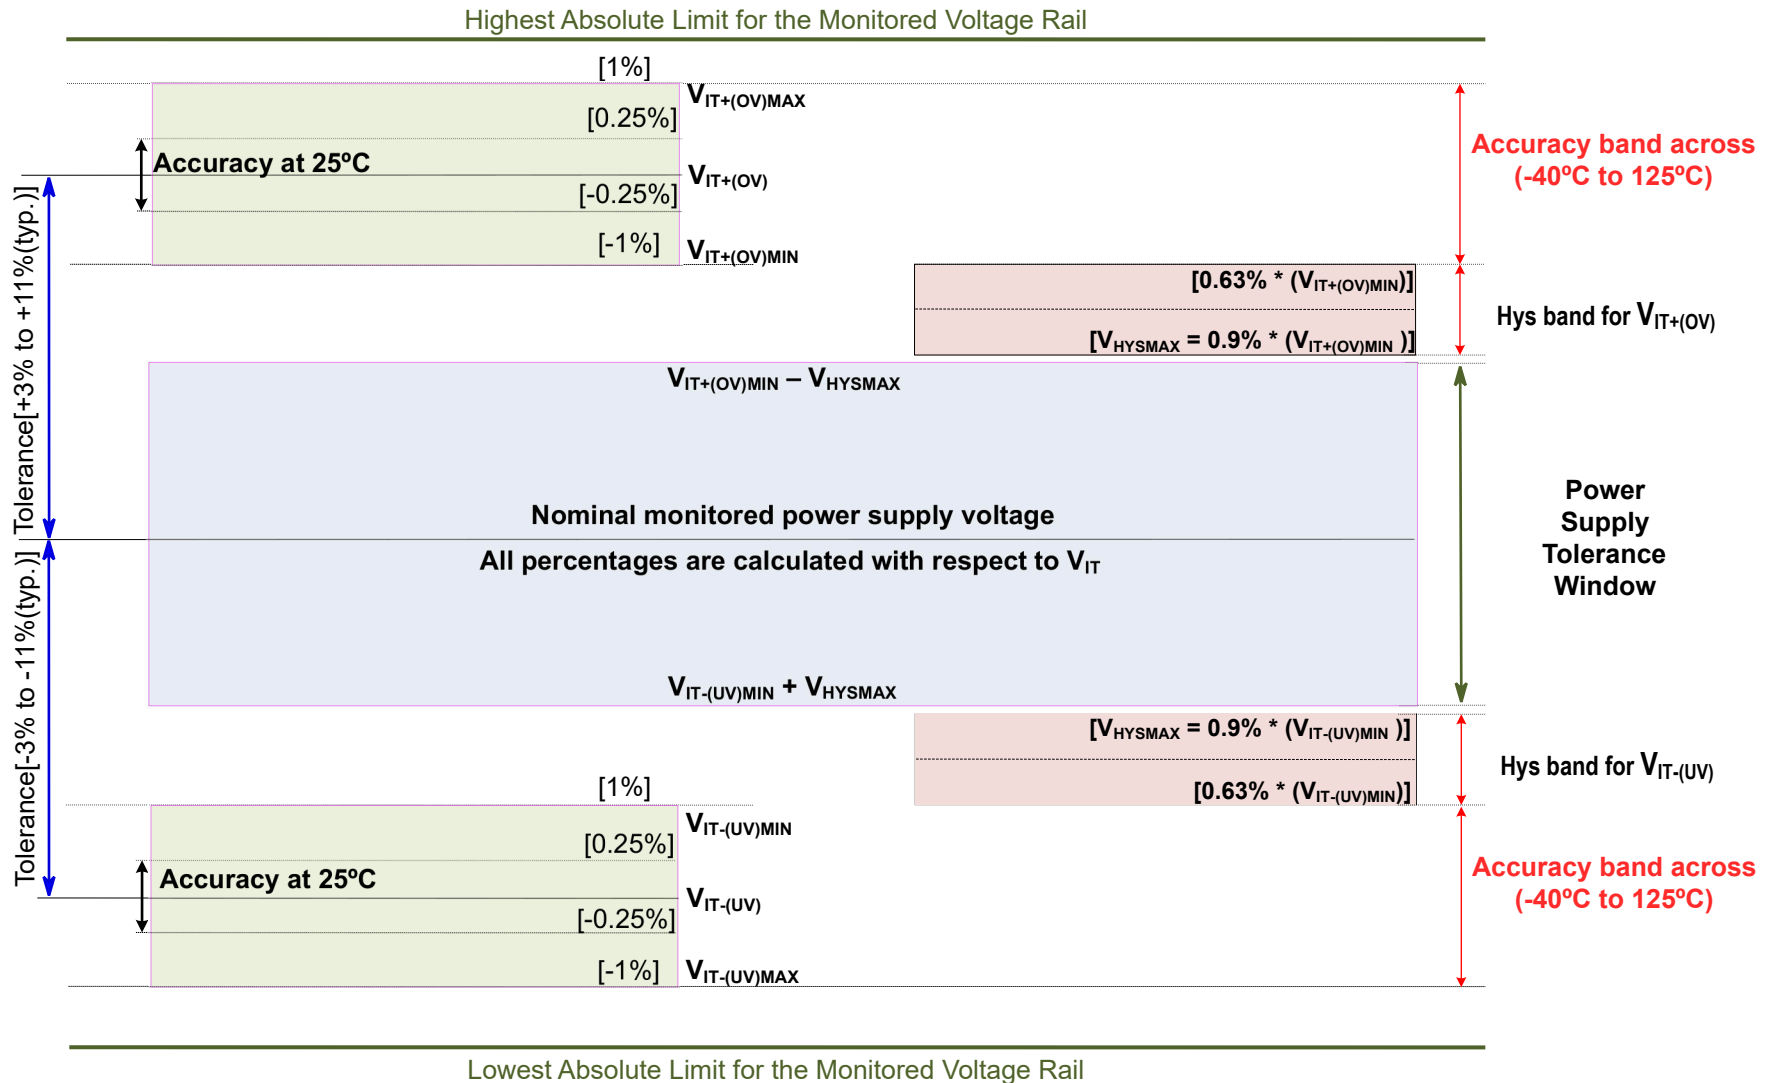


図 6-1. Voltage Threshold and Hysteresis Accuracy

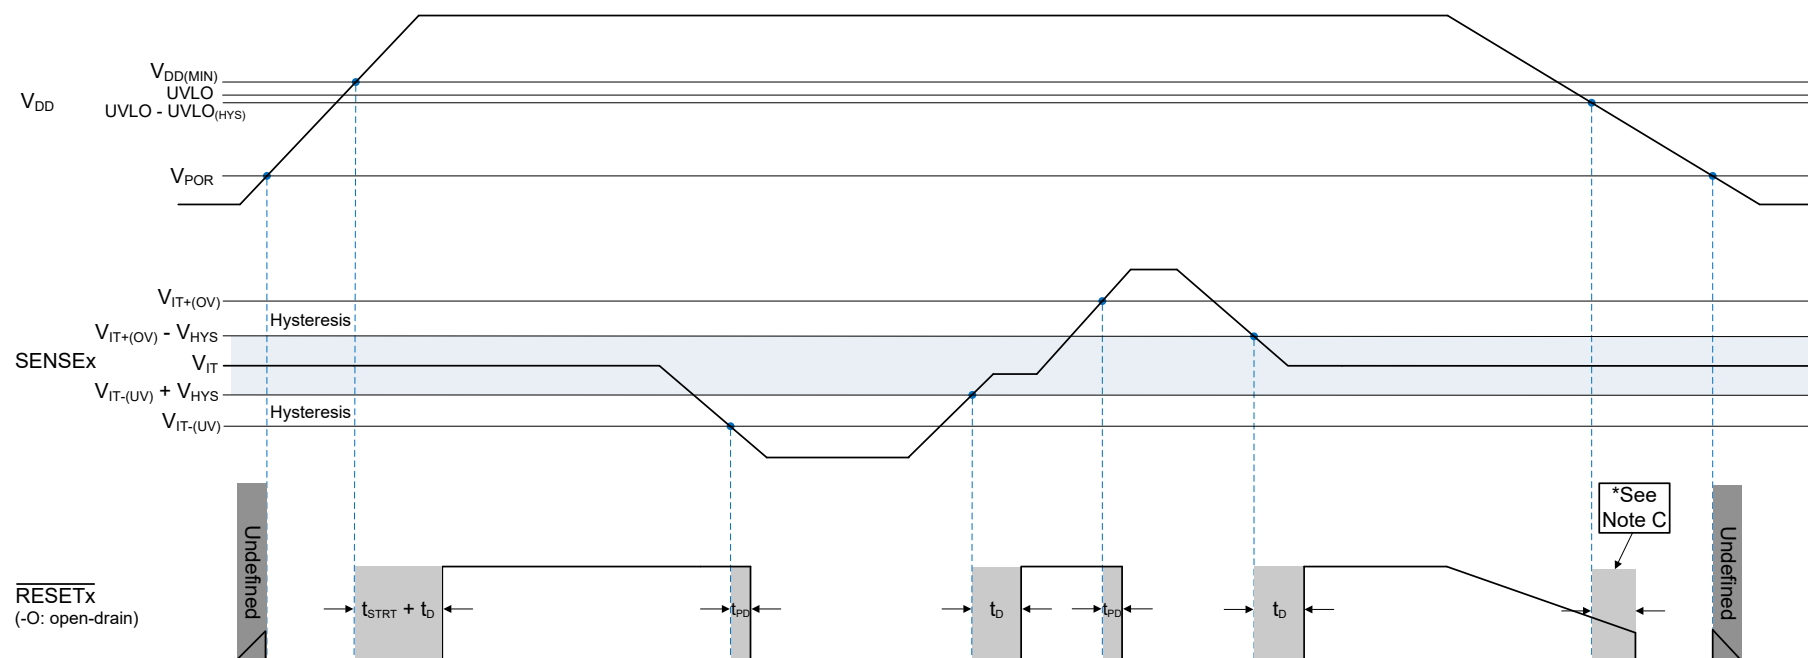

- A. Open-drain timing diagram assumes the $\overline{RESETx}/RESETx$ pin is connected via an external pullup resistor to V_{DD} .
- B. Be advised that [Figure 6-2](#) shows the V_{DD} falling slew rate is slow or the V_{DD} decay time is much larger than the propagation detect delay (t_{PD}) time.
- C. $\overline{RESETx}/RESETx$ is asserted after a time delay, typical value of $100\mu s$, when V_{DD} goes below the $UVLO - UVLO_{(HYS)}$ threshold.

Figure 6-2. SENSEx Timing Diagram

6.8 Typical Characteristics

Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are $T_A = 25^\circ\text{C}$, $V_{DD} = 3.3\text{V}$, and $R_{\text{pull-upx}} = 10\text{k}\Omega$, $C_{\text{LOAD}} = 50\text{pF}$, unless otherwise noted.

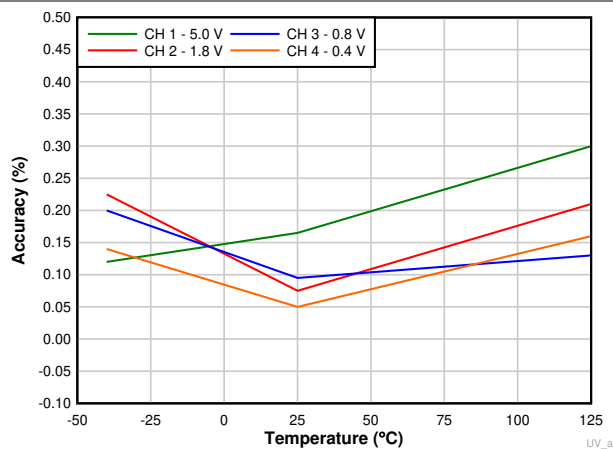


Figure 6-3. Undervoltage Accuracy vs Temperature

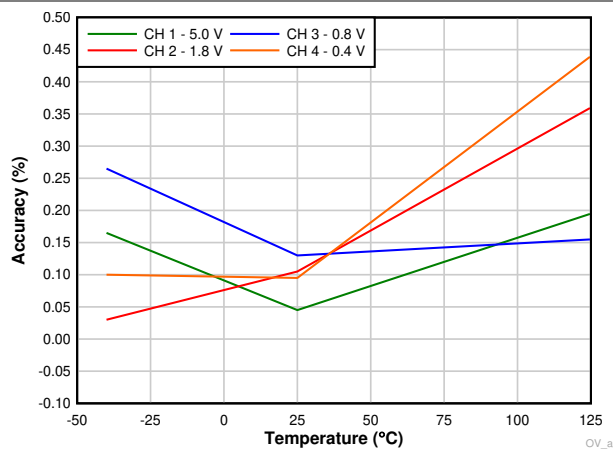


Figure 6-4. Overvoltage Accuracy vs Temperature

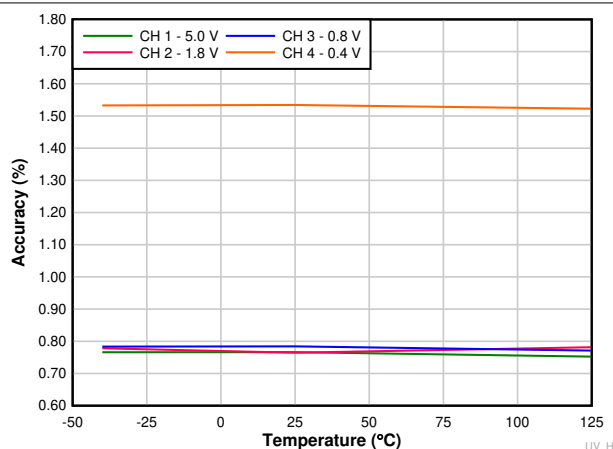


Figure 6-5. Undervoltage Hysteresis Voltage Accuracy vs Temperature

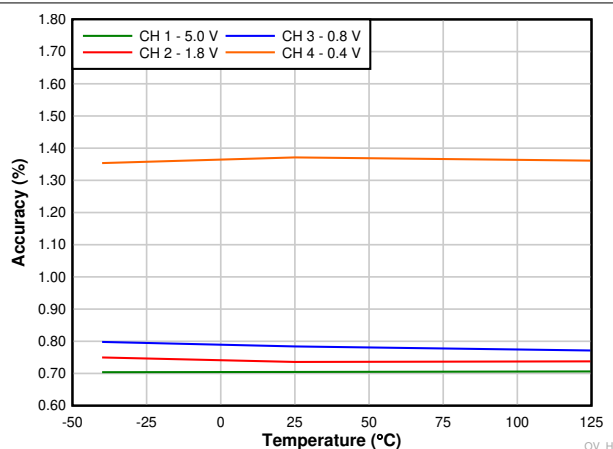


Figure 6-6. Overvoltage Hysteresis Voltage Accuracy vs Temperature

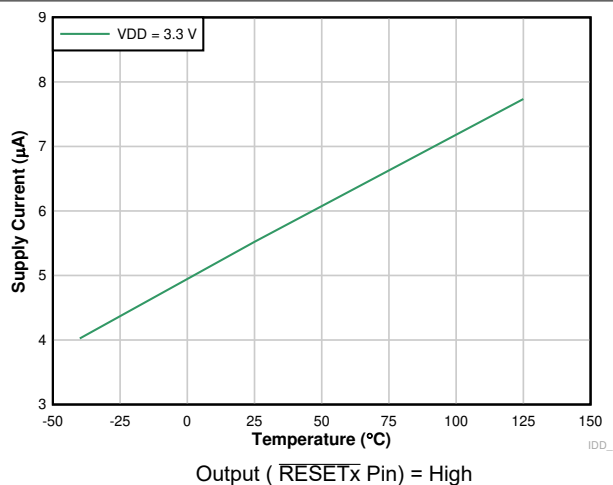


Figure 6-7. Supply Current vs Temperature

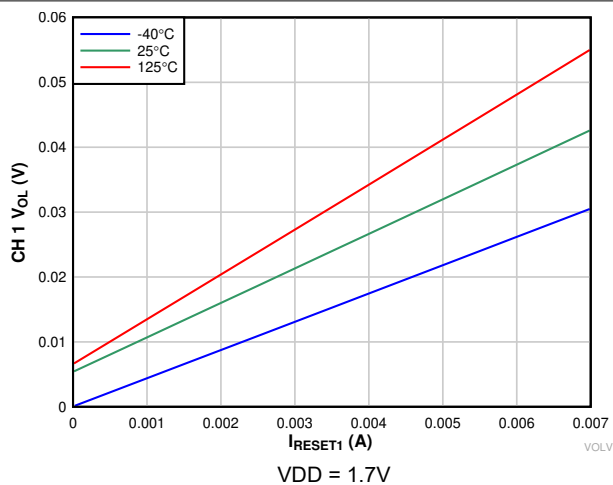


Figure 6-8. Low-Level CH 1 Output Voltage vs RESET1 Current

6.8 Typical Characteristics (continued)

Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are $T_A = 25^\circ\text{C}$, $V_{DD} = 3.3\text{V}$, and $R_{\text{pull-up}x} = 10\text{k}\Omega$, $C_{\text{LOAD}} = 50\text{pF}$, unless otherwise noted.

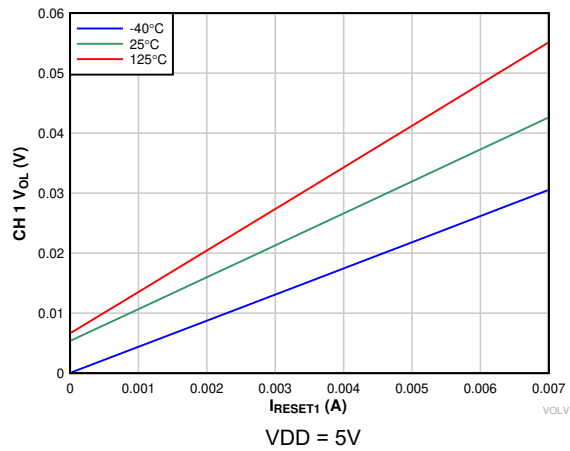


图 6-9. Low-Level CH 1 Output Voltage vs $\overline{\text{RESET1}}$ Current

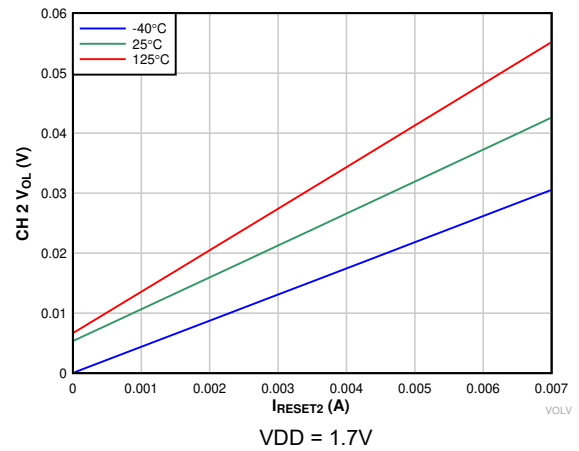


图 6-10. Low-Level CH 2 Output Voltage vs $\overline{\text{RESET2}}$ Current

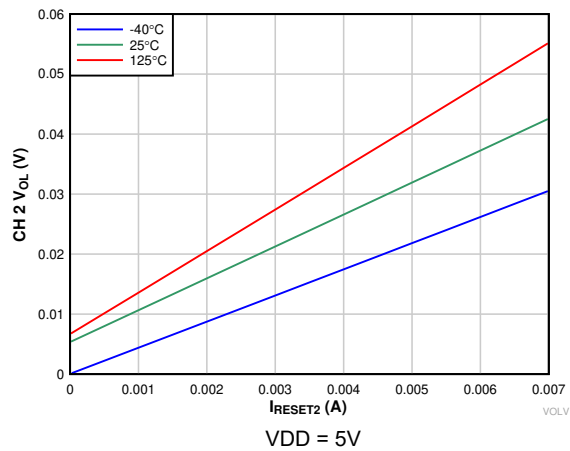


图 6-11. Low-Level CH 2 Output Voltage vs $\overline{\text{RESET2}}$ Current

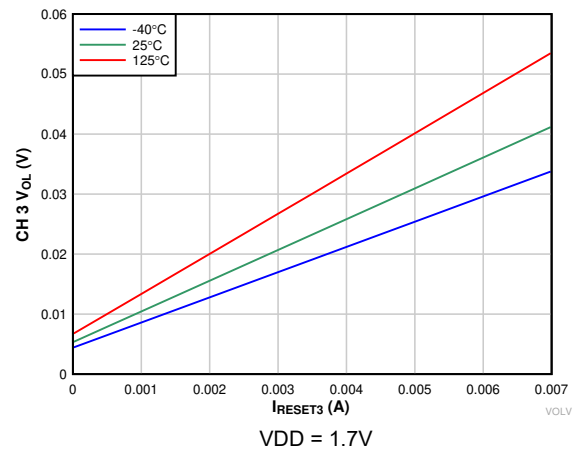


图 6-12. Low-Level CH 3 Output Voltage vs $\overline{\text{RESET3}}$ Current

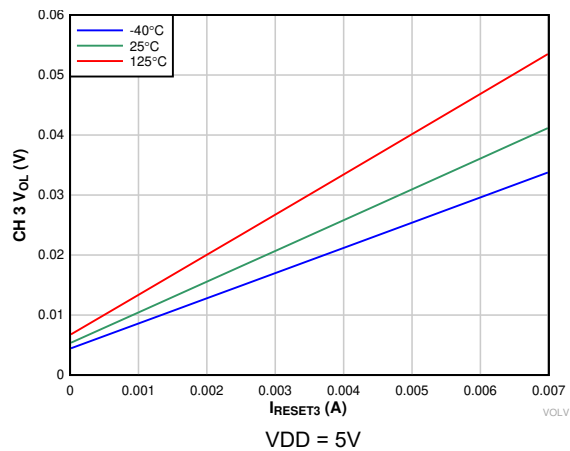


图 6-13. Low-Level CH 3 Output Voltage vs $\overline{\text{RESET3}}$ Current


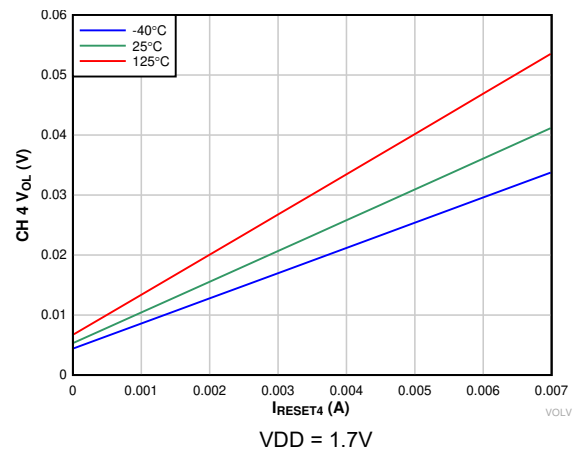



图 6-14. Low-Level CH 4 Output Voltage vs $\overline{\text{RESET4}}$ Current

6.8 Typical Characteristics (continued)


Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are $T_A = 25^\circ\text{C}$, $V_{DD} = 3.3\text{V}$, and $R_{\text{pull-up}x} = 10\text{k}\Omega$, $C_{\text{LOAD}} = 50\text{pF}$, unless otherwise noted.

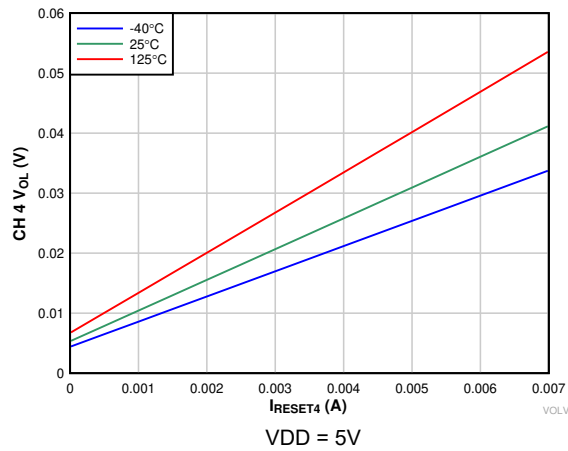


6-15. Low-Level CH 4 Output Voltage vs RESET4 Current

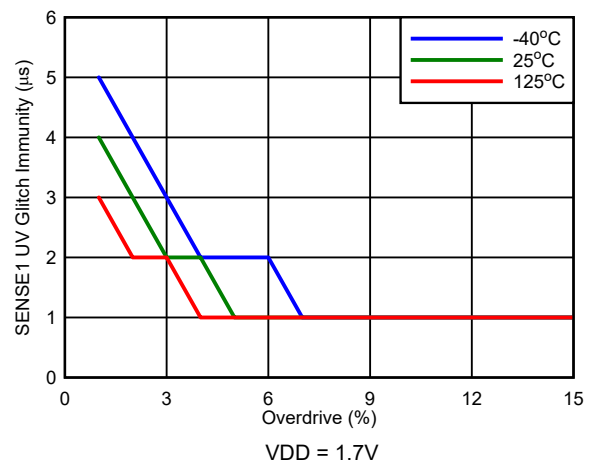


6-16. SENSE1 Glitch Immunity (V_{IT-}) vs Overdrive

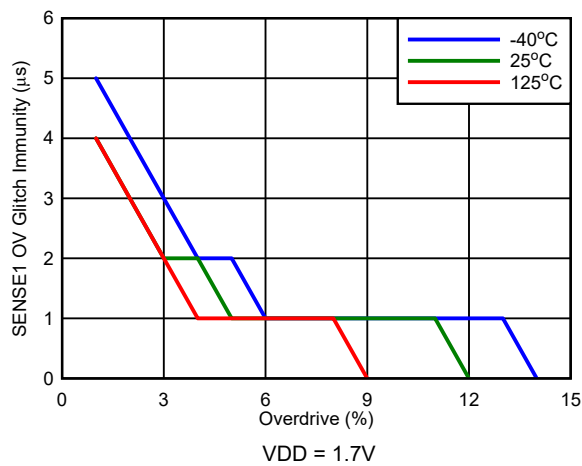


6-17. SENSE1 Glitch Immunity (V_{IT+}) vs Overdrive

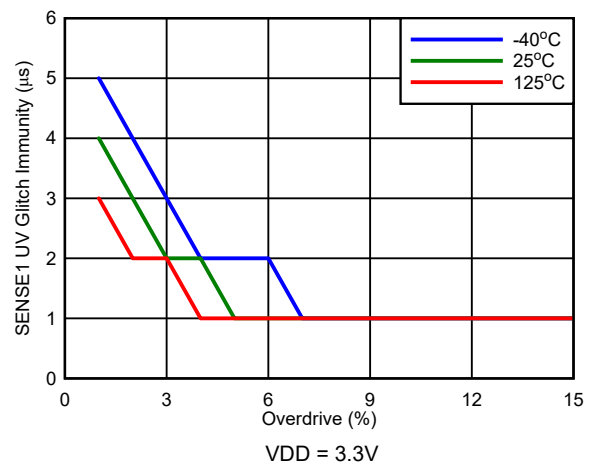

6-18. SENSE1 Glitch Immunity (V_{IT-}) vs Overdrive

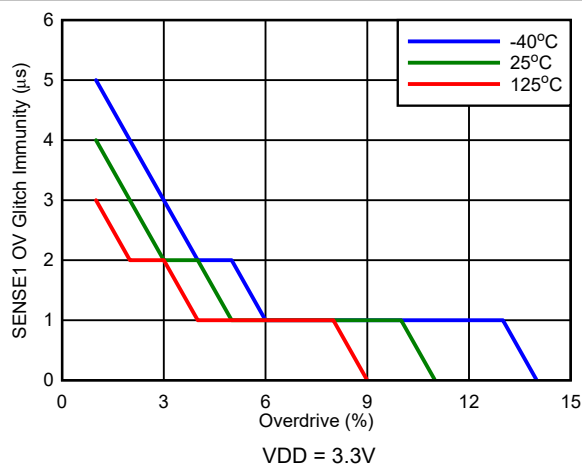

6-19. SENSE1 Glitch Immunity (V_{IT+}) vs Overdrive

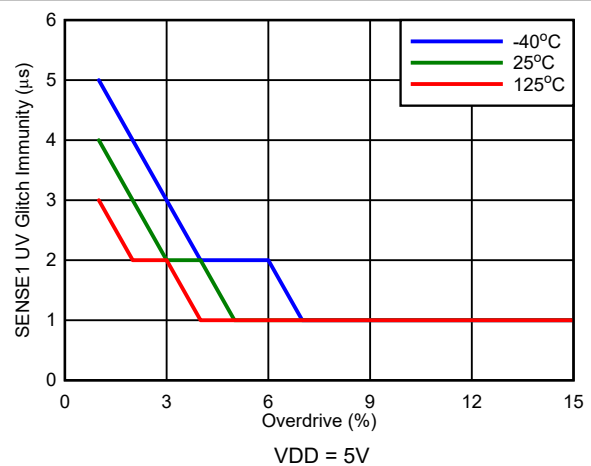

6-20. SENSE1 Glitch Immunity (V_{IT-}) vs Overdrive

6.8 Typical Characteristics (continued)

Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are $T_A = 25^\circ\text{C}$, $V_{DD} = 3.3\text{V}$, and $R_{\text{pull-upx}} = 10\text{k}\Omega$, $C_{\text{LOAD}} = 50\text{pF}$, unless otherwise noted.

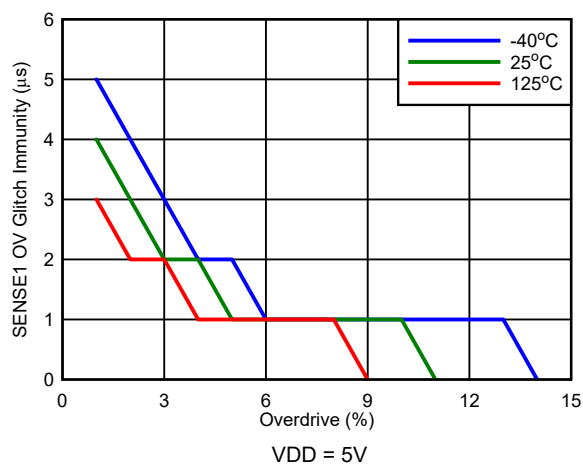


FIG 6-21. SENSE1 Glitch Immunity (V_{IT+}) vs Overdrive

7 Detailed Description

7.1 Overview

The TPS3704-Q1 (TPS37044-Q1, TPS37043-Q1, TPS37042-Q1, and TPS37041-Q1) is a family of quad, triple, dual, and single precision voltage supervisors where each channel has overvoltage and undervoltage detection capability. The TPS3704-Q1 features a highly accurate window threshold voltage where the upper and lower thresholds can be customized for symmetric or asymmetric tolerances. The reset signal for the TPS3704-Q1 is asserted, with a fault detection time delay ($t_{PD} = 10\mu s$ max), when the sense voltage is outside of the overvoltage and undervoltage thresholds.

The TPS3704-Q1 includes the resistors used to set the overvoltage and undervoltage thresholds internal to the device. These internal resistors allow for lower component counts and greatly simplifies the design because no additional margins are needed to account for the accuracy of external resistors. The level of integration in the TPS3704-Q1 enables a total small solution size for any application.

The TPS3704-Q1 is able to monitor any voltage rail with high resolution ($V_{IT} \leq 0.8V$: 20mV steps / $V_{IT} > 0.8V$: 0.5% or 20mV steps whichever is lower). Each channel in the TPS3704x-Q1 can be configured independently as a window, OV or UV supervisor. Also, the VIT threshold voltage for each channel can be asymmetric. For example, a channel that is configured as an overvoltage supervisor can be setup with a +5% tolerance whereas an undervoltage channel supervisor can be programmed with a -4% tolerance. If a window supervisor is configured, the voltage threshold tolerance can either be symmetrical or asymmetrical.

The TPS3704-Q1 device includes fixed reset time delay (t_D) options ranging from 20 μs to 1200ms and can monitor up to four channels while maintaining an ultra-low I_Q current of 15 μA (maximum).

7.2 Functional Block Diagrams


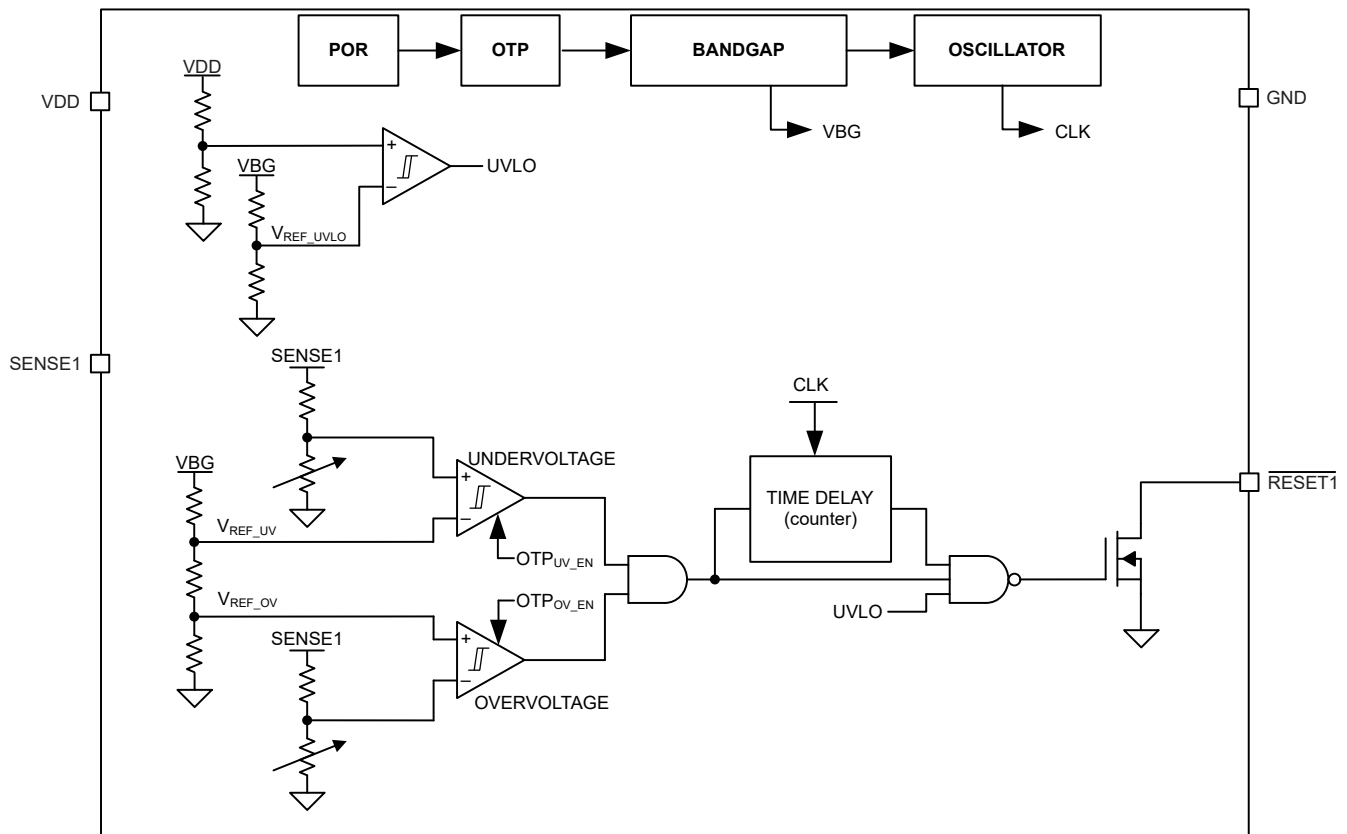


図 7-1. TPS37041-Q1 Single-Channel Functional Block Diagram

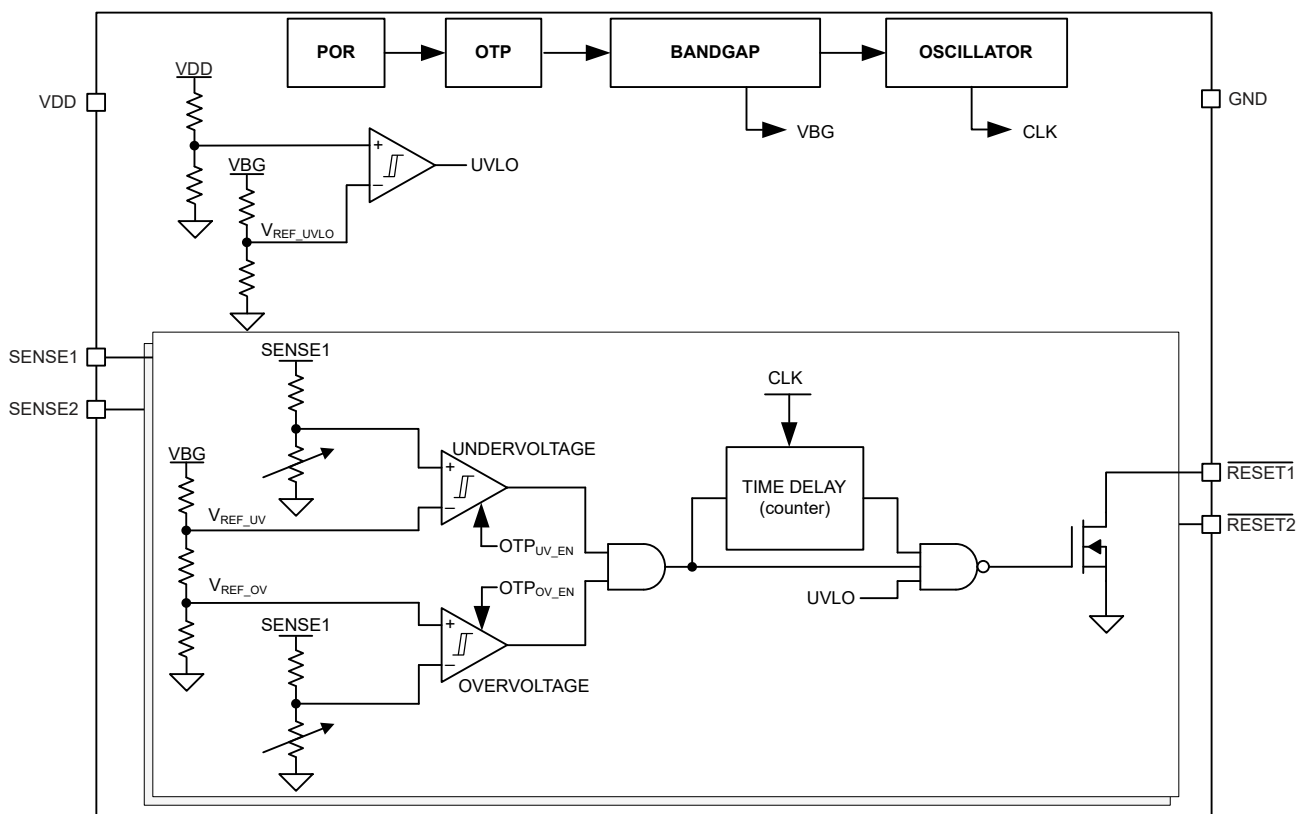

7-2. TPS37042-Q1 Dual-Channel Functional Block Diagram

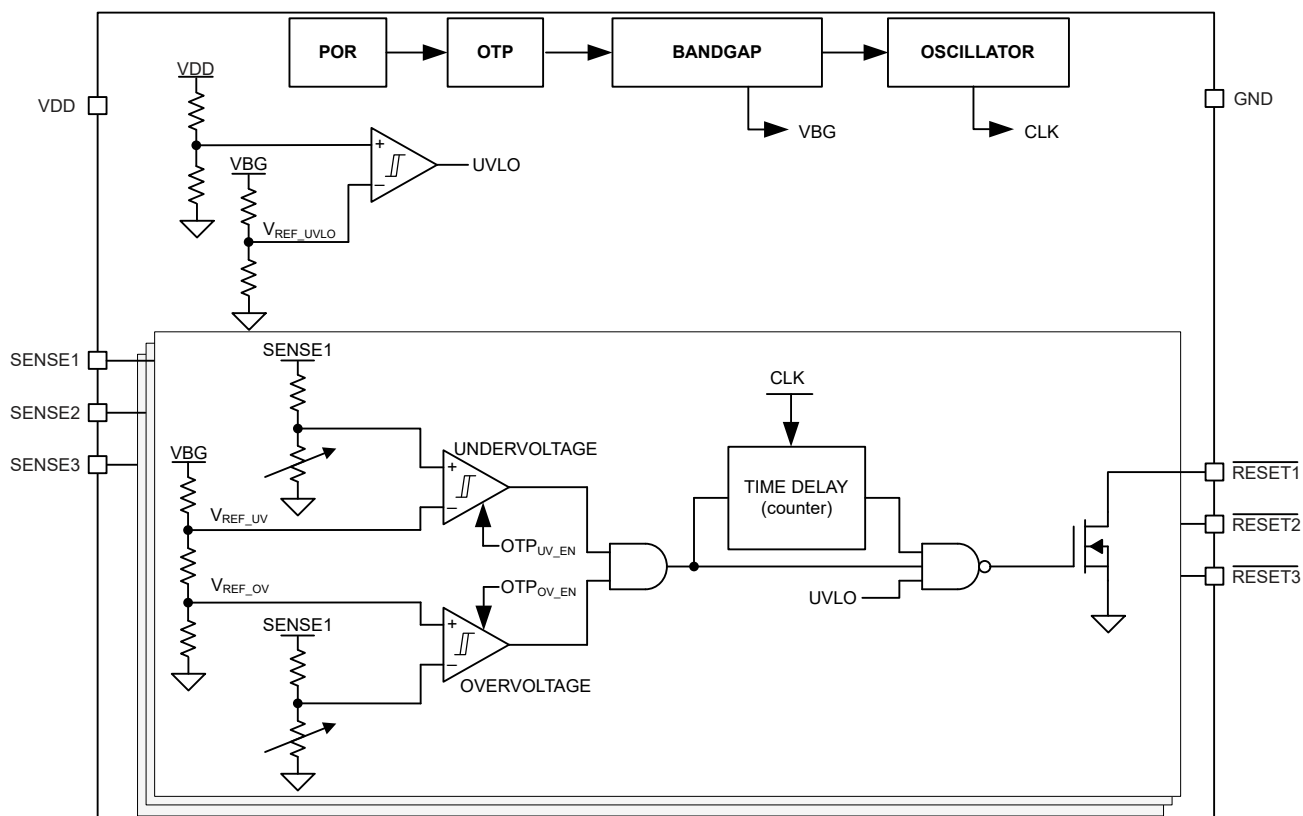


図 7-3. TPS37043-Q1 Triple-Channel Functional Block Diagram

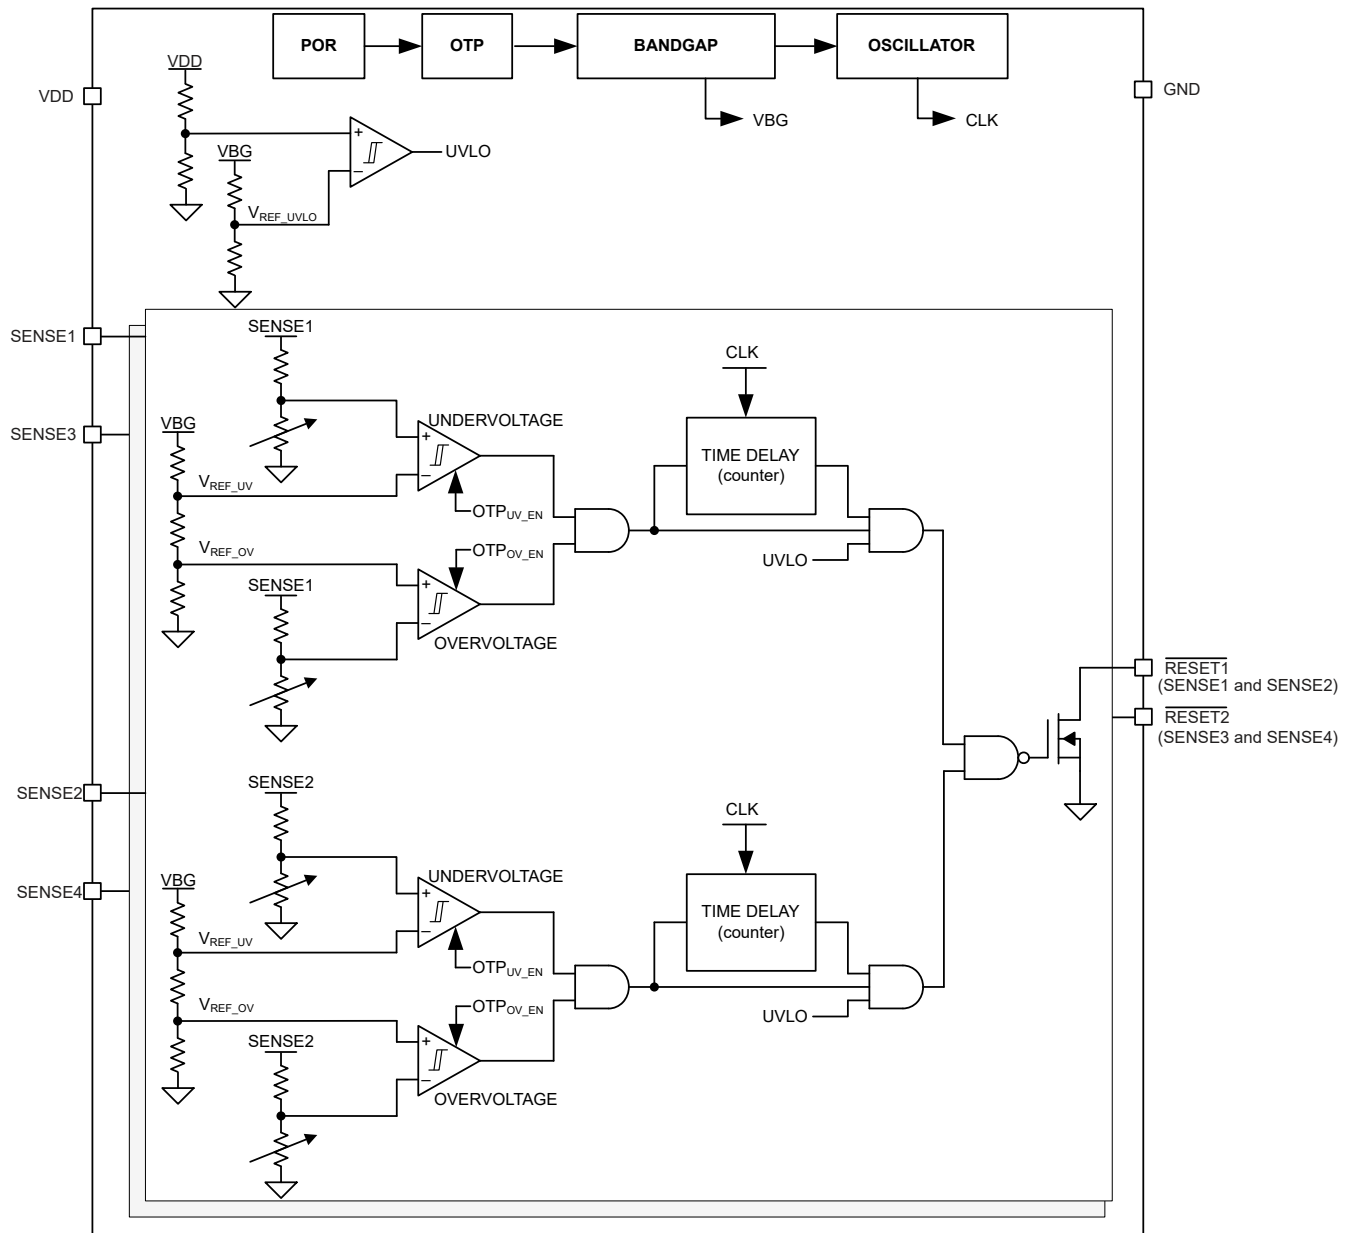


図 7-4. TPS37044-Q1 Quaduple-Channel Functional Block Diagram

*For available voltages, window tolerance, time delays, and UV/OV threshold options, see 表 9-2.

7.3 Feature Description

7.3.1 VDD

The TPS3704-Q1 is designed to operate from an input voltage supply range between 1.7V to 6V. The SENSE_x pins are monitored by the internal comparator. VDD also functions as the supply for the internal band gap, internal regulator, state machine, buffers, and other control blocks. The reset signal is at a known state when $V_{DD} > V_{POR}$. The undervoltage lockout forces the reset output to be asserted when VDD falls below the minimum VDD voltage.

The VDD capacitor is not required for this device; however, if the input supply is noisy, then good design practice is to place a 0.1μF to 1μF bypass capacitor between the VDD pin and the GND pin to make sure enough charge is available for the device to power up correctly. VDD must be at or above $V_{DD(MIN)}$ for start-up delay

($t_{\text{STRT}} + t_D$) to begin and for the device to be fully functional.

7.3.2 SENSEx Input

The SENSEx input can vary from 0V to 6V, regardless of the device supply voltage used. The SENSEx pins are used to monitor critical voltage rails or push-button inputs. If the voltage on this pin drops below $V_{\text{IT-(UV)}}$ or goes above $V_{\text{IT+(OV)}}$, then $\overline{\text{RESETx}}/\text{RESETx}$ is asserted. When the voltage on the SENSEx pin rises above the positive threshold voltage $V_{\text{IT-(UV)}} + V_{\text{HYS}}$ or goes below the negative threshold voltage $V_{\text{IT+(OV)}} - V_{\text{HYS}}$,

$\overline{\text{RESETx}}/\text{RESETx}$ deasserts after the set $\overline{\text{RESETx}}/\text{RESETx}$ delay time. The internal comparators have built-in hysteresis to make sure well-defined $\overline{\text{RESETx}}/\text{RESETx}$ assertions and deassertions even when there are small changes on the voltage rail being monitored.

The TPS3704-Q1 combines comparators with a precision reference voltage and a trimmed resistor divider. This configuration optimizes device accuracy because all resistor tolerances are accounted for in the accuracy and performance specifications. The TPS3704-Q1 is relatively immune to short transients on the SENSEx pin. Although not required in most cases, for noisy applications, good analog design practice is to place a 10nF to 100nF bypass capacitor at the SENSEx inputs to reduce sensitivity to transient voltages on the monitored signals.

7.3.2.1 Immunity to SENSEx Pins Voltage Transients

The TPS3704-Q1 is immune to short voltage transient spikes on the input SENSEx pins. Sensitivity to transients depends on both transient duration and overdrive (amplitude) of the transient.

Overdrive is defined by how much V_{SENSEx} exceeds the specified threshold, and is important to know because the smaller the overdrive, the slower the response of the $\overline{\text{RESETx}}/\text{RESETx}$ outputs. Threshold overdrive is calculated as a percent of the threshold in question, as shown in 式 1:

$$\text{Overdrive \%} = | (V_{\text{SENSEx}} - (V_{\text{IT-(UV)}} \text{ or } V_{\text{IT+(OV)}})) / V_{\text{IT (Nominal)}} \times 100\% | \quad (1)$$

where:

- V_{SENSEx} is the voltage at the SENSEx pin
- $V_{\text{IT (Nominal)}}$ is the nominal threshold voltage
- $V_{\text{IT-(UV)}}$ and $V_{\text{IT+(OV)}}$ represent the actual undervoltage or overvoltage tripping voltage

7.3.2.1.1 SENSEx Hysteresis

Overvoltage and undervoltage comparators include built-in hysteresis that provides noise immunity and ensures stable operation. For example, if the voltage on the SENSEx pin falls below $V_{\text{IT-(UV)}}$ or above $V_{\text{IT+(OV)}}$, then $\overline{\text{RESETx}}/\text{RESETx}$ is asserted. When the voltage on the SENSEx pin is between the positive and negative threshold voltages, $\overline{\text{RESETx}}/\text{RESETx}$ deasserts after the set $\overline{\text{RESETx}}/\text{RESETx}$ delay time. 図 7-5 shows the relation between $V_{\text{IT-(UV)}}$, $V_{\text{IT+(OV)}}$ and the hysteresis voltage (V_{HYS}).

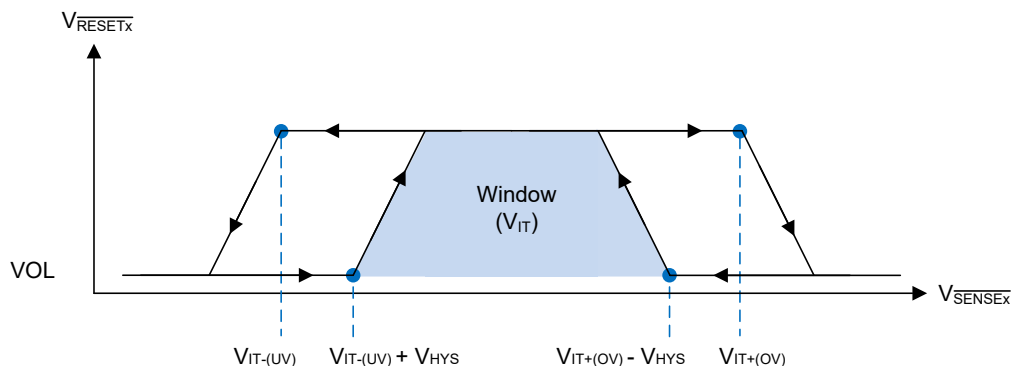


図 7-5. SENSEx Pin Hysteresis

7.3.3 $\overline{\text{RESETx}}/\text{RESETx}$

In a typical TPS3704-Q1 application, the $\overline{\text{RESETx}}/\text{RESETx}$ output is connected to a reset or enable input of a processor [such as a digital signal processor (DSP), application-specific integrated circuit (ASIC), or other processor type] or the enable input of a voltage regulator [such as a DC/DC converter or low-dropout regulator (LDO)].

The TPS3704-Q1 has open-drain active low outputs that require an external pullup resistor to hold these lines high to the required voltage logic. Connect the external pullup resistor to the proper voltage rail to enable the output to be connected to other devices at the correct interface voltage levels. To ensure proper voltage levels, give some consideration when choosing the external pullup resistor values. The external pull-up resistor value is determined by V_{OL} , output capacitive loading, and output leakage current. These values are specified in [セクション 6.5](#). The open-drain output can be connected as a wired-OR logic with other $\overline{\text{RESETx}}/\text{RESETx}$ open-drain pins.

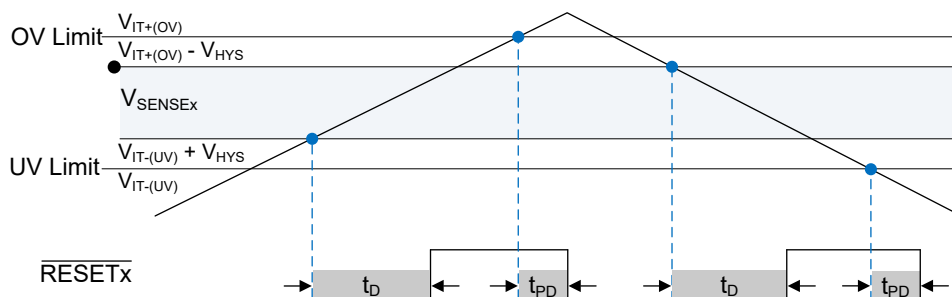


図 7-6. $\overline{\text{RESETx}}$ Output

7.4 Device Functional Modes

表 7-1. Functional Mode Truth Table

DESCRIPTION	CONDITION	VDD PIN	OUTPUT $\overline{\text{RESETx}}$ / (RESETx) PIN
Normal operation	$V_{IT-(UV)} < \text{SENSEx} < V_{IT+(OV)}$	$V_{DD} > V_{DD(MIN)}$	High / (Low)
Normal operation (UV only)	$\text{SENSEx} > V_{IT-(UV)}$	$V_{DD} > V_{DD(MIN)}$	High / (Low)
Overvoltage detection	$\text{SENSEx} > V_{IT+(OV)}$	$V_{DD} > V_{DD(MIN)}$	Low / (High)
Undervoltage detection	$\text{SENSEx} < V_{IT-(UV)}$	$V_{DD} > V_{DD(MIN)}$	Low / (High)
UVLO engaged	$V_{IT-(UV)} < \text{SENSEx} < V_{IT+(OV)}$	$V_{POR} < V_{DD} < \text{UVLO}$	Low / (High)

7.4.1 Normal Operation ($V_{DD} > V_{DD(MIN)}$)

When the voltage on V_{DD} is greater than $V_{DD(MIN)}$ for approximately $(t_{STRT} + t_D)$, the $\overline{\text{RESETx}}/\text{RESETx}$ output state corresponds to the SENSEx pin voltage with respect to the threshold limits. When SENSEx voltage is outside of threshold limits the $\overline{\text{RESETx}}/\text{RESETx}$ voltage is asserted.

7.4.2 Undervoltage Lockout ($V_{POR} < V_{DD} < \text{UVLO}$)

When the voltage on V_{DD} is less than the device UVLO voltage but greater than the power-on-reset voltage (V_{POR}), the $\overline{\text{RESETx}}/\text{RESETx}$ pin is asserted, regardless of the voltage on the SENSEx pin.

7.4.3 Power-On Reset ($V_{DD} < V_{POR}$)

When the voltage on V_{DD} is lower than the required voltage (V_{POR}) to internally pull the asserted output to GND, the $\overline{\text{RESETx}}/\text{RESETx}$ signal is undefined and is not to be relied upon for proper device function.

8 Application and Implementation

注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

8.1 Application Information

8.1.1 Voltage Threshold Accuracy

Voltage monitoring requirements vary depending on the voltage supply tolerance of the device being powered. Because of the high precision of the TPS3704-Q1 ($\pm 1\%$ max), the device allows for wider supply voltage margins and threshold headroom for tight tolerance applications.

For example, take a DC/DC regulator providing power to a core voltage rail of a microcontroller (MCU). The MCU has a tolerance of $\pm 5\%$ of the nominal output voltage of the DC/DC. The user sets an ideal voltage threshold of $\pm 4\%$, which allows for $\pm 1\%$ of threshold accuracy. Because the TPS3704-Q1 threshold accuracy is $\pm 1\%$, the user has more supply voltage margin, which can allow for a relaxed power supply design. This design gives flexibility to the DC/DC to use a smaller output capacitor or inductor because of a larger voltage window for voltage ripple and transients. There is also headroom between the minimum system voltage and voltage tolerance of the MCU to make sure that the voltage supply is never in the region of potential failure of malfunction without the TPS3704-Q1 asserting a reset signal.

図 8-1 shows the supply undervoltage margin and accuracy of the TPS3704-Q1 for the example explained in this section. Using a low accuracy supervisor cuts into the available budget for the power-supply ripple and transient response. This gives less flexibility to the user and a more stringent DC/DC converter design.

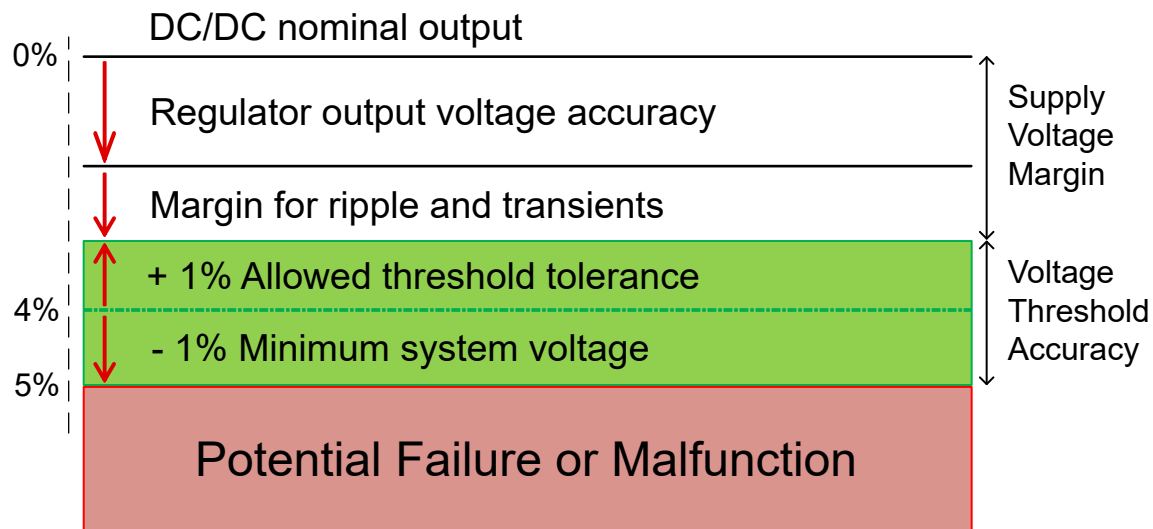


図 8-1. TPS3704-Q1 Voltage Threshold Accuracy

8.1.2 Adjustable Voltage Thresholds

The TPS3704-Q1 maximum accuracy (1%) allows for adjustable voltage thresholds using external resistors without adding major inaccuracies to the device. In case the desired monitored voltage is not available, external resistor dividers can be used to set the desired voltage thresholds. [図 8-2](#) illustrates an example of how to adjust the voltage threshold with external resistor dividers. For assistance in calculating the external resistors access the [TPS3704 adjustable threshold voltage resistor calculator](#) in the Design Tools and Simulation section of the TPS3704 product page. The resistors can be calculated depending on the desired voltage threshold and device part number. TI recommends using a voltage threshold device variant because of the bypass mode of the internal resistor ladder.

For example, consider a 2.0V rail being monitored (V_{MON}) using the TPS37042BJOFDDFRQ1 variant. Using [式 2](#), $R_1 = 15k\Omega$ given that $R_2 = 10k\Omega$, $V_{MON} = 2V$, and $V_{SENSE1} = 0.8V$. This device is typically meant to monitor a 0.8V rail with $\pm 4\%$ voltage thresholds. This means that the device undervoltage threshold ($V_{IT-(UV)}$) and overvoltage threshold ($V_{IT+(OV)}$) is 0.768V and 0.832V, respectively. Using [式 2](#), $V_{MON} = 1.92V$ when $V_{SENSE1} = V_{IT-(UV)}$. This can be denoted as V_{MON-} , the monitored undervoltage threshold where the device asserts a reset signal. Using [式 2](#) again, the monitored overvoltage threshold (V_{MON+}) = 2.08V when $V_{SENSE1} = V_{IT+(OV)}$. If a wider tolerance or UV only threshold is desired, use a device variant listed in [表 9-2](#) to determine which device part number matches which application.

$$V_{SENSE1} = V_{MON} \times (R_2 / (R_1 + R_2)) \quad (2)$$

There are inaccuracies that must be taken into consideration when adjusting voltage thresholds. Aside from the tolerance of the resistor divider, there is an internal resistance of the SENSE1 pin that can affect the accuracy of the resistor divider. Although expected to be very high impedance, users are recommended to calculate the values for design specifications. The internal sense resistance R_{SENSE1} can be calculated by the sense voltage V_{SENSE1} divided by the sense current I_{SENSE1} as shown in [式 4](#). V_{SENSE1} can be calculated using [式 2](#) depending on the resistor divider and monitored voltage. I_{SENSE1} can be calculated using [式 3](#).

$$I_{SENSE1} = [(V_{MON} - V_{SENSE1}) / R_1] - (V_{SENSE1} / R_2) \quad (3)$$

$$R_{SENSE1} = V_{SENSE1} / I_{SENSE1} \quad (4)$$

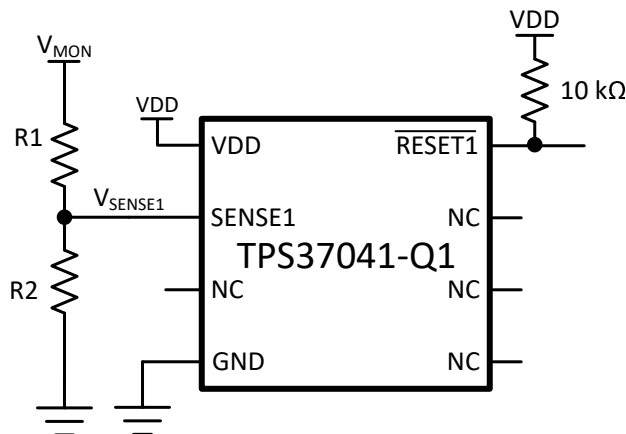


図 8-2. Adjustable Voltage Threshold With External Resistor Dividers

8.2 Typical Applications

8.2.1 Design 1: Multi-Rail Window Monitoring for Microcontroller Power Rails

図 8-3 show a typical application for the TPS37042-Q1. The TPS37042-Q1 is used to monitor two PMIC (Power Management IC) voltage rails that power the core and I/O voltage of the microcontroller that requires accurate reset delay and voltage supervision. The PMIC leverages the TPS37042-Q1 to monitor the core voltage rail of a MCU similar to the circuit below.

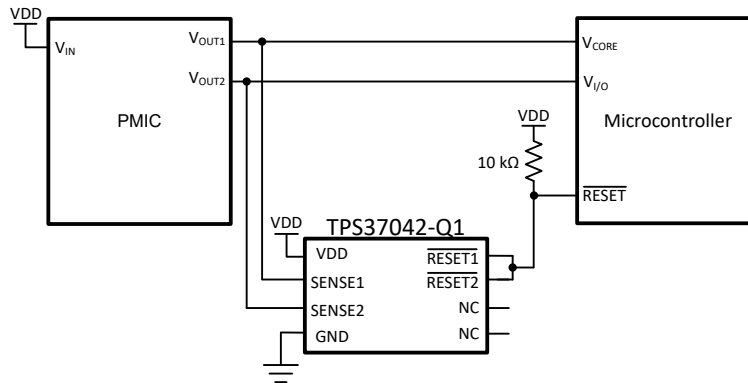


図 8-3. TPS37042-Q1 Dual-Channel Monitoring Two Microcontroller Power Rails

8.2.1.1 Design Requirements

表 8-1. Design Requirements

PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Monitored rails	3.3V _{I/O} nominal, with alerts if outside of ±8% of 3.3V (including device accuracy), 10ms reset delay	Worst case V _{IT+(OV)} = 3.533V (7.06%) Worst case V _{IT-(UV)} = 3.071V (–6.94%)
	1.2V _{CORE} nominal, with alerts if outside of ±5% of 1.2V (including device accuracy), 10ms reset delay	Worst case V _{IT+(OV)} = 1.2484V (4.03%) Worst case V _{IT-(UV)} = 1.1524V (–3.97%)
Output logic voltage	5V CMOS	5V CMOS
Maximum system supervision current consumption	25μA	5.5μA (20μA max)

8.2.1.2 Detailed Design Procedure

Determine which version of the TPS3704-Q1 best fits the monitored rail (V_{MON}) and window tolerances found on 表 9-2. The TPS3704-Q1 allows overvoltage and undervoltage monitoring for precise voltage supervision of common rails between 0.4V and 5.5V. This application calls for very tight monitoring of the rail with only ±5% of variation allowed on the 1.2V_{CORE} rail. To make sure this requirement is met, the TPS37042-Q1 was chosen for its ±3% thresholds. The 3.3V_{I/O} is more flexible and can operate up to 8% variance. Because the TPS3704-Q1 comes in various tolerance options, the ±6% thresholds can be chosen for this voltage rail. To calculate the worst case for V_{IT+(OV)} and V_{IT-(UV)}, the accuracy must also be taken into account. The worst-case for V_{IT+(OV)} and V_{IT-(UV)} can be calculated shown in 式 5 and 式 6 respectively:

$$V_{IT+(OV-Worst\ Case)} = V_{MON} \times (1 + \%Threshold) \times (1 + \%Accuracy) = 1.2 \times (1.03) \times (1.01) = 1.2484V \quad (5)$$

$$V_{IT-(UV-Worst\ Case)} = V_{MON} \times (1 - \%Threshold) \times (1 - \%Accuracy) = 1.2 \times (0.97) \times (0.99) = 1.1524V \quad (6)$$

Hysteresis must also be taken into account when determining the OV and UV thresholds such that the release point after the fault is higher than the power-supply tolerance limits. See 図 6-1 for more details.

When the outputs switch to a high impedance state, the rise time of the RESETx/RESETx pin depends on the pullup resistance and the capacitance on that node. Choose pullup resistors that satisfy both the downstream

timing requirements and the sink current required to have a V_{OL} low enough for the application; 10kΩ to 1MΩ resistors are a good choice for low-capacitive loads.

8.2.2 Design 2: Manual Self-Test Option for Enhanced Functional Safety Use Cases

Figure 8-4 displays a self-test scheme where a manual self-test function can be implemented. Any SENSEx pin can be reserved and used to trigger a fault to be observed at the output, thus pre-checking the TPS3704-Q1 for fault detection. Because the TPS3704-Q1 is functional safety compliant, it helps elevate applications like the automotive ADAS camera achieve ISO 26262 requirements and automotive safety integrity levels. This example uses a TPS37044F-Q1, configured for separate undervoltage and overvoltage (UV/OV) outputs where the SENSE4 thresholds are set at 5.5V for OV and 2V for UV.

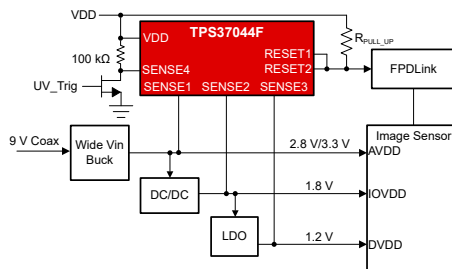


Figure 8-4. TPS37044F-Q1 Quad-Channel Monitoring With Manual Self-Test Option for Functional Safety

8.2.2.1 Design Requirements

Table 8-2. Design Requirements

PARAMETER	DESIGN REQUIREMENT	DESIGN RESULT
Monitored rails	3.3V AVDD nominal, with alerts if outside of $\pm 4\%$ of 3.3V (including device accuracy), 10ms reset delay	Worst case $V_{IT+(OV)} = 3.432V (+4\%)$ Worst case $V_{IT-(UV)} = 3.168V (-4\%)$
	1.8V IOVDD nominal, with alerts if outside of $\pm 4\%$ of 1.8V (including device accuracy), 10ms reset delay	Worst case $V_{IT+(OV)} = 1.872V (+4\%)$ Worst case $V_{IT-(UV)} = 1.728V (-4\%)$
	1.2V DVDD nominal, with alerts if outside of $\pm 4\%$ of 1.2V (including device accuracy), 10ms reset delay	Worst case $V_{IT+(OV)} = 1.248V (+4\%)$ Worst case $V_{IT-(UV)} = 1.152V (-4\%)$
SENSE4 (Self-test Option)	100kΩ pullup resistor to VDD with NFET pulldown transistor to GND	UV_Trigger = High - causing SENSE4 pin going low UV_Trigger = Low - in normal operation
Output logic voltage	5V CMOS	5V CMOS
Max system IDD current	25μA	5.5μA (20μA maximum)


8.2.2.2 Detailed Design Procedure

Figure 8-4 shows a self-test scheme where a manual self-test function can be implemented. SENSE4 has an overvoltage (OV) threshold that is set at 5.5V and the undervoltage (UV) threshold set at 2V. SENSE4 can be connected via a 100kΩ resistor to VDD. The self-test setup gives the added benefit of a built-in overvoltage detector for the rail powering the TPS37044F-Q1. From a functional safety perspective, a voltage supervisor cannot be considered reliable if the supervisor is operating outside its recommended operated limits.

To trigger a manual self-test, pull UV_Trigger high to cause SENSE4 to be logic low, therefore triggering an undervoltage (UV) fault. The UV fault appears at RESET2 as an asserted low signal. By tying both reset outputs to an NMI or interrupt input of the processor, this self-test option scheme serves as a purpose to make sure that RESET2, of the TPS37044F-Q1 is operating properly. For more information on functional safety, see the [Functional Safety Manual](#).


8.2.3 Application Curves

These application curves were taken with the TPS37044A7OHDDFRQ1 device on the TPS3704Q1EVM. Please see the [TPS3704Q1EVM User Guide](#) for more information.

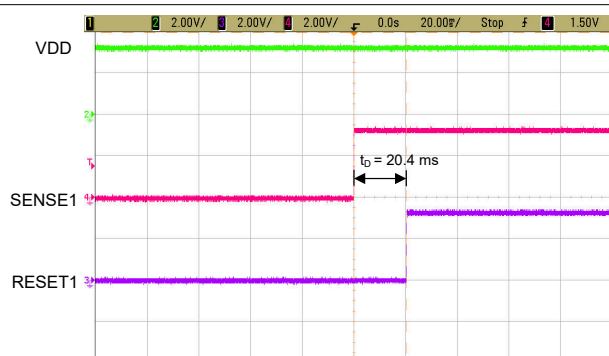


V_{SENSE1} start up 0V to 3.3V, V_{DD} = 3.3V, V_{RESET1} = 3.3V,
TPS37044A7OHDDFRQ1

8-5. TPS37044-Q1 SENSE1 Start-Up Function

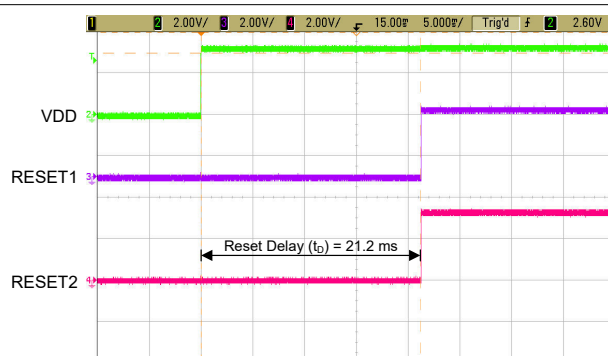


V_{DD} start up 0V to 3.3V, V_{SENSE1} = 3.3V, V_{SENSE2} = 1.8V,
V_{SENSE3_4} = 1.15V, V_{RESET1_2} = 3.3V,
TPS37044A7OHDDFRQ1

8-6. TPS37044-Q1 VDD Start-Up Function

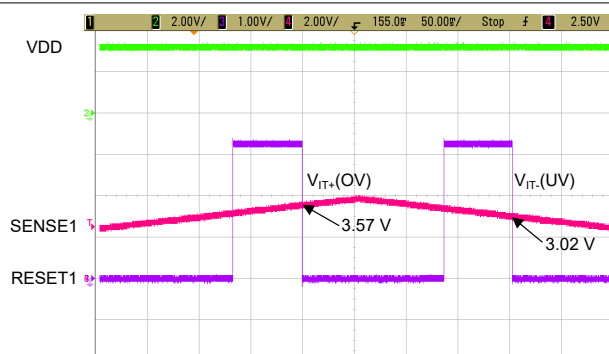


V_{SENSE1} ramp 0V to 3.75V, OV/UV Threshold = 3.3V (±8%),
V_{SENSE2} = 1.8V, V_{DD} = 3.3V, V_{RESET1} = 3.3V,
TPS37044A7OHDDFRQ1

8-7. TPS37044-Q1 Overvoltage and Undervoltage Function

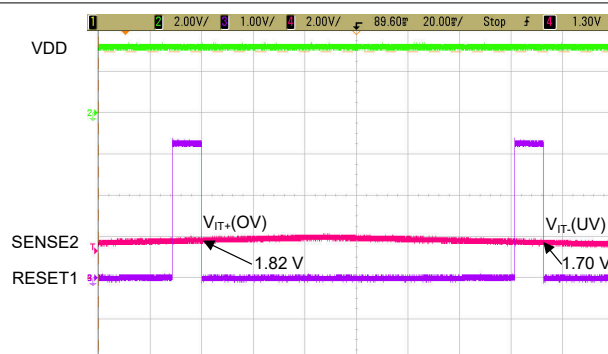


V_{SENSE2} ramp 0V to 2V, OV/UV Threshold = 1.8V
(+4%, -3.5%), V_{SENSE1} = 3.3V, V_{DD} = 3.3V,
V_{RESET1} = 3.3V, TPS37044A7OHDDFRQ1

8-8. TPS37044-Q1 Overvoltage and Undervoltage Function

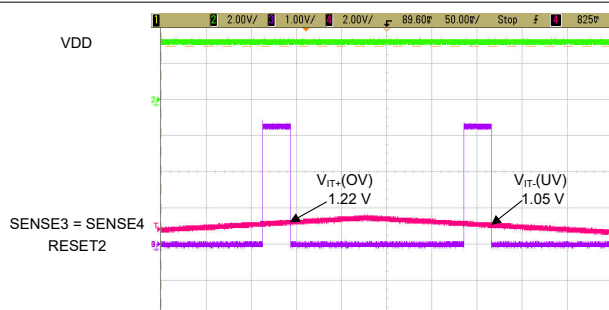


V_{SENSE3_4} ramp 0V to 1.5V, OV/UV Threshold = 1.15V
(+7.5%, -5.5%), V_{DD} = 3.3V, V_{RESET2} = 3.3V,
TPS37044A7OHDDFRQ1

8-9. TPS37044-Q1 Overvoltage and Undervoltage Function

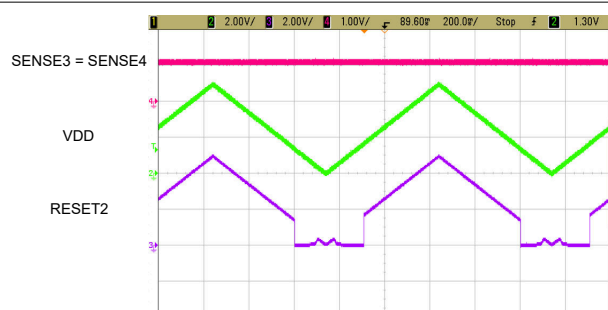


V_{DD} ramp 0V to 5V, V_{SENSE3_4} = 1.2V, V_{RESET2} = 3.3V,
TPS37044A7OHDDFRQ1

8-10. TPS37044-Q1 VDD Ramp-Up Function

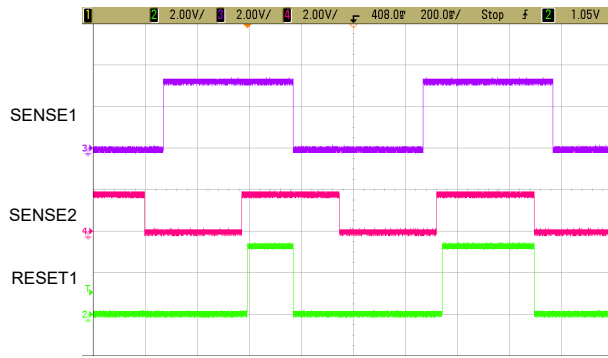


V_{SENSE1} toggling 0V to 3.3V [OV/UV Threshold = 3.3V ($\pm 8\%$)],
 V_{SENSE2} toggling from 0V to 1.8V [OV/UV
 Threshold = 1.8V (+4%, -3.5%)], $V_{DD} = 3.3V$,
 $V_{RESET1} = 3.3V$, TPS37044A7OHDDFRQ1

**図 8-11. TPS37044-Q1 SENSE 1 and
SENSE 2 Toggling**

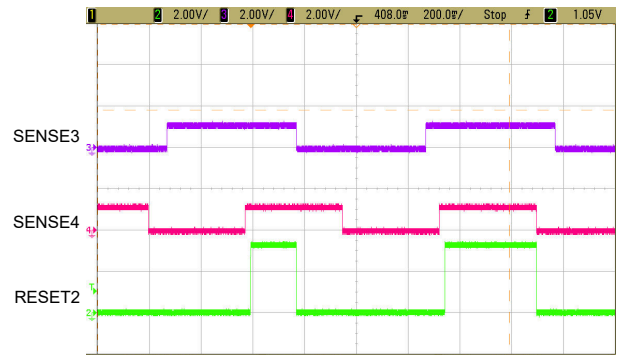


V_{SENSE3} toggling 0V to 1.15V [OV/UV Threshold = 1.15V
 (+7.5%, -5.5%)], V_{SENSE4} toggling from 0V to 1.15V
 [OV/UV Threshold = 1.15V (+7.5%, -5.5%)], $V_{DD} = 3.3V$,
 $V_{RESET1} = 3.3V$, TPS37044A7OHDDFRQ1

**図 8-12. TPS37044-Q1 SENSE 3 and
SENSE 4 Toggling**

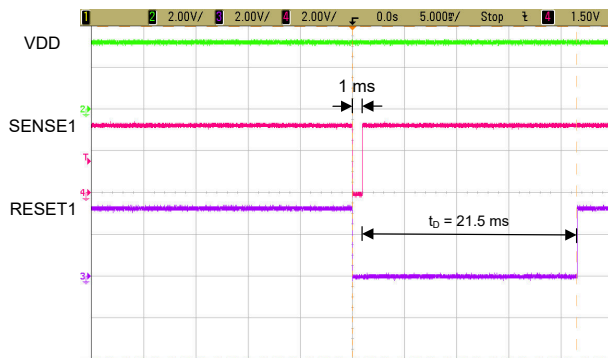

$V_{SENSE1} = 3.3V$, $V_{SENSE1} = 0V$ via push-button for 1ms,
 $V_{DD} = 3.3V$, $V_{RESET1} = 3.3V$, TPS37044A7OHDDFRQ1

**図 8-13. TPS37044-Q1 SENSE1 Push-Button
Monitoring Function With Reset Time Delay**

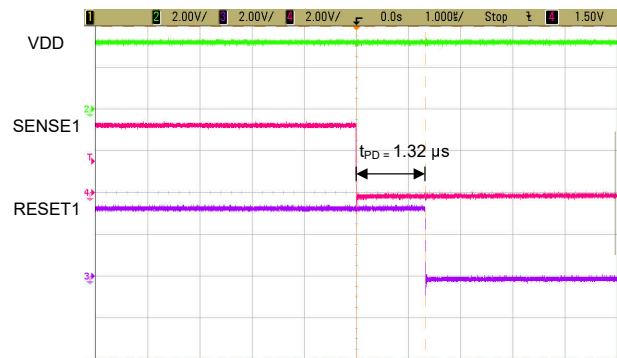

V_{SENSE1} toggling from 3.3V to 0V, $V_{DD} = 3.3V$, V_{RESET1}
 toggling from 3.3V to 0V, TPS37044A7OHDDFRQ1

**図 8-14. TPS37044-Q1 SENSE1
Propagation Delay Function**

8.3 Power Supply Recommendations

8.3.1 Power Supply Guidelines

This device is designed to operate from an input supply with a voltage range between 1.7V to 5.5V. This device has a 6V absolute maximum rating on the VDD pin. Good analog practice is to place a 0.1μF to 1μF capacitor between the VDD pin and the GND pin depending on the input voltage supply noise. If the voltage supply providing power to VDD is susceptible to any large voltage transients that exceed maximum specifications, additional precautions must be taken. See [SNVA849](#) for more information.


8.4 Layout

8.4.1 Layout Guidelines

- Place the external components as close to the device as possible. This configuration prevents parasitic errors from occurring.
- Avoid using long traces for the VDD supply node. The VDD capacitor, along with parasitic inductance from the supply to the capacitor, can form an LC circuit and create ringing with peak voltages above the maximum VDD voltage.

- Avoid using long voltage traces to the sense pin. Long traces increase parasitic inductance and cause inaccurate monitoring and diagnostics.
- If SENSEx capacitors (C_{SENSEx}) are used, place capacitors as close as possible to the SENSEx pins to further improve noise immunity on the SENSEx pins. Placing a 10nF to 100nF capacitors between the SENSEx pins and GND can reduce the sensitivity to transient voltages on the monitored signal.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when absolutely necessary.

8.4.2 Layout Example

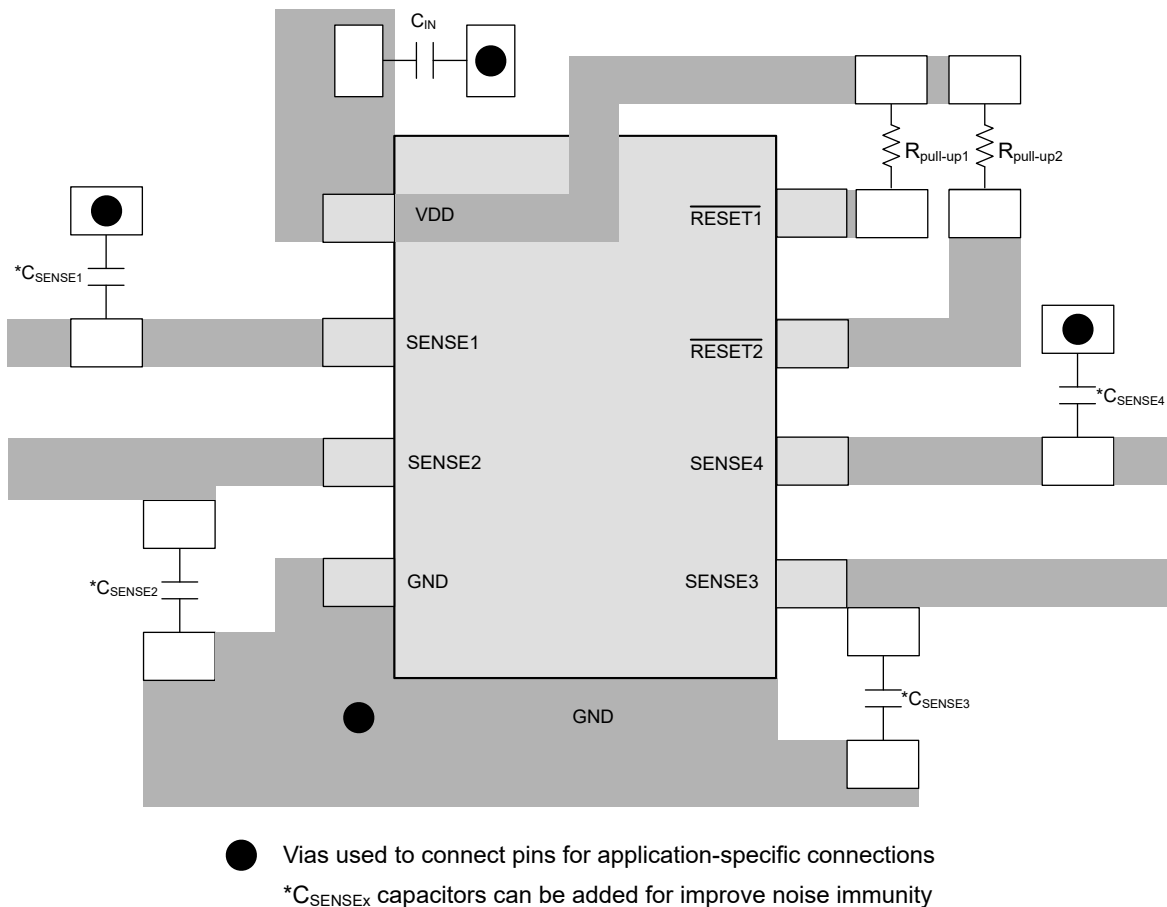

8-15. Recommended Layout

9 Device and Documentation Support

9.1 Device Nomenclature

図 4-1 in セクション 4 and 表 9-1 describe how to decode the function of the device based on its part number listed in 表 9-2.

表 9-1. Device Naming Convention

DESCRIPTION	NOMENCLATURE	VALUE
Generic part number	TPS3704x-Q1	TPS3704x-Q1
Channel options	1	One-channel option
	2	Dual-channel option
	3	Triple-channel option
	4	Quad-channel option
Detection options	Ax, Bx, Cx,...	See 表 9-2
Variant code (output topology)	O	Open-drain, active-low
	L	Push-pull, active-low
	H	Push-pull, active-high
Reset time delay option	A	20μs reset time delay
	B	1ms reset time delay
	C	2ms reset time delay
	D	3ms reset time delay
	E	5ms reset time delay
	F	10ms reset time delay
	G	15ms reset time delay
	H	20ms reset time delay
	I	25ms reset time delay
	J	35ms reset time delay
	K	40ms reset time delay
	L	50ms reset time delay
	M	70ms reset time delay
	N	100ms reset time delay
	O	140ms reset time delay
	P	150ms reset time delay
	R	200ms reset time delay
	S	280ms reset time delay
	T	400ms reset time delay
	U	560ms reset time delay
	V	800ms reset time delay
	W	1120ms reset time delay
	X	1200ms reset time delay
Package	DDF	SOT-23 8-pin (1.6mm × 2.9mm)
Reel	R	Large reel
Automotive version	Q1	Q100 AEC

表 9-2. Device Threshold Table

ORDERABLE PART NAME	VARIANT ⁽³⁾	OUTPUT TYPE ⁽⁴⁾	NUM OF CHAN.	RESET TIME	SENSE1 ^{(1) (2)}	SENSE2 ^{(1) (2)}	SENSE3 ^{(1) (2)}	SENSE4 ^{(1) (2)}
TPS37041BPLEDDFRQ1	Fixed	L	1	5ms	0.9V (±7%)	-	-	-

表 9-2. Device Threshold Table (続き)

ORDERABLE PART NAME	VARIANT ⁽³⁾	OUTPUT TYPE ⁽⁴⁾	NUM OF CHAN.	RESET TIME	SENSE1 ^{(1) (2)}	SENSE2 ^{(1) (2)}	SENSE3 ^{(1) (2)}	SENSE4 ^{(1) (2)}
TPS37042BJOFDDFRQ1	ADJ	O	2	10ms	0.8V (±4%)	0.8V (±4%)	-	-
TPS37042A3OFDDFRQ1	Fixed	O	2	10ms	3.3V (±5%)	1.2V (±5%)	-	-
TPS37042ZJOFDDFRQ1	Fixed	O	2	10ms	1.95V (±4%)	3.8V (±6%)	-	-
TPS37043DJOFDDFR	ADJ/Fixed	O	3	10ms	3.3V (-11%)	1.2V (-11%)	0.8V (-8%)	-
TPS37043A4OFDDFRQ1	Fixed	O	3	10ms	2.8V (±5%)	1.8V (±5%)	1.2V (±5%)	-
TPS37043A8OFDDFRQ1	Fixed	O	3	10ms	3.3V (±5%)	1.8V (±5%)	1.0V (±5%)	-
TPS37043CPOFDDFRQ1	ADJ/Fixed	O	3	10ms	3.3V (±4%)	0.75V (±4%)	0.8V (±3%)	-
TPS37043ZJOFDDFRQ1	Fixed	O	3	10ms	0.95V (±4%)	1.35V (±4%)	1.8V (±4%)	-
TPS37043LJOFDDFRQ1	ADJ	O	3	10ms	0.4V (±5%)	0.4V (±5%)	0.8V (±5%)	-
TPS37043CJOFDDFRQ1	ADJ	O	3	10ms	0.8V (±6%)	0.8V (±6%)	0.8V (±6%)	-
TPS37043MJOFDDFRQ1	ADJ	O	3	10ms	0.4V (±7%)	0.4V (±7%)	0.8V (±7%)	-
TPS37043A5OFDDFRQ1	Fixed	O	3	10ms	3.3V (±4%)	1.8V (±4%)	1.2V (±4%)	-
TPS37043BJOFDDFRQ1	ADJ	O	3	10ms	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)	-
TPS37044BJOFDDFR	ADJ	O	4	10ms	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)
TPS37044LJOJDDFR	ADJ	O	4	35ms	0.4V (±5%)	0.4V (±5%)	0.8V (±5%)	0.8V (±5%)
TPS37044BJOFDDFRQ1	ADJ	O	4	10ms	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)	0.8V (±4%)
TPS37044CJOFDDFRQ1	ADJ	O	4	10ms	0.8V (±6%)	0.8V (±6%)	0.8V (±6%)	0.8V (±6%)
TPS37044MJOFDDFRQ1	ADJ	O	4	10ms	0.4V (±7%)	0.4V (±7%)	0.8V (±7%)	0.8V (±7%)
TPS37044A4OGDDFRQ1	Fixed	O	4	15ms	3.3V (±8%)	1.8V (±4%)	1.15V (±6%)	1.15V (±6%)

- (1) Listed percentage denotes window tolerance, see [図 6-1](#) for more information
 (2) VIT threshold of 0.8V and 0.4V signifies an adjustable channel
 (3) ADJ denotes an adjustable voltage threshold set by an external resistor divider, see [Adjustable Voltage Thresholds](#) for more information
 (4) Output type "L" designates Push Pull Active Low and "O" designates Open Drain Active Low. Reference [図 4-1](#) for more information

9.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

9.3 サポート・リソース

[テキサス・インスツルメンツ E2E™ サポート・フォーラム](#)は、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの[使用条件](#)を参照してください。

9.4 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.
 すべての商標は、それぞれの所有者に帰属します。

9.5 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

9.6 用語集

テキサス・インスツルメンツ用語集

この用語集には、用語や略語の一覧および定義が記載されています。

10 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision B (August 2023) to Revision C (May 2024)	Page
• Removal of orderable part number TPS37042BJOFDDFRQ1.....	30
• Addition of orderable part number TPS37041BPLEDFFRQ1.....	30

Changes from Revision A (May 2022) to Revision B (August 2023)	Page
• 冗長な言い回しを簡潔にし、デバイスのスレッショルド表と計算ツールをハイライト表示.....	1
• ウィンドウ許容誤差の仕様に内容を明確にする文章を追加.....	1
• Addition of 表 4-1	3
• Clarifying text added to window tolerance specification in 図 6-1	11
• Addition of reference to adjustable threshold resistor calculator.....	24
• Orderable part name additions to 表 9-2	30

Changes from Revision * (March 2021) to Revision A (May 2022)	Page
• 量産データのリリース.....	1

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS37041BPLEDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1BPQE
TPS37041BPLEDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	1BPQE
TPS37042A3OFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2A3FQ
TPS37042A3OFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2A3FQ
TPS37042ZJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2ZJFQ
TPS37042ZJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2ZJFQ
TPS37043A4OFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3A4FQ
TPS37043A4OFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3A4FQ
TPS37043A5OFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3A5FQ
TPS37043A5OFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3A5FQ
TPS37043A8OFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3A8FQ
TPS37043A8OFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3A8FQ
TPS37043BJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3BJFQ
TPS37043BJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3BJFQ
TPS37043CJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3CJFQ
TPS37043CJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3CJFQ
TPS37043CPOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3CPFQ
TPS37043CPOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3CPFQ
TPS37043LJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3LJFQ
TPS37043LJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3LJFQ
TPS37043MJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3MJFQ
TPS37043MJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3MJFQ
TPS37043ZJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3ZJFQ
TPS37043ZJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3ZJFQ
TPS37044A4OGDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4A4GQ
TPS37044A4OGDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4A4GQ
TPS37044BJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4BJFQ
TPS37044BJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4BJFQ
TPS37044CJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4CJFQ

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS37044CJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4CJFQ
TPS37044MJOFDDFRQ1	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4MJFQ
TPS37044MJOFDDFRQ1.A	Active	Production	SOT-23-THIN (DDF) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	4MJFQ

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS3704-Q1 :

- Catalog : [TPS3704](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS37041BPLEDFFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37042A3OFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37042ZJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043A4OFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043A5OFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043A8OFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043BJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043CJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043CPOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS37043LJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043MJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37043ZJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37044A4OGDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37044BJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37044CJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3
TPS37044MJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	180.0	8.4	3.2	3.2	1.4	4.0	8.0	Q3

TAPE AND REEL BOX DIMENSIONS

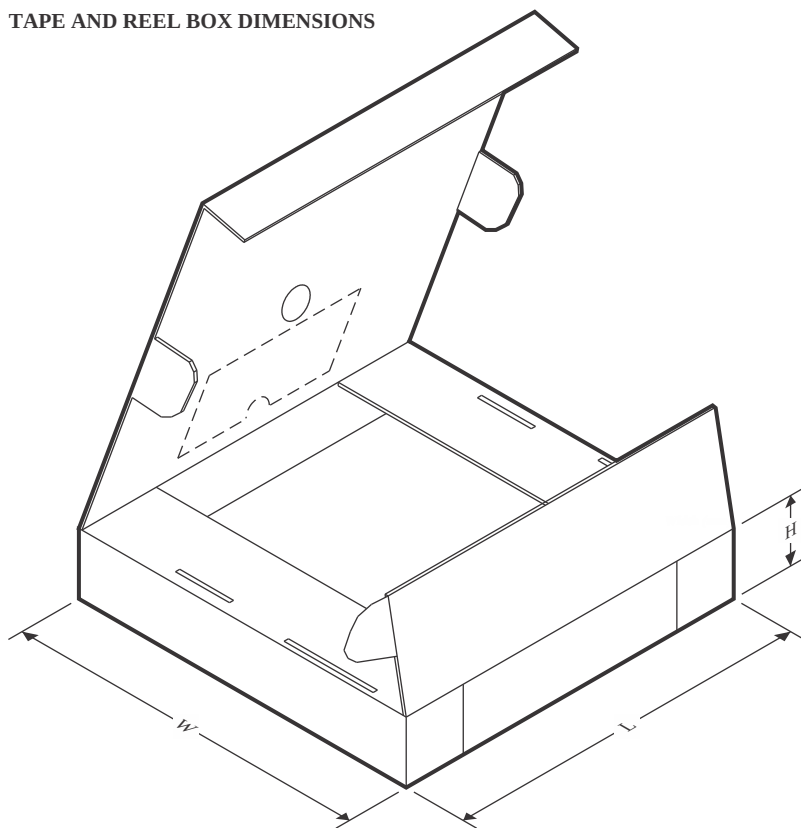

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS37041BPLEDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37042A3OFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37042ZJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043A4OFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043A5OFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043A8OFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043BJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043CJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043CPOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043LJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043MJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37043ZJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37044A4OGDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37044BJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37044CJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0
TPS37044MJOFDDFRQ1	SOT-23-THIN	DDF	8	3000	210.0	185.0	35.0

DDF0008A

PACKAGE OUTLINE

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

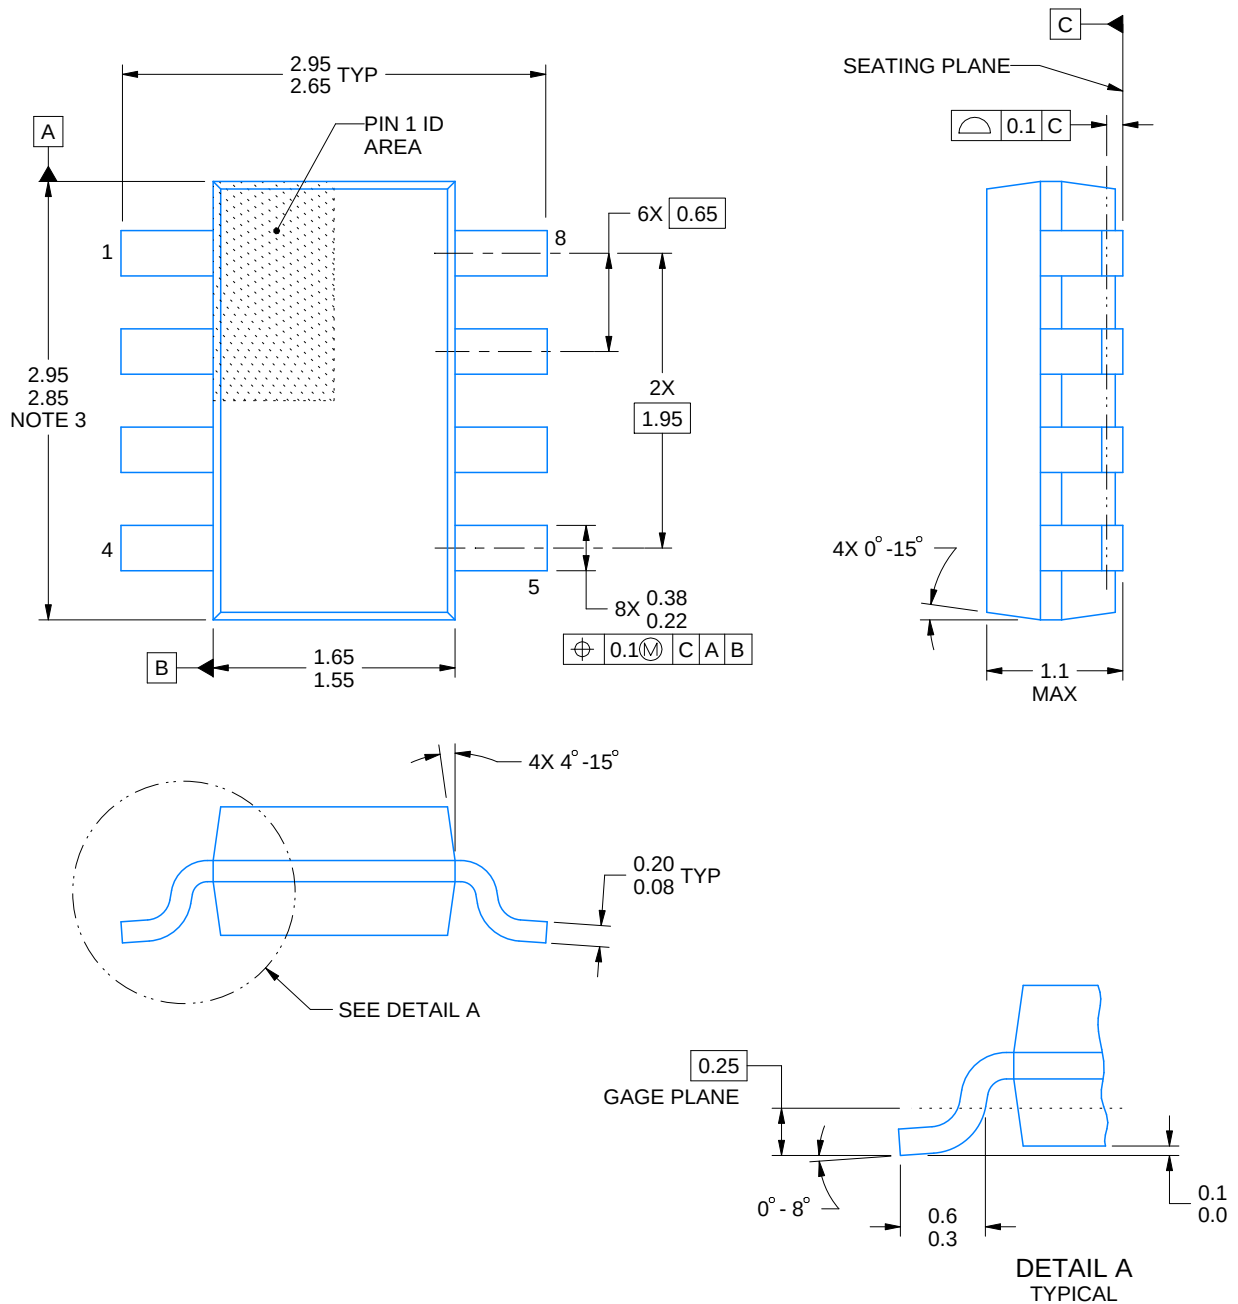

4222047/E 07/2024

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.

EXAMPLE BOARD LAYOUT



DDF0008A

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

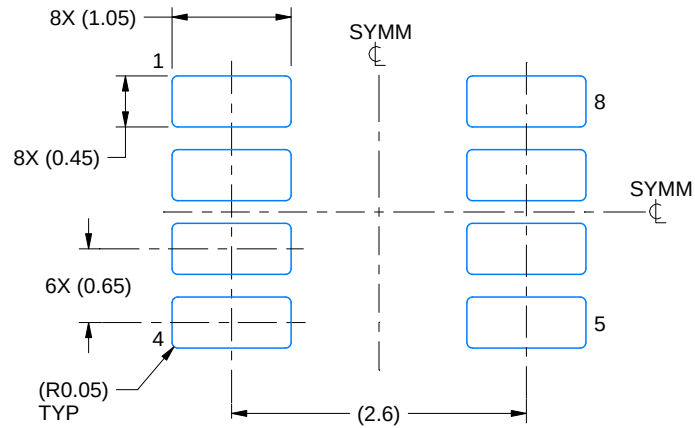

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

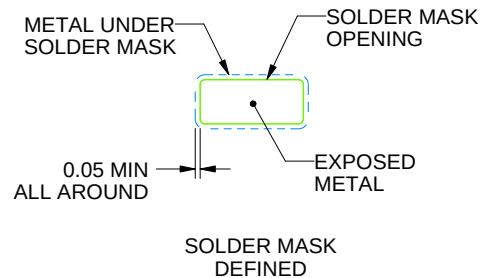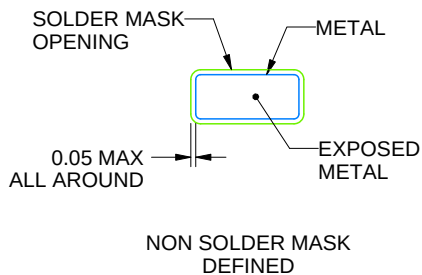

SOLDER MASK DETAILS

4222047/E 07/2024

NOTES: (continued)


4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DDF0008A

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

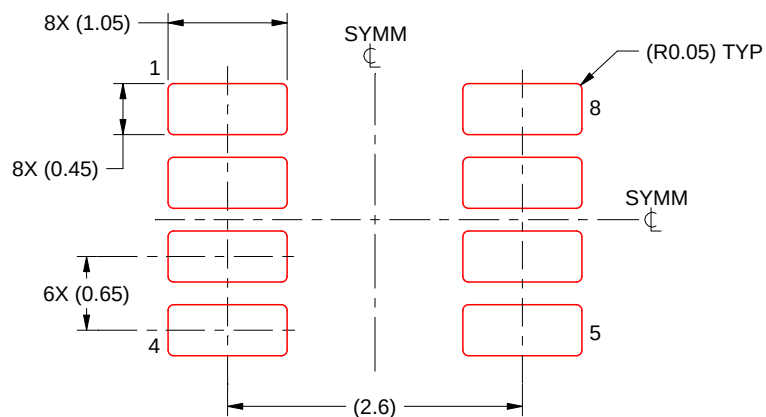

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4222047/E 07/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](https://www.ti.com) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月