

TMS320C5515 Fingerprint Development Kit (FDK) Quick Start Guide

1 FDK Overview

The C5515 Fingerprint Development Kit (FDK) is a complete signal chain solution that enables manufacturers and developers, who are interested in integrating fingerprint biometrics features into their product, to go to market faster. The kit contains two widely used fingerprint sensor types (1 swipe sensor and 1 optical sensor), one core board with TI's latest C5515 low-power digital signal processor and one extension board for user interaction.

The kit also includes complete hardware design collateral, simplified application source code and technical documentation (including a user's guide and application notes), to help users understand how to develop a fingerprint application. A production quality demo and its .out file are also included in the kit to enable users to experience the final product performance. Some target applications include fingerprint-enabled physical access control products (electronic door locks and safe boxes), USB smart keys and storage device, PC user identification, and time and attendance monitoring systems.

The part number for the FDK is TMDXBDFP5515.

2 FDK Content

The FDK includes:

- 1 core board (30 mm x 30 mm) based on C5515 low-power DSP
- 1 extension board (78 mm x 30 mm) for power supply, communication and user interaction
- 1 swipe fingerprint sensor (AuthenTec ATW310)
- 1 optical fingerprint sensor (Tooan OP-100N)
- 1 Type-B USB cable for updating program and user interaction
- 1 mini DVD containing:
 - Code Composer Studio™ IDE
 - Simplified fingerprint application source code
 - Demo code .out file
 - C5515 datasheet and chip support library (CSL)
 - Technical documentation, including user guide, application notes, quick start guide, schematics, BOM, gerbers

3 FDK System Specifications

The following table shows the system specifications for the fingerprint development kit.

Table 1. FDK System Specifications


Matching Method	1:1 and 1:N
1:1 matching spec	20ms
Template size per fingerprint	256 bytes
template storage capacity	50-400 prints
Fingerprint sensor resolution	300-500 dpi
False rejection rate	<1%
False acceptance rate	<0.001%
Power requirement	DC 5V / 100mA (not including sensor)
Communication interfaces	UART 1200-115200bps; USB2.0 full and high speed
Operating temperature	-10°C ~ 70°C
Board size	Core board: 30mmx30mm Extension board: 78mmx30mm

4 FDK Hardware Overview

A side view of the FDK hardware is shown in [Figure 1](#) and includes the following features:

- Mini 5-pin USB interface to supply power to and communicate with the PC
- Type-B USB communication interface to communicate with the PC
- Three push buttons used to delete, register and match fingerprints as labeled on the extension board
- Two sensor connectors on the core board used to connect to swipe and optical sensors
- Red LED used to indicate program loading status (two blinks) and the green LED is used to indicate waiting for fingerprint input (flashing)
- UPDATE button for updating program and user interaction

Figure 1. C5515 Fingerprint Development Boards Side View

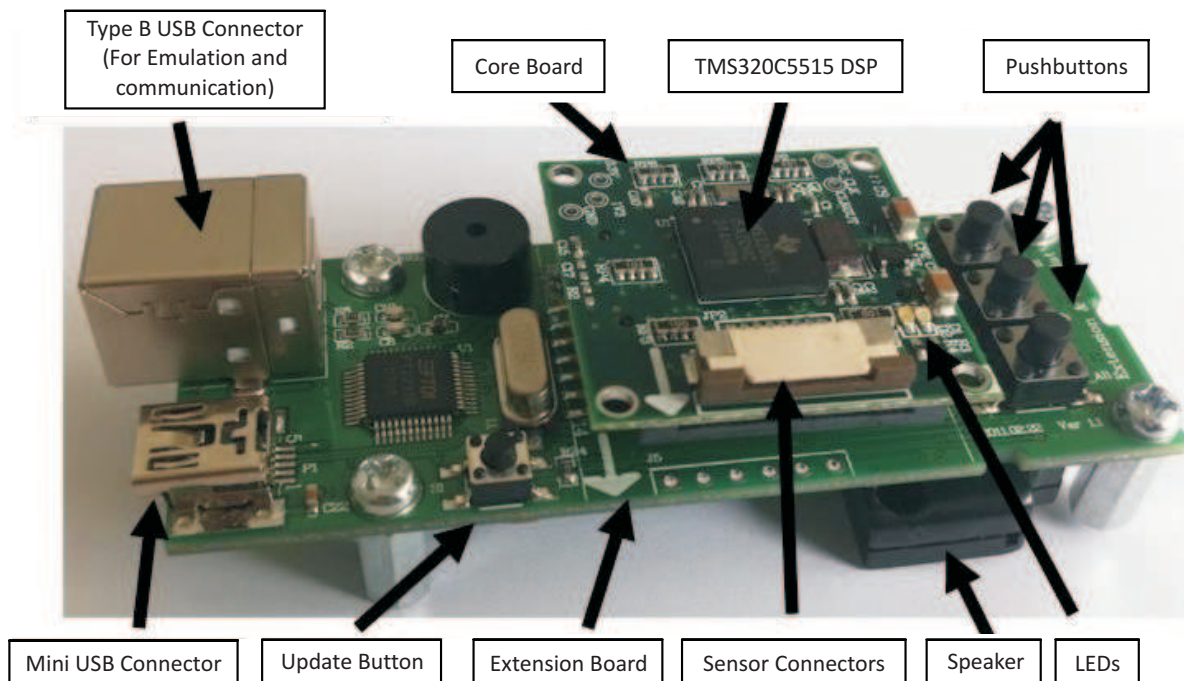


5 FDK Installation

Please follow these steps to install the fingerprint development kit:

1. Plug the swipe sensor into the connector indicated by the red circle in [Figure 2](#). If you choose to use the optical sensor, the sensor connector is on the other side of the core board.
Note: You need to disconnect the swipe sensor when you want to use the optical sensor.
2. Plug the core board into the extension board as indicated in [Figure 1](#). Ensure the arrow (shown in [Figure 2](#)) on both boards point in the same direction.
3. Connect the A-mini 5-pin USB cable to the USB port on the extension board and to the PC to power up the system.
4. Connect the Type B USB cable to the USB port on the extension board and to the PC to interact with the FDK.

After this step, you will be able to experience *Demonstration Mode*, explained in [Section 6.1](#), with the existing demo code that is on the system flash.

Figure 2. C5515 FDK Core Board

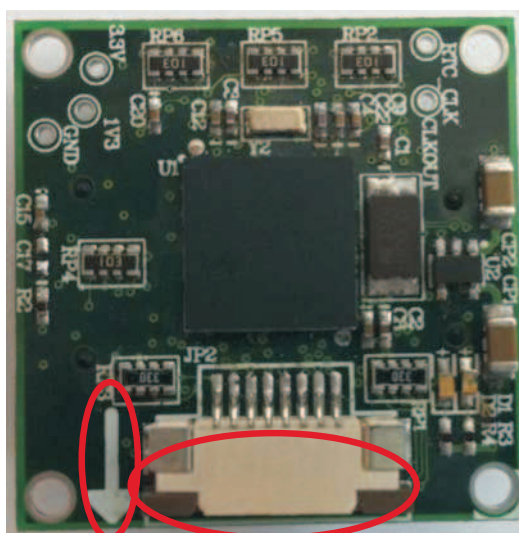

6 FDK Operation Modes

The FDK can be used in the following three modes.

6.1 Demonstration Mode

When power is supplied to the FDK boards through USB cable, the red LED on the core board blinks twice, indicating that the program is loaded successfully and initialization has completed. Follow these steps to perform **Deletion**, **Registration** and **Matching** operations.

- **Deletion**
 - Press the DEL_ALL button. The speaker will have voice notification of deletion "Delete all fingerprints successful," indicating that all fingerprints have been deleted. This step is optional. You can register a new fingerprint without deleting the stored fingerprints.
- **Registration**
 - Press the ENROLL button. The speaker will have voice notification of "Register new user." Swipe your finger three times after the flashing green light.
 - After hearing a short beep and seeing the flashing green light, swipe your finger once. If the fingerprint collection is successful, the speaker will have a short beep and green LED stops flashing. The system is ready to collect fingerprint again.
 - After seeing the flashing green light again, swipe the same finger a second time. Repeat the same procedure for a third time.
 - If fingerprint registration is successful: The speaker produces three short beeps and says, "Registration successful," and the green LED light stops flashing.
 - If fingerprint registration fails: The speaker produces three long beeps and says, "Registration failed," while the red LED flashes once and the green LED light stops flashing. The registration process will automatically begin again.
- **Matching**
 - Press the MATCH button. The speaker will have voice notification of "Perform fingerprint matching."
 - After hearing a short beep and seeing the flashing green light, swipe the finger you want to match with the fingerprint you registered.
 - If fingerprint matching is successful: The speaker produces three short beeps and says, "Matching successful," and the green LED light stops flashing.
 - If fingerprint matching fails: The speaker produces three long beeps and says, "Matching failed. Please try again," while the red LED light flashes once and the green LED light stops flashing. The matching process will automatically begin again.

NOTE: Voice quality improvements for voice notifications are being developed and will be available in future versions of the FDK.

6.2 Update Mode

To update:

- Connect the Type B USB cable to the extension board and the PC.
- Push the UPDATE button.

See the system guide in the C5515 FDK Window Program User Guide, included on the mini DVD.

6.3 PC Control Mode

The FDK can also be controlled by PC through the Type-B USB. Install the provided demo program by copying the demo program (TMDXBDKFP5515 Test.exe) to your PC. The PC is required to have Windows XP or Vista operating system. Ensure that the Type-B USB and mini 5-pin USB are connected to the PC. The demo program on the PC can be used to control the FDK.

See the system guide in the C5515 FDK Window Program User Guide, included on the mini DVD.

7 Support Resources

- For additional information regarding the TMS320C5000 family of DSPs, please refer to the following page on TI website.
<http://www.ti.com/c5000>
- Code Composer Studio support is available via a forum at
<http://community.ti.com/forums/138.aspx>
- Additional development support is available via the online community/tool folder:
<http://www.ti.com/c5515fdk>

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video
Wireless	www.ti.com/wireless-apps

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated