


## THS309x 高電圧、低歪み、電流帰還型オペアンプ

### 1 特長


- 低歪:
  - 10MHz、 $R_L = 1\text{k}\Omega$  で 84dBc HD2
  - 10MHz、 $R_L = 1\text{k}\Omega$  で 99dBc HD3
- 低ノイズ:
  - 15pA/ $\sqrt{\text{Hz}}$  の非反転電流ノイズ
  - 14pA/ $\sqrt{\text{Hz}}$  の反転電流ノイズ
  - 1.1nV/ $\sqrt{\text{Hz}}$  の電圧ノイズ
- 高いスルーレート: 6000V/ $\mu\text{s}$  ( $G = 5$ ,  $V_O = 20V_{PP}$ )
- 広い帯域幅: 305MHz ( $G = 2$ ,  $R_L = 100\Omega$ )
- 大出力電流の駆動:  $\pm 310\text{mA}$
- 広い電源電圧範囲:  $\pm 5V \sim \pm 16V$
- パワーダウン機能: THS3095 のみ

### 2 アプリケーション

- 高電圧の任意波形発生器
- ピン・ドライバ
- パワー FET ドライバ
- ソース・メジャー・ユニット (SMU)
- 高容量性負荷ピエゾ素子ドライバ

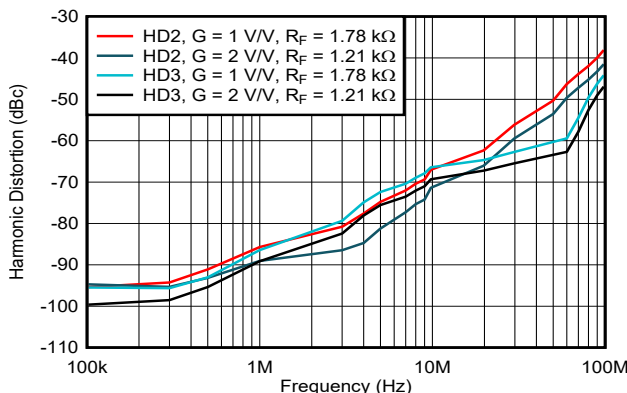

HD2/HD3 と  $R_L = 100\Omega$  での周波数との関係

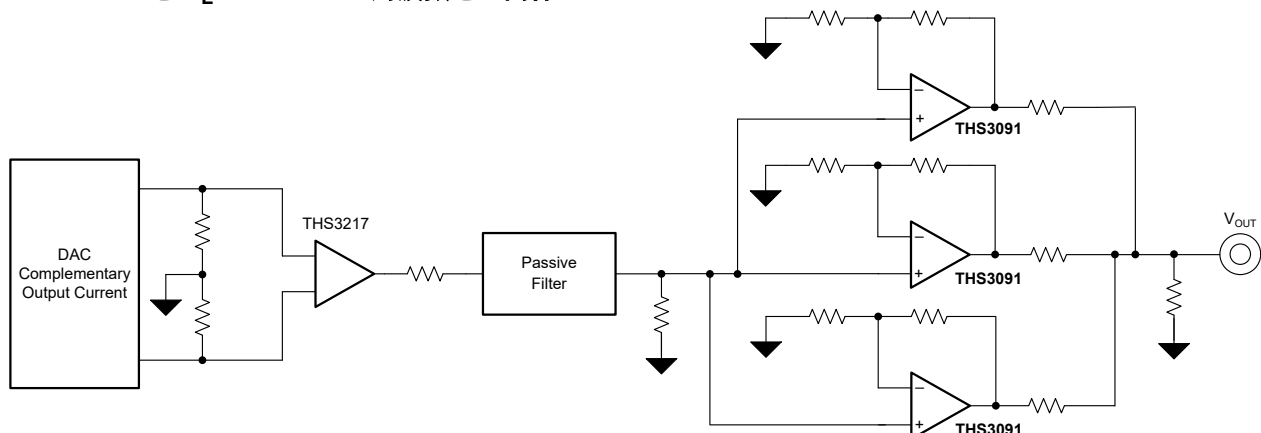

標準的な任意波形発生器の出力駆動回路

### 3 概要

THS3091 および THS3095 (THS309x) は高電圧、低歪み、高速の電流帰還型アンプで、 $\pm 5V \sim \pm 16V$  の広い電源電圧範囲で動作します。これらのデバイスは、ピン・ドライバ、パワー FET ドライバ、任意波形発生器など、大きなリニア出力信号を必要とするアプリケーション向けの優れた選択肢です。

THS3095 はパワーダウン・ピン ( $\overline{PD}$ ) を備えており、アンプを低消費電力のスタンバイ・モードに移行させ、静止電流を 9.5mA から 500 $\mu\text{A}$  に低減します。

32V の広い電源電圧範囲、6000V/ $\mu\text{s}$  のスルーレート、310mA の出力電流ドライブにより、THS309x は高電圧の任意波形ドライバ・アプリケーション向けの優れた選択肢です。さらに、大きな電圧スイングを処理して低い抵抗や大容量の負荷を駆動すると同時に、優れたセトリング・タイム性能を維持できるため、これらのデバイスはピン・ドライバおよびパワー FET ドライバ・アプリケーション向けの優れた選択肢です。

THS309x は、8 ピン SOIC (DDA) PowerPAD™ 内蔵回路パッケージで供給されます。THS3091 は、8 ピン HVSSOP (DGN) パッケージでも供給されます。

#### デバイス情報 (1)(2)

部品番号	PD PIN	パッケージ
THS3091	なし	DDA (SO PowerPAD, 8)
		DGN (HVSSOP, 8)
THS3095	可能	DDA (SO PowerPAD, 8)

- 利用可能なパッケージについては、このデータシートの末尾にある注文情報を参照してください。
- 詳細については、「[デバイス比較表](#)」を参照してください。



## Table of Contents

<b>1 特長</b> .....	<b>1</b>	8.3 Feature Description.....	<b>18</b>
<b>2 アプリケーション</b> .....	<b>1</b>	8.4 Device Functional Modes.....	<b>20</b>
<b>3 概要</b> .....	<b>1</b>	<b>9 Application and Implementation</b> .....	<b>21</b>
<b>4 Revision History</b> .....	<b>2</b>	9.1 Application Information.....	<b>21</b>
<b>5 Device Comparison Table</b> .....	<b>4</b>	9.2 Typical Application.....	<b>21</b>
<b>6 Pin Configuration and Functions</b> .....	<b>4</b>	9.3 Power Supply Recommendations.....	<b>23</b>
<b>7 Specifications</b> .....	<b>5</b>	9.4 Layout.....	<b>24</b>
7.1 Absolute Maximum Ratings.....	<b>5</b>	<b>10 Device and Documentation Support</b> .....	<b>29</b>
7.2 ESD Ratings.....	<b>5</b>	10.1 Device Support.....	<b>29</b>
7.3 Recommended Operating Conditions.....	<b>5</b>	10.2 Documentation Support.....	<b>29</b>
7.4 Thermal Information.....	<b>5</b>	10.3 ドキュメントの更新通知を受け取る方法.....	<b>29</b>
7.5 Electrical Characteristics: $V_S = \pm 15\text{ V}$ .....	<b>6</b>	10.4 サポート・リソース.....	<b>29</b>
7.6 Electrical Characteristics: $V_S = \pm 5\text{ V}$ .....	<b>8</b>	10.5 Trademarks.....	<b>29</b>
7.7 Typical Characteristics: $\pm 15\text{ V}$ .....	<b>10</b>	10.6 静電気放電に関する注意事項.....	<b>29</b>
7.8 Typical Characteristics: $\pm 5\text{ V}$ .....	<b>16</b>	10.7 用語集.....	<b>29</b>
<b>8 Detailed Description</b> .....	<b>18</b>	<b>11 Mechanical, Packaging, and Orderable Information</b> .....	<b>29</b>
8.1 Overview.....	<b>18</b>		
8.2 Functional Block Diagram.....	<b>18</b>		

## 4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision J (February 2023) to Revision K (April 2023)	Page
• THS3091 DGN パッケージのステータスをプレビューから量産データ (アクティブ) に変更し、関連コンテンツを追加.	<b>1</b>
• Changed voltage step from 10 V to 20 V for slew rate parameter in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> table.....	<b>6</b>
• Added <i>Functional Block Diagram</i> section.....	<b>18</b>

Changes from Revision I (December 2022) to Revision J (February 2023)	Page
• 「特長」セクションを更新 .....	<b>1</b>
• 「概要」セクションを更新 .....	<b>1</b>
• Updated the <i>Device Comparison Table</i> section.....	<b>4</b>
• Removed D package information from the data sheet.....	<b>4</b>
• Removed continuous power dissipation specification from <i>Absolute Maximum Ratings</i> table .....	<b>5</b>
• Updated <i>ESD Ratings</i> table.....	<b>5</b>
• Updated <i>Thermal Information</i> table.....	<b>5</b>
• Changed <i>Electrical Characteristics THS3091</i> table to <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> .....	<b>6</b>
• Updated small signal bandwidth, -3 dB specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> and <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> tables.....	<b>6</b>
• Added small signal bandwidth, -3 dB specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> and <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> tables at $G=1$ for DGN package.....	<b>6</b>
• Removed slew rate (25% to 75% level) specifications from <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> and <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> tables.....	<b>6</b>
• Added slew rate (10% to 90% level) specifications to <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> and <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> tables .....	<b>6</b>
• Updated rise and fall time specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> and <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> tables.....	<b>6</b>
• Updated settling time specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> and <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> tables.....	<b>6</b>
• Updated distortion specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math></i> and <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> tables.....	<b>6</b>

• Updated input voltage noise specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated input current noise specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Removed differential gain and differential phase specifications from <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated transimpedance specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Removed specifications with $T_A = 0^\circ\text{C}$ to $70^\circ\text{C}$ test conditions in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated max input voltage specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated max inverting input bias current specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated max input offset current drift specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated average offset voltage drift specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated average bias current drift specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated average offset current drift specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated common-mode rejection ratio specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated noninverting input resistance and capacitance specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated output current specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Removed specified operating voltage specifications from <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Updated power supply rejection specifications in <i>Electrical Characteristics: <math>V_S = \pm 15\text{ V}</math> and Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math> tables</i> .....	6
• Changed Electrical Characteristics THS3095 to <i>Electrical Characteristics: <math>V_S = \pm 5\text{ V}</math></i> .....	8
• Removed <i>Dissipation Ratings</i> table.....	10
• Updated <i>Typical Characteristics (<math>\pm 15\text{ V}</math>)</i> section.....	10
• Updated <i>Typical Characteristics: (<math>\pm 5\text{ V}</math>)</i> section.....	16
• Updated <i>Feature Description</i> section.....	18
• Updated <i>Device Functional Modes</i> section.....	20
• Updated <i>Application and Implementation</i> section.....	21
• Updated <i>Typical Application</i> section.....	21
• Updated <i>Layout</i> section.....	24

<b>Changes from Revision H (October 2015) to Revision I (December 2022)</b>	<b>Page</b>
• ドキュメント全体にわたって表、図、相互参照の採番方法を更新.....	1
• データシートに DGN パッケージ情報を追加 .....	1
• Added the <i>Device Comparison Table</i> section.....	4
• Updated <i>Thermal Information</i> table.....	5

## 5 Device Comparison Table

DEVICE	MAX SUPPLY, $V_S$ (V)	SSBW, $A_V = 5$ (MHz)	MAXIMUM $I_{CC}$ AT 25°C (mA)	INPUT NOISE $V_n$ (nV/ $\sqrt{\text{Hz}}$ )	SLEW RATE (V/ $\mu\text{s}$ )	LINEAR OUTPUT CURRENT (mA)
<a href="#">THS3491</a>	$\pm 16$	900	17.3	1.7	8000	$\pm 420$
<a href="#">THS3095</a>	$\pm 16$	205	10.5	1.1	6000	$\pm 310$
<a href="#">OPA695</a>	$\pm 6$	700 ( $A_V = 4$ )	13.3	1.8	4300	$\pm 90$
<a href="#">THS3001</a>	$\pm 16$	350	7.5	1.6	6300	$\pm 120$
<a href="#">THS3115</a>	$\pm 15$	100 ( $A_V = 4$ )	5.5	2.2	1550	$\pm 270$

## 6 Pin Configuration and Functions




图 6-1. DGN or DDA Package,  
8-Pin SOIC, HVSSOP or SO-PowerPAD  
THS3091 (Top View)




图 6-2. DDA Package,  
SO-PowerPAD  
THS3095 (Top View)

表 6-1. Pin Functions

NAME	PIN NO.		TYPE <sup>(1)</sup>	DESCRIPTION
	THS3091	THS3095		
NC	1, 5, 8	5	—	No connection
PD	—	8	I	Amplifier power down Low = amplifier disabled High (default) = amplifier enabled
REF	—	1	I	Voltage reference input to set PD threshold level
$V_{IN-}$	2	2	I	Inverting input
$V_{IN+}$	3	3	I	Noninverting input
$V_{OUT}$	6	6	O	Output of amplifier
$V_{S-}$	4	4	P	Negative power supply
$V_{S+}$	7	7	P	Positive power supply

(1) I = input, O = output, POW = power, and NC = no internal connection

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

			MIN	MAX	UNIT
V <sub>S</sub>	Supply voltage			33	V
V <sub>I</sub>	Input voltage			±V <sub>S</sub>	V
V <sub>ID</sub>	Differential input voltage			±4	V
I <sub>O</sub>	Output current			350	mA
T <sub>J</sub> <sup>(2)</sup>	Junction temperature	Maximum		150	°C
		Continuous operation, long-term reliability		125	
T <sub>stg</sub>	Storage temperature		–65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The maximum junction temperature for continuous operation is limited by package constraints. Operation above this temperature can result in reduced reliability, reduced lifetime of the device, or both.

### 7.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	V
		Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	±1500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V <sub>S</sub>	Supply voltage	Dual supply	±5	±15	±16	V
		Single supply	10	30	32	
T <sub>A</sub>	Operating free-air temperature		–40		85	°C

### 7.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		THS309x	THS3091	UNIT
		DDA (SO PowerPAD)	DGN (HVSSOP)	
		8 PINS	8 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	58.4	60.4	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	72.0	87.2	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	32.6	32.6	°C/W
ψ <sub>JT</sub>	Junction-to-top characterization parameter	13.2	7.8	°C/W
ψ <sub>JB</sub>	Junction-to-board characterization parameter	32.5	32.6	°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	17.1	17.0	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics: $V_S = \pm 15\text{ V}$

at  $T_A \cong 25^\circ\text{C}$ ,  $R_F = 1.21\text{ k}\Omega$ ,  $R_L = 100\text{ }\Omega$ , and  $G = 2$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
AC PERFORMANCE						
Small-signal bandwidth, −3 dB	G = 1, R <sub>F</sub> = 1.78 kΩ, V <sub>O</sub> = 200 mV <sub>PP</sub>	DDA package	715		MHz	
		DGN package	600			
	G = 2, R <sub>F</sub> = 1.21 kΩ, V <sub>O</sub> = 200 mV <sub>PP</sub>		305			
	G = 5, R <sub>F</sub> = 1 kΩ, V <sub>O</sub> = 200 mV <sub>PP</sub>		205			
	G = 10, R <sub>F</sub> = 866 Ω, V <sub>O</sub> = 200 mV <sub>PP</sub>		190			
0.1-dB bandwidth flatness	V <sub>O</sub> = 200 mV <sub>PP</sub>		95		MHz	
Large-signal bandwidth	G = 5, R <sub>F</sub> = 1 kΩ , V <sub>O</sub> = 4 V <sub>PP</sub>		135		MHz	
Slew rate (10% to 90% level)	G = 2, V <sub>O</sub> = 10-V step, R <sub>F</sub> = 1.21 kΩ		3600		V/μs	
	G = 5, V <sub>O</sub> = 20-V step, R <sub>F</sub> = 1 kΩ		6000			
Rise and fall time	V <sub>O</sub> = 5 V <sub>PP</sub>		2		ns	
Settling time	G = −2, V <sub>O</sub> = 2-V <sub>PP</sub> step	to 0.1%	12.5		ns	
		to 0.01%	18.5			
HARMONIC DISTORTION						
2nd harmonic distortion	V <sub>O</sub> = 2 V <sub>PP</sub> , f = 10 MHz	R <sub>L</sub> = 100Ω	72		dBc	
		R <sub>L</sub> = 1 kΩ	84			
3rd harmonic distortion	V <sub>O</sub> = 2 V <sub>PP</sub> , f = 10 MHz	R <sub>L</sub> = 100 Ω	70		dBc	
		R <sub>L</sub> = 1 kΩ	99			
Input voltage noise	f > 10 kHz		1.1		nV/√Hz	
Noninverting input current noise	f > 10 kHz		15		pA/√Hz	
Inverting input current noise	f > 10 kHz		14		pA/√Hz	
DC PERFORMANCE						
Open-loop transimpedance	V <sub>O</sub> = ±7.5 V, G = 1	T <sub>A</sub> = 25°C	350	1800	kΩ	
		T <sub>A</sub> = −40°C to +85°C	300			
Input offset voltage	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C	0.9		3	mV
		T <sub>A</sub> = −40°C to +85°C			5	
Noninverting input bias current	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C	4		15	μA
		T <sub>A</sub> = −40°C to +85°C			20	
Inverting input bias current	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C	3.5		15	μA
		T <sub>A</sub> = −40°C to +85°C			25	
Input offset current	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C	1.7		20	μA
		T <sub>A</sub> = −40°C to +85°C			30	
Average offset voltage drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C		±19		μV/°C	
Average noninverting bias current drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C		±20		nA/°C	
Average inverting bias current drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C		±80		nA/°C	
Average offset current drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C		±80		nA/°C	

## 7.5 Electrical Characteristics: $V_S = \pm 15\text{ V}$ (continued)

at  $T_A \cong 25^\circ\text{C}$ ,  $R_F = 1.21\text{ k}\Omega$ ,  $R_L = 100\ \Omega$ , and  $G = 2$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
INPUT CHARACTERISTICS						
Common-mode input range	T <sub>A</sub> = 25°C		±13.3	±13.6		V
	T <sub>A</sub> = −40°C to +85°C		±13			
Common-mode rejection ratio	V <sub>CM</sub> = ±10 V	T <sub>A</sub> = 25°C	62	78		dB
		T <sub>A</sub> = −40°C to +85°C	59			
Noninverting input resistance			0.7			MΩ
Noninverting input capacitance			2.4			pF
Inverting input resistance			30			Ω
Inverting input capacitance			1.4			pF
OUTPUT CHARACTERISTICS						
Output voltage swing	R <sub>L</sub> = 1 kΩ	T <sub>A</sub> = 25°C	±12.8	±13.2		V
		T <sub>A</sub> = −40°C to +85°C	±12.5			
	R <sub>L</sub> = 100 Ω	T <sub>A</sub> = 25°C	±12.1	±12.5		
		T <sub>A</sub> = −40°C to +85°C	±11.8			
Output current	Sourcing, R <sub>L</sub> = 40 Ω	T <sub>A</sub> = 25°C	225	310		mA
		T <sub>A</sub> = −40°C to +85°C	200			
	Sinking, R <sub>L</sub> = 40 Ω	T <sub>A</sub> = 25°C	200	310		
		T <sub>A</sub> = −40°C to +85°C	175			
Output impedance	f = 1 MHz, closed loop		0.06			Ω
POWER SUPPLY						
Quiescent current	T <sub>A</sub> = 25°C		8.5	9.5	10.5	mA
	T <sub>A</sub> = −40°C to +85°C		8		11	
Power supply rejection	+PSRR	T <sub>A</sub> = 25°C	70	85		dB
		T <sub>A</sub> = −40°C to +85°C	65			
	−PSRR	T <sub>A</sub> = 25°C	68	82		
		T <sub>A</sub> = −40°C to +85°C	65			
POWER-DOWN CHARACTERISTICS (THS3095 ONLY)						
REF voltage range <sup>(1)</sup>			V <sub>S−</sub>	V <sub>S+</sub> − 4		V
Power-down voltage level <sup>(1)</sup>	Enable		PD ≥ REF + 2			V
	Disable		PD ≤ REF + 0.8			
Power-down quiescent current	PD = 0 V	T <sub>A</sub> = 25°C	500		700	μA
		T <sub>A</sub> = −40°C to +85°C			800	
PD bias current	PD = 0 V, REF = 0 V,	T <sub>A</sub> = 25°C	11		15	μA
		T <sub>A</sub> = −40°C to +85°C			20	
	PD = 3.3 V, REF = 0 V	T <sub>A</sub> = 25°C	11		15	
		T <sub>A</sub> = −40°C to +85°C			20	
Turn-on time delay	90% of final value		60			μs
Turn-off time delay	10% of final value		150			

(1) For detailed information on the behavior of the power-down circuit, see [セクション 8.3.1](#).



## 7.6 Electrical Characteristics: $V_S = \pm 5\text{ V}$

at  $T_A \cong 25^\circ\text{C}$ ,  $R_F = 1.15\text{ k}\Omega$ ,  $R_L = 100\text{ }\Omega$ , and  $G = 2$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
AC PERFORMANCE						
Small-signal bandwidth, −3 dB	G = 1, R <sub>F</sub> = 1.78 kΩ, V <sub>O</sub> = 200 mV <sub>PP</sub>	DDA package		485		MHz
		DGN package		435		
	G = 2, R <sub>F</sub> = 1.15 kΩ, V <sub>O</sub> = 200 mV <sub>PP</sub>			215		
	G = 5, R <sub>F</sub> = 1 kΩ, V <sub>O</sub> = 200 mV <sub>PP</sub>			160		
	G = 10, R <sub>F</sub> = 866 Ω, V <sub>O</sub> = 200 mV <sub>PP</sub>			160		
0.1-dB bandwidth flatness	V <sub>O</sub> = 200 mV <sub>PP</sub>			50		MHz
Large-signal bandwidth	V <sub>O</sub> = 4 V <sub>PP</sub>			205		MHz
Slew rate (10% to 90% level)	G = 2, V <sub>O</sub> = 5-V step, R <sub>F</sub> = 1.21 kΩ			1800		V/μs
	G = 5, V <sub>O</sub> = 5-V step, R <sub>F</sub> = 1.21 kΩ			1700		
Rise and fall time	G = 2, V <sub>O</sub> = 5-V step, R <sub>F</sub> = 1.21 kΩ			2		ns
Settling time	G = −2, V <sub>O</sub> = 2-V <sub>PP</sub> step	to 0.1%		12.5		ns
		to 0.01%		26		
HARMONIC DISTORTION						
2nd harmonic distortion	V <sub>O</sub> = 2 V <sub>PP</sub> , f = 10 MHz	R <sub>L</sub> = 100 Ω		74		dBc
		R <sub>L</sub> = 1 kΩ		76		
3rd harmonic distortion	V <sub>O</sub> = 2 V <sub>PP</sub> , f = 10 MHz	R <sub>L</sub> = 100 Ω		70		dBc
		R <sub>L</sub> = 1 kΩ		75		
Input voltage noise	f > 10 kHz			1.1		nV/√Hz
Noninverting input current noise	f > 10 kHz			15		pA/√Hz
Inverting input current noise	f > 10 kHz			14		pA/√Hz
DC PERFORMANCE						
Open-loop transimpedance	V <sub>O</sub> = ±2.5 V, G = 1	T <sub>A</sub> = 25°C	250	1500		kΩ
		T <sub>A</sub> = −40°C to +85°C	200			
Input offset voltage	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C		0.6	2	mV
		T <sub>A</sub> = −40°C to +85°C			3.5	
Noninverting input bias current	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C		2	15	μA
		T <sub>A</sub> = −40°C to +85°C			20	
Inverting input bias current	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C		5	15	μA
		T <sub>A</sub> = −40°C to +85°C			25	μA
Input offset current	V <sub>CM</sub> = 0 V	T <sub>A</sub> = 25°C		1.5	10	μA
		T <sub>A</sub> = −40°C to +85°C			20	
Average offset voltage drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C			±20		μV/°C
Average noninverting bias current drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C			±20		nA/°C
Average inverting bias current drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C			±95		nA/°C
Average offset current drift	V <sub>CM</sub> = 0 V, T <sub>A</sub> = −40°C to +85°C			±90		nA/°C



## 7.6 Electrical Characteristics: $V_S = \pm 5\text{ V}$ (continued)


at  $T_A \cong 25^\circ\text{C}$ ,  $R_F = 1.15\text{ k}\Omega$ ,  $R_L = 100\ \Omega$ , and  $G = 2$  (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP	MAX	UNIT
INPUT CHARACTERISTICS						
Common-mode input range	T <sub>A</sub> = 25°C		±3.3	±3.6		V
	T <sub>A</sub> = −40°C to +85°C		±3			
Common-mode rejection ratio	V <sub>CM</sub> = ±2.0 V, V <sub>O</sub> = 0 V	T <sub>A</sub> = 25°C	60	66		dB
		T <sub>A</sub> = −40°C to +85°C	57			
Noninverting input resistance				0.45		MΩ
Noninverting input capacitance				2.6		pF
Inverting input resistance				32		Ω
Inverting input capacitance				1.5		pF
OUTPUT CHARACTERISTICS						
Output voltage swing	R <sub>L</sub> = 1 kΩ	T <sub>A</sub> = 25°C	±3.1	±3.4		V
		T <sub>A</sub> = −40°C to +85°C	±2.8			
Output voltage swing	R <sub>L</sub> = 100 Ω	T <sub>A</sub> = 25°C	±2.7	±3.1		
		T <sub>A</sub> = −40°C to +85°C	±2.5			
Output current	Sourcing, R <sub>L</sub> = 10 Ω	T <sub>A</sub> = 25°C	140	250		mA
		T <sub>A</sub> = −40°C to +85°C	120			
	Sinking, R <sub>L</sub> = 10 Ω	T <sub>A</sub> = 25°C	−140	−250		
		T <sub>A</sub> = −40°C to +85°C	−120			
Output impedance	f = 1 MHz, closed loop			0.09		Ω
POWER SUPPLY						
Quiescent current	T <sub>A</sub> = 25°C		7	8.2	9	mA
	T <sub>A</sub> = −40°C to +85°C		6.5		9.5	
Power supply rejection	+PSRR	T <sub>A</sub> = 25°C	68	81		dB
		T <sub>A</sub> = −40°C to +85°C	63			
	−PSRR	T <sub>A</sub> = 25°C	65	79		
		T <sub>A</sub> = −40°C to +85°C	60			
POWER-DOWN CHARACTERISTICS (THS3095 ONLY)						
REF voltage range <sup>(1)</sup>			V <sub>S−</sub>		V <sub>S+</sub> − 4	V
Power-down voltage level <sup>(1)</sup>	Enable		PD ≥ REF+2			V
	Disable		PD ≤ REF+0.8			
Power-down quiescent current	PD = 0 V	T <sub>A</sub> = 25°C		300	500	μA
		T <sub>A</sub> = −40°C to +85°C			600	
PD bias current	PD = 0 V, REF = 0 V,	T <sub>A</sub> = 25°C		11	15	μA
		T <sub>A</sub> = −40°C to +85°C			20	
	PD = 3.3 V, REF = 0 V	T <sub>A</sub> = 25°C		11	15	
		T <sub>A</sub> = −40°C to +85°C			20	
Turn-on time delay	90% of final value			60		μs
Turn-off time delay	10% of final value			150		μs


(1) For detailed information on the behavior of the power-down circuit, see [セクション 8.3.1](#).

## 7.7 Typical Characteristics: $\pm 15$ V


at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 15$  V,  $R_F = 1.21$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

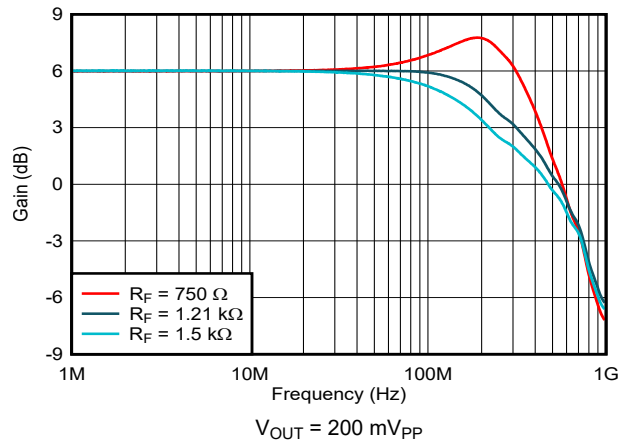


7-1. Noninverting Small-Signal Frequency Response

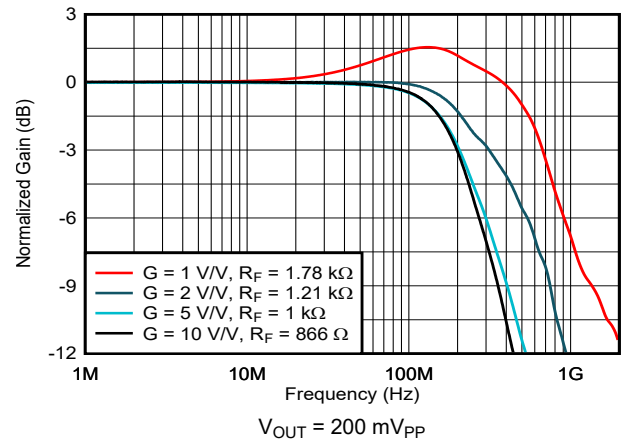


7-2. Noninverting Small-Signal Frequency Response

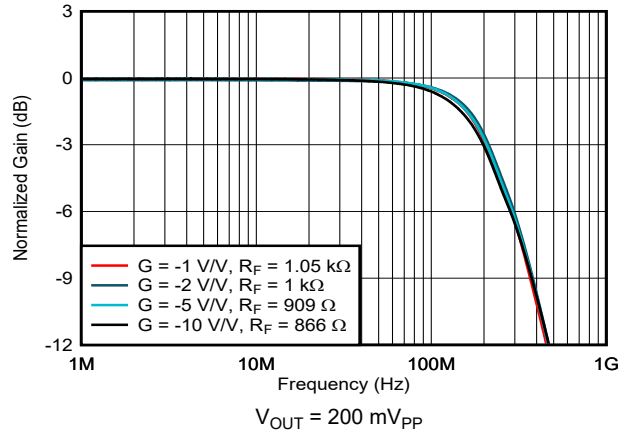


7-3. Inverting Small-Signal Frequency Response

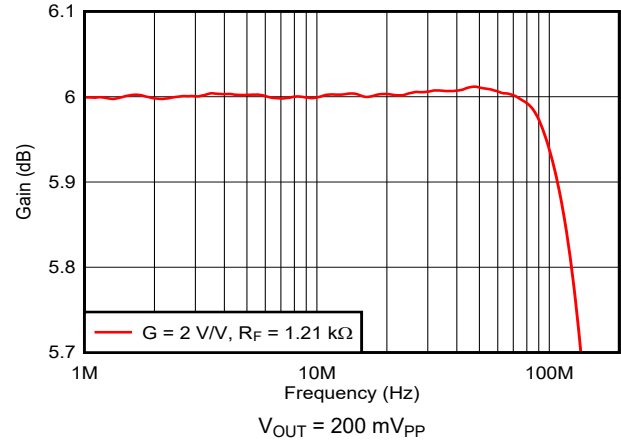

7-4. 0.1-dB Gain Flatness Frequency Response

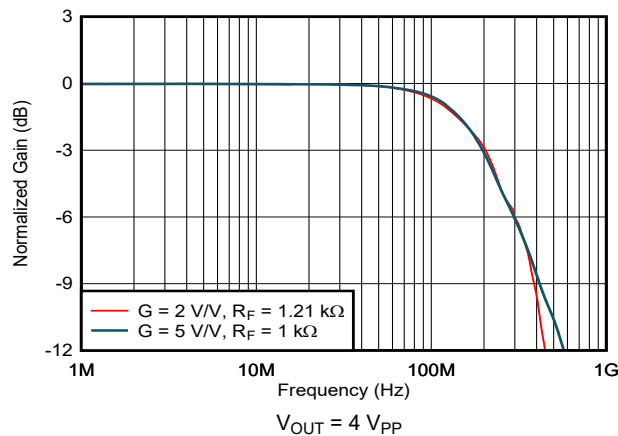


7-5. Noninverting Large-Signal Frequency Response

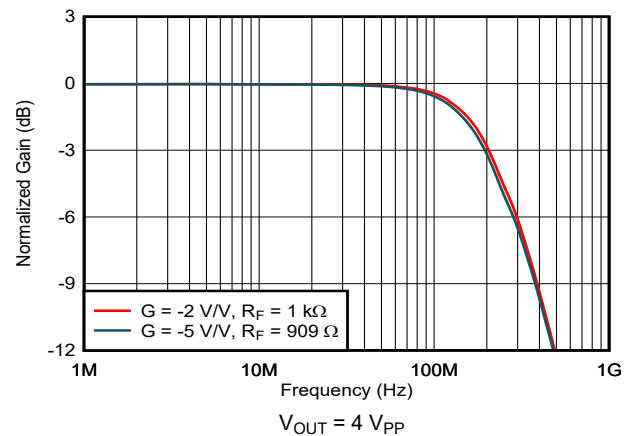

7-6. Inverting Large-Signal Frequency Response


## 7.7 Typical Characteristics: $\pm 15$ V (continued)

at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 15$  V,  $R_F = 1.21$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

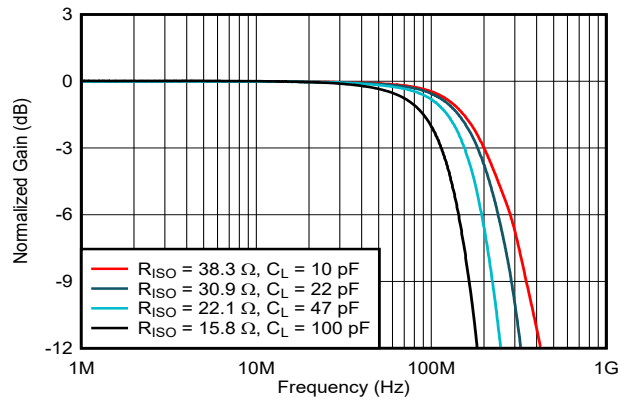


$V_{OUT} = 200$  mV<sub>PP</sub>, Gain = 5 V/V,  $R_F = 1$  k $\Omega$

Figure 7-7. Capacitive Load Frequency Response

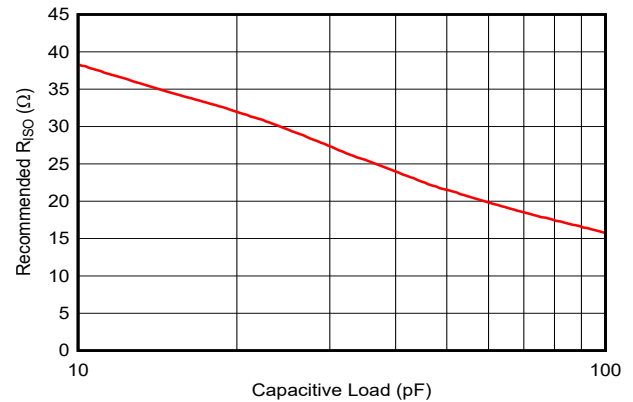


Gain = 5 V/V,  $R_F = 1$  k $\Omega$

Figure 7-8. Recommended  $R_{ISO}$  vs Capacitive Load

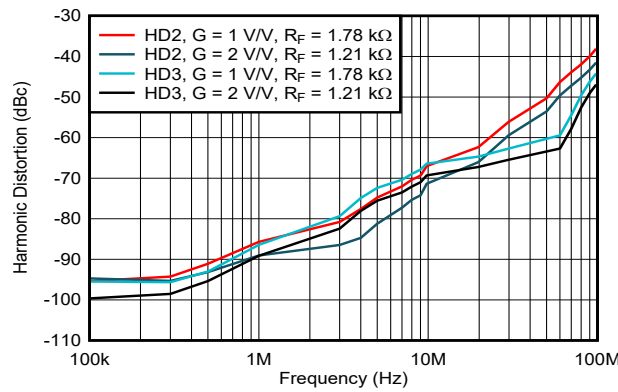


$V_{OUT} = 4$  V<sub>PP</sub>

Figure 7-9. Harmonic Distortion vs Frequency

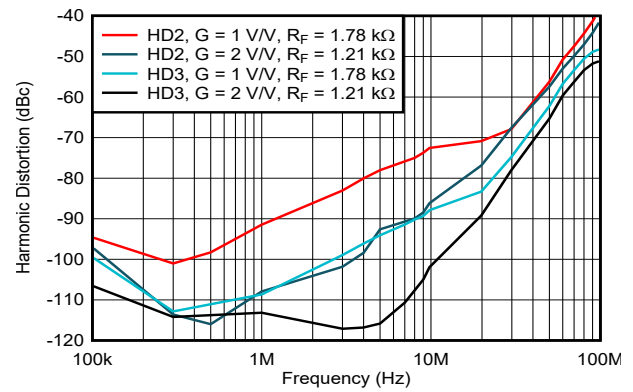


$V_{OUT} = 4$  V<sub>PP</sub>,  $R_L = 1$  k $\Omega$

Figure 7-10. Harmonic Distortion vs Frequency

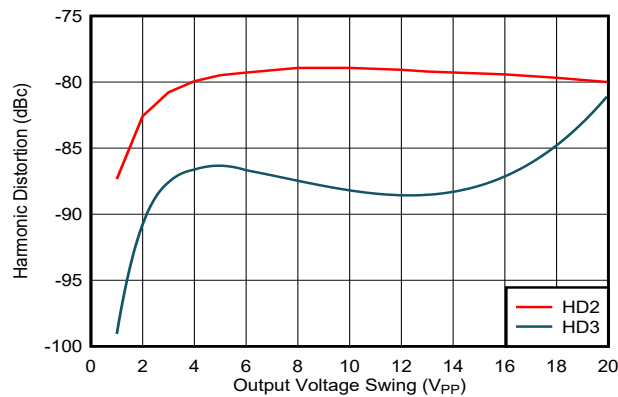

Gain = 5 V/V,  $R_F = 1$  k $\Omega$ ,  $f = 1$  MHz

Figure 7-11. Harmonic Distortion vs Output Voltage Swing

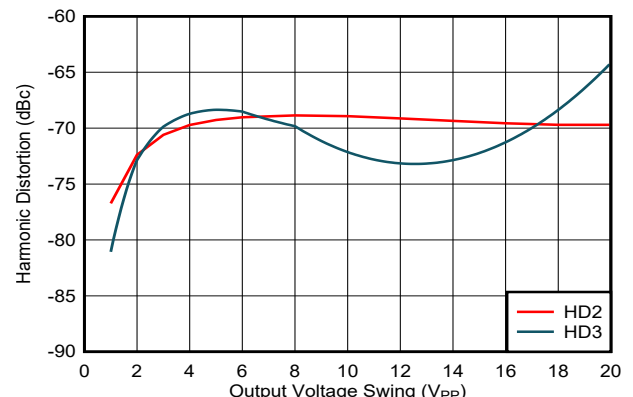

Gain = 5 V/V,  $R_F = 1$  k $\Omega$ ,  $f = 8$  MHz

Figure 7-12. Harmonic Distortion vs Output Voltage Swing

## 7.7 Typical Characteristics: $\pm 15$ V (continued)

at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 15$  V,  $R_F = 1.21$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

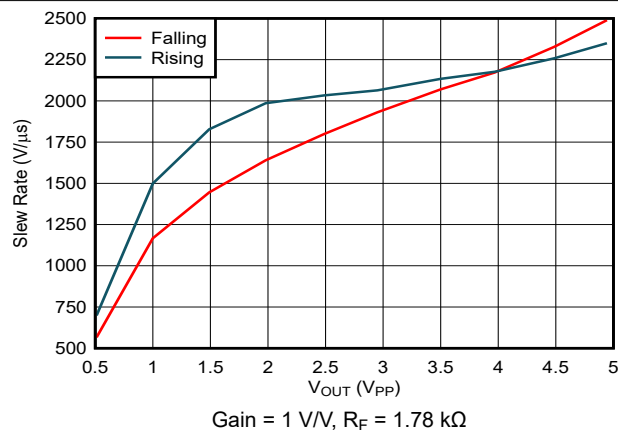


FIG 7-13. Slew Rate vs Output Voltage Step

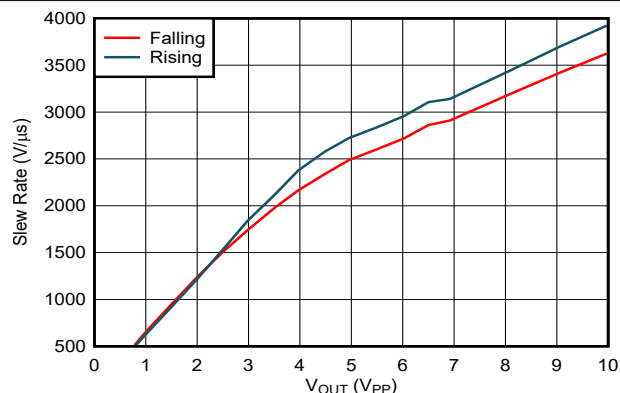


FIG 7-14. Slew Rate vs Output Voltage Step

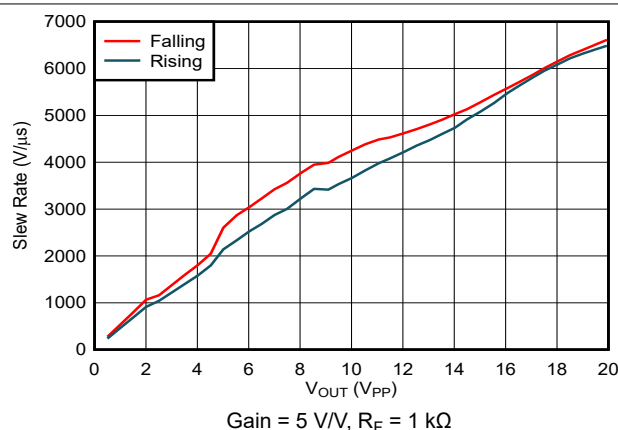


FIG 7-15. Slew Rate vs Output Voltage Step

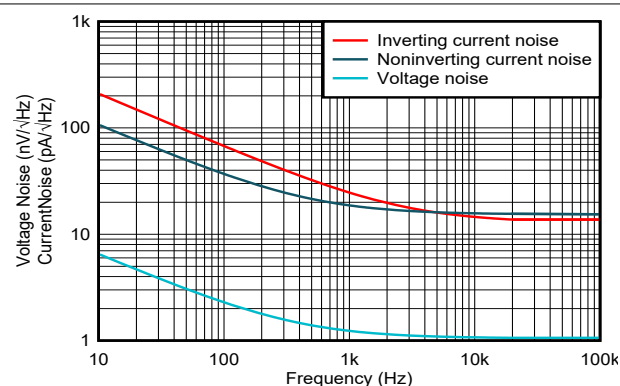


FIG 7-16. Noise vs Frequency

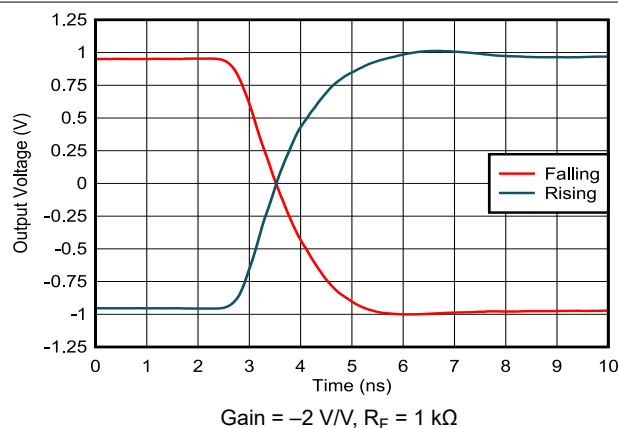


FIG 7-17. Settling Time

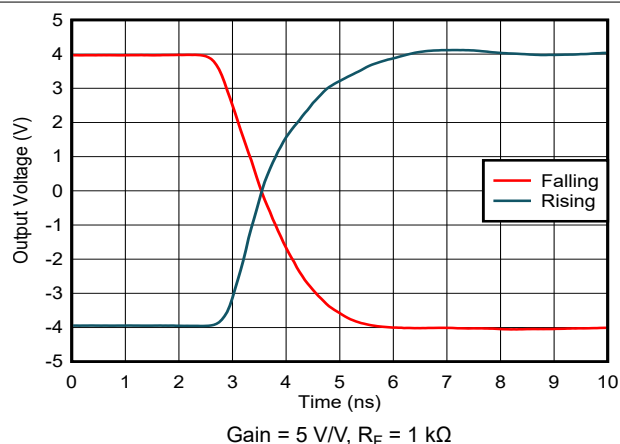


FIG 7-18. Settling Time

## 7.7 Typical Characteristics: $\pm 15$ V (continued)

at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 15$  V,  $R_F = 1.21$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

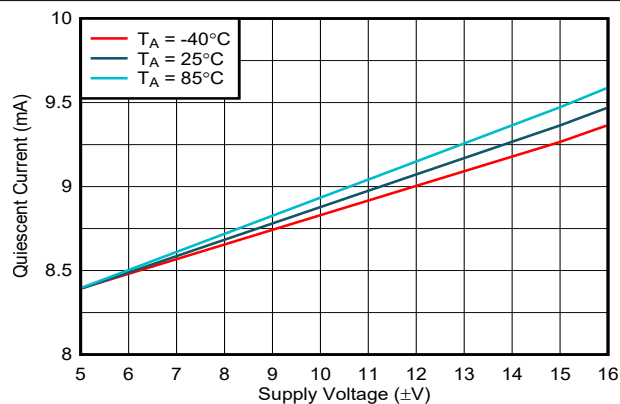


FIG 7-19. Quiescent Current vs Supply Voltage

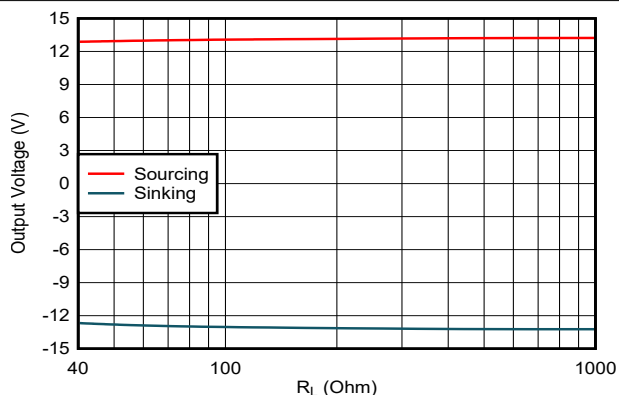


FIG 7-20. Output Voltage vs Load Resistance

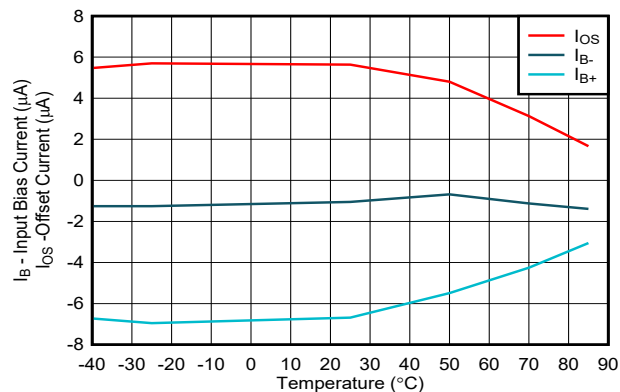


FIG 7-21. Input Bias and Offset Current vs Case Temperature

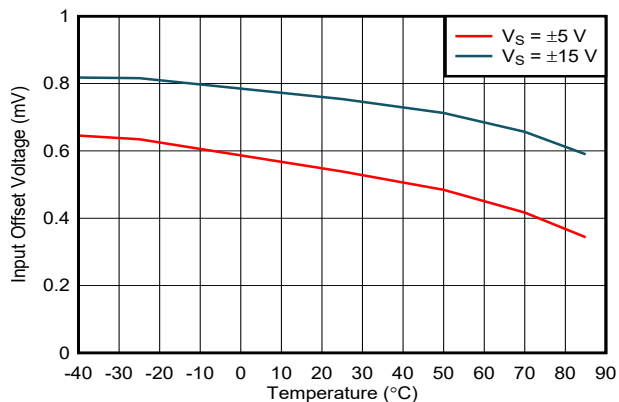


FIG 7-22. Input Offset Voltage vs Case Temperature

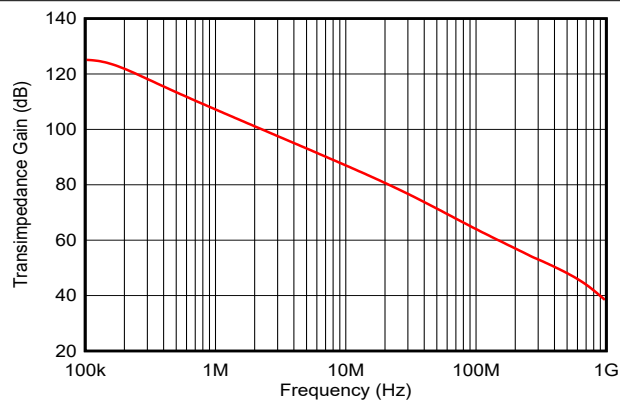


FIG 7-23. Transimpedance vs Frequency

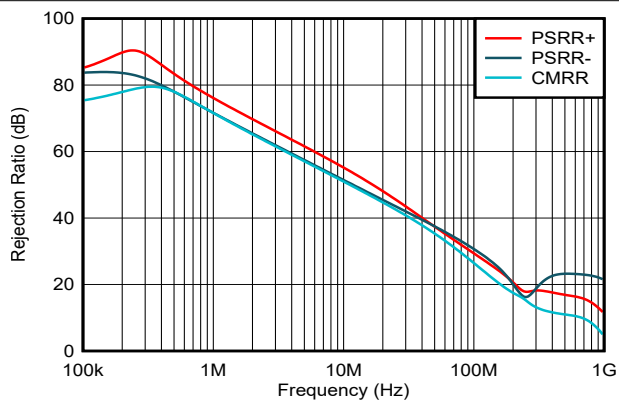


FIG 7-24. Rejection Ratio vs Frequency

## 7.7 Typical Characteristics: $\pm 15$ V (continued)

at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 15$  V,  $R_F = 1.21$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

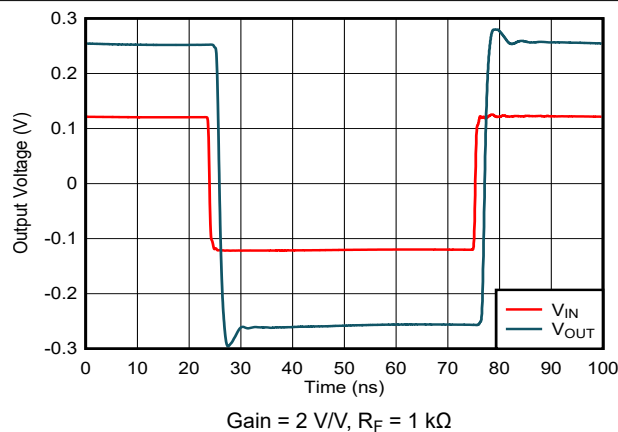


FIG 7-25. Noninverting Small-Signal Transient Response

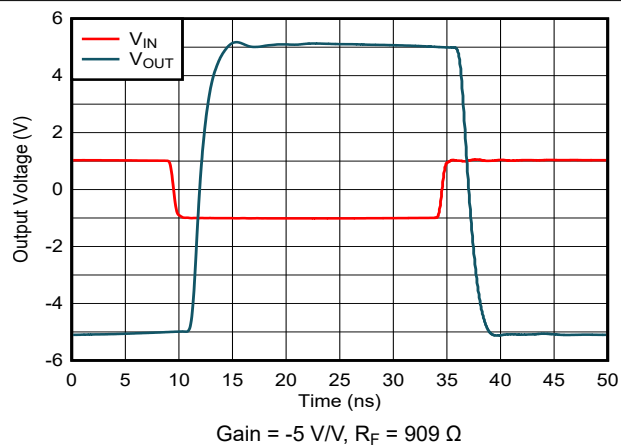


FIG 7-26. Inverting Large-Signal Transient Response

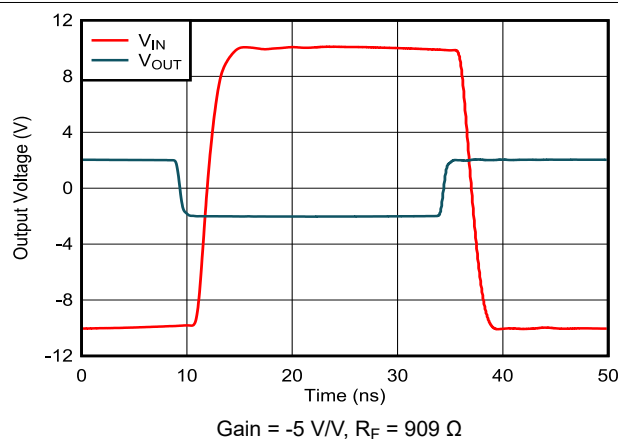


FIG 7-27. Inverting Large-Signal Transient Response

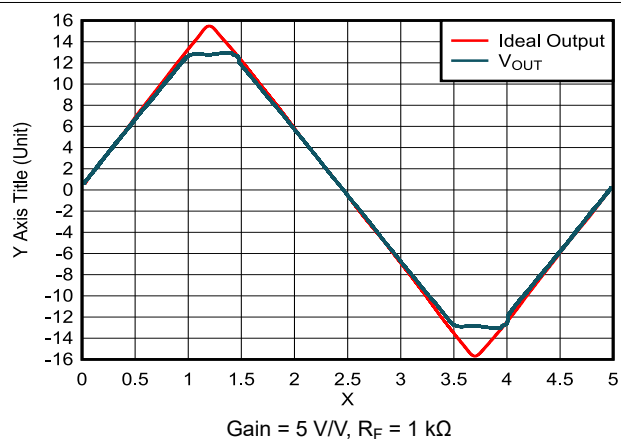


FIG 7-28. Output Overdrive Recovery Time

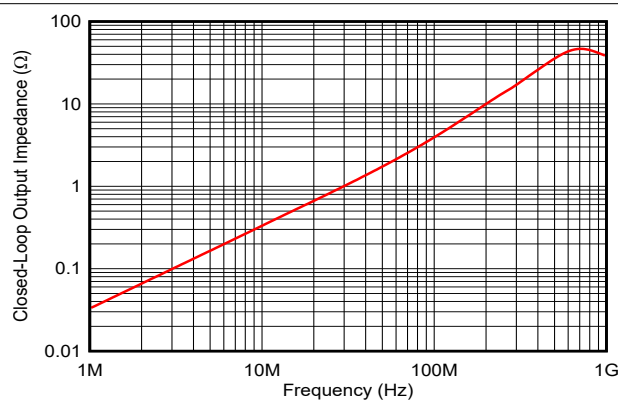


FIG 7-29. Closed-Loop Output Impedance vs Frequency


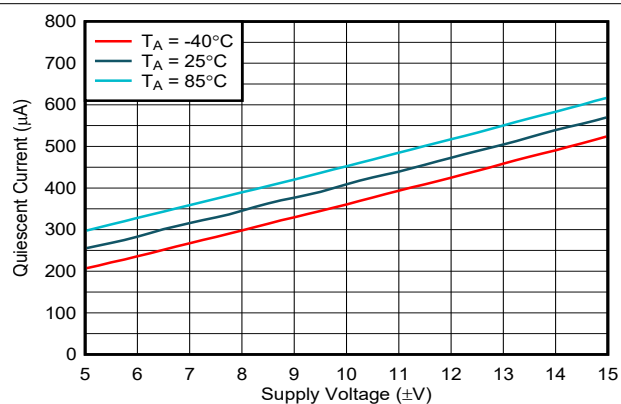


FIG 7-30. Power-Down Quiescent Current vs Supply Voltage

## 7.7 Typical Characteristics: $\pm 15$ V (continued)

at  $T_A \cong 25^\circ\text{C}$ ,  $V_S = \pm 15$  V,  $R_F = 1.21$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

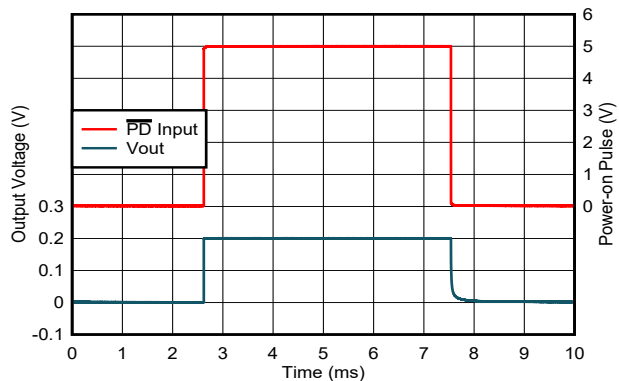


7-31. Turnon and Turnoff Time Delay




## 7.8 Typical Characteristics: $\pm 5$ V


at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 5$  V,  $R_F = 1.15$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

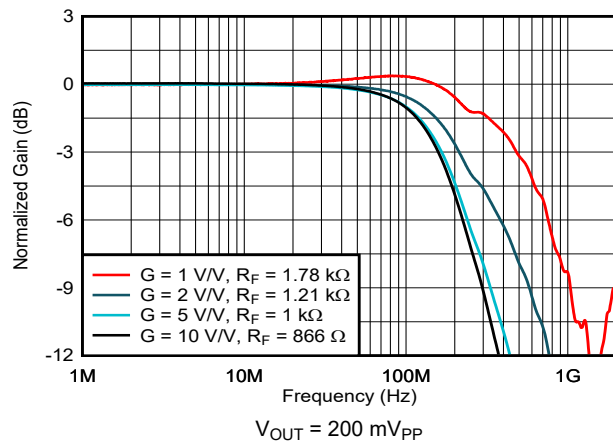


7-32. Noninverting Small-Signal Frequency Response

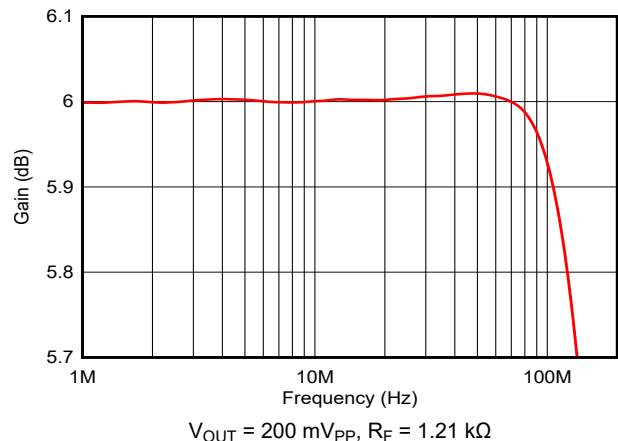


7-33. 0.1-dB Gain Flatness Frequency Response

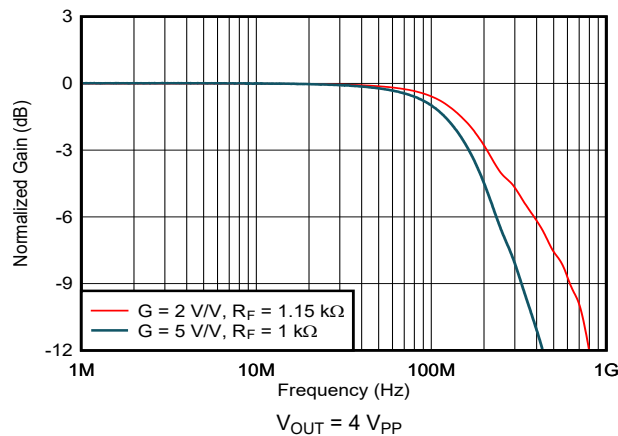


7-34. Noninverting Large-Signal Frequency Response

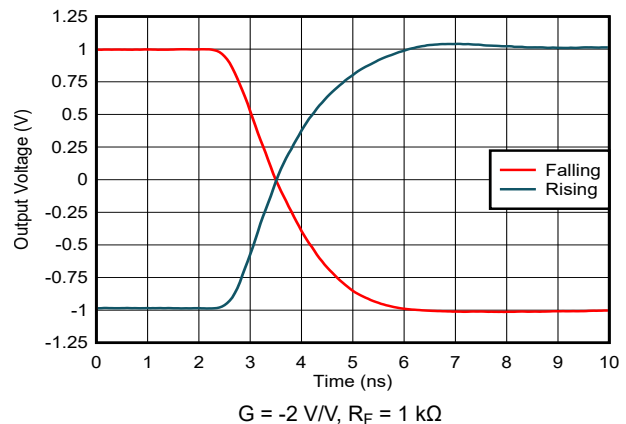

7-35. Settling Time

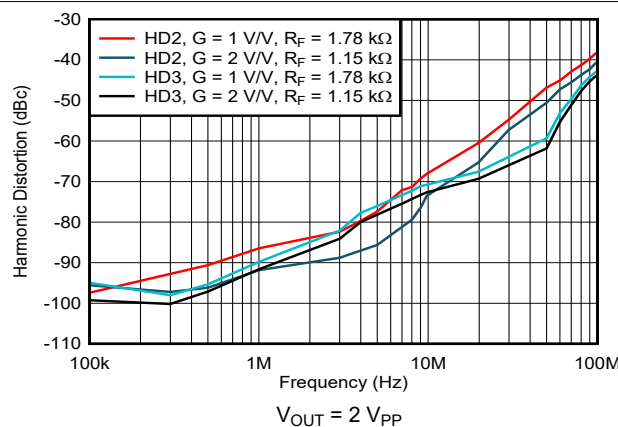




7-36. Harmonic Distortion vs Frequency

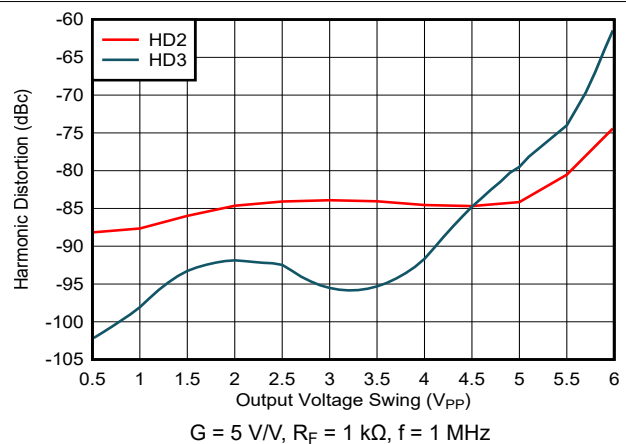

7-37. Harmonic Distortion vs Output Voltage Swing

## 7.8 Typical Characteristics: $\pm 5$ V (continued)

at  $T_A \cong 25^\circ\text{C}$ ,  $V_S = \pm 5$  V,  $R_F = 1.15$  k $\Omega$ ,  $G = +2$  V/V, and  $R_L = 100$   $\Omega$  (unless otherwise noted)

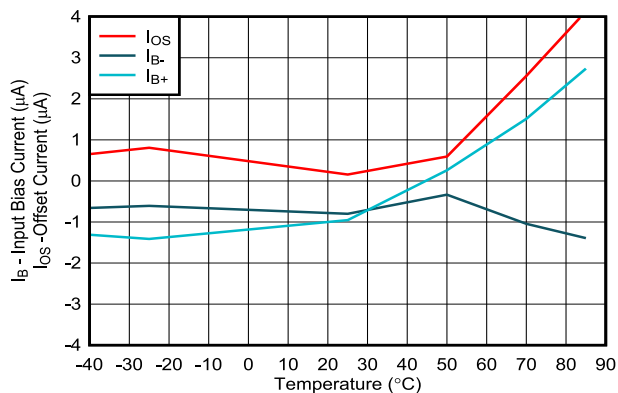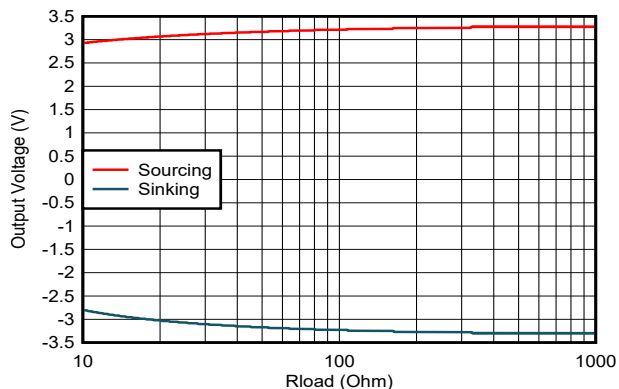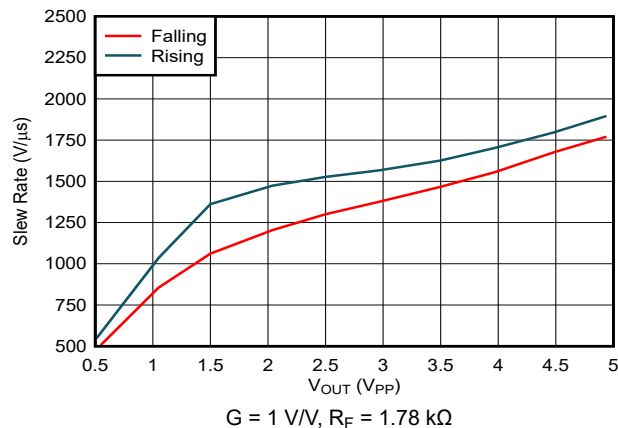


## 8 Detailed Description

### 8.1 Overview

The THS3091 and THS3095 (THS309x) are high-voltage, low-distortion, high-speed, current feedback amplifiers. The THS309x are designed to operate over a wide supply range of  $\pm 5\text{ V}$  to  $\pm 16\text{ V}$  for applications requiring large, linear output swings, such as arbitrary waveform generators.

The THS3095 also features a power-down pin that puts the amplifier into a low-power standby mode, and lowers the quiescent current from 9.5 mA to 500  $\mu\text{A}$ .

### 8.2 Functional Block Diagram

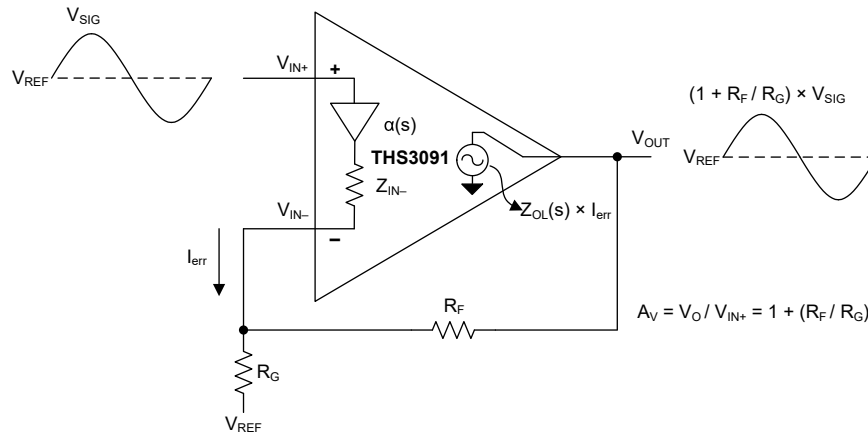

### 8.3 Feature Description

#### 8.3.1 Power-Down and Reference Pins Functionality

The THS3095 features a power-down pin ( $\overline{\text{PD}}$ ) designed to reduce system power that lowers the quiescent current from 9.5 mA down to 500  $\mu\text{A}$ . The THS3095 also features a reference pin (REF) that allows the user to control the enable or disable power-down voltage levels applied to the  $\overline{\text{PD}}$  pin.

The power-down pin of the amplifier defaults to the positive supply voltage in the absence of an applied voltage, putting the amplifier in the power-on mode of operation. Driving the power-down pin towards the negative rail will turn off the amplifier and conserve power. The following equations show the relationship between the reference voltage and the power-down thresholds:

$$\overline{\text{PD}} \leq \text{REF} + 0.8\text{ V for disable} \quad (1)$$

$$\overline{\text{PD}} \leq \text{REF} + 2.0\text{ V for enable} \quad (2)$$

where the usable range at the REF pin is:

$$V_{S-} \leq V_{\text{REF}} \leq (V_{S+} - 4\text{ V}) \quad (3)$$


The recommended mode of operation is to tie the REF pin to midrail, thus setting the disable or enable thresholds to the following equations:

$$V_{\text{midrail}} + 0.8\text{ V} \quad (4)$$

$$V_{\text{midrail}} + 2\text{ V} \quad (5)$$

Power-Down mode is not intended to provide a high-impedance output. In other words, the power-down functionality is not intended to allow use as a tri-state bus driver. When in Power-Down mode, the impedance at the output of the amplifier is dominated by the feedback and gain-setting resistors, but the output impedance of the device varies depending on the voltage applied to the outputs.

Figure 8-1 shows the total system output impedance, which includes the amplifier output impedance in parallel with the feedback plus gain resistors, and cumulates to 2416  $\Omega$ . Figure 8-2 shows this circuit configuration for reference.

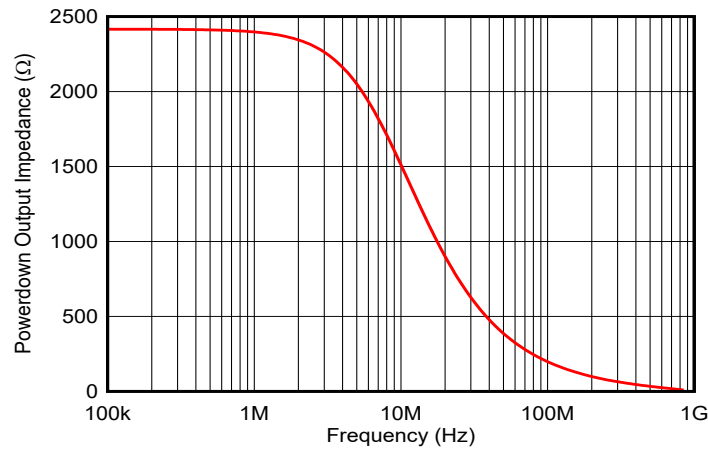

**Figure 8-1. Power-Down Output Impedance vs Frequency**


As with most current feedback amplifiers, the internal architecture places some limitations on the system when in Power-Down mode. Most notably is the fact that the amplifier actually turns on if there is a  $\pm 0.7$  V or greater difference between the two input nodes ( $V_{IN+}$  and  $V_{IN-}$ ) of the amplifier. If this difference exceeds  $\pm 0.7$  V, then the output of the amplifier creates an output voltage equal to approximately  $[(V_{IN+} - V_{IN-}) - 0.7 \text{ V}] \times \text{Gain}$ . This also implies that if a voltage is applied to the output while in Power-Down mode, the  $V_-$  node voltage is equal to  $V_{O(\text{applied})} \times R_G / (R_F + R_G)$ . For low-gain configurations and a large applied voltage at the output, the amplifier can actually turn on due to the aforementioned behavior.

The time delays associated with turning the device on and off are specified as the time required for the amplifier to reach either 10% or 90% of the final output voltage. The time delays are in the order of microseconds because the amplifier moves in and out of the linear mode of operation in these transitions.

## 8.4 Device Functional Modes

### 8.4.1 Wideband, Noninverting Operation

The THS309x are unity gain stable 715-MHz current-feedback operational amplifiers designed to operate from a  $\pm 5\text{-V}$  to  $\pm 15\text{-V}$  power supply. [Figure 8-2](#) shows the THS3091 in a noninverting gain of 2-V/V configuration typically used to generate the performance curves. Most of the curves were characterized using signal sources with a 50- $\Omega$  source impedance, and with measurement equipment presenting a 50- $\Omega$  load impedance.

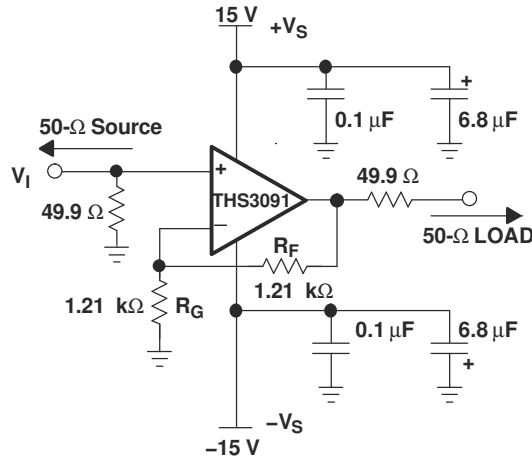

**图 8-2. Wideband, Noninverting Gain Configuration**

Current-feedback amplifiers are highly dependent on feedback resistor  $R_F$  for maximum performance and stability. [Table 8-1](#) shows the optimal gain-setting resistors  $R_F$  and  $R_G$  at different gains to give maximum bandwidth with minimal peaking in the frequency response. Higher bandwidths can be achieved (at the expense of added peaking in the frequency response) by using even lower values for  $R_F$ . Conversely, increasing  $R_F$  decreases the bandwidth, but improves stability.

**表 8-1. Recommended Resistor Values for Optimum Frequency Response**

THS3091 AND THS3095 $R_F$ AND $R_G$ VALUES FOR MINIMAL PEAKING WITH $R_L = 100\ \Omega$			
GAIN (V/V)	SUPPLY VOLTAGE (V)	$R_G\ (\Omega)$	$R_F\ (\Omega)$
1	$\pm 5$ and $\pm 15$	—	1.78 k
2	$\pm 5$	1.15 k	1.15 k
	$\pm 15$	1.21 k	1.21 k
5	$\pm 5$ and $\pm 15$	249	1 k
10	$\pm 5$ and $\pm 15$	95.3	866
-1	$\pm 5$ and $\pm 15$	1.05 k	1.05 k
-2	$\pm 5$ and $\pm 15$	499	1 k
-5	$\pm 5$ and $\pm 15$	182	909
-10	$\pm 5$ and $\pm 15$	86.6	866

## 9 Application and Implementation


### 注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

### 9.1 Application Information

### 9.2 Typical Application

The fundamental concept of load sharing is to drive a load using two or more of the same operational amplifiers. Each amplifier is driven by the same source. [図 9-1](#) illustrates the schematic for this design. This concept effectively reduces the current load of each amplifier by  $1/N$ , where  $N$  is the number of amplifiers. For further details on the design and performance of this circuit, see the [Reference Design for Implementation of the Load Sharing Concept for Large-Signal Applications](#).

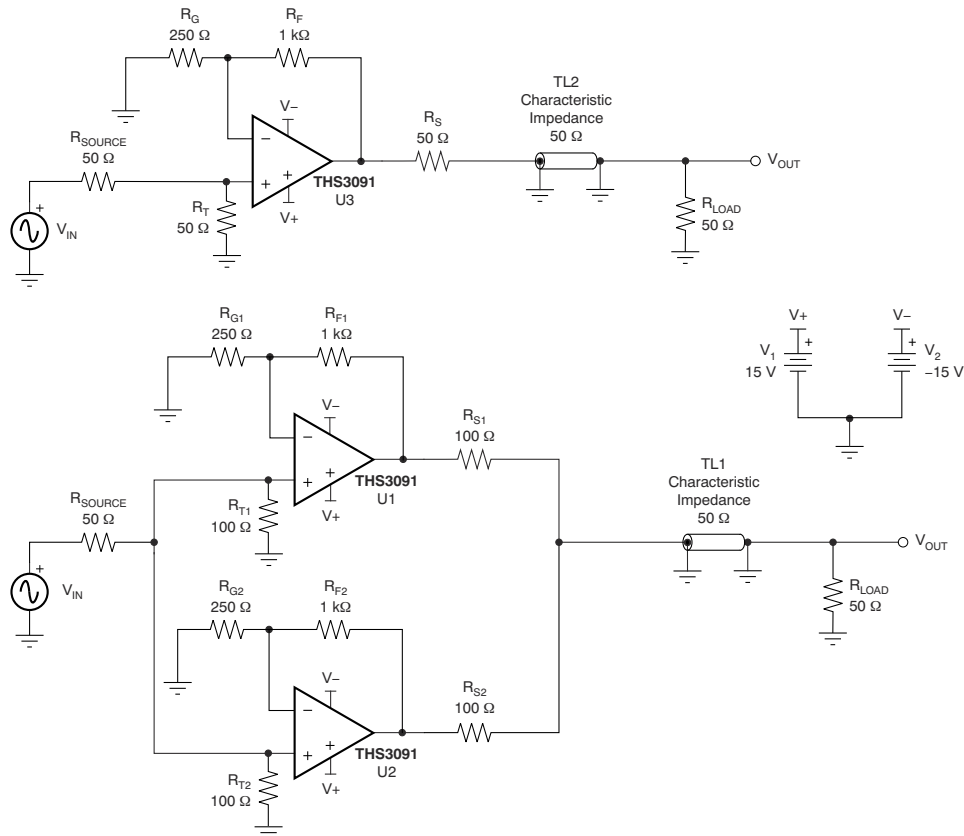

**図 9-1. Reference THS3091 and THS3091 Load Sharing Test Configurations**

#### 9.2.1 Design Requirements

Use two THS3091 amplifiers in a parallel load-sharing circuit to improve distortion performance.

**表 9-1. Design Parameters**

DESIGN PARAMETER	VALUE
$V_{OPP}$	20 V
$R_{LOAD}$	100 $\Omega$

## 9.2.2 Detailed Design Procedure

In addition to providing higher output current drive to the load, the load sharing configuration can also provide improved distortion performance. In many cases, an operational amplifier shows better distortion performance as the load current decreases (that is, for higher resistive loads) until the feedback resistor starts to dominate the current load. In a load sharing configuration of N amplifiers in parallel, the equivalent current load that each amplifier drives is 1/N times the total load current.


As shown in [Figure 9-1](#) for example, in a two-amplifier load sharing configuration with matching resistance driving a resistive load (RL), each series resistance is 2×RL and each amplifier drives 2×RL. A convenient indicator of whether an op amp will function well in a load sharing configuration is the characteristic performance graph of harmonic distortion versus load resistance. [Figure 7-9](#) and [Figure 7-10](#) show more information. Such graphs can be found in most of TI's high-speed amplifier data sheets. These graphs can be used to obtain a general sense of whether or not an amplifier will show improved distortion performance in load sharing configurations.

[Figure 9-1](#) shows two test circuits: one for a single THS3091 amplifier driving a double-terminated (50-Ω cable), and one with two THS3091 amplifiers in a load sharing configuration. In the load sharing configuration, the two 100-Ω series output resistors act in parallel to provide 50-Ω back-matching to the 50-Ω cable.


[Figure 9-2](#) and [Figure 9-3](#) show the 32-MHz, 18-VPP sine wave output amplitudes for the single THS3091 configuration and the load sharing configuration, respectively, measured using an oscilloscope. An ideal sine wave is also included as a visual reference (the dashed red line). [Figure 9-2](#) shows visible distortion in the single THS3091 output. In the load sharing configuration of [Figure 9-3](#), however, no obvious degradation is visible.

[Figure 9-4](#) and [Figure 9-5](#) show the 64-MHz sine wave outputs of the two configurations from [Figure 9-1](#). While the single THS3091 output is clearly distorted in [Figure 9-4](#), the output of the load sharing configuration in [Figure 9-5](#) shows only minor deviations from the ideal sine wave.

## 9.2.3 Application Curves

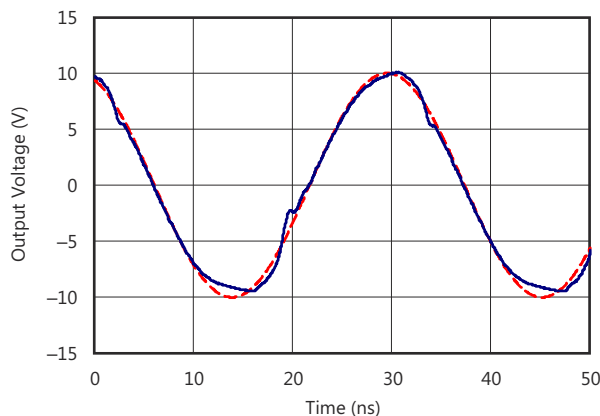


**Figure 9-2. 32-MHz Sine Wave Output (Gain = 5 V/V, Signal Amplitude Referred to Amplifier Output), Single THS3091 Circuit Configuration**

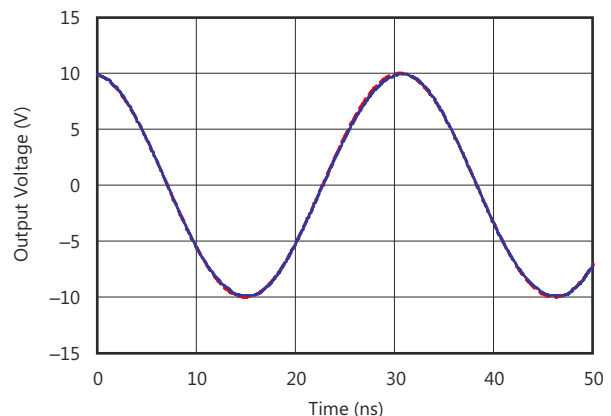


**Figure 9-3. 32-MHz Sine Wave Output (Gain = 5 V/V, Signal Amplitude Referred to Amplifier Output), Two THS3091 Amplifiers in Load Sharing Configuration**



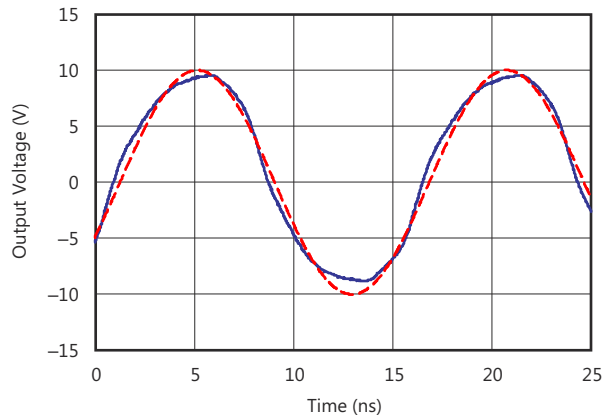

**FIG 9-4. 64-MHz Sine Wave Output (Gain = 5 V/V, Signal Amplitude Referred to Amplifier Output), Single THS3091 Circuit Configuration**

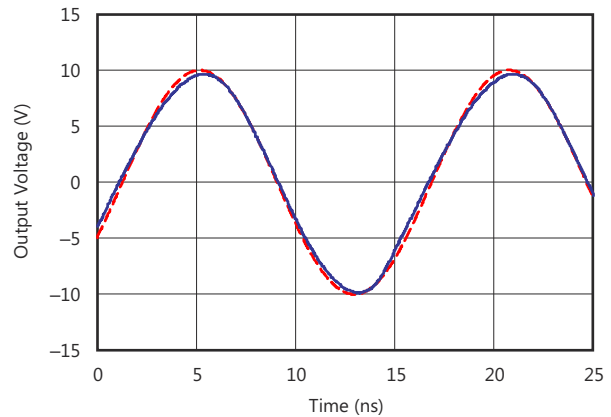

**FIG 9-5. 64-MHz Sine Wave Output (Gain = 5 V/V, Signal Amplitude Referred to Amplifier Output), Two THS3091 Amplifiers in Load Sharing Configuration**

### 9.3 Power Supply Recommendations

The THS3091 operates using a single or dual supply as long as the input CM voltage range (CMIR) has the required headroom to either supply rail. Operating from a single supply has numerous advantages. With the negative supply at ground, the dc errors due to the  $-PSRR$  term are minimized. Decouple the supplies with low-inductance, ceramic capacitors to ground less than 0.5 inches from the device pins. The use of a ground plane is recommended; as in most high-speed devices, remove the ground plane near device sensitive pins such as the inputs. For split-supply operation, an optional supply decoupling capacitor across the two power supplies improves second harmonic distortion performance.

## 9.4 Layout

### 9.4.1 Layout Guidelines

To optimize performance with a high-frequency amplifier, such as the THS309x, pay careful attention to board layout parasitic and external component types.

Recommendations to optimize performance include the following:


- Minimize parasitic capacitance to any ac ground for all of the signal I/O pins. Parasitic capacitance on the output and input pins can cause instability. To reduce unwanted capacitance, open a window around the signal I/O pins in all of the ground and power planes around those pins. Otherwise, keep ground and power planes unbroken elsewhere on the board.
- Minimize the distance [ $< 0.25$  inch (6.35 mm)] from the power supply pins to the high-frequency 0.1- $\mu$ F and 100-pF decoupling capacitors. At the device pins, keep the ground and power plane layout away from the signal I/O pins. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. Always decouple the power-supply connections with these capacitors. Use larger (6.8  $\mu$ F or more) tantalum decoupling capacitors, effective at lower frequency, on the main supply pins. The decoupling capacitors can be placed somewhat farther from the device, and can be shared among several devices in the same area of the printed circuit board (PCB).
- Connections to other wideband devices on the board can be made with short direct traces or through onboard transmission lines. For short connections, consider the trace and the input to the next device as a lumped capacitive load. Use relatively wide traces [0.05 inch (1.3 mm) to 0.1 inch (2.54 mm)], preferably with ground and power planes opened up around the traces. Estimate the total capacitive load and determine if isolation resistors on the outputs are necessary. Low-parasitic capacitive loads ( $< 4$  pF) may not need an  $R_{ISO}$  because the THS309x are nominally compensated to operate with a 2-pF parasitic load. Higher parasitic capacitive loads without an  $R_{ISO}$  are allowed as the signal gain increases (increasing the unloaded phase margin).

#### 9.4.1.1 PowerPAD Design Considerations

The THS309x are available in a thermally-enhanced PowerPAD family of packages. These packages are constructed using a downset leadframe on which the die is mounted [see [Figure 9-6\(a\)](#) and [Figure 9-6\(b\)](#)]. This arrangement results in the lead frame being exposed as a thermal pad on the underside of the package [see [Figure 9-6\(c\)](#)]. Because this thermal pad has direct thermal contact with the die, excellent thermal performance can be achieved by providing a good thermal path away from the thermal pad. Note that devices such as the THS309x have no electrical connection between the PowerPAD and the die.

The PowerPAD package allows for both assembly and thermal management in one manufacturing operation. During the surface-mount solder operation (when the leads are being soldered), the thermal pad can also be soldered to a copper area underneath the package. Through the use of thermal paths within this copper area, heat can be conducted away from the package into either a ground plane or other heat-dissipating device.


The PowerPAD package represents a breakthrough in combining the small area and ease of assembly of surface mount with the awkward mechanical methods of heatsinking.

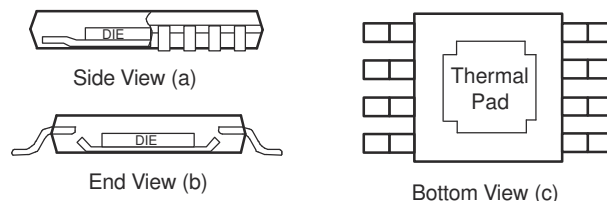


**Figure 9-6. Views of Thermal Enhanced Package**

Although there are many ways to properly heatsink the PowerPAD package, the following section lists the recommended steps.

#### 9.4.1.1.1 PowerPAD Layout Considerations

1.  9-7 shows a PCB with a top-side etch pattern. Place an etch for the leads as well as etch for the thermal pad.
2. Place 13 holes in the area of the thermal pad. The recommended holes size is 0.01 inch (0.254 mm) in diameter. Keep the holes small so that solder wicking through the holes is not a problem during reflow.
3. Additional vias can be placed anywhere along the thermal plane outside of the thermal pad area. These additional vias help dissipate the heat generated by the THS309x device. The additional vias can be larger than the 0.01-inch (0.254 mm) diameter vias directly under the thermal pad. The additional vias can be larger because these vias are not in the thermal pad area to be soldered so that wicking is not a problem.
4. Connect all holes to the internal ground plane. The PowerPAD is electrically isolated from the silicon and all leads. Therefore, connecting the PowerPAD to any potential voltage, such as  $V_{S-}$ , is acceptable because there is no electrical connection to the silicon.
5. When connecting these holes to the ground plane, do not use the typical web or spoke via connection methodology. Web connections have a high thermal resistance that is useful for slowing the heat transfer during soldering operations. This high thermal resistance makes the soldering of vias that have plane connections easier. In this application, however, low thermal resistance is desired for the most efficient heat transfer. Therefore, connect the holes under the THS309x PowerPAD package connection to the internal ground plane with a complete connection around the entire circumference of the plated-through hole.
6. On the top-side solder mask, leave the terminals of the package and the thermal pad area with the 13 holes exposed. On the bottom-side solder mask, cover the 13 holes of the thermal pad area. This guideline prevents solder from being pulled away from the thermal pad area during the reflow process.
7. Apply solder paste to the exposed thermal pad area and all of the device pins.
8. With these preparatory steps in place, the device is simply placed in position and run through the solder reflow operation as with any standard surface-mount component. This process results in a device that is properly installed.

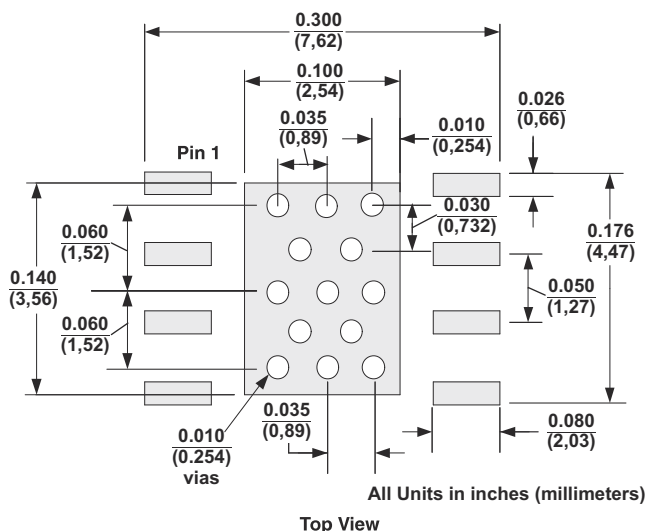

 9-7. DDA PowerPAD PCB Etch and Via Pattern

#### 9.4.1.2 Power Dissipation and Thermal Considerations

The THS309x incorporates automatic thermal shutoff protection. This protection circuitry shuts down the amplifier if the junction temperature exceeds approximately 160°C. When the junction temperature reduces to approximately 140°C, the amplifier turns on again. But, for maximum performance and reliability, the designer must ensure that the design does not exceed a junction temperature of 125°C. Between 125°C and 150°C, damage does not occur, but the performance of the amplifier begins to degrade and long-term reliability suffers. The thermal characteristics of the device are dictated by the package and the PCB. Maximum power dissipation for a given package is calculated using the following equation:

$$P_{Dmax} = \frac{T_{max} - T_A}{\theta_{JA}} \quad (6)$$


Where:

- $P_{Dmax}$  is the maximum power dissipation in the amplifier (W).
- $T_{max}$  is the absolute maximum junction temperature (°C)
- $T_A$  is the ambient temperature (°C)
- $\theta_{JA} = \theta_{JC} + \theta_{CA}$
- $\theta_{JC}$  is the thermal coefficient from the silicon junctions to the case (°C/W)
- $\theta_{CA}$  is the thermal coefficient from the case to ambient air (°C/W)


For systems where heat dissipation is more critical, the THS3091 and THS3095 are offered in an 8-pin SOIC (DDA) with PowerPAD package. The thermal coefficient for the PowerPAD packages are substantially improved over the traditional SOIC. The data for the PowerPAD packages assume a board layout that follows the PowerPAD layout guidelines referenced above and detailed in the [PowerPAD™ Thermally Enhanced Package application note](#). If the PowerPAD is not soldered to the PCB, then the thermal impedance increases substantially, which can cause serious heat and performance issues. Be sure to always solder the PowerPAD to the PCB to optimize performance.

When determining whether or not the device satisfies the maximum power-dissipation requirement, consider not only quiescent power dissipation, but also dynamic power dissipation. Often times, dynamic power dissipation is difficult to quantify because the signal pattern is inconsistent, but an estimate of the RMS power dissipation can provide visibility into a possible problem.


## 9.4.2 Layout Example

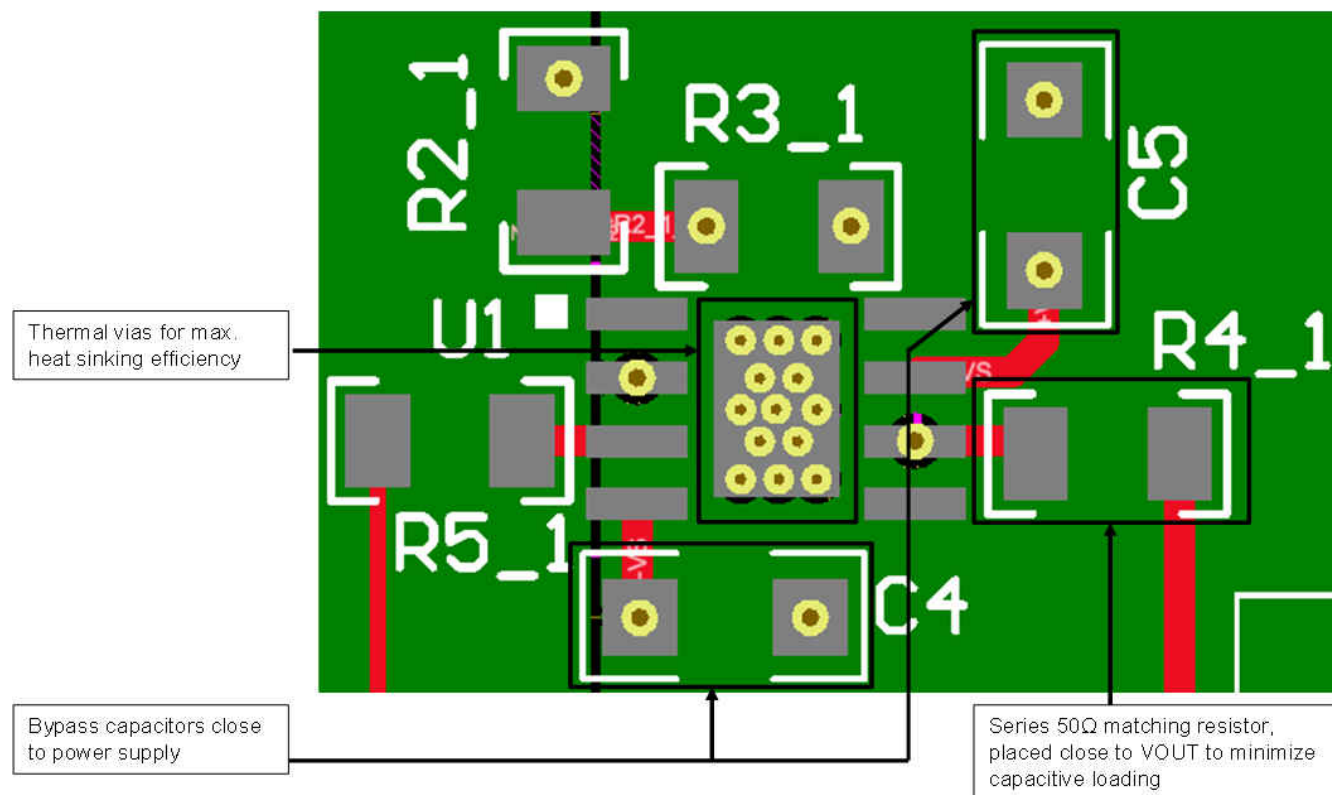


**9-8. Layout Recommendation**

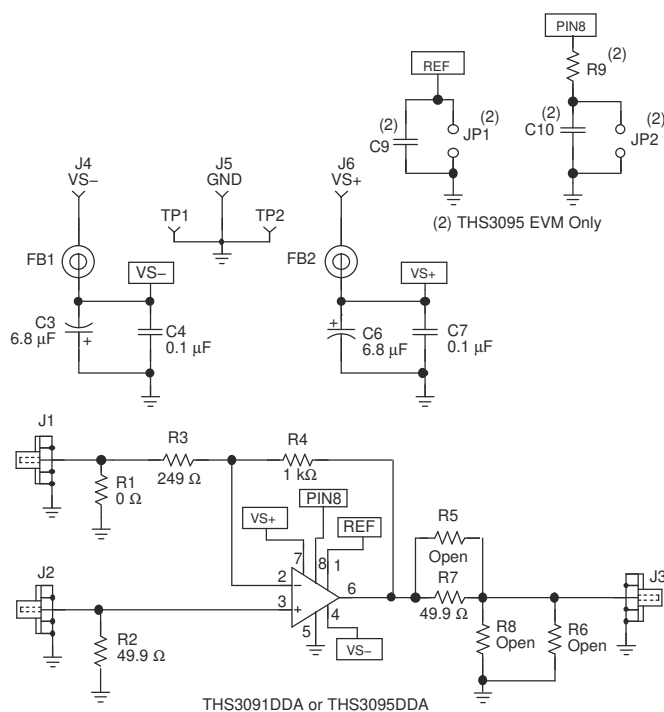


**9-9. THS3091 EVM Circuit Configuration**

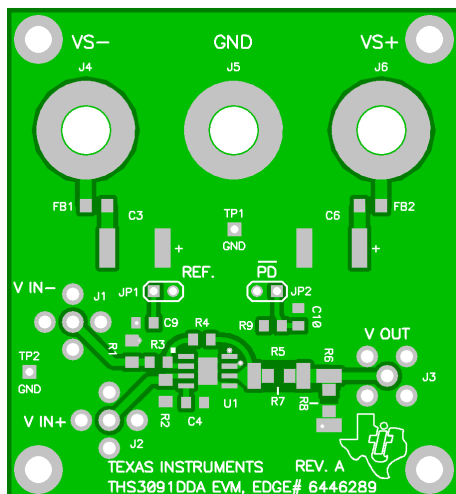

9-10. THS3091 EVM Board Layout (Top Layer)

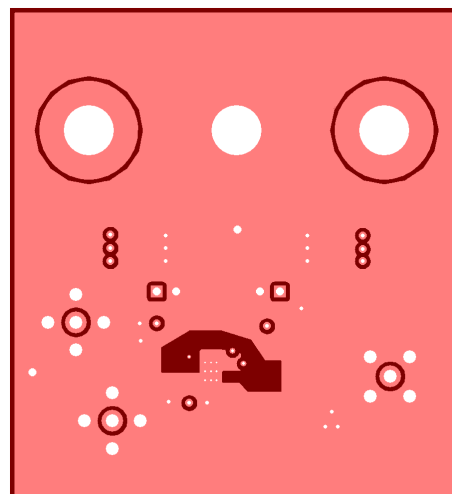

9-11. THS3091 EVM Board Layout (Second and Third Layers)

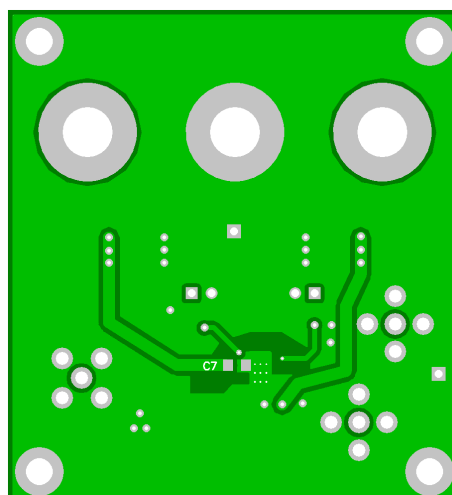

9-12. THS3091 EVM Board Layout (Bottom Layer)

## 10 Device and Documentation Support

### 10.1 Device Support

#### 10.1.1 Development Support

- [TIDA-00684: High-Bandwidth Arbitrary Waveform Generator Reference Design: DC or AC coupled, High-Voltage output](#)
- [TIDA-00075: Wide-Bandwidth and High-Voltage Arbitrary Waveform Generator Front End](#)
- [TIDA-00023: Reference Design for Implementation of the Load Sharing Concept for Large-Signal Applications](#)

### 10.2 Documentation Support

#### 10.2.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [PowerPAD™ Made Easy application brief](#)
- Texas Instruments, [PowerPAD™ Thermally Enhanced Package technical brief](#)
- Texas Instruments, [Voltage Feedback vs Current Feedback Amplifiers application note](#)
- Texas Instruments, [Current Feedback Analysis and Compensation application note](#)
- Texas Instruments, [Current Feedback Amplifiers: Review, Stability, and Application application note](#)
- Texas Instruments, [Effect of Parasitic Capacitance in Op Amp Circuits application note](#)
- Texas Instruments, [Expanding the Usability of Current-Feedback Amplifiers analog journal](#)

### 10.3 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](#) のデバイス製品フォルダを開いてください。「更新の通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 10.4 サポート・リソース

[TI E2E™ サポート・フォーラム](#)は、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

### 10.5 Trademarks

PowerPAD™ and TI E2E™ are trademarks of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

### 10.6 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

### 10.7 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">THS3091D</a>	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3091
THS3091D.A	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3091
<a href="#">THS3091DDA</a>	Obsolete	Production	SO PowerPAD (DDA)   8	-	-	Call TI	Call TI	-40 to 85	3091
<a href="#">THS3091DDAR</a>	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3091
THS3091DDAR.B	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3091
THS3091DDARG4	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3091
THS3091DDARG4.B	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3091
<a href="#">THS3091DR</a>	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3091
THS3091DR.A	Active	Production	SOIC (D)   8	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3091
<a href="#">THS3091IDGNR</a>	Active	Production	HVSSOP (DGN)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3091
THS3091IDGNR.B	Active	Production	HVSSOP (DGN)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3091
<a href="#">THS3095D</a>	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3095
THS3095D.A	Active	Production	SOIC (D)   8	75   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3095
<a href="#">THS3095DDA</a>	Obsolete	Production	SO PowerPAD (DDA)   8	-	-	Call TI	Call TI	-40 to 85	3095
<a href="#">THS3095DDAR</a>	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3095
THS3095DDAR.B	Active	Production	SO PowerPAD (DDA)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	3095

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS3091DR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
THS3091IDGNR	HVSSOP	DGN	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THS3091DR	SOIC	D	8	2500	350.0	350.0	43.0
THS3091IDGNR	HVSSOP	DGN	8	2500	353.0	353.0	32.0

## TUBE



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
THS3091D	D	SOIC	8	75	505.46	6.76	3810	4
THS3091D.A	D	SOIC	8	75	505.46	6.76	3810	4
THS3095D	D	SOIC	8	75	505.46	6.76	3810	4
THS3095D.A	D	SOIC	8	75	505.46	6.76	3810	4

## GENERIC PACKAGE VIEW

**DGN 8**

**PowerPAD™ HVSSOP - 1.1 mm max height**



**3 x 3, 0.65 mm pitch**

SMALL OUTLINE PACKAGE

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.



4225482/B

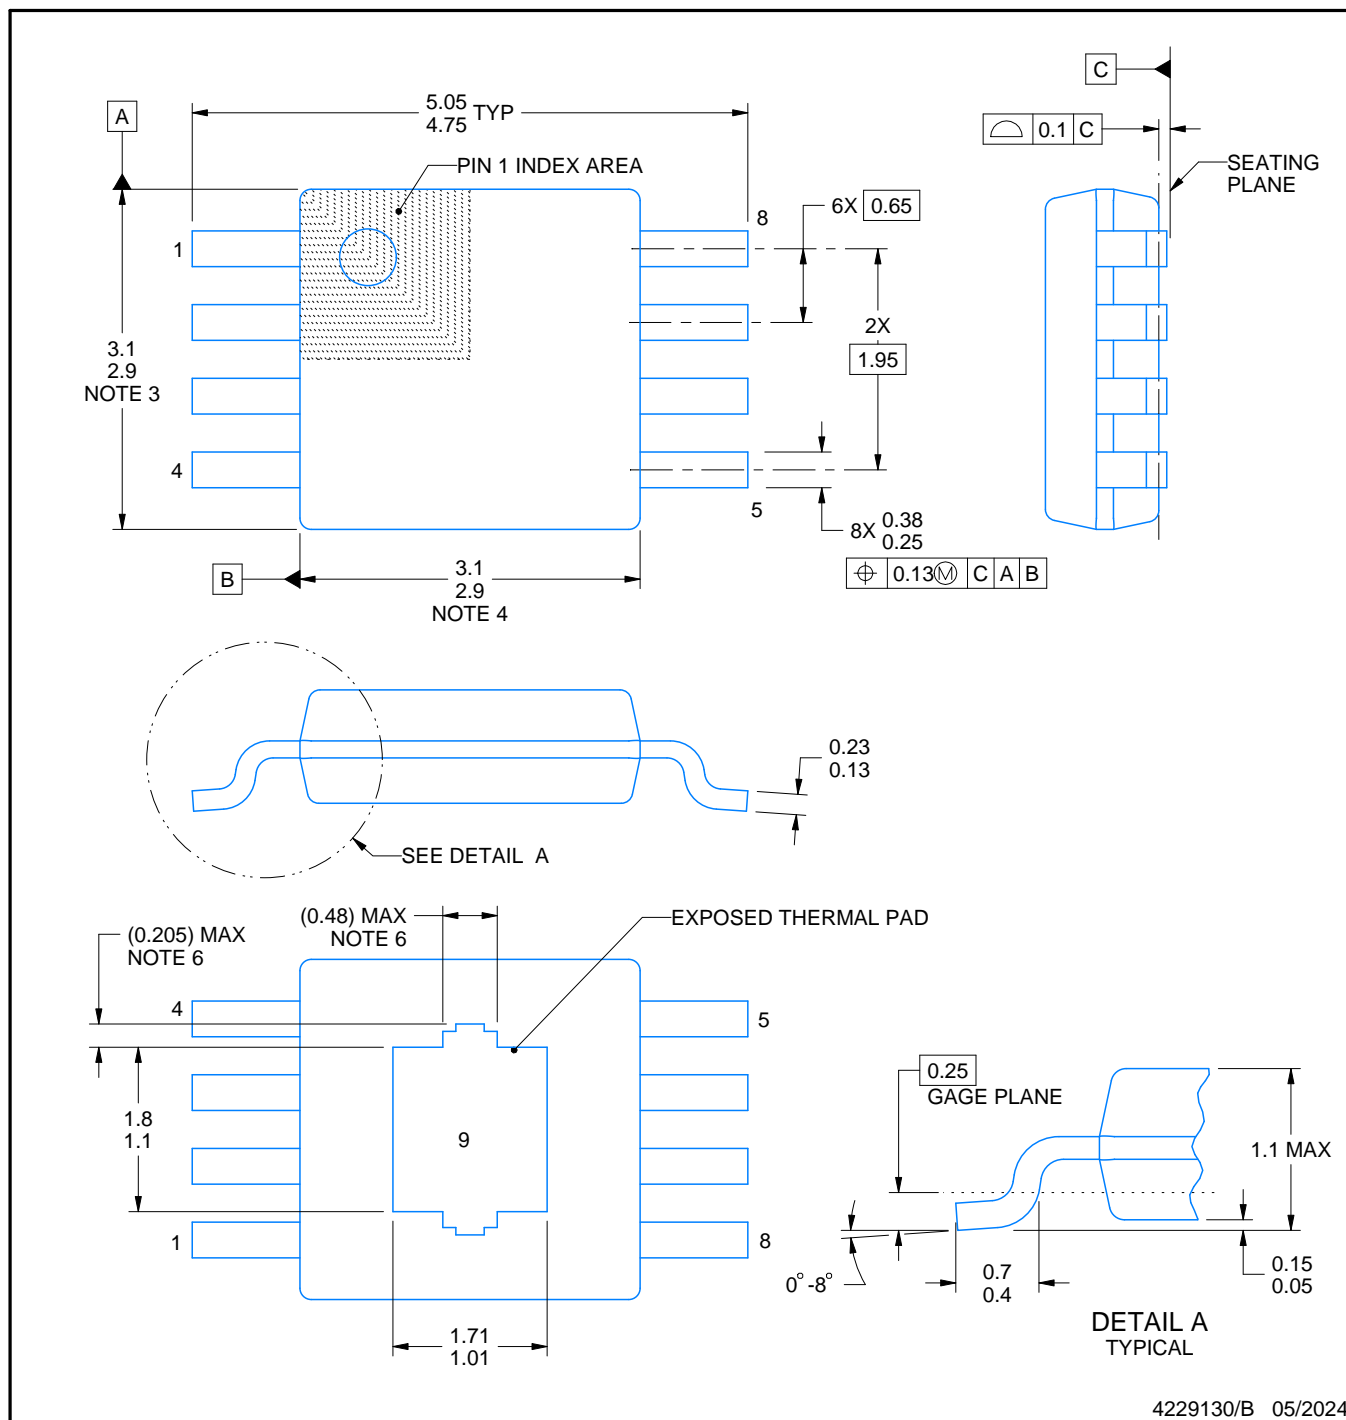

4229130/B 05/2024

## NOTES:

PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.
6. Features may differ or may not be present.




# EXAMPLE BOARD LAYOUT


DGN0008H

PowerPAD™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

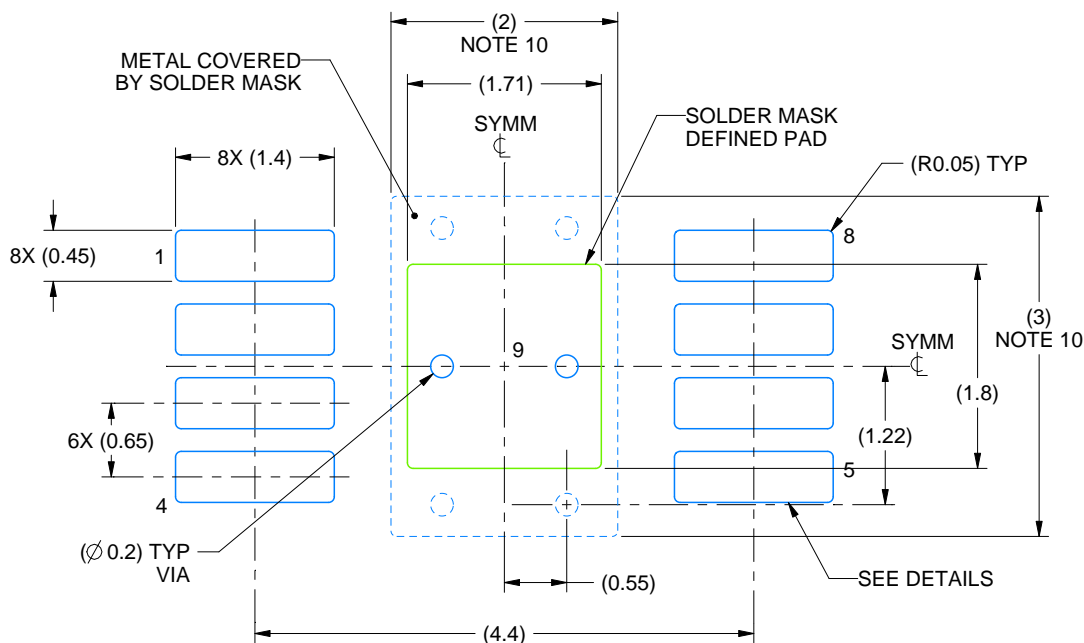

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X

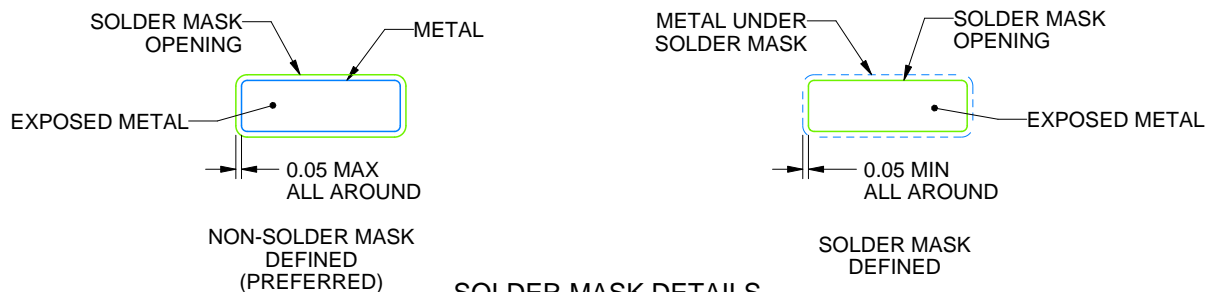

SOLDER MASK DETAILS

4229130/B 05/2024


NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.
8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
9. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
10. Size of metal pad may vary due to creepage requirement.

**DGN0008H**

# PowerPAD™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

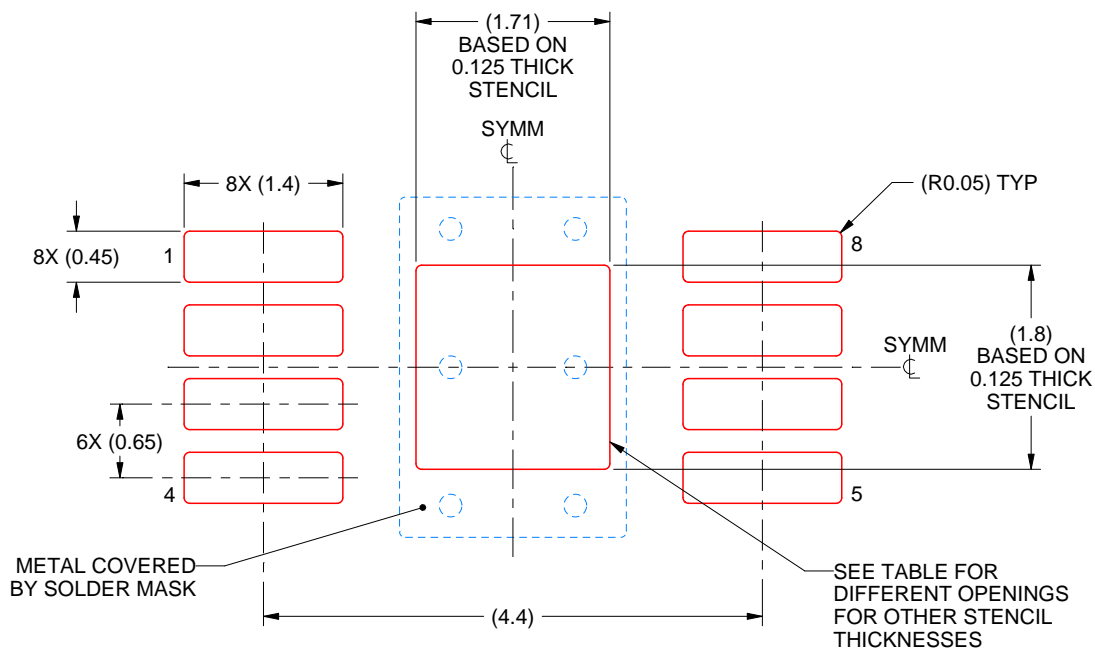

## SOLDER PASTE EXAMPLE

EXPOSED PAD 9:  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE: 15X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	1.91 X 2.01
0.125	1.71 X 1.80 (SHOWN)
0.15	1.56 X 1.64
0.175	1.45 X 1.52


4229130/B 05/2024

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.




Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

**DDA0008B**

# PACKAGE OUTLINE

## PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

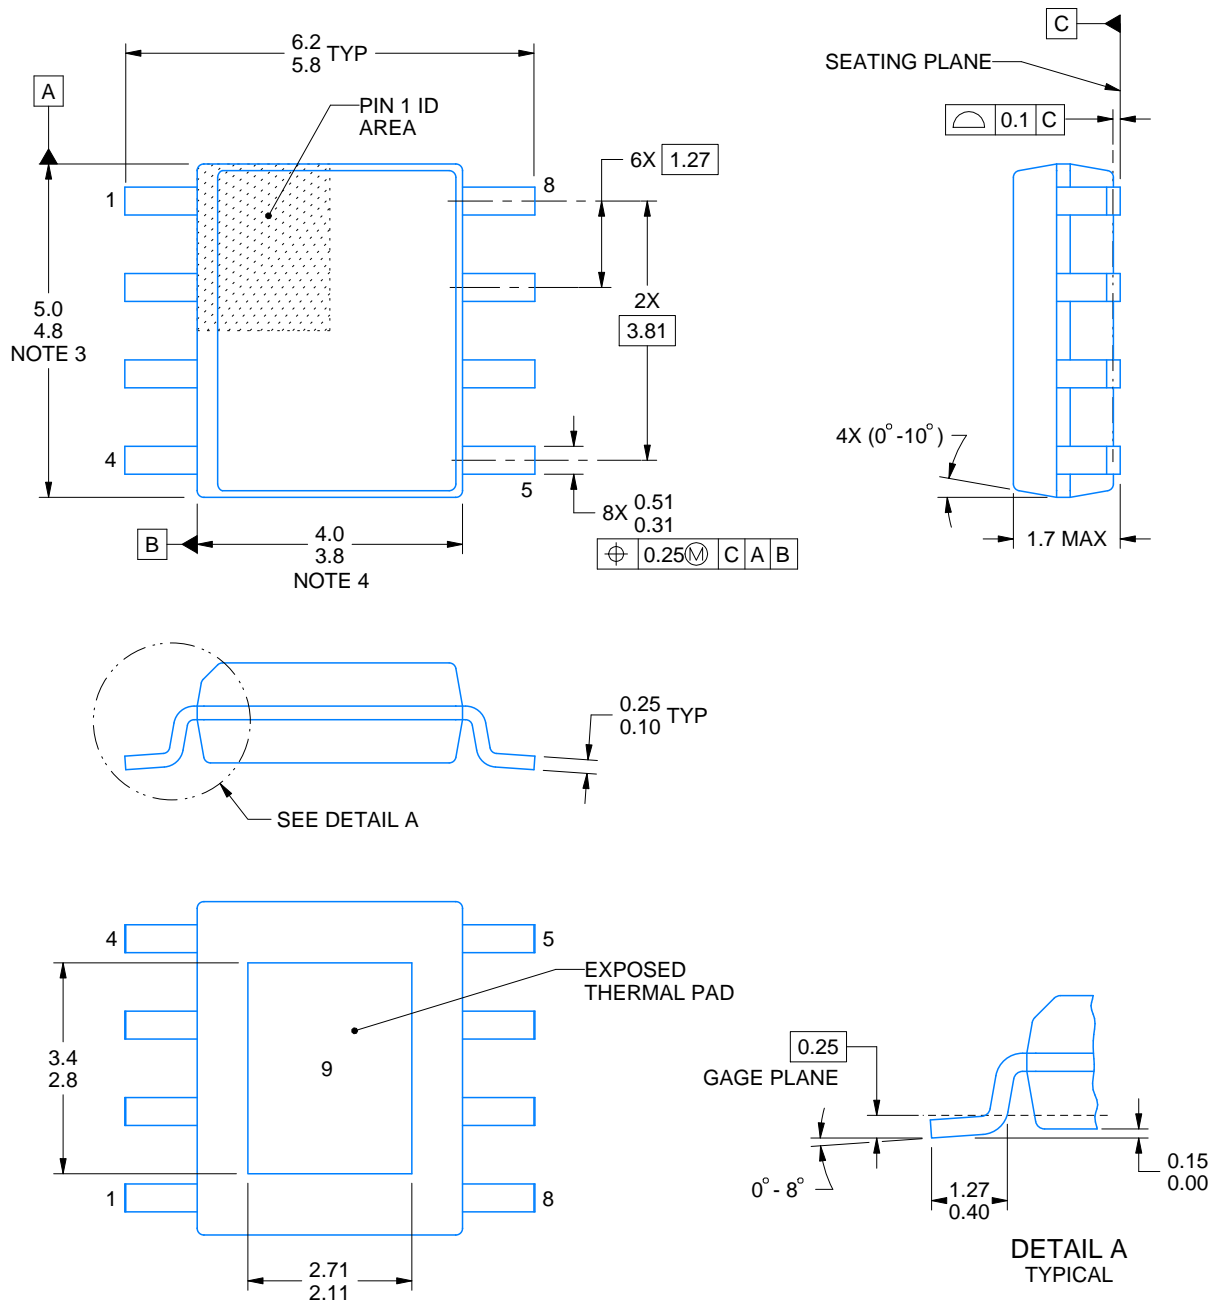

4214849/B 09/2025

**NOTES:**


PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MS-012.


**DDA0008B**

## PowerPAD™ SOIC - 1.7 mm max height

## PLASTIC SMALL OUTLINE

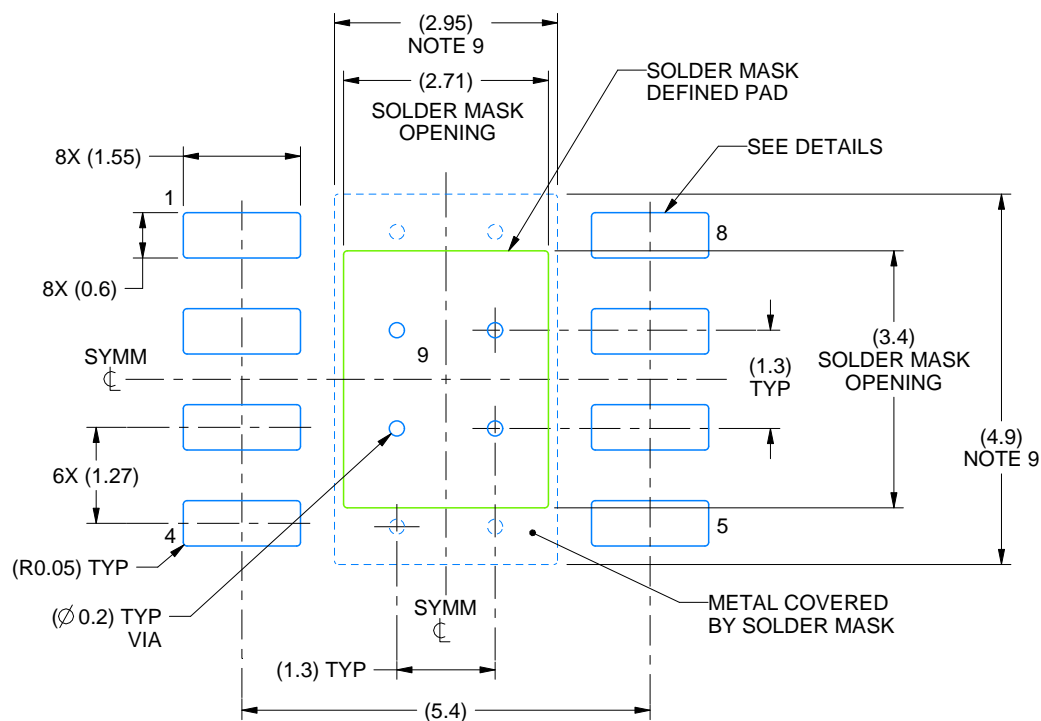

LAND PATTERN EXAMPLE  
SCALE:10X

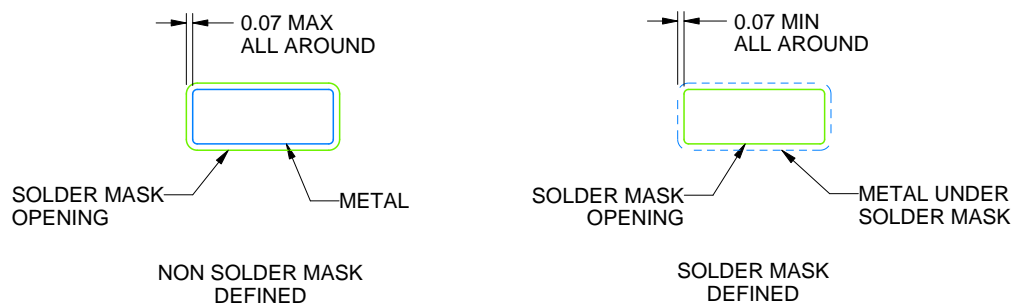

SOLDER MASK DETAILS  
PADS 1-8

4214849/B 09/2025

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 ([www.ti.com/lit/slma002](http://www.ti.com/lit/slma002)) and SLMA004 ([www.ti.com/lit/slma004](http://www.ti.com/lit/slma004)).
9. Size of metal pad may vary due to creepage requirement.
10. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

DDA0008B

PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

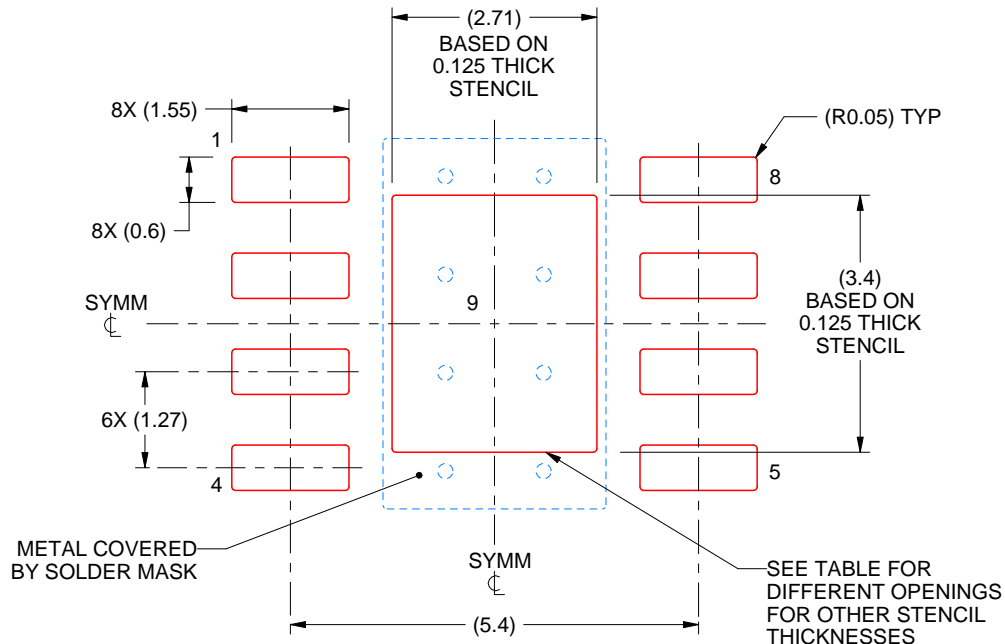

SOLDER PASTE EXAMPLE  
EXPOSED PAD  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE:10X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	3.03 X 3.80
0.125	2.71 X 3.40 (SHOWN)
0.150	2.47 X 3.10
0.175	2.29 X 2.87


4214849/B 09/2025

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

**D0008A****PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

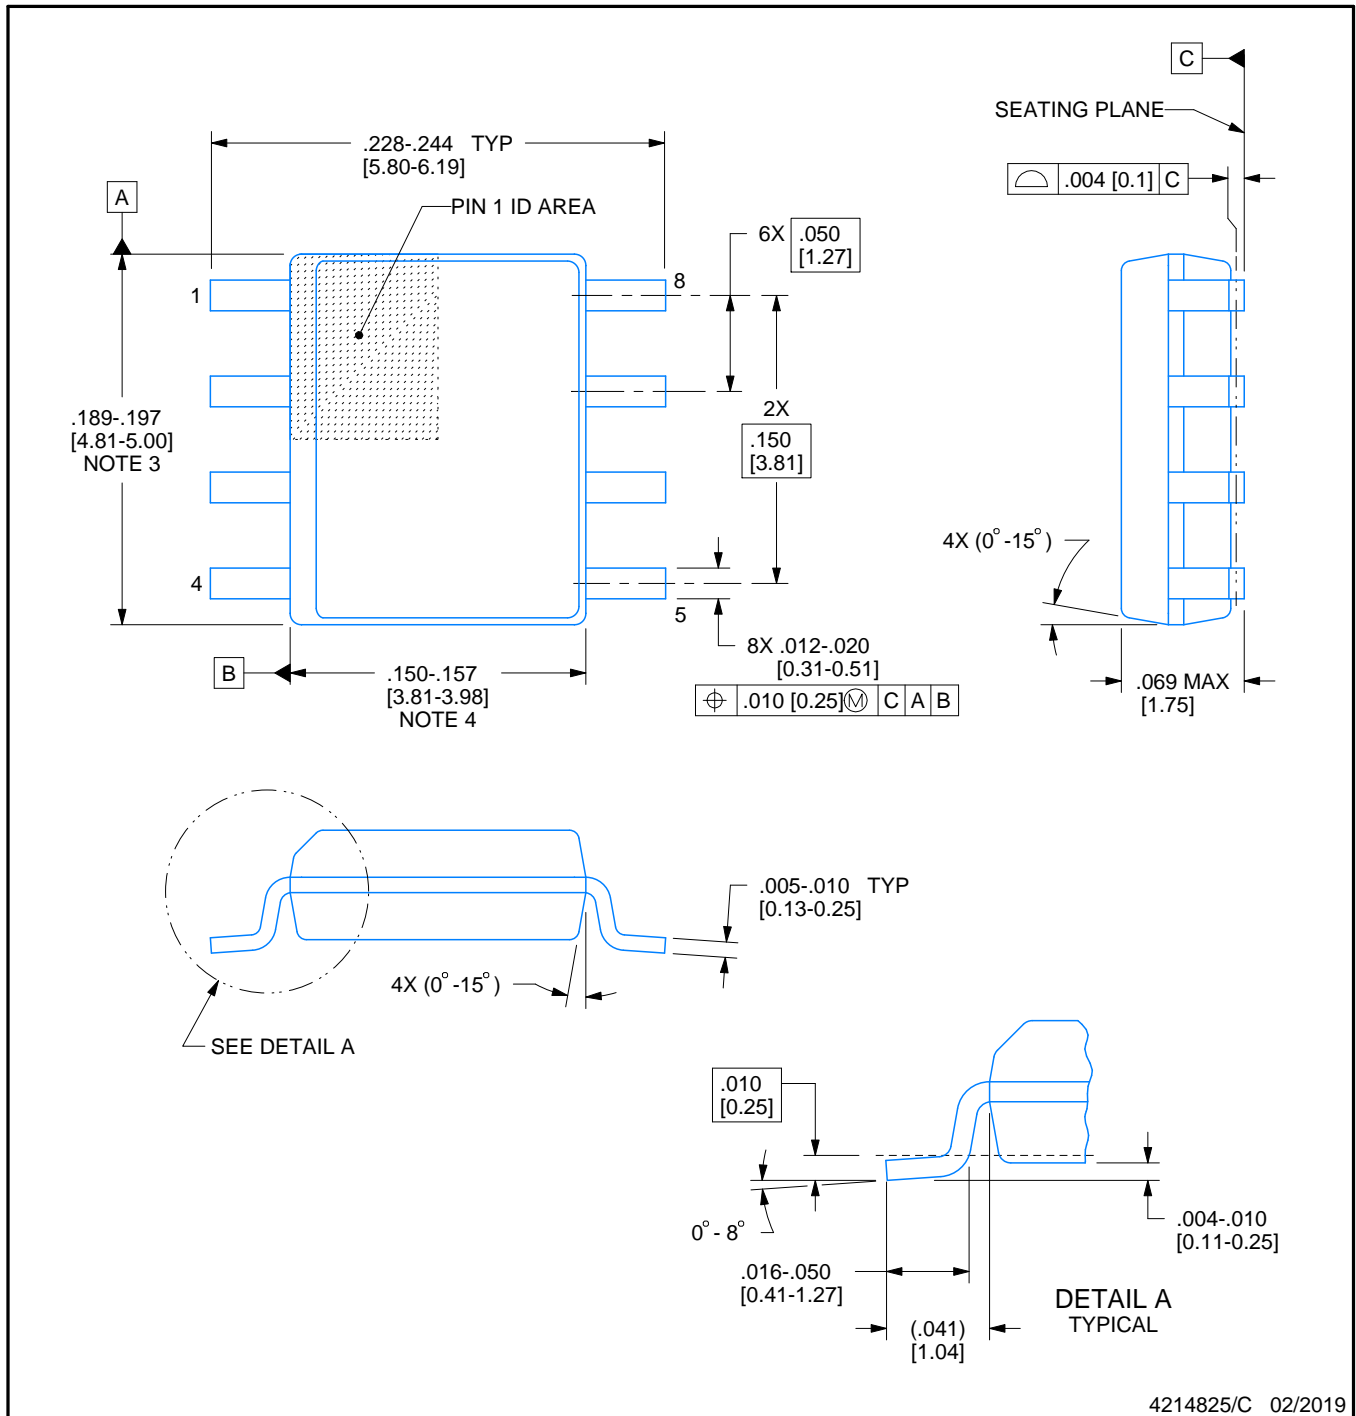

4214825/C 02/2019

**NOTES:**

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

**D0008A**

### SOIC - 1.75 mm max height

## SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



## SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](#) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月