

# bq24157 完全に統合されたUSB準拠およびUSB-OTGサポートの スイッチ・モード充電器

## 1 特長

- バッテリなしにシステムを起動
- リニア充電器よりも高速に充電
- 高精度の電圧および電流レギュレーション
  - 入力電流レギュレーション精度:  $\pm 5\%$  (100mAおよび500mA)
  - 充電電圧レギュレーション精度:  $\pm 0.5\%$  (25°C)、 $\pm 1\%$  (0°C~125°C)
  - 充電電流レギュレーション精度:  $\pm 5\%$
- 入力電圧ベースの動的電力管理(VIN DPM)
- 不良アダプタの検出および除去
- 安全制限レジスタによる最大充電電圧および電流の制限
- 単一セルのリチウムイオンおよびリチウムポリマー・バッテリー・パック用の、高効率のMini-USB/ACバッテリー充電器
- 入力電圧の絶対最大定格: 20V
- 最大動作入力電圧: 6.5V
- 入力電流センシングおよび制限を内蔵
- 最大1.55Aの充電電流に対応のPower FETを内蔵
- プログラム可能な充電パラメータ、 $I^2C^{\text{TM}}$  互換インターフェイス(最高3.4Mbps)使用:
  - 入力電流制限
  - VIN DPMスレッシュホールド
  - 高速充電/終了電流
  - 充電レギュレーション電圧(3.5V~4.44V)
  - 低充電電流モードの有効/無効化
  - 終了の有効/無効化
- 55mΩのセンシング抵抗を使用して、最大1.55Aの充電電流をサポート
- 同期固定周波数PWMコントローラ、3MHzで動作し、デューティ・サイクル0%~99.5%
- 自動高インピーダンス・モードによる低消費電力
- 堅牢な保護
  - 逆リーク保護によりバッテリー消耗を防止
  - サーマル・レギュレーションおよび保護
  - 入力/出力過電圧保護

- 充電およびフォルトのステータス出力
- USBフレンドリなブートアップ・シーケンス
- 自動充電
- USB OTG用のブースト・モード動作
  - 入力電圧範囲(バッテリーから): 3.2V~4.5V
- 2.1mm×2mmの20ピンWCSPパッケージ

## 2 アプリケーション

- 携帯電話、スマートフォン
- MP3プレーヤー
- ハンドヘルド機器

## 3 概要


bq24157は小型、柔軟、高効率、USBフレンドリのスイッチ・モード充電管理デバイスで、広範な携帯アプリケーションで使用される単一セルのリチウムイオンおよびリチウムポリマー・バッテリー用です。 $I^2C$ インターフェイスにより、充電パラメータをプログラムできます。このICは、同期PWMコントローラ、パワーMOSFET、入力電流センシング、高精度の電流および電圧レギュレーション、充電終了機能が、小型のWCSPパッケージに統合されています。

### 製品情報<sup>(1)</sup>

| 型番      | パッケージ       | 本体サイズ(公称)   |
|---------|-------------|-------------|
| bq24157 | WCSP (20ピン) | 2.1mm×2.0mm |

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

### 代表的なアプリケーション回路

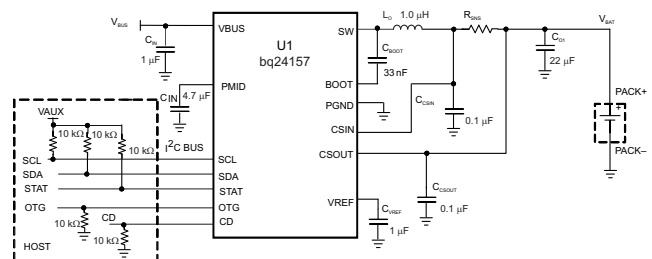

Copyright © 2016, Texas Instruments Incorporated

## 目次

|     |                                              |    |      |                                             |    |
|-----|----------------------------------------------|----|------|---------------------------------------------|----|
| 1   | 特長 .....                                     | 1  | 9.5  | Device Functional Modes.....                | 18 |
| 2   | アプリケーション .....                               | 1  | 9.6  | Programming .....                           | 23 |
| 3   | 概要 .....                                     | 1  | 9.7  | Register Description.....                   | 27 |
| 4   | 改訂履歴.....                                    | 2  | 10   | <b>Application and Implementation</b> ..... | 30 |
| 5   | 概要(続き).....                                  | 4  | 10.1 | Application Information.....                | 30 |
| 6   | <b>Device Comparisons</b> .....              | 4  | 10.2 | Typical Performance Curves.....             | 34 |
| 7   | <b>Pin Configuration and Functions</b> ..... | 5  | 11   | <b>Power Supply Recommendations</b> .....   | 36 |
| 8   | <b>Specifications</b> .....                  | 6  | 11.1 | System Load After Sensing Resistor .....    | 36 |
| 8.1 | Absolute Maximum Ratings .....               | 6  | 12   | <b>Layout</b> .....                         | 38 |
| 8.2 | ESD Ratings .....                            | 6  | 12.1 | Layout Guidelines .....                     | 38 |
| 8.3 | Recommended Operating Conditions.....        | 6  | 12.2 | Layout Example .....                        | 39 |
| 8.4 | Thermal Information .....                    | 6  | 13   | デバイスおよびドキュメントのサポート .....                    | 40 |
| 8.5 | Electrical Characteristics.....              | 7  | 13.1 | ドキュメントのサポート .....                           | 40 |
| 8.6 | Timing Requirements .....                    | 9  | 13.2 | ドキュメントの更新通知を受け取る方法.....                     | 40 |
| 8.7 | Typical Characteristics .....                | 10 | 13.3 | コミュニティ・リソース .....                           | 40 |
| 9   | <b>Detailed Description</b> .....            | 12 | 13.4 | 商標 .....                                    | 40 |
| 9.1 | Overview .....                               | 12 | 13.5 | 静電気放電に関する注意事項 .....                         | 40 |
| 9.2 | Functional Block Diagrams .....              | 13 | 13.6 | Glossary .....                              | 40 |
| 9.3 | Operational Flow Chart .....                 | 15 | 14   | メカニカル、パッケージ、および注文情報 .....                   | 40 |
| 9.4 | Feature Description.....                     | 16 | 14.1 | パッケージ概要 .....                               | 41 |

## 4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

| Revision D (July 2016) から Revision E に変更                                                                                                                           | Page |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • Changed Output voltage (with respect to PGND) - SW MIN value From: -0.7 To: -2 in the <i>Absolute Maximum Ratings</i> ...                                        | 6    |
| • Deleted graphs "Cycle by Cycle Current Limiting in Charge Mode" and "PWM Charging Waveform" from the <i>Typical Characteristics</i> .....                        | 10   |
| • Deleted list item "Default charge current will be 550 mA, if 68-mΩ sensing resistor is used, since default LOW_CHG = 0." following <a href="#">Table 8</a> ..... | 28   |

| Revision B (October 2013) から Revision C に変更                                                                                                                          | Page |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • 「ESD 定格」表、「タイミング要件」表、「機能説明」セクション、「デバイスの機能モード」セクション、「アプリケーションと実装」セクション、「電源に関する推奨事項」セクション、「レイアウト」セクション、「デバイスおよびドキュメントのサポート」セクション、「メカニカル、パッケージ、および注文情報」セクションを追加 ..... | 1    |
| • 特長を「最大1.25Aの充電電流に対応のPower FETを内蔵」から「最大1.55Aの充電電流に対応のPower FETを内蔵」に変更 ....                                                                                          | 1    |
| • Changed the I <sub>CHARGE(MAX)</sub> row of the <a href="#">Device Comparisons</a> table.....                                                                      | 4    |
| • Changed capacitor from 10-nF to 33-nF for BOOT pin in the <i>Pin Functions</i> table .....                                                                         | 5    |
| • Changed Note 1 in the <a href="#">Electrical Characteristics</a> table From: "While in 15-min mode" To: "While in DEFAULT mode".....                               | 7    |
| • Deleted "t <sub>15M</sub> , 15 minute safety timer" in the <a href="#">Electrical Characteristics</a> table .....                                                  | 7    |
| • Changed <a href="#">Figure 3</a> "15 Minute Mode" To: "DEFAULT Mode" and "32 S Mode" To: "HOST Mode" .....                                                         | 10   |
| • Changed <a href="#">Figure 8</a> text note From: "32S mode" To: "HOST MODE" .....                                                                                  | 10   |
| • Changed <a href="#">Figure 14</a> .....                                                                                                                            | 15   |
| • Added <a href="#">Battery Detection at Power Up in DEFAULT Mode</a> .....                                                                                          | 18   |
| • Changed section 15-Minute Safety Timer To: <a href="#">DEFAULT Mode</a> .....                                                                                      | 18   |
| • Added <a href="#">Figure 26</a> and <a href="#">Figure 27</a> .....                                                                                                | 34   |
| • Changed section title From: <i>Design considerations and potential issues</i> : To: <a href="#">Design Requirements and Potential Issues</a> : .....               | 36   |

**Revision A (March 2013) から Revision B に変更**
**Page**

- 
- Changed [Table 8](#) Memory location: 05, Bit B5 Function description from "... (default 0)" to ".... (default 1) ..... [28](#)
- 

**2012年9月発行のものから更新**
**Page**

- 
- 代表的なアプリケーション回路から、コンデンサ  $C_{O2}$  を削除 ..... [1](#)
  - Deleted capacitor  $C_{O2}$  from [Figure 23](#) ..... [30](#)
-

## 5 概要(続き)

このICは、コンディショニング、定電流、および定電圧の3つのフェーズでバッテリーを充電します。入力電流は、ホストにより設定された値に自動的に制限されます。バッテリー電圧と、ユーザーが選択可能な最小電流レベルに基づいて、充電が終了します。リセット制御付きの安全タイマにより、I<sup>2</sup>Cインターフェイスの安全性バックアップが行われます。通常の動作時には、バッテリー電圧が内部スレッシュホールドよりも低下すると、ICは自動的に充電サイクルを再開し、入力電源が取り除かれると自動的にスリープ・モードまたは高インピーダンス・モードに移行します。I<sup>2</sup>Cインターフェイスを使用して、充電ステータスをホストへ通知できます。充電プロセスの間、ICは接合部温度(T<sub>J</sub>)を監視し、T<sub>J</sub>が約125°Cに上昇すると充電電流を低下させます。bq24157は、USB OTGデバイスに対応するため、バッテリー電圧を昇圧してVBUS (5.05V)を供給できます。このICは、20ピンのWCSPパッケージで供給されます。


## 6 Device Comparisons

| PART NUMBER                                                                                                                                       | bq24157                                |
|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| VOVP (V)                                                                                                                                          | 6.5                                    |
| D4 Pin Definition                                                                                                                                 | OTG                                    |
| I <sub>CHARGE(MAX)</sub> at POR in default mode with R <sub>(SNS)</sub> = 68 mΩ (55 mΩ) and OTG=High on bq24157(mA)                               | 325 (402)                              |
| I <sub>CHARGE(MAX)</sub> in HOST mode with R <sub>(SNS)</sub> = 68 mΩ (55 mΩ) and Safety Limit Register increased from default (A) <sup>(1)</sup> | 1.25 (1.55)                            |
| Output regulation voltage at POR (V)                                                                                                              | 3.54                                   |
| Boost Function                                                                                                                                    | Yes                                    |
| Input Current Limit in Default Mode                                                                                                               | 100 mA (OTG=LOW);<br>500 mA (OTG=High) |
| Battery Detection at Power Up                                                                                                                     | No                                     |
| I2C Address                                                                                                                                       | 6AH                                    |
| PN1 (bit4 of 03H)                                                                                                                                 | 1                                      |
| PN0 (bit3 of 03H)                                                                                                                                 | 0                                      |
| Safety Timer and WD Timer                                                                                                                         | Disabled                               |
| 100 ms Power Up Delay                                                                                                                             | No                                     |

(1) See Application Section for explanation and calculations on using different sense resistors.

## 7 Pin Configuration and Functions

**Pin Layout (20-Bump YFF Package)**  
bq24157  
(Top View)

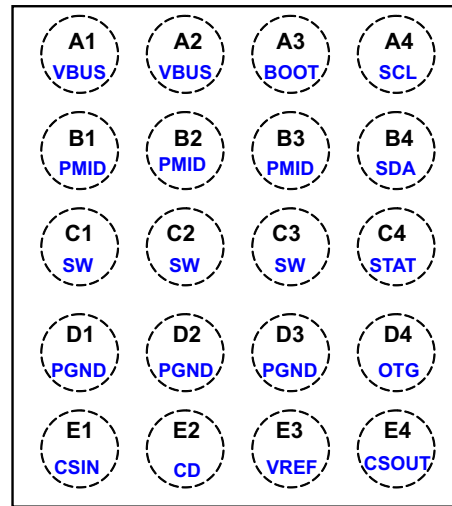

### Pin Functions

| PIN   |            | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------|------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME  | NO.        |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| BOOT  | A3         | I/O | Bootstrap capacitor connection for the high-side FET gate driver. Connect a 33-nF ceramic capacitor (voltage rating $\geq 10$ V) from BOOT pin to SW pin.                                                                                                                                                                                                                                                                                                                                                |
| CD    | E2         | I   | Charge disable control pin. CD=0, charge is enabled. CD=1, charge is disabled and VBUS pin is high impedance to GND.                                                                                                                                                                                                                                                                                                                                                                                     |
| CSIN  | E1         | I   | Charge current-sense input. Battery current is sensed across an external sense resistor. A 0.1- $\mu$ F ceramic capacitor to PGND is required.                                                                                                                                                                                                                                                                                                                                                           |
| CSOUT | E4         | I   | Battery voltage and current sense input. Bypass it with a ceramic capacitor (minimum 0.1 $\mu$ F) to PGND if there are long inductive leads to battery.                                                                                                                                                                                                                                                                                                                                                  |
| OTG   | D4         | I   | Boost mode enable control or input current limiting selection pin. When OTG is in active status, the device is forced to operate in boost mode. It has higher priority over I <sup>2</sup> C control and can be disabled using the control register. At POR while in default mode, the OTG pin is used as the input current limiting selection pin. The I <sup>2</sup> C register is ignored at startup. When OTG=High, I <sub>IN_LIMIT</sub> = 500mA and when OTG = Low, I <sub>IN_LIMIT</sub> = 100mA. |
| PGND  | D1, D2, D3 |     | Power ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| PMID  | B1, B2, B3 | I/O | Connection point between reverse blocking FET and high-side switching FET. Bypass it with a minimum of 3.3- $\mu$ F capacitor from PMID to PGND.                                                                                                                                                                                                                                                                                                                                                         |
| SCL   | A4         | I   | I <sup>2</sup> C interface clock. Connect a 10-k $\Omega$ pullup resistor to 1.8V rail (V <sub>AUX</sub> = V <sub>CC_HOST</sub> )                                                                                                                                                                                                                                                                                                                                                                        |
| SDA   | B4         | I/O | I <sup>2</sup> C interface data. Connect a 10-k $\Omega$ pullup resistor to 1.8V rail (V <sub>AUX</sub> = V <sub>CC_HOST</sub> )                                                                                                                                                                                                                                                                                                                                                                         |
| STAT  | C4         | O   | Charge status pin. Pull low when charge in progress. Open drain for other conditions. During faults, a 128- $\mu$ s pulse is sent out. STAT pin can be disabled by the EN_STAT bit in control register. STAT can be used to drive a LED or communicate with a host processor.                                                                                                                                                                                                                            |
| SW    | C1, C2, C3 | O   | Internal switch to output inductor connection.                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| VBUS  | A1, A2     | I/O | Charger input voltage. Bypass it with a 1- $\mu$ F ceramic capacitor from VBUS to PGND. It also provides power to the load during boost mode.                                                                                                                                                                                                                                                                                                                                                            |
| VREF  | E3         | O   | Internal bias regulator voltage. Connect a 1 $\mu$ F ceramic capacitor from this output to PGND. External load on VREF is not recommended.                                                                                                                                                                                                                                                                                                                                                               |

## 8 Specifications

### 8.1 Absolute Maximum Ratings<sup>(1) (2)</sup>

over operating free-air temperature range (unless otherwise noted)

|                                                                                 |                                               | MIN                 | MAX | UNIT |
|---------------------------------------------------------------------------------|-----------------------------------------------|---------------------|-----|------|
| Supply voltage (with respect to PGND <sup>(3)</sup> )                           | VBUS; $V_{PMID} \geq V_{BUS} - 0.3 \text{ V}$ | -2                  | 20  | V    |
| Input voltage (with respect to PGND <sup>(3)</sup> )                            | SCL, SDA, OTG, SLRST, CSIN, CSOUT, CD         | -0.3                | 7   | V    |
| Output voltage (with respect to PGND <sup>(3)</sup> )                           | PMID, STAT                                    | -0.3                | 20  | V    |
|                                                                                 | VREF                                          | 7                   |     | V    |
|                                                                                 | BOOT                                          | -0.7                | 20  | V    |
|                                                                                 | SW                                            | -2 <sup>(4)</sup>   | 20  | V    |
| Voltage difference between CSIN and CSOUT inputs ( $V_{(CSIN)} - V_{(CSOUT)}$ ) |                                               | $\pm 7$             |     | V    |
| Voltage difference between BOOT and SW inputs ( $V_{(BOOT)} - V_{(SW)}$ )       |                                               | -0.3                | 7   | V    |
| Voltage difference between VBUS and PMID inputs ( $V_{(VBUS)} - V_{(PMID)}$ )   |                                               | -7                  | 0.7 | V    |
| Voltage difference between PMID and SW inputs ( $V_{(PMID)} - V_{(SW)}$ )       |                                               | -0.7                | 20  | V    |
| Output sink                                                                     | STAT                                          | 10                  |     | mA   |
| Output Current (average)                                                        | SW                                            | 1.55 <sup>(2)</sup> |     | A    |
| $T_A$                                                                           | Operating free-air temperature range          | -30                 | 85  | °C   |
| $T_J$                                                                           | Junction temperature                          | -40                 | 125 | °C   |
| $T_{stg}$                                                                       | Storage temperature range                     | -45                 | 150 | °C   |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability. All voltage values are with respect to the network ground terminal unless otherwise noted.
- (2) Duty cycle for output current should be less than 50% for 10- year life time when output current is above 1.25A.
- (3) All voltages are with respect to PGND if not specified. Currents are positive into, negative out of the specified terminal, if not specified. Consult Packaging Section of the data sheet for thermal limitations and considerations of packages.
- (4) 20 ns duration

### 8.2 ESD Ratings

|             |                         | VALUE                                                                                    | UNIT       |
|-------------|-------------------------|------------------------------------------------------------------------------------------|------------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | $\pm 2000$ |
|             |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | $\pm 500$  |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 8.3 Recommended Operating Conditions

|           |                                      | MIN | NOM | MAX              | UNIT |
|-----------|--------------------------------------|-----|-----|------------------|------|
| $V_{BUS}$ | Supply voltage, bq24157              | 4   |     | 6 <sup>(1)</sup> | V    |
| $T_J$     | Operating junction temperature range | -40 |     | 125              | °C   |

- (1) The inherent switching noise voltage spikes should not exceed the absolute maximum rating on either the BOOST or SW pins. A *tight* layout minimizes switching noise.

### 8.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | bq24157       | UNIT |
|-------------------------------|----------------------------------------------|---------------|------|
|                               |                                              | YFF (20 Pins) |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 85            | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 25            | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 55            | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 4             | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 50            | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | n/a           | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 8.5 Electrical Characteristics

Circuit of [Figure 23](#), VBUS = 5 V, HZ\_MODE = 0, OPA\_MODE = 0 (CD = 0), T<sub>J</sub> = –40°C to 125°C, T<sub>J</sub> = 25°C for typical values (unless otherwise noted)

| PARAMETER                            |                                                                                                                                                                   | TEST CONDITIONS                                                                                                                                    |                               | MIN | TYP  | MAX  | UNIT |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----|------|------|------|
| INPUT CURRENTS                       |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| I <sub>(VBUS)</sub>                  | VBUS supply current control                                                                                                                                       | VBUS > VBUS(min), PWM switching                                                                                                                    | 10                            |     |      |      | mA   |
|                                      |                                                                                                                                                                   | VBUS > VBUS(min), PWM NOT switching                                                                                                                | 5                             |     |      |      |      |
|                                      |                                                                                                                                                                   | 0°C < T <sub>J</sub> < 85°C, CD=1 or HZ_MODE=1                                                                                                     | 15                            |     | 23   | μA   |      |
| I <sub>lgk</sub>                     | Leakage current from battery to VBUS pin                                                                                                                          | 0°C < T <sub>J</sub> < 85°C, V <sub>(CSOUT)</sub> = 4.2 V, High Impedance mode, VBUS = 0 V                                                         |                               |     | 5    |      | μA   |
|                                      | Battery discharge current in High Impedance mode, (CSIN, CSOUT, SW pins)                                                                                          | 0°C < T <sub>J</sub> < 85°C, V <sub>(CSOUT)</sub> = 4.2 V, High Impedance mode, V = 0 V, SCL, SDA, OTG = 0 V or 1.8 V                              |                               |     | 23   |      | μA   |
| VOLTAGE REGULATION                   |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| V <sub>(OREG)</sub>                  | Output regulation voltage programmable range                                                                                                                      | Operating in voltage regulation, programmable                                                                                                      | 3.5                           |     | 4.44 |      | V    |
|                                      | Voltage regulation accuracy                                                                                                                                       | T <sub>A</sub> = 25°C                                                                                                                              | −0.5%                         |     | 0.5% |      |      |
|                                      |                                                                                                                                                                   |                                                                                                                                                    | −1%                           |     | 1%   |      |      |
| CURRENT REGULATION (FAST CHARGE)     |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| I <sub>O(CHARGE)</sub>               | Output charge current programmable range                                                                                                                          | V <sub>(LOWV)</sub> ≤ V <sub>(CSOUT)</sub> < V <sub>(OREG)</sub> , VBUS > V <sub>(SLP)</sub> , R <sub>(SNS)</sub> = 68 mΩ, LOW_CHG=0, Programmable | 550                           |     | 1250 |      | mA   |
|                                      | Low charge current                                                                                                                                                | V <sub>(LOWV)</sub> ≤ V <sub>(CSOUT)</sub> < V <sub>(OREG)</sub> , VBUS > V <sub>(SLP)</sub> , R <sub>(SNS)</sub> = 68 mΩ, LOW_CHG=1, OTG=High     | 325                           |     | 350  |      | mA   |
|                                      | Regulation accuracy of the voltage across R <sub>(SNS)</sub> (for charge current regulation)<br>V <sub>(IREG)</sub> = I <sub>O(CHARGE)</sub> × R <sub>(SNS)</sub> | 37.4 mV ≤ V <sub>(IREG)</sub> < 44.2mV                                                                                                             | −3.5%                         |     | 3.5% |      |      |
|                                      |                                                                                                                                                                   | 44.2 mV ≤ V <sub>(IREG)</sub>                                                                                                                      | -3%                           |     | 3%   |      |      |
| WEAK BATTERY DETECTION               |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| V <sub>(LOWV)</sub>                  | Weak battery voltage threshold programmable range <sup>2 (1)</sup>                                                                                                | Adjustable using I <sup>2</sup> C control                                                                                                          | 3.4                           |     | 3.7  |      | V    |
|                                      | Weak battery voltage accuracy                                                                                                                                     |                                                                                                                                                    | −5%                           |     | 5%   |      |      |
|                                      | Hysteresis for V <sub>(LOWV)</sub>                                                                                                                                | Battery voltage falling                                                                                                                            | 100                           |     |      |      | mV   |
| CD, OTG and SLRST PIN LOGIC LEVEL    |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| V <sub>IL</sub>                      | Input low threshold level                                                                                                                                         |                                                                                                                                                    |                               |     | 0.4  |      | V    |
| V <sub>IH</sub>                      | Input high threshold level                                                                                                                                        |                                                                                                                                                    | 1.3                           |     |      |      | V    |
| I <sub>(bias)</sub>                  | Input bias current                                                                                                                                                | Voltage on control pin is 5 V                                                                                                                      |                               |     | 1.0  |      | μA   |
| CHARGE TERMINATION DETECTION         |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| I <sub>(TERM)</sub>                  | Termination charge current programmable range                                                                                                                     | V <sub>(CSOUT)</sub> > V <sub>(OREG)</sub> − V <sub>(RCH)</sub> , VBUS > V <sub>(SLP)</sub> , R <sub>(SNS)</sub> = 68 mΩ, Programmable             | 50                            |     | 400  |      | mA   |
|                                      | Regulation accuracy for termination current across R <sub>(SNS)</sub><br>V <sub>(IREG_TERM)</sub> = I <sub>O(TERM)</sub> × R <sub>(SNS)</sub>                     | 3.4 mV ≤ V <sub>(IREG_TERM)</sub> ≤ 6.8 mV                                                                                                         | −15%                          |     | 15%  |      |      |
|                                      |                                                                                                                                                                   | 6.8 mV < V <sub>(IREG_TERM)</sub> ≤ 17 mV                                                                                                          | −10%                          |     | 10%  |      |      |
|                                      |                                                                                                                                                                   | 17 mV < V <sub>(IREG_TERM)</sub> ≤ 27.2 mV                                                                                                         | −5.5%                         |     | 5.5% |      |      |
| BAD ADAPTOR DETECTION                |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| V <sub>IN(min)</sub>                 | Input voltage lower limit                                                                                                                                         | BAD ADAPTOR DETECTION                                                                                                                              | 3.6                           |     | 3.8  | 4    | V    |
|                                      | Hysteresis for V <sub>IN(min)</sub>                                                                                                                               | Input voltage rising                                                                                                                               | 100                           |     |      | 200  | mV   |
| I <sub>SHORT</sub>                   | Current source to GND                                                                                                                                             | During bad adaptor detection                                                                                                                       | 20                            |     | 30   | 40   | mA   |
| INPUT BASED DYNAMIC POWER MANAGEMENT |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| V <sub>IN_DPM</sub>                  | Input Voltage DPM threshold programmable range                                                                                                                    |                                                                                                                                                    | 4.2                           |     |      | 4.76 | V    |
|                                      | VIN DPM threshold accuracy                                                                                                                                        |                                                                                                                                                    | −3%                           |     |      | 1%   |      |
| INPUT CURRENT LIMITING               |                                                                                                                                                                   |                                                                                                                                                    |                               |     |      |      |      |
| I <sub>IN_LIMIT</sub>                | Input current limiting threshold                                                                                                                                  | I <sub>IN</sub> = 100 mA                                                                                                                           | T <sub>J</sub> = 0°C − 125°C  | 88  | 93   | 98   | mA   |
|                                      |                                                                                                                                                                   |                                                                                                                                                    | T <sub>J</sub> = −40°C −125°C | 86  | 93   | 98   |      |
|                                      |                                                                                                                                                                   | I <sub>IN</sub> = 500 mA                                                                                                                           | T <sub>J</sub> = 0°C − 125°C  | 450 | 475  | 500  | mA   |
|                                      |                                                                                                                                                                   |                                                                                                                                                    | T <sub>J</sub> = −40°C −125°C | 440 | 475  | 500  |      |

- (1) While in DEFAULT mode, if a battery that is charged to a voltage higher than this voltage is inserted, the charger enters Hi-Z mode and awaits I<sup>2</sup>C commands.

## Electrical Characteristics (continued)

Circuit of Figure 23, VBUS = 5 V, HZ\_MODE = 0, OPA\_MODE = 0 (CD = 0), T<sub>J</sub> = –40°C to 125°C, T<sub>J</sub> = 25°C for typical values (unless otherwise noted)

| PARAMETER                                                    |                                                                                      | TEST CONDITIONS                                                                                                            | MIN  | TYP   | MAX  | UNIT               |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------|-------|------|--------------------|
| VREF BIAS REGULATOR                                          |                                                                                      |                                                                                                                            |      |       |      |                    |
| V <sub>REF</sub>                                             | Internal bias regulator voltage                                                      | VBUS >V <sub>IN</sub> (min) or V <sub>(CSOUT)</sub> > VBUS(min),<br>I <sub>(VREF)</sub> = 1 mA, C <sub>(VREF)</sub> = 1 μF | 2    |       | 6.5  | V                  |
| V <sub>REF</sub> output short current limit                  |                                                                                      |                                                                                                                            |      | 30    |      | mA                 |
| BATTERY RECHARGE THRESHOLD                                   |                                                                                      |                                                                                                                            |      |       |      |                    |
| V <sub>(RCH)</sub>                                           | Recharge threshold voltage                                                           | Below V <sub>(OREG)</sub>                                                                                                  | 100  | 120   | 150  | mV                 |
| STAT OUTPUTS                                                 |                                                                                      |                                                                                                                            |      |       |      |                    |
| V <sub>OL</sub> (STAT)                                       | Low-level output saturation voltage, STAT pin                                        | I <sub>O</sub> = 10 mA, sink current                                                                                       |      |       | 0.55 | V                  |
|                                                              | High-level leakage current for STAT                                                  | Voltage on STAT pin is 5 V                                                                                                 |      |       | 1    | μA                 |
| I <sup>2</sup> C BUS LOGIC LEVELS AND TIMING CHARACTERISTICS |                                                                                      |                                                                                                                            |      |       |      |                    |
| V <sub>OL</sub>                                              | Output low threshold level                                                           | I <sub>O</sub> = 10 mA, sink current                                                                                       |      |       | 0.4  | V                  |
| V <sub>IL</sub>                                              | Input low threshold level                                                            | V <sub>(pull-up)</sub> = 1.8 V, SDA and SCL                                                                                |      |       | 0.4  | V                  |
| V <sub>IH</sub>                                              | Input high threshold level                                                           | V <sub>(pull-up)</sub> = 1.8 V, SDA and SCL                                                                                | 1.2  |       |      | V                  |
| I <sub>(BIAS)</sub>                                          | Input bias current                                                                   | V <sub>(pull-up)</sub> = 1.8 V, SDA and SCL                                                                                |      |       | 1    | μA                 |
| f <sub>(SCL)</sub>                                           | SCL clock frequency                                                                  |                                                                                                                            |      |       | 3.4  | MHz                |
| BATTERY DETECTION                                            |                                                                                      |                                                                                                                            |      |       |      |                    |
| I <sub>(DETECT)</sub>                                        | Battery detection current before charge done (sink current) <sup>(2)</sup>           | Begins after termination detected,<br>V <sub>(CSOUT)</sub> ≤ V <sub>(BATREG)</sub>                                         |      | −0.5  |      | mA                 |
| SLEEP COMPARATOR                                             |                                                                                      |                                                                                                                            |      |       |      |                    |
| V <sub>(SLP)</sub>                                           | Sleep-mode entry threshold,<br>VBUS − V <sub>CSOUT</sub>                             | 2.3 V ≤ V <sub>(CSOUT)</sub> ≤ V <sub>(BATREG)</sub> , V <sub>BUS</sub> falling                                            | 0    | 40    | 100  | mV                 |
| V <sub>(SLP_EXIT)</sub>                                      | Sleep-mode exit hysteresis                                                           | 2.3 V ≤ V <sub>(CSOUT)</sub> ≤ V <sub>(BATREG)</sub>                                                                       | 140  | 200   | 260  | mV                 |
| UNDERVOLTAGE LOCKOUT (UVLO)                                  |                                                                                      |                                                                                                                            |      |       |      |                    |
| UVLO                                                         | IC active threshold voltage                                                          | V <sub>BUS</sub> rising - Exits UVLO                                                                                       | 3.05 | 3.3   | 3.55 | V                  |
| UVLO <sub>(HYS)</sub>                                        | IC active hysteresis                                                                 | V <sub>BUS</sub> falling below UVLO - Enters UVLO                                                                          | 120  | 150   |      | mV                 |
| PWM                                                          |                                                                                      |                                                                                                                            |      |       |      |                    |
|                                                              | Voltage from BOOT pin to SW pin                                                      | During charge or boost operation                                                                                           |      |       | 6.5  | V                  |
|                                                              | Internal top reverse blocking MOSFET on-resistance                                   | I <sub>IN</sub> (LIMIT) = 500 mA, Measured from VBUS to PMID                                                               |      | 180   | 250  | mΩ                 |
|                                                              | Internal top N-channel Switching MOSFET on-resistance                                | Measured from PMID to SW,<br>V <sub>BOOT</sub> − V <sub>SW</sub> = 4V                                                      |      | 120   | 250  |                    |
|                                                              | Internal bottom N-channel MOSFET on-resistance                                       | Measured from SW to PGND                                                                                                   |      | 110   | 210  |                    |
| f <sub>(OSC)</sub>                                           | Oscillator frequency                                                                 |                                                                                                                            |      | 3.0   |      | MHz                |
|                                                              | Frequency accuracy                                                                   |                                                                                                                            | −10% |       | 10%  |                    |
| D <sub>(MAX)</sub>                                           | Maximum duty cycle                                                                   |                                                                                                                            |      | 99.5% |      |                    |
| D <sub>(MIN)</sub>                                           | Minimum duty cycle                                                                   |                                                                                                                            | 0    |       |      |                    |
|                                                              | Synchronous mode to non-synchronous mode transition current threshold <sup>(2)</sup> | Low-side MOSFET cycle-by-cycle current sensing                                                                             |      | 100   |      | mA                 |
| CHARGE MODE PROTECTION                                       |                                                                                      |                                                                                                                            |      |       |      |                    |
| V <sub>OVP_IN_USB</sub>                                      | Input VBUS OVP threshold voltage                                                     | VBUS threshold to turn off converter during charge                                                                         | 6.3  | 6.5   | 6.7  | V                  |
| V <sub>OVP</sub>                                             | Output OVP threshold voltage                                                         | V <sub>(CSOUT)</sub> threshold over V <sub>(OREG)</sub> to turn off charger during charge                                  | 110  | 117   | 121  | %V <sub>OREG</sub> |
|                                                              | V <sub>(OVP)</sub> hysteresis                                                        | Lower limit for V <sub>(CSOUT)</sub> falling from above V <sub>(OVP)</sub>                                                 |      | 11    |      |                    |
| I <sub>LIMIT</sub>                                           | Cycle-by-cycle current limit for charge                                              | Charge mode operation                                                                                                      | 1.8  | 2.4   | 3.0  | A                  |
| V <sub>SHORT</sub>                                           | Trickle to fast charge threshold                                                     | V <sub>(CSOUT)</sub> rising                                                                                                | 2.0  | 2.1   | 2.2  | V                  |
|                                                              | V <sub>SHORT</sub> hysteresis                                                        | V <sub>(CSOUT)</sub> falling below V <sub>SHORT</sub>                                                                      |      | 100   |      | mV                 |
| I <sub>SHORT</sub>                                           | Trickle charge charging current                                                      | V <sub>(CSOUT)</sub> ≤ V <sub>SHORT</sub>                                                                                  | 20   | 30    | 40   | mA                 |

(2) Bottom N-channel FET always turns on for ~30 ns and then turns off if current is too low.

## Electrical Characteristics (continued)

Circuit of Figure 23, VBUS = 5 V, HZ\_MODE = 0, OPA\_MODE = 0 (CD = 0), T<sub>J</sub> = –40°C to 125°C, T<sub>J</sub> = 25°C for typical values (unless otherwise noted)







| PARAMETER                                                                   |                                                                    | TEST CONDITIONS                                                                                 | MIN  | TYP  | MAX  | UNIT |
|-----------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|------|------|------|------|
| <b>BOOST MODE OPERATION FOR V<sub>BUS</sub> (OPA_MODE = 1, HZ_MODE = 0)</b> |                                                                    |                                                                                                 |      |      |      |      |
| V <sub>BUS_B</sub>                                                          | Boost output voltage (to VBUS pin)                                 | 2.5V < V <sub>(CSOUT)</sub> < 4.5 V                                                             |      | 5.05 |      | V    |
|                                                                             | Boost output voltage accuracy                                      | Including line and load regulation                                                              | –3%  |      | 3%   |      |
| I <sub>BO</sub>                                                             | Maximum output current for boost                                   | V <sub>BUS_B</sub> = 5.05 V, 2.5 V < V <sub>(CSOUT)</sub> < 4.5 V, T <sub>J</sub> = 0°C – 125°C | 200  |      |      | mA   |
| I <sub>BLIMIT</sub>                                                         | Cycle by cycle current limit for boost                             | V <sub>BUS_B</sub> = 5.05 V, 2.5 V < V <sub>(CSOUT)</sub> < 4.5 V                               |      | 1.0  |      | A    |
| V <sub>BUSOVP</sub>                                                         | Overvoltage protection threshold for boost (VBUS pin)              | Threshold over VBUS to turn off converter during boost                                          | 5.8  | 6.0  | 6.2  | V    |
|                                                                             | V <sub>BUSOVP</sub> hysteresis                                     | V <sub>BUS</sub> falling from above V <sub>BUSOVP</sub>                                         |      | 162  |      | mV   |
| V <sub>BATMAX</sub>                                                         | Maximum battery voltage for boost (CSOUT pin)                      | V <sub>(CSOUT)</sub> rising edge during boost                                                   | 4.75 | 4.9  | 5.05 | V    |
|                                                                             | V <sub>BATMAX</sub> hysteresis                                     | V <sub>(CSOUT)</sub> falling from above V <sub>BATMAX</sub>                                     |      | 200  |      | mV   |
| V <sub>BATMIN</sub>                                                         | Minimum battery voltage for boost (CSOUT pin)                      | During boosting                                                                                 |      | 2.5  |      | V    |
|                                                                             |                                                                    | Before boost starts                                                                             |      | 2.9  | 3.05 | V    |
|                                                                             | Boost output resistance at high-impedance mode (From VBUS to PGND) | CD = 1 or HZ_MODE = 1                                                                           | 217  |      |      | kΩ   |
| <b>PROTECTION</b>                                                           |                                                                    |                                                                                                 |      |      |      |      |
| T <sub>SHTDWN</sub>                                                         | Thermal trip                                                       |                                                                                                 |      | 165  |      | °C   |
|                                                                             | Thermal hysteresis                                                 |                                                                                                 |      | 10   |      |      |
| T <sub>CF</sub>                                                             | Thermal regulation threshold                                       | Charge current begins to reduce                                                                 |      | 120  |      |      |

## 8.6 Timing Requirements

|                                     |                                                                                   |                                                                                              | MIN | NOM | MAX | UNIT |
|-------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-----|-----|-----|------|
| <b>WEAK BATTERY DETECTION</b>       |                                                                                   |                                                                                              |     |     |     |      |
|                                     | Deglintch time for weak battery threshold                                         | Rising voltage, 2-mV over drive, t <sub>RISE</sub> = 100 ns                                  |     | 30  |     | ms   |
| <b>CHARGE TERMINATION DETECTION</b> |                                                                                   |                                                                                              |     |     |     |      |
|                                     | Deglintch time for charge termination                                             | Both rising and falling, 2-mV overdrive, t <sub>RISE</sub> , t <sub>FALL</sub> = 100 ns      |     | 30  |     | ms   |
| <b>BAD ADAPTOR DETECTION</b>        |                                                                                   |                                                                                              |     |     |     |      |
|                                     | Deglintch time for VBUS rising above V <sub>IN(min)</sub>                         | Rising voltage, 2-mV overdrive, t <sub>RISE</sub> = 100 ns                                   |     | 30  |     | ms   |
| t <sub>INT</sub>                    | Detection Interval                                                                | Input power source detection                                                                 |     | 2   |     | s    |
| <b>BATTERY RECHARGE THRESHOLD</b>   |                                                                                   |                                                                                              |     |     |     |      |
|                                     | Deglintch time                                                                    | V <sub>(CSOUT)</sub> decreasing below threshold, t <sub>FALL</sub> = 100 ns, 10-mV overdrive |     | 130 |     | ms   |
| <b>BATTERY DETECTION</b>            |                                                                                   |                                                                                              |     |     |     |      |
| t <sub>DETECT</sub>                 | Battery detection time                                                            |                                                                                              |     | 262 |     | ms   |
| <b>SLEEP COMPARATOR</b>             |                                                                                   |                                                                                              |     |     |     |      |
|                                     | Deglintch time for VBUS rising above V <sub>(SLP)</sub> + V <sub>(SLP_EXIT)</sub> | Rising voltage, 2-mV overdrive, t <sub>RISE</sub> = 100 ns                                   |     | 30  |     | ms   |
| <b>UNDERVOLTAGE LOCKOUT (UVLO)</b>  |                                                                                   |                                                                                              |     |     |     |      |
|                                     | Power up delay                                                                    |                                                                                              |     | 140 |     | ms   |

## 8.7 Typical Characteristics

Using circuit shown in Figure 23,  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

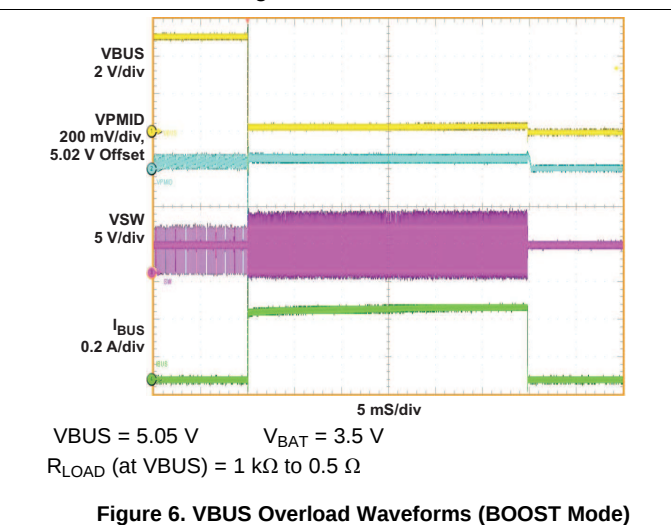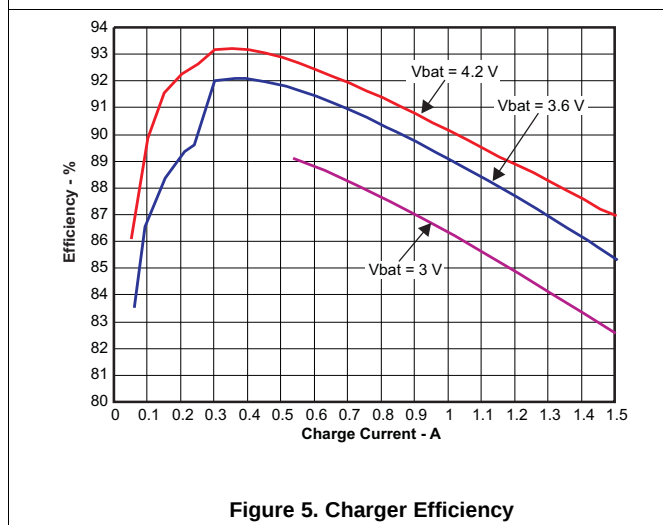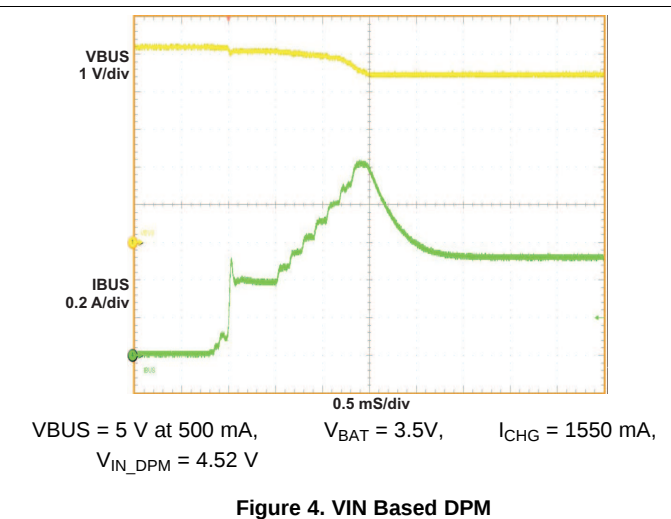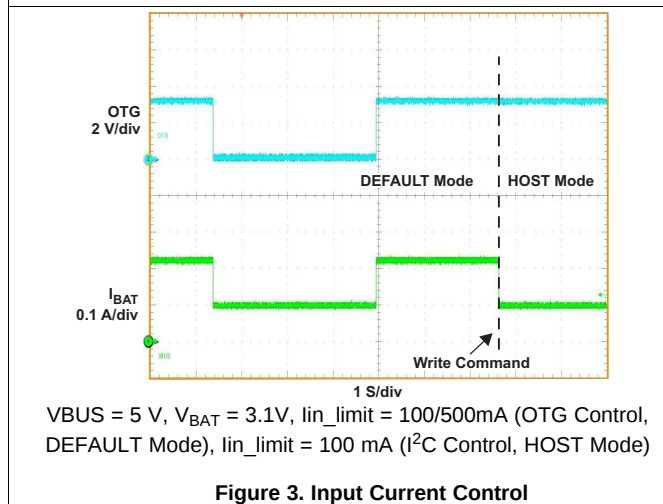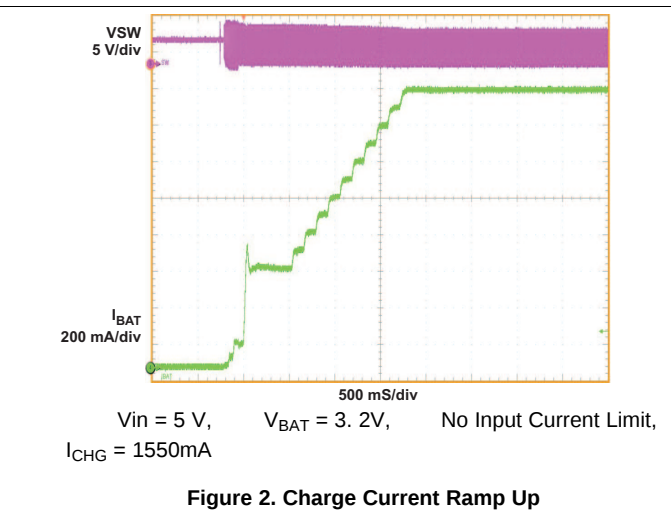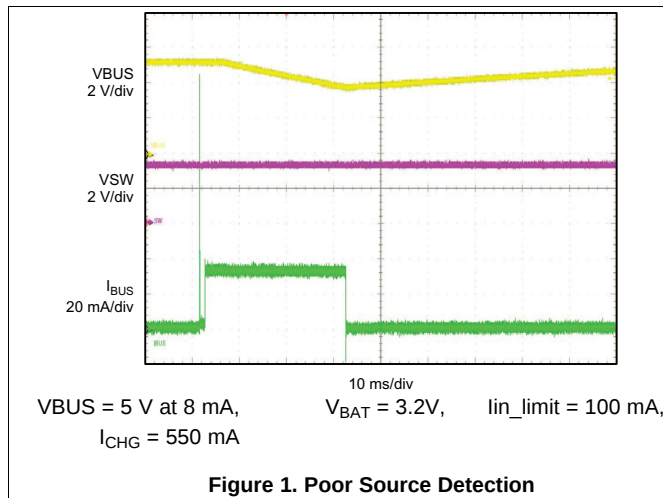

## Typical Characteristics (continued)

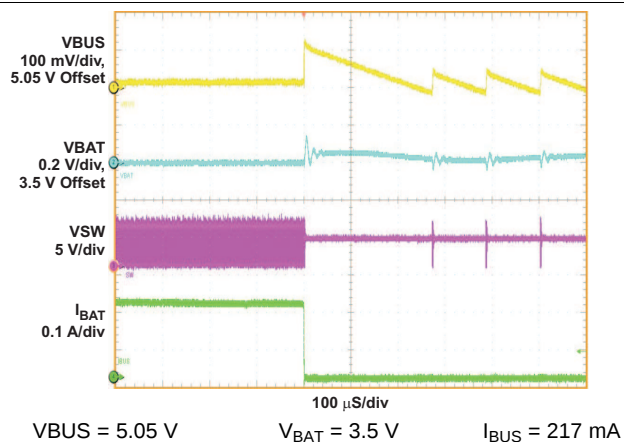


Figure 7. Load Step Down Response (BOOST Mode)

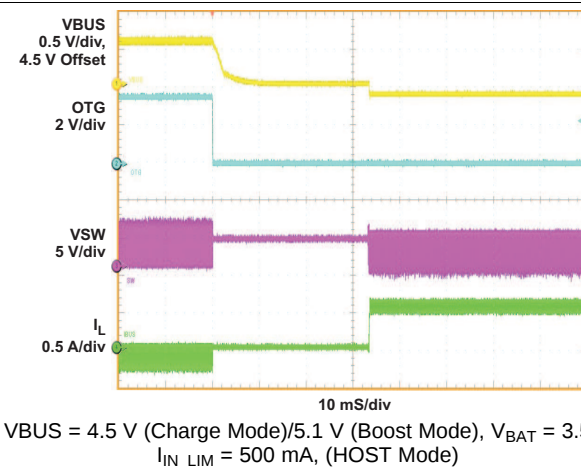


Figure 8. BOOST to Charge Mode Transition (OTG Control)

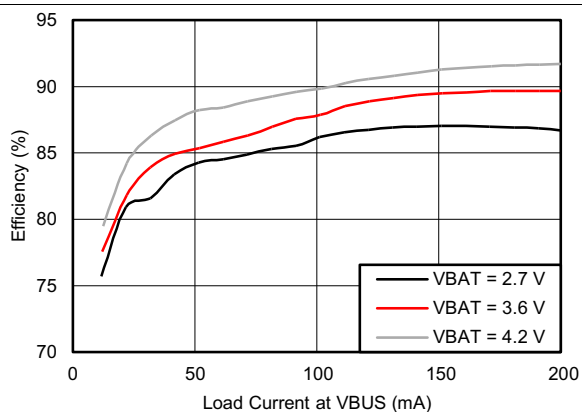


Figure 9. BOOST Efficiency

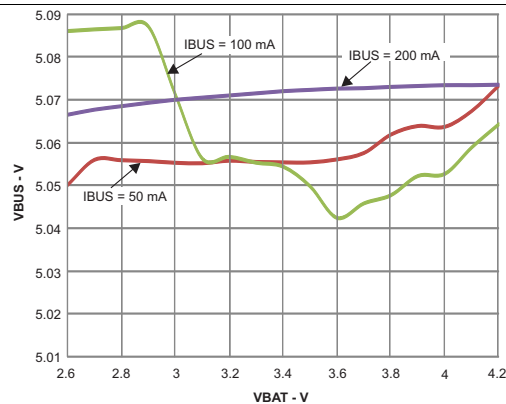


Figure 10. Line Regulation for BOOST

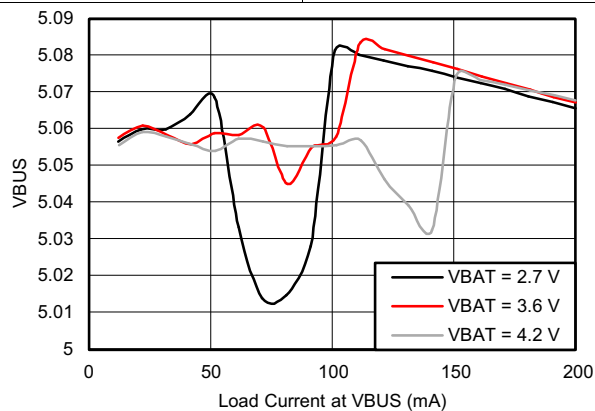


Figure 11. Load Regulation for BOOST

## 9 Detailed Description

### 9.1 Overview

For a current restricted power source, such as a USB host or hub, a high efficiency converter is critical to fully use the input power capacity for quickly charging the battery. Due to the high efficiency for a wide range of input voltages and battery voltages, the switch mode charger is a good choice for high speed charging with less power loss and better thermal management than a linear charger.

The bq24157 are highly integrated synchronous switch-mode chargers, featuring integrated FETs and small external components, targeted at extremely space-limited portable applications powered by 1-cell Li-Ion or Li-polymer battery pack. Furthermore, bq24157 also has bi-directional operation to achieve boost function for USB OTG support.

The bq24157 have three operation modes: charge mode, boost mode, and high impedance mode. In charge mode, the IC supports a precision Li-ion or Li-polymer charging system for single-cell applications. In boost mode, the IC boosts the battery voltage to VBUS for powering attached OTG devices. In high impedance mode, the IC stops charging or boosting and operates in a mode with very low current from VBUS or battery, to effectively reduce the power consumption when the portable device is in standby mode. Through I<sup>2</sup>C communication with a host, referred to as "HOST" control/mode, the IC achieves smooth transition among the different operation modes. Even when no I<sup>2</sup>C communication is available, the IC starts in default mode. During default mode operation, the charger will still charge the battery but using each register's default values.

## 9.2 Functional Block Diagrams



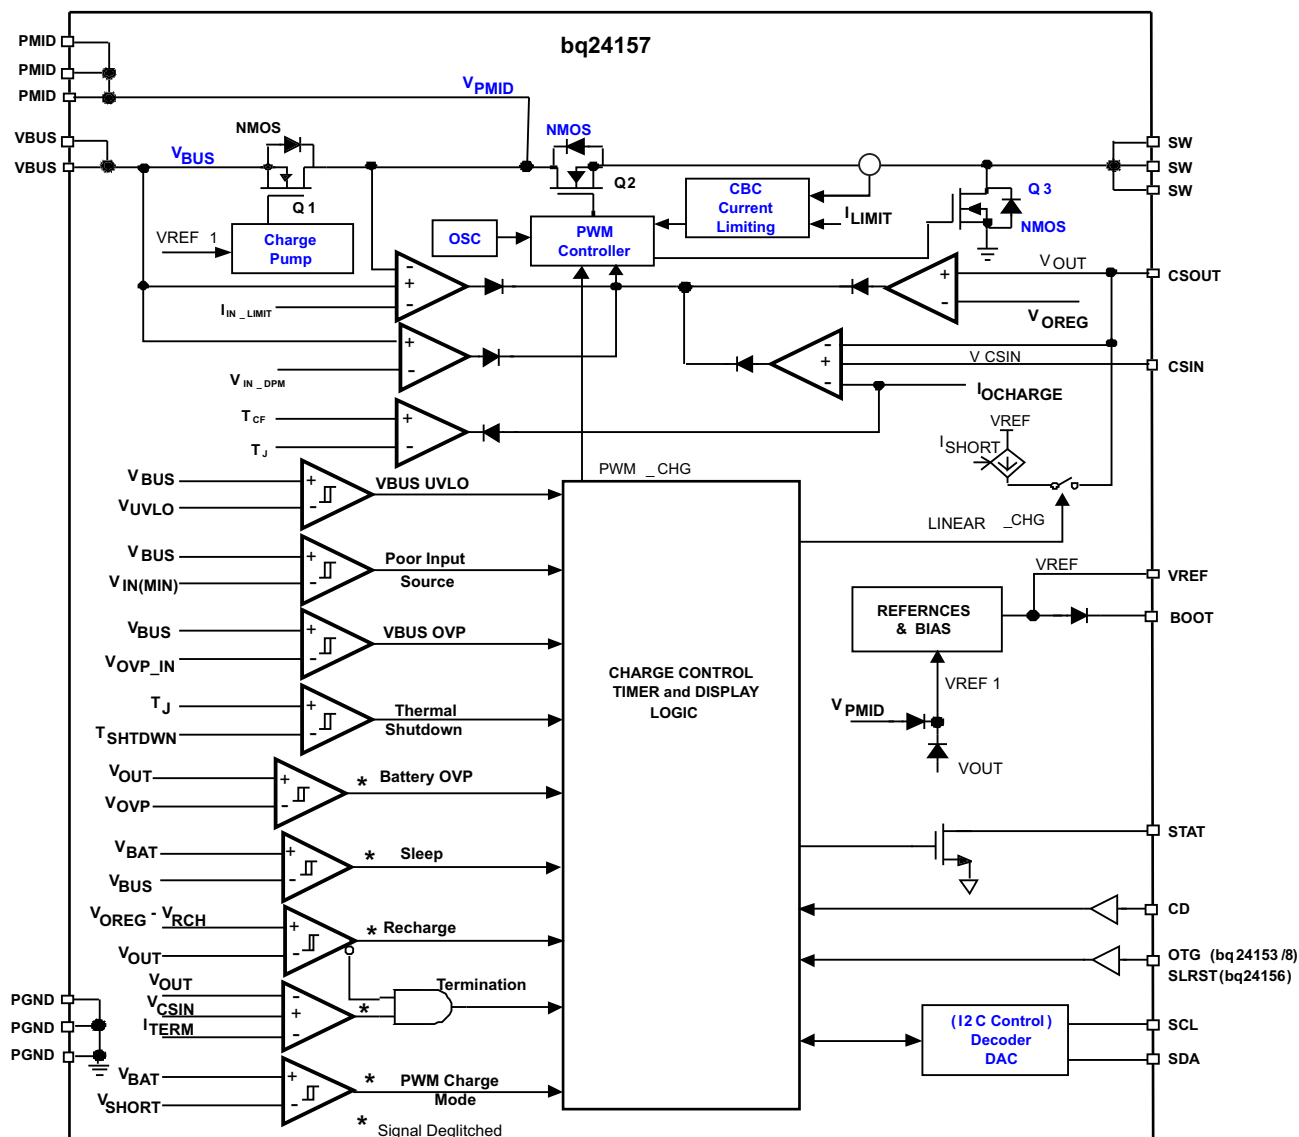


Figure 12. Function Block Diagram of bq2415x in Charge Mode

**Functional Block Diagrams (continued)**


**Figure 13. Function Block Diagram of bq2415x in Boost Mode**

### 9.3 Operational Flow Chart

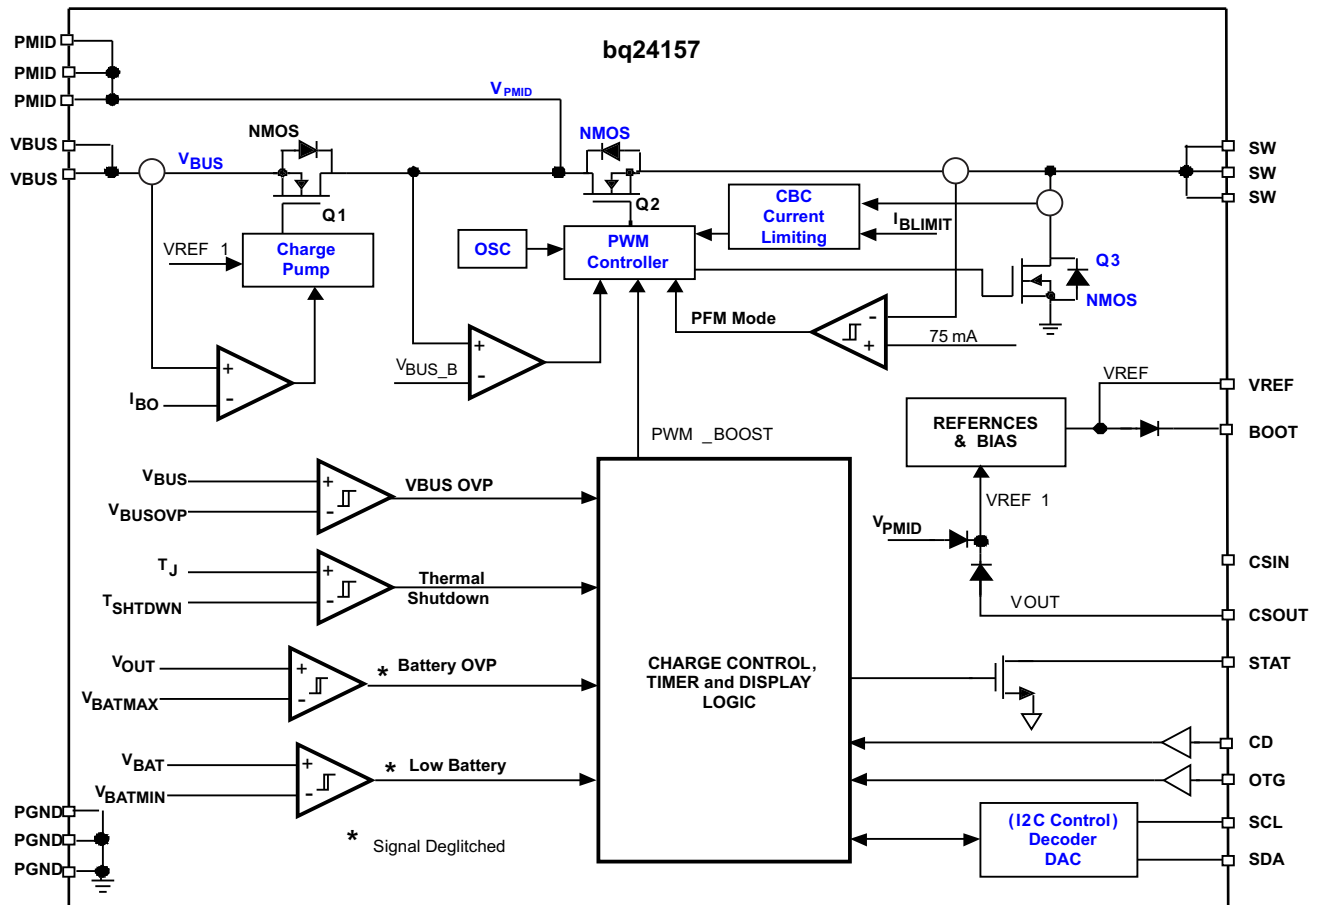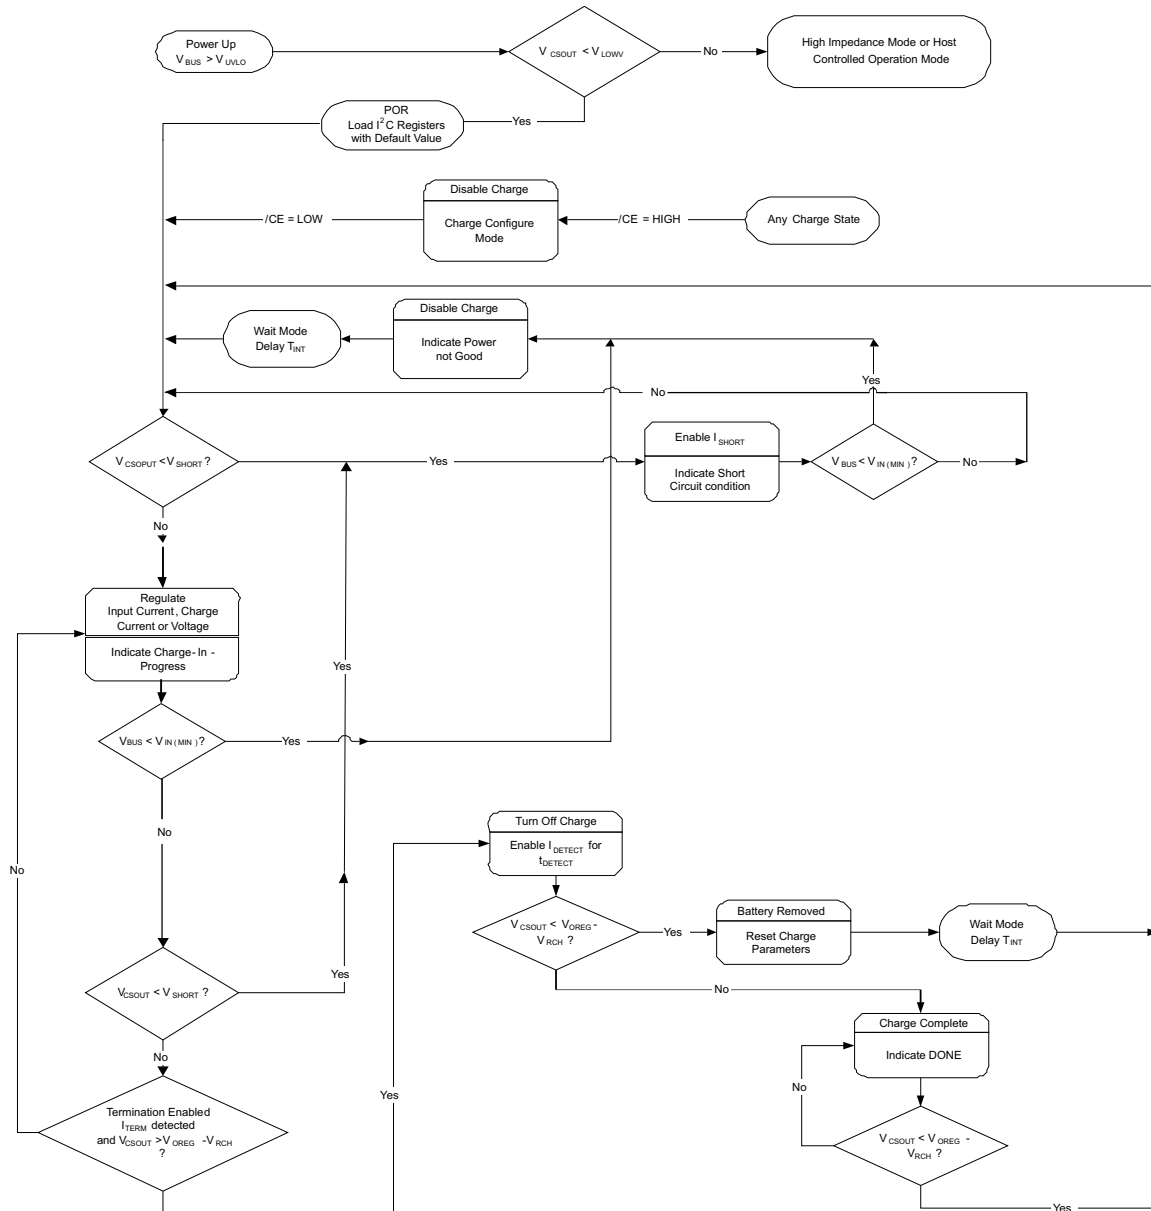

**Figure 14. Operational Flow Chart of bq2415x in Charge Mode**

## 9.4 Feature Description

### 9.4.1 Input Voltage Protection

#### 9.4.1.1 Input Overvoltage Protection

The IC provides a built-in input overvoltage protection to protect the device and other components against damage if the input voltage (Voltage from VBUS to PGND) goes too high. When an input overvoltage condition is detected, the IC turns off the PWM converter, sets fault status bits, and sends out a fault pulse from the STAT pin. Once  $V_{BUS}$  drops below the input overvoltage exit threshold, the fault is cleared and charge process resumes.

#### 9.4.1.2 Bad Adaptor Detection/Rejection

Although not shown in Figure 14, at power-on-reset (POR) of VBUS, the IC performs the bad adaptor detection by applying a current sink to VBUS. If the VBUS is higher than  $V_{IN(MIN)}$  for 30ms, the adaptor is good and the charge process begins. Otherwise, if the VBUS drops below  $V_{IN(MIN)}$ , a bad adaptor is detected. Then, the IC disables the current sink, sends a send fault pulse in FAULT pin and sets the bad adaptor flag (B2 - B0 = 011 for Register 00H). After a delay of  $T_{INT}$ , the IC repeats the adaptor detection process, as shown in Figure 15 and Figure 16.


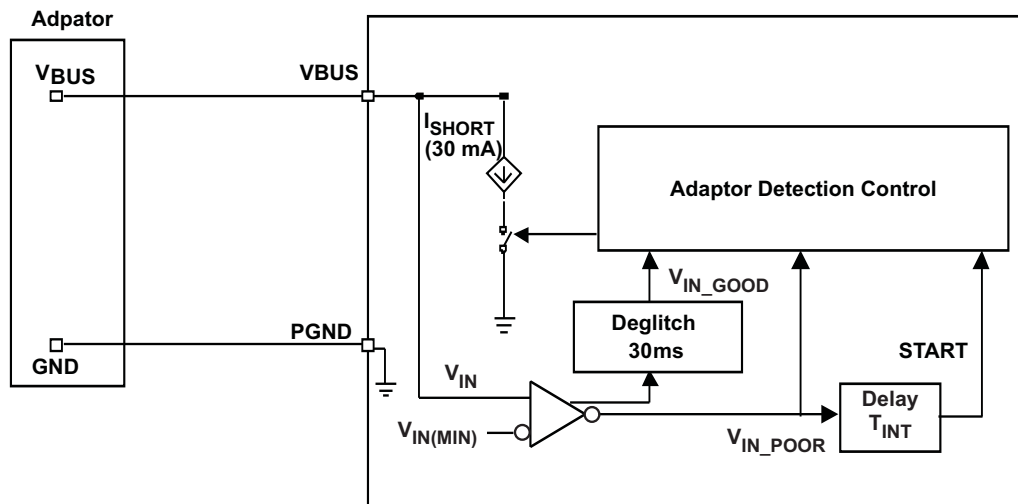


Figure 15. Bad Adaptor Detection Circuit

## Feature Description (continued)

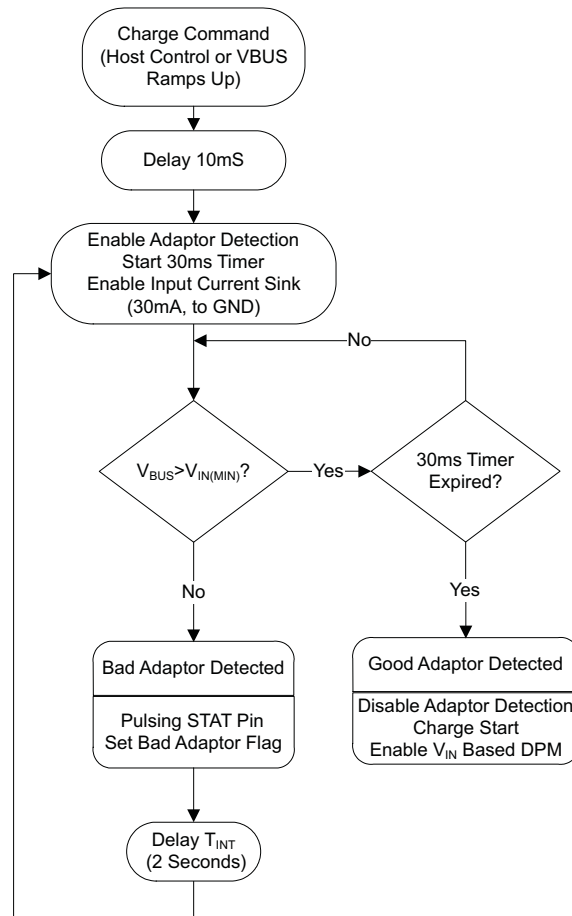

**Figure 16. Bad Adaptor Detection Scheme Flow Chart**

### 9.4.1.3 Sleep Mode

The IC enters the low-power sleep mode if the VBUS pin voltage falls below the sleep-mode entry threshold,  $V_{CSOUT} + V_{SLP}$ , and VBUS is higher than the bad adaptor detection threshold,  $V_{IN(MIN)}$ . This feature prevents draining the battery during the absence of  $V_{BUS}$ . During sleep mode, both the reverse blocking switch Q1 and PWM are turned off.

### 9.4.1.4 Input Voltage Based DPM (Special Charger Voltage Threshold)

During the charging process, if the input power source is not able to support the programmed or default charging current, the VBUS voltage will decrease. Once the VBUS drops to  $V_{IN\_DPM}$  (default 4.52V), the charge current begins to taper down to prevent any further drop of VBUS. When the IC enters this mode, the charge current is lower than the set value and the special charger bit is set (B4 in Register 05H). This feature makes the IC compatible with adapters having different current capabilities.

## 9.4.2 Battery Protection

### 9.4.2.1 Output Overvoltage Protection

The IC provides a built-in overvoltage protection to protect the device and other components against damage if the battery voltage goes too high, as when the battery is suddenly removed. When an overvoltage condition is detected, the IC turns off the PWM converter, sets fault status bits, and sends out a fault pulse from the STAT pin. Once  $V_{(CSOUT)}$  drops to the battery overvoltage exit threshold, the fault is cleared and charge process resumes.

## Feature Description (continued)

### 9.4.2.2 Battery Detection at Power Up in DEFAULT Mode

bq24157 also has a unique battery detection scheme during the start up of the charger. At VBUS power up, bq24157 starts a 262-ms timer when exiting from short circuit mode to PWM charge mode. If the battery voltage is charged above the recharge threshold ( $V_{\text{OREG-VRCH}}$ ) when the 262-ms timer expired, bq24157 will not consider the battery present; then stop charging, and go to high impedance mode immediately. However, if the battery voltage is still below the recharge threshold when the 262-ms timer expires, the charging process will continue as normal battery charging process.

### 9.4.2.3 Battery Short Protection

During the normal charging process, if the battery voltage is lower than the short-circuit threshold,  $V_{\text{SHORT}}$ , the charger operates in short circuit mode with a lower charge rate of  $I_{\text{SHORT}}$ .

### 9.4.2.4 Battery Detection in Host Mode

For applications with removable battery packs, the IC provides a battery absent detection scheme to reliably detect insertion or removal of battery packs.

During the normal charging process with host control, once the voltage at the CSOUT pin is above the battery recharge threshold,  $V_{\text{OREG}} - V_{\text{RCH}}$ , and the termination charge current is detected, the IC turns off the PWM charge and enables a discharge current,  $I_{\text{DETECT}}$ , for a period of  $t_{\text{DETECT}}$ , (262 ms typical) then checks the battery voltage. If the battery voltage is still above the recharge threshold after  $t_{\text{DETECT}}$ , the battery is present. On the other hand, if the battery voltage is below the battery recharge threshold, the battery is absent. Under this condition, the charge parameters (such as input current limit) are reset to the default values and charge resumes after a delay of  $T_{\text{INT}}$ . This function ensures that the charge parameters are reset whenever the battery is replaced.

## 9.4.3 DEFAULT Mode

The bq24157 stays in default mode indefinitely until I<sup>2</sup>C communication begins.

### 9.4.4 USB Friendly Power Up

The default control bits set the charging current and regulation voltage low as a safety feature to avoid violating USB spec and over-charging any of the Li-Ion chemistries, while the host has lost communication. The input current limiting is described below.

### 9.4.5 Input Current Limiting At Power Up

The input current sensing circuit and control loop are integrated into the IC. When operating in default mode, the OTG pin logic level sets the input current limit to 100mA for a logic low and 500mA for a logic high. In host mode, the input current limit is set by the programmed control bits in register 01H.



## 9.5 Device Functional Modes

### 9.5.1 Charge Mode Operation

#### 9.5.1.1 Charge Profile

Once a good battery with voltage below the recharge threshold has been inserted and a good adapter is attached, the bq24157 enters charge mode. In charge mode, the IC has five control loops to regulate input voltage, input current, charge current, charge voltage and device junction temperature. During the charging process, all five loops are enabled and the one that is dominant takes control. The IC supports a precision Li-ion or Li-polymer charging system for single-cell applications. Figure 17 (a) indicates a typical charge profile without input current regulation loop. It is the traditional CC/CV charge curve, while Figure 17(b) shows a typical charge profile when input current limiting loop is dominant during the constant current mode. In this case, the charge current is higher than the input current so the charge process is faster than the linear chargers. The input voltage threshold for DPM loop, input current limits, charge current, termination current, and charge voltage are all programmable using I<sup>2</sup>C interface.

## Device Functional Modes (continued)

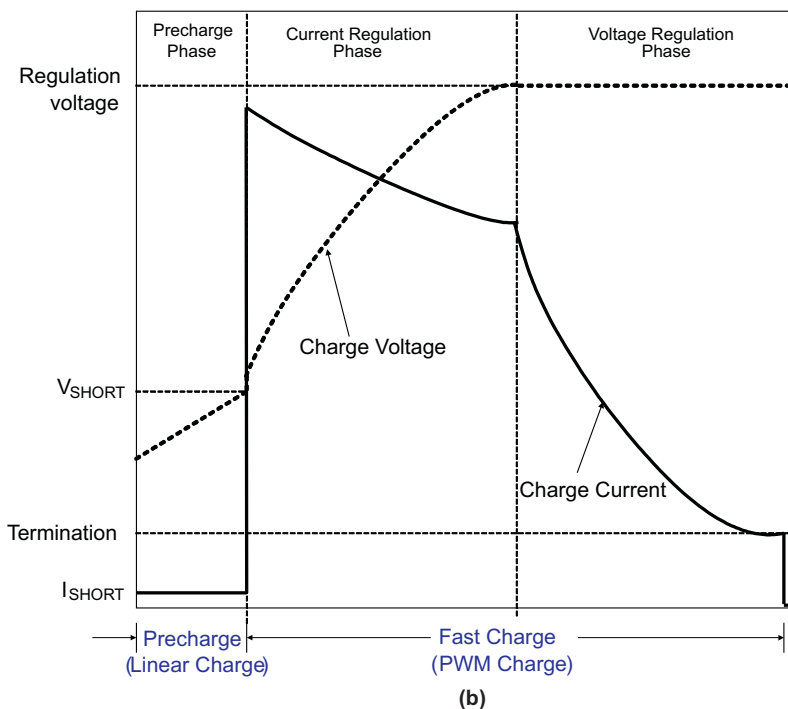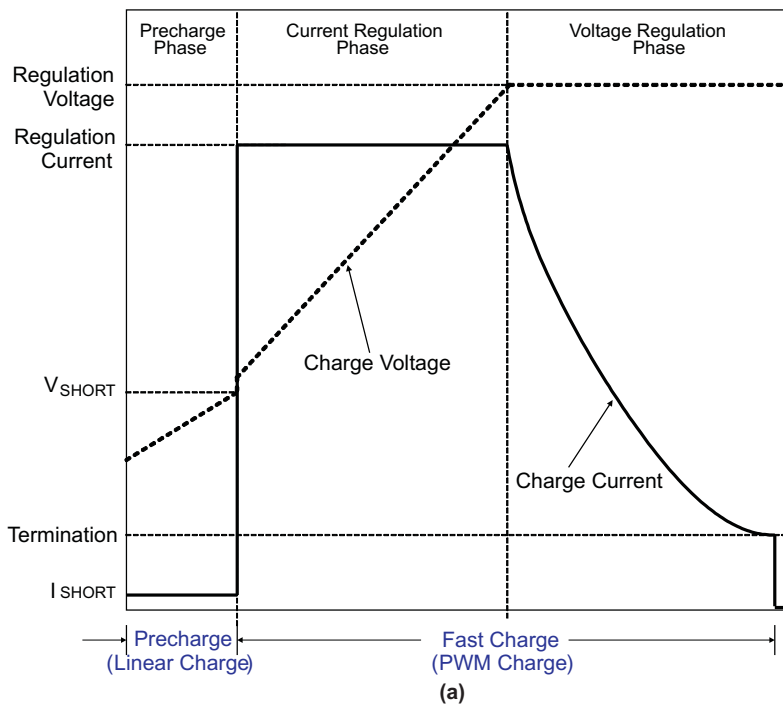

**Figure 17. Typical Charging Profile for (a) without Input Current Limit, and (b) with Input Current Limit**

## Device Functional Modes (continued)

### 9.5.2 PWM Controller in Charge Mode

The IC provides an integrated, fixed 3 MHz frequency voltage-mode controller to regulate charge current or voltage. This type of controller is used to improve line transient response, thereby, simplifying the compensation network used for both continuous and discontinuous current conduction operation. The voltage and current loops are internally compensated using a Type-III compensation scheme that provides enough phase margin for stable operation, allowing the use of small ceramic capacitors with a low ESR. The device operates between 0% to 99.5% duty cycles.

The IC has back to back common-drain N-channel FETs at the high side and one N-channel FET at low side. The input N-FET (Q1) prevents battery discharge when V<sub>BUS</sub> is lower than V<sub>CSOUT</sub>. The second high-side N-FET (Q2) is the switching control switch. A charge pump circuit is used to provide gate drive for Q1, while a bootstrap circuit with an external bootstrap capacitor is used to supply the gate drive voltage for Q2.

Cycle-by-cycle current limit is sensed through the FETs Q2 and Q3. The threshold for Q2 is set to a nominal 2.4-A peak current. The low-side FET (Q3) also has a current limit that decides if the PWM Controller will operate in synchronous or non-synchronous mode. This threshold is set to 100mA and it turns off the low-side N-channel FET (Q3) before the current reverses, preventing the battery from discharging. Synchronous operation is used when the current of the low-side FET is greater than 100mA to minimize power losses.

### 9.5.3 Battery Charging Process

At the beginning of precharge, while battery voltage is below the V<sub>(SHORT)</sub> threshold, the IC applies a short-circuit current, I<sub>(SHORT)</sub>, to the battery. When the battery voltage is above V<sub>SHORT</sub> and below V<sub>OREG</sub>, the charge current ramps up to fast charge current, I<sub>OCHARGE</sub>, or a charge current that corresponds to the input current of I<sub>IN\_LIMIT</sub>. The slew rate for fast charge current is controlled to minimize the current and voltage over-shoot during transient. Both the input current limit, I<sub>IN\_LIMIT</sub>, and fast charge current, I<sub>OCHARGE</sub>, can be set by the host. Once the battery voltage reaches the regulation voltage, V<sub>OREG</sub>, the charge current is tapered down as shown in Figure 17. The voltage regulation feedback occurs by monitoring the battery-pack voltage between the CSOUT and PGND pins. In HOST mode, the regulation voltage is adjustable (3.5V to 4.44V) and is programmed through I<sup>2</sup>C interface. In 15-minute mode, the regulation voltage is fixed at 3.54V.

The IC monitors the charging current during the voltage regulation phase. If termination is enabled, during the normal charging process with HOST control, once the voltage at the CSOUT pin is above the battery recharge threshold, V<sub>OREG</sub> - V<sub>RCH</sub> for the 32-ms (typical) deglitch period, and the termination charge current I<sub>TERM</sub> is detected, the IC turns off the PWM charge and enables a discharge current, I<sub>DETECT</sub>, for a period of t<sub>DETECT</sub> (262-ms typical), then checks the battery voltage. If the battery voltage is still above the recharge threshold after t<sub>DETECT</sub>, the battery charging is complete. The battery detection routine is used to ensure termination did not occur because the battery was removed. After 40ms (typical) for synchronization purposes of the EOC state and the counter, the status bit and pin are updated to indicate charging has completed. The termination current level is programmable. To disable the charge current termination, the host can set the charge termination bit (I\_Term) of charge control register to 0, refer to I<sup>2</sup>C section for detail.

A new charge cycle is initiated when one of the following conditions is detected:

- The battery voltage falls below the V<sub>(OREG)</sub> - V<sub>(RCH)</sub> threshold.
- V<sub>BUS</sub> Power-on reset (POR), if battery voltage is below the V<sub>(LOWV)</sub> threshold.
- $\overline{\text{CE}}$  bit toggle or RESET bit is set (Host controlled)

### 9.5.4 Thermal Regulation and Protection

To prevent overheating of the chip during the charging process, the IC monitors the junction temperature, T<sub>J</sub>, of the die and begins to taper down the charge current once T<sub>J</sub> reaches the thermal regulation threshold, T<sub>CF</sub>. The charge current is reduced to zero when the junction temperature increases approximately 10°C above T<sub>CF</sub>. In any state, if T<sub>J</sub> exceeds T<sub>SHTDWN</sub>, the IC suspends charging. In thermal shutdown mode, PWM is turned off and all timers are frozen. Charging resumes when T<sub>J</sub> falls below T<sub>SHTDWN</sub> by approximately 10°C.

## Device Functional Modes (continued)

### 9.5.5 Charge Status Output, STAT Pin

The STAT pin is used to indicate operation conditions. STAT is pulled low during charging when EN\_STAT bit in control register (00H) is set to "1". Under other conditions, STAT pin behaves as a high impedance (open-drain) output. Under fault conditions, a 128-μs pulse will be sent out to notify the host. The status of STAT pin at different operation conditions is summarized in [Table 1](#). The STAT pin can be used to drive an LED or communicate to the host processor.

**Table 1. STAT Pin Summary**

| CHARGE STATE                                                                                                                         | STAT                          |
|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| Charge in progress and EN_STAT=1                                                                                                     | Low                           |
| Other normal conditions                                                                                                              | Open-drain                    |
| Charge mode faults: Timer fault, sleep mode, VBUS or battery overvoltage, poor input source, VBUS UVLO, no battery, thermal shutdown | 128-μs pulse, then open-drain |
| Boost mode faults: Timer fault, over load, VBUS or battery overvoltage, low battery voltage, thermal shutdown                        | 128-μs pulse, then open-drain |

### 9.5.6 Control Bits in Charge Mode

#### 9.5.6.1 $\overline{CE}$ Bit (Charge Mode)

The  $\overline{CE}$  bit in the control register is used to disable or enable the charge process. A low logic level (0) on this bit enables the charge and a high logic level (1) disables the charge.

#### 9.5.6.2 RESET Bit

The RESET bit in the control register is used to reset all the charge parameters. Writing '1' to the RESET bit will reset all the charge parameters to default values except the safety limit register, and RESET bit is automatically cleared to zero once the charge parameters get reset. It is designed for charge parameter reset before charge starts and it is not recommended to set the RESET bit while charging or boosting are in progress.

#### 9.5.6.3 OPA\_Mode Bit

OPA\_MODE is the operation mode control bit. When OPA\_MODE = 0, the IC operates as a charger if HZ\_MODE is set to "0", refer to [Table 2](#) for detail. When OPA\_MODE=1 and HZ\_MODE=0, the IC operates in boost mode.

**Table 2. Operation Mode Summary**

| OPA_MODE | HZ_MODE | OPERATION MODE                                                                                          |
|----------|---------|---------------------------------------------------------------------------------------------------------|
| 0        | 0       | Charge (no fault)<br>Charge configure (fault, $V_{bus} > UVLO$ )<br>High impedance ( $V_{bus} < UVLO$ ) |
| 1        | 0       | Boost (no faults)<br>Any fault go to charge configure mode                                              |
| X        | 1       | High impedance                                                                                          |

### 9.5.7 Control Pins in Charge Mode

#### 9.5.7.1 CD Pin (Charge Disable)

The CD pin is used to disable the charging process. When the CD pin is low, charge is enabled. When the CD pin is high, charge is disabled and the charger enters high impedance (Hi-Z) mode.

### 9.5.8 BOOST Mode Operation

In host mode, when OTG pin is high (and OTG\_EN bit is high thereby enabling OTG functionality) or the operation mode bit (OPA\_MODE) is set to 1, the device operates in boost mode and delivers the power to VBUS from the battery. In normal boost mode converts the battery voltage to  $V_{BUS-B}$  (about 5.05V) and delivers a current as much as  $I_{BO}$  (about 200mA) to support other USB OTG devices connected to the USB connector.

### 9.5.8.1 PWM Controller in Boost Mode

Similar to charge mode operation, in boost mode, the IC provides an integrated, fixed 3 MHz frequency voltage-mode controller to regulate output voltage at PMID pin ( $V_{PMID}$ ). The voltage control loop is internally compensated using a Type-III compensation scheme that provides enough phase margin for stable operation with a wide load range and battery voltage range.

In boost mode, the input N-FET (Q1) prevents battery discharge when VBUS pin is over loaded. Cycle-by-cycle current limit is sensed through the internal sense FET for Q3. The cycle-by-cycle current limit threshold for Q3 is set to a nominal 1.0-A peak current. Synchronous operation is used in PWM mode to minimize power losses.

### 9.5.8.2 Boost Start Up

To prevent the inductor saturation and limit the inrush current, a soft-start control is applied during the boost start up.

### 9.5.8.3 PFM Mode at Light Load

In boost mode, under light load conditions, the IC operates in pulse skipping mode (PFM mode) to reduce the power loss and improve the converter efficiency. During boosting, the PWM converter is turned off once the inductor current is less than 75mA; and the PWM is turned back on only when the voltage at PMID pin drops to about 99.5% of the rated output voltage. A unique pre-set circuit is used to make the smooth transition between PWM and PFM mode.

### 9.5.8.4 Protection in Boost Mode

#### 9.5.8.4.1 Output Overvoltage Protection

The IC provides a built-in over-voltage protection to protect the device and other components against damage if the VBUS voltage goes too high. When an over-voltage condition is detected, the IC turns off the PWM converter, resets OPA\_MODE bit to 0, sets fault status bits, and sends out a fault pulse from the STAT pin. Once VBUS drops to the normal level, the boost starts after host sets OPA\_MODE to “1” or OTG pin stays in active status.

#### 9.5.8.4.2 Output Overload Protection

The IC provides a built-in over-load protection to prevent the device and battery from damage when VBUS is over loaded. Once the over load condition is detected, Q1 operates in linear mode to limit the output current. If the over load condition lasts for more than 30ms, the over-load fault is detected. When an over-load condition is detected, the IC turns off the PWM converter, resets OPA\_MODE bit to 0, sets fault status bits and sends out fault pulse in STAT pin. The boost will not start until the host clears the fault register.

#### 9.5.8.4.3 Battery Overvoltage Protection

During boosting, when the battery voltage is above the battery over voltage threshold,  $V_{BATMAX}$ , or below the minimum battery voltage threshold,  $V_{BATMIN}$ , the IC turns off the PWM converter, resets OPA\_MODE bit to 0, sets fault status bits and sends out fault pulse in STAT pin. Once the battery voltage goes above  $V_{BATMIN}$ , the boost will start after the host sets OPA\_MODE to “1” or OTG pin stays in active status.

### 9.5.8.5 STAT Pin in Boost Mode

During normal boosting operation, the STAT pin behaves as a high impedance (open-drain) output. Under fault conditions, a 128- $\mu$ s pulse is sent out to notify the host.

## 9.5.9 High Impedance (Hi-Z) Mode

In Hi-Z mode, the charger stops charging and enters a low quiescent current state to conserve power. Taking the CD pin high causes the charger to enter Hi-Z mode. When in default mode and the CD pin is low, the charger automatically enters Hi-Z mode if

1. VBUS > UVLO and a battery with  $V_{BAT} > V_{LOWV}$  is inserted, or
2. VBUS falls below UVLO.

When in HOST mode and the CD is low, the charger can be placed into Hi-Z mode if the HZ-MODE control bit is set to “1” and OTG pin is not in active status.

In order to exit Hi-Z mode, the CD pin must be low, VBUS must be higher than UVLO and the HOST must write a "0" to the HZ-MODE control bit.

## 9.6 Programming

### 9.6.1 Serial Interface Description


I<sup>2</sup>C is a 2-wire serial interface developed by Philips Semiconductor (see I<sup>2</sup>C-Bus Specification, Version 2.1, January 2000). The bus consists of a data line (SDA) and a clock line (SCL) with pull-up structures. When the bus is idle, both SDA and SCL lines are pulled high. All the I<sup>2</sup>C compatible devices connect to the I<sup>2</sup>C bus through open drain I/O pins, SDA and SCL. A master device, usually a microcontroller or a digital signal processor, controls the bus. The master is responsible for generating the SCL signal and device addresses. The master also generates specific conditions that indicate the START and STOP of data transfer. A slave device receives and/or transmits data on the bus under control of the master device.

The IC works as a slave and is compatible with the following data transfer modes, as defined in the I<sup>2</sup>C-Bus Specification: standard mode (100 kbps), fast mode (400 kbps), and high-speed mode (up to 3.4 Mbps in write mode). The interface adds flexibility to the battery charge solution, enabling most functions to be programmed to new values depending on the instantaneous application requirements. Register contents remain intact as long as supply voltage remains above 2.2 V (typical). I<sup>2</sup>C is asynchronous, which means that it runs off of SCL. The device has no noise or glitch filtering on SCL, so SCL input needs to be clean. Therefore, it is recommended that SDA changes while SCL is LOW.

The data transfer protocol for standard and fast modes is the same; therefore, they are referred to as F/S-mode in this document. The protocol for high-speed mode is different from the F/S-mode, and it is referred to as HS-mode. The bq24157B device supports 7-bit addressing only. The device 7-bit address is defined as '1101010' (6AH).

#### 9.6.1.1 F/S Mode Protocol


The master initiates data transfer by generating a start condition. The start condition is when a high-to-low transition occurs on the SDA line while SCL is high, as shown in Figure 18. All I<sup>2</sup>C-compatible devices should recognize a start condition.

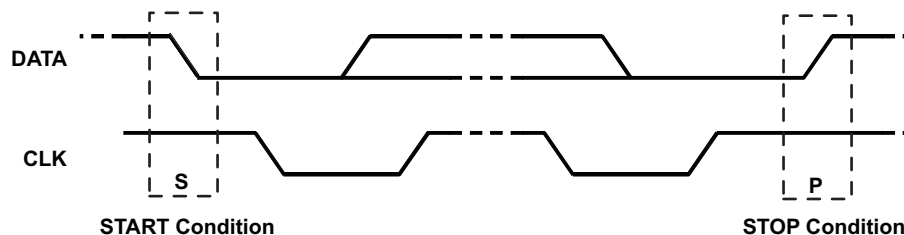

**Figure 18. START and STOP Condition**


The master then generates the SCL pulses, and transmits the 8-bit address and the read/write direction bit R/W on the SDA line. During all transmissions, the master ensures that data is valid. A valid data condition requires the SDA line to be stable during the entire high period of the clock pulse (see Figure 19). All devices recognize the address sent by the master and compare it to their internal fixed addresses. Only the slave device with a matching address generates an acknowledge (see Figure 19) by pulling the SDA line low during the entire high period of the ninth SCL cycle. Upon detecting this acknowledge, the master knows that communication link with a slave has been established.

## Programming (continued)

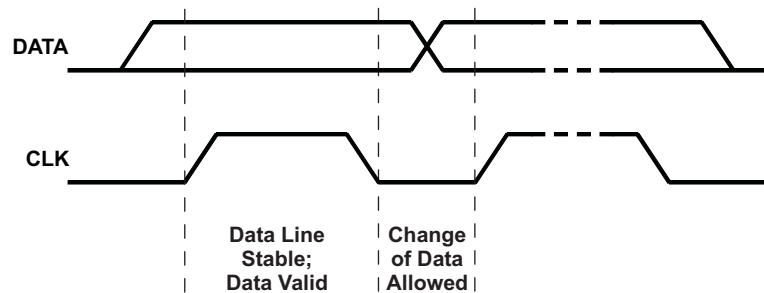

**Figure 19. Bit Transfer on the Serial Interface**

The master generates further SCL cycles to either transmit data to the slave (R/W bit 1) or receive data from the slave (R/W bit 0). In either case, the receiver needs to acknowledge the data sent by the transmitter. So an acknowledge signal can either be generated by the master or by the slave, depending on which one is the receiver. The 9-bit valid data sequences consisting of 8-bit data and 1-bit acknowledge can continue as long as necessary. To signal the end of the data transfer, the master generates a stop condition by pulling the SDA line from low to high while the SCL line is high (see [Figure 21](#)). This releases the bus and stops the communication link with the addressed slave. All I<sup>2</sup>C compatible devices must recognize the stop condition. Upon the receipt of a stop condition, all devices know that the bus is released, and they wait for a start condition followed by a matching address. If a transaction is terminated prematurely, the master needs to send a STOP condition to prevent the slave I<sup>2</sup>C logic from getting stuck in a bad state. Attempting to read data from register addresses not listed in this section will result in FFh being read out.

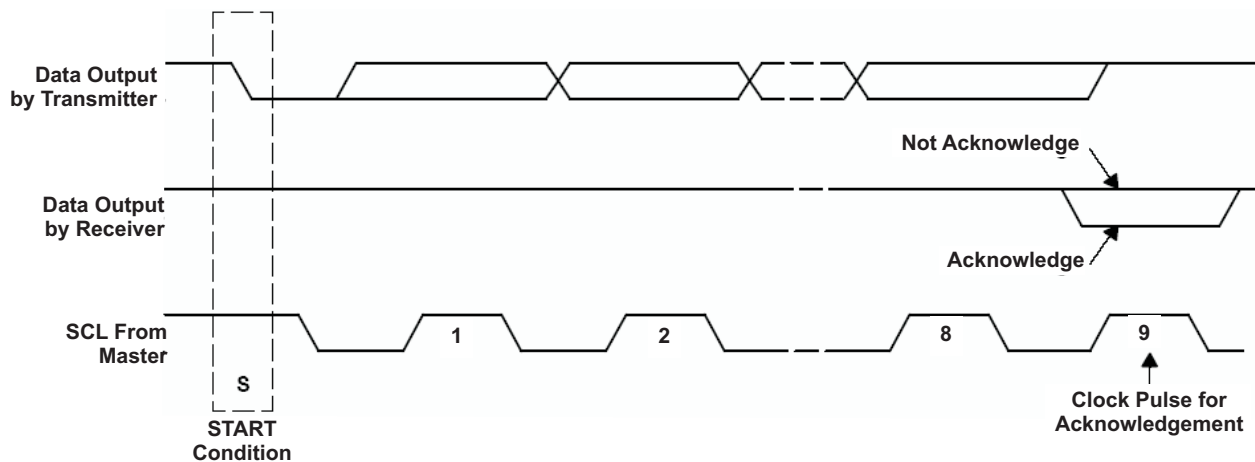

**Figure 20. Acknowledge on the I<sup>2</sup>C Bus™**

## Programming (continued)

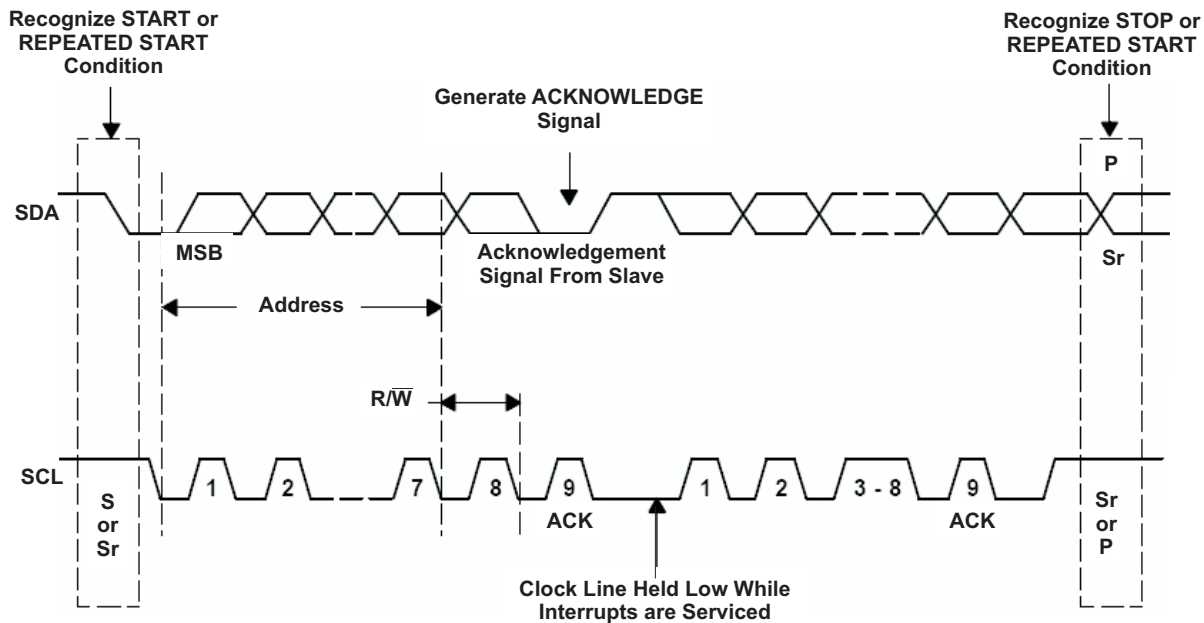


Figure 21. Bus Protocol

### 9.6.1.2 H/S Mode Protocol

When the bus is idle, both SDA and SCL lines are pulled high by the pull-up devices.

The master generates a start condition followed by a valid serial byte containing HS master code 00001XXX. This transmission is made in F/S-mode at no more than 400 Kbps. No device is allowed to acknowledge the HS master code, but all devices must recognize it and switch their internal setting to support 3.4-Mbps operation.

The master then generates a repeated start condition (a repeated start condition has the same timing as the start condition). After this repeated start condition, the protocol is the same as F/S-mode, except that transmission speeds up to 3.4 Mbps are allowed. A stop condition ends the HS-mode and switches all the internal settings of the slave devices to support the F/S-mode. Instead of using a stop condition, repeated start conditions should be used to secure the bus in HS-mode. If a transaction is terminated prematurely, the master needs sending a STOP condition to prevent the slave I2C logic from getting stuck in a bad state.


Attempting to read data from register addresses not listed in this section results in FFh being read out.

### 9.6.1.3 I<sup>2</sup>C Update Sequence


The IC requires a start condition, a valid I<sup>2</sup>C address, a register address byte, and a data byte for a single update. After the receipt of each byte, the IC acknowledges by pulling the SDA line low during the high period of a single clock pulse. A valid I<sup>2</sup>C address selects the IC. The IC performs an update on the falling edge of the acknowledge signal that follows the LSB byte.

For the first update, the IC requires a start condition, a valid I<sup>2</sup>C address, a register address byte, a data byte. For all consecutive updates, The IC needs a register address byte, and a data byte. Once a stop condition is received, the IC releases the I<sup>2</sup>C bus, and awaits a new start conditions.

## Programming (continued)

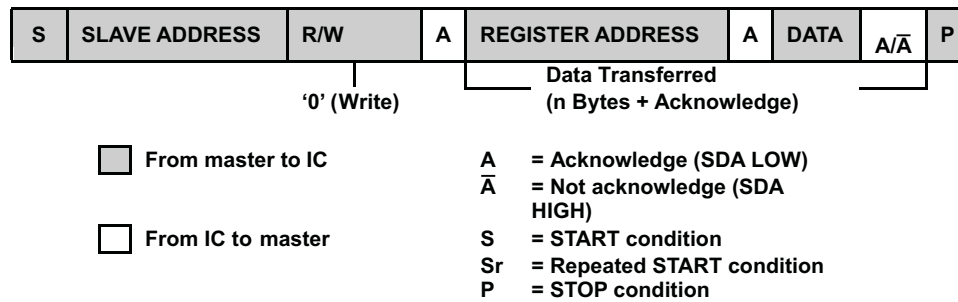

(a) F/S-Mode

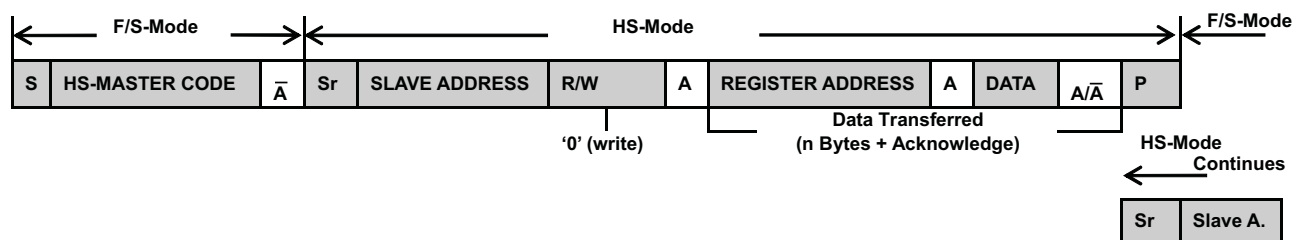

(b) HS-Mode

**Figure 22. Data Transfer Format in F/S Mode and H/S Mode**

### 9.6.1.4 Slave Address Byte

| MSB |   |   |   | LSB |   |   |   |
|-----|---|---|---|-----|---|---|---|
| X   | 1 | 1 | 0 | 1   | 0 | 1 | 1 |

The slave address byte is the first byte received following the START condition from the master device.

### 9.6.1.5 Register Address Byte

| MSB |   |   |   |   | LSB |    |    |
|-----|---|---|---|---|-----|----|----|
| 0   | 0 | 0 | 0 | 0 | D2  | D1 | D0 |

Following the successful acknowledgment of the slave address, the bus master will send a byte to the IC, which contains the address of the register to be accessed. The IC contains five 8-bit registers accessible via a bidirectional I<sup>2</sup>C-bus interface. Among them, four internal registers have read and write access; and one has only read access.

## 9.7 Register Description

**Table 3. Status/Control Register (Read/Write)**  
**Memory Location: 00, Reset State: x1xx 0xxx**

| BIT      | NAME        | READ/WRITE | FUNCTION                                                                                                                                                                                                                                                                                                                            |
|----------|-------------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| B7 (MSB) | TMR_RST/OTG | Read/Write | Write: TMR_RST function, write "1" to reset the safety timer (auto clear)<br>Read: OTG pin status, 0-OTG pin at Low level, 1-OTG pin at High level                                                                                                                                                                                  |
| B6       | EN_STAT     | Read/Write | 0-Disable STAT pin function, 1-Enable STAT pin function (default 1)                                                                                                                                                                                                                                                                 |
| B5       | STAT2       | Read Only  | 00-Ready, 01-Charge in progress, 10-Charge done, 11-Fault                                                                                                                                                                                                                                                                           |
| B4       | STAT1       | Read Only  |                                                                                                                                                                                                                                                                                                                                     |
| B3       | BOOST       | Read Only  | 1-Boost mode, 0-Not in boost mode                                                                                                                                                                                                                                                                                                   |
| B2       | FAULT_3     | Read Only  | Charge mode: 000-Normal, 001-VBUS OVP, 010-Sleep mode, 011-Bad Adaptor or $V_{BUS} < V_{UVLO}$ ,<br>100-Output OVP, 101-Thermal shutdown, 110-Timer fault, 111-No battery<br>Boost mode: 000-Normal, 001-VBUS OVP, 010-Over load, 011-Battery voltage is too low,<br>100-Battery OVP, 101-Thermal shutdown, 110-Timer fault, 111-NA |
| B1       | FAULT_2     | Read Only  |                                                                                                                                                                                                                                                                                                                                     |
| B0 (LSB) | FAULT_1     | Read Only  |                                                                                                                                                                                                                                                                                                                                     |

**Table 4. Control Register (Read/Write)**  
**Memory Location: 01, Reset State: 0011 0000**

| BIT      | NAME                  | READ/WRITE | FUNCTION                                                                                                                                               |
|----------|-----------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| B7 (MSB) | lin_Limit_2           | Read/Write | 00-USB host with 100-mA current limit, 01-USB host with 500-mA current limit, 10-USB host/charger with 800-mA current limit, 11-No input current limit |
| B6       | lin_Limit_1           | Read/Write |                                                                                                                                                        |
| B5       | $V_{(LOWV\_2)}^{(1)}$ | Read/Write | Weak battery voltage threshold: 200mV step (default 1)                                                                                                 |
| B4       | $V_{(LOWV\_1)}^{(1)}$ | Read/Write | Weak battery voltage threshold: 100mV step (default 1)                                                                                                 |
| B3       | TE                    | Read/Write | 1-Enable charge current termination, 0-Disable charge current termination (default 0)                                                                  |
| B2       | $\overline{CE}$       | Read/Write | 1-Charger is disabled, 0-Charger enabled (default 0)                                                                                                   |
| B1       | HZ_MODE               | Read/Write | 1-High impedance mode, 0-Not high impedance mode (default 0)                                                                                           |
| B0 (LSB) | OPA_MODE              | Read/Write | 1-Boost mode, 0-Charger mode (default 0)                                                                                                               |

(1) The range of the weak battery voltage threshold ( $V_{(LOWV)}$ ) is 3.4 V to 3.7 V with an offset of 3.4 V and steps of 100 mV (default 3.7 V, using bits B4-B5).

**Table 5. Control/Battery Voltage Register (Read/Write)**  
**Memory Location: 02, Reset State: 0000 1010**

| BIT      | NAME          | READ/WRITE | FUNCTION                                                                                                                                                        |
|----------|---------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| B7 (MSB) | $V_{O(REG5)}$ | Read/Write | Battery Regulation Voltage: 640 mV step (default 0)                                                                                                             |
| B6       | $V_{O(REG4)}$ | Read/Write | Battery Regulation Voltage: 320 mV step (default 0)                                                                                                             |
| B5       | $V_{O(REG3)}$ | Read/Write | Battery Regulation Voltage: 160 mV step (default 0)                                                                                                             |
| B4       | $V_{O(REG2)}$ | Read/Write | Battery Regulation Voltage: 80 mV step (default 0)                                                                                                              |
| B3       | $V_{O(REG1)}$ | Read/Write | Battery Regulation Voltage: 40 mV step (default 1)                                                                                                              |
| B2       | $V_{O(REG0)}$ | Read/Write | Battery Regulation Voltage: 20 mV step (default 0)                                                                                                              |
| B1       | OTG_PL        | Read/Write | 1-OTG Boost Enable with High level, 0-OTG Boost Enable with Low level (default 1);<br>not applicable to OTG pin control of current limit at POR in default mode |
| B0 (LSB) | OTG_EN        | Read/Write | 1-Enable OTG Pin in HOST mode, 0-Disable OTG pin in HOST mode (default 0), not<br>applicable to OTG pin control of current limit at POR in default mode         |

- Charge voltage range is 3.5 V to 4.44 V with the offset of 3.5 V and steps of 20 mV (default 3.54 V), using bits B2-B7.

**Table 6. Vender/Part/Revision Register (Read only)**  
**Memory Location: 03, Reset State: 0101 000x**

| BIT      | NAME      | READ/WRITE | FUNCTION                                                              |
|----------|-----------|------------|-----------------------------------------------------------------------|
| B7 (MSB) | Vender2   | Read Only  | Vender Code: bit 2 (default 0)                                        |
| B6       | Vender1   | Read Only  | Vender Code: bit 1 (default 1)                                        |
| B5       | Vender0   | Read Only  | Vender Code: bit 0 (default 0)                                        |
| B4       | PN1       | Read Only  | For I2C Address 6AH: 01–NA, 10–bq24157, 11–NA.                        |
| B3       | PN0       | Read Only  |                                                                       |
| B2       | Revision2 | Read Only  | 011: Revision 1.0;<br>001: Revision 1.1;<br>100–111: Future Revisions |
| B1       | Revision1 | Read Only  |                                                                       |
| B0 (LSB) | Revision0 | Read Only  |                                                                       |

**Table 7. Battery Termination/Fast Charge Current Register (Read/Write)**  
**Memory Location: 04, Reset State: 0000 0001**

| BIT      | NAME                          | READ/WRITE | FUNCTION                                                          |
|----------|-------------------------------|------------|-------------------------------------------------------------------|
| B7 (MSB) | Reset                         | Read/Write | Write: 1-Charger in reset mode, 0-No effect, Read: always get "0" |
| B6       | $V_{I(CHRG3)}$ <sup>(1)</sup> | Read/Write | Charge current sense voltage: 27.2 mV step                        |
| B5       | $V_{I(CHRG2)}$ <sup>(1)</sup> | Read/Write | Charge current sense voltage: 13.6 mV step                        |
| B4       | $V_{I(CHRG1)}$ <sup>(1)</sup> | Read/Write | Charge current sense voltage: 6.8 mV step                         |
| B3       | $V_{I(CHRG0)}$ <sup>(1)</sup> | Read/Write | NA                                                                |
| B2       | $V_{I(TERM2)}$ <sup>(2)</sup> | Read/Write | Termination current sense voltage: 13.6 mV step (default 0)       |
| B1       | $V_{I(TERM1)}$ <sup>(2)</sup> | Read/Write | Termination current sense voltage: 6.8 mV step (default 0)        |
| B0 (LSB) | $V_{I(TERM0)}$ <sup>(2)</sup> | Read/Write | Termination current sense voltage: 3.4 mV step (default 1)        |

(1) See [Table 12](#)

(2) See [Table 11](#)

- Charge current sense voltage offset is 37.4 mV and default charge current is 550 mA, if 68-mΩ sensing resistor is used and LOW\_CHG=0.

**Table 8. Special Charger Voltage/Enable Pin Status Register**  
**Memory location: 05, Reset state: 000X X100**

| BIT      | NAME       | READ/WRITE | FUNCTION                                                                                                       |
|----------|------------|------------|----------------------------------------------------------------------------------------------------------------|
| B7 (MSB) | NA         | Read/Write | NA                                                                                                             |
| B6       | NA         | Read/Write | NA                                                                                                             |
| B5       | LOW_CHG    | Read/Write | 0 – Normal charge current sense voltage at 04H (default 1),<br>1 – Low charge current sense voltage of 22.1 mV |
| B4       | DPM_STATUS | Read Only  | 0 – DPM mode is not active,<br>1 – DPM mode is active                                                          |
| B3       | CD_STATUS  | Read Only  | 0 – CD pin at LOW level,<br>1 – CD pin at HIGH level                                                           |
| B2       | VSREG2     | Read/Write | Special charger voltage: 320 mV step (default 1)                                                               |
| B1       | VSREG1     | Read/Write | Special charger voltage: 160 mV step (default 0)                                                               |
| B0 (LSB) | VSREG0     | Read/Write | Special charger voltage: 80 mV step (default 0)                                                                |

- Special charger voltage offset is 4.2 V and default special charger voltage is 4.52 V.

**Table 9. Safety Limit Register (READ/WRITE, Write only once after reset!)  
Memory location: 06, Reset state: 01000000**

| BIT      | NAME                               | READ/WRITE | FUNCTION                                                                      |
|----------|------------------------------------|------------|-------------------------------------------------------------------------------|
| B7 (MSB) | V <sub>MCHRG3</sub> <sup>(1)</sup> | Read/Write | Maximum charge current sense voltage: 54.4 mV step (default 0) <sup>(2)</sup> |
| B6       | V <sub>MCHRG2</sub> <sup>(1)</sup> | Read/Write | Maximum charge current sense voltage: 27.2 mV step (default 1)                |
| B5       | V <sub>MCHRG1</sub> <sup>(1)</sup> | Read/Write | Maximum charge current sense voltage: 13.6 mV step (default 0)                |
| B4       | V <sub>MCHRG0</sub> <sup>(1)</sup> | Read/Write | Maximum charge current sense voltage: 6.8 mV step (default 0)                 |
| B3       | V <sub>MREG3</sub>                 | Read/Write | Maximum battery regulation voltage: 160 mV step (default 0)                   |
| B2       | V <sub>MREG2</sub>                 | Read/Write | Maximum battery regulation voltage: 80 mV step (default 0)                    |
| B1       | V <sub>MREG1</sub>                 | Read/Write | Maximum battery regulation voltage: 40 mV step (default 0)                    |
| B0 (LSB) | V <sub>MREG0</sub>                 | Read/Write | Maximum battery regulation voltage: 20 mV step (default 0)                    |

(1) Refer to [Table 12](#)

- Maximum charge current sense voltage offset is 37.4 mV (550 mA), default at 64.6 mV (950 mA) and the maximum charge current option is 1.55 A (105.4 mV), if 55-mΩ sensing resistor is used.
- Maximum battery regulation voltage offset is 4.2V (default at 4.2 V) and maximum battery regulation voltage option is 4.44V.
- Memory location 06H resets only when V(CSOUT) drops below either 1) V(SHORT) threshold (typ. 2.05 V) if VBUS > V<sub>(UVLO)</sub> or 2) the digital reset threshold of 2.4 V typical if VBUS < V<sub>(UVLO)</sub>. Programmed values in the safety limit register exclude higher values from memory locations 02 (battery regulation voltage), and from memory location 04 (fast charge current) from being successfully written.
- If host accesses (write command) to some other register before Safety limit register, the safety default values are used.

## 10 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 10.1 Application Information

The bq24157 is a compact, flexible, high-efficiency, USB-friendly, switch-mode charge management solution for single-cell Li-ion and Li-polymer batteries used in a wide range of portable applications. The bq24157 integrates a synchronous PWM controller, power MOSFETs, input current sensing, high-accuracy current and voltage regulation, and charge termination, into a small DSBGA package. The charge parameters can be programmed through an I<sup>2</sup>C interface.

#### 10.1.1 Typical Application

$V_{BUS} = 5\text{ V}$ ,  $I_{CHARGE} = 1250\text{ mA}$ ,  $V_{BAT} = 3.5\text{ to }4.44\text{ V}$  (adjustable).

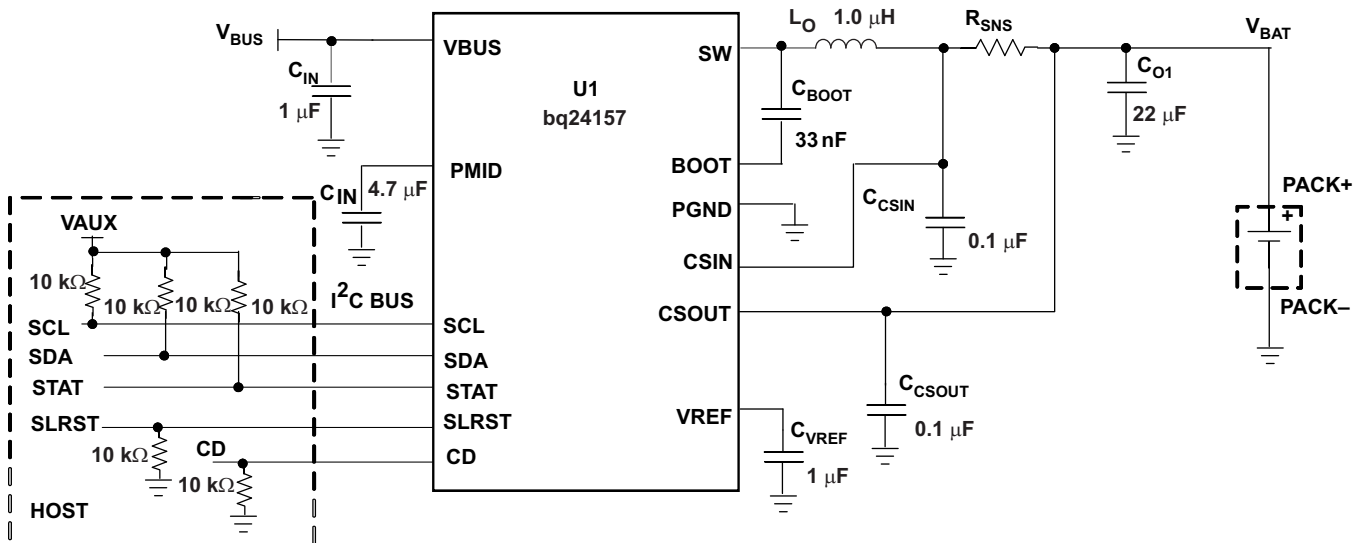


Figure 23. I<sup>2</sup>C Controlled 1-Cell USB Charger Application Circuit with USB OTG Support.

##### 10.1.1.1 Design Requirements

Use the following typical application design procedure to select external components values for the bq24157 device.

| Specification                               | Test Condition                              | MIN   | TYP        | MAX  | UNIT |
|---------------------------------------------|---------------------------------------------|-------|------------|------|------|
| Input DC voltage, $V_{IN}$                  | Input voltage from AC adapter input         | 4     | 5          | 6    | V    |
| Input current                               | Maximum input current from AC adapter input | 0.1   | 0.1 to 0.5 | 1.5  | A    |
| Charge current                              | Battery charge current                      | 0.325 | 0.7        | 1.55 | A    |
| Output regulation voltage                   | Voltage applied at $V_{BAT}$                | 0     | 3 to 4.2   | 4.44 | V    |
| Operating junction temperature range, $T_J$ |                                             | 0     |            | 125  | °C   |

### 10.1.1.2 Detailed Design Procedure

Systems Design Specifications:

- $V_{BUS} = 5\text{ V}$
- $V_{BAT} = 4.2\text{ V}$  (1-Cell)
- $I_{(charge)} = 1.25\text{ A}$
- Inductor ripple current = 30% of fast charge current

1. Determine the inductor value ( $L_{OUT}$ ) for the specified charge current ripple:

$$L_{OUT} = \frac{V_{BAT} \times (V_{BUS} - V_{BAT})}{V_{BUS} \times f \times \Delta I_L}$$
, the worst case is when battery voltage is as close as to half of the input voltage.

$$L_{OUT} = \frac{2.5 \times (5 - 2.5)}{5 \times (3 \times 10^6) \times 1.25 \times 0.3} \quad (1)$$

$$L_{OUT} = 1.11\text{ }\mu\text{H}$$

Select the output inductor to standard 1  $\mu\text{H}$ . Calculate the total ripple current with using the 1- $\mu\text{H}$  inductor:

$$\Delta I_L = \frac{V_{BAT} \times (V_{BUS} - V_{BAT})}{V_{BUS} \times f \times L_{OUT}} \quad (2)$$

$$\Delta I_L = \frac{2.5 \times (5 - 2.5)}{5 \times (3 \times 10^6) \times (1 \times 10^{-6})} \quad (3)$$

$$\Delta I_L = 0.42\text{ A}$$

Calculate the maximum output current:

$$I_{LPK} = I_{OUT} + \frac{\Delta I_L}{2} \quad (4)$$

$$I_{LPK} = 1.25 + \frac{0.42}{2} \quad (5)$$

$$I_{LPK} = 1.46\text{ A}$$

Select 2.5mm by 2mm 1- $\mu\text{H}$  1.5-A surface mount multi-layer inductor. The suggested inductor part numbers are shown as following.

**Table 10. Inductor Part Numbers<sup>(1)</sup>**

| PART NUMBER    | INDUCTANCE      | SIZE         | MANUFACTURER    |
|----------------|-----------------|--------------|-----------------|
| LQM2HPN1R0MJ0  | 1 $\mu\text{H}$ | 2.5 x 2.0 mm | Murata          |
| MIPS2520D1R0   | 1 $\mu\text{H}$ | 2.5 x 2.0 mm | FDK             |
| MDT2520-CN1R0M | 1 $\mu\text{H}$ | 2.5 x 2.0 mm | TOKO            |
| CP1008         | 1 $\mu\text{H}$ | 2.5 x 2.0 mm | Inter-Technical |

(1) See [Third-Party Products Disclaimer](#)

2. Determine the output capacitor value ( $C_{OUT}$ ) using 40 kHz as the resonant frequency:

$$f_0 = \frac{1}{2\pi \times \sqrt{L_{OUT} \times C_{OUT}}} \quad (6)$$

$$C_{OUT} = \frac{1}{4\pi^2 \times f_0^2 \times L_{OUT}} \quad (7)$$

$$C_{OUT} = \frac{1}{4\pi^2 \times (40 \times 10^3)^2 \times (1 \times 10^{-6})} \quad (8)$$

$$C_{OUT} = 15.8 \mu F$$

Select two 0603 X5R 6.3V 10- $\mu$ F ceramic capacitors in parallel i.e., Murata GRM188R60J106M.

- Determine the sense resistor using the following equation:

$$R_{(SNS)} = \frac{V_{(RSNS)}}{I_{(CHARGE)}} \quad (9)$$

The maximum sense voltage across the sense resistor is 85 mV. In order to get a better current regulation accuracy,  $V_{(RSNS)}$  should equal 85mV, and calculate the value for the sense resistor.

$$R_{(SNS)} = \frac{85mV}{1.25A} \quad (10)$$

$$R_{(SNS)} = 68 m\Omega$$

This is a standard value. If it is not a standard value, then choose the next close value and calculate the real charge current. Calculate the power dissipation on the sense resistor:

$$P_{(RSNS)} = I_{(CHARGE)}^2 \times R_{(SNS)}$$

$$P_{(RSNS)} = 1.25^2 \times 0.068$$

$$P_{(RSNS)} = 0.106 W$$

Select 0402 0.125-W 68-m $\Omega$  2% sense resistor, i.e. Panasonic ERJ2BWGR068.

- Measured efficiency and total power loss with different inductors are shown in Figure 24. SW node and inductor current waveform are shown in Figure 34.

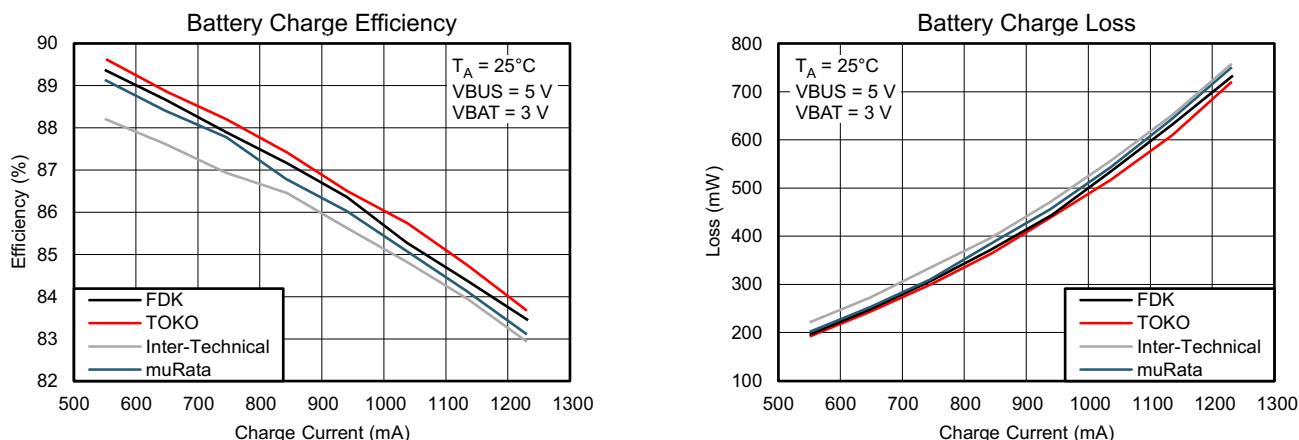


Figure 24. Measured Efficiency and Power Loss

### 10.1.2 Charge Current Sensing Resistor Selection Guidelines

Both the termination current range and charge current range depend on the sensing resistor ( $R_{SNS}$ ). The termination current step ( $I_{O(TERM\_STEP)}$ ) can be calculated using Equation 11:

$$I_{O(TERM\_STEP)} = \frac{V_{I(TERM0)}}{R_{(SNS)}} \quad (11)$$

Table 11 shows the termination current settings for three sensing resistors.

**Table 11. Termination Current Settings for 55-mΩ, 68-mΩ, 100-mΩ Sense Resistors**

| BIT            | $V_{I(TERM)} \text{ (mV)}$ | $I_{(TERM)} \text{ (mA)}$<br>$R_{(SNS)} = 55\text{m}\Omega$ | $I_{(TERM)} \text{ (mA)}$<br>$R_{(SNS)} = 68\text{m}\Omega$ | $I_{(TERM)} \text{ (mA)}$<br>$R_{(SNS)} = 100\text{m}\Omega$ |
|----------------|----------------------------|-------------------------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------|
| $V_{I(TERM2)}$ | 13.6                       | 247                                                         | 200                                                         | 136                                                          |
| $V_{I(TERM1)}$ | 6.8                        | 124                                                         | 100                                                         | 68                                                           |
| $V_{I(TERM0)}$ | 3.4                        | 62                                                          | 50                                                          | 34                                                           |
| Offset         | 3.4                        | 62                                                          | 50                                                          | 34                                                           |

For example, with a 68-mΩ sense resistor,  $V_{I(TERM2)} = 1$ ,  $V_{I(TERM1)} = 0$ , and  $V_{I(TERM0)} = 1$ ,  $I_{TERM} = [(13.6 \text{ mV} \times 1) + (6.8 \text{ mV} \times 0) + (3.4 \text{ mV} \times 1) + 3.4 \text{ mV}] / 68 \text{ m}\Omega = 200 \text{ mA} + 0 + 50 \text{ mA} + 50 \text{ mA} = 300 \text{ mA}$ .

The charge current step ( $I_{O(CHARGE\_STEP)}$ ) is calculated using Equation 12:

$$I_{O(CHARGE\_STEP)} = \frac{V_{I(CHRG0)}}{R_{(SNS)}} \quad (12)$$

Table 12 shows the charge current settings for three sensing resistors.

**Table 12. Charge Current Settings for 55-mΩ, 68-mΩ and 100-mΩ Sense Resistors**

| BIT            | $V_{I(REG)} \text{ (mV)}$ | $I_{O(CHARGE)} \text{ (mA)}$<br>$R_{(SNS)} = 55\text{m}\Omega$ | $I_{O(CHARGE)} \text{ (mA)}$<br>$R_{(SNS)} = 68\text{m}\Omega$ | $I_{O(CHARGE)} \text{ (mA)}$<br>$R_{(SNS)} = 100\text{m}\Omega$ |
|----------------|---------------------------|----------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------|
| $V_{I(CHRG3)}$ | 27.2                      | 495                                                            | 400                                                            | 272                                                             |
| $V_{I(CHRG2)}$ | 13.6                      | 247                                                            | 200                                                            | 136                                                             |
| $V_{I(CHRG1)}$ | 6.8                       | 124                                                            | 100                                                            | 68                                                              |
| $V_{I(CHRG0)}$ | N/A                       | N/A                                                            | N/A                                                            | N/A                                                             |
| Offset         | 37.4                      | 680                                                            | 550                                                            | 374                                                             |

For example, with a 68-mΩ sense resistor,  $V_{(CHRG3)} = 1$ ,  $V_{(CHRG2)} = 1$ ,  $V_{(CHRG1)} = 1$ ,  $I_{CHRG} = [(27.2 \text{ mV} \times 1) + (13.6 \text{ mV} \times 1) + (6.8 \text{ mV} \times 1) + 37.4 \text{ mV}] / 68 \text{ m}\Omega = 400 \text{ mA} + 200 + 100 + 550 \text{ mA} = 1250 \text{ mA}$ .

### 10.1.3 Output Inductor and Capacitance Selection Guidelines

The IC provides internal loop compensation. With the internal loop compensation, the highest stability occurs when the LC resonant frequency,  $f_o$ , is approximately 40 kHz (20 kHz to 80 kHz). Equation 13 can be used to calculate the value of the output inductor,  $L_{OUT}$ , and output capacitor,  $C_{OUT}$ .


$$f_o = \frac{1}{2\pi \times \sqrt{L_{OUT} \times C_{OUT}}} \quad (13)$$

To reduce the output voltage ripple, a ceramic capacitor with the capacitance between 4.7 μF and 47 μF is recommended for  $C_{OUT}$ , see the application section for components selection.


$V_{BUS} = 5 \text{ V}$ ,  $I_{CHARGE} = 1250 \text{ mA}$ ,  $V_{BAT} = 3.5 \text{ V}$  to 4.44 V (Adjustable).

## 10.2 Typical Performance Curves


Using circuit shown in [Figure 23](#),  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

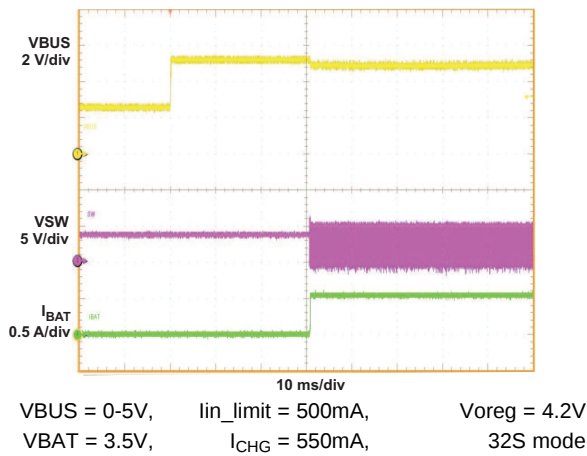


**Figure 25. Adapter Insertion**

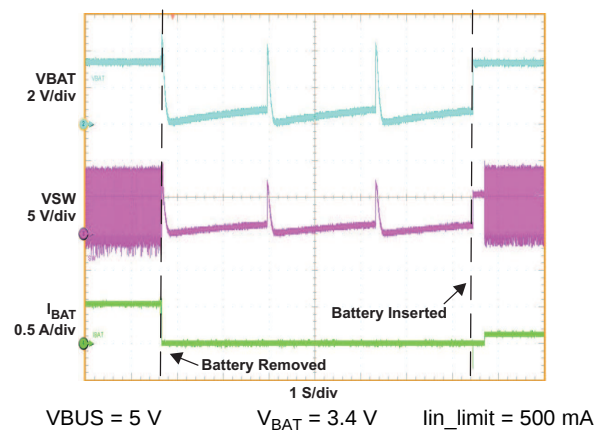


**Figure 26. Battery Insertion/Removal (HOST Mode)**

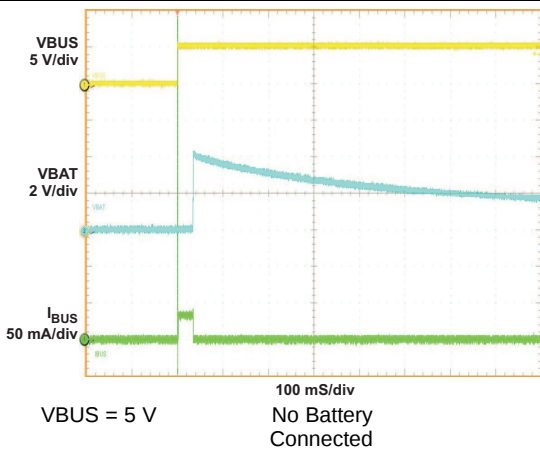


**Figure 27. Battery Detection at Power Up**

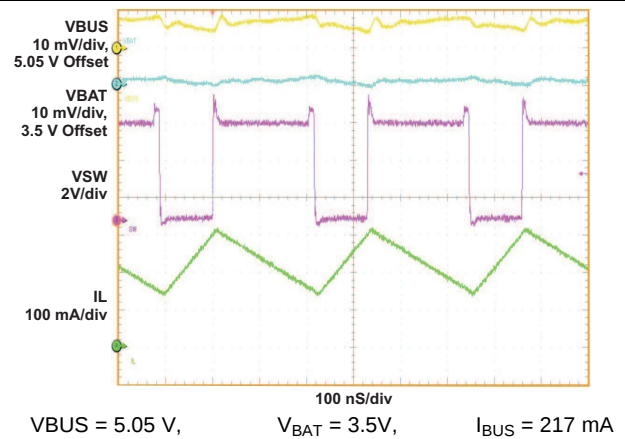

**Figure 28. BOOST Waveform (PWM Mode)**


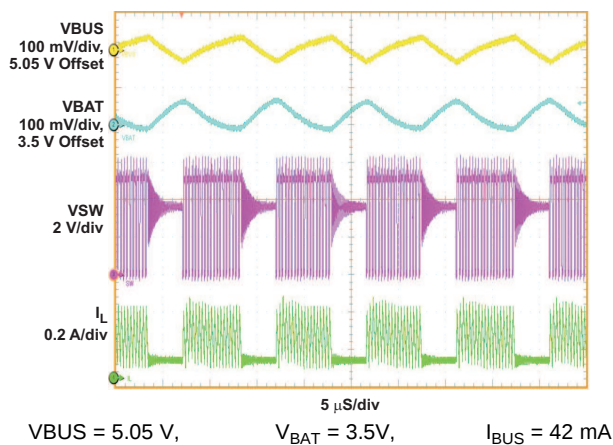


**Figure 29. BOOST Waveform (PFM Mode)**

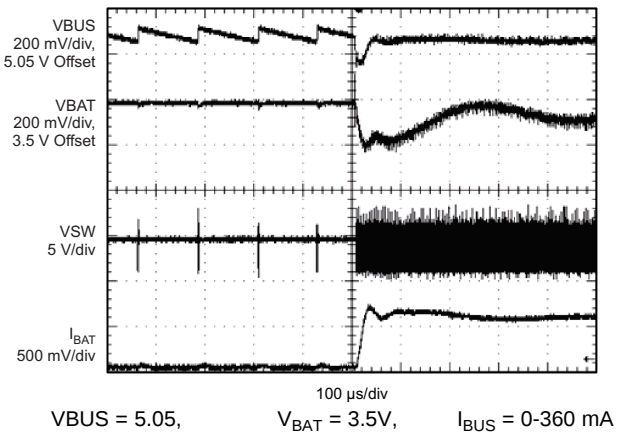

**Figure 30. Load Step Up Response (BOOST Mode)**


## Typical Performance Curves (continued)

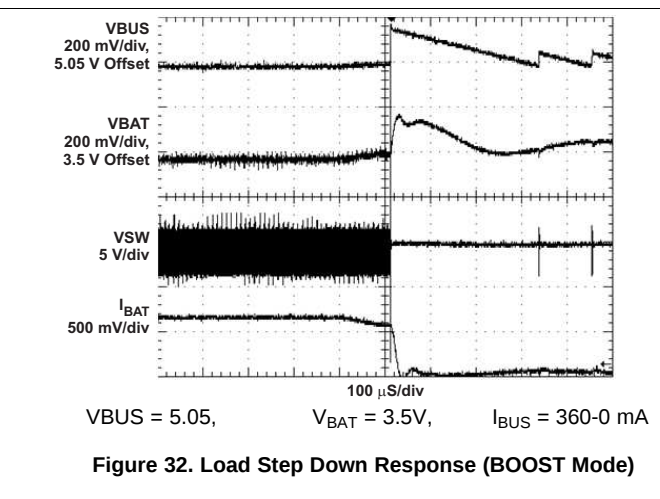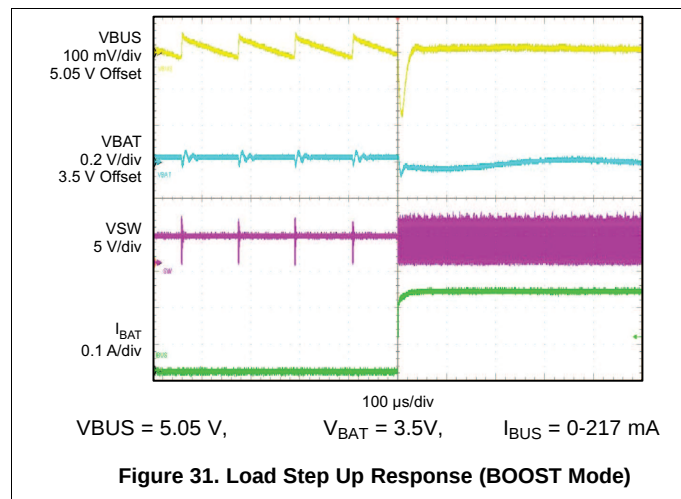

## 11 Power Supply Recommendations

### 11.1 System Load After Sensing Resistor

One of the simpler high-efficiency topologies connects the system load directly across the battery pack, as shown in Figure 33. The input voltage has been converted to a usable system voltage with good efficiency from the input. When the input power is on, it supplies the system load and charges the battery pack at the same time. When the input power is off, the battery pack powers the system directly.

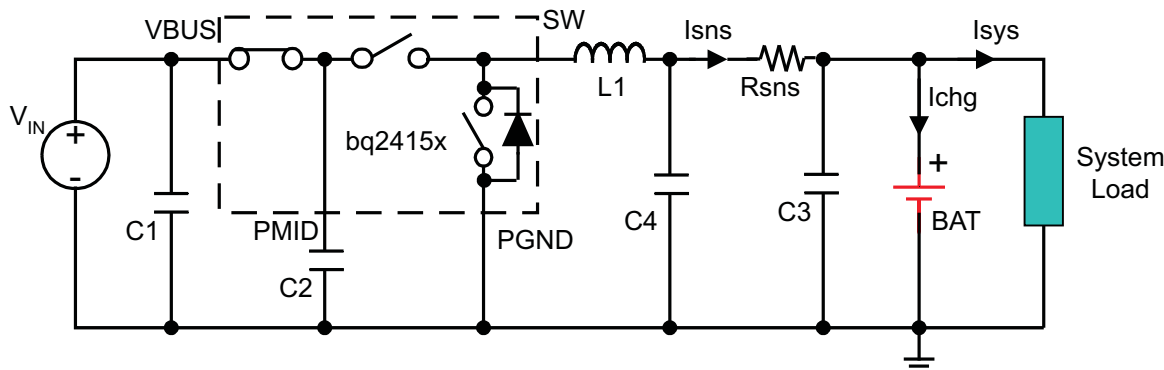

**Figure 33. System Load After Sensing Resistor**

#### 11.1.1 The Advantages:

1. When the AC adapter is disconnected, the battery pack powers the system load with minimum power dissipation. Consequently, the time that the system runs on the battery pack can be maximized.
2. It reduces the number of external path selection components and offers a low-cost solution.
3. Dynamic power management (DPM) can be achieved. The total of the charge current and the system current can be limited to a desired value by setting the charge current value. When the system current increases, the charge current drops by the same amount. As a result, no potential over-current or over-heating issues are caused by excessive system load demand.
4. The total input current can be limited to a desired value by setting the input current limit value. USB specifications can be met easily.
5. The supply voltage variation range for the system can be minimized.
6. The input current soft-start can be achieved by the generic soft-start feature of the IC.

#### 11.1.2 Design Requirements and Potential Issues:

1. If the system always demands a high current (but lower than the regulation current), the battery charging never terminates. Thus, the battery is always charged, and its lifetime may be reduced.
2. Because the total current regulation threshold is fixed and the system always demands some current, the battery may not be charged with a full-charge rate and thus may lead to a longer charge time.
3. If the system load current is large after the charger has been terminated, the IR drop across the battery impedance may cause the battery voltage to drop below the refresh threshold and start a new charge cycle. The charger would then terminate due to low charge current. Therefore, the charger would cycle between charging and terminating. If the load is smaller, the battery has to discharge down to the refresh threshold, resulting in a much slower cycling.
4. In a charger system, the charge current is typically limited to about 30mA, if the sensed battery voltage is below 2V short circuit protection threshold. This results in low power availability at the system bus. If an external supply is connected and the battery is deeply discharged, below the short circuit protection threshold, the charge current is clamped to the short circuit current limit. This then is the current available to the system during the power-up phase. Most systems cannot function with such limited supply current, and the battery supplements the additional power required by the system. Note that the battery pack is already at the depleted condition, and it discharges further until the battery protector opens, resulting in a system shutdown.
5. If the battery is below the short circuit threshold and the system requires a bias current budget lower than the

### **System Load After Sensing Resistor (continued)**

short circuit current limit, the end-equipment will be operational, but the charging process can be affected depending on the current left to charge the battery pack. Under extreme conditions, the system current is close to the short circuit current levels and the battery may not reach the fast-charge region in a timely manner. As a result, the safety timers flag the battery pack as defective, terminating the charging process. Because the safety timer cannot be disabled, the inserted battery pack must not be depleted to make the application possible.

6. If the battery pack voltage is too low, highly depleted, totally dead or even shorted, the system voltage is clamped by the battery and it cannot operate even if the input power is on.

## 12 Layout

### 12.1 Layout Guidelines

It is important to pay special attention to the PCB layout. The following provides some guidelines:

- To obtain optimal performance, the power input capacitors, connected from input to PGND, should be placed as close as possible to the pin. The output inductor should be placed close to the IC and the output capacitor connected between the inductor and PGND of the IC. The intent is to minimize the current path loop area from the SW pin through the LC filter and back to the PGND pin. To prevent high frequency oscillation problems, proper layout to minimize high frequency current path loop is critical. (See [Figure 34](#).) The sense resistor should be adjacent to the junction of the inductor and output capacitor. Route the sense leads connected across the RSNS back to the IC, close to each other (minimize loop area) or on top of each other on adjacent layers (do not route the sense leads through a high-current path). (See [Figure 35](#).)
- Place all decoupling capacitors close to their respective IC pins and close to PGND (do not place components such that routing interrupts power stage currents). All small control signals should be routed away from the high current paths.
- The PCB should have a ground plane (return) connected directly to the return of all components through vias (two vias per capacitor for power-stage capacitors, two vias for the IC PGND, one via per capacitor for small-signal components). A star ground design approach is typically used to keep circuit block currents isolated (high-power/low-power small-signal) which reduces noise-coupling and ground-bounce issues. A single ground plane for this design gives good results. With this small layout and a single ground plane, there is no ground-bounce issue, and having the components segregated minimizes coupling between signals.
- The high-current charge paths into VBUS, PMID and from the SW pins must be sized appropriately for the maximum charge current in order to avoid voltage drops in these traces. The PGND pins should be connected to the ground plane to return current through the internal low-side FET.
- Place 4.7 $\mu$ F input capacitor as close to PMID pin and PGND pin as possible to make high frequency current loop area as small as possible. Place 1 $\mu$ F input capacitor as close to VBUS pin and PGND pin as possible to make high frequency current loop area as small as possible (see [Figure 36](#)).



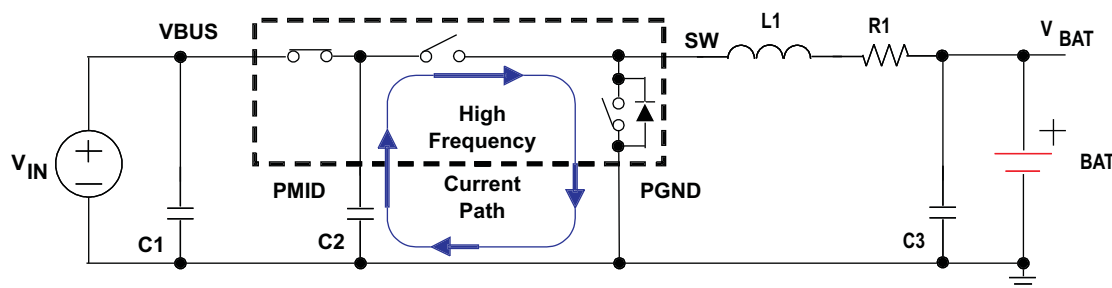


Figure 34. High Frequency Current Path

## 12.2 Layout Example

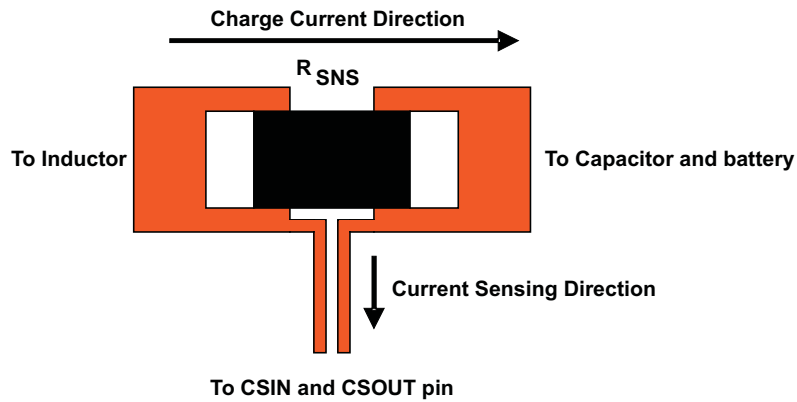

**Figure 35. Sensing Resistor PCB Layout**

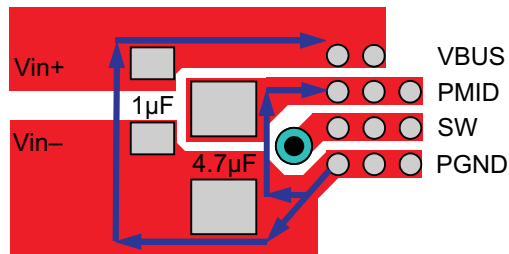

**Figure 36. Input Capacitor Position and PCB Layout Example**

## 13 デバイスおよびドキュメントのサポート

### 13.1 ドキュメントのサポート

#### 13.1.1 デベロッパー・ネットワークの製品に関する免責事項

デベロッパー・ネットワークの製品またはサービスに関するTIの出版物は、単独またはTIの製品、サービスと一緒に提供される場合に関係なく、デベロッパー・ネットワークの製品またはサービスの適合性に関する是認、デベロッパー・ネットワークの製品またはサービスの是認の表明を意味するものではありません。

### 13.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](http://ti.com)のデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 13.3 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ オンライン・コミュニティ** TIのE2E ( *Engineer-to-Engineer* ) コミュニティ。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

**設計サポート** TIの設計サポート役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

### 13.4 商標

E2E, NanoFree are trademarks of Texas Instruments.

I<sup>2</sup>C is a trademark of NXP B.V. Corporation.

### 13.5 静電気放電に関する注意事項



これらのデバイスは、限定的なESD (静電破壊) 保護機能を内蔵しています。保存時または取り扱い時は、MOSゲートに対する静電破壊を防止するために、リード線同士をショートさせておくか、デバイスを導電フォームに入れる必要があります。

### 13.6 Glossary

[SLYZ022](#) — TI Glossary.


This glossary lists and explains terms, acronyms, and definitions.

## 14 メカニカル、パッケージ、および注文情報


以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

## 14.1 パッケージ概要

**CHIP SCALE PACKAGE**  
(Top Side Symbol For bq24157)

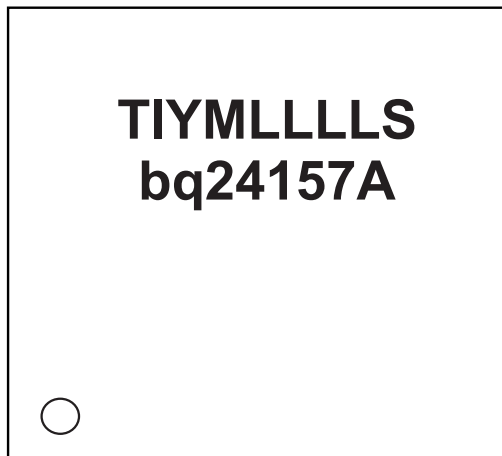

**WCSP PACKAGE**  
(Top View)

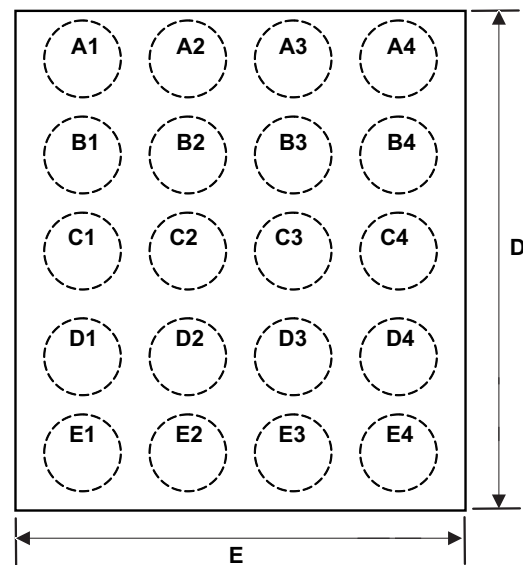

0-Pin A1 Marker, TI-TI Letters, YM- Year Month Date Code, LLLL-Lot Trace Code, S-Assembly Site Code

### 14.1.1 チップ・スケール・パッケージの寸法

bq24157デバイスは、20バンプのチップ・スケール・パッケージ(YYF、NanoFree™)で供給されます。

パッケージの寸法を、次の表に示します。

| D           | E           |
|-------------|-------------|
| 最大 = 2.17mm | 最大 = 2.03mm |
| 最小 = 2.11mm | 最小 = 1.97mm |

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| BQ24157YFFR      | ACTIVE        | DSBGA        | YFF                | 20   | 3000           | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | BQ24157A                | <a href="#">Samples</a> |
| BQ24157YFFT      | ACTIVE        | DSBGA        | YFF                | 20   | 250            | RoHS & Green    | SNAGCU                               | Level-1-260C-UNLIM   | -40 to 125   | BQ24157A                | <a href="#">Samples</a> |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| BQ24157YFFR | DSBGA        | YFF             | 20   | 3000 | 180.0              | 8.4                | 2.2     | 2.35    | 0.8     | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| BQ24157YFFR | DSBGA        | YFF             | 20   | 3000 | 182.0       | 182.0      | 20.0        |

YFF (R-XBGA-N20)

DIE-SIZE BALL GRID ARRAY

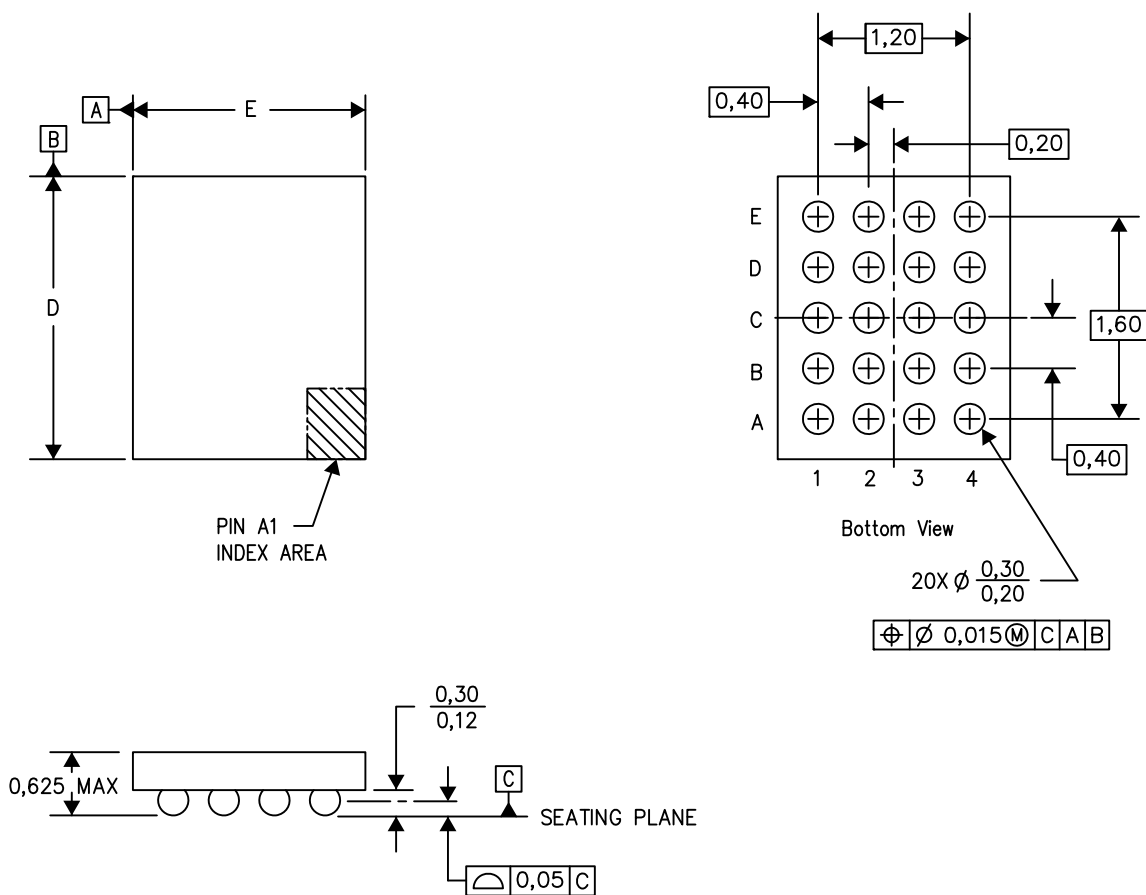

D: Max = 2.172 mm, Min = 2.112 mm

E: Max = 2.03 mm, Min = 1.97 mm

4207625-9/A0 12/13

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. NanoFree™ package configuration.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス・デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、または [ti.com](https://www.ti.com) やかかる TI 製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、TI はそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated