

TPS65987D GPIO Events

Wang, Hao

ABSTRACT

The Texas Instruments TPS65987D from family of USB Type-C and USB PD controllers provides a set of GPIO events to achieve desired system behavior. A developer may program custom behavior triggered by GPIO to enable new functionality, and even load modified device configurations using GPIO events functionality.

These firmware based GPIO events are simple to configure using the provided GUI software tools. The core TI PD controller firmware is unchanged when using GPIO events which ensures reliability, USB PD compliance, and also eases and speeds up development. This application report describes the procedure for configuring GPIO events on the TPS65987D and provides some concrete examples.

Contents

1	Introduction	2
2	TPS65987D GPIO Event List	2
3	GPIO Events Register and Example Settings	5
4	PD Controller Customization by GPIO Events	13
5	Status Register and 4CC Commands	15

List of Figures

1	Mapping a GPIO Event using TPS6598x Application Customization Tool.....	6
2	Template with GPIO Events Mapped for TPS65987D EVM	7
3	Number of Configuration Sets	8
4	App Config Group 1 Settings	9
5	Adjust Registers in AC GPIO Low (0x1)	10
6	App Config GPIO Set Event, GPIO Low Settings Example	11
7	App Config GPIO Set Event, GPIO High Settings Example.....	12
8	Map Load App Config Set 1 to GPIO 4	13
9	GPIO 21 Settings	14
10	PD Trace of Barrel Jack Connect Event	14
11	PD Trace of Barrel Jack Removal Event	15
12	Variable DC/DC GPIO Status for 5-V Supply	16
13	Variable DC/DC GPIO Status for 20-V Supply	17
14	4CC Commands in TPS6598x Application Customization Tool	18
15	Using 'GPoe' 4CC Command	19
16	Using 'GPsh' 4CC Command	20

List of Tables

1	List of TPS65987D GPIO Events	2
---	-------------------------------------	---

Trademarks

All trademarks are the property of their respective owners.

1 Introduction

GPIO Events feature of TPS65987D allow users to tie specific events within the PD controller to trigger a signal in the system and also control the PD controller behavior by an external signal. These GPIO toggles in response to a defined PD or USB event can be used for customizing system behavior. TPS65987D Configuration Tool is used to assign events to specific GPIO. TPS65987D device has a number of configurable GPIOs that can be used for this purpose and each GPIO behavior can be configured independently with such events depending on the system need.

The ability to configure independent GPIO events allows PD system designers to achieve variety of system behavior. This helps TPS65987D users to implement unique applications and differentiate their end products with innovative system implementations. There are also GPIO events available that can trigger loading a modified device configuration settings real-time based on the requirements of an application that require configuration change on-the-fly.

Unlike some PD controllers in the market that require firmware customization, TI PD controller can deliver the same custom behavior using GPIO events feature keeping the core firmware same. This ensures that a fully tested and verified firmware can be used by all end users without having to modify PD controller internal firmware. This helps speed up end product development cycle and ensures that overall system behavior is robust and reliable.

Below are the topics that would be covered in this chapter:

1. Available GPIO events in TPS65987D.
2. Setting up and modifying examples of GPIO events capabilities.
3. Verifying correct behavior of event that is configured.
4. Analyzing the results of the PD trace data.
5. Modifying GPIO events by using [TPS6598x Application Customization tool](#).

2 TPS65987D GPIO Event List

TPS65987D firmware implements specific events that can be tied to GPIOs. These assigned events dictate the behavior of a system in response to a defined hardware or USB event. The TPS6598x Application Customization tool can be used to assign events to specific GPIOs. [Table 1](#) lists all the GPIO events that are available in TPS65987D and their behavior.

Table 1. List of TPS65987D GPIO Events

Event Name	I/O	Active State	Behavior
Port 0 Plug Event	Output	High	<ul style="list-style-type: none"> • Asserted high when plug event (attached state) has occurred. • Asserted low when disconnected.
Port 0 Cable Orientation Event	Output	High	<ul style="list-style-type: none"> • Asserted high when plug is connected upside-down. • Asserted low when the plug is connected upside-up or disconnected.
Port 0 AMSEL Event	Output	N/A(Tri-state)	<ul style="list-style-type: none"> • Asserted high when 4-Lane DisplayPort mode. • Asserted low when 2-Lane DisplayPort and USB3 mode is supported and entered. • High-Z when Type-C port is disconnected or USB3 data is required without DisplayPort mode entry (tri-state capable with equal value pullup and pulldown resistors).
Port 0 Source PDO 0 Negotiated Port 0 Source PDO 1 Negotiated Port 0 Source PDO 2 Negotiated Port 0 Source PDO 3 Negotiated	Output	High	<ul style="list-style-type: none"> • Asserted high when source PDO x has been negotiated, otherwise low.

Table 1. List of TPS65987D GPIO Events (continued)

Event Name	I/O	Active State	Behavior
Port 0 Source PDO Negotiated TT 1 Port 0 Source PDO Negotiated TT 2 Port 0 Source PDO Negotiated TT 3	Input	High	These 3 Events combine to form a 3-bit truth table to allow digital outputs indicating the active state of up to 7 PDOs. TT 3 is the most-significant bit (MSB) and TT 1 is the least significant bit (LSB).
Output Enabled Without Event	Output	N/A	<ul style="list-style-type: none"> Acting as an output without any event.
Port 0 PDIO In 0 Event Port 0 PDIO In 1 Event Port 0 PDIO In 2 Event Port 0 PDIO In 3 Event	Input	N/A	<p>Input GPIO event for PDIO Alternate Mode (when supported by both port partners and mode is entered). A change in state of PDIO In x will trigger a PDIO Alternate Mode message to be sent to the port partner.</p> <p>PDIO Out x will reflect the value of this signal after the PDIO Alternate Mode message is received by the port partner. These events do not have a pre-determined active state.</p>
Port 0 PDIO Out 0 Event Port 0 PDIO Out 1 Event Port 0 PDIO Out 2 Event Port 0 PDIO Out 3 Event	Output	N/A	<p>Output GPIO event for PDIO Alternate Mode.</p> <p>When PDIO Alternate Mode is supported by both port partners and entered, output follows GPIO pin mapped to PDIO In x event on port partner.</p>
Port 0 VBUS Detect Event	Output	High	<ul style="list-style-type: none"> Asserted high when voltage is present on VBUS and Power Status (USB Type-C or PD) is Sink. Asserted low when port is disconnected and set low when connection is lost and VBUS approaches GND.
Port 0 USB3 Event	Output	High	<ul style="list-style-type: none"> Asserted high when data connection requires USB3 (for example, 2-Lane+USB3 mode). Asserted low when USB3 data is not required or supported (for example, 4-Lane DisplayPort mode entered or USB3 support de-activated by firmware configuration).
Port 0 DP Mode Select Event	Output	High	<ul style="list-style-type: none"> Asserted high when data connection is DisplayPort (either 4-Lane mode or 2-Lane+USB3 mode). Asserted low when Type-C port is disconnected or DisplayPort mode is not active.
Port 0 User SVID Active Event	Output	High	<ul style="list-style-type: none"> Asserted high when port is in User SVID Alternate Mode, otherwise low.
Port 0 Source Sink Event	Output	N/A(Tri-state)	<ul style="list-style-type: none"> Asserted high when port is operating as a Source. Asserted low when port is operating as a Sink. High-Z when port is disconnected or no PD contract is active (tri-state capable with equal value external pullup and pulldown resistors).
Port 0 DP or USB3 Event	Output	High	<ul style="list-style-type: none"> Asserted high when data connection is DisplayPort or USB3. Asserted low if neither data mode is active nor port is disconnected.
Port 0 UFP DFP Event	Output	High	<ul style="list-style-type: none"> Asserted high when data role is UFP or no connection at Type-C port. Asserted low when data role is DFP.
Port 0 TBT Event	Output	High	<ul style="list-style-type: none"> Asserted high when data connection is thunderbolt otherwise low.
Port 0 Billboard Event	Output	High	<ul style="list-style-type: none"> Asserted high when Billboard is presented, otherwise low.
Port 0 Fault Input Event	Input	Low	Used to allow external devices to enable error recovery on a given port. There is one fault condition input per port. When set low port enters Error Recovery State. When set high, no action.
Port 0 FRSwap Input Event	Input	N/A	On the falling edge of input event, a device configured as a Source will enable the FRS pull-down on the CC pin and start the FRS process. No action on rising edge of input event.

Table 1. List of TPS65987D GPIO Events (continued)

Event Name	I/O	Active State	Behavior
Port 0 FaultZ Output Event	Output	High	<ul style="list-style-type: none"> Asserted high when an over-current fault condition occurs on any power path as a Source (USB Type-C or PD) or 5 V cannot be provided to VBUS on initial connection (short on contact). Asserted low during normal operation.
Port 0 Load App Config 1 Event Port 0 Load App Config 2 Event Port 0 Load App Config 3 Event	Input	N/A	<p>Upon Rising Edge:</p> <ul style="list-style-type: none"> App Config Set for GPIO = High will be loaded as the active configuration. 1st 4CC Data and Command is written to selected CMDX register (optional). 2nd 4CC Data and Command (or PD Task) is written to selected CMDX register (optional). <p>Upon Falling Edge:</p> <ul style="list-style-type: none"> App Config Set for GPIO = Low will be loaded as the active configuration. 1st 4CC Data and Command is written to selected CMDX register (optional). 2nd 4CC Data and Command (or PD Task) is written to selected CMDX register (optional).
Port 0 Sink Greater Than Threshold Event	Output	High	<ul style="list-style-type: none"> Asserted high when in an active PD contract and Sinking greater than threshold setting. Asserted low when any other sink or source PD contract is active, no PD contract is active, or port is disconnected.
Port 0 Icelake Retimer Force Power Event	Output	High	Asserted high when port is connected or "Ice Lake Retimer SOC OVR Force Power Event" GPIO is high, otherwise low.
Port 0 Ice Lake Reset N Event	Output	High	<ul style="list-style-type: none"> Asserted high 1.5ms after "Port 0 Icelake Retimer Force Power Event" when Port 0 enters AttachWait.SRC or AttachWait.SNK status and remains high throughout the presence of a connection. Asserted low when Port 0 enters UnattachWait.SRC or UnattachWait.SNK status.
Port 0 Ice Lake Prochot N Event	Output	High	<ul style="list-style-type: none"> Asserted high when device enters Unattached.SRC, Unattached.SNK, sending Request message or sending Accept to PR_SWAP. Asserted low when "Ice Lake Prochot Notification" event is cleared.
Ice Lake Retimer SOC OVR Force Power Event	Input	High	SOC or EC enable to power up the BB retime outside of a valid Type-C connection. The level of this input influences the output of "Port 0 Icelake Retimer Force Power Event" GPIO. Single "Ice Lake Retimer SOC OVR Force Power Event" input per PD controller.
Barrel Jack Detect Event	Input	High	Upon Rising Edge (Barrel Jack detected):
			Upon Falling Edge (Barrel Jack removed):
Ice Lake UFP Indicator Event	Output	High	<ul style="list-style-type: none"> Clear Dead Battery Flag Set Externally Powered = 1 Swap to Source
Ice Lake Prevent DR Swap to UFP	Input	High	When high DR_Swap requests that would result in the target port changing to the UFP role will be rejected.
Ice Lake High Current Contract Active Event	Output	High	<ul style="list-style-type: none"> Asserted high when at least one port has negotiated a source contract exceeding 5 V at 0.9 A, otherwise low.
Ice Lake Prevent High Current Contract Active Event	Input	High	When high source capabilities are reduced to only 5 V at 0.9 A.

Table 1. List of TPS65987D GPIO Events (continued)

Event Name	I/O	Active State	Behavior
Port 0 Audio Accessory Event	Output	High	<ul style="list-style-type: none"> Asserted high when audio accessory mode is detected, otherwise low.
Port 0 Source Power Greater Than Threshold	Output	High	<ul style="list-style-type: none"> Asserted high when in an active PD contract and sourcing greater than threshold setting. Asserted low when any other sink or source PD contract is active, no PD contract is active, or port is disconnected.
Port 0 Debug Accessory Event	Output	High	<ul style="list-style-type: none"> Asserted high when debug accessory mode is detected, otherwise low.
Port 0 Sink PDO 0 Negotiated Port 0 Sink PDO 1 Negotiated Port 0 Sink PDO 2 Negotiated Port 0 Sink PDO 3 Negotiated	Output	High	<ul style="list-style-type: none"> Asserted high when sink PDO x has been negotiated, otherwise low.
Port 0 Sink PDO Negotiated TT 1 Port 0 Sink PDO Negotiated TT 2 Port 0 Sink PDO Negotiated TT 3	Input	High	These 3 Events combine to form a 3-bit truth table to allow digital outputs indicating the active state of up to 7 PDOs. TT 3 is the most-significant bit (MSB) and TT 1 is the least significant bit (LSB).
Port 0 Vconn On	Output	High	<ul style="list-style-type: none"> Asserted high when Vconn is powered, otherwise low.
Disabled	N/A	N/A	GPIO is disabled.
PP1 Switch Event	Output	High	<ul style="list-style-type: none"> Asserted high when PP1 switch is closed. Asserted low when PP1 switch opens.
Port 0 I2C1 Master IRQ Event	Input	High	Master IRQ Event for use with an external retimer.
Port 0 I2C3 Master IRQ Event	Input	High	Master IRQ Event for use with an external retimer.
Port 0 USB2 on HS Mux Event	Output	High	<ul style="list-style-type: none"> Asserted high when USB2 is active, otherwise low.
Sink Arbitration GPIO Output	Output	High	<ul style="list-style-type: none"> Asserted high when a power path is closed in sink mode, otherwise low.
Sink Arbitration GPIO Input	Input	High	Device will not close a sink power path when the input is asserted high.

3 GPIO Events Register and Example Settings

Configuration Registers

- 0x5C, GPIO Configuration

GPIO configuration registers of TPS65987D allows event mapping to available GPIOs. Each GPIO output can be configured as open drain or push-pull, and use either LDO_3V3 or VDDIO as the supply. Internal pullup and pulldown resistors for each GPIO can also be configured using configuration register. Note that some of the GPIOs that are pre-configured in the firmware for specific event can't be changed using the Application Customizer tool.

3.1 GPIO Event Example Settings

The TPS6598x Application Customization tool can be used to set different GPIO Event Capabilities. Using I/O Configuration page of the tool, any event can be assigned to a GPIO as shown in [Figure 1](#).

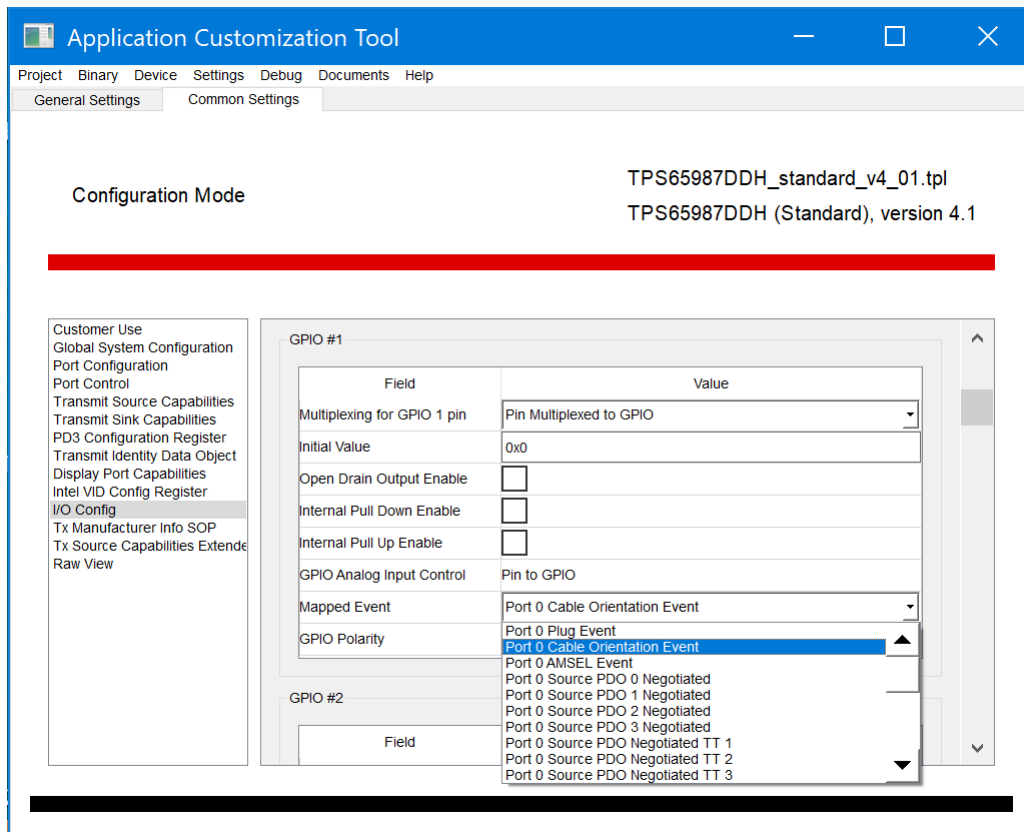


Figure 1. Mapping a GPIO Event using TPS6598x Application Customization Tool

The TPS6598x Application Customization tool also contains example projects with different GPIO Event Capabilities already mapped depending on system need. The project template named “TPS65987DDH_standard_v4_01.tpl” demonstrates an example of how the GPIO Events are mapped for TPS65987D EVM. Once the project template is loaded all the relevant GPIO Events that are configured can be seen from “I/O Configuration” page of the tool as shown in [Figure 2](#).

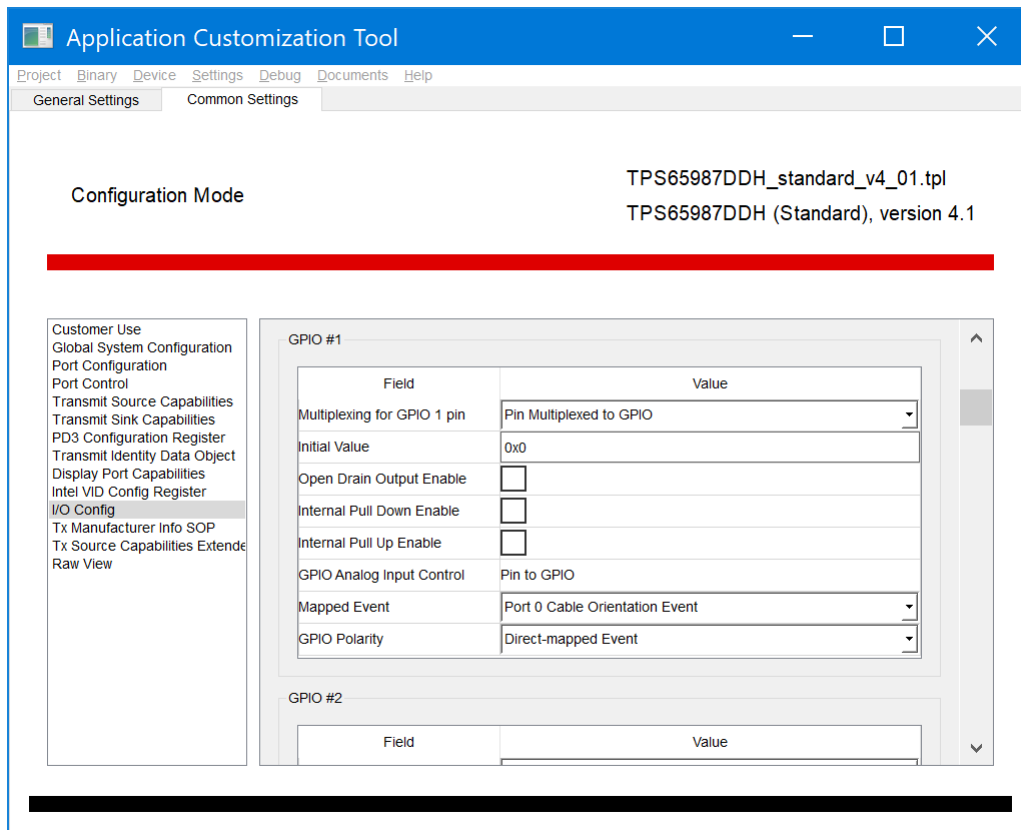


Figure 2. Template with GPIO Events Mapped for TPS65987D EVM

3.2 Application Configuration GPIO Event Settings

There are advanced GPIO events that can be used to load modified configurations to device at run-time. The example shows that TPS65987D transmit new source capabilities 5 V, 3 A when GPIO4 goes from high to low and 5 V, 3 A and 9 V at approximately 20 V, 3 A when GPIO4 goes from low to high. Here are the steps to set up I/O Configuration:

1. Load a template. The new project template *TPS65987DDH_advanced_v4_01.tpl* can be loaded by clicking *Project*→*TPS65987DDH*→*Advanced*→*Dual Role Port (DRP)*, *prefers power source*→*None (DisplayPort Only)*.
2. Change *Number of Configuration Sets* in *General Settings* to 2, and then change *Virtual Device 1* to *AC GPIO Low*, and *Virtual Device 2* to *AC GPIO High* as shown in [Figure 3](#).

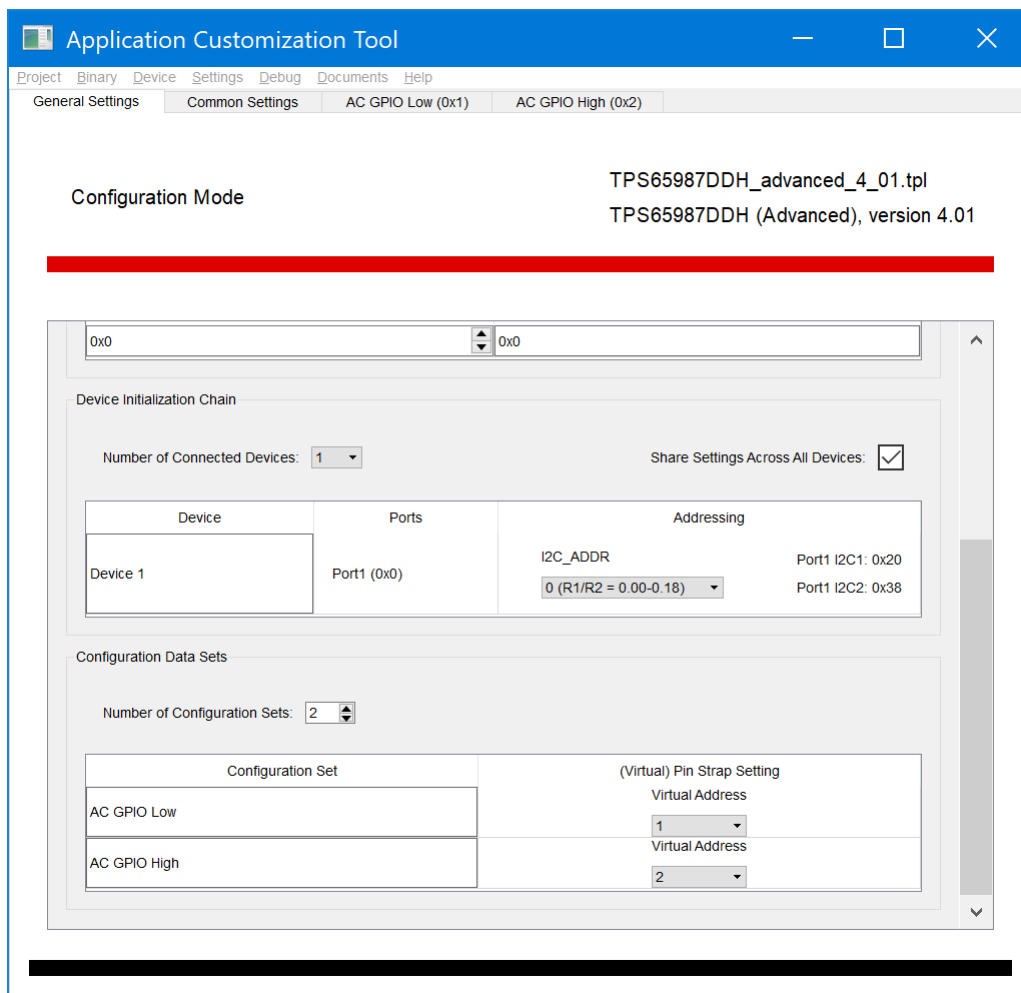


Figure 3. Number of Configuration Sets

3. Set App Configuration Group 1 in *Common Settings*.

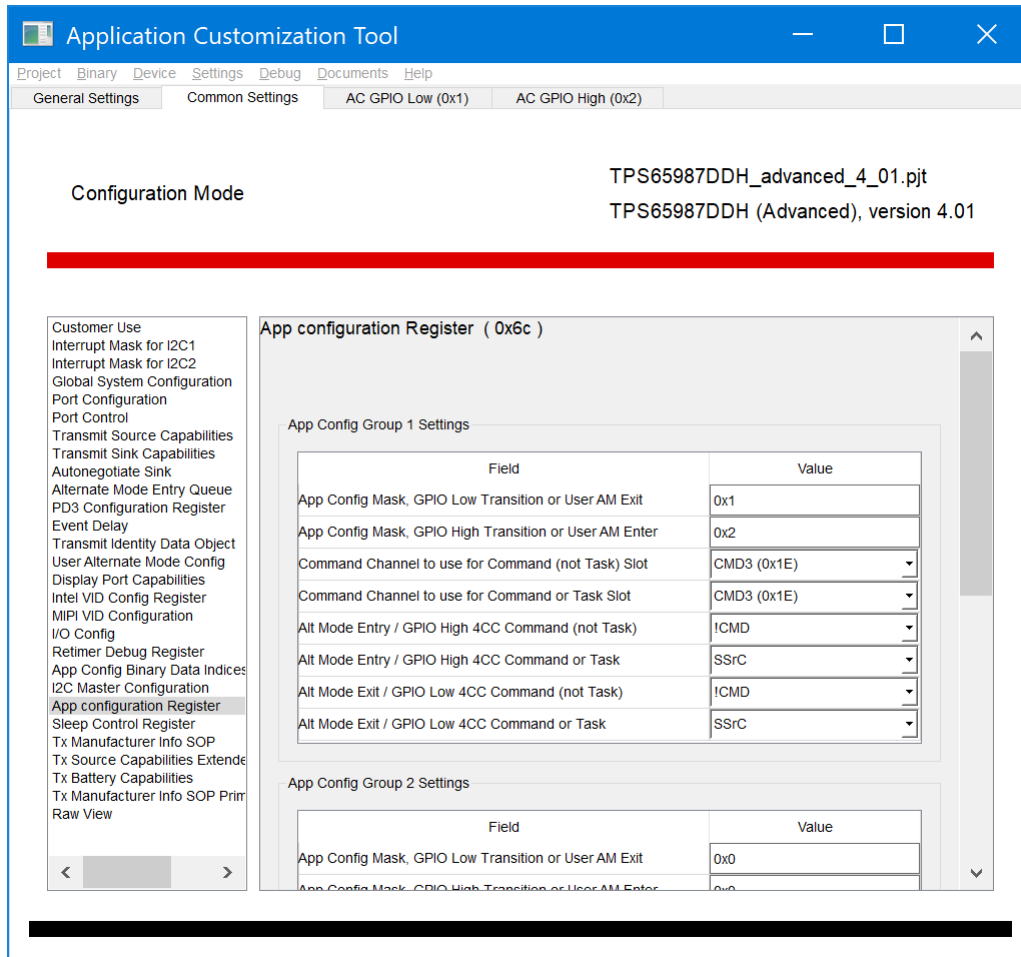


Figure 4. App Config Group 1 Settings

- Adjust Registers in *AC GPIO Low (0x1)* to set the behavior when GPIO4 goes from high to low. External hardware event can trigger the PD controller to change configuration. In this example, GPIO4 high to low transition would configure Transmit Source Capabilities register (0x32) with one PDO as shown in [Figure 5](#) and [Figure 6](#).

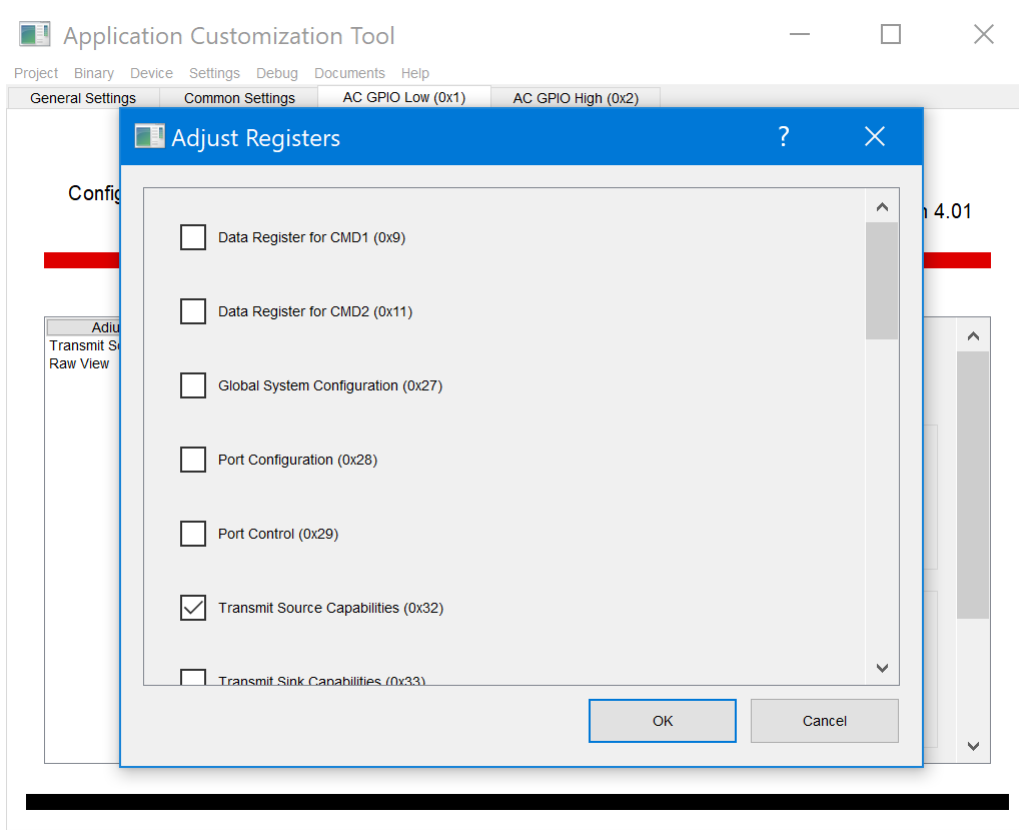


Figure 5. Adjust Registers in AC GPIO Low (0x1)

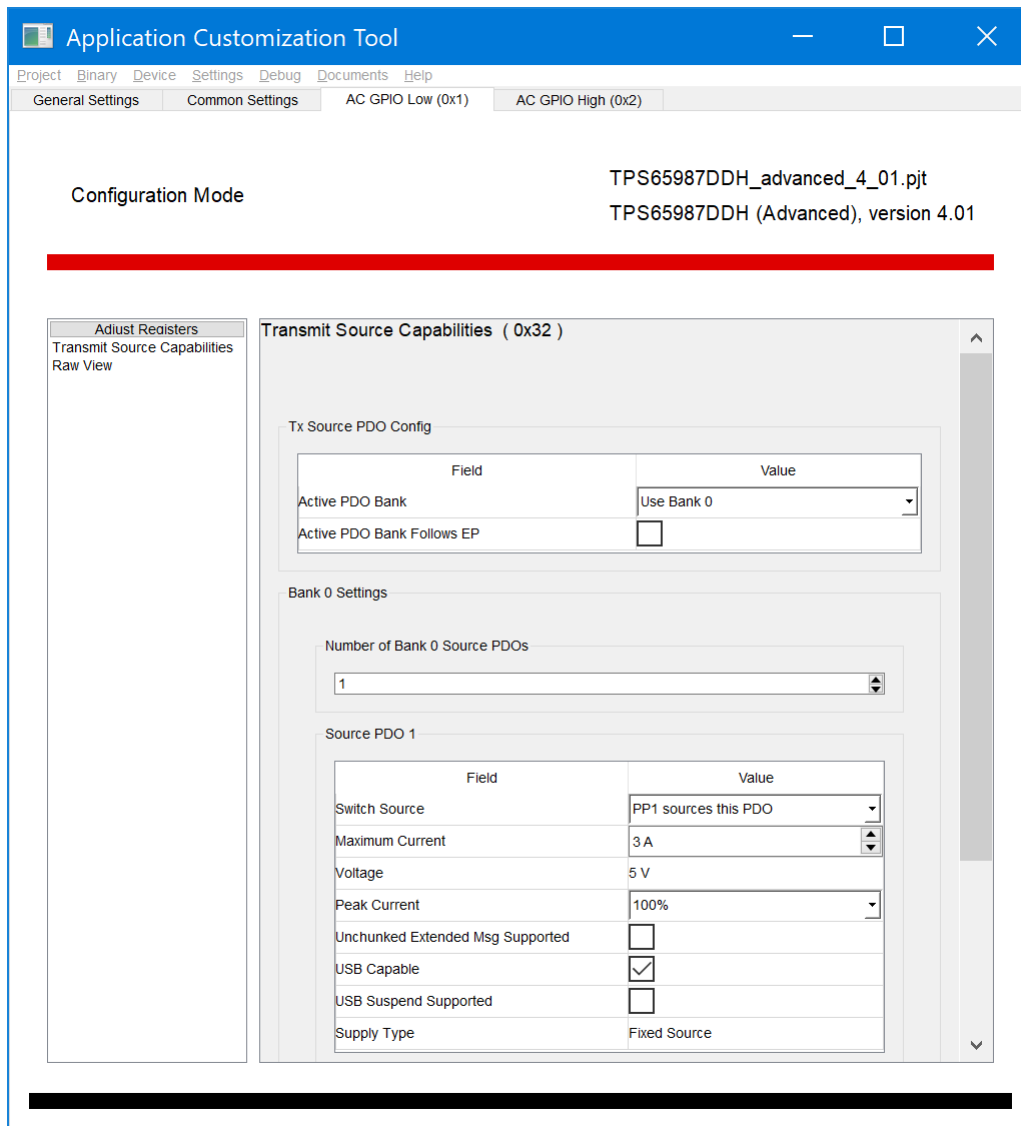


Figure 6. App Config GPIO Set Event, GPIO Low Settings Example

- Adjust Registers in *AC GPIO High (0x2)* to set the behavior when GPIO4 transients from low to high. In this example, GPIO4 low to high transition would configure Transmit Source Capabilities register (0x32) with two PDOs as shown in Figure 7.

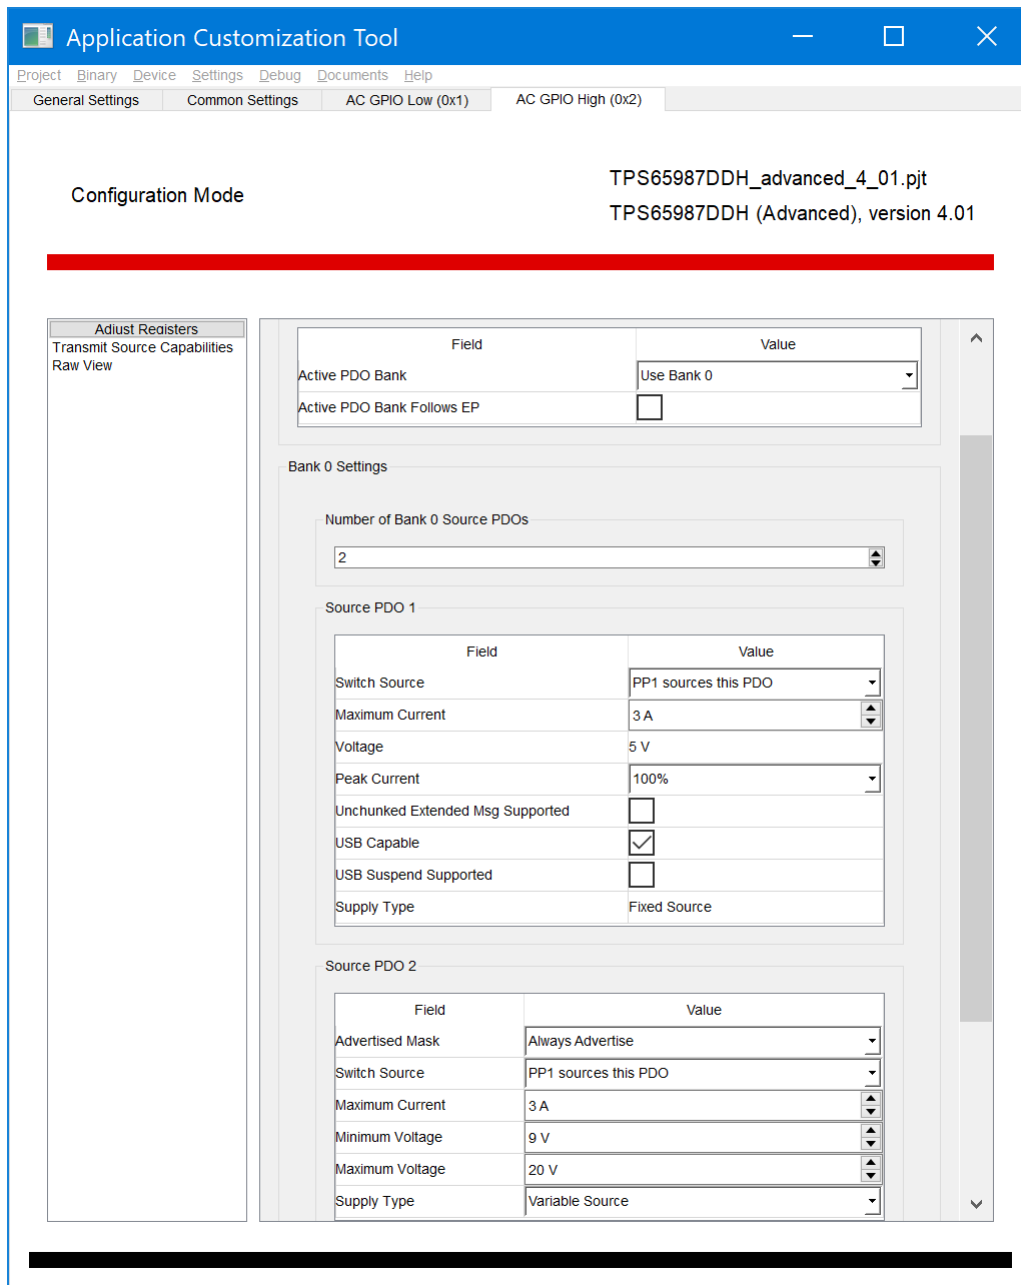


Figure 7. App Config GPIO Set Event, GPIO High Settings Example

6. Map Load App Config Set 1 to GPIO4 as shown in Figure 8.

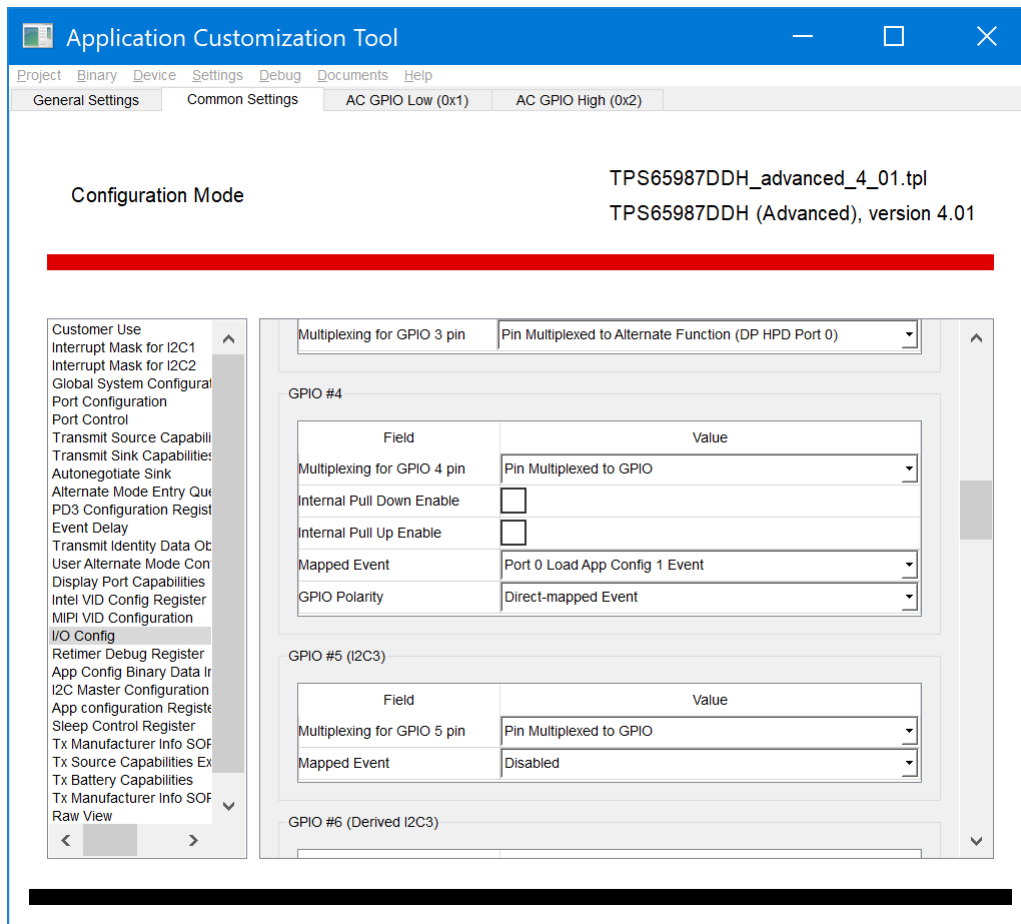


Figure 8. Map Load App Config Set 1 to GPIO 4

4 PD Controller Customization by GPIO Events

This section is targeted to show how TI PD controller GPIO events can be used in a system to alter system behavior while keeping the core firmware same. We would use Barrel Jack Event as example to show how a docking application can initiate power role swap when external power is connected to the system. Removal of the external power would generate PD traffic to reverse the power role swap and put the system back to original state.

4.1 Barrel Jack Connect Event PD Flow

Actual PD trace of this example Barrel Jack Event implementation in a system is shown in this section. This event can be used in a docking application when external power becomes available to the docking station. Rising edge on the GPIO that has been assigned for Barrel Jack Event initiates the required PD message flow for power role swap.

Two TPS65987D EVMs loaded with a binary created from the example template by clicking *Project*→*TPS65987DDH*→*Advanced*→*Dual Role Port (DRP)*, *prefers data host*→*None (DisplayPort Only)* and GPIO21 is set to Barrel Jack Detect Event as shown in [Figure 9](#).

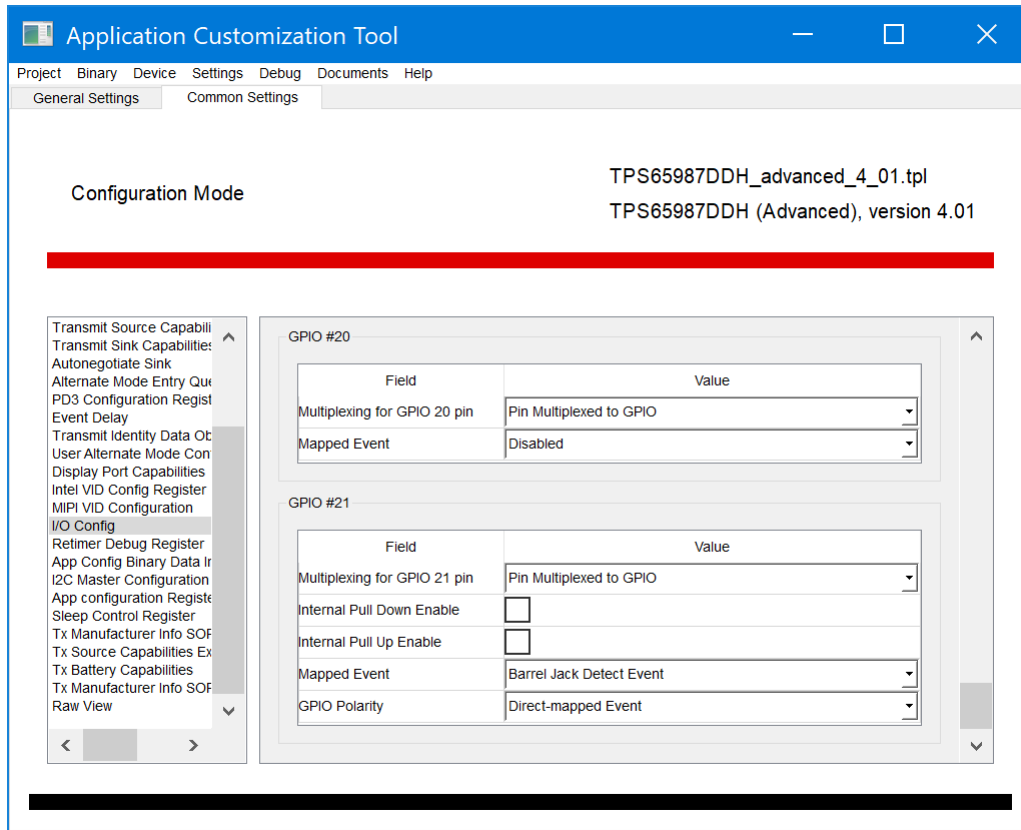


Figure 9. GPIO 21 Settings

PD message trace is taken with a Teledyne LeCroy PD analyzer between two TPS65987D EVMs as shown in Figure 10.

Packet	Left	SOP	SNK	PD Msg	Msg Type	DR	PR	Msg ID	Obj Cnt	Duration	Idle	Time Stamp
1	"Left"	←	SNK	PD Msg	PR Swap	UFP	SNK	7	0	494.978 us	83.022 us	7 . 835 619 000
2	"Right"	SRC	→	PD Msg	GoodCRC	DFP	SRC	7	0	496.617 us	119.383 us	7 . 836 197 000
3	"Right"	SRC	→	PD Msg	Accept	DFP	SRC	1	0	496.617 us	80.383 us	7 . 836 813 000
4	"Left"	←	SNK	PD Msg	GoodCRC	UFP	SNK	1	0	496.617 us	30.274 ms	7 . 837 390 000
5	"Left"	←	SNK	PD Msg	PS Ready	DFP	SNK	2	0	489.951 us	87.049 us	7 . 868 160 328
6	"Left"	←	SNK	PD Msg	GoodCRC	UFP	SNK	2	0	489.951 us	1.561 ms	7 . 868 737 328
7	"Right"	SRC	→	PD Msg	PS Ready	UFP	SRC	0	0	496.617 us	81.383 us	7 . 870 788 000
8	"Left"	←	SNK	PD Msg	GoodCRC	DFP	SNK	0	0	494.978 us	4.238 ms	7 . 871 366 000

Figure 10. PD Trace of Barrel Jack Connect Event

Messages in Figure 10 represent PD traffic flow once the Barrel Jack adapter supplying 20 V is connected to the EVM-DCK configured with settings appropriate for a docking station.

Packet 1 → EVM-DCK is UFP/SNK and sends "PR Swap" message to the EVM-LPT which is DFP/SRC.

Packet 2 → DFP/SRC sends "GoodCRC" acknowledgement response for "PR Swap" message.

Packet 3 → DFP/SRC sends “Accept” message to signal that it is willing to do a Power Role Swap and has begun the Power Role Swap sequence.

Packet 4 → UFP/SNK sends “GoodCRC” acknowledgement response.

Packet 5 → EVM-LPT changes role to DFP/SNK and sends “PS Ready” message. It is important to note that the initial Source Port is now setting the “Port Power Role” field to Sink in the “PS Ready” message indicating that the initial Source’s power supply is turned off.

Packet 6 → EVM-DCK sends “GoodCRC” acknowledgement response for “PS Ready” message. Note that the GoodCRC Message sent by the initial Sink in response to the “PS Ready” message from the initial Source will have its Port Power Role field set to Sink since this is initiated by the Protocol Layer.

Packet 7 → EVM-DCK changes role to UFP/SRC and sends “PS Ready” message.

Packet 8 → EVM-LPT which is now DFP/SNK sends “GoodCRC” acknowledgement response.

4.2 Barrel Jack Remove Event PD Flow

Once power is removed from the EVM-DCK, falling edge generated on the GPIO would initiate the reverse process so that EVM-LPT can become the Power Source again. Actual PD trace of the removal event is shown in [Figure 11](#).

Packet	Direction	Role	Msg Type	DR	PR	Msg ID	Obj Cnt	Duration	Idle	Time Stamp
1	Right	SRC →	PR Swap	UFP	SRC	3	0	496.617 us	80.383 us	5 . 327 193 000
2	Left	← SNK	GoodCRC	DFP	SNK	3	0	496.617 us	120.383 us	5 . 327 770 000
3	Left	← SNK	Accept	DFP	SNK	1	0	496.617 us	81.383 us	5 . 328 387 000
4	Right	SRC →	GoodCRC	UFP	SRC	1	0	496.617 us	30.258 ms	5 . 328 965 000
5	Left	← SNK	PS Ready	UFP	SNK	4	0	489.951 us	88.033 us	5 . 359 719 328
6	Left	← SNK	GoodCRC	DFP	SNK	4	0	488.334 us	1.587 ms	5 . 360 297 312
7	Right	SRC →	PS Ready	DFP	SRC	2	0	496.617 us	80.383 us	5 . 362 373 000
8	Left	← SNK	GoodCRC	UFP	SNK	2	0	496.617 us	24.676 ms	5 . 362 950 000

Figure 11. PD Trace of Barrel Jack Removal Event

5 Status Register and 4CC Commands

GPIO status can be monitored by reading a register and system controller can take appropriate actions based on that. There are also GPIO related 4CC commands that can be used by system controller to alter GPIO behavior.

Status Register

- 0x72, GPIO Status

4CC Commands

- ‘GPie’, GPIO Input Enable
- ‘GPoe’, GPIO Output Enable
- ‘GPsh’, GPIO Set Output High
- ‘GPls’, GPIO Set Output Low

Status register and 4CC command capabilities of TPS6598x Application Customization tool provides a way to test and modify GPIO configurations of a real system. GPIO configurations can be changed on-the-fly over I2C bus to try new settings quickly. Once the expected system behavior is confirmed, appropriate GPIO configurations can be implemented through the system controller processor.

5.1 GPIO Status Monitoring

GPIO status register can be used to monitor various GPIOs that are configured to achieve desired system behavior. For example to support PD Power Rules with 5 V, 9 V, 15 V and 20 V variable supplies, TPS65987D EVM is designed to use PDO GPIO events that trigger the power supply circuit and generate the desired voltage output. In this case GPIO14, GPIO15, GPIO17 and GPIO20 are assigned with appropriate PDO events to achieve the variable DC-DC supply. Figure 12 shows that GPIO14 is driven high indicating PD contract is done for 5 V. Once an explicit PD contract is negotiated for 20 V supply, GPIO20 is driven High by the PD controller as indicated in Figure 13.

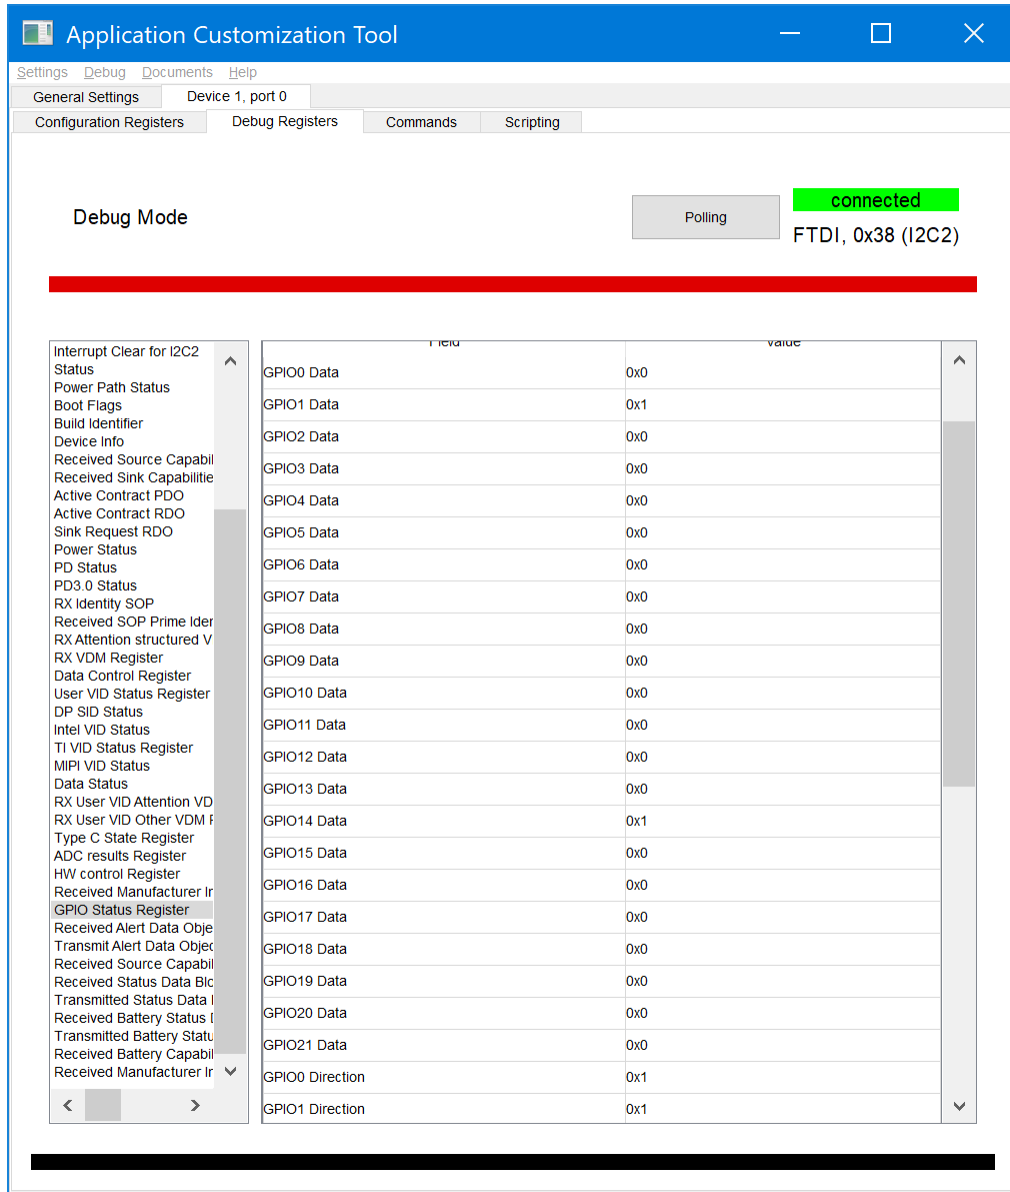


Figure 12. Variable DC/DC GPIO Status for 5-V Supply

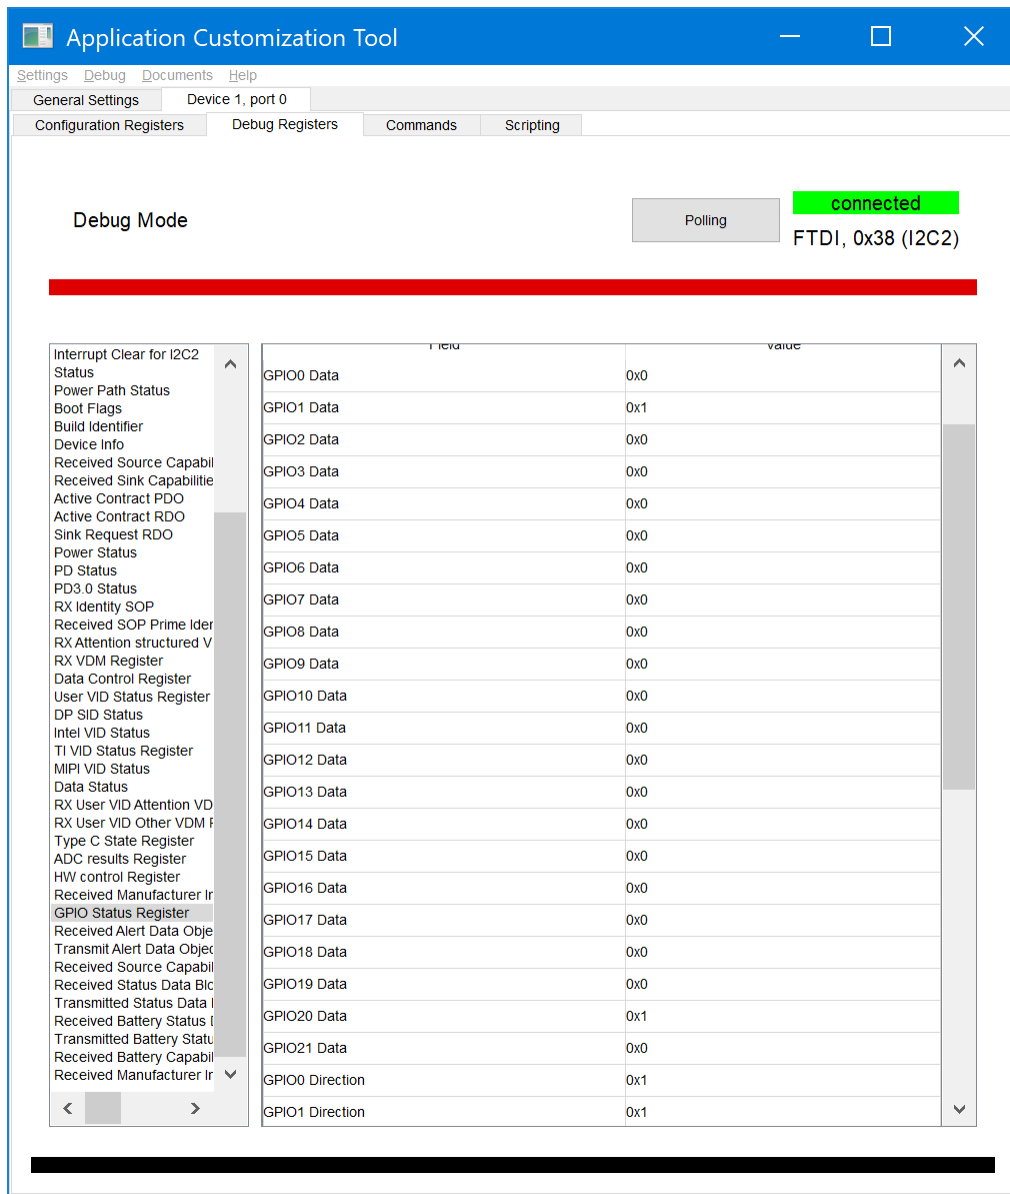


Figure 13. Variable DC/DC GPIO Status for 20-V Supply

5.2 Using 4CC GPIO Commands

TPS6598x Application Customization tool can be used to exercise the GPIO related 4CC commands and observe, develop system behavior before system controller implements the desired driver software.

Figure 14 shows the commands list page of the tool that can be used to exercise the 'GPxx' 4CC commands.

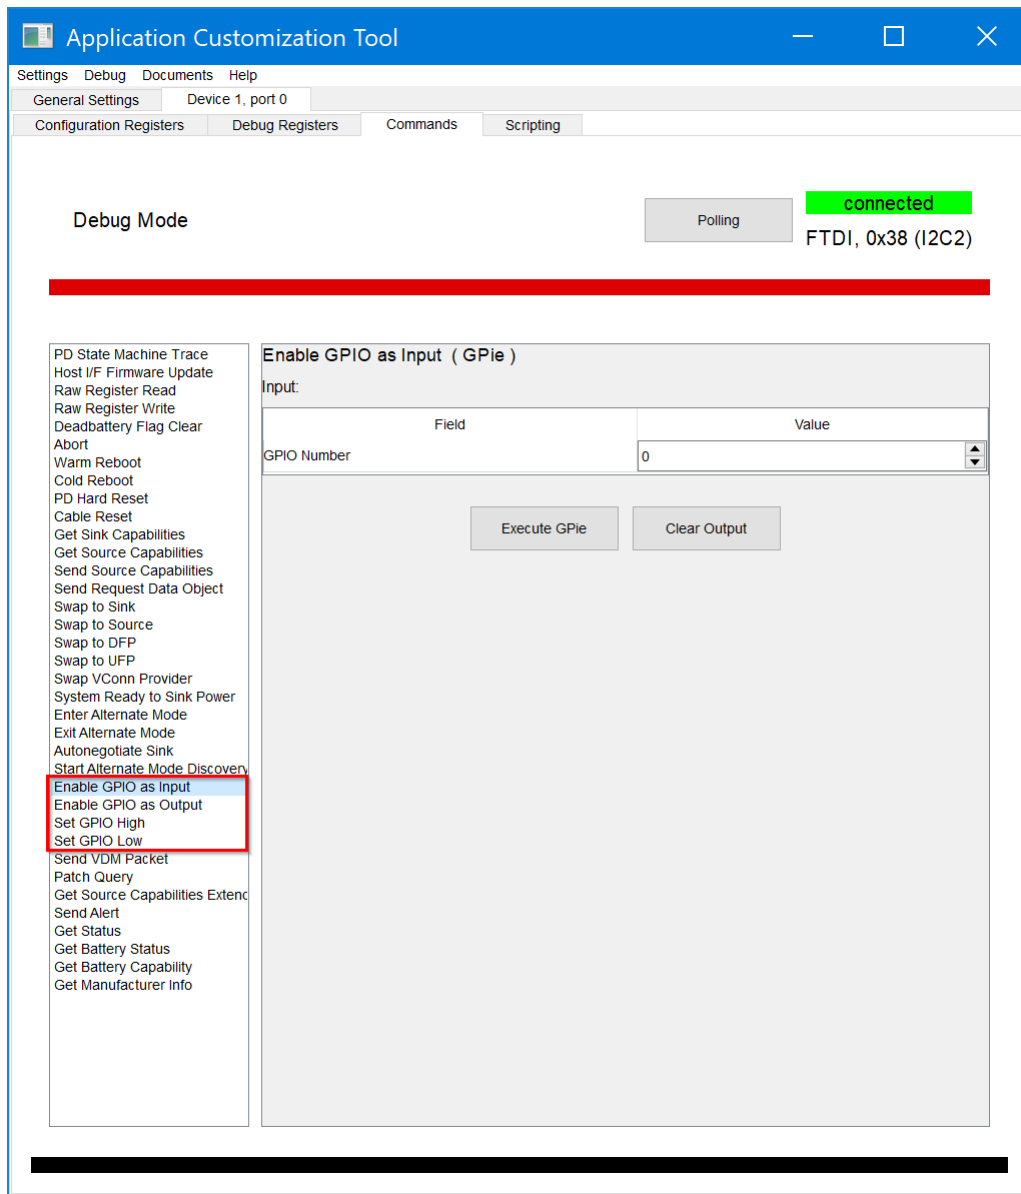


Figure 14. 4CC Commands in TPS6598x Application Customization Tool

For example, to set the GPIO7 to High:

- First send 'GPoe' 4CC command as shown in [Figure 15](#).
- Then send 'GPsh' 4CC command as shown in [Figure 16](#).
- In the GPIO Status (0x72) it can be seen that GPIO7 has been set to High.

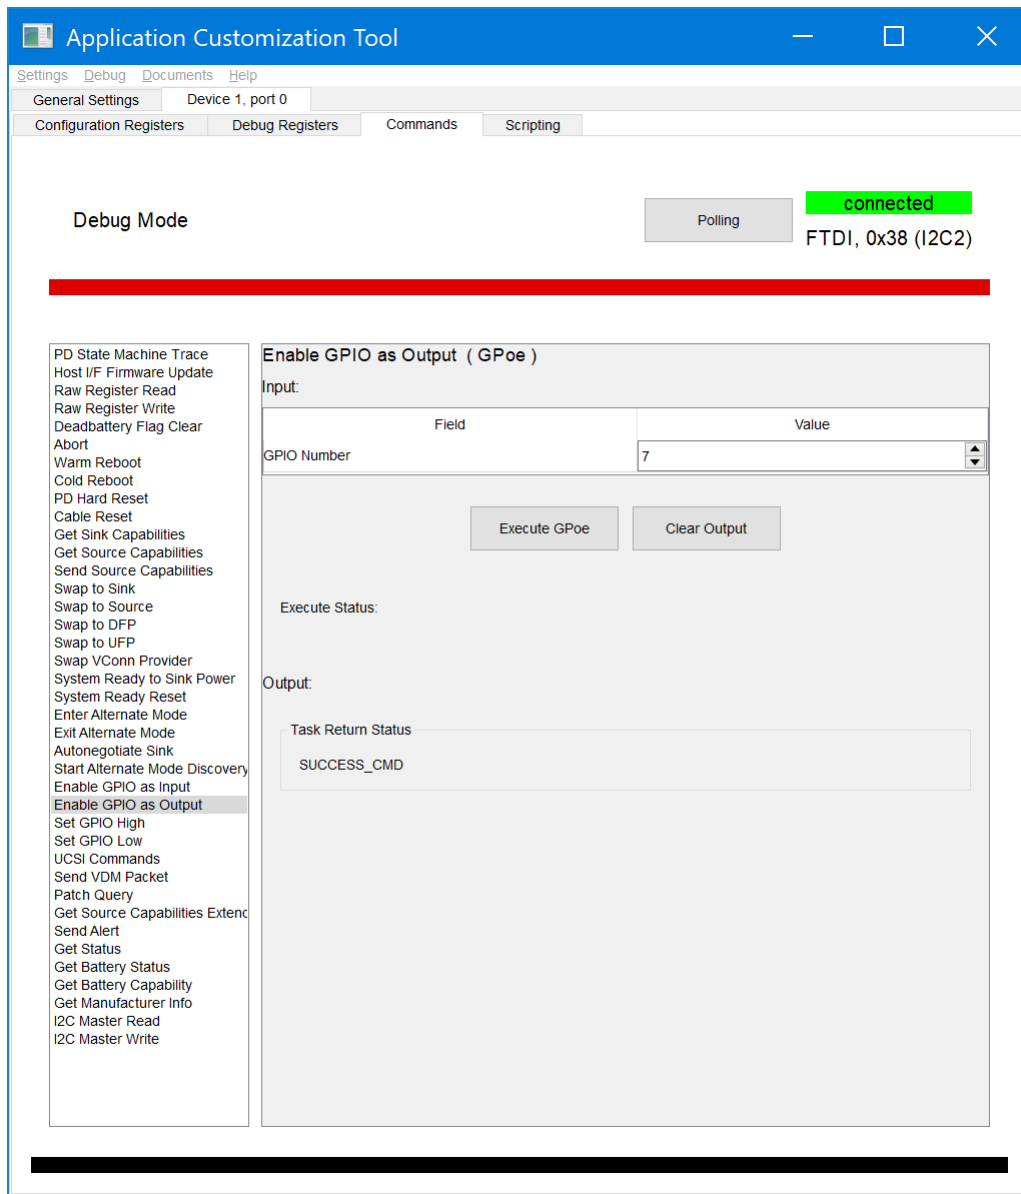


Figure 15. Using 'GPoe' 4CC Command

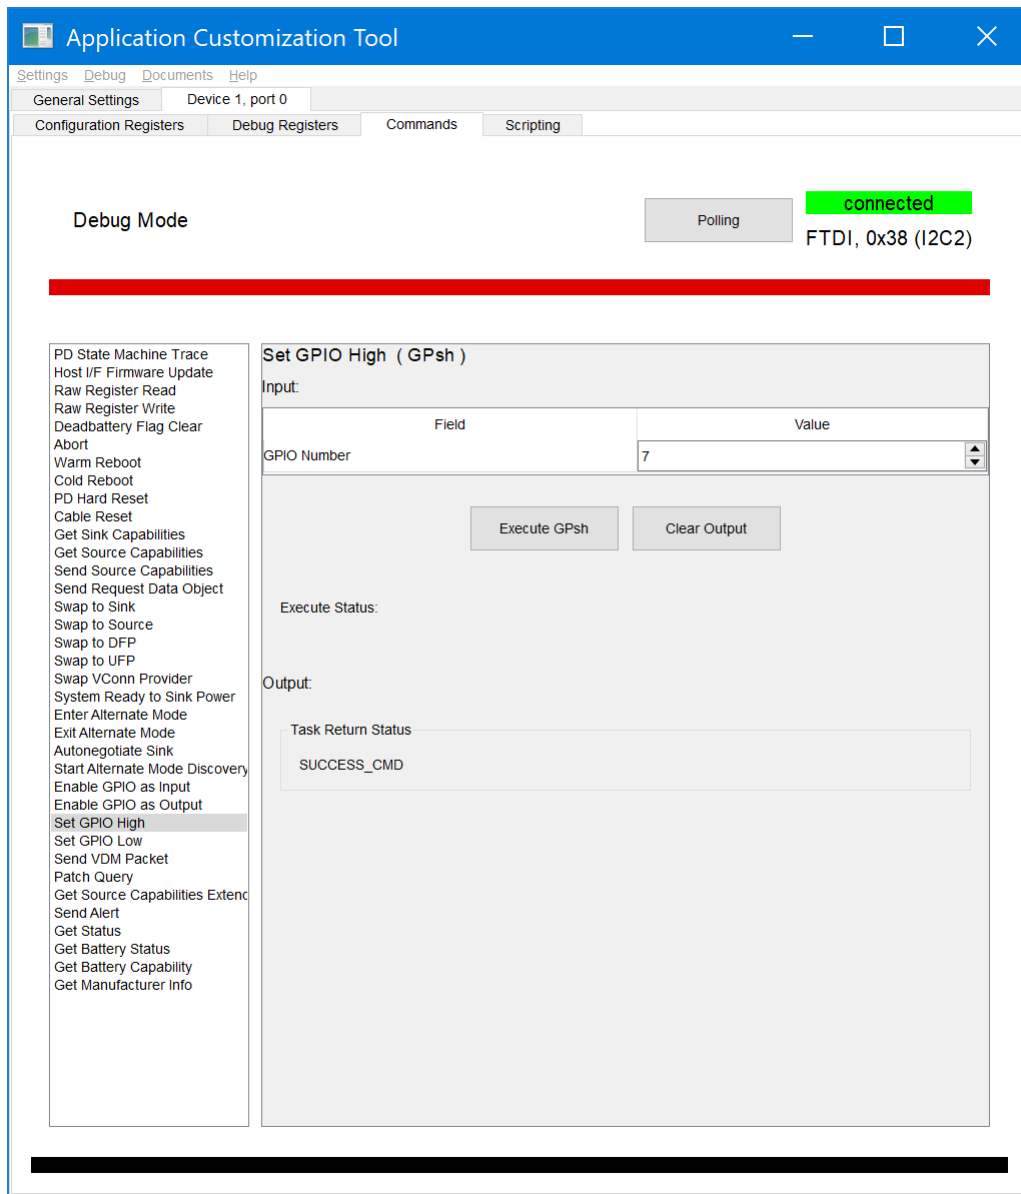


Figure 16. Using 'GPsh' 4CC Command

IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2018, Texas Instruments Incorporated