

Practical Tips to Get Accurate Readouts

Mathew Jacob

ABSTRACT

The TPS544B20, TPS544C20 and TPS544C25 devices use the PMBus interface to make non-invasive measurements of temperature, voltage and current available to the system or user through the commands READ_VOUT, READ_IOUT, and READ_TEMPERATURE2. In order to most effectively use this internal digital measurement system, users must understand some of the details about the measurement system.

Contents

1	Introduction	1
2	Device Overview	1

Trademarks

All trademarks are the property of their respective owners.

1 Introduction

In order to have a complete understanding on this topic it is important to review some details regarding the ADC and associated timing.

2 Device Overview

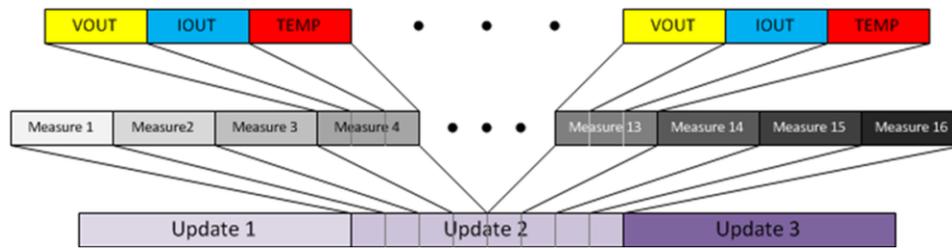
The ADC works on a 12-bit 4096-step dual slope ADC. The voltage signal of interest is forced on an internal resistor, and the resulting current is used to charge a capacitor for 4096 cycles of an 8-MHz clock. Then a reference voltage is forced across the same resistor to create a discharge current while a counter counts clock cycles until the capacitor is discharged back to its starting value and the current counter value is latched as the output. The latched count is equal to $4096 \times V_{sig} / V_{ref}$, which can then be digitally scaled to provide telemetry values. To provide consistent timing, the counter is allowed to run out before the ADC is switched to the next signal of interest.

Each measurement of the ADC requires 8192 clock cycles (4096×2) on an 8-MHz clock that is trimmed $\pm 5\%$ for a measurement time of 0.97 ms – 1.07 ms.

In order to improve accuracies and eliminate analog measurement offsets, there is an ADC zero measurement for self-calibration and a “zero input” reference measurement for each signal that is subtracted from the measurement. There are also 4 measurements taken for each telemetry cycle: V_{OUT} , I_{OUT} , TEMP1, TEMP2. TEMP2 is an internally measured temperature that is used to temperature compensate the READ_IOUT function.

Thus, there are 9 measurement cycles: Self-Calibration, VOUT_ZERO, VOUT_SIGNAL, IOUT_ZERO, IOUT_SIGNAL, TEMP1_ZERO, TEMP1_SIGNAL, TEMP2_ZERO, TEMP2_SIGNAL. Each takes up to 1.074 ms for 9.666 ms per telemetry cycle.

In order to reduce the noise contribution to any single measurement, 16 measurements are accumulated, and then divided by 16 before updating the user readable READ_VOUT, READ_IOUT or READ_TEMPERATURE2 value. 16 cycles means that the user-readable registers are updated every 154 ms with a value that represents the average value over the prior 154 ms.


Figure 1.

This has a few implications:

1. Any two reads of a PMBus register less than 154 ms could be reads from the same update.
2. It can take 154 – 308 ms for a change in a value, such as V_{OUT} , to be reflected in the PMBus register readback.

Additionally, because the comparator that latches the counter is asynchronous to the clock, it is possible, through rare, that the register latch is set while the counter is transitioning between two clock values. This can result in the counter latching incorrect data, resulting in an ADC misread. In order to post-process such misreads, a system designer may find it useful to record 3, 5, or 7 repeated measurements of the same telemetry value, spaced at least 308 ms apart, and post-process them by disregarding the lowest and higher value, then averaging the remaining 1, 3, or 5 values.

IMPORTANT NOTICE FOR TI DESIGN INFORMATION AND RESOURCES

Texas Instruments Incorporated ("TI") technical, application or other design advice, services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using any particular TI Resource in any way, you (individually or, if you are acting on behalf of a company, your company) agree to use it solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources.

You understand and agree that you remain responsible for using your independent analysis, evaluation and judgment in designing your applications and that you have full and exclusive responsibility to assure the safety of your applications and compliance of your applications (and of all TI products used in or for your applications) with all applicable regulations, laws and other applicable requirements. You represent that, with respect to your applications, you have all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. You agree that prior to using or distributing any applications that include TI products, you will thoroughly test such applications and the functionality of such TI products as used in such applications. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

You are authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING TI RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY YOU AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

You agree to fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of your non-compliance with the terms and provisions of this Notice.

This Notice applies to TI Resources. Additional terms apply to the use and purchase of certain types of materials, TI products and services. These include; without limitation, TI's standard terms for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>), [evaluation modules](#), and [samples](http://www.ti.com/sc/docs/sampterm.htm) (<http://www.ti.com/sc/docs/sampterm.htm>).

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2018, Texas Instruments Incorporated