- **Controlled Baseline**
  - **One Assembly/Test Site, One Fabrication Site**
- **Extended Temperature Performance of −40°C to 125°C**
- **Enhanced Diminishing Manufacturing Sources (DMS) Support**
- **Enhanced Product-Change Notification**
- **Qualification Pedigree†**
- **ESD Protection Exceeds 500 V Per MIL-STD-883, Method 3015; Exceeds 200 V Using Machine Model (C = 200 pF, R = 0)**
- **Low Supply-Current Drain Independent of Supply Voltage . . . 0.7 mA Typ**
- **Common-Mode Input Voltage Range Includes Ground, Allowing Direct Sensing Near Ground**
- **Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage:**
  - **Non-V Devices . . . ±26 V**
  - **V-Suffix Devices . . . ±32 V**
- **Low Input Bias and Offset Parameters:**
  - **Input Offset Voltage . . . 3 mV Typ**
  - **Input Offset Current . . . 2 nA Typ**
  - **Input Bias Current . . . 20 nA Typ**
- **Open-Loop Differential Voltage Amplification . . . 100 V/mV Typ**
- **Internal Frequency Compensation**

† Component qualification in accordance with JEDEC and industry standards to ensure reliable operation over an extended temperature range. This includes, but is not limited to, Highly Accelerated Stress Test (HAST) or biased 85/85, temperature cycle, autoclave or unbiased HAST, electromigration, bond intermetallic life, and mold compound life. Such qualification testing should not be viewed as justifying use of this component beyond specified performance and environmental limits.

D OR PW PACKAGE
(TOP VIEW)



description/ordering information

This device consists of two independent, high-gain, frequency-compensated operational amplifiers designed to operate from a single supply over a wide range of voltages. Operation from split supplies is possible as long as the difference between the two supplies is 3 V to 26 V (3 V to 32 V for V-suffix devices), and V_{CC} is at least 1.5 V more positive than the input common-mode voltage. The low supply-current drain is independent of the magnitude of the supply voltage.

Applications include transducer amplifiers, dc amplification blocks, and all the conventional operational amplifier circuits that now can be implemented more easily in single-supply-voltage systems. For example, these devices can be operated directly from the standard 5-V supply used in digital systems and easily provide the required interface electronics without additional ±5-V supplies.

ORDERING INFORMATION

T_A	V_{IO}max AT 25°C	MAX V_{CC}	PACKAGE‡		ORDERABLE PART NUMBER	TOP-SIDE MARKING
−40°C to 125°C	7 mV	26 V	SOIC (D)	Tape and reel	LM2904QDREP	2904EP
	7 mV	26 V	TSSOP (PW)	Tape and reel	LM2904QPWREP	2904EP
	7 mV	32 V	SOIC (D)	Tape and reel	LM2904VQDREP	2904VEP
	7 mV	32 V	TSSOP (PW)	Tape and reel	LM2904VQPWREP	2904VEP
	2 mV	32 V	SOIC (D)	Tape and reel	LM2904AVQDREP	2904AVE
	2 mV	32 V	TSSOP (PW)	Tape and reel	LM2904AVQPWREP	2904AVE

‡ Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2004, Texas Instruments Incorporated

symbol (each amplifier)



schematic (each amplifier)

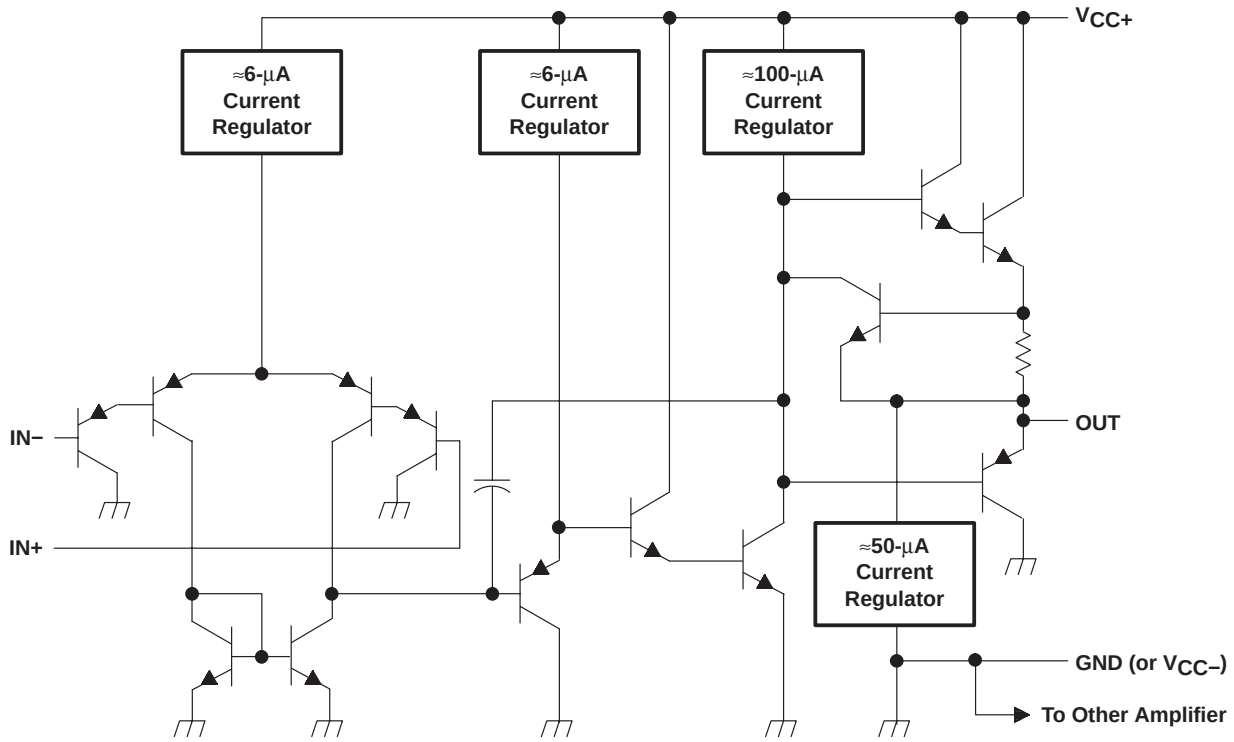

COMPONENT COUNT	
Epi-FET	1
Diodes	2
Resistors	7
Transistors	51
Capacitors	2

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

Supply voltage, V_{CC} (see Note 1): Non-V devices . . . . . 26 V
V-suffix devices . . . . . 32 V
Differential input voltage, V_{ID} (see Note 2): Non-V devices . . . . . ±26 V
V-suffix devices . . . . . ±32 V
Input voltage range, V_I (either input): Non-V devices . . . . . −0.3 V to 26 V
V-suffix devices . . . . . −0.3 V to 32 V
Duration of output short circuit (one amplifier) to ground at (or below) 25°C free-air temperature (V_{CC} ≤ 15 V) (see Note 3) . . . . . Unlimited
Operating virtual junction temperature, T_J . . . . . 150°C
Package thermal impedance, θ_{JA} (see Notes 4 and 5): D package . . . . . 97°C/W
PW package . . . . . 149°C/W
Operating free-air temperature range, T_A (see Figure 1) . . . . . −40°C to 125°C
Storage temperature range, T_{stg} . . . . . −65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages and V_{CC} specified for measurement of I_{OS}, are with respect to the network ground terminal.
2. Differential voltages are at IN+ with respect to IN−.
3. Short circuits from outputs to V_{CC} can cause excessive heating and eventual destruction.
4. Maximum power dissipation is a function of $T_J(max)$, θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
5. The package thermal impedance is calculated in accordance with JESD 51-7.

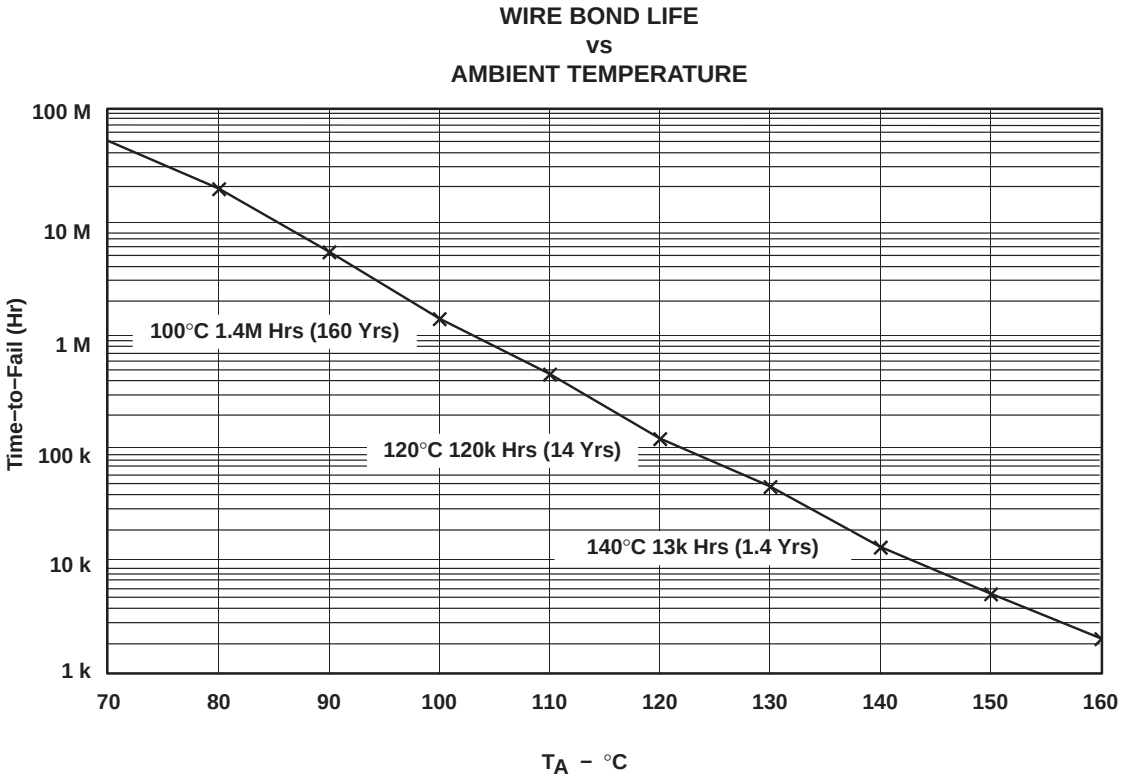

Figure 1. Estimated Wire Bond Life

electrical characteristics at specified free-air temperature, V_{CC} = 5 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		T_A‡	MIN	TYP§	MAX	UNIT
V_{IO}	Input offset voltage	V_{CC} = 5 V to MAX, $V_{IC}=V_{ICR(min)}$, V_O = 1.4 V	Non-A devices	25°C		3	7	mV
				Full range			10	
			A-suffix devices	25°C		1	2	
				Full range			4	
$\alpha_{V_{IO}}$	Average temperature coefficient of input offset voltage			Full range		7		µV/°C
I_{IO}	Input offset current	V_O = 1.4 V	Non-V devices	25°C		2	50	nA
				Full range			300	
			V-suffix devices	25°C		5	50	
				Full range			150	
$\alpha_{I_{IO}}$	Average temperature coefficient of input offset current			Full range		10		pA/°C
I_{IB}	Input bias current	V_O = 1.4 V		25°C		−20	−250	nA
				Full range			−500	
I_B	Drift			Full range		50		pA/°C
V_{ICR}	Common-mode input voltage range	V_{CC} = 5 V to MAX		25°C	0 to V_{CC} − 1.5			V
				Full range	0 to V_{CC} − 2			
V_{OH}	High-level output voltage	$R_L \geq 10\ k\Omega$		25°C	V_{CC} − 1.5			V
		V_{CC} = MAX, Non-V devices	R_L = 2 kΩ	Full range	22			
			$R_L \geq 10\ k\Omega$		23	24		
		V_{CC} = MAX, V-suffix devices	R_L = 2 kΩ	Full range	26			
			$R_L \geq 10\ k\Omega$		27	28		
V_{OL}	Low-level output voltage	$R_L \leq 10\ k\Omega$		Full range		5	20	mV
A_{VD}	Large-signal differential voltage amplification	V_{CC} = 15 V, V_O = 1 V to 11 V, R_L = ≥ 2 kΩ		25°C	25	100		V/mV
				Full range	15			
CMRR	Common-mode rejection ratio	V_{CC} = 5 V to MAX, $V_{IC} = V_{ICR(min)}$		25°C	65	80		dB
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{DD}/\Delta V_{IO}$)	V_{CC} = 5 V to MAX		25°C	65	100		dB
V_{O1}/V_{O2}	Crosstalk attenuation	f = 1 kHz to 20 kHz		25°C		120		dB
I_O	Output current	V_{CC} = 15 V, V_{ID} = 1 V, V_O = 0		25°C	−20	−30		mA
				Full range	−10			
		V_{CC} = 15 V, V_{ID} = −1 V, V_O = 15 V		25°C	10	20		
				Full range	5			
		V_{ID} = −1 V,	V_O = 200 mV	25°C	12	40		µA
I_{OS}	Short-circuit output current	V_{CC} at 5 V, GND at −5 V, V_O = 0		25°C		±40	±60	mA
I_{CC}	Supply current (two amplifiers)	V_O = 2.5 V,	No load	Full range		0.7	1.2	mA
		V_{CC} = MAX, V_O = 0.5 V_{CC}, No load				1	2	

† All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified. MAX V_{CC} for testing purposes is 26 V for non-V devices and 32 V for V-suffix devices.
‡ Full range is −40°C to 125°C for LM2904Q.
§ All typical values are at T_A = 25°C.

operating conditions, V_{CC} = ±15 V, T_A = 25°C

PARAMETER		TEST CONDITIONS	TYP	UNIT
SR	Slew rate at unity gain	R_L = 1 MΩ, C_L = 30 pF, V_I = ±10 V (see Figure 2)	0.3	V/μs
B_1	Unity-gain bandwidth	R_L = 1 MΩ, C_L = 20 pF (see Figure 2)	0.7	MHz
V_n	Equivalent input noise voltage	R_S = 100 Ω, V_I = 0 V, f = 1 kHz (see Figure 3)	40	nV/√Hz

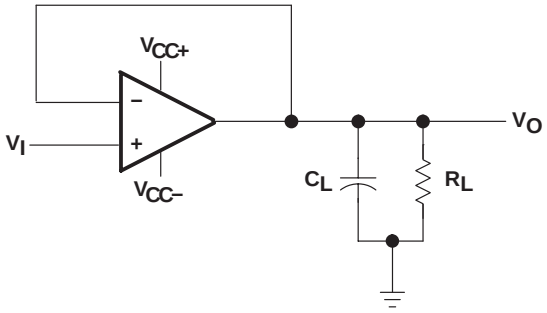

Figure 2. Unity-Gain Amplifier

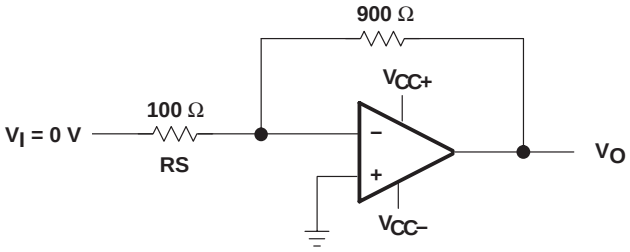

Figure 3. Noise-Test Circuit

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LM2904 MWC	Active	Production	WAFERSALE (YS) | 0	1 | NOT REQUIRED	-	Call TI	Level-1-NA-UNLIM	-40 to 85	

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LM2904-EP :

- Catalog : LM2904
- Automotive : LM2904-Q1

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025