



# INA131

## Precision $G = 100$ INSTRUMENTATION AMPLIFIER

### FEATURES

- LOW OFFSET VOLTAGE:  $50\mu\text{V}$  max
- LOW DRIFT:  $0.25\mu\text{V}/^\circ\text{C}$  max
- LOW INPUT BIAS CURRENT:  $2\text{nA}$  max
- HIGH COMMON-MODE REJECTION:  $110\text{dB}$  min
- INPUT OVERVOLTAGE PROTECTION:  $\pm 40\text{V}$
- WIDE SUPPLY RANGE:  $\pm 2.25$  to  $\pm 18\text{V}$
- LOW QUIESCENT CURRENT:  $3\text{mA}$
- 8-PIN PLASTIC DIP

### DESCRIPTION


The INA131 is a low cost, general purpose  $G = 100$  instrumentation amplifier offering excellent accuracy. Its 3-op amp design and small size make it ideal for a wide range of applications.

On-chip laser trimmed resistors accurately set a fixed gain of 100. The INA131 is laser trimmed to achieve very low offset voltage ( $50\mu\text{V}$  max), drift ( $0.25\mu\text{V}/^\circ\text{C}$  max), and high CMR ( $110\text{dB}$  min). Internal input protection can withstand up to  $\pm 40\text{V}$  inputs without damage.

The INA131 is available in a 8-pin plastic DIP. They are specified over the  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$  temperature range.

### APPLICATIONS

- BRIDGE AMPLIFIER
- THERMOCOUPLE AMPLIFIER
- RTD SENSOR AMPLIFIER
- MEDICAL INSTRUMENTATION
- DATA ACQUISITION

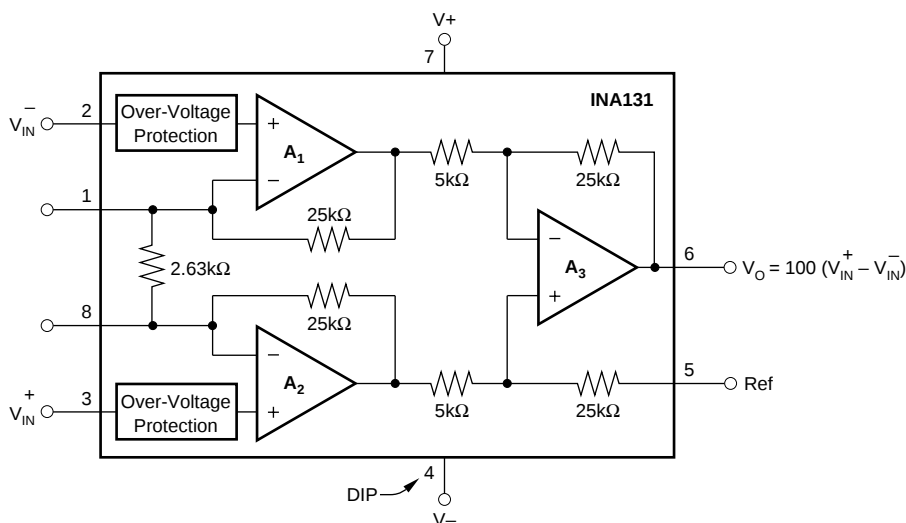

# SPECIFICATIONS

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 15\text{V}$ ,  $R_L = 2\text{k}\Omega$ , unless otherwise noted.


| PARAMETER                                                                                                                                                                                                                      | CONDITIONS                                                                                                                                                                                       | INA131BP                          |                                                                                                     |                                                    | INA131AP      |                                                 |                                               | UNITS                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------|---------------|-------------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                |                                                                                                                                                                                                  | MIN                               | TYP                                                                                                 | MAX                                                | MIN           | TYP                                             | MAX                                           |                                                                                                                                                                                                                                        |
| <b>INPUT</b><br>Offset Voltage, RTI<br>Initial<br>vs Temperature<br>vs Power Supply<br>Long-Term Stability<br>Impedance, Differential<br>Common-Mode<br>Input Common-Mode Range<br>Safe Input Voltage<br>Common-Mode Rejection | $T_A = +25^\circ\text{C}$<br>$T_A = T_{\text{MIN}}$ to $T_{\text{MAX}}$<br>$V_S = \pm 2.25\text{V}$ to $\pm 18\text{V}$<br><br>$V_{\text{CM}} = \pm 10\text{V}$ , $\Delta R_S = 1\text{k}\Omega$ |                                   | $\pm 10$<br>$\pm 0.1$<br>0.5<br>0.2<br>$10^{10} \parallel 6$<br>$10^{10} \parallel 6$<br>$\pm 13.5$ | $\pm 50$<br>$\pm 0.25$<br>3<br><br><br>$\pm 40$    |               | $\pm 25$<br>$\pm 0.25$<br>*<br>*<br>*<br>*<br>* | $\pm 125$<br>$\pm 1$<br>*<br>*<br>*<br>*<br>* | $\mu\text{V}$<br>$\mu\text{V}/^\circ\text{C}$<br>$\mu\text{V/V}$<br>$\mu\text{V}/\text{mo}$<br>$\Omega \parallel \text{pF}$<br>$\Omega \parallel \text{pF}$<br>V<br>V<br>dB                                                            |
| <b>BIAS CURRENT</b><br>vs Temperature                                                                                                                                                                                          |                                                                                                                                                                                                  |                                   | $\pm 0.5$<br>$\pm 8$                                                                                | $\pm 2$                                            |               | *<br>*                                          | $\pm 5$                                       | nA<br>$\text{pA}/^\circ\text{C}$                                                                                                                                                                                                       |
| <b>OFFSET CURRENT</b><br>vs Temperature                                                                                                                                                                                        |                                                                                                                                                                                                  |                                   | $\pm 0.5$<br>$\pm 8$                                                                                | $\pm 2$                                            |               | *<br>*                                          | $\pm 5$                                       | nA<br>$\text{pA}/^\circ\text{C}$                                                                                                                                                                                                       |
| <b>NOISE VOLTAGE, RTI</b><br>f = 10Hz<br>f = 100Hz<br>f = 1kHz<br>f = 10kHz<br>$f_B = 0.1\text{Hz}$ to 10Hz<br>Noise Current<br>f = 10Hz<br>f = 1kHz<br>$f_B = 0.1\text{Hz}$ to 100Hz                                          | $R_S = 0\Omega$                                                                                                                                                                                  |                                   | 16<br>12<br>12<br>12<br>0.4<br><br>0.4<br>0.2<br>18                                                 |                                                    |               | *<br>*<br>*<br>*<br>*<br><br>*<br>*<br>*        |                                               | $\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$<br>$\text{nV}/\sqrt{\text{Hz}}$<br>$\mu\text{Vp-p}$<br><br>$\text{pA}/\sqrt{\text{Hz}}$<br>$\text{pA}/\sqrt{\text{Hz}}$<br>$\text{pAp-p}$ |
| <b>GAIN</b><br>Gain Error <sup>(1)</sup><br>Resistor Value <sup>(2)</sup><br>Gain vs Temperature<br>Nonlinearity                                                                                                               |                                                                                                                                                                                                  |                                   | $\pm 0.01$<br>$\pm 10$<br>$\pm 5$<br>$\pm 0.0003$                                                   | $\pm 0.024$<br>$\pm 40$<br>$\pm 10$<br>$\pm 0.002$ |               | *<br>*<br>*<br>*                                | $\pm 0.1$<br>*<br>$\pm 20$<br>$\pm 0.004$     | %<br>%<br>$\text{ppm}/^\circ\text{C}$<br>% of FSR                                                                                                                                                                                      |
| <b>OUTPUT</b><br>Voltage<br><br>Load Capacitance, max<br>Short Circuit Current                                                                                                                                                 | $I_O = 5\text{mA}$ , $T_{\text{MIN}}$ to $T_{\text{MAX}}$<br>$V_S = \pm 11.4\text{V}$ , $R_L = 2\text{k}\Omega$<br>$V_S = \pm 2.25\text{V}$ , $R_L = 2\text{k}\Omega$<br>Stable Operation        | $\pm 13.5$<br>$\pm 10$<br>$\pm 1$ | $\pm 13.7$<br>10.5<br>1.5<br>1000<br>+20/-15                                                        |                                                    | *<br>*<br>*   | *<br>*<br>*<br>*<br>*                           |                                               | V<br>V<br>V<br>pF<br>mA                                                                                                                                                                                                                |
| <b>FREQUENCY RESPONSE</b><br>Bandwidth, -3dB<br>Slew Rate<br>Settling Time, 0.01%<br>Overload Recovery                                                                                                                         | $V_O = \pm 10\text{V}$<br><br>50% Overdrive                                                                                                                                                      | 0.3                               | 70<br>0.7<br>100<br>20                                                                              |                                                    | *<br><br><br> | *<br>*<br>*<br>*                                |                                               | kHz<br>V/ $\mu\text{s}$<br>$\mu\text{s}$<br>$\mu\text{s}$                                                                                                                                                                              |
| <b>POWER SUPPLY</b><br>Voltage Range<br>Current                                                                                                                                                                                | $V_{\text{IN}} = 0\text{V}$                                                                                                                                                                      | $\pm 2.25$                        | $\pm 15$<br>$\pm 2.2$                                                                               | $\pm 18$<br>$\pm 3$                                | *<br><br>     | *<br>*                                          | *<br>*                                        | V<br>mA                                                                                                                                                                                                                                |
| <b>TEMPERATURE RANGE</b><br>Specification<br>Operating<br>$\theta_{\text{JA}}$                                                                                                                                                 |                                                                                                                                                                                                  | -40<br>-40                        | <br>100                                                                                             | 85<br>125                                          | *<br>*        | <br>*                                           | *<br>*                                        | $^\circ\text{C}$<br>$^\circ\text{C}$<br>$^\circ\text{C/W}$                                                                                                                                                                             |

\* Specification same as INA131BP.

NOTES: (1)  $R_L = 10\text{k}\Omega$ . (2) Absolute value of internal gain-setting resistors. (Gain depends on resistor ratios.)

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

## PIN CONFIGURATION

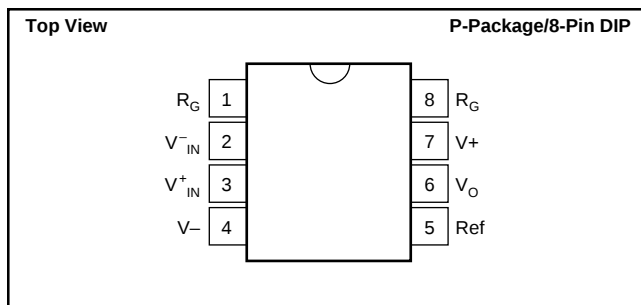

## PACKAGE/ORDERING INFORMATION

| PRODUCT  | PACKAGE           | PACKAGE<br>DRAWING<br>NUMBER <sup>(1)</sup> | TEMPERATURE<br>RANGE |
|----------|-------------------|---------------------------------------------|----------------------|
| INA131AP | 8-Pin Plastic DIP | 006                                         | –40°C to +85°C       |
| INA131BP | 8-Pin Plastic DIP | 006                                         | –40°C to +85°C       |

NOTE: (1) For detailed drawing and dimension table, please see end of data sheet, or Appendix C of Burr-Brown IC Data Book.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

|                                         |                 |
|-----------------------------------------|-----------------|
| Supply Voltage .....                    | ±18V            |
| Input Voltage Range .....               | ±40V            |
| Output Short Circuit (to ground) .....  | Continuous      |
| Operating Temperature .....             | –40°C to +125°C |
| Storage Temperature .....               | –40°C to +125°C |
| Junction Temperature .....              | +150°C          |
| Lead Temperature (soldering –10s) ..... | +300°C          |

NOTE: (1) Stresses above these ratings may cause permanent damage.









## ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Burr-Brown recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.







# TYPICAL PERFORMANCE CURVES

At 25°C,  $V_S = \pm 15V$ , unless otherwise noted.

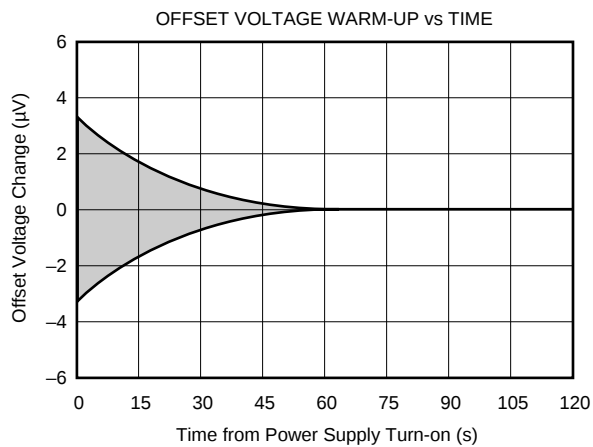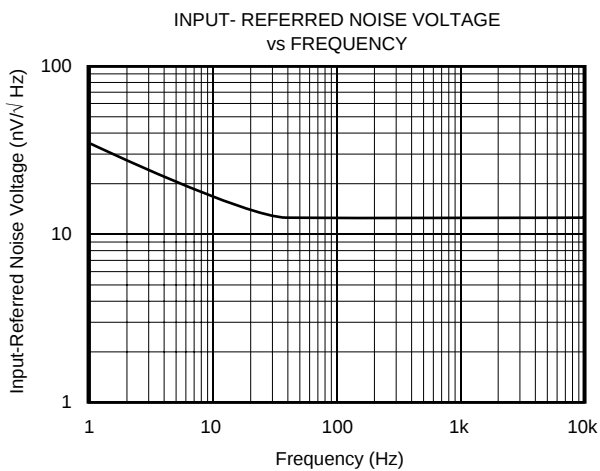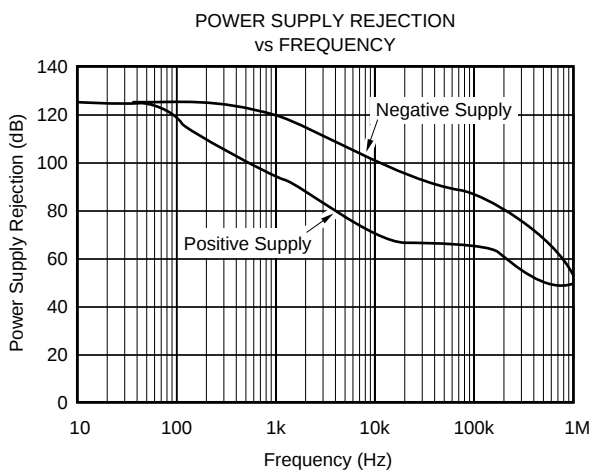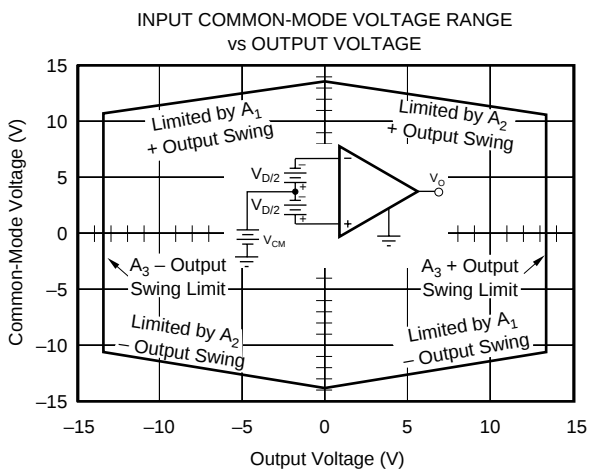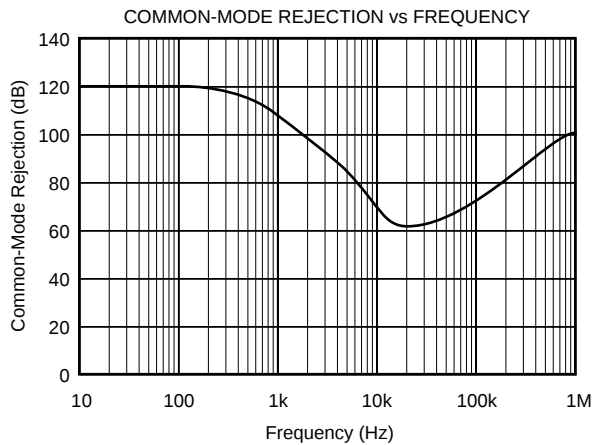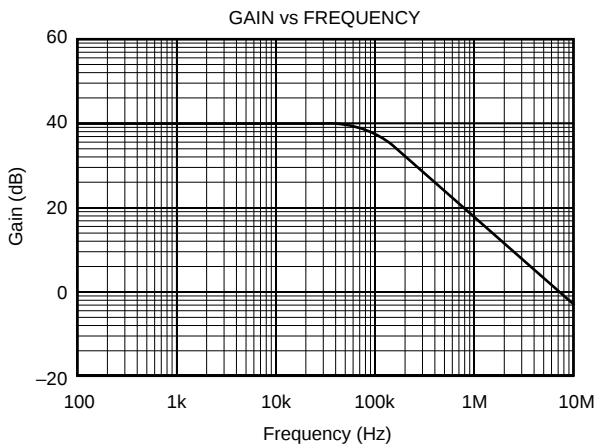







# TYPICAL PERFORMANCE CURVES (CONT)

At 25°C,  $V_s = \pm 15V$ , unless otherwise noted.

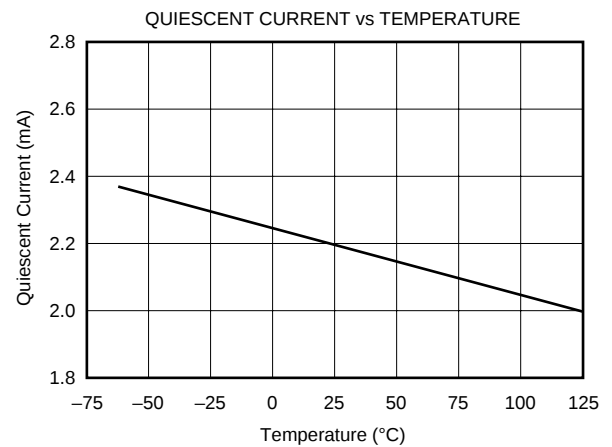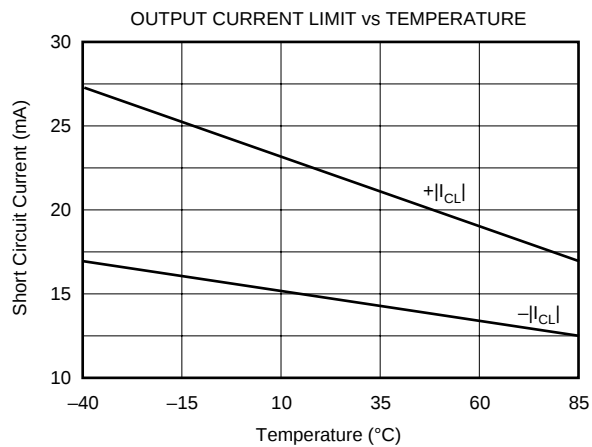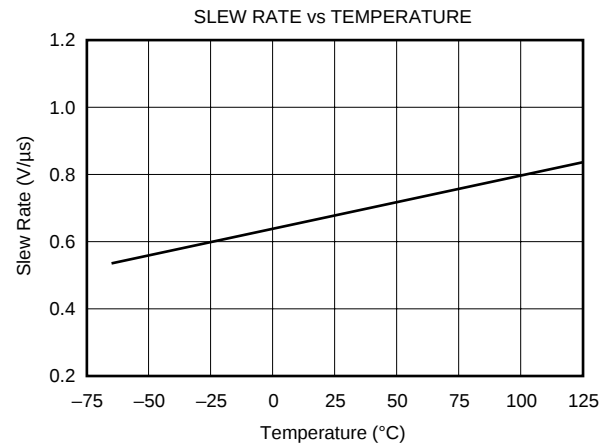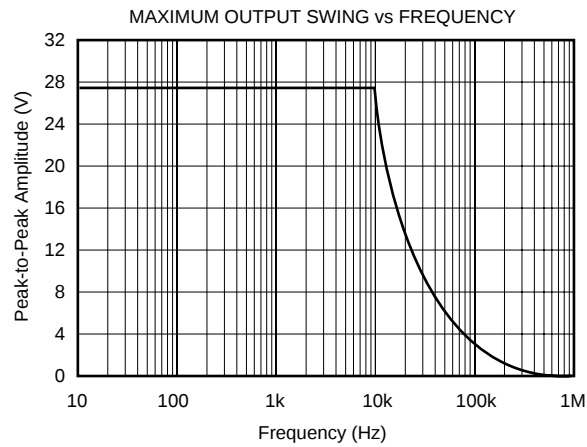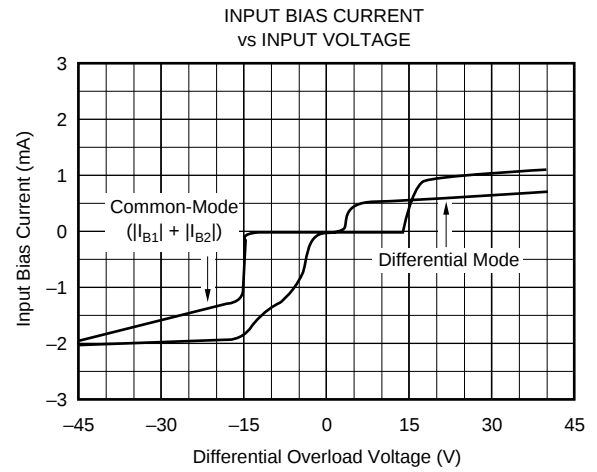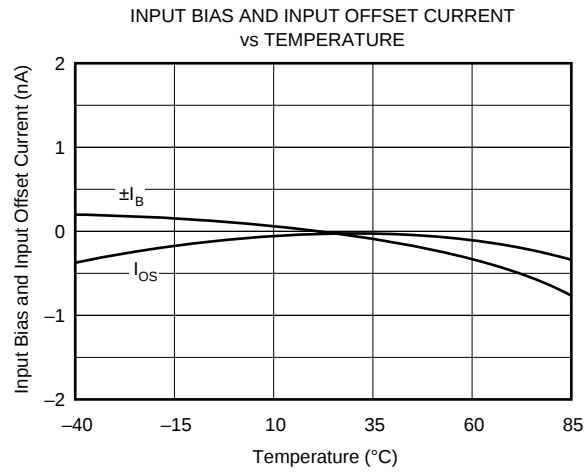

# TYPICAL PERFORMANCE CURVES (CONT)

At 25°C,  $V_S = \pm 15V$ , unless otherwise noted.

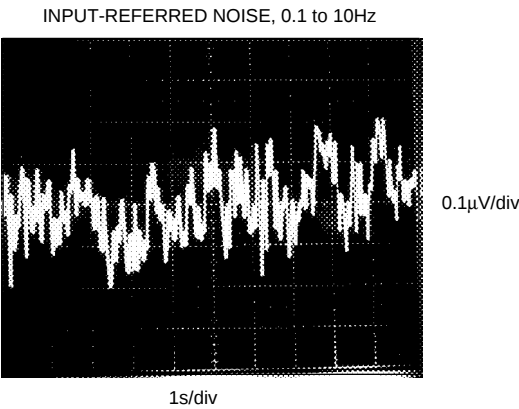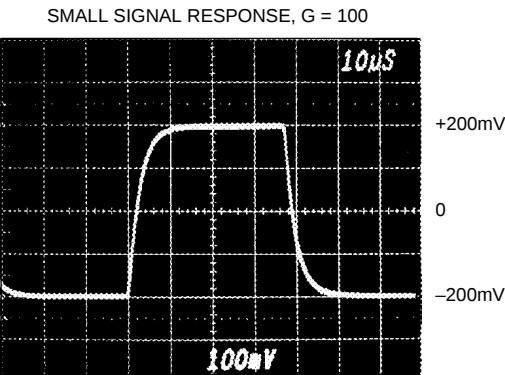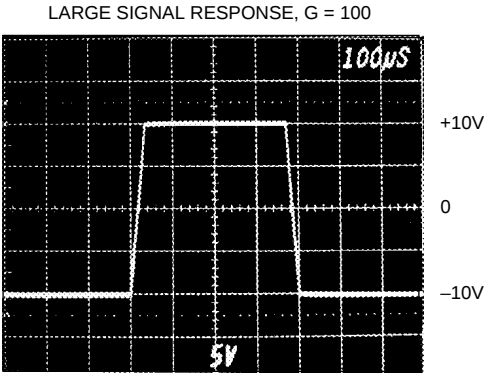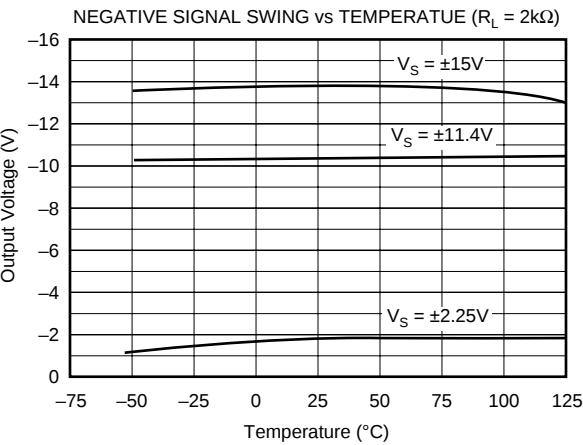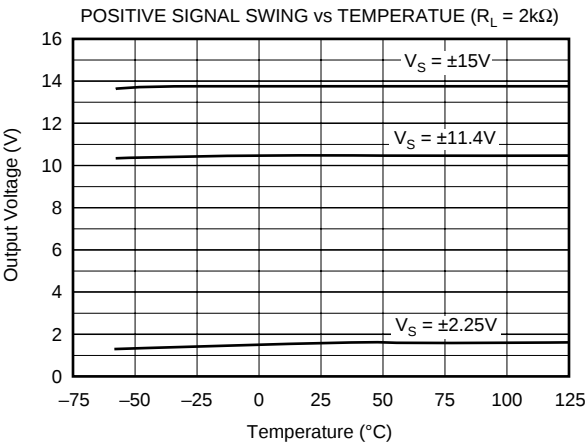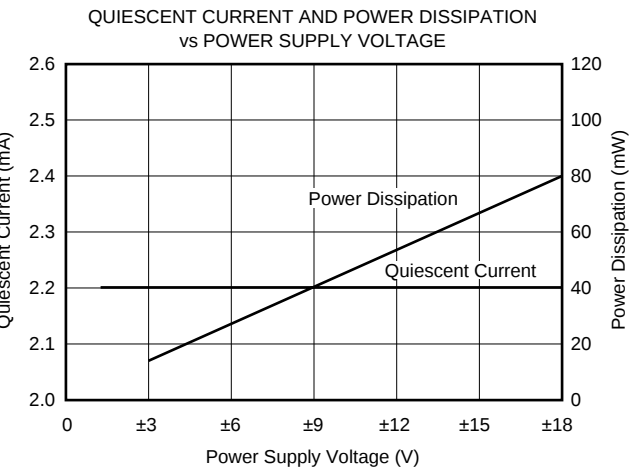

## APPLICATION INFORMATION

Figure 1 shows the basic connections required for operation of the INA131. Applications with noisy or high impedance power supplies may require decoupling capacitors close to the device pins as shown.

The output is referred to the output reference (Ref) terminal which is normally grounded. This must be a low-impedance connection to assure good common-mode rejection. A resistance of 5Ω in series with the Ref pin will cause a device with 110dB CMR to degrade to approximately 106dB CMR.

### SETTING THE GAIN

No external resistors are required for  $G = 100$ . On-chip laser-trimmed resistors set the gain, providing excellent gain accuracy and temperature stability. Gain is distributed between the input and output stages of the INA131. Bandwidth is increased by approximately five times (compared to the INA114 in  $G = 100$ ). Input common-mode range is also improved (see “Input Common-Mode Range”).

Although the INA131 is primarily intended for fixed  $G = 100$  applications, the gain can be increased by connecting an external resistor to the  $R_G$  pins. The internal resistors are trimmed for precise ratios, not to absolute values, so the influence of an external resistor will vary from device to

device. Absolute accuracy of the internal values is  $\pm 40\%$ . The nominal gain with an external  $R_G$  resistor can be calculated by:

$$G = 100 + \frac{250 \text{ k}\Omega}{R_G} \quad (1)$$

Where:  $R_G$  is the external gain resistor.

Accuracy of the 250kΩ term is  $\pm 40\%$ .

The stability and temperature drift of the external gain setting resistor,  $R_G$ , also affects gain.  $R_G$ 's contribution to gain accuracy and drift can be directly inferred from the gain equation (1).

### NOISE PERFORMANCE

The INA131 provides very low noise in most applications. For differential source impedances less than 1kΩ, the INA103 may provide lower noise. For source impedances greater than 50kΩ, the INA111 FET-Input Instrumentation Amplifier may provide lower noise.

Low frequency noise of the INA131 is approximately 0.4μVp-p measured from 0.1 to 10Hz. This is approximately one-tenth the noise of state-of-the-art chopper-stabilized amplifiers.

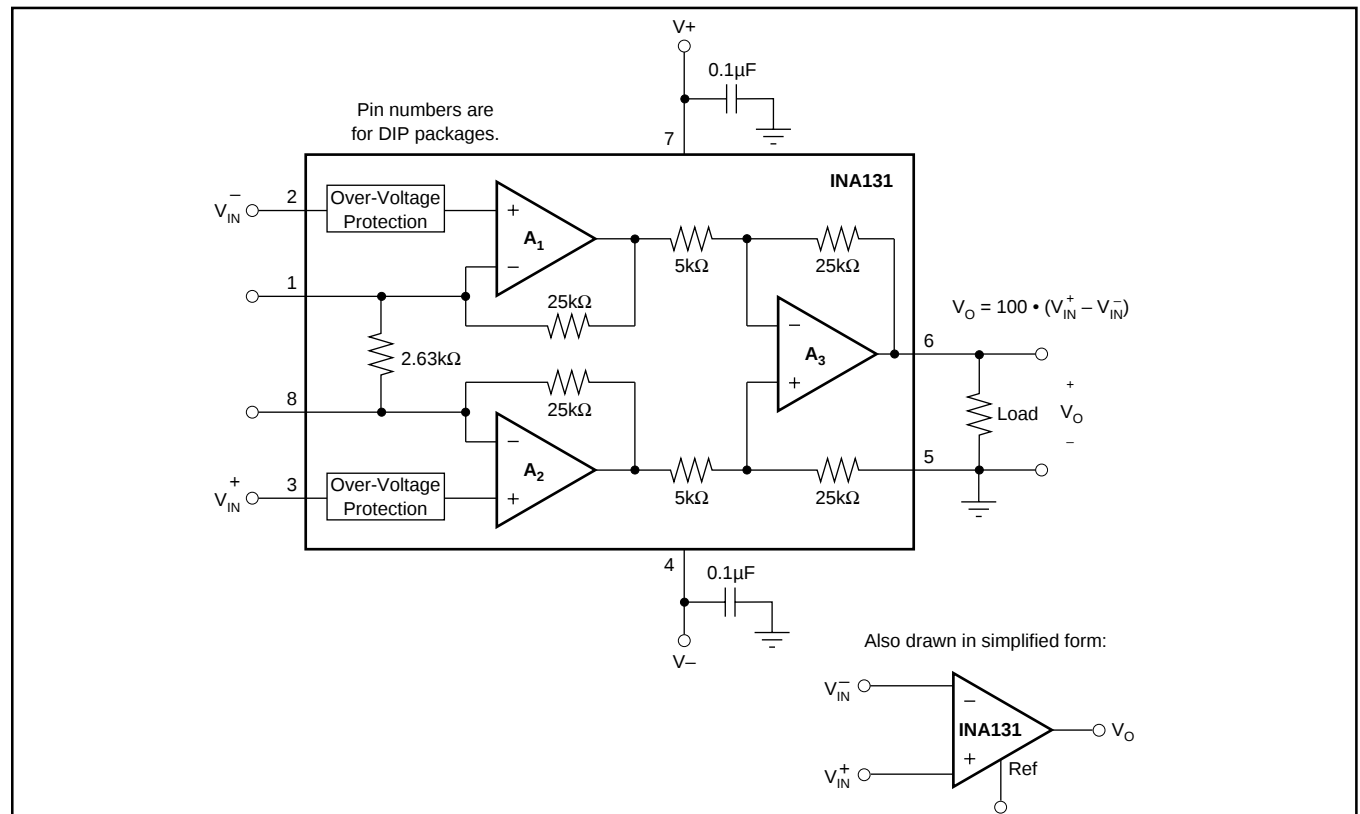


FIGURE 1. Basic Connections.

## OFFSET TRIMMING

The INA131 is laser trimmed for very low offset voltage and drift. Most applications require no external offset adjustment. Figure 2 shows an optional circuit for trimming the output offset voltage. The voltage applied to Ref terminal is summed at the output. Low impedance must be maintained at this node to assure good common-mode rejection. This is achieved by buffering trim voltage with an op amp as shown.

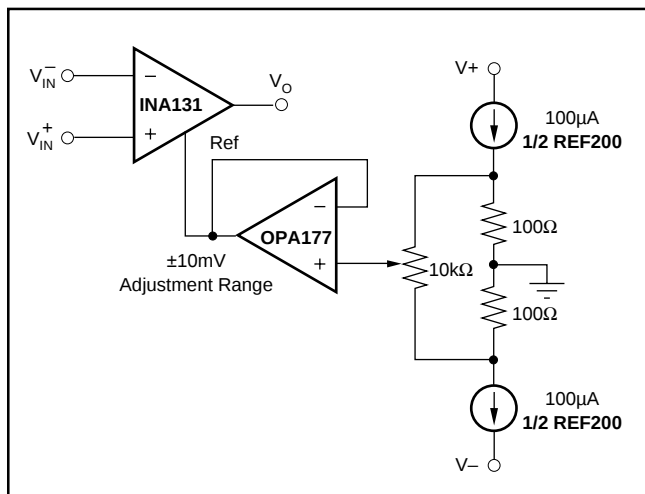


FIGURE 2. Optional Trimming of Output Offset Voltage.

## INPUT BIAS CURRENT RETURN PATH

The input impedance of the INA131 is extremely high—approximately  $10^{10}\Omega$ . However, a path must be provided for the input bias current of both inputs. This input bias current is typically less than  $\pm 1\text{nA}$  (it can be either polarity due to cancellation circuitry). High input impedance means that this input bias current changes very little with varying input voltage.

Input circuitry must provide a path for this input bias current if the INA131 is to operate properly. Figure 3 shows various provisions for an input bias current path. Without a bias current return path, the inputs will float to a potential which exceeds the common-mode range of the INA131 and the input amplifiers will saturate. If the differential source resistance is low, bias current return path can be connected to one input (see thermocouple example in Figure 3). With higher source impedance, using two resistors provides a balanced input with possible advantages of lower input offset voltage due to bias current and better common-mode rejection.

## INPUT COMMON-MODE RANGE

The linear common-mode range of the input op amps of the INA131 is approximately  $\pm 13.75\text{V}$  (or  $1.25\text{V}$  from the power supplies). As the output voltage increases, however, the linear input range is limited by the output voltage swing of the input amplifiers,  $A_1$  and  $A_2$ . The  $5\text{V/V}$  output stage gain of the INA131 reduces this effect. Compared to the

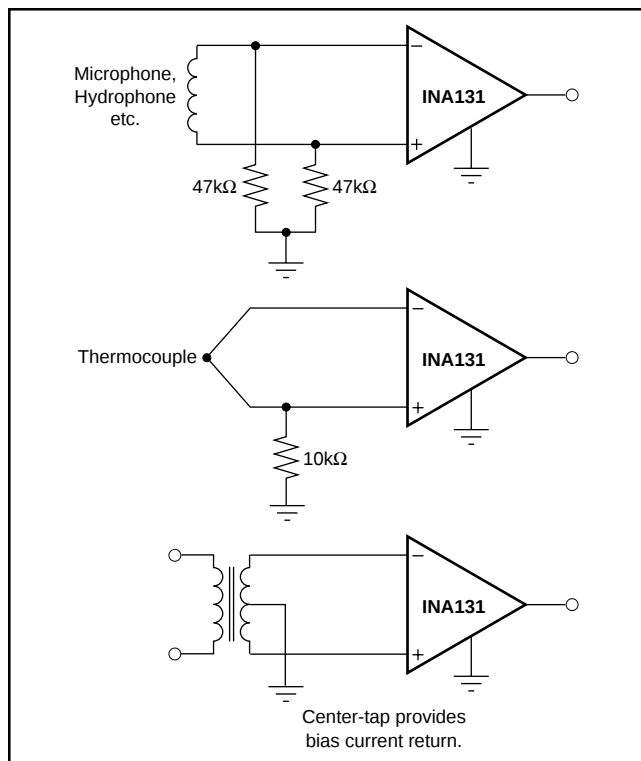


FIGURE 3. Providing an Input Common-Mode Current Path.

INA114 and other unity output gain instrumentation amplifiers, the INA131 provides several additional volts of input common-mode range with full output voltage swing. See the typical performance curve “Input Common-Mode Range vs Output Voltage”.

Input-overload often produces an output voltage that appears normal. For example, an input voltage of  $+20\text{V}$  on one input and  $+40\text{V}$  on the other input will obviously exceed the linear common-mode range of both input amplifiers. Since both input amplifiers are saturated to the nearly the same output voltage limit, the difference voltage measured by the output amplifier will be near zero. The output of the INA131 will be near  $0\text{V}$  even though both inputs are overloaded.

## INPUT PROTECTION

The inputs of the INA131 are individually protected for voltages up to  $\pm 40\text{V}$ . For example, a condition of  $-40\text{V}$  on one input and  $+40\text{V}$  on the other input will not cause damage. Internal circuitry on each input provides low series impedance under normal signal conditions. To provide equivalent protection, series input resistors would contribute excessive noise. If the input is overloaded, the protection circuitry limits the input current to a safe value (approximately  $1.5\text{mA}$ ). The typical performance curve “Input Bias Current vs Input Voltage” shows this input current limit behavior. The inputs are protected even if no power supply voltage is present.

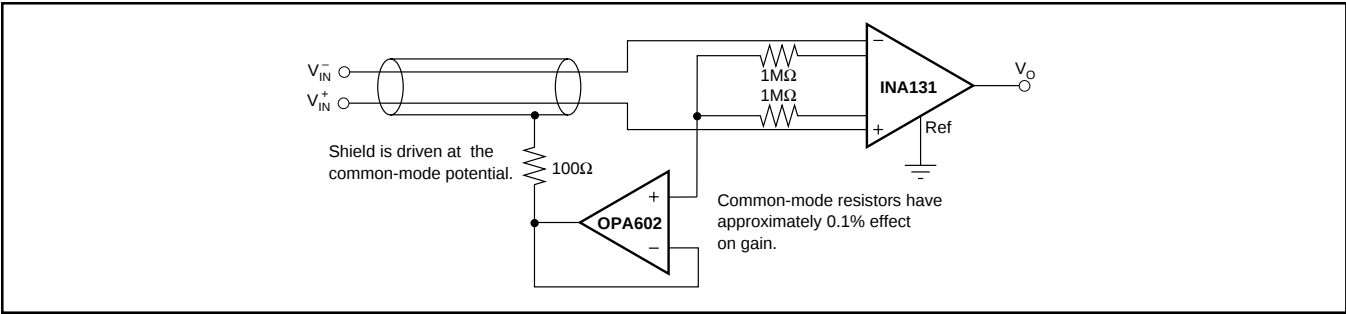


FIGURE 4. Shield Driver Circuit.

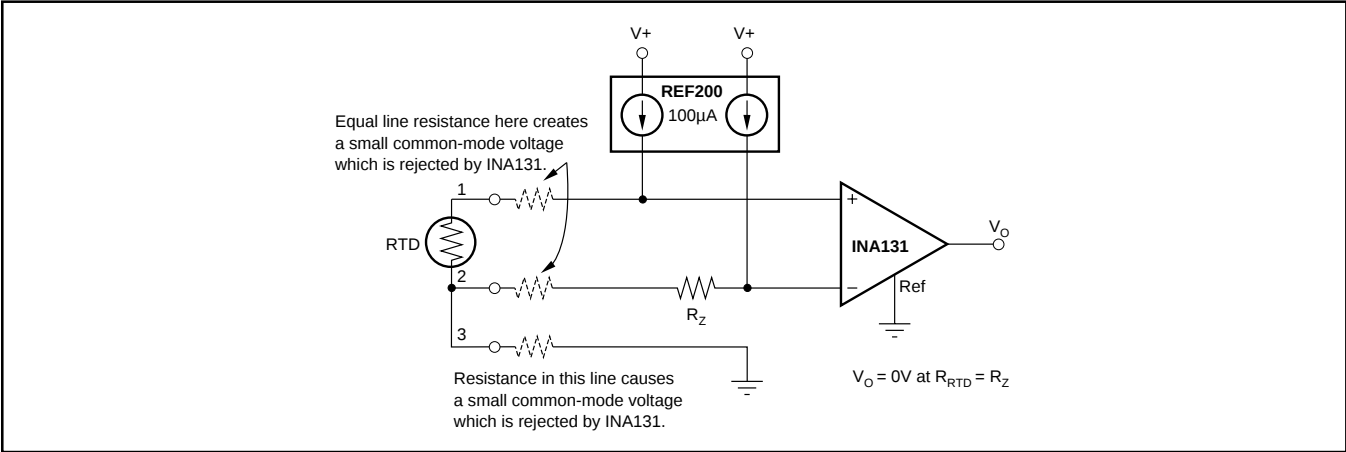


FIGURE 5. RTD Temperature Measurement Circuit.

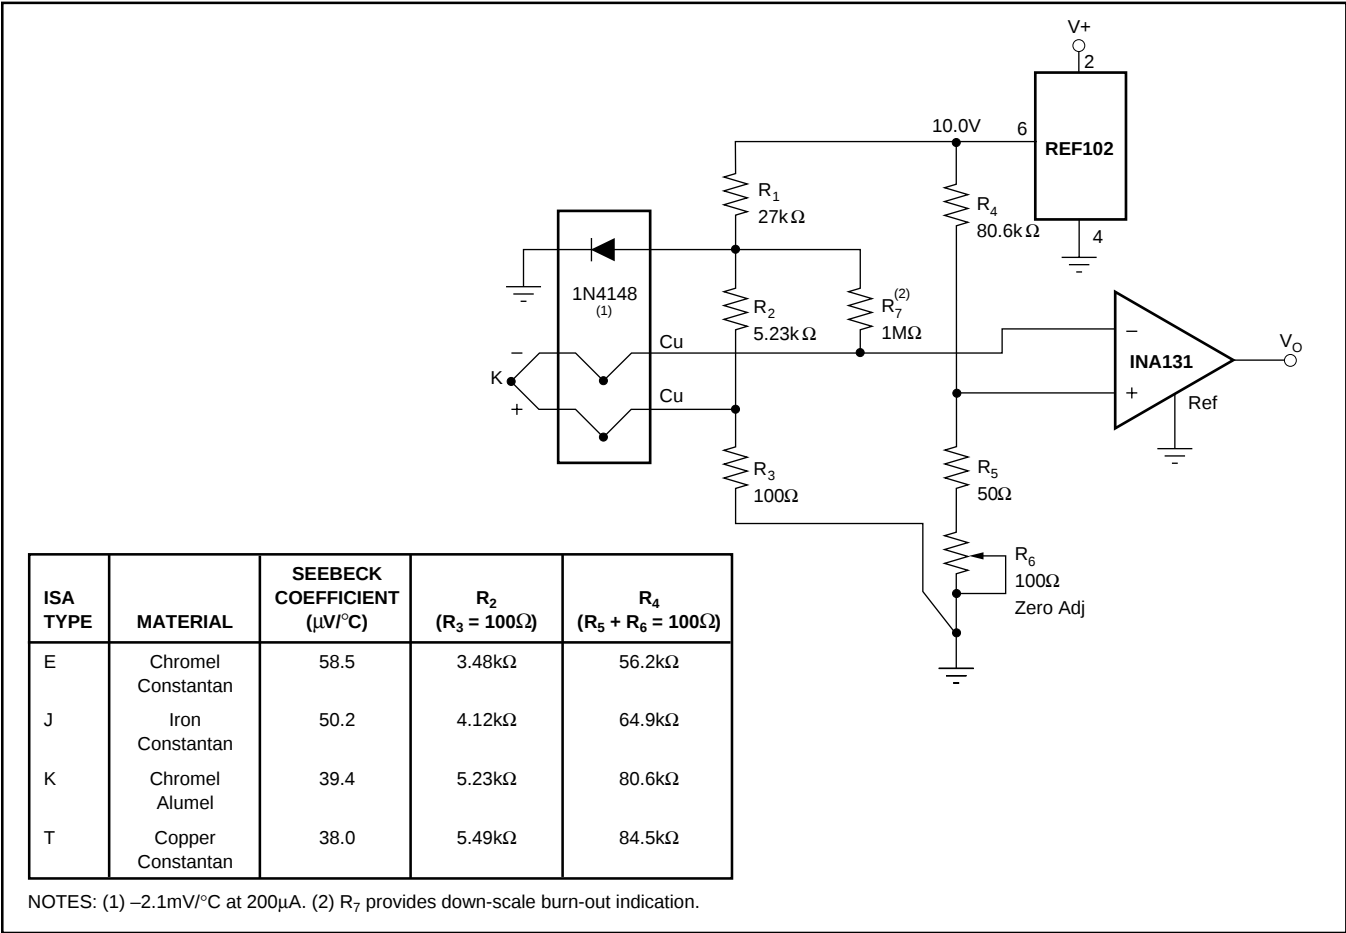


FIGURE 6. Thermocouple Amplifier with Cold Junction Compensation.

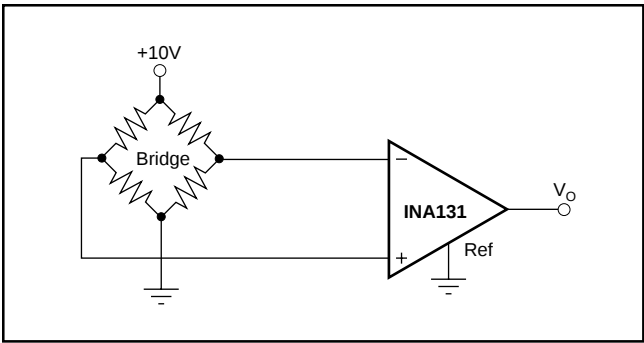


FIGURE 7. Bridge Transducer Amplifier.

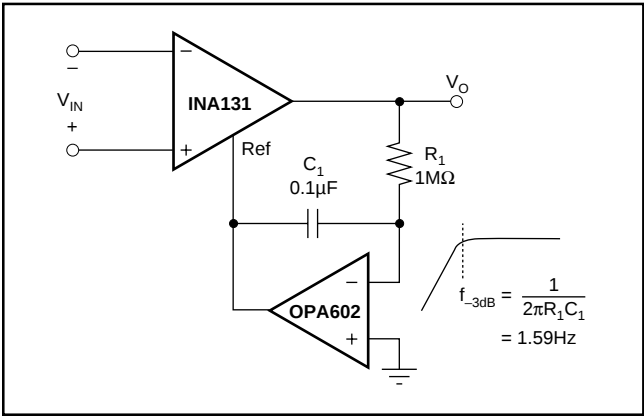


FIGURE 8. AC-Coupled Instrumentation Amplifier.

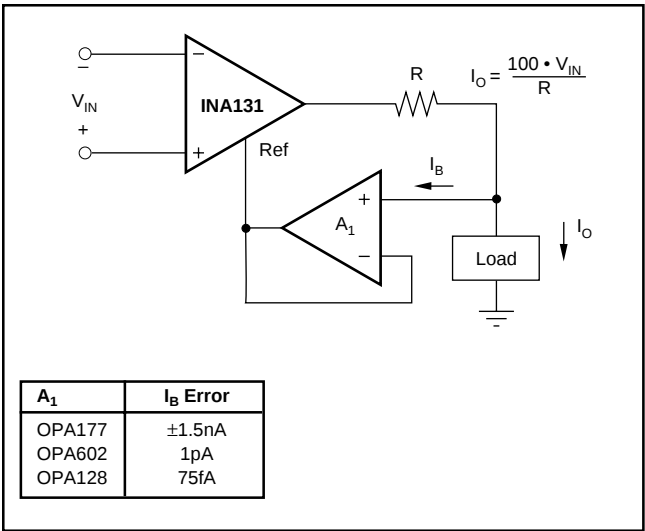


FIGURE 9. Differential Voltage to Current Converter.

## PACKAGING INFORMATION

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| INA131AP              | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | Call TI                              | N/A for Pkg Type                  | -40 to 85    | INA131AP            |
| INA131AP.A            | Active        | Production           | PDIP (P)   8   | 50   TUBE             | Yes         | Call TI                              | N/A for Pkg Type                  | -40 to 85    | INA131AP            |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025