



## Table of Contents

|                                             |    |                                                          |    |
|---------------------------------------------|----|----------------------------------------------------------|----|
| 1 特性.....                                   | 1  | 9.2 Functional Block Diagram.....                        | 21 |
| 2 应用.....                                   | 1  | 9.3 Feature Description.....                             | 22 |
| 3 说明.....                                   | 1  | 9.4 Device Functional Modes.....                         | 23 |
| 4 Revision History.....                     | 2  | 10 Application and Implementation.....                   | 24 |
| 5 说明 (续).....                               | 4  | 10.1 Application Information.....                        | 24 |
| 6 Pin Configuration and Function.....       | 5  | 10.2 Typical Applications.....                           | 24 |
| 7 Specifications.....                       | 6  | 11 Power Supply Recommendations.....                     | 34 |
| 7.1 Absolute Maximum Ratings.....           | 6  | 12 Layout.....                                           | 35 |
| 7.2 ESD Ratings.....                        | 6  | 12.1 Layout Guidelines.....                              | 35 |
| 7.3 Recommended Operating Conditions.....   | 6  | 12.2 Layout Example.....                                 | 35 |
| 7.4 Thermal Information.....                | 6  | 12.3 PCB Material.....                                   | 35 |
| 7.5 Power Ratings.....                      | 7  | 13 Device and Documentation Support.....                 | 36 |
| 7.6 Insulation Characteristics.....         | 7  | 13.1 Device Support.....                                 | 36 |
| 7.7 Safety-Related Certifications.....      | 9  | 13.2 Documentation Support.....                          | 36 |
| 7.8 Safety Limiting Values.....             | 9  | 13.3 接收文档更新通知.....                                       | 36 |
| 7.9 Electrical Characteristics.....         | 10 | 13.4 支持资源.....                                           | 36 |
| 7.10 Switching Characteristics.....         | 11 | 13.5 Trademarks.....                                     | 36 |
| 7.11 Insulation Characteristics Curves..... | 12 | 13.6 静电放电警告.....                                         | 36 |
| 7.12 Typical Characteristics.....           | 13 | 13.7 术语表.....                                            | 36 |
| 8 Parameter Measurement Information.....    | 19 | 14 Mechanical, Packaging, and Orderable Information..... | 36 |
| 9 Detailed Description.....                 | 21 |                                                          |    |
| 9.1 Overview.....                           | 21 |                                                          |    |

## 4 Revision History

注：以前版本的页码可能与当前版本的页码不同

| Changes from Revision B (January 2017) to Revision C (May 2023)                                                                                                                   | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • Added Additional manufacturing certification pending in the <i>Safety-Related Certifications</i> table.....                                                                     | 9    |
| Changes from Revision A (June 2015) to Revision B (January 2017)                                                                                                                  | Page |
| • 将标题从“有源安全特性”更改为“有源保护特性”.....                                                                                                                                                    | 1    |
| • 将“特性”从“浪涌抗扰度为 12800V <sub>PK</sub> (根据 IEC 61000-4-5)”更改为“可承受的隔离浪涌电压 12800V <sub>PK</sub> ”.....                                                                                | 1    |
| • 向安全和监管认证添加了“特性”：符合 EN 61010-1 和 EN 60950-1 标准的 TUV 认证.....                                                                                                                      | 1    |
| • Added the <i>Power Ratings</i> table.....                                                                                                                                       | 7    |
| • Moved <i>Insulation Characteristics</i> to the <i>Specifications</i> .....                                                                                                      | 7    |
| • Changed the Test Conditions and values for $q_{pd}$ in <i>Insulation Characteristics</i> .....                                                                                  | 7    |
| • Changed $R_{lO}$ From: $100^{\circ}\text{C} \leq T_A \leq \text{max To: } 100^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$ in the <i>Insulation Characteristics</i> ..... | 7    |
| • Moved <i>Safety-Related Certifications</i> to the <i>Specifications</i> .....                                                                                                   | 9    |
| • Changed the CSA status from planned to certified.....                                                                                                                           | 9    |
| • Moved <i>Safety Limiting Values</i> to the <i>Specifications</i> .....                                                                                                          | 9    |
| • Added the <i>Reinforced High-Voltage Capacitor Life Time Projection</i> figure to <i>Insulation Characteristics Curves</i> .....                                                | 12   |
| • Changed the <i>Thermal Derating Curve for Limiting Current per VDE</i> figure and Added the <i>Thermal Derating Curve for Limiting Power per VDE</i> figure.....                | 12   |
| • Added the <i>I<sub>CC1</sub> Supply Current vs Temperature</i> figure to the <i>Typical Characteristics</i> .....                                                               | 13   |
| • Changed the <i>OUT Propagation Delay, Non-Inverting Configuration</i> figure.....                                                                                               | 19   |
| • Changed the <i>OUT Propagation Delay, Inverting Configuration</i> figure.....                                                                                                   | 19   |
| • Added text ", but connecting CLAMP output of the gate driver to the IGBT gate is also not an issue." to <i>Supply and Active Miller Clamp</i> .....                             | 22   |

|                                                                                                                                               |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------|----|
| • Changed the second paragraph of the <a href="#">节 10.2</a> .....                                                                            | 24 |
| • Added text "and $\overline{\text{RST}}$ input signal" to <a href="#">节 10.2.1</a> .....                                                     | 25 |
| • Deleted text " and a 220-pF filtering capacitor." from <i>Recommended ISO5851 Application Circuit</i> .....                                 | 26 |
| • Deleted text "thereby, providing protection against further catastrophic failures." From: the <i>Global-Shutdown and Reset</i> section..... | 28 |
| • Changed the <i>Normal Operation - Bipolar Supply</i> and <i>Normal Operation - Unipolar Supply</i> figures.....                             | 33 |
| • Changed the <i>PCB Material</i> section.....                                                                                                | 35 |

---

**Changes from Revision \* (June 2015) to Revision A (June 2015)**
**Page**

|                            |   |
|----------------------------|---|
| • 将首页的“产品预发布”更改为完整数据表..... | 1 |
|----------------------------|---|

---

## 5 说明 (续)

如果在由双极输出电源供电的正常运行期间关断 IGBT，输出电压会被硬钳位为  $V_{EE2}$ 。如果输出电源为单极，那么可采用有源米勒钳位，这种钳位会在一条低阻抗路径上灌入米勒电流，从而防止 IGBT 在高电压瞬态条件下发生动态导通。

当发生去饱和故障时，器件会通过隔离栅发送故障信号，以将输入端的  $\overline{FLT}$  输出拉为低电平并阻断隔离器的输入。 $\overline{FLT}$  的输出状态将被锁存，可通过  $\overline{RST}$  输入上的低电平有效脉冲复位。

如果在由双极输出电源供电的正常运行期间关断 IGBT，输出电压会被硬钳位为  $V_{EE2}$ 。如果输出电源为单极，那么可采用有源米勒钳位，这种钳位会在一条低阻抗路径上灌入米勒电流，从而防止 IGBT 在高电压瞬态条件下发生动态导通。

栅极驱动器是否准备就绪待运行由两个欠压锁定电路控制，这两个电路会监视输入端和输出端的电源。如果任意一端电源不足，RDY 输出会变为低电平；否则，该输出为高电平。

ISO5851 采用 16 引脚小外形尺寸集成电路 (SOIC) 封装。此器件的额定工作环境温度范围为  $-40^{\circ}\text{C}$  至  $+125^{\circ}\text{C}$ 。

## 6 Pin Configuration and Function

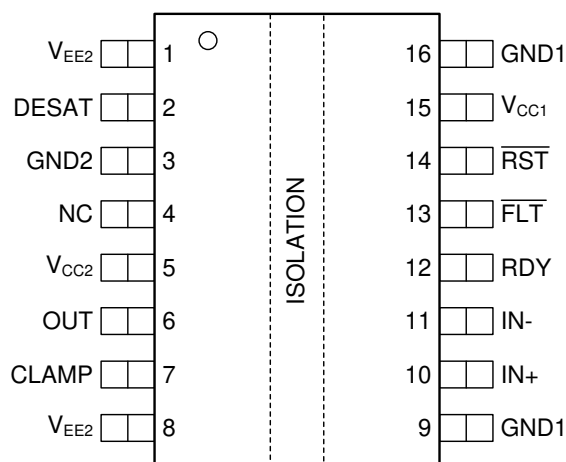


图 6-1. DW Package 16-Pin SOIC Top View

表 6-1. Pin Functions

| PIN              |       | I/O | DESCRIPTION                                                              |
|------------------|-------|-----|--------------------------------------------------------------------------|
| NAME             | NO.   |     |                                                                          |
| CLAMP            | 7     | O   | Miller clamp output                                                      |
| DESAT            | 2     | I   | Desaturation voltage input                                               |
| FLT              | 13    | O   | Fault output, low-active during DESAT condition                          |
| GND1             | 9, 16 | —   | Input ground                                                             |
| GND2             | 3     | —   | Gate drive common. Connect to IGBT emitter.                              |
| IN+              | 10    | I   | Non-inverting gate drive voltage control input                           |
| IN -             | 11    | I   | Inverting gate drive voltage control input                               |
| NC               | 4     | —   | Not connected                                                            |
| OUT              | 6     | O   | Gate drive voltage output                                                |
| RDY              | 12    | O   | Power-good output, active high when both supplies are good.              |
| RST              | 14    | I   | Reset input, apply a low pulse to reset fault latch.                     |
| V <sub>CC1</sub> | 15    | —   | Positive input supply (3 V to 5.5 V)                                     |
| V <sub>CC2</sub> | 5     | —   | Most positive output supply potential.                                   |
| V <sub>EE2</sub> | 1, 8  | —   | Output negative supply. Connect to GND2 for Unipolar supply application. |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                      |                                     |                                                                                   | MIN                    | MAX                    | UNIT |
|----------------------|-------------------------------------|-----------------------------------------------------------------------------------|------------------------|------------------------|------|
| V <sub>CC1</sub>     | Supply voltage input side           |                                                                                   | GND1 – 0.3             | 6                      | V    |
| V <sub>CC2</sub>     | Positive supply voltage output side | V <sub>CC2</sub> – GND2                                                           | – 0.3                  | 35                     | V    |
| V <sub>EE2</sub>     | Negative supply voltage output side | V <sub>EE2</sub> – GND2                                                           | – 17.5                 | 0.3                    | V    |
| V <sub>(SUP2)</sub>  | Total supply output voltage         | V <sub>CC2</sub> – V <sub>EE2</sub>                                               | – 0.3                  | 35                     | V    |
| V <sub>OUT</sub>     | Gate driver output voltage          |                                                                                   | V <sub>EE2</sub> – 0.3 | V <sub>CC2</sub> + 0.3 | V    |
| I <sub>(OUTH)</sub>  | Gate driver high output current     | Gate driver high output current<br>max pulse width = 10 μs, max duty cycle = 0.2% |                        | 2.7                    | A    |
| I <sub>(OUTL)</sub>  | Gate driver low output current      | Gate driver high output current<br>max pulse width = 10 μs, max duty cycle = 0.2% |                        | 5.5                    | A    |
| V <sub>(LIP)</sub>   | Voltage at IN+, IN –, FLT, RDY, RST |                                                                                   | GND1 – 0.3             | V <sub>CC1</sub> + 0.3 | V    |
| I <sub>(LOP)</sub>   | Output current of FLT, RDY          |                                                                                   |                        | 10                     | mA   |
| V <sub>(DESAT)</sub> | Voltage at DESAT                    |                                                                                   | GND2 – 0.3             | V <sub>CC2</sub> + 0.3 | V    |
| V <sub>(CLAMP)</sub> | Clamp voltage                       |                                                                                   | V <sub>EE2</sub> – 0.3 | V <sub>CC2</sub> + 0.3 | V    |
| T <sub>J</sub>       | Junction temperature                |                                                                                   | – 40                   | 150                    | °C   |
| T <sub>STG</sub>     | Storage temperature                 |                                                                                   | – 65                   | 150                    | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|                    |                         | VALUE                                                                          | UNIT  |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±4000 |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1500 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
 (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                     |                                                                         | MIN                    | NOM | MAX                    | UNIT |
|---------------------|-------------------------------------------------------------------------|------------------------|-----|------------------------|------|
| V <sub>CC1</sub>    | Supply voltage input side                                               | 3                      |     | 5.5                    | V    |
| V <sub>CC2</sub>    | Positive supply voltage output side (V <sub>CC2</sub> – GND2)           | 15                     |     | 30                     | V    |
| V <sub>EE2</sub>    | Negative supply voltage output side (V <sub>EE2</sub> – GND2)           | – 15                   |     | 0                      | V    |
| V <sub>(SUP2)</sub> | Total supply voltage output side (V <sub>CC2</sub> – V <sub>EE2</sub> ) | 15                     |     | 30                     | V    |
| V <sub>IH</sub>     | High-level input voltage (IN+, IN –, RST)                               | 0.7 × V <sub>CC1</sub> |     | V <sub>CC1</sub>       | V    |
| V <sub>IL</sub>     | Low-level input voltage (IN+, IN –, RST)                                | 0                      |     | 0.3 × V <sub>CC1</sub> | V    |
| t <sub>UI</sub>     | Pulse width at IN+, IN – for full output (C <sub>LOAD</sub> = 1 nF)     | 40                     |     |                        | ns   |
| t <sub>RST</sub>    | Pulse width at RST for resetting fault latch                            | 800                    |     |                        | ns   |
| T <sub>A</sub>      | Ambient temperature                                                     | – 40                   | 25  | 125                    | °C   |

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                        | ISO5851   | UNIT |
|-------------------------------|----------------------------------------|-----------|------|
|                               |                                        | DW (SOIC) |      |
|                               |                                        | 16 PINS   |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance | 99.6      | °C/W |

## 7.4 Thermal Information (continued)

| THERMAL METRIC <sup>(1)</sup> |                                              | ISO5851   | UNIT |
|-------------------------------|----------------------------------------------|-----------|------|
|                               |                                              | DW (SOIC) |      |
|                               |                                              | 16 PINS   |      |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 48.5      | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 56.5      | °C/W |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   | 29.2      | °C/W |
| $\psi_{JB}$                   | Junction-to-board characterization parameter | 56.5      | °C/W |

(1) For more information about traditional and new thermal metrics, see [Semiconductor and IC Package Thermal Metrics](#) (SPRA953).

## 7.5 Power Ratings

| PARAMETER | TEST CONDITIONS                          | MIN | TYP | MAX  | UNIT |
|-----------|------------------------------------------|-----|-----|------|------|
| $P_D$     | Maximum power dissipation <sup>(1)</sup> |     |     | 1255 | mW   |
| $P_{ID}$  | Maximum input power dissipation          |     |     | 175  | mW   |
| $P_{OD}$  | Maximum output power dissipation         |     |     | 1080 | mW   |

(1) Full chip power dissipation is de-rated 10.04 mW/°C beyond 25°C ambient temperature. At 125°C ambient temperature, a maximum of 251 mW total power dissipation is allowed. Power dissipation can be optimized depending on ambient temperature and board design, while ensuring that Junction temperature does not exceed 150°C.

## 7.6 Insulation Characteristics

| PARAMETER                                                  |                                                      | TEST CONDITIONS                                                                                                                                                                                                                           | SPECIFICATION     | UNIT             |
|------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------|
| CLR                                                        | External clearance <sup>(1)</sup>                    | Shortest terminal-to-terminal distance through air                                                                                                                                                                                        | 8                 | mm               |
| CPG                                                        | External creepage <sup>(1)</sup>                     | Shortest terminal-to-terminal distance across the package surface                                                                                                                                                                         | 8                 | mm               |
| DTI                                                        | Distance through the insulation                      | Minimum internal gap (internal clearance)                                                                                                                                                                                                 | 21                | μ m              |
| CTI                                                        | Comparative tracking index                           | DIN EN 60112 (VDE 0303-11); IEC 60112; UL 746A                                                                                                                                                                                            | >600              | V                |
|                                                            | Material group                                       | According to IEC 60664-1                                                                                                                                                                                                                  | I                 |                  |
|                                                            | Overvoltage category per IEC 60664-1                 | Rated mains voltage ≤ 600 V <sub>RMS</sub>                                                                                                                                                                                                | I-IV              |                  |
|                                                            |                                                      | Rated mains voltage ≤ 1000 V <sub>RMS</sub>                                                                                                                                                                                               | I-III             |                  |
| DIN V VDE V 0884-10 (VDE V 0884-10):2006-12 <sup>(2)</sup> |                                                      |                                                                                                                                                                                                                                           |                   |                  |
| V <sub>IORM</sub>                                          | Maximum repetitive peak isolation voltage            | AC voltage (bipolar)                                                                                                                                                                                                                      | 2121              | V <sub>PK</sub>  |
| V <sub>IOWM</sub>                                          | Maximum isolation working voltage                    | AC voltage. Time dependent dielectric breakdown (TDDb) Test, see 图 7-1                                                                                                                                                                    | 1500              | V <sub>RMS</sub> |
|                                                            |                                                      | DC voltage                                                                                                                                                                                                                                | 2121              | V <sub>DC</sub>  |
| V <sub>IOTM</sub>                                          | Maximum Transient isolation voltage                  | V <sub>TEST</sub> = V <sub>IOTM</sub> , t = 60 sec (qualification), t = 1 sec (100% production)                                                                                                                                           | 8000              | V <sub>PK</sub>  |
| V <sub>IOSM</sub>                                          | Maximum surge isolation voltage <sup>(3)</sup>       | Test method per IEC 60065, 1.2/50 μ s waveform, V <sub>TEST</sub> = 1.6 x V <sub>IOSM</sub> = 12800 V <sub>PK</sub> (qualification)                                                                                                       | 8000              |                  |
| q <sub>pd</sub>                                            | Apparent charge <sup>(4)</sup>                       | Method a: After I/O safety test subgroup 2/3, V <sub>ini</sub> = V <sub>IOTM</sub> , t <sub>ini</sub> = 60 s; V <sub>pd(m)</sub> = 1.2 x V <sub>IORM</sub> = 2545 V <sub>PK</sub> , t <sub>m</sub> = 10 s                                 | ≤5                | pC               |
|                                                            |                                                      | Method a: After environmental tests subgroup 1, V <sub>ini</sub> = V <sub>IOTM</sub> , t <sub>ini</sub> = 60 s; V <sub>pd(m)</sub> = 1.6 x V <sub>IORM</sub> = 3394 V <sub>PK</sub> , t <sub>m</sub> = 10 s                               | ≤5                |                  |
|                                                            |                                                      | Method b1: At routine test (100% production) and preconditioning (type test) V <sub>ini</sub> = V <sub>IOTM</sub> , t <sub>ini</sub> = 60 s; V <sub>pd(m)</sub> = 1.875x V <sub>IORM</sub> = 3977 V <sub>PK</sub> , t <sub>m</sub> = 10 s | ≤5                |                  |
| R <sub>IO</sub>                                            | Isolation resistance, input to output <sup>(5)</sup> | V <sub>IO</sub> = 500 V at T <sub>S</sub>                                                                                                                                                                                                 | > 10 <sup>9</sup> | Ω                |
|                                                            |                                                      | V <sub>IO</sub> = 500 V, T <sub>A</sub> = 25°C                                                                                                                                                                                            | >10 <sup>12</sup> | Ω                |
|                                                            |                                                      | V <sub>IO</sub> = 500 V, 100°C ≤ T <sub>A</sub> ≤ 125°C                                                                                                                                                                                   | >10 <sup>11</sup> | Ω                |
| C <sub>IO</sub>                                            | Barrier capacitance, input to output <sup>(5)</sup>  | V <sub>IO</sub> = 0.4 x sin (2 π ft), f = 1 MHz                                                                                                                                                                                           | ~1                | pF               |

## 7.6 Insulation Characteristics (continued)

| PARAMETER         |                                | TEST CONDITIONS                                                                                                                        | SPECIFICATION | UNIT      |
|-------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Pollution degree  |                                |                                                                                                                                        | 2             |           |
| Climatic category |                                |                                                                                                                                        | 40/125/21     |           |
| <b>UL 1577</b>    |                                |                                                                                                                                        |               |           |
| $V_{ISO}$         | Withstanding Isolation voltage | $V_{TEST} = V_{ISO}$ , $t = 60$ sec (qualification),<br>$V_{TEST} = 1.2 \times V_{ISO} = 6840 V_{RMS}$ , $t = 1$ sec (100% production) | 5700          | $V_{RMS}$ |

- (1) Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves and/or ribs on a printed circuit board are used to help increase these specifications.
- (2) This coupler is suitable for safe electrical insulation only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.
- (3) Testing is carried out in air or oil to determine the intrinsic surge immunity of the isolation barrier.
- (4) Apparent charge is electrical discharge caused by a partial discharge (pd).
- (5) All pins on each side of the barrier tied together creating a two-terminal device.
- (6) Testing is carried out in air or oil to determine the intrinsic surge immunity of the isolation barrier.



## 7.7 Safety-Related Certifications

| VDE                                                                                                                                                                                                                | CSA                                                                                                                                                                                                                                                                                                                                                             | UL                                                           | CQC                                                                                                             | TUV                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certified according to DIN V VDE V 0884-10 (VDE V 0884-10):2006-12 and DIN EN 60950-1 (VDE 0805 Teil 1):2011-01                                                                                                    | Certified according to CSA Component Acceptance Notice 5A, IEC 60950-1, and IEC 60601-1                                                                                                                                                                                                                                                                         | Certified according to UL 1577 Component Recognition Program | Certified according to GB 4943.1-2011                                                                           | Certified according to EN 61010-1:2010 (3rd Ed) and EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013                                                                                                                                                                     |
| Reinforced Insulation<br>Maximum Transient isolation voltage, 8000 V <sub>PK</sub> ;<br>Maximum surge isolation voltage, 8000 V <sub>PK</sub> ;<br>Maximum repetitive peak isolation voltage, 2121 V <sub>PK</sub> | Isolation Rating of 5700 V <sub>RMS</sub> ;<br>Reinforced insulation per CSA 60950-1- 07+A1+A2 and IEC 60950-1 (2nd Ed.), 800 V <sub>RMS</sub> max working voltage (pollution degree 2, material group I) ;<br>2 MOPP (Means of Patient Protection) per CSA 60601-1:14 and IEC 60601-1 Ed. 3.1, 250 V <sub>RMS</sub> (354 V <sub>PK</sub> ) max working voltage | Single Protection, 5700 V <sub>RMS</sub>                     | Reinforced Insulation, Altitude ≤ 5000m, Tropical climate, 400 V <sub>RMS</sub> maximum working voltage         | 5700 V <sub>RMS</sub> Reinforced insulation per EN 61010-1:2010 (3rd Ed) up to working voltage of 600 V <sub>RMS</sub><br>5700 V <sub>RMS</sub> Reinforced insulation per EN 60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 up to working voltage of 800 V <sub>RMS</sub> |
| Certification completed<br>Certificate number: 40040142                                                                                                                                                            | Certification completed<br>Master contract number: 220991                                                                                                                                                                                                                                                                                                       | Certification completed<br>File number: E181974              | Certification completed<br>Certificate number: CQC16001141761<br>Additional manufacturing certification pending | Certification completed<br>Client ID number: 77311                                                                                                                                                                                                                        |

## 7.8 Safety Limiting Values

Safety limiting intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry. A failure of the I/O can allow low resistance to ground or the supply and, without current limiting, dissipate sufficient power to overheat the die and damage the isolation barrier, potentially leading to secondary system failures.

| PARAMETER                                             | TEST CONDITIONS                                                                                    | MIN | TYP | MAX                 | UNIT |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----|-----|---------------------|------|
| I <sub>S</sub> Safety input, output or supply current | R <sub>θJA</sub> = 99.6°C/W, V <sub>I</sub> = 3.6 V, T <sub>J</sub> = 150°C, T <sub>A</sub> = 25°C |     |     | 349                 | mA   |
|                                                       | R <sub>θJA</sub> = 99.6°C/W, V <sub>I</sub> = 5.5 V, T <sub>J</sub> = 150°C, T <sub>A</sub> = 25°C |     |     | 228                 |      |
|                                                       | R <sub>θJA</sub> = 99.6°C/W, V <sub>I</sub> = 15 V, T <sub>J</sub> = 150°C, T <sub>A</sub> = 25°C  |     |     | 84                  |      |
|                                                       | R <sub>θJA</sub> = 99.6°C/W, V <sub>I</sub> = 30 V, T <sub>J</sub> = 150°C, T <sub>A</sub> = 25°C  |     |     | 42                  |      |
| P <sub>S</sub> Safety input, output, or total power   | R <sub>θJA</sub> = 99.6°C/W, T <sub>J</sub> = 150°C, T <sub>A</sub> = 25°C                         |     |     | 1255 <sup>(1)</sup> | mW   |
| T <sub>S</sub> Maximum ambient safety temperature     |                                                                                                    |     |     | 150                 | °C   |

(1) Input, output, or the sum of input and output power should not exceed this value

The safety-limiting constraint is the maximum junction temperature specified in the data sheet. The power dissipation and junction-to-air thermal impedance of the device installed in the application hardware determines the junction temperature. The assumed junction-to-air thermal resistance in the [节 7.4](#) table is that of a device installed on a high-K test board for leaded surface-mount packages. The power is the recommended maximum input voltage times the current. The junction temperature is then the ambient temperature plus the power times the junction-to-air thermal resistance.

## 7.9 Electrical Characteristics

Over recommended operating conditions unless otherwise noted. All typical values are at  $T_A = 25^\circ\text{C}$ ,  $V_{CC1} = 5\text{ V}$ ,  $V_{CC2} - \text{GND2} = 15\text{ V}$ ,  $\text{GND2} - V_{EE2} = 8\text{ V}$

| PARAMETER                        |                                                                                       | TEST CONDITIONS                                                                                                                         | MIN                  | TYP                   | MAX                  | UNIT          |
|----------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------|----------------------|---------------|
| <b>VOLTAGE SUPPLY</b>            |                                                                                       |                                                                                                                                         |                      |                       |                      |               |
| $V_{IT+}(\text{UVLO1})$          | Positive-going UVLO1 threshold voltage input side ( $V_{CC1} - \text{GND1}$ )         |                                                                                                                                         |                      |                       | 2.25                 | V             |
| $V_{IT-}(\text{UVLO1})$          | Negative-going UVLO1 threshold voltage input side ( $V_{CC1} - \text{GND1}$ )         |                                                                                                                                         | 1.7                  |                       |                      | V             |
| $V_{HYS}(\text{UVLO1})$          | UVLO1 Hysteresis voltage ( $V_{IT+} - V_{IT-}$ ) input side                           |                                                                                                                                         |                      | 0.24                  |                      | V             |
| $V_{IT+}(\text{UVLO2})$          | Positive-going UVLO2 threshold voltage output side ( $V_{CC2} - \text{GND2}$ )        |                                                                                                                                         |                      | 12                    | 13                   | V             |
| $V_{IT-}(\text{UVLO2})$          | Negative-going UVLO2 threshold voltage output side ( $V_{CC2} - \text{GND2}$ )        |                                                                                                                                         | 9.5                  | 11                    |                      | V             |
| $V_{HYS}(\text{UVLO2})$          | UVLO2 Hysteresis voltage ( $V_{IT+} - V_{IT-}$ ) output side                          |                                                                                                                                         |                      | 1                     |                      | V             |
| $I_{Q1}$                         | Input supply quiescent current                                                        |                                                                                                                                         |                      | 2.8                   | 4.5                  | mA            |
| $I_{Q2}$                         | Output supply quiescent current                                                       |                                                                                                                                         |                      | 3.6                   | 6                    | mA            |
| <b>LOGIC I/O</b>                 |                                                                                       |                                                                                                                                         |                      |                       |                      |               |
| $V_{IT+}(\text{IN}, \text{RST})$ | Positive-going input threshold voltage ( $\text{IN}+$ , $\text{IN}-$ , $\text{RST}$ ) |                                                                                                                                         |                      |                       | $0.7 \times V_{CC1}$ | V             |
| $V_{IT-}(\text{IN}, \text{RST})$ | Negative-going input threshold voltage ( $\text{IN}+$ , $\text{IN}-$ , $\text{RST}$ ) |                                                                                                                                         | $0.3 \times V_{CC1}$ |                       |                      | V             |
| $V_{HYS}(\text{IN}, \text{RST})$ | Input hysteresis voltage ( $\text{IN}+$ , $\text{IN}-$ , $\text{RST}$ )               |                                                                                                                                         |                      | $0.15 \times V_{CC1}$ |                      | V             |
| $I_{IH}$                         | High-level input leakage at ( $\text{IN}+$ )                                          | $\text{IN}+ = V_{CC1}$                                                                                                                  |                      | 100                   |                      | $\mu\text{A}$ |
| $I_{IL}$                         | Low-level input leakage at ( $\text{IN}-$ , $\text{RST}$ )                            | $\text{IN}- = \text{GND1}$ , $\text{RST} = \text{GND1}$                                                                                 |                      | - 100                 |                      | $\mu\text{A}$ |
| $I_{PU}$                         | Pull-up current of FLT, RDY                                                           | $V_{(\text{RDY})} = \text{GND1}$ , $V_{(\text{FLT})} = \text{GND1}$                                                                     |                      | 100                   |                      | $\mu\text{A}$ |
| $V_{OL}$                         | Low-level output voltage at FLT, RDY                                                  | $I_{(\text{FLT})} = 5\text{ mA}$                                                                                                        |                      |                       | 0.2                  | V             |
| <b>GATE DRIVER STAGE</b>         |                                                                                       |                                                                                                                                         |                      |                       |                      |               |
| $V_{(\text{OUTPD})}$             | Active output pulldown voltage                                                        | $I_{\text{OUT}} = 200\text{ mA}$ , $V_{CC2} = \text{open}$                                                                              |                      |                       | 2                    | V             |
| $V_{(\text{OUTH})}$              | High-level output voltage                                                             | $I_{\text{OUT}} = - 20\text{ mA}$                                                                                                       | $V_{CC2} - 0.5$      | $V_{CC2} - 0.24$      |                      | V             |
| $V_{(\text{OUTL})}$              | Low-level output voltage                                                              | $I_{\text{OUT}} = 20\text{ mA}$                                                                                                         |                      | $V_{EE2} + 13$        | $V_{EE2} + 50$       | mV            |
| $I_{(\text{OUTH})}$              | High-level output peak current                                                        | $\text{IN}+ = \text{high}$ , $\text{IN}- = \text{low}$ , $V_{\text{OUT}} = V_{CC2} - 15\text{ V}$                                       | 1.5                  | 2.5                   |                      | A             |
| $I_{(\text{OUTL})}$              | Low-level output peak current                                                         | $\text{IN}+ = \text{low}$ , $\text{IN}- = \text{high}$ , $V_{\text{OUT}} = V_{EE2} + 15\text{ V}$                                       | 3.4                  | 5                     |                      | A             |
| <b>ACTIVE MILLER CLAMP</b>       |                                                                                       |                                                                                                                                         |                      |                       |                      |               |
| $V_{(\text{CLP})}$               | Low-level clamp voltage                                                               | $I_{(\text{CLP})} = 20\text{ mA}$                                                                                                       |                      | $V_{EE2} + 0.015$     | $V_{EE2} + 0.08$     | V             |
| $I_{(\text{CLP})}$               | Low-level clamp current                                                               | $V_{(\text{CLAMP})} = V_{EE2} + 2.5\text{ V}$                                                                                           | 1.6                  | 2.5                   |                      | A             |
| $V_{(\text{CLTH})}$              | Clamp threshold voltage                                                               |                                                                                                                                         | 1.6                  | 2.1                   | 2.5                  | V             |
| <b>SHORT CIRCUIT CLAMPING</b>    |                                                                                       |                                                                                                                                         |                      |                       |                      |               |
| $V_{(\text{CLP\_OUT})}$          | Clamping voltage ( $V_{\text{OUT}} - V_{CC2}$ )                                       | $\text{IN}+ = \text{high}$ , $\text{IN}- = \text{low}$ , $t_{\text{CLP}} = 10\text{ }\mu\text{s}$ , $I_{(\text{OUTH})} = 500\text{ mA}$ |                      | 0.8                   | 1.3                  | V             |
| $V_{(\text{CLP\_CLAMP})}$        | Clamping voltage ( $V_{\text{CLP}} - V_{CC2}$ )                                       | $\text{IN}+ = \text{high}$ , $\text{IN}- = \text{low}$ , $t_{\text{CLP}} = 10\text{ }\mu\text{s}$ , $I_{(\text{CLP})} = 500\text{ mA}$  |                      | 1.3                   |                      | V             |
| $V_{(\text{CLP\_CLAMP})}$        | Clamping voltage at CLAMP                                                             | $\text{IN}+ = \text{High}$ , $\text{IN}- = \text{Low}$ , $I_{(\text{CLP})} = 20\text{ mA}$                                              |                      | 0.7                   | 1.1                  | V             |
| <b>DESAT PROTECTION</b>          |                                                                                       |                                                                                                                                         |                      |                       |                      |               |
| $I_{(\text{CHG})}$               | Blanking capacitor charge current                                                     | $V_{(\text{DESAT})} - \text{GND2} = 2\text{ V}$                                                                                         | 0.42                 | 0.5                   | 0.58                 | mA            |
| $I_{(\text{DCHG})}$              | Blanking capacitor discharge current                                                  | $V_{(\text{DESAT})} - \text{GND2} = 6\text{ V}$                                                                                         | 9                    | 14                    |                      | mA            |
| $V_{(\text{DSTH})}$              | DESAT threshold voltage with respect to GND2                                          |                                                                                                                                         | 8.3                  | 9                     | 9.5                  | V             |
| $V_{(\text{DSL})}$               | DESAT voltage with respect to GND2, when OUT is driven low                            |                                                                                                                                         | 0.4                  |                       | 1                    | V             |

## 7.10 Switching Characteristics

Over recommended operating conditions unless otherwise noted. All typical values are at  $T_A = 25^\circ\text{C}$ ,  $V_{CC1} = 5\text{ V}$ ,  $V_{CC2} - \text{GND2} = 15\text{ V}$ ,  $\text{GND2} - V_{EE2} = 8\text{ V}$

| PARAMETER                        |                                                                                | TEST CONDITIONS                                                                              | MIN | TYP  | MAX               | UNIT              |
|----------------------------------|--------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-----|------|-------------------|-------------------|
| $t_r$                            | Output signal rise time                                                        | $C_{\text{LOAD}} = 1\text{ nF}$ , see 图 8-1, 图 8-2, and 图 8-3                                | 12  | 20   | 35                | ns                |
| $t_f$                            | Output signal fall time                                                        |                                                                                              | 12  | 20   | 37                | ns                |
| $t_{\text{PLH}}, t_{\text{PHL}}$ | Propagation Delay                                                              |                                                                                              |     | 76   | 110               | ns                |
| $t_{\text{sk-p}}$                | Pulse Skew $ t_{\text{PHL}} - t_{\text{PLH}} $                                 |                                                                                              |     |      | 20                | ns                |
| $t_{\text{sk-pp}}$               | Part-to-part skew                                                              |                                                                                              |     |      | 30 <sup>(1)</sup> | ns                |
| $t_{\text{GF}}$                  | Glitch filter on $\text{IN}^+$ , $\text{IN}^-$ , $\overline{\text{RST}}$       |                                                                                              | 20  | 30   | 40                | ns                |
| $t_{\text{DESAT}} (10\%)$        | DESAT sense to 10% OUT delay                                                   |                                                                                              | 300 | 415  | 500               | ns                |
| $t_{\text{DESAT}} (\text{GF})$   | DESAT glitch filter delay                                                      |                                                                                              |     | 330  |                   | ns                |
| $t_{\text{DESAT}} (\text{FLT})$  | DESAT sense to $\overline{\text{FLT}}$ -low delay                              | see 图 8-3                                                                                    |     | 2000 | 2420              | ns                |
| $t_{\text{LEB}}$                 | Leading edge blanking time                                                     | see 图 8-1 and 图 8-2                                                                          | 330 | 400  | 500               | ns                |
| $t_{\text{GF}}(\text{RSTFLT})$   | Glitch filter on $\overline{\text{RST}}$ for resetting $\overline{\text{FLT}}$ |                                                                                              | 300 |      | 800               | ns                |
| $C_i$                            | Input capacitance <sup>(2)</sup>                                               | $V_i = V_{CC1} / 2 + 0.4 \times \sin(2\pi ft)$ , $f = 1\text{ MHz}$ , $V_{CC1} = 5\text{ V}$ |     | 2    |                   | pF                |
| CMTI                             | Common-mode transient immunity                                                 | $V_{\text{CM}} = 1500\text{ V}$ , see 图 8-4                                                  | 100 | 120  |                   | kV/ $\mu\text{s}$ |

- (1) Measured at same supply voltage and temperature condition  
(2) Measured from input pin to ground.

## 7.11 Insulation Characteristics Curves

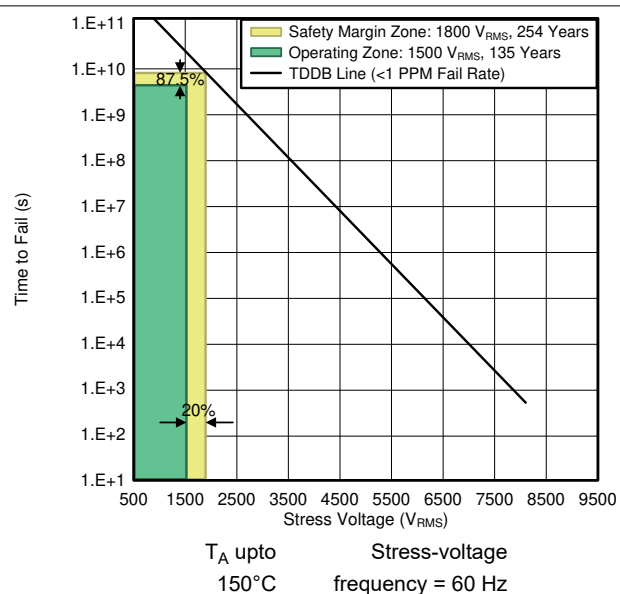


图 7-1. Reinforced High-Voltage Capacitor Life Time Projection

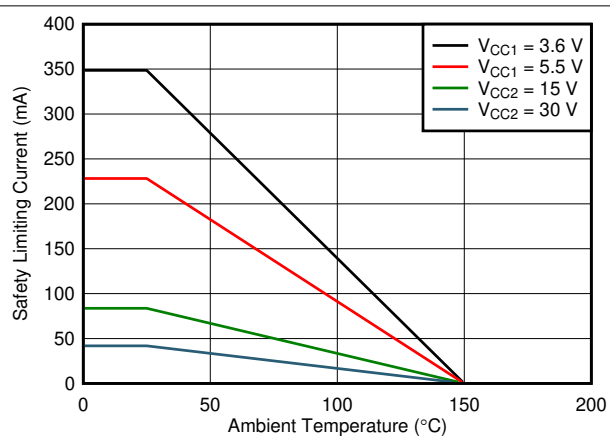


图 7-2. Thermal Derating Curve for Limiting Current per VDE

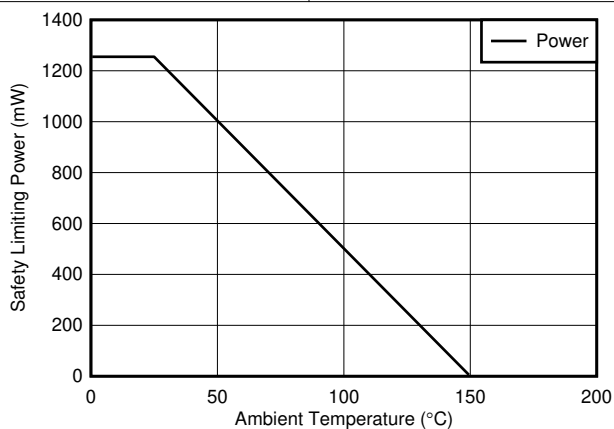


图 7-3. Thermal Derating Curve for Limiting Power per VDE

## 7.12 Typical Characteristics

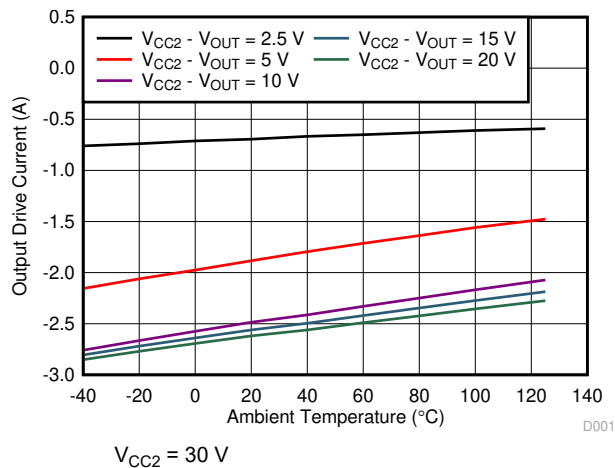


图 7-4. Output High Drive Current vs Temperature

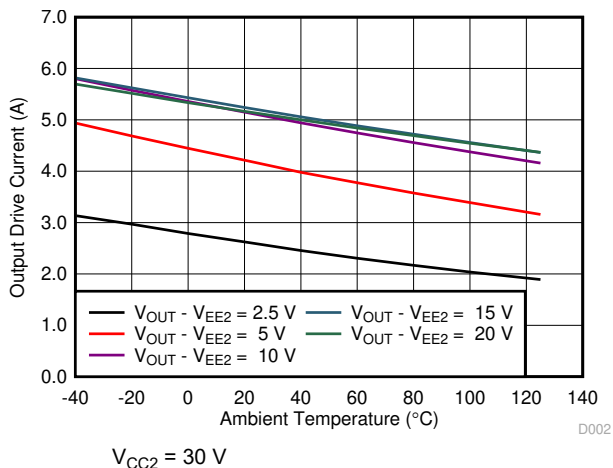


图 7-5. Output Low Drive Current vs Temperature

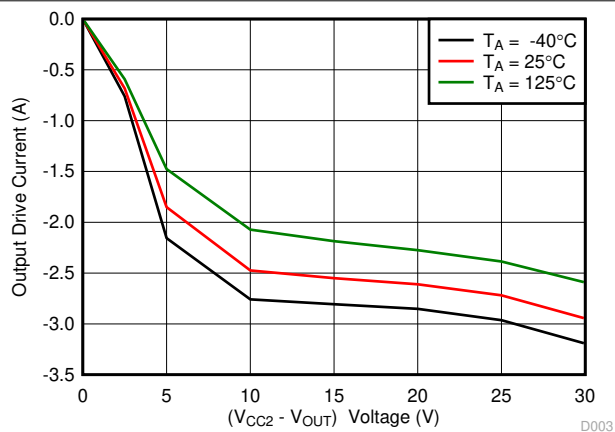


图 7-6. Output High Drive Current vs Output Voltage


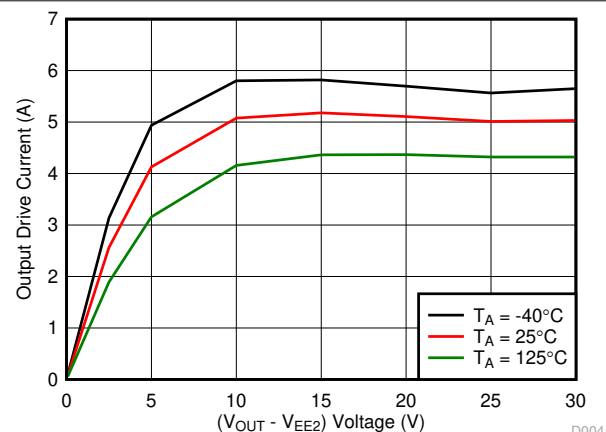



图 7-7. Output Low Drive Current vs Output Voltage

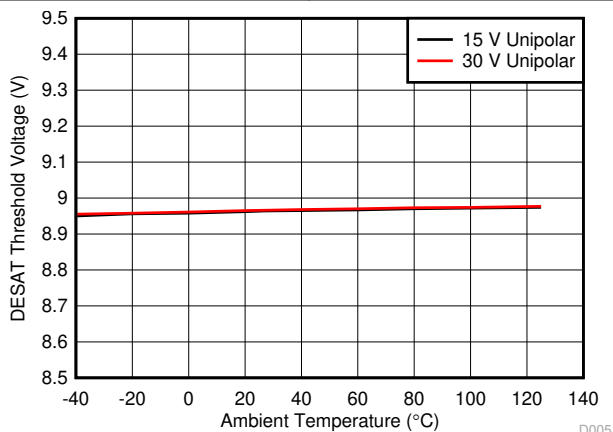

Unipolar:  $V_{CC2} - V_{EE2} = V_{CC2} - \text{GND2}$


图 7-8. DESAT Threshold Voltage vs Temperature

## 7.12 Typical Characteristics (continued)

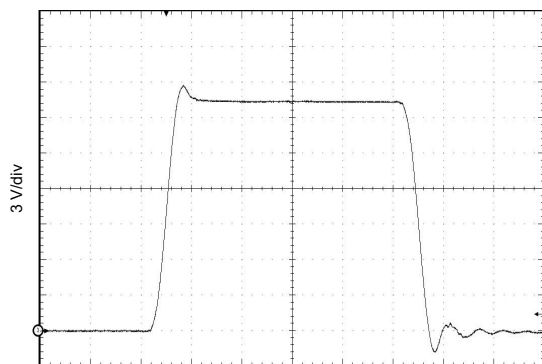


Time - 50 ns/div  
 $C_L = 1 \text{ nF}$      $R_G = 0 \ \Omega$   
 $V_{CC2} - V_{EE2} = V_{CC2} - GND2 = 20 \text{ V}$

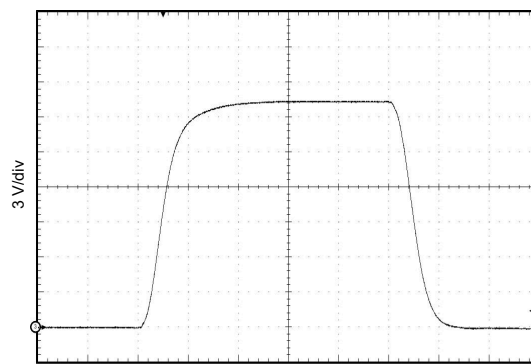图 7-9. OUT Transient Waveform




Time - 50 ns/div  
 $C_L = 1 \text{ nF}$      $R_G = 10 \ \Omega$   
 $V_{CC2} - V_{EE2} = V_{CC2} - GND2 = 20 \text{ V}$

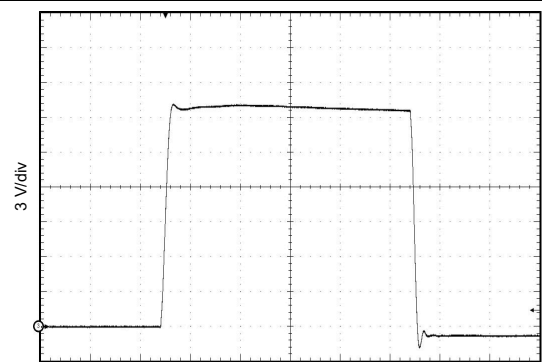图 7-10. OUT Transient Waveform




Time - 500 ns/div  
 $C_L = 10 \text{ nF}$      $R_G = 0 \ \Omega$   
 $V_{CC2} - V_{EE2} = V_{CC2} - GND2 = 20 \text{ V}$

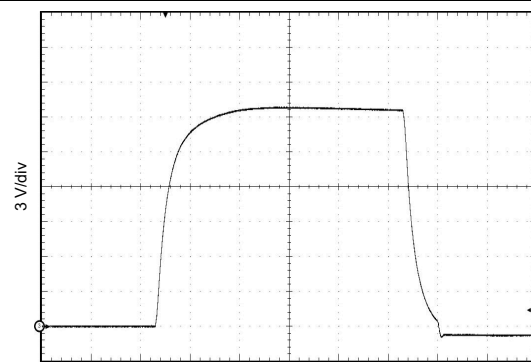图 7-11. OUT Transient Waveform




Time - 500 ns/div  
 $C_L = 10 \text{ nF}$      $R_G = 10 \ \Omega$   
 $V_{CC2} - V_{EE2} = V_{CC2} - GND2 = 20 \text{ V}$

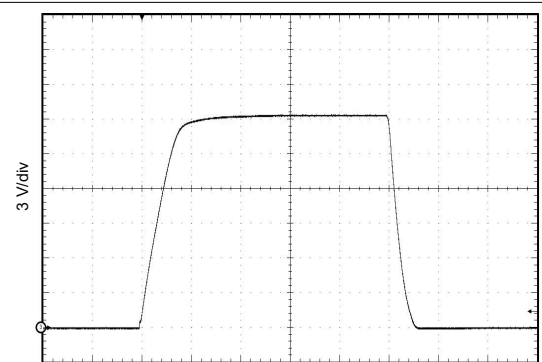图 7-12. OUT Transient Waveform



Time - 1 μs/div  
 $C_L = 100 \text{ nF}$      $R_G = 0 \ \Omega$   
 $V_{CC2} - V_{EE2} = V_{CC2} - GND2 = 20 \text{ V}$

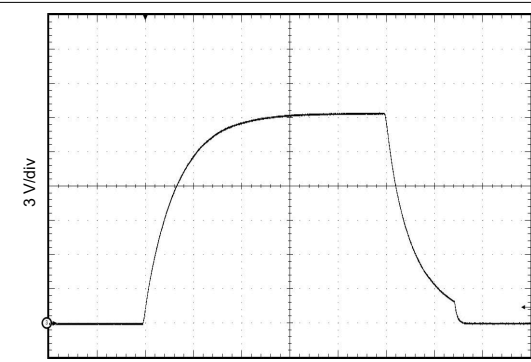
图 7-13. OUT Transient Waveform



Time - 2 μs/div  
 $C_L = 100 \text{ nF}$      $R_G = 10 \ \Omega$   
 $V_{CC2} - V_{EE2} = V_{CC2} - GND2 = 20 \text{ V}$

图 7-14. OUT Transient Waveform

## 7.12 Typical Characteristics (continued)

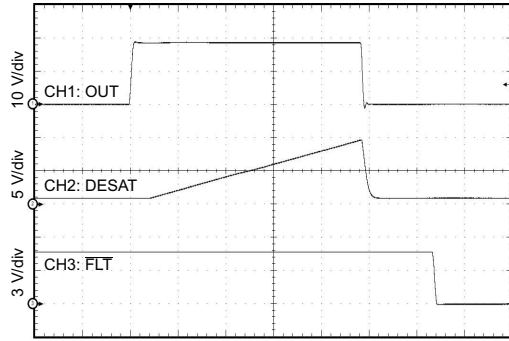

Time - 1  $\mu$ s/div  
 $C_L = 100$  nF  $R_G = 10$   $\Omega$   
 $V_{CC2} - V_{EE2} = V_{CC2} - GND2 = 20$  V

图 7-15. OUT Transient Waveform DESAT and FLT

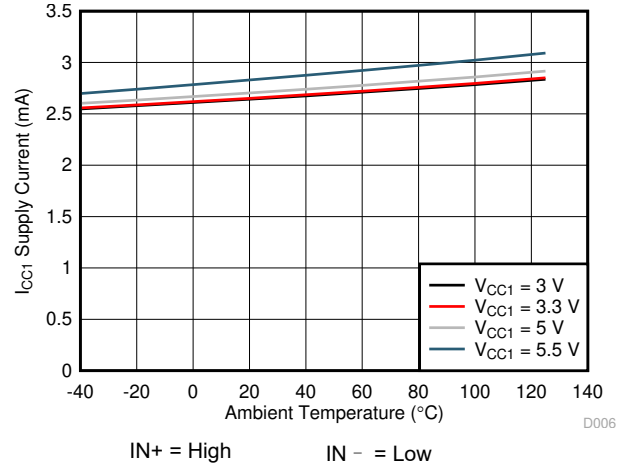


图 7-16.  $I_{CC1}$  Supply Current vs Temperature

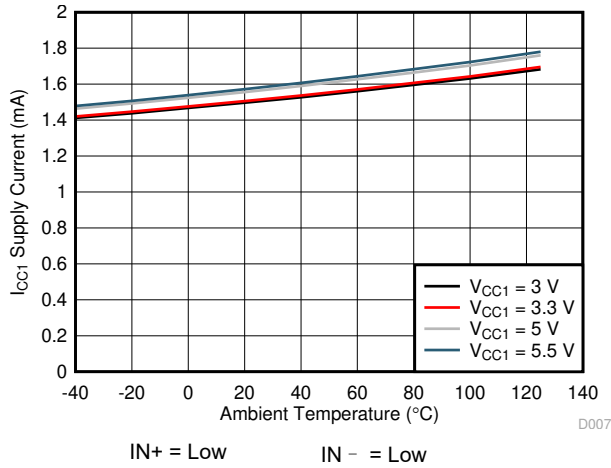


图 7-17.  $I_{CC1}$  Supply Current vs Temperature

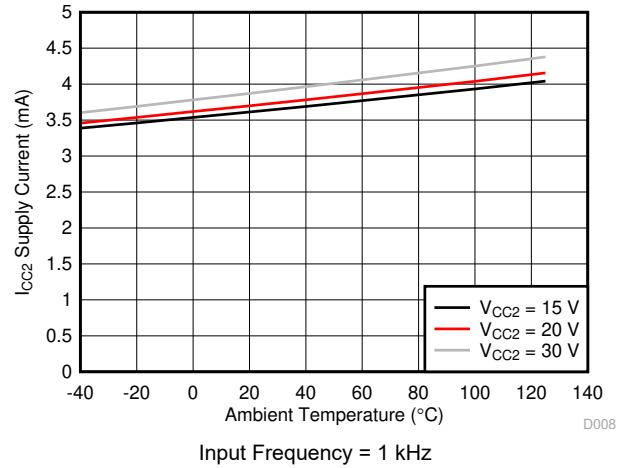


图 7-18.  $I_{CC2}$  Supply Current vs Temperature

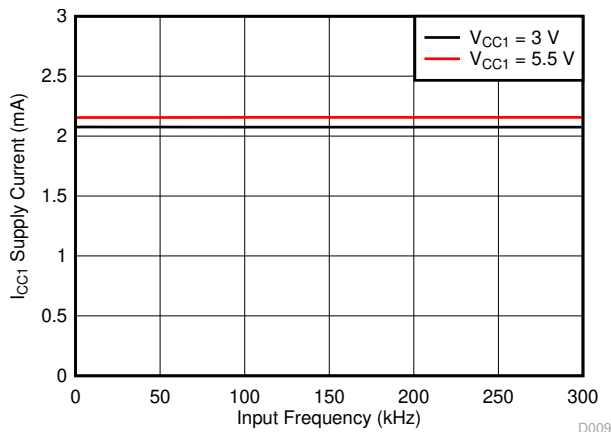


图 7-19.  $I_{CC1}$  Supply Current vs Input Frequency

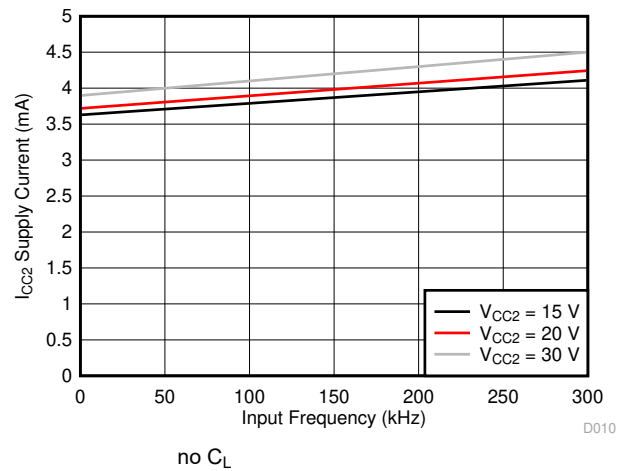


图 7-20.  $I_{CC2}$  Supply Current vs Input Frequency

## 7.12 Typical Characteristics (continued)


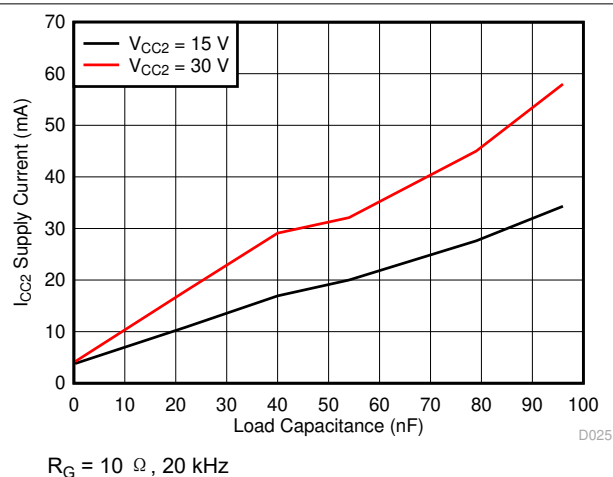
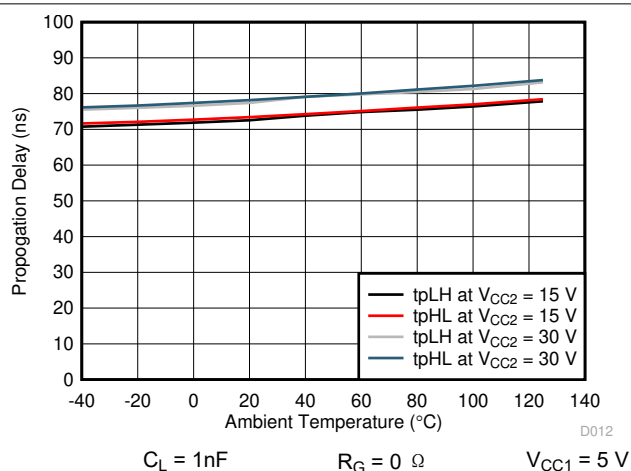
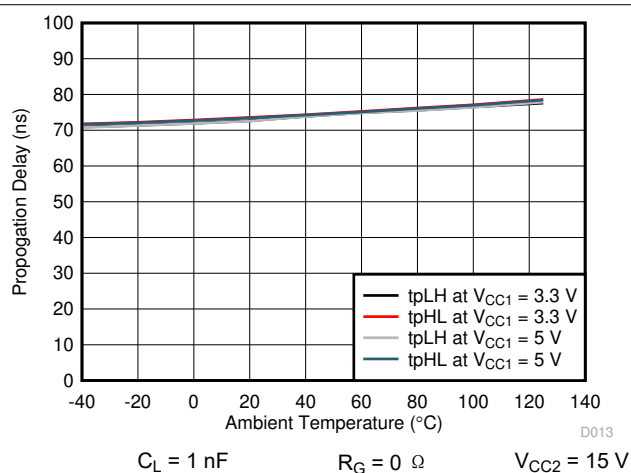
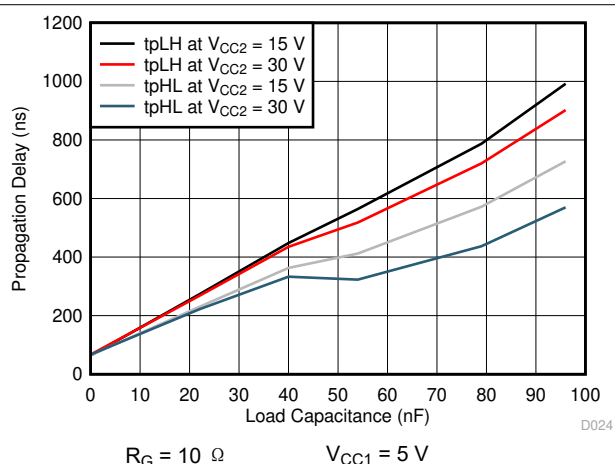
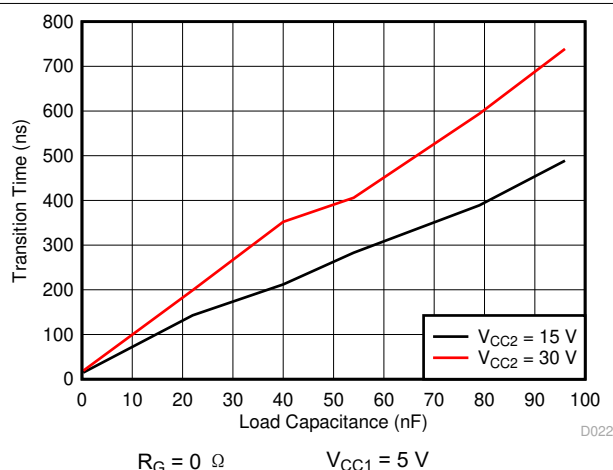
图 7-21.  $I_{CC2}$  Supply Current vs Load Capacitance图 7-22.  $V_{CC1}$  Propagation Delay vs Temperature图 7-23.  $V_{CC2}$  Propagation Delay vs Temperature

图 7-24. Propagation Delay vs Load Capacitance

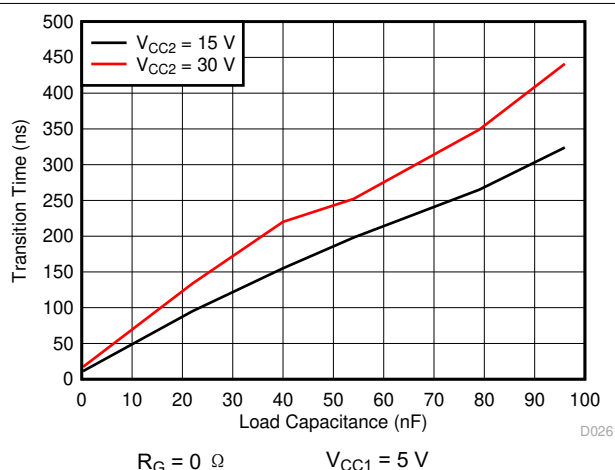图 7-25.  $t_r$  Rise Time vs Load Capacitance图 7-26.  $t_f$  Fall Time v. Load Capacitance



## 7.12 Typical Characteristics (continued)

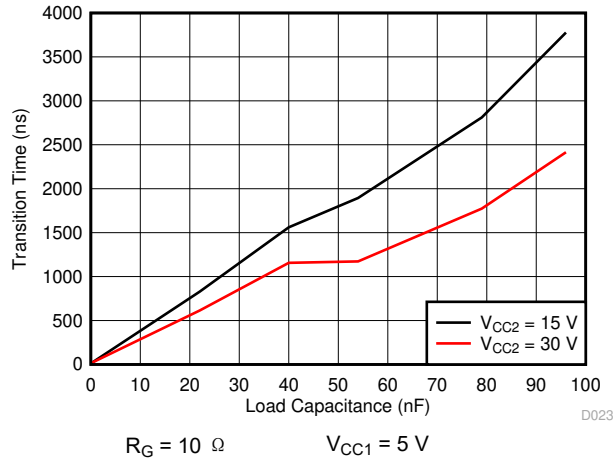


图 7-27.  $t_r$  Rise Time vs Load Capacitance

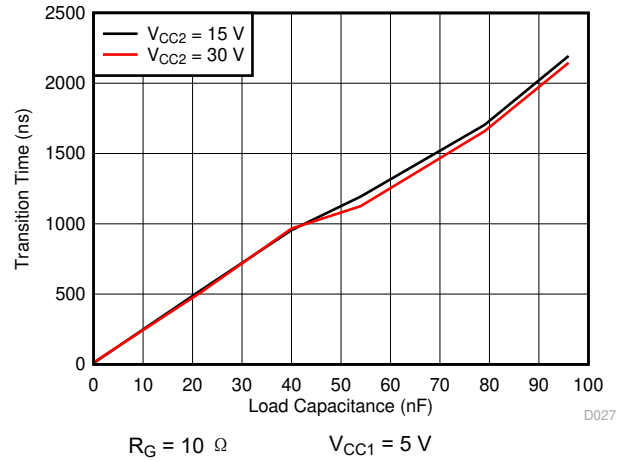


图 7-28.  $t_f$  Fall Time vs Load Capacitance

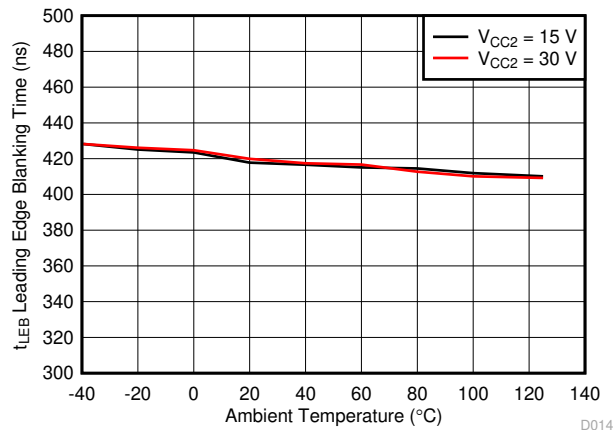


图 7-29. Leading Edge Blanking Time With Temperature

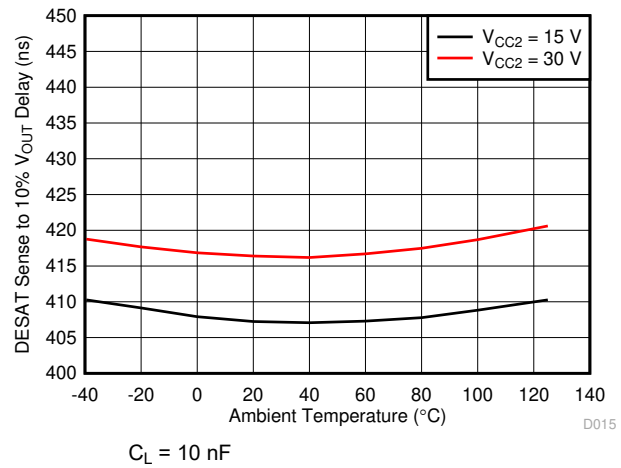


图 7-30. DESAT Sense to  $V_{OUT}$  10% Delay vs Temperature

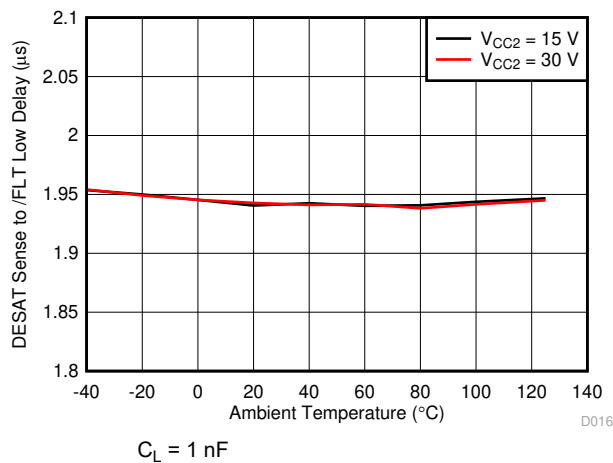


图 7-31. DESAT Sense to  $\overline{FLT}$  Low Delay vs Temperature

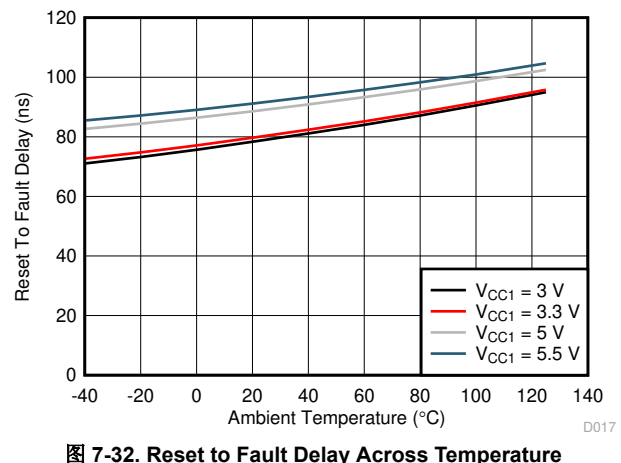


图 7-32. Reset to Fault Delay Across Temperature

## 7.12 Typical Characteristics (continued)

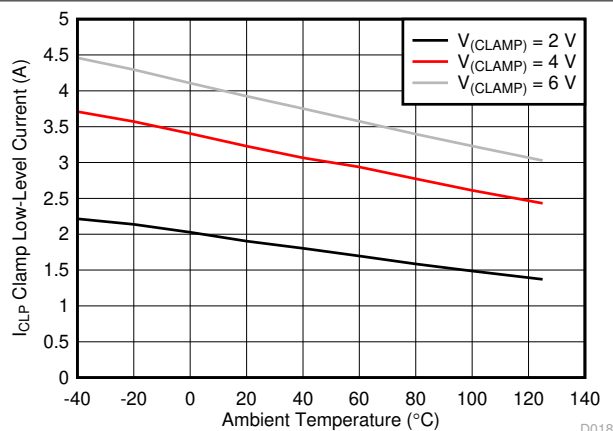


图 7-33. Miller Clamp Current vs Temperature

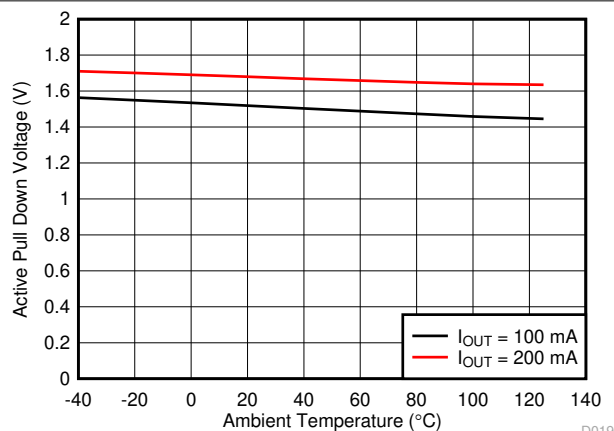
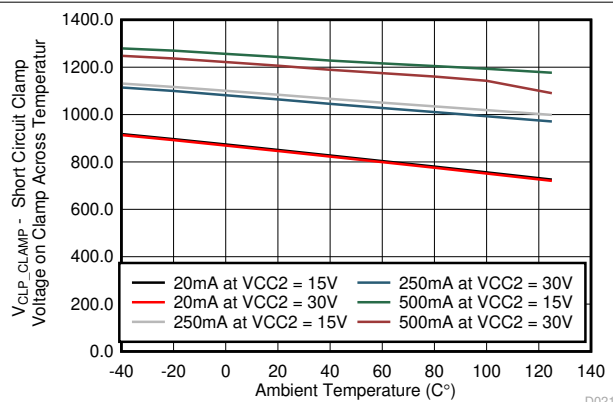
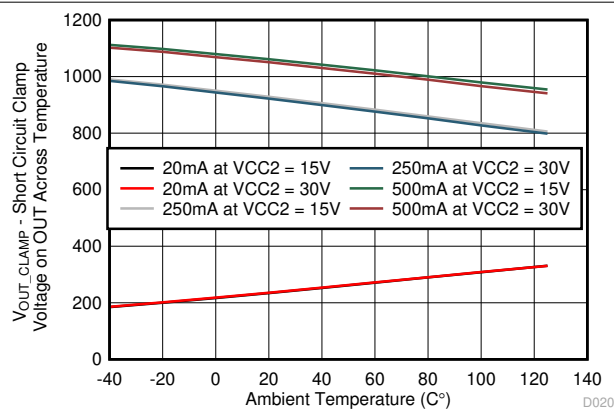
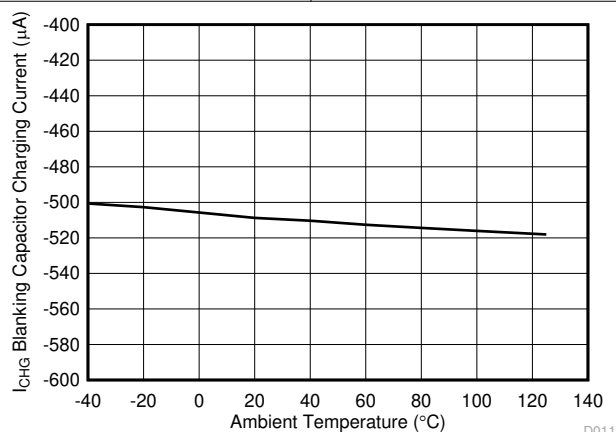


图 7-34. Active Pulldown Voltage vs Temperature

图 7-35.  $V_{CLP\_CLAMP}$  - Short Circuit Clamp Voltage on Clamp Across Temperature图 7-36.  $V_{OUT\_CLAMP}$  - Short Circuit Clamp Voltage on OUT Across Temperature $V_{CC2} = 15V$ 

DESAT = 6 V

图 7-37. Blanking Capacitor Charging Current vs Temperature

## 8 Parameter Measurement Information

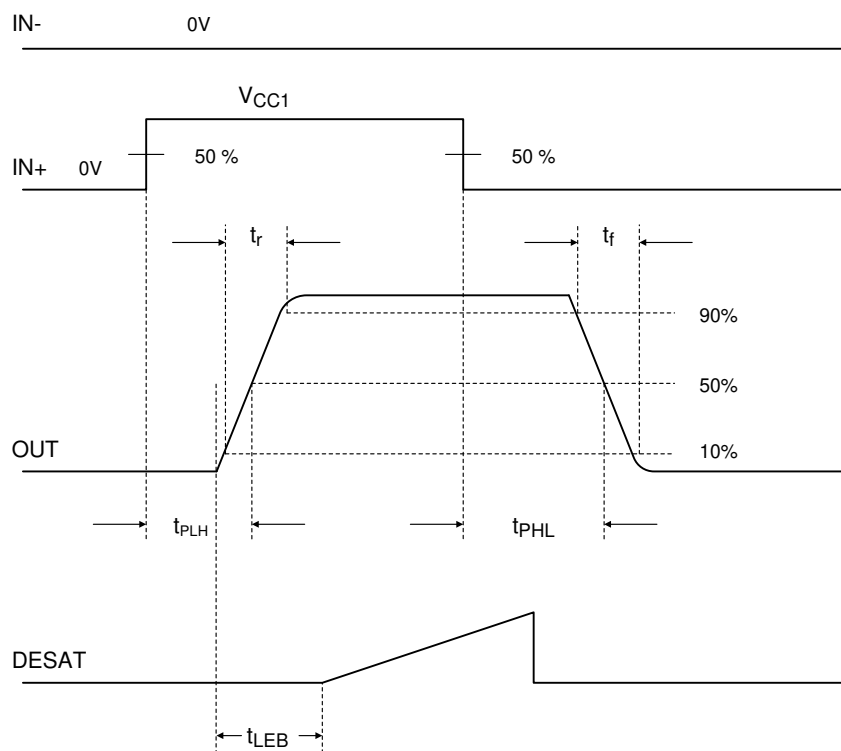


图 8-1. OUT Propagation Delay, Non-Inverting Configuration

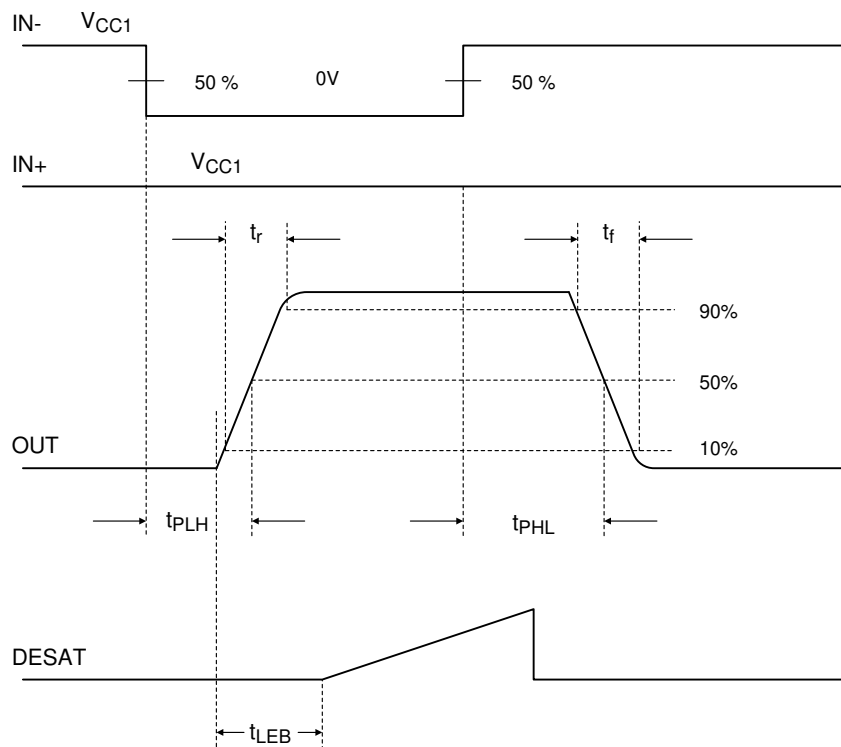
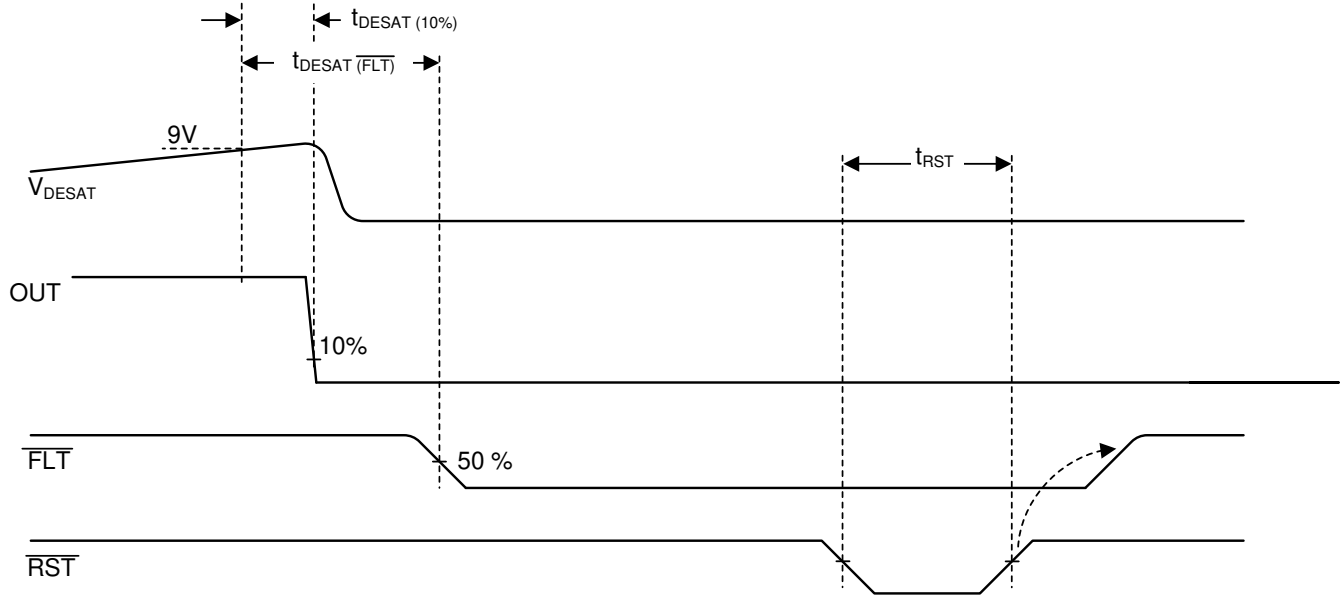
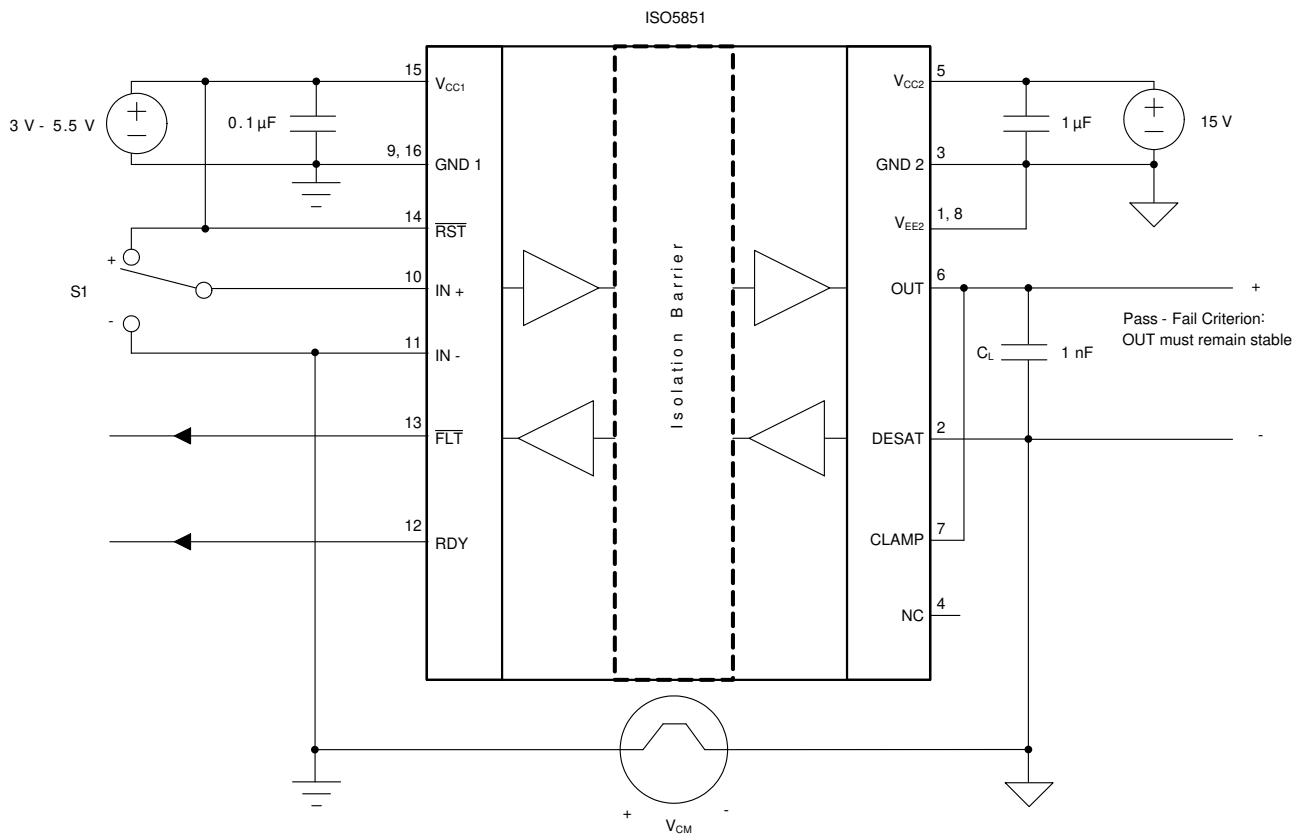


图 8-2. OUT Propagation Delay, Inverting Configuration

图 8-3. DESAT, OUT,  $\overline{FLT}$ ,  $\overline{RST}$  Delay

Copyright © 2016, Texas Instruments Incorporated

图 8-4. Common-Mode Transient Immunity Test Circuit


## 9 Detailed Description
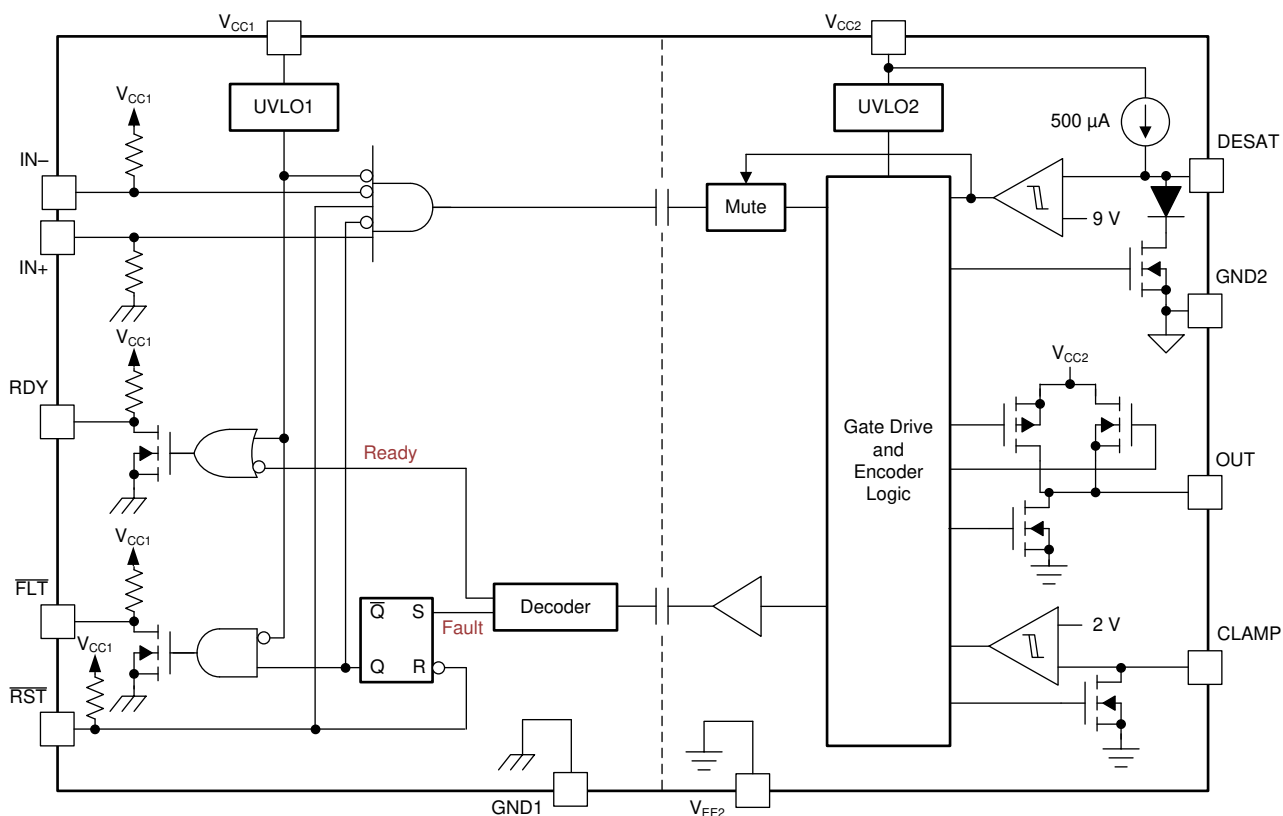
### 9.1 Overview

The ISO5851 is an isolated gate driver for IGBTs and MOSFETs. Input CMOS logic and output power stage are separated by a capacitive, silicon dioxide (SiO<sub>2</sub>), isolation barrier.

The IO circuitry on the input side interfaces with a micro controller and consists of gate drive control and RESET (RST) inputs, READY (RDY) and FAULT (FLT) alarm outputs. The power stage consists of power transistors to supply 2.5-A pullup and 5-A pulldown currents to drive the capacitive load of the external power transistors, as well as DESAT detection circuitry to monitor IGBT collector-emitter overvoltage under short circuit events. The capacitive isolation core consists of transmit circuitry to couple signals across the capacitive isolation barrier, and receive circuitry to convert the resulting low-swing signals into CMOS levels. The ISO5851 also contains under voltage lockout circuitry to prevent insufficient gate drive to the external IGBT, and active output pulldown feature which ensures that the gate-driver output is held low, if the output supply voltage is absent. The ISO5851 also has an active Miller clamp function which can be used to prevent parasitic turn-on of the external power transistor, due to Miller effect, for unipolar supply operation.

### 9.2 Functional Block Diagram



Copyright © 2016, Texas Instruments Incorporated

## 9.3 Feature Description

### 9.3.1 Supply and Active Miller Clamp

The ISO5851 supports both bipolar and unipolar power supply with active Miller clamp.

For operation with bipolar supplies, the IGBT is turned off with a negative voltage on its gate with respect to its emitter. This prevents the IGBT from unintentionally turning on because of current induced from its collector to its gate due to Miller effect. In this condition it is not necessary to connect CLAMP output of the gate driver to the IGBT gate, but connecting CLAMP output of the gate driver to the IGBT gate is also not an issue. Typical values of  $V_{CC2}$  and  $V_{EE2}$  for bipolar operation are 15 V and  $-8$  V with respect to GND2.

For operation with unipolar supply, typically,  $V_{CC2}$  is connected to 15-V with respect to GND2, and  $V_{EE2}$  is connected to GND2. In this use case, the IGBT can turn-on due to additional charge from IGBT Miller capacitance caused by a high voltage slew rate transition on the IGBT collector. To prevent IGBT to turn on, the CLAMP pin is connected to IGBT gate and Miller current is sunk through a low impedance CLAMP transistor.

Miller CLAMP is designed for Miller current up to 2 A. When the IGBT is turned-off and the gate voltage transitions below 2 V the CLAMP current output is activated.

### 9.3.2 Active Output Pulldown

The active output pulldown feature ensures that the IGBT gate OUT is clamped to  $V_{EE2}$  to ensure safe IGBT off-state when the output side is not connected to the power supply.

### 9.3.3 Undervoltage Lockout (UVLO) With Ready (RDY) Pin Indication Output

Undervoltage lockout (UVLO) ensures correct switching of IGBT. The IGBT is turned-off, if the supply  $V_{CC1}$  drops below  $V_{IT-(UVLO1)}$ , irrespective of IN+, IN – and RST input till  $V_{CC1}$  goes above  $V_{IT+(UVLO1)}$ .

In similar manner, the IGBT is turned-off, if the supply  $V_{CC2}$  drops below  $V_{IT-(UVLO2)}$ , irrespective of IN+, IN – and RST input till  $V_{CC2}$  goes above  $V_{IT+(UVLO2)}$ .

Ready (RDY) pin indicates status of input and output side Under Voltage Lock-Out (UVLO) internal protection feature. If either side of device have insufficient supply ( $V_{CC1}$  or  $V_{CC2}$ ), the RDY pin output goes low; otherwise, RDY pin output is high. RDY pin also serves as an indication to the micro-controller that the device is ready for operation.

### 9.3.4 Fault ( $\overline{FLT}$ ) and Reset ( $\overline{RST}$ )

During IGBT overload condition, to report desaturation error  $\overline{FLT}$  goes low. If  $\overline{RST}$  is held low for the specified duration,  $\overline{FLT}$  is cleared at rising edge of  $\overline{RST}$ .  $\overline{RST}$  has an internal filter to reject noise and glitches. By asserting  $\overline{RST}$  for at-least the specified minimum duration, device input logic can be enabled or disabled.

### 9.3.5 Short Circuit Clamp

Under short circuit events it is possible that currents are induced back into the gate-driver OUT and CLAMP pins due to parasitic Miller capacitance between the IGBT collector and gate terminals. Internal protection diodes on OUT and CLAMP help to sink these currents while clamping the voltages on these pins to values slightly higher than the output side supply.

## 9.4 Device Functional Modes

表 9-1 lists the functional modes for the ISO5851 device.

In ISO5851 OUT to follow IN+ in normal functional mode,  $\overline{\text{FLT}}$  must be in high state.

**表 9-1. Function Table<sup>(1)</sup>**

| V <sub>CC1</sub> | V <sub>CC2</sub> | IN+  | IN - | RST  | RDY  | OUT  |
|------------------|------------------|------|------|------|------|------|
| PU               | PD               | X    | X    | X    | Low  | Low  |
| PD               | PU               | X    | X    | X    | Low  | Low  |
| PU               | PU               | X    | X    | Low  | High | Low  |
| PU               | Open             | X    | X    | X    | Low  | Low  |
| PU               | PU               | Low  | X    | X    | High | Low  |
| PU               | PU               | X    | High | X    | High | Low  |
| PU               | PU               | High | Low  | High | High | High |

(1) PU: Power Up (V<sub>CC1</sub> ≥ 2.25-V, V<sub>CC2</sub> ≥ 13-V), PD: Power Down (V<sub>CC1</sub> ≤ 1.7-V, V<sub>CC2</sub> ≤ 9.5-V), X: Irrelevant

## 10 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 10.1 Application Information

The ISO5851 is an isolated gate driver for power semiconductor devices such as IGBTs and MOSFETs. It is intended for use in applications such as motor control, industrial inverters and switched mode power supplies. In these applications, sophisticated PWM control signals are required to turn the power devices on and off, which at the system level eventually may determine, for example, the speed, position, and torque of the motor or the output voltage, frequency and phase of the inverter. These control signals are usually the outputs of a micro controller, and are at low voltage levels such as 3.3 V or 5 V. The gate controls required by the MOSFETs and IGBTs, on the other hand, are in the range of 30 V (using a unipolar output supply) to 15 V (using bipolar output supply), and need high current capability to be able to drive the large capacitive loads offered by those power transistors. Not only that, the gate drive needs to be applied with reference to the Emitter of the IGBT (Source for MOSFET), and by construction, the emitter node in a gate drive system may swing between 0 to the DC bus voltage, that can be several hundreds of volts in magnitude.

The ISO5851 is thus used to level shift the incoming 3.3-V and 5-V control signals from the microcontroller to the 30 V (using a unipolar output supply) to 15 V (using bipolar output supply) drive required by the power transistors while ensuring high-voltage isolation between the driver side and the microcontroller side.

### 10.2 Typical Applications

图 10-1 shows the typical application of a three-phase inverter using six ISO5851 isolated gate drivers. Three-phase inverters are used for variable-frequency drives to control the operating speed and torque of AC motors and for high power applications such as high-voltage DC (HVDC) power transmission.

The basic three-phase inverter consists of six power switches, and each switch is driven by one ISO5851. The switches are driven on and off at high switching frequency with specific patterns that to converter dc bus voltage to three-phase AC voltages.



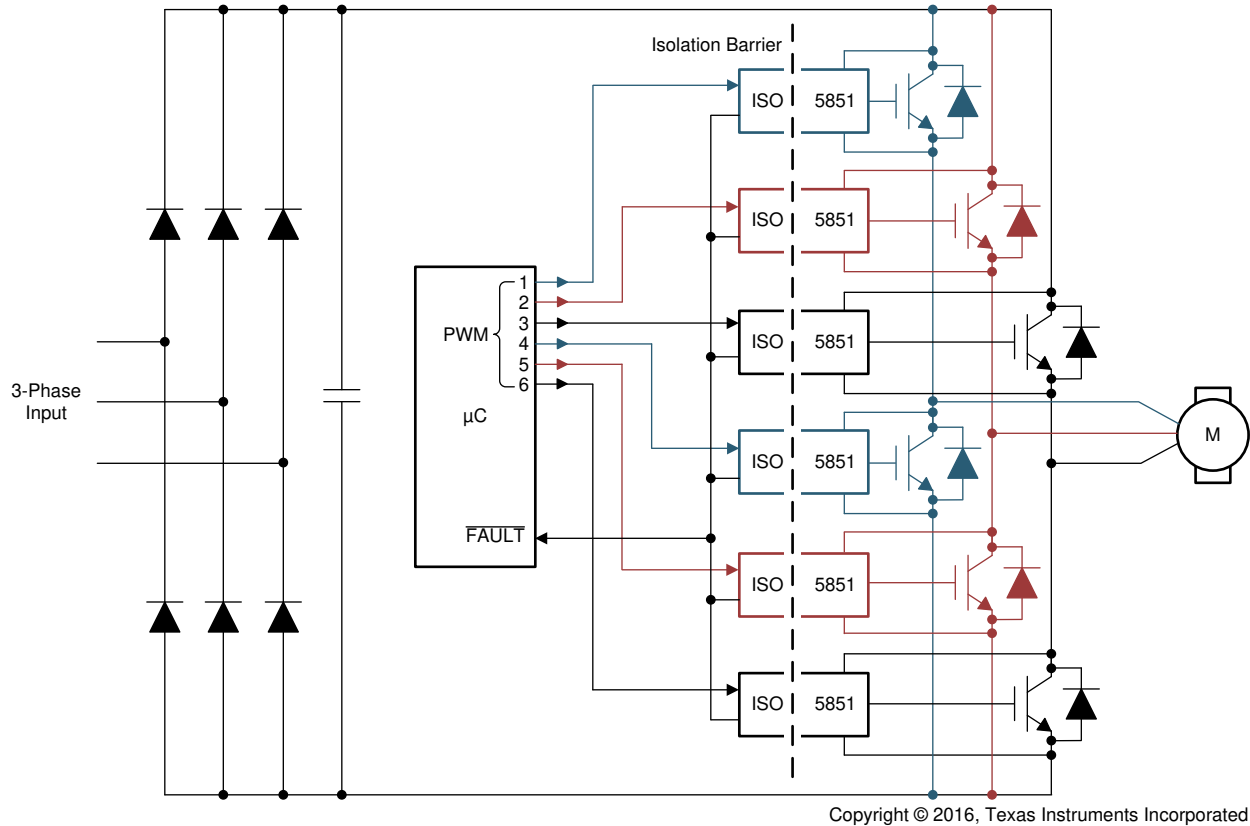


图 10-1. Typical Motor Drive Application

### 10.2.1 Design Requirements

Unlike optocoupler based gate drivers which need external current drivers and biasing circuitry to provide the input control signals, the input control to the ISO5851 is CMOS and can be directly driven by the microcontroller. Other design requirements include decoupling capacitors on the input and output supplies, a pullup resistor on the common drain FLT output signal and RST input signal, and a high-voltage protection diode between the IGBT collector and the DESAT input. Further details are explained in the subsequent sections. 表 10-1 shows the allowed range for Input and Output supply voltage, and the typical current output available from the gate-driver.

表 10-1. Design Parameters

| PARAMETER                                                               | VALUE        |
|-------------------------------------------------------------------------|--------------|
| Input supply voltage                                                    | 3 V to 5.5 V |
| Unipolar output supply voltage ( $V_{CC2} - GND2 = V_{CC2} - V_{EE2}$ ) | 15 V to 30 V |
| Bipolar output supply voltage ( $V_{CC2} - V_{EE2}$ )                   | 15 V to 30 V |
| Bipolar output supply voltage ( $GND2 - V_{EE2}$ )                      | 0 V to 15 V  |
| Output current                                                          | 2.5 A        |

## 10.2.2 Detailed Design Procedure

### 10.2.2.1 Recommended ISO5851 Application Circuit

The ISO5851 has both, inverting and non-inverting gate control inputs, an active low reset input, and an open drain fault output suitable for wired-OR applications. The recommended application circuit in 图 10-2 shows a typical gate driver implementation with unipolar output supply and 图 10-3 shows a typical gate driver implementation with bipolar output supply using the ISO5851.

A 0.1- $\mu$ F bypass capacitor, recommended at input supply pin  $V_{CC1}$  and 1- $\mu$ F bypass capacitor, recommended at output supply pin  $V_{CC2}$ , provide the large transient currents necessary during a switching transition to ensure reliable operation. The 220 pF blanking capacitor disables DESAT detection during the off-to-on transition of the power device. The DESAT diode ( $D_{DST}$ ) and its 1-k $\Omega$  series resistor are external protection components. The  $R_G$  gate resistor limits the gate charge current and indirectly controls the IGBT collector voltage rise and fall times. The open-drain  $\overline{FLT}$  output and RDY output has a passive 10-k $\Omega$  pullup resistor. In this application, the IGBT gate driver is disabled when a fault is detected and will not resume switching until the microcontroller applies a reset signal.

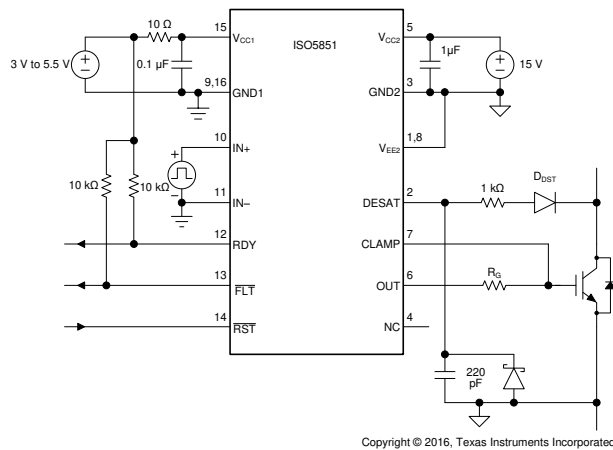


图 10-2. Unipolar Output Supply


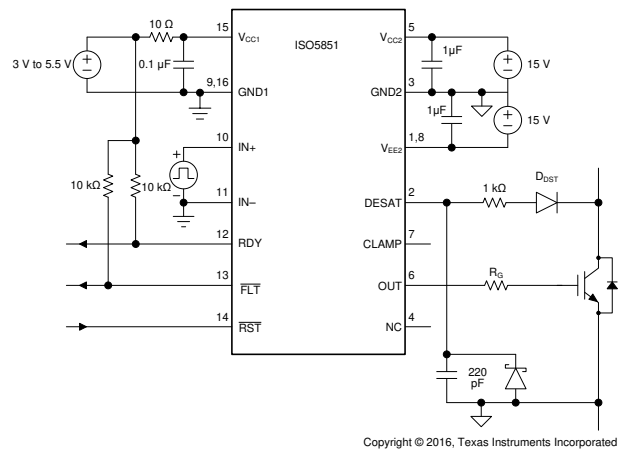


图 10-3. Bipolar Output Supply

### 10.2.2.2 $\overline{\text{FLT}}$ and RDY Pin Circuitry

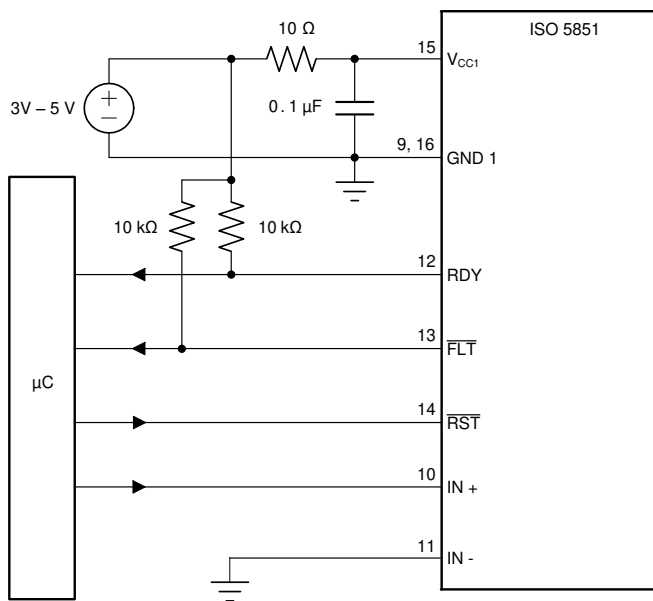There is 50k pullup resistor internally on  $\overline{\text{FLT}}$  and RDY pins. The  $\overline{\text{FLT}}$  and RDY pin is an open-drain output. A 10-k $\Omega$  pullup resistor can be used to make it faster rise and to provide logic high when  $\overline{\text{FLT}}$  and RDY is inactive, as shown in 图 10-4

Fast common mode transients can inject noise and glitches on  $\overline{\text{FLT}}$  and RDY pins due to parasitic coupling. This is dependent on board layout. If required, additional capacitance (100 pF to 300 pF) can be included on the  $\overline{\text{FLT}}$  and RDY pins.



Copyright © 2016, Texas Instruments Incorporated


图 10-4.  $\overline{\text{FLT}}$  and RDY Pin Circuitry for High CMTI

### 10.2.2.3 Driving the Control Inputs

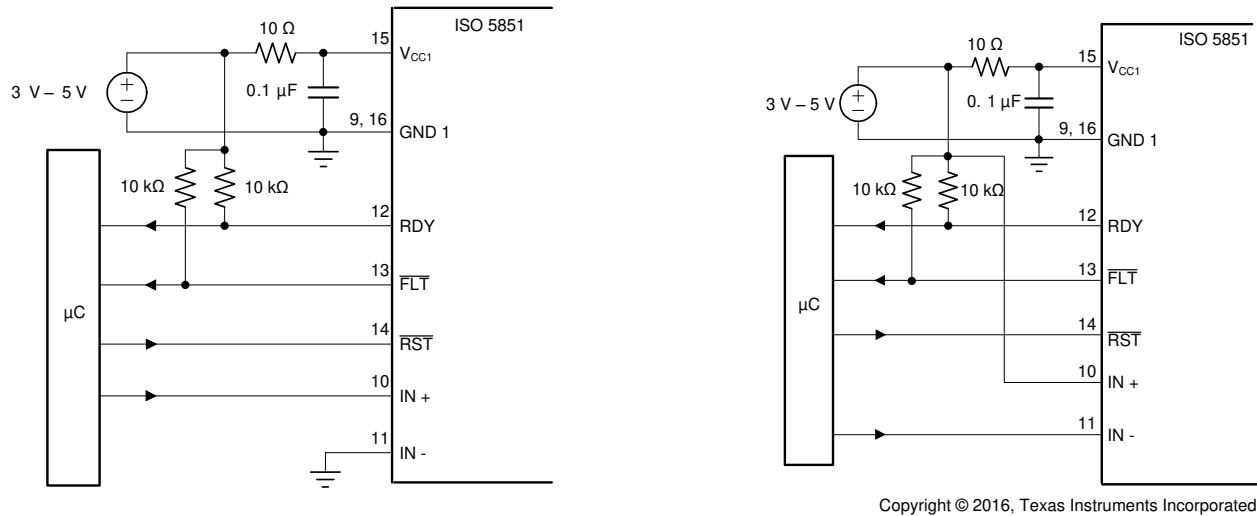The amount of common-mode transient immunity (CMTI) can be curtailed by the capacitive coupling from the high-voltage output circuit to the low-voltage input side of the ISO5851. For maximum CMTI performance, the digital control inputs, IN+ and IN- , must be actively driven by standard CMOS, push-pull drive circuits. This type of low-impedance signal source provides active drive signals that prevent unwanted switching of the ISO5851 output under extreme common-mode transient conditions. Passive drive circuits, such as open-drain configurations using pullup resistors, must be avoided. There is a 20 ns glitch filter which can filter a glitch up to 20 ns on IN+ or IN- .

### 10.2.2.4 Local Shutdown and Reset

In applications with local shutdown and reset, the  $\overline{\text{FLT}}$  output of each gate driver is polled separately, and the individual reset lines are asserted low independently to reset the motor controller after a fault condition.




Copyright © 2016, Texas Instruments Incorporated

图 10-5. Local Shutdown and Reset for Noninverting (Left) and Inverting Input Configuration (Right)

### 10.2.2.5 Global-Shutdown and Reset

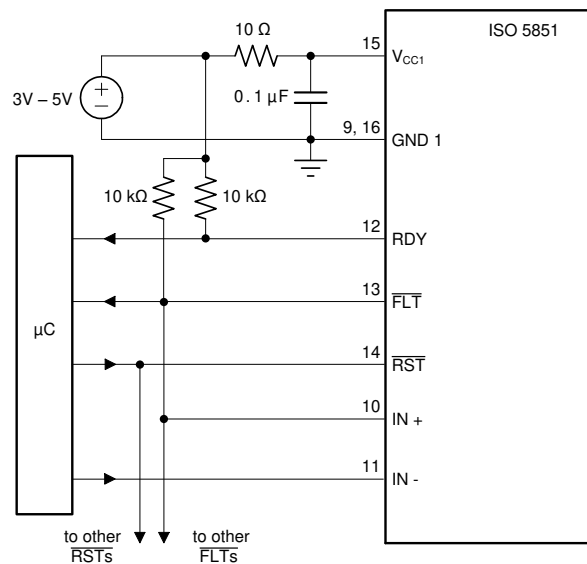When configured for inverting operation, the ISO5851 can be configured to shutdown automatically in the event of a fault condition by tying the  $\overline{\text{FLT}}$  output to IN+. For high reliability drives, the open drain  $\overline{\text{FLT}}$  outputs of multiple ISO5851 devices can be wired together forming a single, common fault bus for interfacing directly to the micro-controller. When any of the six gate drivers of a three-phase inverter detects a fault, the active low  $\overline{\text{FLT}}$  output disables all six gate drivers simultaneously.



Copyright © 2016, Texas Instruments Incorporated

图 10-6. Global Shutdown with Inverting Input Configuration

### 10.2.2.6 Auto-Reset

In this case, the gate control signal at IN+ is also applied to the  $\overline{\text{RST}}$  input to reset the fault latch every switching cycle. Incorrect  $\overline{\text{RST}}$  makes output go low. A fault condition, however, the gate driver remains in the latched fault state until the gate control signal changes to the 'gate low' state and resets the fault latch.

If the gate control signal is a continuous PWM signal, the fault latch will always be reset before IN+ goes high again. This configuration protects the IGBT on a cycle by cycle basis and automatically resets before the next 'on' cycle.

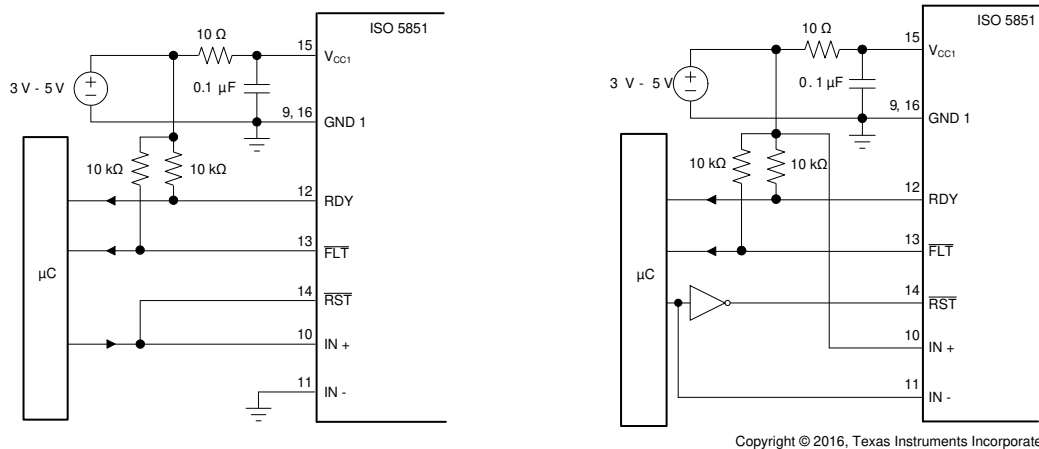


图 10-7. Auto Reset for Non-inverting and Inverting Input Configuration

### 10.2.2.7 DESAT Pin Protection

Switching inductive loads causes large instantaneous forward voltage transients across the freewheeling diodes of IGBTs. These transients result in large negative voltage spikes on the DESAT pin which draw substantial current out of the device. To limit this current below damaging levels, a 100-Ω to 1-kΩ resistor is connected in series with the DESAT diode.

Further protection is possible through an optional Schottky diode, whose low forward voltage assures clamping of the DESAT input to GND2 potential at low voltage levels.

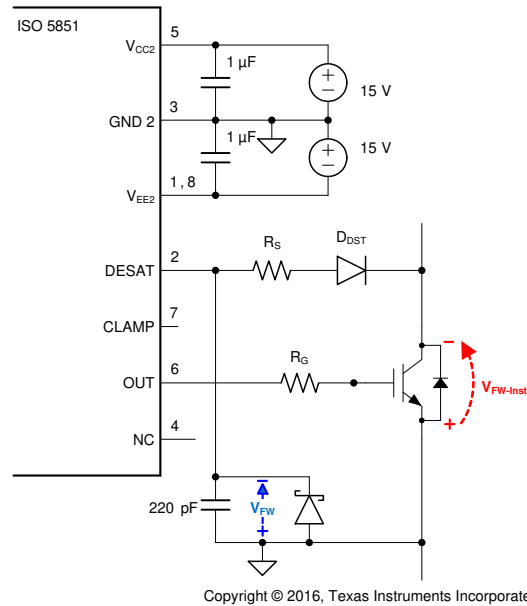


图 10-8. DESAT Pin Protection With Series Resistor and Schottky Diode

### 10.2.2.8 DESAT Diode and DESAT Threshold

The DESAT diode's function is to conduct forward current, allowing sensing of the IGBT's saturated collector-to-emitter voltage,  $V_{(CESAT)}$ , (when the IGBT is *on*) and to block high voltages (when the IGBT is *off*). During the short transition time when the IGBT is switching, there is commonly a high  $dV_{CE}/dt$  voltage ramp rate across the IGBT. This results in a charging current  $I_{(CHARGE)} = C_{(D-DESAT)} \times dV_{CE}/dt$ , charging the blanking capacitor.  $C_{(D-DESAT)}$  is the diode capacitance at DESAT.

To minimize this current and avoid false DESAT triggering, fast switching diodes with low capacitance are recommended. As the diode capacitance builds a voltage divider with the blanking capacitor, large collector voltage transients appear at DESAT attenuated by the ratio of  $1 + C_{(BLANK)} / C_{(D-DESAT)}$ .

Because the sum of the DESAT diode forward-voltage and the IGBT collector-emitter voltage make up the voltage at the DESAT-pin,  $V_F + V_{CE} = V_{(DESAT)}$ , the  $V_{CE}$  level, which triggers a fault condition, can be modified by adding multiple DESAT diodes in series:  $V_{CE-FAULT(TH)} = 9V - n \times VF$  (where  $n$  is the number of DESAT diodes).

When using two diodes instead of one, diodes with half the required maximum reverse-voltage rating may be chosen.

### 10.2.2.9 Determining the Maximum Available, Dynamic Output Power, $P_{OD-max}$

The ISO5851 maximum allowed total power consumption of  $P_D = 251$  mW consists of the total input power,  $P_{ID}$ , the total output power,  $P_{OD}$ , and the output power under load,  $P_{OL}$ :

$$P_D = P_{ID} + P_{OD} + P_{OL} \quad (1)$$

With:

$$P_{ID} = V_{CC1-max} \times I_{CC1-max} = 5.5V \times 4.5mA = 24.75mW \quad (2)$$

and:

$$P_{OD} = (V_{CC2} - V_{EE2}) \times I_{CC2-max} = (15V - (-8V)) \times 6mA = 138mW \quad (3)$$

then:

$$P_{OL} = P_D - P_{ID} - P_{OD} = 251mW - 24.75mW - 138mW = 88.25mW \quad (4)$$

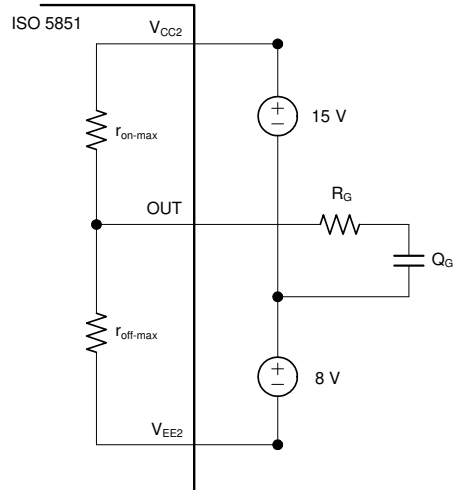
In comparison to  $P_{OL}$ , the actual dynamic output power under worst case condition,  $P_{OL-WC}$ , depends on a variety of parameters:

$$P_{OL-WC} = 0.5 \times f_{INP} \times Q_G \times (V_{CC2} - V_{EE2}) \times \left( \frac{r_{on-max}}{r_{on-max} + R_G} + \frac{r_{off-max}}{r_{off-max} + R_G} \right) \quad (5)$$

where

- $f_{INP}$  = signal frequency at the control input IN+
- $Q_G$  = power device gate charge
- $V_{CC2}$  = positive output supply with respect to GND2
- $V_{EE2}$  = negative output supply with respect to GND2
- $r_{on-max}$  = worst case output resistance in the on-state:  $4\Omega$
- $r_{off-max}$  = worst case output resistance in the off-state:  $2.5\Omega$
- $R_G$  = gate resistor

Once  $R_G$  is determined, 方程式 5 is to be used to verify whether  $P_{OL-WC} < P_{OL}$ . 图 10-9 shows a simplified output stage model for calculating  $P_{OL-WC}$ .



Copyright © 2016, Texas Instruments Incorporated

**图 10-9. Simplified Output Model for Calculating  $P_{OL-WC}$** **10.2.2.10 Example**

This examples considers an IGBT drive with the following parameters:

$$I_{ON-PK} = 2 \text{ A}, Q_G = 650 \text{ nC}, f_{INP} = 20 \text{ kHz}, V_{CC2} = 15 \text{ V}, V_{EE2} = -8 \text{ V} \quad (6)$$

Applying the value of the gate resistor  $R_G = 10 \text{ } \Omega$ .

Then, calculating the worst-case output power consumption as a function of  $R_G$ , using 方程式 5  $r_{on-max}$  = worst case output resistance in the on-state:  $4 \text{ } \Omega$ ,  $r_{off-max}$  = worst case output resistance in the off-state:  $2.5 \text{ } \Omega$ ,  $R_G$  = gate resistor yields

$$P_{OL-WC} = 0.5 \times 20 \text{ kHz} \times 650 \text{ nC} \times (15 \text{ V} - (-8 \text{ V})) \times \left( \frac{4 \text{ } \Omega}{4 \text{ } \Omega + 10 \text{ } \Omega} + \frac{2.5 \text{ } \Omega}{2.5 \text{ } \Omega + 10 \text{ } \Omega} \right) = 72.61 \text{ mW} \quad (7)$$

Because  $P_{OL-WC} = 72.61 \text{ mW}$  is below the calculated maximum of  $P_{OL} = 88.25 \text{ mW}$ , the resistor value of  $R_G = 10 \text{ } \Omega$  is suitable for this application.



### 10.2.2.11 Higher Output Current Using an External Current Buffer

To increase the IGBT gate drive current, a non-inverting current buffer (such as the npn/pnp buffer shown in 图 10-10) may be used. Inverting types are not compatible with the desaturation fault protection circuitry and must be avoided. The MJD44H11/MJD45H11 pair is appropriate for currents up to 8 A, the D44VH10/ D45VH10 pair for up to 15 A maximum.


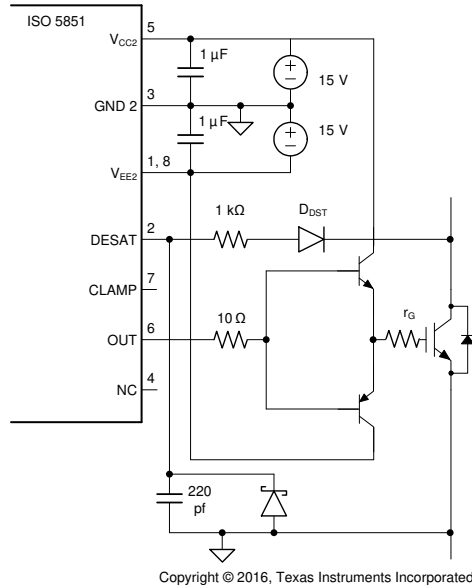
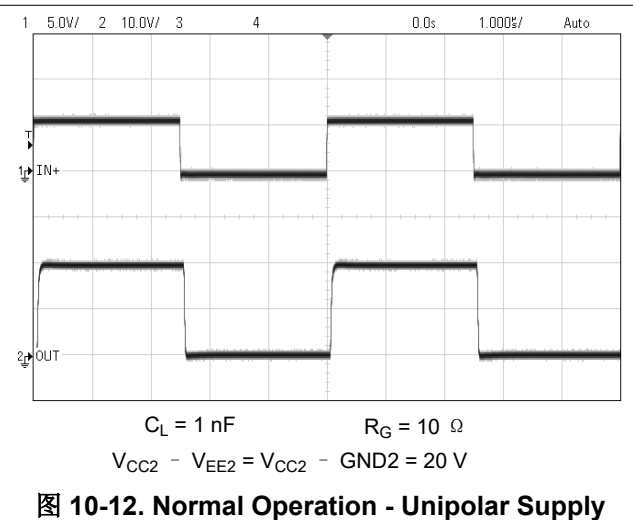


图 10-10. Current Buffer for Increased Drive Current

### 10.2.3 Application Curves

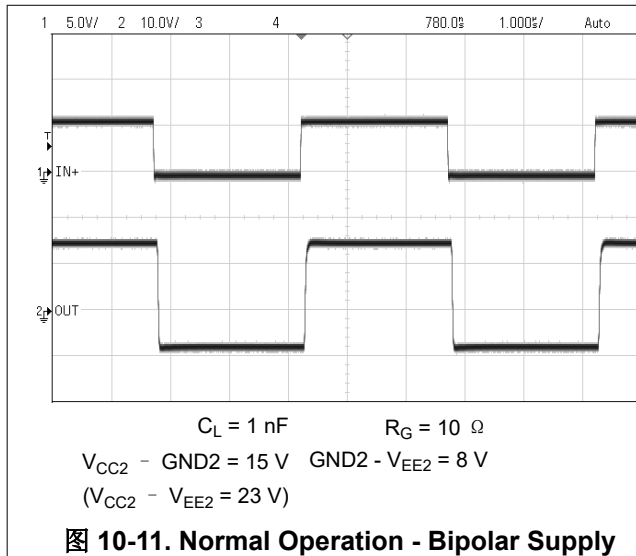

## 11 Power Supply Recommendations

To help ensure reliable operation at all data rates and supply voltages, a 0.1- $\mu$ F bypass capacitor is recommended at input supply pin  $V_{CC1}$  and 1- $\mu$ F bypass capacitor is recommended at output supply pin  $V_{CC2}$ . The capacitors should be placed as close to the supply pins as possible. The recommended placement of the capacitors is 2-mm maximum from the input and output power supply pin ( $V_{CC1}$  and  $V_{CC2}$ ).

## 12 Layout

### 12.1 Layout Guidelines

A minimum of four layers is required to accomplish a low EMI PCB design (see 图 12-1). Layer stacking should be in the following order (top-to-bottom): high-current or sensitive signal layer, ground plane, power plane and low-frequency signal layer.

- Routing the high-current or sensitive traces on the top layer avoids the use of vias (and the introduction of their inductances) and allows for clean interconnects between the gate driver and the microcontroller and power transistors. Gate driver control input, Gate driver output OUT and DESAT should be routed in the top layer.
- Placing a solid ground plane next to the sensitive signal layer provides an excellent low-inductance path for the return current flow. On the driver side, use GND2 as the ground plane.
- Placing the power plane next to the ground plane creates additional high-frequency bypass capacitance of approximately 100 pF/inch<sup>2</sup>. On the gate-driver V<sub>EE2</sub> and V<sub>CC2</sub> can be used as power planes. They can share the same layer on the PCB as long as they are not connected together.
- Routing the slower speed control signals on the bottom layer allows for greater flexibility as these signal links usually have margin to tolerate discontinuities such as vias.

For detailed layout recommendations, see the [Digital Isolator Design Guide](#) (SLLA284).

### 12.2 Layout Example

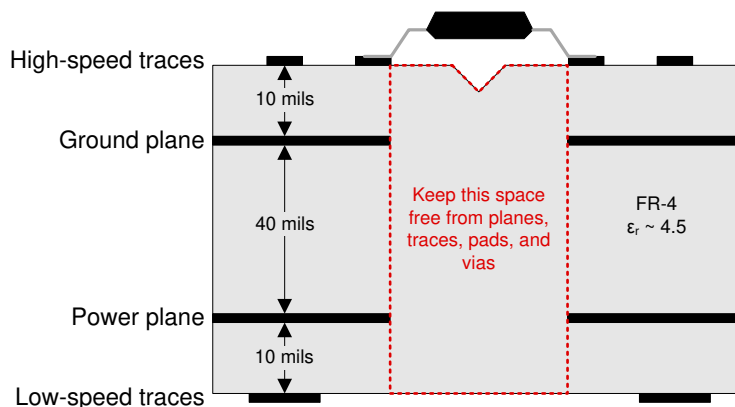


图 12-1. Recommended Layer Stack

### 12.3 PCB Material

For digital circuit boards operating at less than 150 Mbps, (or rise and fall times greater than 1 ns), and trace lengths of up to 10 inches, use standard FR-4 UL94V-0 printed circuit board. This PCB is preferred over cheaper alternatives because of lower dielectric losses at high frequencies, less moisture absorption, greater strength and stiffness, and the self-extinguishing flammability-characteristics.

## 13 Device and Documentation Support

### 13.1 Device Support

#### 13.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

### 13.2 Documentation Support

#### 13.2.1 Related Documentation

For related documentation see the following:

- [ISO5851 Evaluation Module \(EVM\) User's Guide](#)
- [Digital Isolator Design Guide](#)
- [Isolation Glossary](#)

### 13.3 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](http://ti.com) 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 13.4 支持资源

[TI E2E™ 支持论坛](#) 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

### 13.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 13.6 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 13.7 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number      | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|----------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">ISO5851DW</a>  | Obsolete      | Production           | SOIC (DW)   16 | -                     | -           | Call TI                              | Call TI                           | -40 to 125   | ISO5851             |
| <a href="#">ISO5851DWR</a> | Active        | Production           | SOIC (DW)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | ISO5851             |
| ISO5851DWR.A               | Active        | Production           | SOIC (DW)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | ISO5851             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

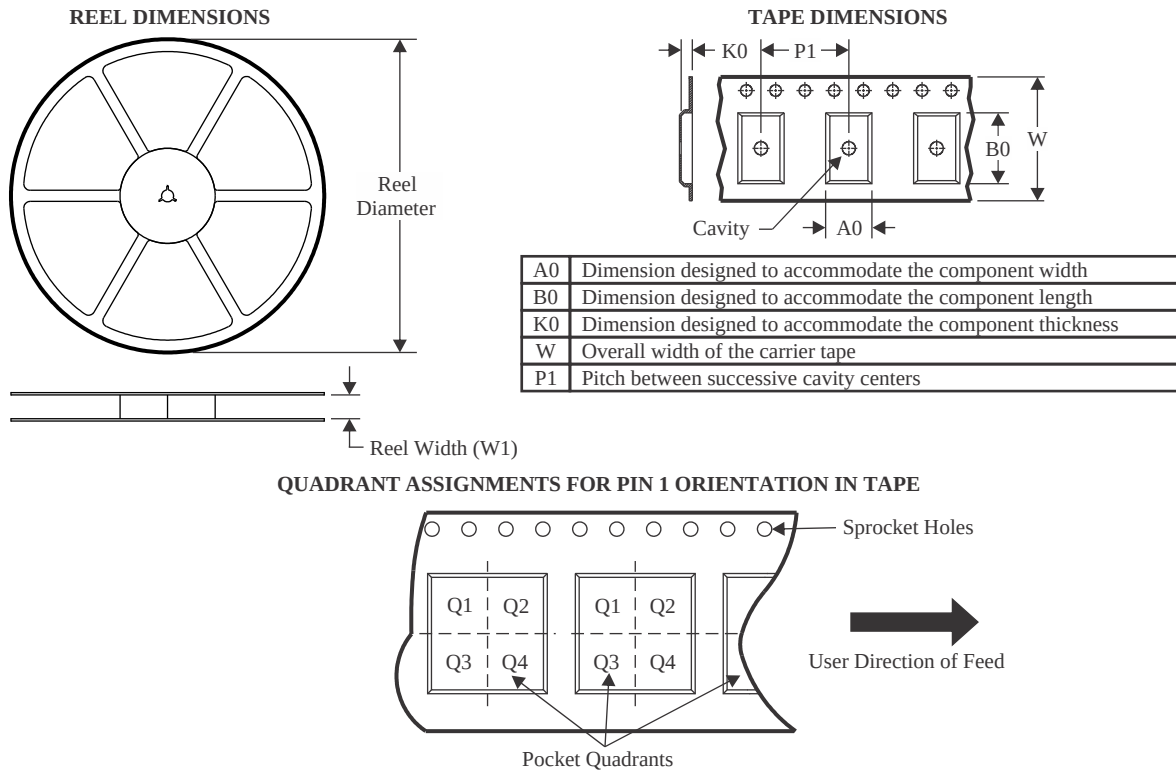
### OTHER QUALIFIED VERSIONS OF ISO5851 :

- Automotive : [ISO5851-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects


## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ISO5851DWR | SOIC         | DW              | 16   | 2000 | 330.0              | 16.4               | 10.75   | 10.7    | 2.7     | 12.0    | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

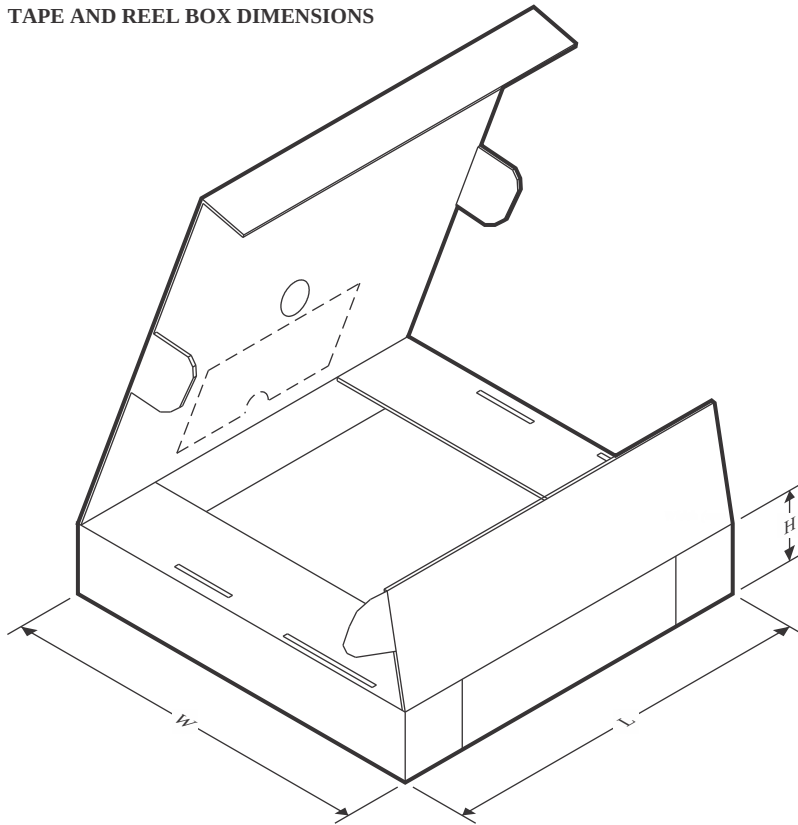

\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| ISO5851DWR | SOIC         | DW              | 16   | 2000 | 353.0       | 353.0      | 32.0        |



## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月