

SINGLE-ENDED ANALOG-INPUT 20-BIT STEREO ANALOG-TO-DIGITAL CONVERTER

FEATURES

- Dual 20-Bit Monolithic $\Delta\Sigma$ ADC
- Single-Ended Voltage Input
- 64x Oversampling Decimation Filter:
 - Pass-Band Ripple: ± 0.05 dB
 - Stop-Band Attenuation: -65 dB
- High Performance:
 - THD+N: -88 dB (typical)
 - SNR: 95 dB (typical)
 - Dynamic Range: 95 dB (typical)
 - Internal High-Pass Filter
- PCM Audio Interface:
 - Master/Slave Modes
 - Four Data Formats
- Sampling Rate: 4 kHz to 48 kHz
- System Clock: 256 f_s , 384 f_s , or 512 f_s
- Single 5-V Power Supply
- Small 24-Pin SSOP Package


APPLICATIONS

- DVD Recorders
- DVD Receivers
- AV Amplifier Receivers
- Electric Musical Instruments

DESCRIPTION

The PCM1800 is a low-cost, single-chip stereo analog-to-digital converter (ADC) with single-ended analog voltage inputs. The PCM1800 uses a delta-sigma modulator with 64 times oversampling, including a digital decimation filter and a serial interface which supports both master and slave modes and four data formats. The PCM1800 is suitable for a wide variety of cost-sensitive consumer applications where good performance is required.

The PCM1800 is fabricated using a highly advanced CMOS process and is available in a small 24-pin SSOP package.

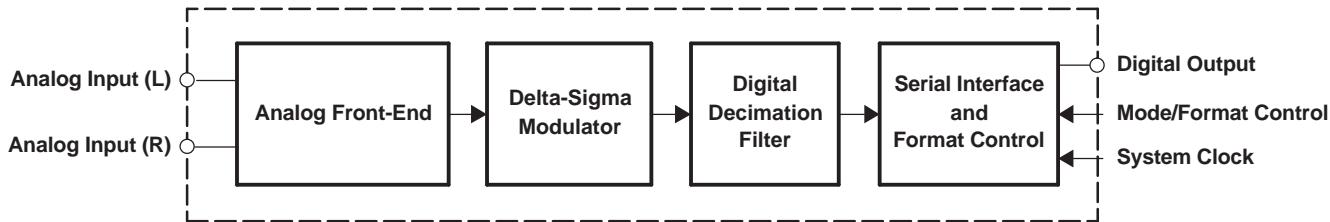

B0003-01



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

System Two, Audio Precision are trademarks of Audio Precision, Inc.
All other trademarks are the property of their respective owners.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ELECTRICAL CHARACTERISTICS

All specifications at $T_A = 25^\circ\text{C}$, $V_{DD} = V_{CC} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted

| PARAMETER | TEST CONDITIONS | PCM1800E | | | UNITS |
|--|-----------------------------------|---------------------------|----------|-----------|------------------------------|
| | | MIN | TYP | MAX | |
| RESOLUTION | | 20 | | | Bits |
| DIGITAL INPUT/OUTPUT | | | | | |
| $V_{IH}^{(1)}$ | Input logic level | | 2 | | VDC |
| $V_{IL}^{(1)}$ | | | | 0.8 | |
| $I_{IN}^{(2)}$ | Input logic current | | | ± 1 | μA |
| $I_{IN}^{(3)}$ | | | | 100 | |
| $V_{OH}^{(4)}$ | Output logic level | $I_{OH} = -1.6\text{ mA}$ | 4.5 | | VDC |
| $V_{OL}^{(4)}$ | | $I_{OL} = 3.2\text{ mA}$ | | 0.5 | |
| f_S | Sampling frequency | | 4 | 44.1 | kHz |
| | | 256 f_S | 1.024 | 11.2896 | MHz |
| | System clock frequency | 384 f_S | 1.536 | 16.9344 | |
| | | 512 f_S | 2.048 | 22.5792 | |
| DC ACCURACY | | | | | |
| Gain mismatch, channel-to-channel | | | ± 1 | ± 2.5 | % of FSR |
| Gain error | | | ± 2 | ± 5 | % of FSR |
| Gain drift | | | ± 20 | | ppm of FSR/ $^\circ\text{C}$ |
| Bipolar zero error | High-pass filter bypassed | | ± 2 | | % of FSR |
| Bipolar zero drift | High-pass filter bypassed | | ± 20 | | ppm of FSR/ $^\circ\text{C}$ |
| DYNAMIC PERFORMANCE⁽⁵⁾ | | | | | |
| THD+N at FS (-0.5 dB) | | | -88 | -80 | dB |
| THD+N at -60 dB | | | -92 | | dB |
| Dynamic range | A-weighted | 90 | 95 | | dB |
| Signal-to-noise ratio | A-weighted | 90 | 95 | | dB |
| Channel separation | | 88 | 93 | | dB |
| DYNAMIC PERFORMANCE⁽⁵⁾ | | | | | |
| Dynamic range | 16-bit, A-weighted | | 94 | | dB |
| Signal-to-noise ratio | 16-bit, A-weighted | | 94 | | dB |
| Channel separation | 16-bit | | 92 | | dB |
| ANALOG INPUT | | | | | |
| Input range | FS ($V_{IN} = 0\text{ dB}$) | | 2.828 | | Vp-p |
| Center voltage | | | 2.1 | | VDC |
| Input impedance | | | 30 | | $\text{k}\Omega$ |
| Antialiasing filter frequency response | $C_{EXT} = 470\text{ pF}$, -3 dB | | 170 | | kHz |
| DIGITAL FILTER PERFORMANCE | | | | | |

- (1) Pins 6, 7, 8, 9, 10, 11, 16 and 12, 13, 14: RSTB, BYPAS, FMT0, FMT1, MODE0, MODE1, SYSCLK, and FSYNC, LRCK, BCK in slave mode
- (2) Pins 16 and 12, 13, 14: SYSCLK and FSYNC, LRCK, BCK in slave mode (Schmitt-trigger input)
- (3) Pins 6, 7, 8, 9, 10, 11: RSTB, BYPAS, FMT0, FMT1, MODE0, MODE1 (Schmitt-trigger input, with 100-k Ω typical pulldown resistor)
- (4) Pins 15 and 12, 13, 14: DOUT and FSYNC, LRCK, BCK in master mode
- (5) $f_{IN} = 1\text{ kHz}$, using the System Two™ audio measurement system by Audio Precision™, rms mode with 20-kHz LPF and 400-Hz HPF in the performance calculation.

ELECTRICAL CHARACTERISTICS (continued)

All specifications at $T_A = 25^\circ\text{C}$, $V_{DD} = V_{CC} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted


| PARAMETER | TEST CONDITIONS | PCM1800E | | | UNITS |
|------------------------------|-----------------|-------------|-------------|-------------|-------|
| | | MIN | TYP | MAX | |
| Pass band | | | | 0.454 f_S | Hz |
| Stop band | | 0.583 f_S | | | Hz |
| Pass-band ripple | | | | ±0.05 | dB |
| Stop-band attenuation | | –65 | | | dB |
| Delay time (latency) | | | 17.4/ f_S | | s |
| High-pass frequency response | –3 dB | | 0.019 f_S | | mHz |

POWER SUPPLY REQUIREMENTS

| | | | | | | | |
|-------------------------------|--------------------|--------------------------------|-----|-----|-----|------|--|
| V_{CC} | Voltage range | | 4.5 | 5 | 5.5 | VDC | |
| V_{DD} | | | 4.5 | 5 | 5.5 | | |
| Supply current ⁽⁶⁾ | | $V_{CC} = V_{DD} = 5\text{ V}$ | | 18 | 25 | mA | |
| Power dissipation | | $V_{CC} = V_{DD} = 5\text{ V}$ | | 90 | 125 | mW | |
| T_A | Operation | | –25 | | 85 | °C | |
| T_{stg} | Storage | | –55 | | 125 | °C | |
| θ_{JA} | Thermal resistance | | | 100 | | °C/W | |

(6) No load on DOUT (pin 15) in the slave mode

PIN CONFIGURATION

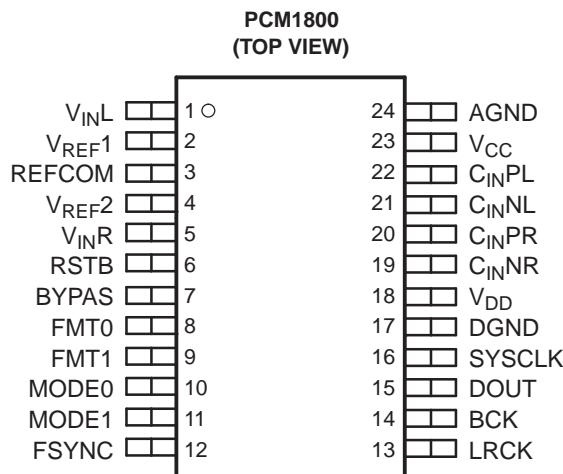

P0004-01

PIN ASSIGNMENTS

| NAME | PIN | I/O | DESCRIPTION |
|--------------------|-----|-----|---|
| AGND | 24 | — | Analog ground |
| BCK | 14 | I/O | Bit clock input/output |
| BYPAS | 7 | I | High-pass filter bypass control ⁽¹⁾ |
| C _{IN} NL | 21 | — | Antialias filter capacitor (—), Lch |
| C _{IN} NR | 19 | — | Antialias filter capacitor (—), Rch |
| C _{IN} PL | 22 | — | Antialias filter capacitor (+), Lch |
| C _{IN} PR | 20 | — | Antialias filter capacitor (+), Rch |
| DGND | 17 | — | Digital ground |
| DOUT | 15 | O | Audio data output |
| FMT0 | 8 | I | Audio data format 0 ⁽¹⁾ |
| FMT1 | 9 | I | Audio data format 1 ⁽¹⁾ |
| FSYNC | 12 | I/O | Frame synchronization, input/output |
| LRCK | 13 | I/O | Sampling clock input/output (f _S) |
| MODE0 | 10 | I | Master/slave mode selection 0 ⁽¹⁾ |
| MODE1 | 11 | I | Master/slave mode selection 1 ⁽¹⁾ |
| REFCOM | 3 | — | Reference decoupling common |
| SYSCLK | 16 | I | System clock input, 256 f _S , 384 f _S , or 512 f _S |
| RSTB | 6 | I | Reset input, active LOW ⁽¹⁾ |
| V _{CC} | 23 | — | Analog power supply |
| V _{DD} | 18 | — | Digital power supply |
| V _{IN} L | 1 | I | Analog input, Lch |
| V _{IN} R | 5 | I | Analog input, Rch |
| V _{REF} 1 | 2 | — | Reference 1 decoupling capacitor |
| V _{REF} 2 | 4 | — | Reference 2 decoupling capacitor |

(1) With 100-kΩ typical pulldown resistor

PACKAGE/ORDERING INFORMATION

| PRODUCT | PACKAGE TYPE | PACKAGE CODE | PACKAGE MARKING | ORDERING NUMBER | TRANSPORT MEDIA | QUANTITY |
|----------|--------------|--------------|-----------------|-----------------|-----------------|----------|
| PCM1800E | 24-pin SSOP | DB | PCM1800E | PCM1800E | Rails | 58 |
| | | | | PCM1800E/2K | Tape and reel | 2000 |

ABSOLUTE MAXIMUM RATINGS


| | |
|---|--|
| Supply voltage: V_{DD} , V_{CC} | –0.3 V to 6.5 V |
| Supply voltage differences | ±0.1 V |
| GND voltage differences | ±0.1 V |
| Digital input voltage | –0.3 V to (V_{DD} + 0.3 V), < 6.5 V |
| Analog input voltage | –0.3 V to (V_{CC} + 0.3 V), < 6.5 V |
| Input current (any pin except supplies) | ±10 mA |
| Power dissipation | 300 mW |
| Operating temperature range | –25°C to 85°C |
| Storage temperature | –55°C to 125°C |
| Lead temperature, soldering | 260°C, 5 s |
| Package temperature (IR reflow, peak) | 235°C |

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)


| | | MIN | NOM | MAX | UNIT |
|--|----------------|-------|-------|--------|------------------|
| Analog supply voltage, V_{CC} | | 4.5 | 5 | 5.5 | V |
| Digital supply voltage, V_{DD} | | 4.5 | 5 | 5.5 | V |
| Analog input voltage, full-scale (–0 dB) | | | 2.828 | | V _{p-p} |
| Digital input logic family | | | TTL | | |
| Digital input clock frequency | System clock | 8.192 | | 24.576 | MHz |
| | Sampling clock | 32 | | 48 | kHz |
| Digital output load capacitance | | | 10 | | pF |
| Operating free-air temperature, T_A | | –25 | | 85 | °C |

BLOCK DIAGRAM

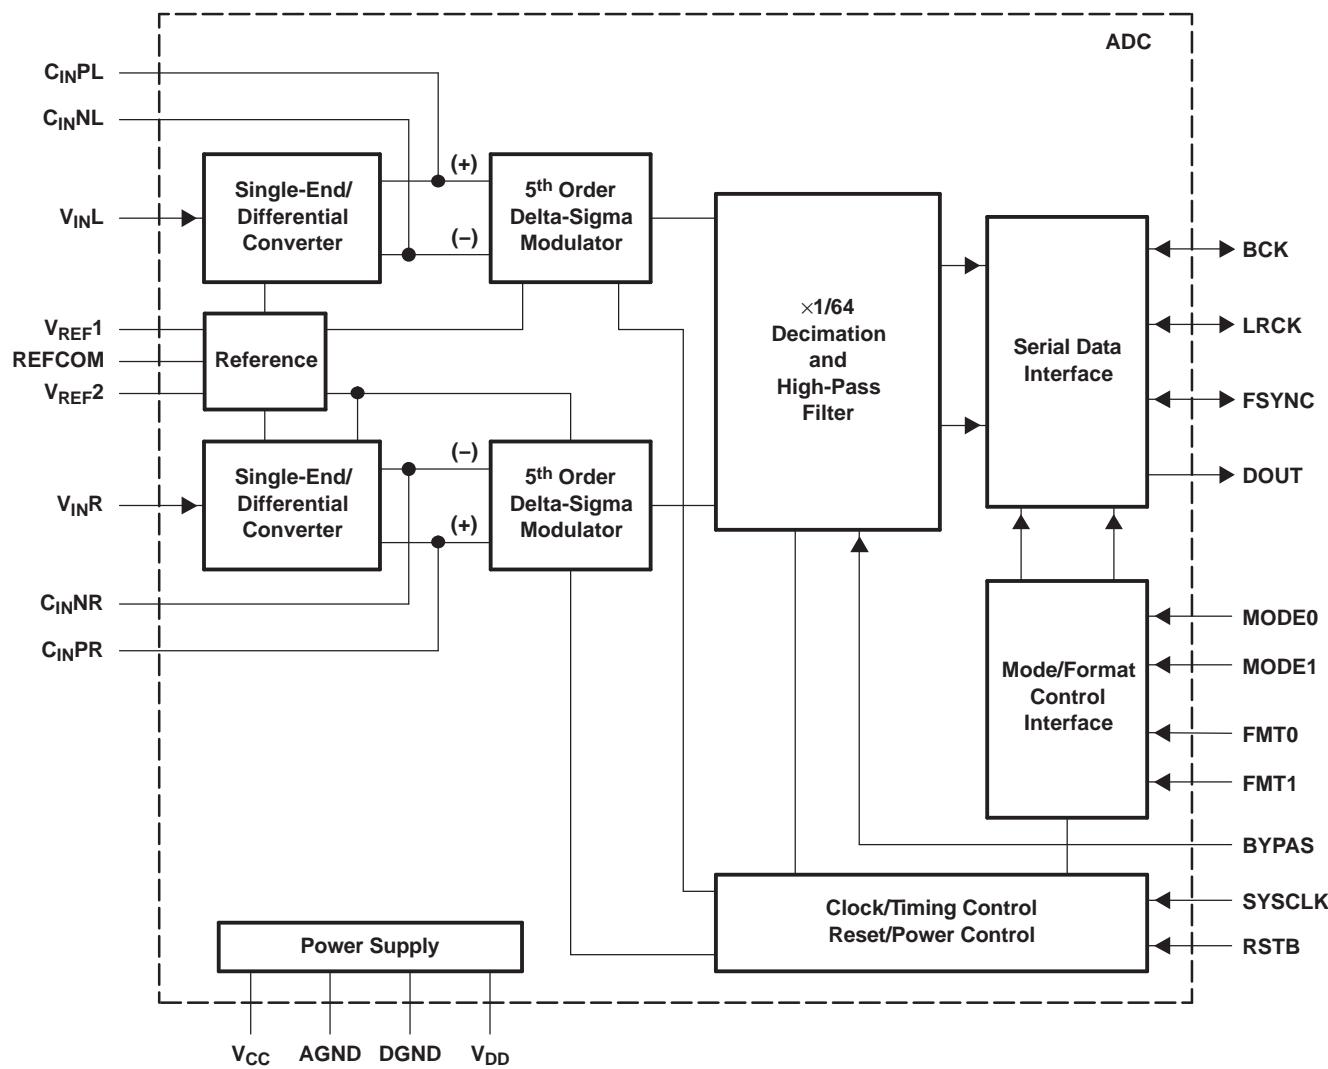

B0004-01

ANALOG FRONT-END (Single Channel)

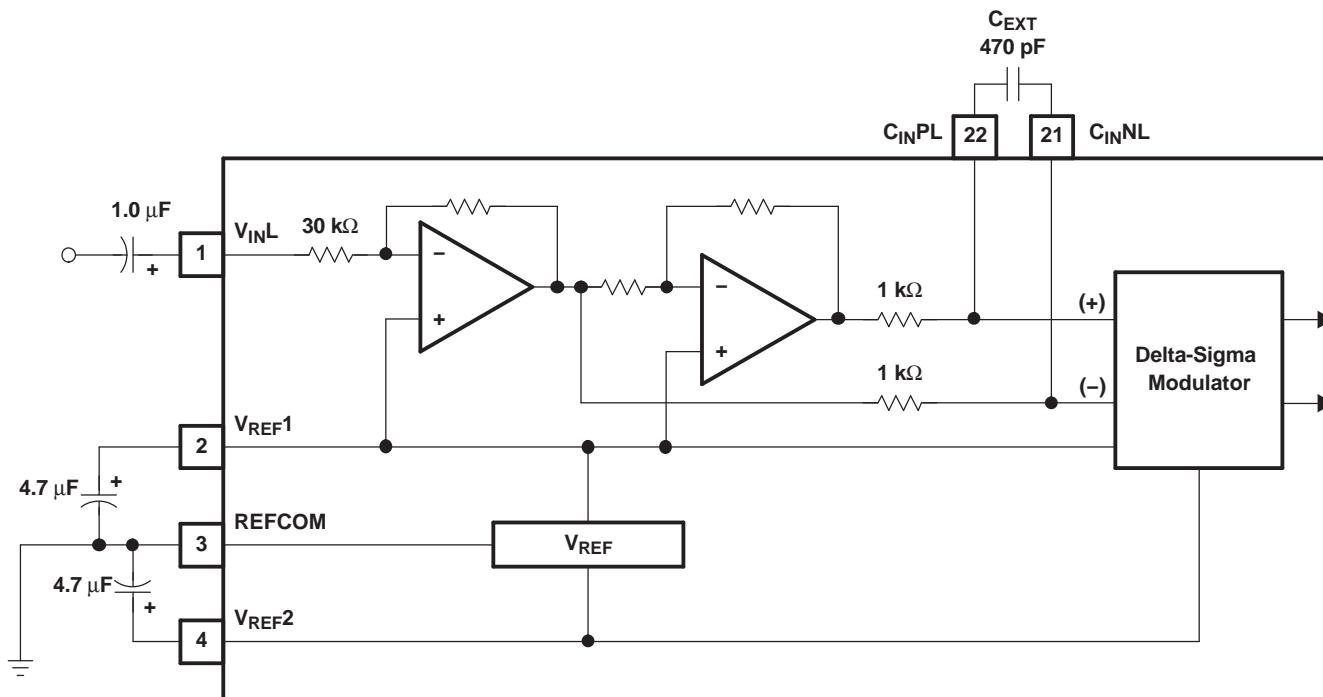

S0011-01

TYPICAL PERFORMANCE CURVES

All specifications at $T_A = 25^\circ\text{C}$, $V_{DD} = V_{CC} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted

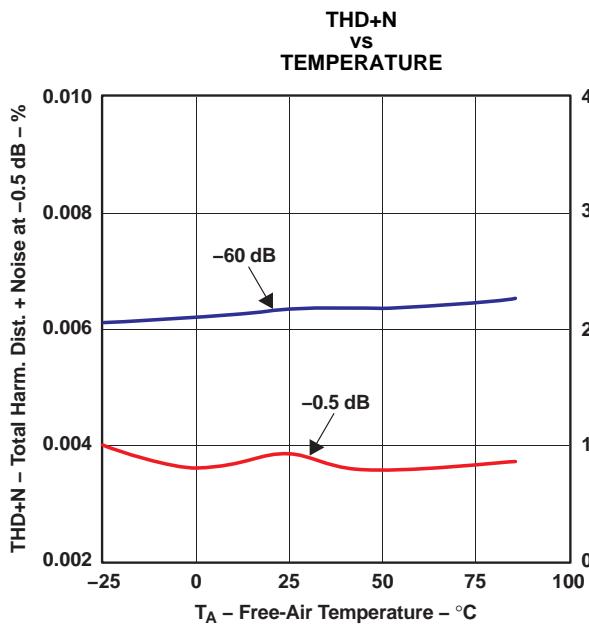


Figure 1.

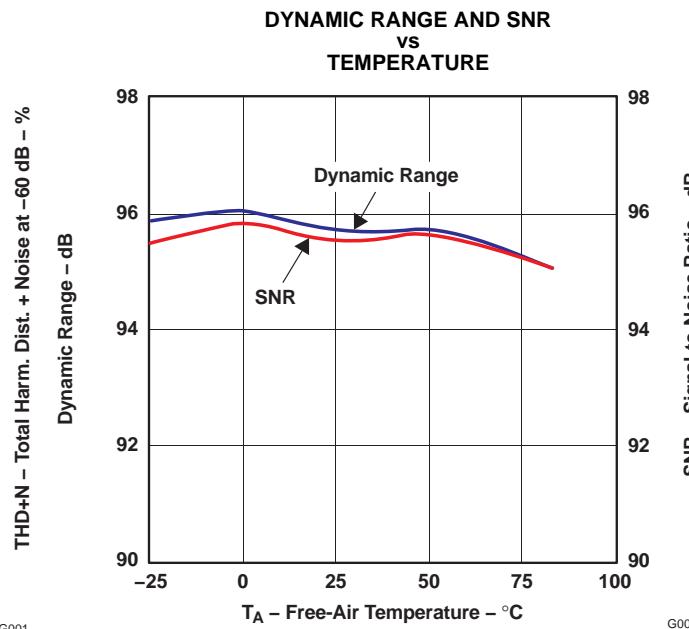


Figure 2.

TYPICAL PERFORMANCE CURVES (continued)

All specifications at $T_A = 25^\circ\text{C}$, $V_{\text{DD}} = V_{\text{CC}} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted

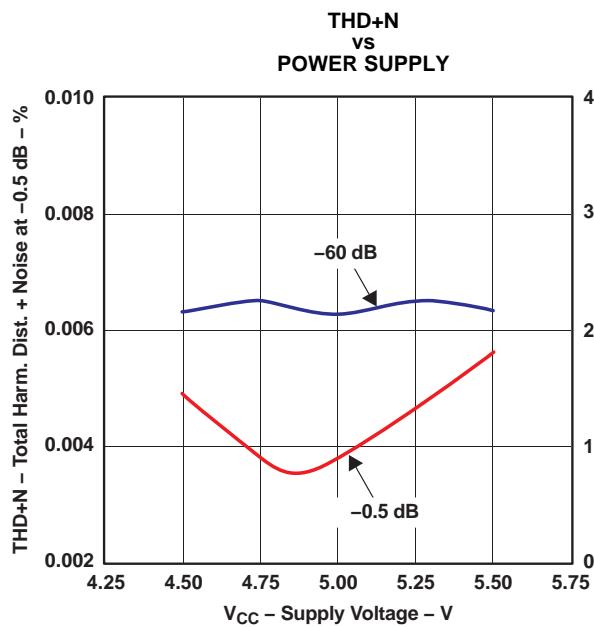


Figure 3.

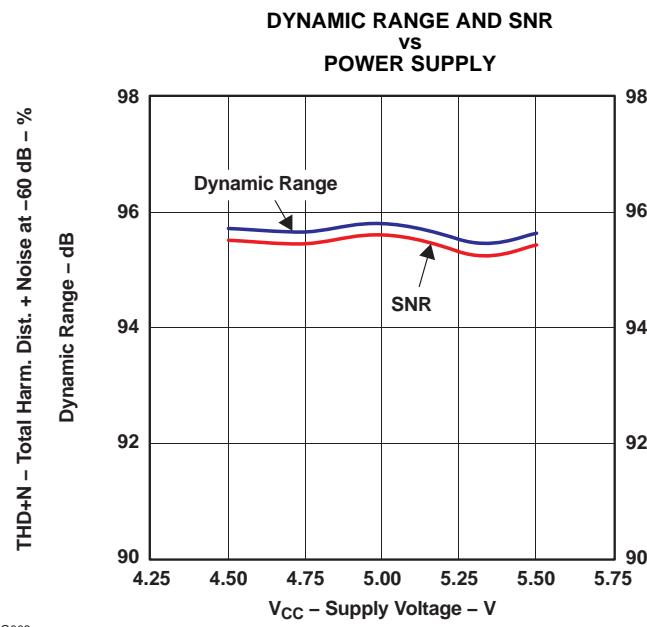


Figure 4.

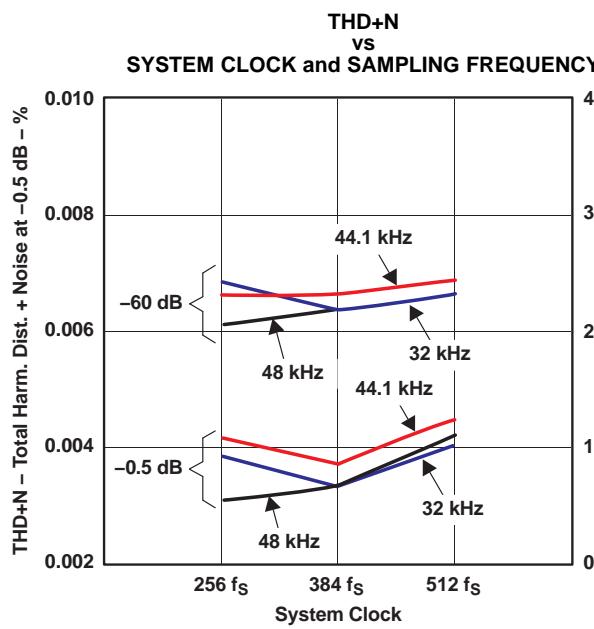


Figure 5.

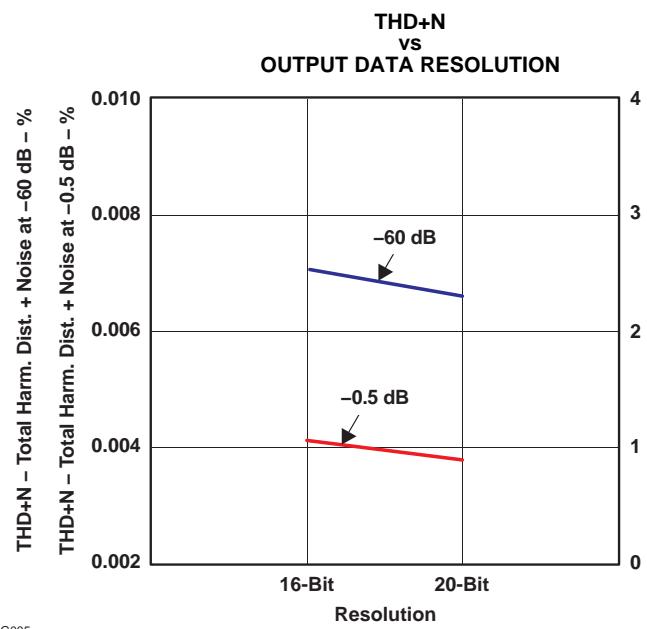


Figure 6.

TYPICAL PERFORMANCE CURVES (continued)

All specifications at $T_A = 25^\circ\text{C}$, $V_{DD} = V_{CC} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted

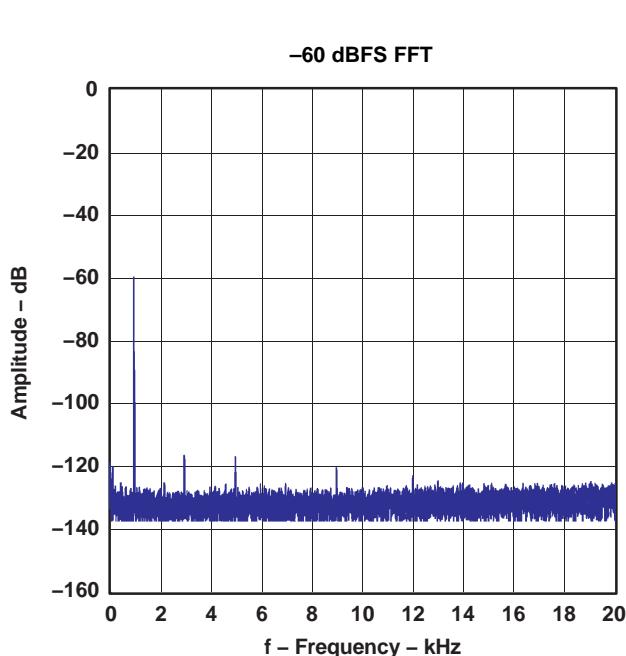


Figure 7.

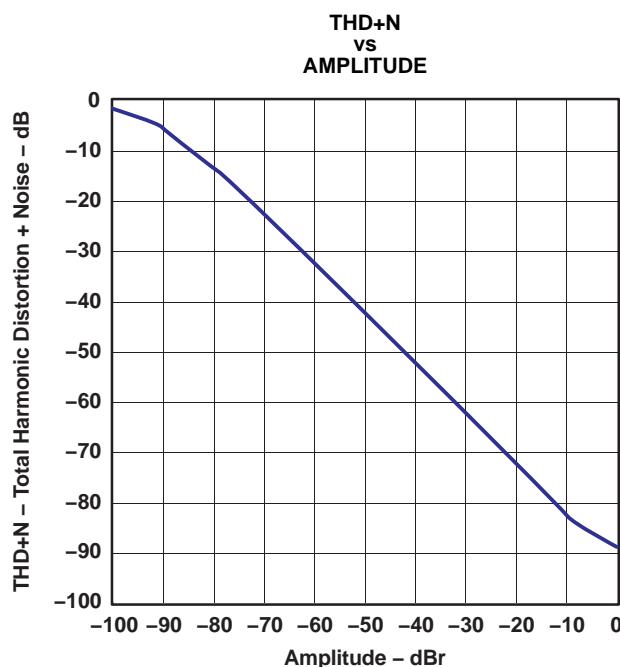


Figure 8.

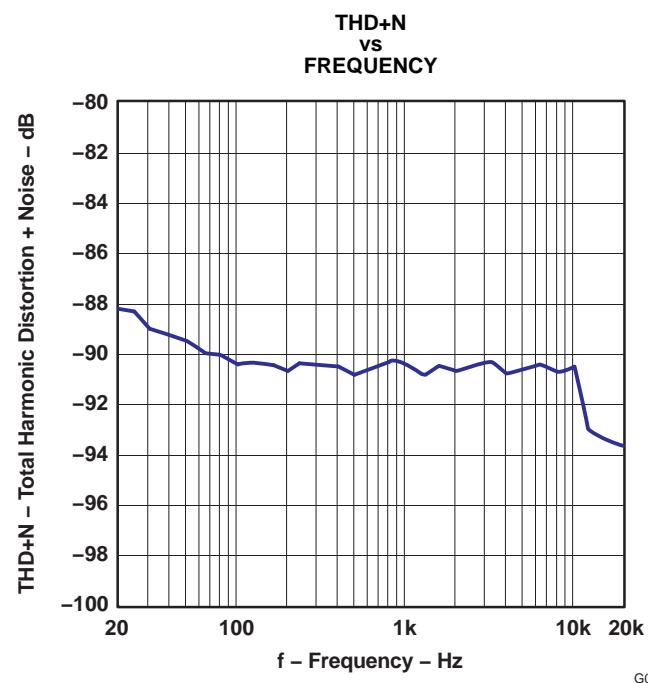


Figure 9.

TYPICAL PERFORMANCE CURVES FOR INTERNAL FILTERS

All specifications at $T_A = 25^\circ\text{C}$, $V_{DD} = V_{CC} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted

DECIMATION FILTER

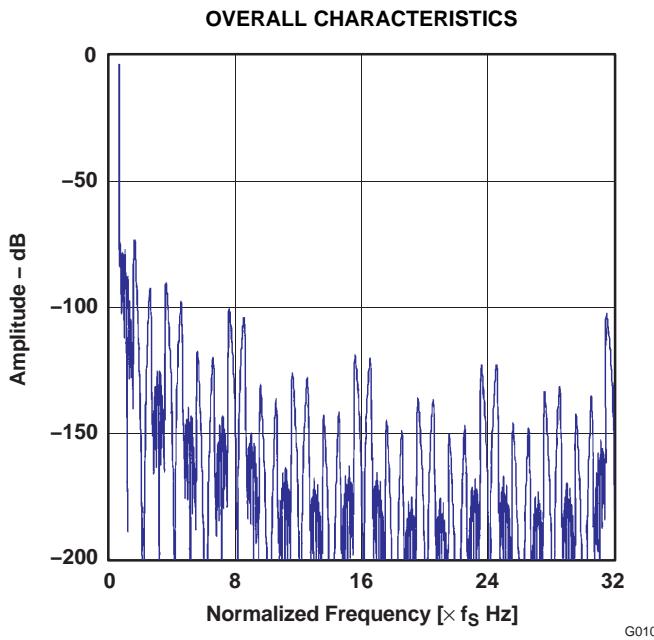


Figure 10.

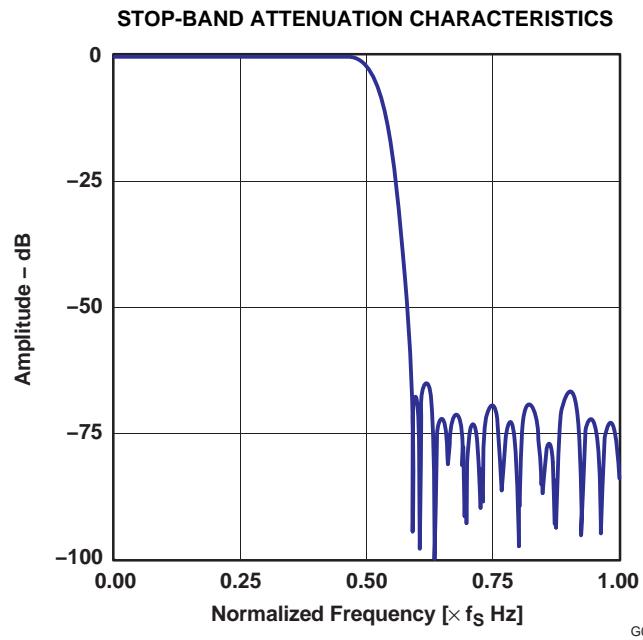


Figure 11.

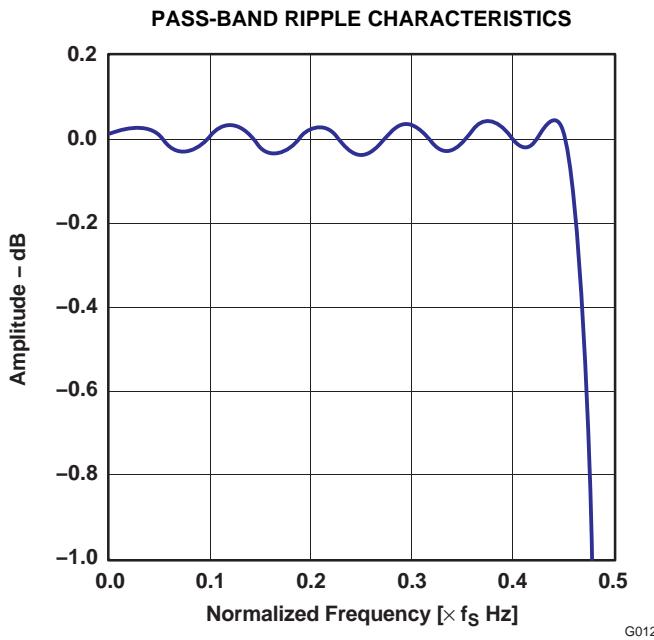


Figure 12.

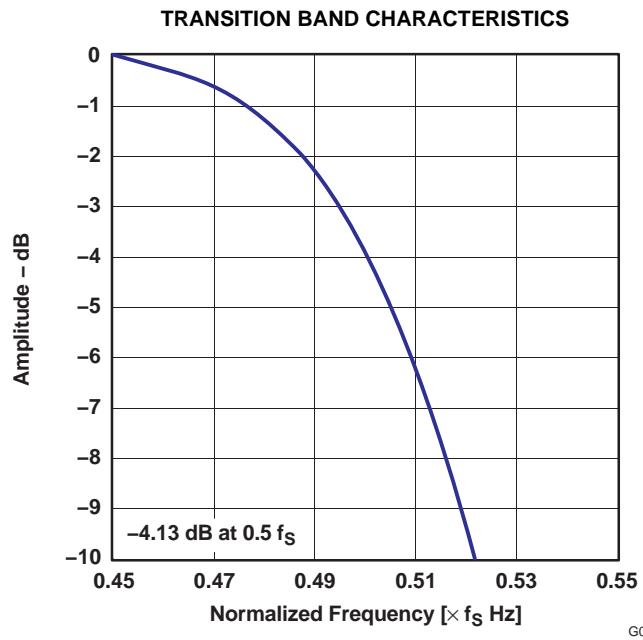


Figure 13.

All specifications at $T_A = 25^\circ\text{C}$, $V_{DD} = V_{CC} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted

TYPICAL PERFORMANCE CURVES FOR INTERNAL FILTERS (continued)

All specifications at $T_A = 25^\circ\text{C}$, $V_{DD} = V_{CC} = 5\text{ V}$, slave mode, $f_S = 44.1\text{ kHz}$, 20-bit input data, and $\text{SYSCLK} = 384 f_S$, unless otherwise noted

otherwise noted

HIGH-PASS FILTER

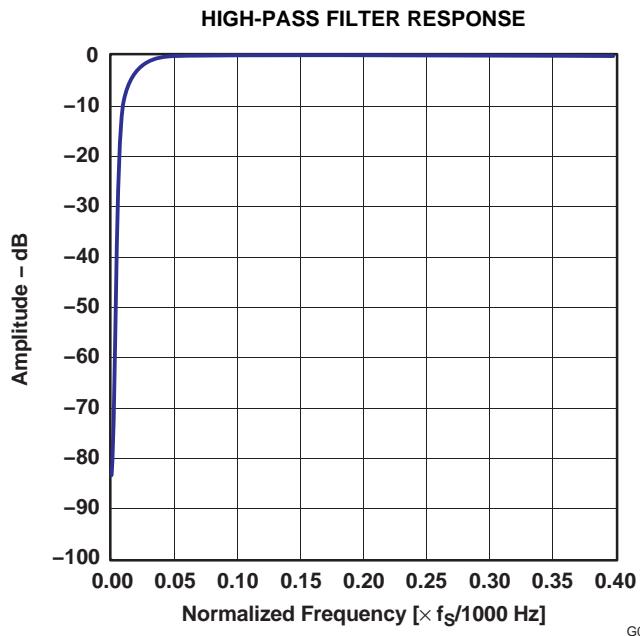


Figure 14.

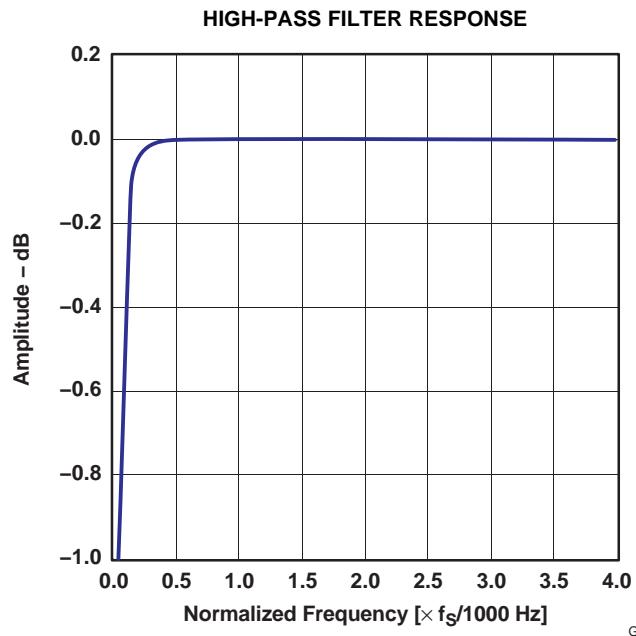


Figure 15.

ANTIALIASING FILTER

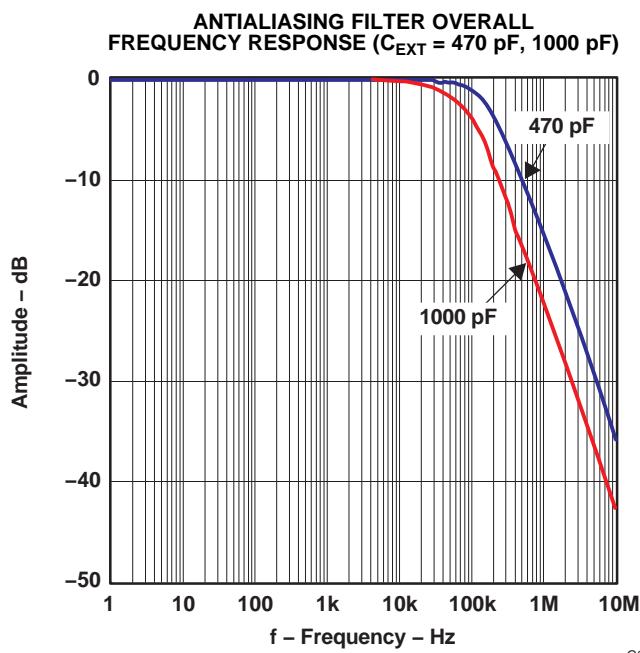


Figure 16.

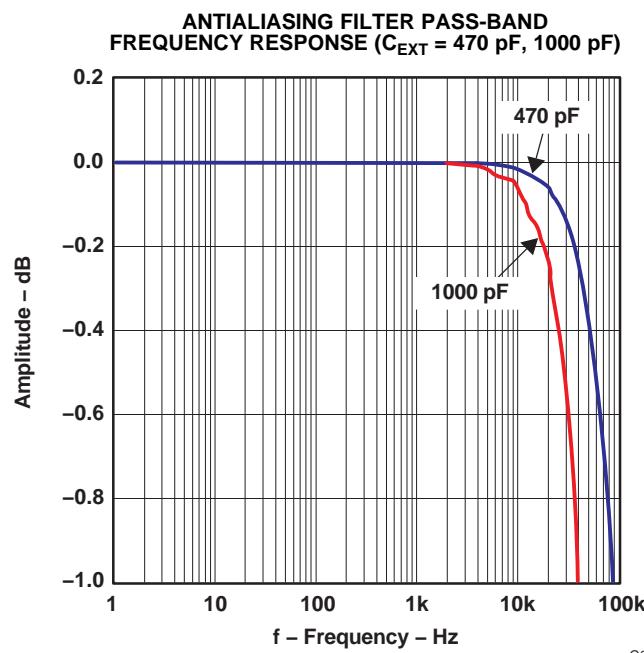


Figure 17.


THEORY OF OPERATION

The PCM1800 consists of a band-gap reference, two channels of a single-to-differential converter, a fully differential 5th-order delta-sigma modulator, a decimation filter (including digital high pass), and a serial interface circuit. The block diagram illustrates the total architecture of the PCM1800 and the analog front-end diagram illustrates the architecture of the single-to-differential converter and the antialiasing filter. [Figure 18](#) illustrates the architecture of the 5th-order delta-sigma modulator and transfer functions.

An internal high-precision reference with two external capacitors provides all the reference voltages that are required by the converter, and defines the full-scale voltage range of both channels. The internal single-to-differential voltage converter saves the design, space, and extra parts needed for external circuitry required by many delta-sigma converters. The internal full-differential architecture provides a wide dynamic range and excellent power-supply rejection performance.

The input signal is sampled at a 64x oversampling rate, eliminating the need for a sample-and-hold circuit, and simplifying antialias filtering requirements. The 5th-order delta-sigma noise shaper consists of five integrators which use a switched-capacitor topology, a comparator, and a feedback loop consisting of a 1-bit DAC. The delta-sigma modulator shapes the quantization noise, shifting it out of the audio band in the frequency domain. The high order of the modulator enables it to randomize the modulator outputs, reducing idle tone levels.

The 64- f_S , 1-bit stream from the modulator is converted to 1- f_S , 20-bit digital data by the decimation filter, which also acts as a low-pass filter to remove the shaped quantization noise. The dc components are removed by a high-pass filter, and the filtered output is converted to time-multiplexed serial signals through a serial interface which provides flexible serial formats and master/slave modes.

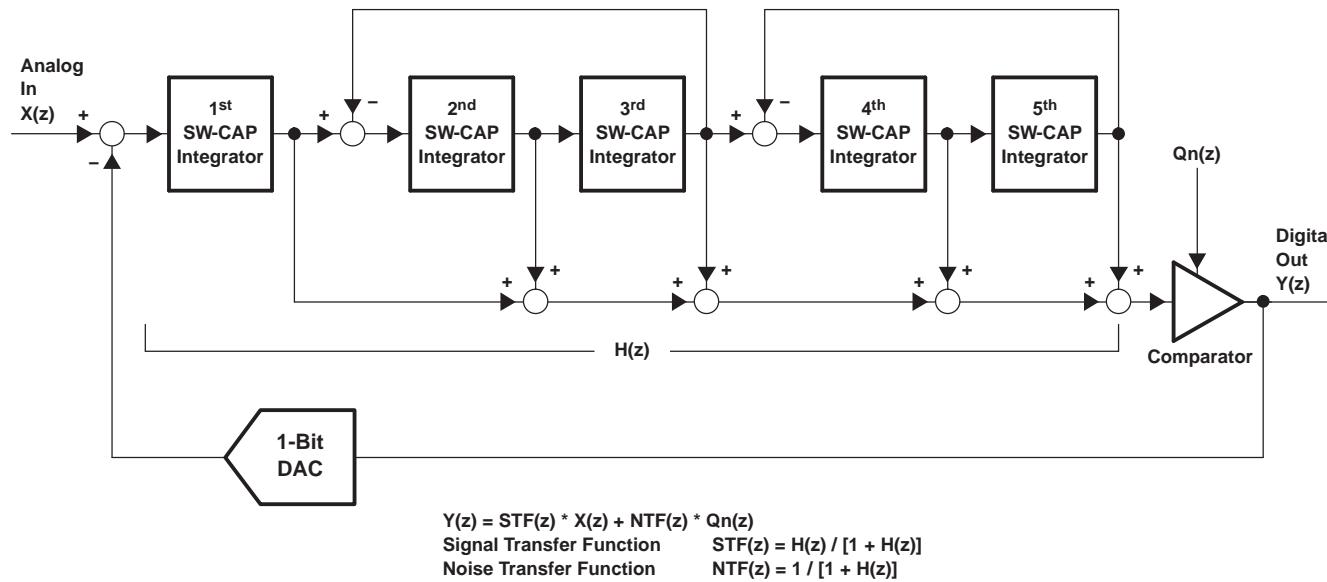

B0005-01

Figure 18. Simplified Diagram of the PCM1800 5th-Order Delta-Sigma Modulator

SYSTEM CLOCK


The system clock for the PCM1800 must be either 256 f_S , 384 f_S , or 512 f_S , where f_S is the audio sampling frequency. The system clock must be supplied on SYCLK (pin 16).

The PCM1800 also has a system-clock detection circuit which automatically senses if the system clock is operating at 256 f_S , 384 f_S , or 512 f_S .

When the 384- f_S or 512- f_S system clock is in slave mode, the system clock is divided into 256 f_S automatically. The 256- f_S clock is used to operate the digital filter and the modulator. [Table 1](#) lists the relationship of typical sampling frequencies and system clock frequencies. [Figure 19](#) illustrates the system clock timing.

Table 1. System Clock Frequencies

| SAMPLING RATE FREQUENCY (kHz) | SYSTEM CLOCK FREQUENCY (MHz) | | |
|----------------------------------|------------------------------|-----------|-----------|
| | 256 f_s | 384 f_s | 512 f_s |
| 32 | 8.1920 | 12.2880 | 16.3840 |
| 44.1 | 11.2896 | 16.9344 | 22.5792 |
| 48 | 12.2880 | 18.4320 | 24.5760 |

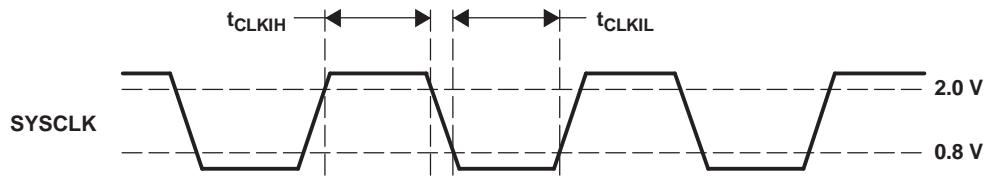

T0005-03


| | | |
|-----------------------------------|---------------|-------------|
| System clock pulse duration, HIGH | $t_{(CLKIH)}$ | 12 ns (min) |
| System clock pulse duration, LOW | $t_{(CLKIL)}$ | 12 ns (min) |

Figure 19. System Clock Timing

RESET AND POWER DOWN

The PCM1800 has both an internal power-on reset circuit and an external forced reset (RSTB, pin 6). The internal power-on reset initializes (resets) when the supply voltage (V_{CC}/V_{DD}) exceeds 4 V (typical). To initiate the reset sequence externally, apply a logic-level LOW to the RSTB pin.

The RSTB pin is terminated by an internal pulldown resistor. If the RSTB pin is unconnected, the ADC remains in the reset state. Because the system clock is used as the clock signal for the reset circuit, the system clock must be supplied as soon as power is applied; more specifically, the device must receive at least three system clock cycles before $V_{DD} > 4$ V and RSTB = HIGH. If this system clock requirement cannot be assured in an application, RSTB must be held LOW until the system clock is supplied. While $V_{CC}/V_{DD} < 4$ V (typical), RSTB = LOW, and for 1024 system clock periods after $V_{CC}/V_{DD} > 4.0$ V and RSTB = HIGH, the PCM1800 stays in the reset state and the digital output is forced to zero. The digital output is valid 18,436 f_s periods after release from the reset state. During reset, the logic circuits and the digital filter stop operating and enter the power-down mode. [Figure 20](#) and [Figure 21](#) illustrate the internal power-on reset and external reset timing.

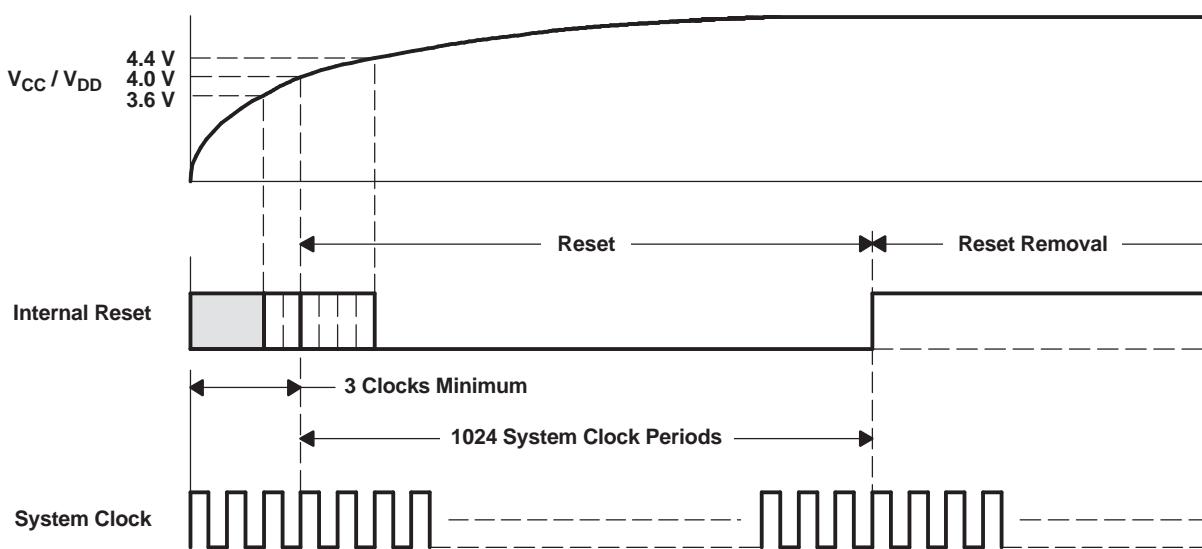

T0014-01

Figure 20. Internal Power-On Reset Timing

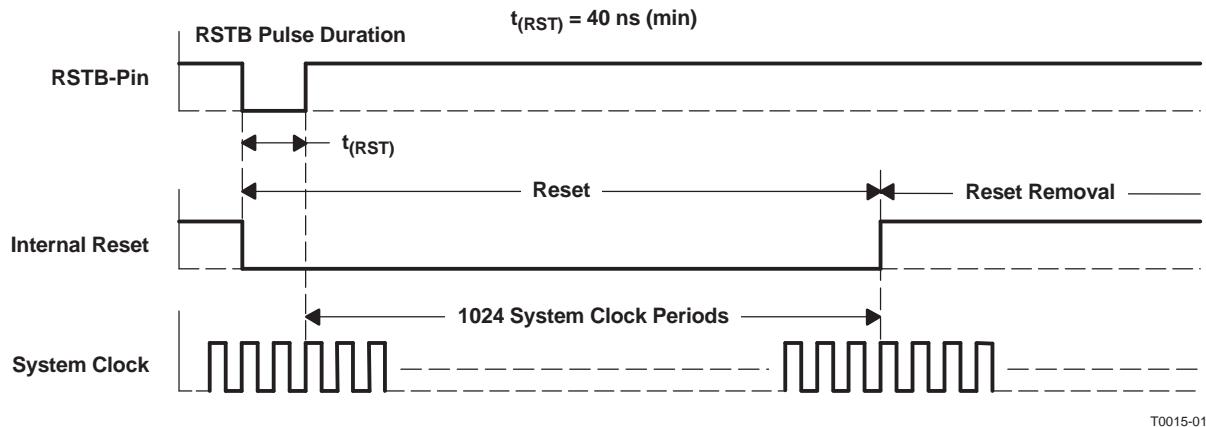


Figure 21. RSTB-Pin Reset Timing

SERIAL AUDIO DATA INTERFACE

The PCM1800 interfaces with the audio system through BCK (pin 14), LRCK (pin 13), FSYNC (pin 12), and DOUT (pin 15).

INTERFACE MODE

The PCM1800 supports master and slave modes as interface modes, which are selected by MODE1 (pin 11) and MODE0 (pin 10), as shown in [Table 2](#). When in master mode, the PCM1800 provides the timing for serial audio data communications between the PCM1800 and the digital audio processor or external circuit. When in slave mode, the PCM1800 receives the timing for data transfer from an external controller.

Table 2. Interface Mode

| MODE1 | MODE0 | INTERFACE MODE |
|-------|-------|---------------------------------|
| 0 | 0 | Slave mode (256/384/512 f_s) |
| 0 | 1 | Master mode (512 f_s) |
| 1 | 0 | Master mode (384 f_s) |
| 1 | 1 | Master mode (256 f_s) |

MASTER MODE

In master mode, BCK, LRCK, and FSYNC are output pins and are controlled by timing generated in the clock circuitry of the PCM1800.

FSYNC is used to designate the valid data from the PCM1800. The rising edge of FSYNC indicates the starting point of the converted audio data, and the following edge of this signal indicates the ending point of data. The frequency of this signal is fixed at 2x LRCK, and the duty-cycle ratio depends on the data bit length. The frequency of BCK is fixed at 64x LRCK.

SLAVE MODE

In slave mode, BCK, LRCK, and FSYNC are input pins. The PCM1800 accepts 64-BCK/LRCK, 48-BCK/LRCK (only for a 384- f_s system clock) or 32-BCK/LRCK format (only for 16-bit, right-justified format). FSYNC is used to enable the BCK signal, and the PCM1800 can shift out the converted data when FSYNC is HIGH.

DATA FORMAT

The PCM1800 supports four audio data formats in both master and slave modes. These data formats are selected by FMT1 (pin 9) and FMT0 (pin 8), as shown in [Table 3](#). [Figure 22](#) and [Figure 23](#) illustrate the data formats in slave mode and master mode, respectively.

Table 3. Data Format

| FORMAT NO. | FMT1 ⁽¹⁾ | FMT0 ⁽¹⁾ | DATA FORMAT |
|------------|---------------------|---------------------|--------------------------|
| 0 | 0 | 0 | 20-bit, left-justified |
| 1 | 0 | 1 | 20-bit, I ² S |
| 2 | 1 | 0 | 16-bit, right-justified |
| 3 | 1 | 1 | 20-bit, right-justified |


(1) FMT1 and FMT0 must be stable when RSTB changes from LOW to HIGH.

FORMAT 0: FMT[1:0] = 00


20-Bit, MSB-First, Left-Justified


FORMAT 1: FMT[1:0] = 01


20-Bit, MSB-First, I²S

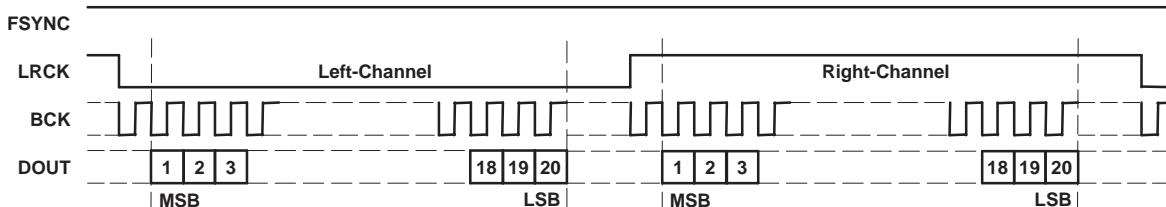
FORMAT 2: FMT[1:0] = 10

16-Bit, MSB-First, Right-Justified

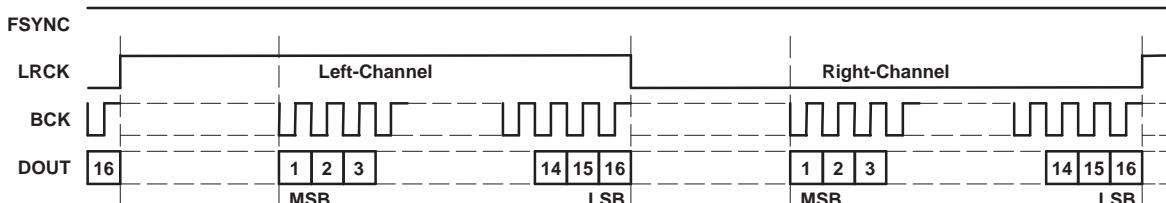
FORMAT 3: FMT[1:0] = 11

20-Bit, MSB-First, Right-Justified


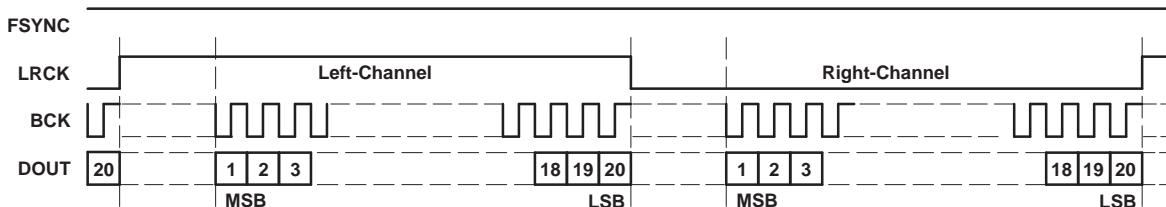


T0016-01


Figure 22. Audio Data Format (Slave Mode: FSYNC, LRCK, and BCK Are Inputs)

FORMAT 0: FMT[1:0] = 00


20-Bit, MSB-First, Left-Justified

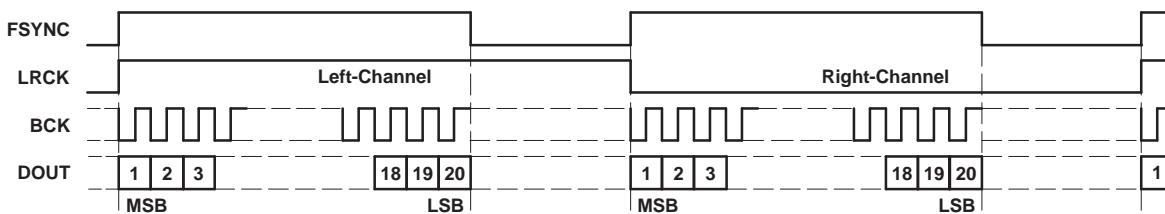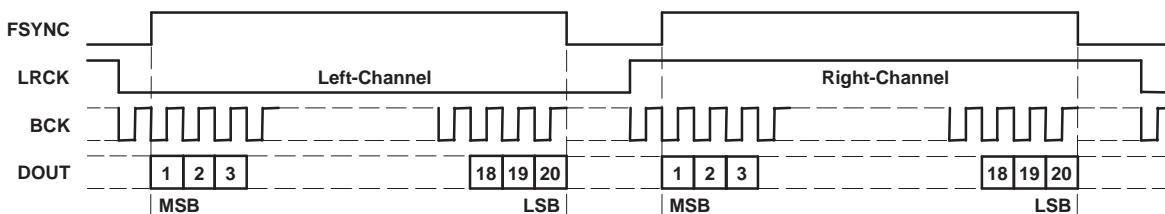**FORMAT 1: FMT[1:0] = 01**20-Bit, MSB-First, I²S**FORMAT 2: FMT[1:0] = 10**

16-Bit, MSB-First, Right-Justified

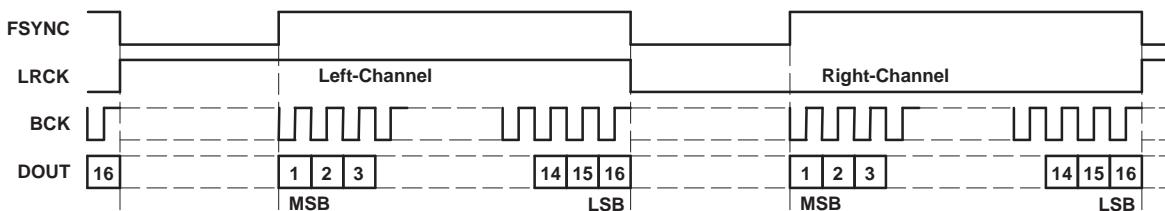**FORMAT 3: FMT[1:0] = 11**

20-Bit, MSB-First, Right-Justified

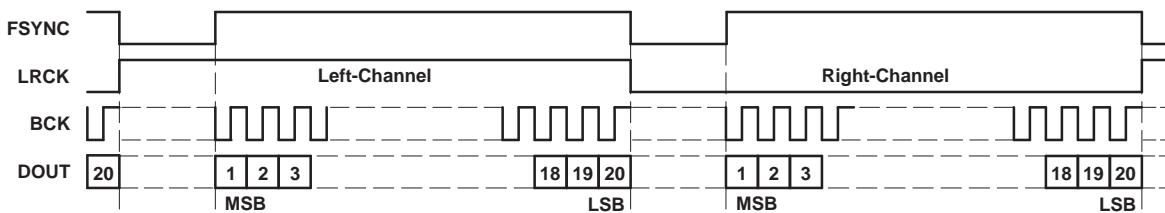


T0016-02

Figure 23. Audio Data Format (Master Mode: FSYNC, LRCK, and BCK Are Outputs)

INTERFACE TIMING


Figure 24 and Figure 25 illustrate the interface timing in slave mode and master mode, respectively.

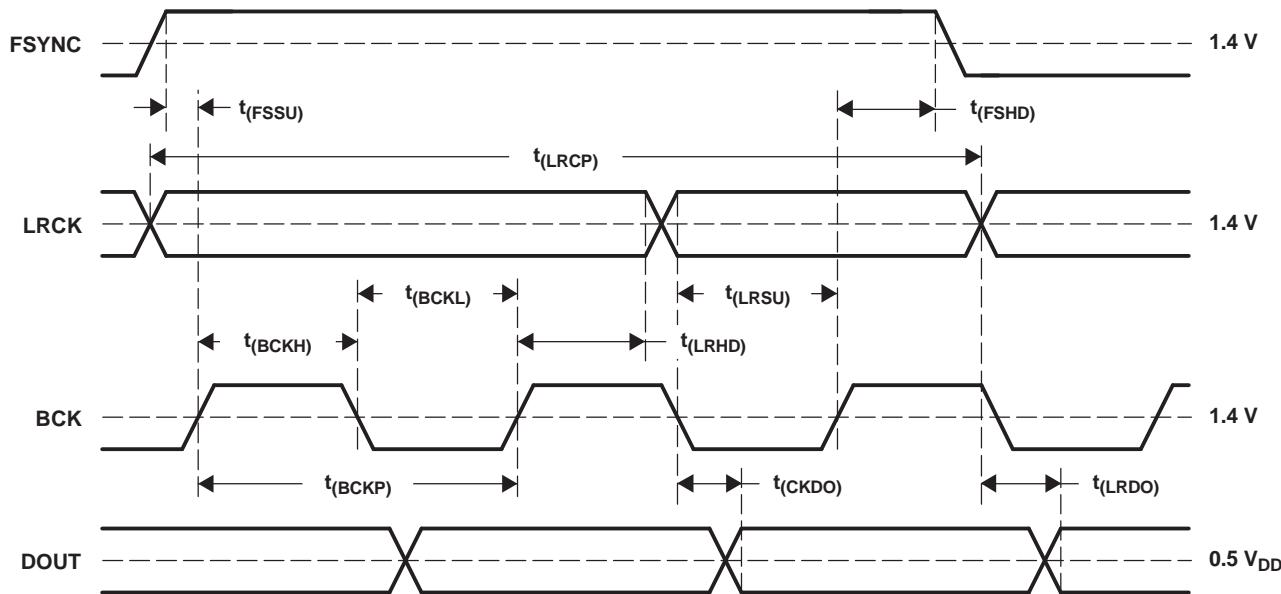

| DESCRIPTION | SYMBOL | MIN | TYP | MAX | UNITS |
|--|--------------|-----|-----|-----|-------|
| BCK period | $t_{(BCKP)}$ | 300 | | | ns |
| BCK pulse duration, HIGH | $t_{(BCKH)}$ | 120 | | | ns |
| BCK pulse duration, LOW | $t_{(BCKL)}$ | 120 | | | ns |
| LRCK setup time to BCK rising edge | $t_{(LRSU)}$ | 80 | | | ns |
| LRCK hold time to BCK rising edge | $t_{(LRHD)}$ | 40 | | | ns |
| LRCK period | $t_{(LRCP)}$ | 20 | | | μs |
| FSYNC setup time to BCK rising edge | $t_{(FSSU)}$ | 40 | | | ns |
| FSYNC hold time to BCK rising edge | $t_{(FSHD)}$ | 40 | | | ns |
| Delay time, BCK falling edge to DOUT valid | $t_{(CKDO)}$ | -20 | | 40 | ns |
| Delay time, LRCK edge to DOUT valid | $t_{(LRDO)}$ | -20 | | 40 | ns |
| Rising time of all signals | $t_{(RISE)}$ | | | 20 | ns |
| Falling time of all signals | $t_{(FALL)}$ | | | 20 | ns |

NOTE: Timing measurement reference level is $(V_{IH} + V_{IL})/2$. Rising and falling time is measured from 10% to 90% of the I/O signal swing. Load capacitance of the DOUT signal is 20 pF.

Figure 24. Audio Data Interface Timing (Slave Mode: FSYNC, LRCK, and BCK Are Inputs)

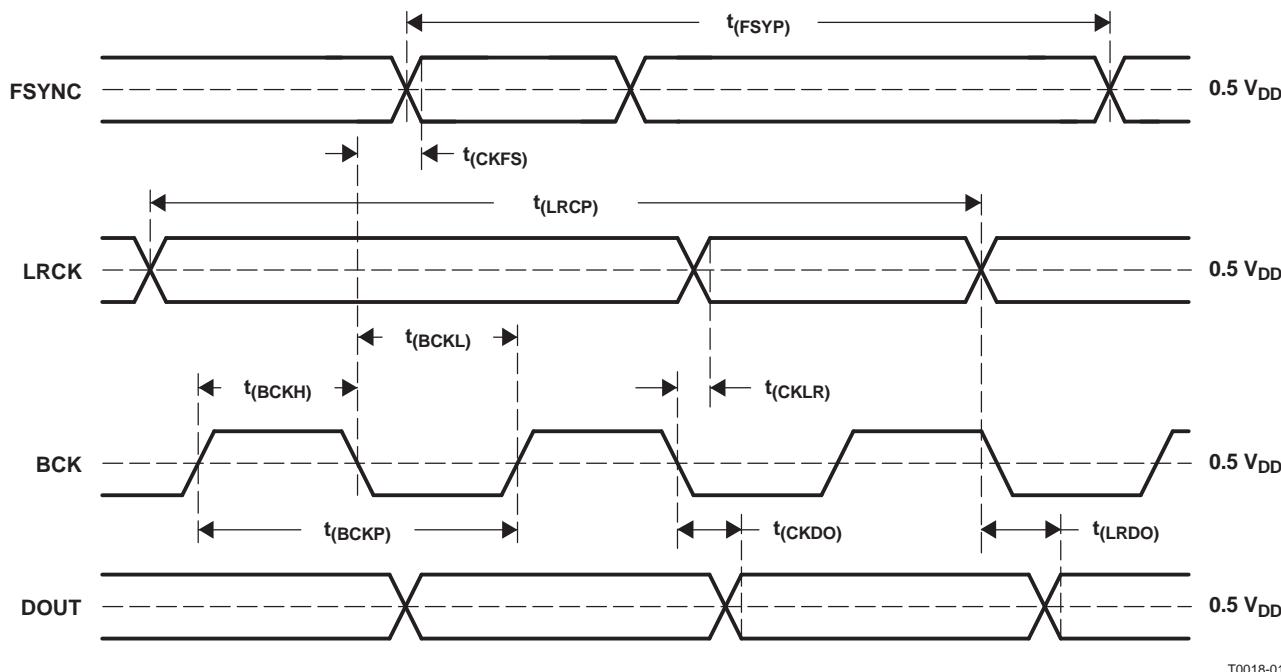

T0018-01

| DESCRIPTION | SYMBOL | MIN | TYP | MAX | UNITS |
|---|--------------|-----|------------|------|---------|
| BCK period | $t_{(BCKP)}$ | 300 | $1/64 f_S$ | 4800 | ns |
| BCK pulse duration, HIGH | $t_{(BCKH)}$ | 150 | | 2400 | ns |
| BCK pulse duration, LOW | $t_{(BCKL)}$ | 150 | | 2400 | ns |
| Delay time, BCK falling edge to LRCK valid | $t_{(CKLR)}$ | -20 | | 40 | ns |
| LRCK period | $t_{(LRCP)}$ | 20 | $1/f_S$ | 320 | μs |
| Delay time, BCK falling edge to FSYNC valid | $t_{(CKFS)}$ | -20 | | 40 | ns |
| FSYNC period | $t_{(FSYP)}$ | 10 | $1/2 f_S$ | 160 | μs |
| Delay time, BCK falling edge to DOUT valid | $t_{(CKDO)}$ | -20 | | 40 | ns |
| Delay time, LRCK edge to DOUT valid | $t_{(LRDO)}$ | -20 | | 40 | ns |
| Rising time of all signals | $t_{(RISE)}$ | | | 20 | ns |
| Falling time of all signals | $t_{(FALL)}$ | | | 20 | ns |

NOTE: Timing measurement reference level is $(V_{IH} + V_{IL})/2$. Rising and falling time is measured from 10% to 90% of the I/O signal swing. Load capacitance of the DOUT signal is 20 pF.


Figure 25. Audio Data Interface Timing (Master Mode: FSYNC, LRCK, and BCK Are Outputs)

SYNCHRONIZATION WITH DIGITAL AUDIO SYSTEM

In slave mode, the PCM1800 operates with LRCK synchronized to the system clock (SYSCLK). The PCM1800 does not require a specific phase relationship between LRCK and SYSCLK, but does require the synchronization of LRCK and SYSCLK. If the relationship between LRCK and SYSCLK changes more than 6 bit clocks (BCK) during one sample period due to LRCK or SYSCLK jitter, internal operation of the ADC halts within $1/f_S$ and the digital output is forced into the BPZ mode until resynchronization between LRCK and SYSCLK is completed. In case of changes less than 5 bit clocks (BCK), resynchronization does not occur, and the previously described digital output control and discontinuity does not occur.


ADC DATA OUTPUT AT RESET

Figure 26 and Figure 27 illustrate the ADC digital output when the reset operation is done and when synchronization is lost, respectively. During undefined data, some noise may be generated in the audio signal. Also, the transition of normal to undefined data and undefined or zero data to normal makes a discontinuity in the data on the digital output, and may generate some noise in the audio signal.

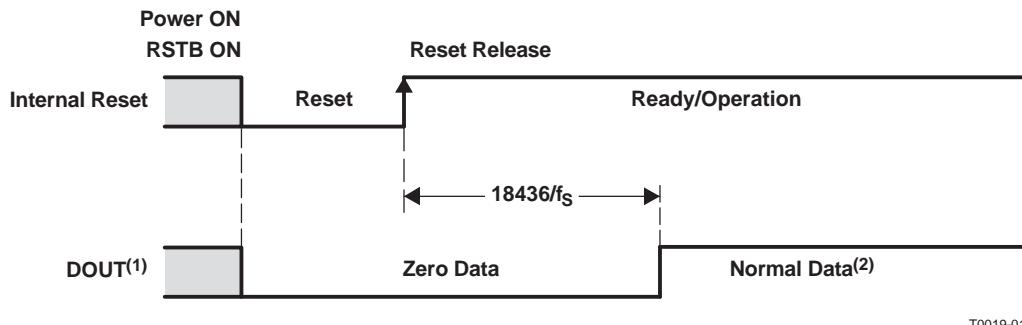

- (1) In the master mode, FSYNC, BCK, and LRCK are outputs similar to DOUT.
- (2) The HPF transient response (exponentially attenuated signal from $\pm 0.2\%$ dc of FSR with 200-ms time constant) appears initially.

Figure 26. ADC Digital Output for Power-On Reset and RSTB Control

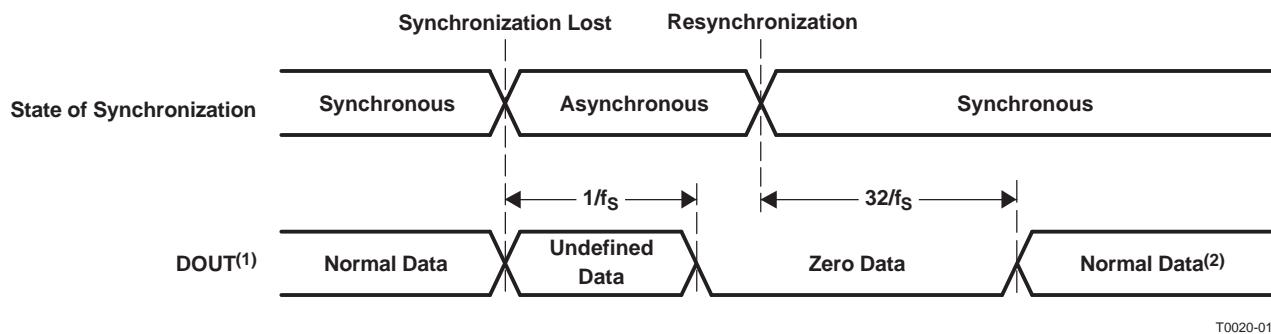

- (1) Applies only for slave mode—the loss of synchronization never occurs in master mode.
- (2) The HPF transient response (exponentially attenuated signal from $\pm 0.2\%$ dc of FSR with 200-ms time constant) appears initially.

Figure 27. ADC Digital Output During Loss of Synchronization Resynchronization

HPF BYPASS CONTROL

The built-in function for dc component rejection can be bypassed by BYPAS (pin 7) control (see [Table 4](#)). In bypass mode, the dc component of the input analog signal, the internal dc offset, etc., are also converted and output in the digital output data.

Table 4. HPF Bypass Control

| BYPAS | HIGH-PASS FILTER (HPF) MODE |
|-------|-----------------------------|
| Low | Normal (dc cut) mode |
| High | Bypass (through) mode |

APPLICATION INFORMATION

BOARD DESIGN AND LAYOUT CONSIDERATIONS

V_{CC} , V_{DD} PINS

The digital and analog power supply lines to the PCM1800 should be bypassed to the corresponding ground pins with both 0.1- μ F ceramic and 10- μ F tantalum capacitors as close to the pins as possible to maximize the dynamic performance of the ADC. Although the PCM1800 has two power lines to maximize the potential of dynamic performance, using one common power supply is recommended to avoid unexpected power supply problems, such as latch-up or power supply sequence.

AGND, DGND PINS

To maximize the dynamic performance of the PCM1800, the analog and digital grounds are not internally connected. These points should have low impedance to avoid digital noise feedback into the analog ground. They should be connected directly to each other under the part to reduce potential noise problems.

V_{IN} PINS

A 1- μ F tantalum capacitor is recommended as an ac-coupling capacitor, which establishes a 5.3-Hz cutoff frequency. If a higher full-scale input voltage is required, the input voltage range can be increased by adding a series resistor to the V_{IN} pins.

V_{REF} INPUTS

A 4.7- μ F tantalum capacitor is recommended between V_{REF1} , V_{REF2} , and REFCOM to ensure low source impedance for the ADC references. These capacitors should be located as close as possible to the V_{REF1} and V_{REF2} pins to reduce dynamic errors on the ADC references. The REFCOM pin also should be connected directly to AGND under the part.

C_{INP} and C_{INN} INPUTS

A 470-pF to 1000-pF film capacitor is recommended between C_{INPL} and C_{INNL} , C_{INPR} and C_{INNR} to create an antialiasing filter which has a 170-kHz to 80-kHz cutoff frequency. These capacitors should be located as close as possible to the C_{INP} and C_{INN} pins to avoid introducing unexpected noise or dynamic errors into the delta-sigma modulator. Four 10-pF–47-pF capacitors between C_{INXX} and AGND may improve dynamic performance under disadvantageous actual conditions.

DOUT, BCK, LRCK, FSYNC PINS

In master mode, the DOUT, BCK, LRCK and FSYNC pins have a large load-drive capability, but locating the buffer near the PCM1800 and minimizing the load capacitance is recommended in order to minimize the digital-analog crosstalk and to maximize dynamic performance potential.

SYSTEM CLOCK


The quality of the system clock can influence dynamic performance in the PCM1800. The duty cycle, jitter, and threshold voltage at the system clock input pin must be carefully managed. When power is supplied to the part, the system clock, bit clock (BCK), and word clock (LRCK) should also be supplied simultaneously. Failure to supply the audio clocks results in a power dissipation increase of up to three times normal dissipation and can degrade long-term reliability if the maximum power dissipation limit is exceeded.

RSTB CONTROL

If the capacitance between V_{REF1} and V_{REF2} exceeds 4.7 μ F, an external reset control with a delay-time circuit must be used.

TYPICAL CIRCUIT CONNECTION DIAGRAM

Figure 28 is a typical circuit connection diagram for which the cutoff frequency of the input HPF is about 5 Hz.

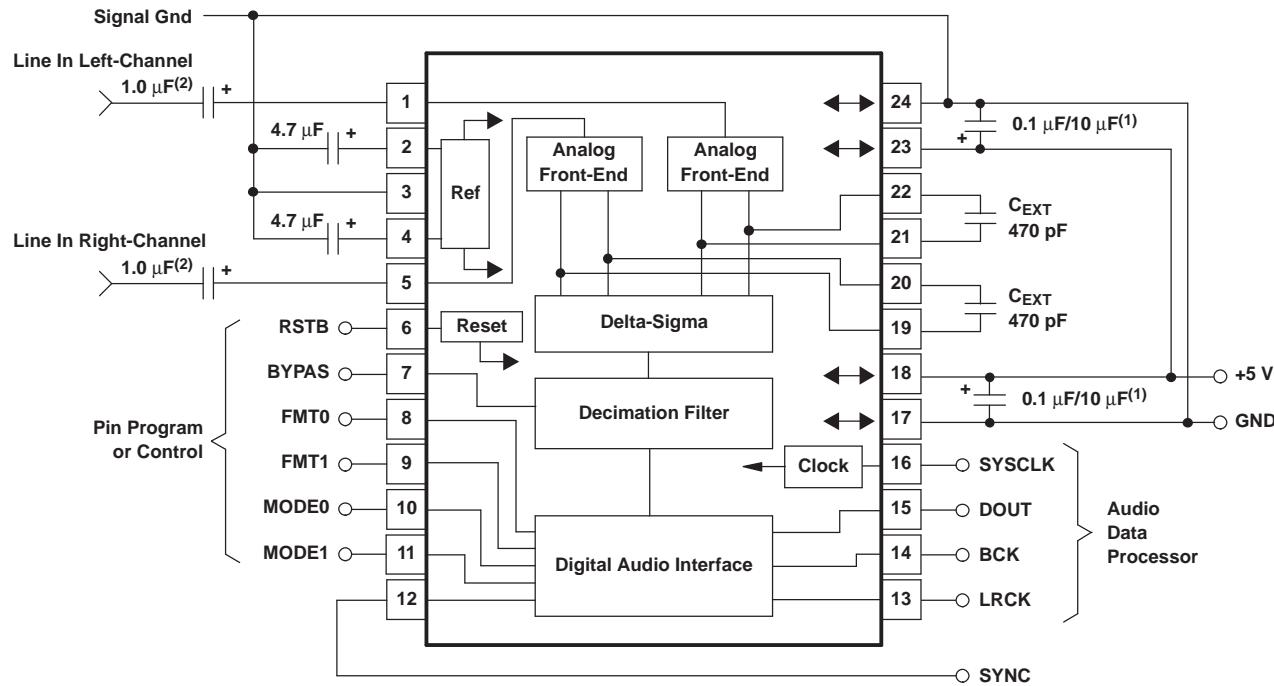

S0012-01

- (1) Bypass capacitor = 0.1- μ F ceramic and 10- μ F tantalum, depending on layout and power supply.
- (2) A 1- μ F capacitor gives a 5.3-Hz cutoff frequency for the input HPF in normal operation and requires a power-on settling period with a 30-ms time constant during power-on initialization.

Figure 28. Typical Circuit Connection

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-----------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|-----------------|---------------------|
| PCM1800E | Last Time Buy | Production | SSOP (DB) 24 | 58 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | - | PCM1800E |
| PCM1800E.B | Last Time Buy | Production | SSOP (DB) 24 | 58 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | See PCM1800E | PCM1800E |
| PCM1800E/2K | Last Time Buy | Production | SSOP (DB) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | - | PCM1800E |
| PCM1800E/2K.B | Last Time Buy | Production | SSOP (DB) 24 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | See PCM1800E/2K | PCM1800E |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a " ~ " will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS


| | |
|----|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |

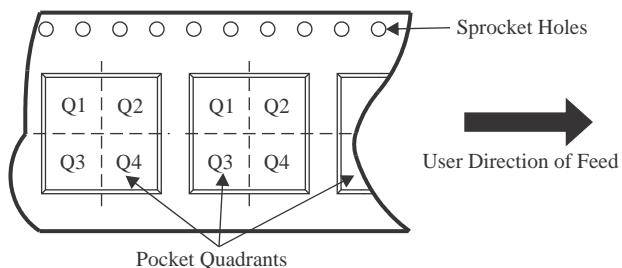QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


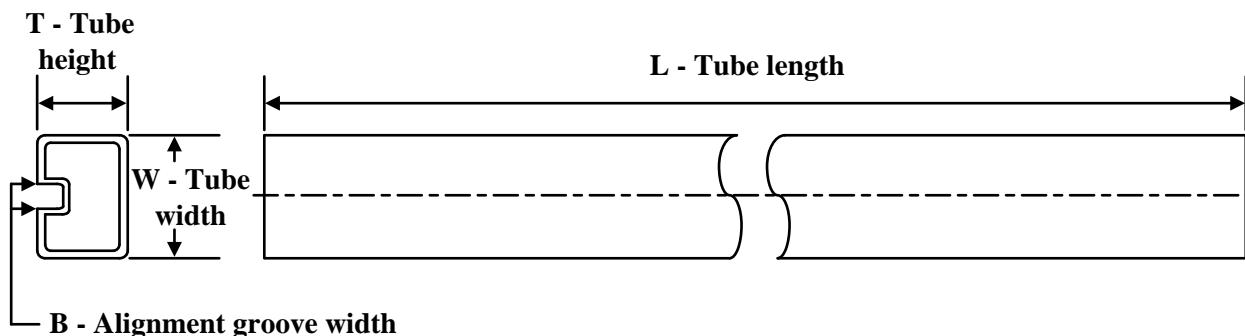
*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| PCM1800E/2K | SSOP | DB | 24 | 2000 | 330.0 | 17.4 | 8.5 | 8.6 | 2.4 | 12.0 | 16.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| PCM1800E/2K | SSOP | DB | 24 | 2000 | 336.6 | 336.6 | 28.6 |

TUBE


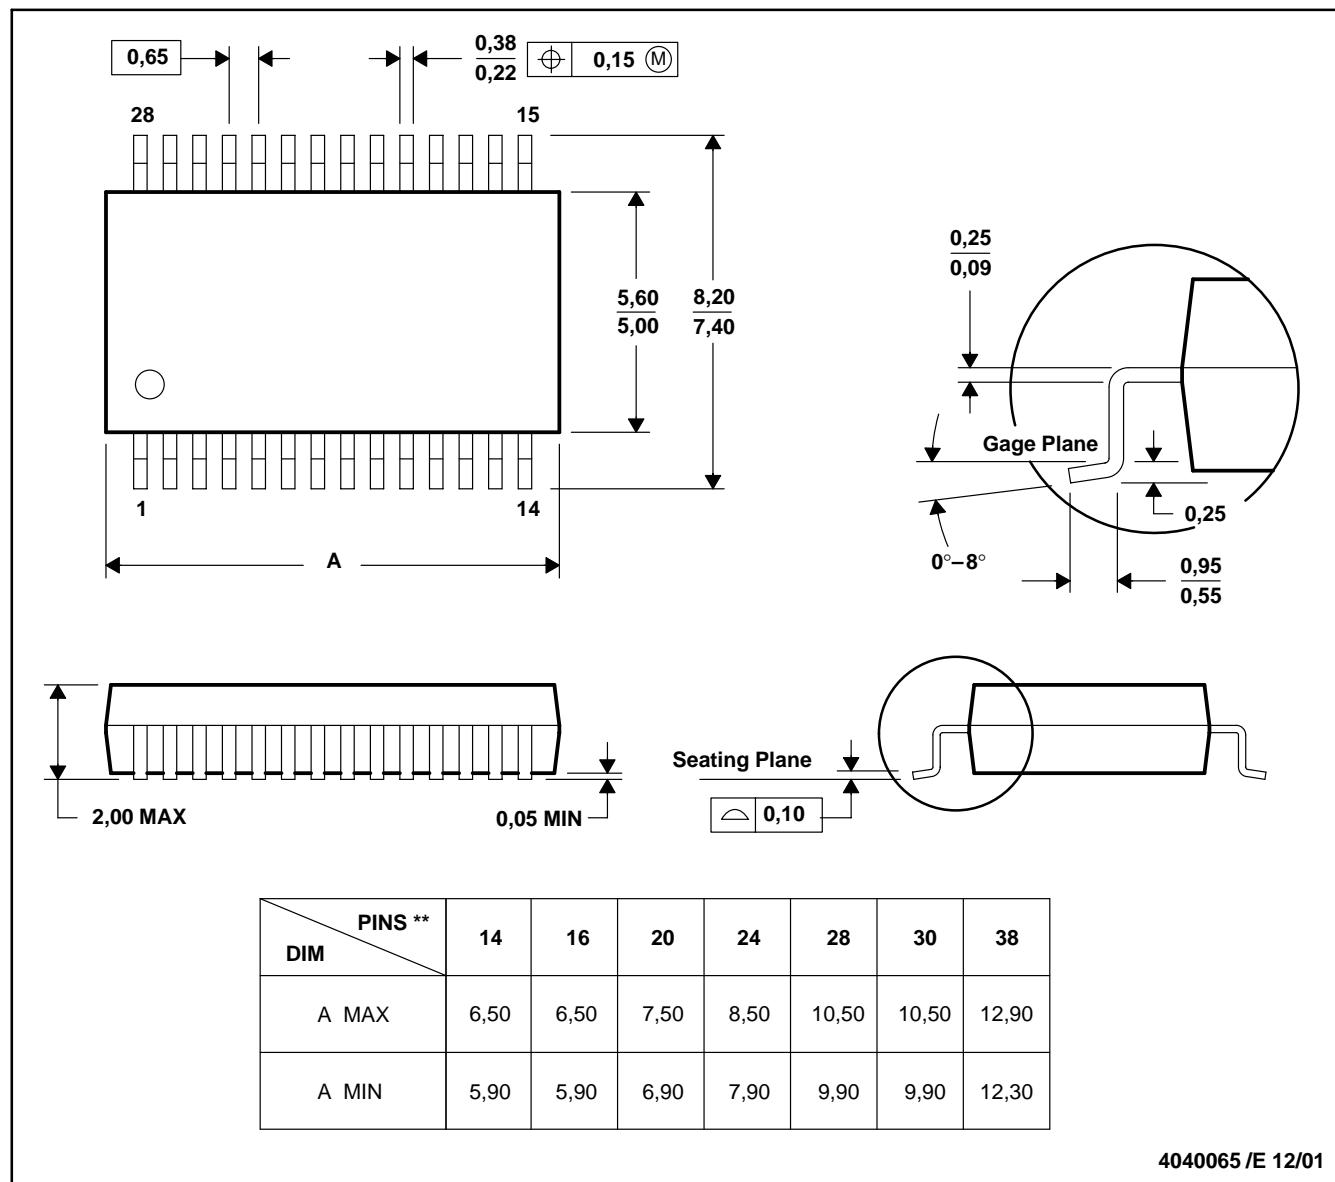
*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (µm) | B (mm) |
|------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| PCM1800E | DB | SSOP | 24 | 58 | 500 | 10.6 | 500 | 9.6 |
| PCM1800E.B | DB | SSOP | 24 | 58 | 500 | 10.6 | 500 | 9.6 |

DB (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

28 PINS SHOWN



NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
 D. Falls within JEDEC MO-150

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025