TLC2274M-MIL Advanced LinCMOS Rail-to-Rail Operational Amplifier

1 Features

- Output Swing Includes Both Supply Rails
- Low Noise: 9 nV/√Hz Typical at f = 1 kHz
- Low-Input Bias Current: 1-pA Typical
- Fully-Specified for Both Single-Supply and Split-Supply Operation
- Common-Mode Input Voltage Range Includes Negative Rail
- High-Gain Bandwidth: 2.2-MHz Typical
- High Slew Rate: 3.6-V/μs Typical
- Low Input Offset Voltage: 2.5 mV Maximum at T_A = 25°C
- Macromodel Included
- Performance Upgrades for the TLC272 and TLC274
- Available in Q-Temp Automotive

2 Applications

- White Goods (Refrigerators, Washing Machines)
- Hand-held Monitoring Systems
- Configuration Control and Print Support
- Transducer Interfaces
- Battery-Powered Applications

3 Description

The TLC2274M-MIL device is a quadruple operational amplifier from Texas Instruments. The device exhibits rail-to-rail output performance for increased dynamic range in single- or split-supply applications. The TLC2274M-MIL device offers 2 MHz of bandwidth and 3 V/μs of slew rate for higher-speed applications. Thee device offers comparable ac performance while having better noise, input offset voltage, and power dissipation than existing CMOS operational amplifiers. The TLC2274M-MIL device has a noise voltage of 9 nV/√Hz, two times lower than competitive solutions.

The TLC2274M-MIL device, exhibiting high input impedance and low noise, is excellent for small-signal conditioning for high-impedance sources such as piezoelectric transducers. Because of the micropower dissipation levels, the device works well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature, with single- or split-supplies, makes this device a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLC2272AM-MIL device is available with a maximum input offset voltage of 950 μV. This device is fully characterized at 5 V and ±5 V.

The TLC2274M-MIL device also makes a great upgrade to the TLC272 in standard designs, offering increased output dynamic range, lower noise voltage, and lower input offset voltage. This enhanced feature set allows the device to be used in a wider range of applications. For applications that require higher output drive and wider input voltage range, see the TLV2432 and TLV2442 devices.


If the design requires single amplifiers, see the TLV2211, TLV2221 and TLV2231 family. These devices are single rail-to-rail operational amplifiers in the SOT-23 package. Their small size and low power consumption make them ideal for high density, battery-powered equipment.

Device Information(1)

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TLC2274M-MIL	SOIC (14)	3,91 mm × 8,65 mm
	CDIP (14)	6,67 mm × 19,56 mm
	LCCC (20)	8,89 mm × 8,89 mm
	CFP (14)	6,35 mm × 19,30 mm
	PDIP (14)	6,35 mm × 19,30 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Maximum Peak-to-Peak Output Voltage vs Supply Voltage

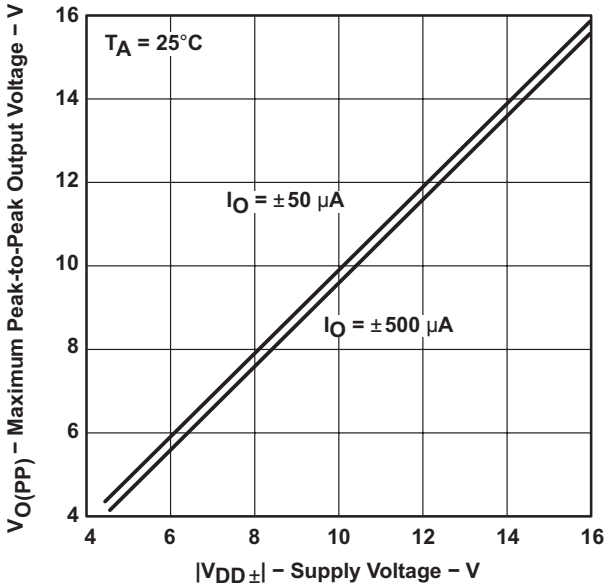

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features ... 1
2 Applications ... 1
3 Description ... 1
4 Revision History ... 2
5 Pin Configuration and Functions ... 3
6 Specifications ... 5
6.1 Absolute Maximum Ratings ... 5
6.2 ESD Ratings ... 5
6.3 Recommended Operating Conditions ... 5
6.4 Thermal Information ... 5
6.5 TLC2274M-MIL Electrical Characteristics V_{DD} = 5 V 6
6.6 TLC2274M-MIL Electrical Characteristics V_{DD}± = ±5 V ... 8
6.7 Typical Characteristics ... 9
7 Detailed Description ... 19
7.1 Overview ... 19
7.2 Functional Block Diagram ... 19
7.3 Feature Description ... 19
7.4 Device Functional Modes ... 19
8 Application and Implementation ... 20
8.1 Application Information ... 20
8.2 Typical Application ... 21
9 Power Supply Recommendations ... 23
10 Layout ... 24
10.1 Layout Guidelines ... 24
10.2 Layout Example ... 24
11 Device and Documentation Support ... 25
11.1 Receiving Notification of Documentation Updates 25
11.2 Community Resources ... 25
11.3 Trademarks ... 25
11.4 Electrostatic Discharge Caution ... 25
11.5 Glossary ... 25
12 Mechanical, Packaging, and Orderable Information ... 25


4 Revision History

DATE	REVISION	NOTE
June 2017	*	Initial release

Copyright © 2017, Texas Instruments Incorporated


5 Pin Configuration and Functions

D, J, or N Package
14-Pin SOIC, CDIP, or PDIP
Top View

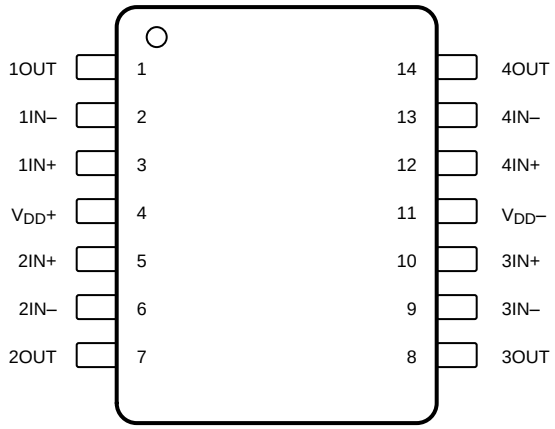

Not to scale


FK Package
20-Pin LCCC
Top View

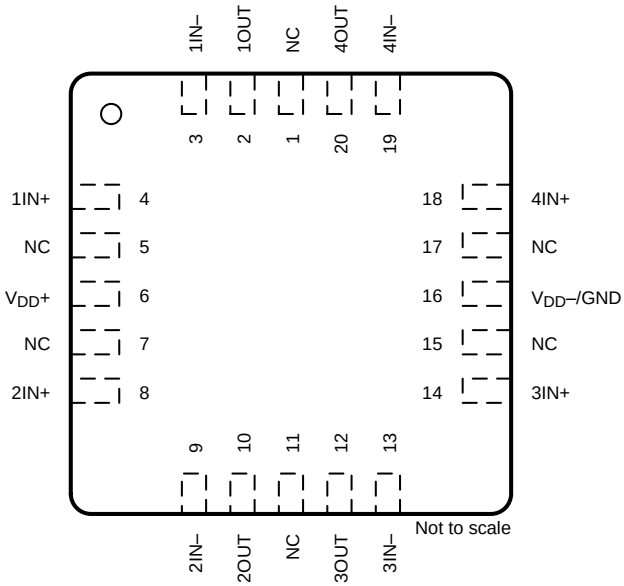

Not to scale

NC – No internal connection

W Package
10-Pin CFP
Top View

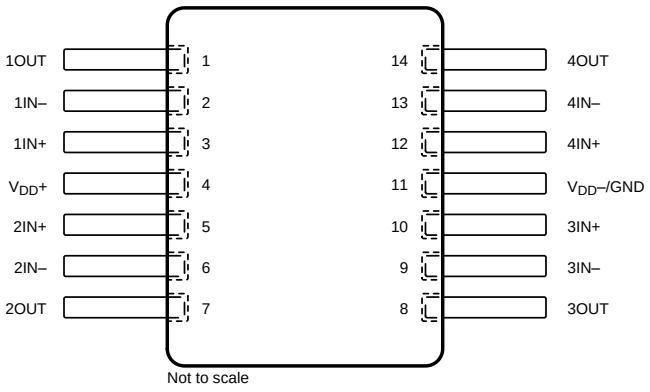

Not to scale

NC – No internal connection

Pin Functions

PIN			I/O	DESCRIPTION
NAME	NO.			
	D, J, N, or W	FK		
1IN+	3	4	I	Non-inverting input, Channel 1
1IN–	2	3	I	Inverting input, Channel 1
1OUT	1	2	O	Output, Channel 1
2IN+	5	8	I	Non-inverting input, Channel 2
2IN–	6	9	I	Inverting input, Channel 2
2OUT	7	10	O	Output, Channel 2
3IN+	10	14	I	Non-inverting input, Channel 3
3IN–	9	13	I	Inverting input, Channel 3
3OUT	8	12	O	Output, Channel 3
4IN+	12	18	I	Non-inverting input, Channel 4
4IN–	13	19	I	Inverting input, Channel 4
4OUT	14	20	O	Output, Channel 4
V_{DD}+	4	6	—	Positive (highest) supply
V_{DD}–	11	16	—	Negative (lowest) supply
V_{DD}–/GND	—	—	—	Negative (lowest) supply
NC	—	1, 5, 7, 11, 15, 17	—	No connection

Copyright © 2017, Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating ambient temperature range (unless otherwise noted)(1)

	MIN	MAX	UNIT
Supply voltage, V_{DD}+(2)		8	V
V_{DD}–(2)	–8		V
Differential input voltage, V_{ID}(3)		±16	V
Input voltage, V_I (any input)(2)	V_{DD}– – 0.3	V_{DD}+	V
Input current, I_I (any input)		±5	mA
Output current, I_O		±50	mA
Total current into V_{DD}+		±50	mA
Total current out of V_{DD}–		±50	mA
Duration of short-circuit current at (or below) 25°C(4)	Unlimited		
Operating ambient temperature range, T_A	–55	125	
Storage temperature, T_{stg}	–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) All voltage values, except differential voltages, are with respect to the midpoint between V_{DD}+ and V_{DD}–.
(3) Differential voltages are at IN+ with respect to IN–. Excessive current will flow if input is brought below V_{DD}– – 0.3 V.
(4) The output may be shorted to either supply. Temperature or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$ Electrostatic discharge	Human-body model (HBM), per AEC Q100-002(1)	Devices in D packages	±2000	V
	Charged-device model (CDM), per AEC Q100-011	Devices in D packages	±1000	

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

		MIN	MAX	UNIT
V_{DD}±	Supply voltage	±2.2	±8	V
V_I	Input voltage	V_{DD}–	V_{DD}+ – 1.5	V
V_{IC}	Common-mode input voltage	V_{DD}–	V_{DD}+ – 1.5	V
T_A	Operating ambient temperature	–55	125	°C

6.4 Thermal Information

THERMAL METRIC(1)		TLC2274M-MIL					UNIT
		D (SOIC)	J (CDIP)	FK (LCCC)	N (PDIP)	W (CFP)	
		14-PIN	14-PIN	20-PIN	14-PIN	14-PIN	
$R_{\theta JA}$	Junction-to-ambient thermal resistance (2)(3)	115.6	—	—		—	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance (2)(3)	61.8	16.2	18		121.3	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	55.9	—	—		—	°C/W
ψ_{JT}	Junction-to-top characterization parameter	14.3	—	—		—	°C/W
ψ_{JB}	Junction-to-board characterization parameter	55.4	—	—		—	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	—	—	—		8.68	°C/W

(1) For more information about traditional and new thermal metrics, see *Semiconductor and IC Package Thermal Metrics*.
(2) Maximum power dissipation is a function of $T_{J(max)}$, $R_{\theta JA}$, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_{J(max)} - T_A) / R_{\theta JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
(3) The package thermal impedance is calculated in accordance with JESD 51-7 (plastic) or MIL-STD-883 Method 1012 (ceramic).

Copyright © 2017, Texas Instruments Incorporated

6.5 TLC2274M-MIL Electrical Characteristics V_{DD} = 5 V

at specified ambient temperature, V_{DD} = 5 V; T_A = 25°C, unless otherwise noted.

PARAMETER		TEST CONDITIONS			MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	V_{IC} = 0 V, $V_{DD±}$ = ±2.5 V, V_O = 0 V, R_S = 50 Ω	T_A = 25°C			300	2500	µV
			T_A = –55°C to 125°C				3000	
α_{VIO}	Temperature coefficient of input offset voltage	V_{IC} = 0 V, $V_{DD±}$ = ±2.5 V, V_O = 0 V, R_S = 50 Ω				2		µV/°C
	Input offset voltage long-term drift(1)	V_{IC} = 0 V, $V_{DD±}$ = ±2.5 V, V_O = 0 V, R_S = 50 Ω				0.002		µV/mo
I_{IO}	Input offset current	V_{IC} = 0 V, $V_{DD±}$ = ±2.5 V, V_O = 0 V, R_S = 50 Ω	T_A = 25°C			0.5	60	pA
			T_A = –55°C to 125°C				800	
I_{IB}	Input bias current	V_{IC} = 0 V, $V_{DD±}$ = ±2.5 V, V_O = 0 V, R_S = 50 Ω	T_A = 25°C			1	60	pA
			T_A = –55°C to 125°C				800	
V_{ICR}	Common-mode input voltage	R_S = 50 Ω; $\|V_{IO}\|$ ≤ 5 mV	T_A = 25°C		–0.3	2.5	4	V
			T_A = –55°C to 125°C		0	2.5	3.5	
V_{OH}	High-level output voltage	I_{OH} = –20 µA				4.99		V
		I_{OH} = –200 µA	T_A = 25°C		4.85	4.93		
			T_A = –55°C to 125°C		4.85			
		I_{OH} = –1 mA	T_A = 25°C		4.25	4.65		
			T_A = –55°C to 125°C		4.25			
V_{OL}	Low-level output voltage	V_{IC} = 2.5 V	I_{OL} = 50 µA			0.01		V
			I_{OL} = 500 µA	T_A = 25°C		0.09	0.15	
				T_A = –55°C to 125°C			0.15	
			I_{OL} = 5 mA	T_A = 25°C		0.9	1.5	
				T_A = –55°C to 125°C			1.5	
A_{VD}	Large-signal differential voltage amplification	V_{IC} = 2.5 V, V_O = 1 V to 4 V, R_L = 10 kΩ(2)	T_A = 25°C		15	35		V/mV
			T_A = –55°C to 125°C		15			
		V_{IC} = 2.5 V, V_O = 1 V to 4 V; R_L = 1 MΩ(2)				175		
r_{id}	Differential input resistance					10^{12}		Ω
r_i	Common-mode input resistance					10^{12}		Ω
c_i	Common-mode input capacitance	f = 10 kHz, P package				8		pF
z_o	Closed-loop output impedance	f = 1 MHz, A_V = 10				140		Ω
CMRR	Common-mode rejection ratio	V_{IC} = 0 V to 2.7 V, V_O = 2.5 V, R_S = 50 Ω	T_A = 25°C		70	75		dB
			T_A = –55°C to 125°C		70			
k_{SVR}	Supply-voltage rejection ratio (ΔV_{DD} / ΔV_{IO})	V_{DD} = 4.4 V to 16 V, V_{IC} = V_{DD} / 2, no load	T_A = 25°C		80	95		dB
			T_A = –55°C to 125°C		80			
I_{DD}	Supply currrent	V_O = 2.5 V, no load	T_A = 25°C			4.4	6	mA
			T_A = –55°C to 125°C				3	
SR	Slew rate at unity gain	V_O = 0.5 V to 2.5 V, R_L = 10 kΩ(2), C_L = 100 pF(2)	T_A = 25°C		2.3	3.6		V/µs
			T_A = –55°C to 125°C		1.7			
V_n	Equivalent input noise voltage	f = 10 Hz				50		nV/√Hz
		f = 1 kHz				9		
V_{NPP}	Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 1 Hz				1		µV
		f = 0.1 Hz to 10 Hz				1.4		
I_n	Equivalent input noise current					0.6		fA/√Hz
THD+N	Total harmonic distortion + noise	V_O = 0.5 V to 2.5 V, f = 20 kHz, R_L = 10 kΩ(2)	A_V = 1			0.0013%		
			A_V = 10			0.004%		
			A_V = 100			0.03%		
	Gain-bandwidth product	f = 10 kHz, R_L = 10 kΩ(2), C_L = 100 pF(2)				2.18		MHz
B_{OM}	Maximum output-swing bandwidth	$V_{O(PP)}$ = 2 V, A_V = 1, R_L = 10 kΩ(2), C_L = 100 pF(2)				1		MHz
t_s	Settling time	A_V = –1, R_L = 10 kΩ(2), Step = 0.5 V to 2.5 V, C_L = 100 pF(2)	To 0.1%			1.5		µs
			To 0.01%			2.6		

(1) Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.
(2) Referenced to 0 V.

Copyright © 2017, Texas Instruments Incorporated

TLC2274M-MIL Electrical Characteristics V_{DD} = 5 V (continued)

at specified ambient temperature, V_{DD} = 5 V; T_A = 25°C, unless otherwise noted.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
φ_m	Phase margin at unity gain	R_L = 10 kΩ(2), C_L = 100 pF(2)		50		°
	Gain margin	R_L = 10 kΩ(2), C_L = 100 pF(2)		10		dB

6.6 TLC2274M-MIL Electrical Characteristics V_{DD}± = ±5 V

at specified ambient temperature, V_{DD}± = ±5 V; T_A = 25°C, unless otherwise noted.

PARAMETER		TEST CONDITIONS			MIN	TYP	MAX	UNIT
V_{IO}	Input offset voltage	V_{IC} = 0 V, V_O = 0 V, R_S = 50 Ω		T_A = 25°C		300	2500	µV
				T_A = –55°C to 125°C			3000	
α_{VIO}	Temperature coefficient of input offset voltage	V_{IC} = 0 V, V_O = 0 V, R_S = 50 Ω				2		µV/°C
	Input offset voltage long-term drift	V_{IC} = 0 V, V_O = 0 V, R_S = 50 Ω				0.002		µV/mo
I_{IO}	Input offset current	V_{IC} = 0 V, V_O = 0 V, R_S = 50 Ω		T_A = 25°C		0.5	60	pA
				T_A = –55°C to 125°C			800	
I_{IB}	Input bias current	V_{IC} = 0 V, V_O = 0 V, R_S = 50 Ω		T_A = 25°C		1	60	pA
				T_A = –55°C to 125°C			800	
V_{ICR}	Common-mode input voltage	R_S = 50 Ω; $\lvert V_{IO} \rvert$ ≤ 5 mV		T_A = 25°C	–5.3	0	4	V
				T_A = –55°C to 125°C	–5	0	3.5	
V_{OM}+	Maximum positive peak output voltage	I_O = –20 µA				4.99		V
		I_O = –200 µA		T_A = 25°C	4.85	4.93		
				T_A = –55°C to 125°C	4.85			
		I_O = –1 mA		T_A = 25°C	4.25	4.65		
				T_A = –55°C to 125°C	4.25			
V_{OM}–	Maximum negative peak output voltage	V_{IC} = 0 V,	I_O = 50 µA			–4.99		V
			I_O = 500 µA	T_A = 25°C	–4.85	–4.91		
				T_A = –55°C to 125°C	–4.85			
			I_O = 5 mA	T_A = 25°C	–3.5	–4.1		
				T_A = –55°C to 125°C	–3.5			
A_{VD}	Large-signal differential voltage amplification	V_O = ±4 V; R_L = 10 kΩ		T_A = 25°C	20	50		V/mV
				T_A = –55°C to 125°C	20			
		V_O = ±4 V; R_L = 1 MΩ				300		
r_{id}	Differential input resistance					10^{12}		Ω
r_i	Common-mode input resistance					10^{12}		Ω
c_i	Common-mode input capacitance	f = 10 kHz, P package				8		pF
z_o	Closed-loop output impedance	f = 1 MHz, A_V = 10				130		Ω
CMRR	Common-mode rejection ratio	V_{IC} = –5 V to 2.7 V, V_O = 0 V, R_S = 50 Ω		T_A = 25°C	75	80		dB
				T_A = –55°C to 125°C	75			
k_{SVR}	Supply-voltage rejection ratio (ΔV_{DD} / ΔV_{IO})	V_{DD+} = 2.2 V to ±8 V, V_{IC} = 0 V, no load		T_A = 25°C	80	95		dB
				T_A = –55°C to 125°C	80			
I_{DD}	Supply currrent	V_O = 0 V, no load		T_A = 25°C		4.8	6	mA
				T_A = –55°C to 125°C			6	
SR	Slew rate at unity gain	V_O = ±2.3 V, R_L = 10 kΩ, C_L = 100 pF		T_A = 25°C	2.3	3.6		V/µs
				T_A = –55°C to 125°C	1.7			
V_n	Equivalent input noise voltage	f = 10 Hz				50		nV/√Hz
		f = 1 kHz				9		
V_{NPP}	Peak-to-peak equivalent input noise voltage	f = 0.1 Hz to 1 Hz				1		µV
		f = 0.1 Hz to 10 Hz				1.4		
I_n	Equivalent input noise current					0.6		fA/√Hz
THD+N	Total harmonic distortion + noise	V_O = ±2.3, f = 20 kHz, R_L = 10 kΩ		A_V = 1		0.0011%		
				A_V = 10		0.004%		
				A_V = 100		0.03%		
	Gain-bandwidth product	f = 10 kHz, R_L = 10 kΩ, C_L = 100 pF				2.25		MHz
B_{OM}	Maximum output-swing bandwidth	$V_{O(PP)}$ = 4.6 V, A_V = 1, R_L = 10 kΩ, C_L = 100 pF				0.54		MHz
t_s	Settling time	A_V = –1, R_L = 10 kΩ, Step = –2.3 V to 2.3 V, C_L = 100 pF		To 0.1%		1.5		µs
				To 0.01%		3.2		
φ_m	Phase margin at unity gain	R_L = 10 kΩ, C_L = 100 pF				52		°
	Gain margin	R_L = 10 kΩ, C_L = 100 pF				10		dB

Copyright © 2017, Texas Instruments Incorporated

6.7 Typical Characteristics

Table 1. Table of Graphs

			FIGURE (1)
V_{IO}	Input offset voltage	Distribution	1, 2
		vs Common-mode voltage	3, 4
α_{VIO}	Input offset voltage temperature coefficient	Distribution	5, 6 (2)
I_{IB} /I_{IO}	Input bias and input offset current	vs Ambient temperature	7 (2)
V_I	Input voltage	vs Supply voltage	8
		vs Ambient temperature	9 (2)
V_{OH}	High-level output voltage	vs High-level output current	10 (2)
V_{OL}	Low-level output voltage	vs Low-level output current	11, 12 (2)
V_{OM+}	Maximum positive peak output voltage	vs Output current	13 (2)
V_{OM-}	Maximum negative peak output voltage	vs Output current	14 (2)
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	15
I_{OS}	Short-circuit output current	vs Supply voltage	16
		vs Ambient temperature	17 (2)
V_O	Output voltage	vs Differential input voltage	18, 19
A_{VD}	Large-signal differential voltage amplification	vs Load resistance	20
	Large-signal differential voltage amplification and phase margin	vs Frequency	21, 22
	Large-signal differential voltage amplification	vs Ambient temperature	23 (2), 24 (2)
z_0	Output impedance	vs Frequency	25, 26
CMRR	Common-mode rejection ratio	vs Frequency	27
		vs Ambient temperature	28
k_{SVR}	Supply-voltage rejection ratio	vs Frequency	29, 30
		vs Ambient temperature	31 (2)
I_{DD}	Supply current	vs Supply voltage	(2), 32 (2)
		vs Ambient temperature	(2), 33 (2)
SR	Slew rate	vs Load Capacitance	34
		vs Ambient temperature	35 (2)
V_O	Inverting large-signal pulse response		36, 37
	Voltage-follower large-signal pulse response		38, 39
	Inverting small-signal pulse response		40, 41
	Voltage-follower small-signal pulse response		42, 43
V_n	Equivalent input noise voltage	vs Frequency	44, 45
	Noise voltage over a 10-second period		46
	Integrated noise voltage	vs Frequency	47
THD+N	Total harmonic distortion + noise	vs Frequency	48
	Gain-bandwidth product	vs Supply voltage	49
		vs Ambient temperature	50 (2)
φ_m	Phase margin	vs Load capacitance	51
	Gain margin	vs Load capacitance	52

(1) For all graphs where V_{DD} = 5 V, all loads are referenced to 2.5 V.
(2) Data at high and low temperatures are applicable only within the rated operating ambient temperature ranges of the various devices.

Copyright © 2017, Texas Instruments Incorporated

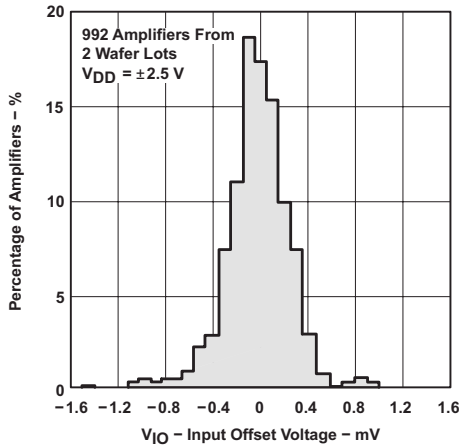


Figure 1. Distribution of Input Offset Voltage

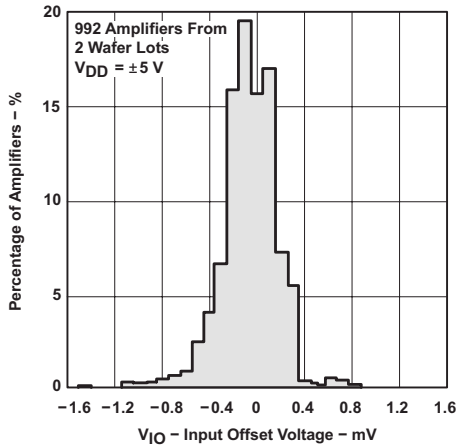


Figure 2. Distribution of Input Offset Voltage

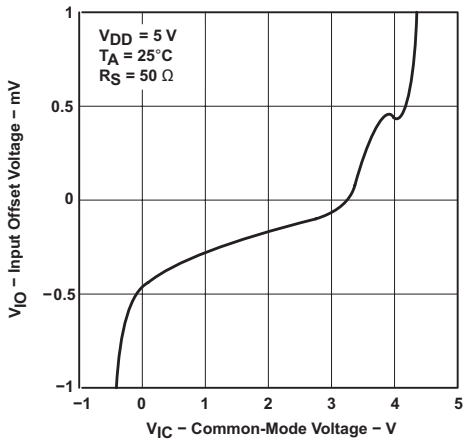


Figure 3. Input Offset Voltage vs Common-Mode Voltage

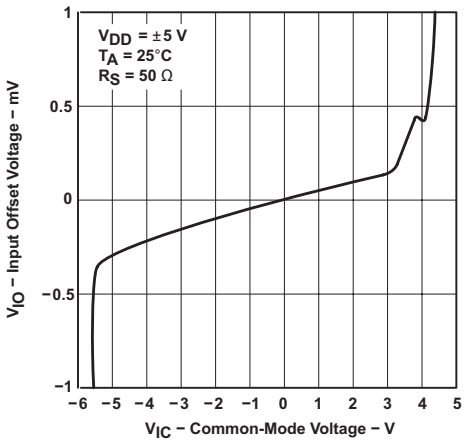


Figure 4. Input Offset Voltage vs Common-Mode Voltage

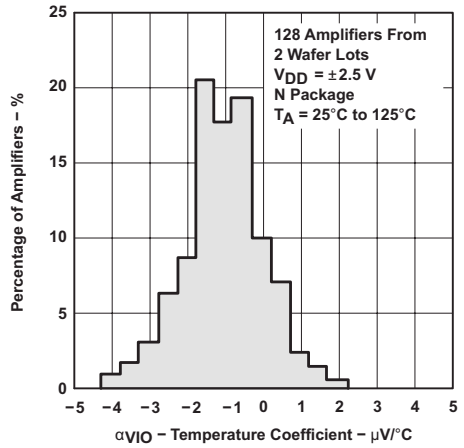


Figure 5. Distribution vs Input-Offset-Voltage Temperature Coefficient

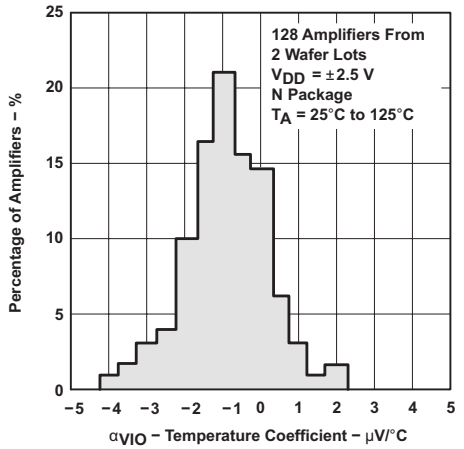


Figure 6. Distribution vs Input-Offset-Voltage Temperature Coefficient

Copyright © 2017, Texas Instruments Incorporated

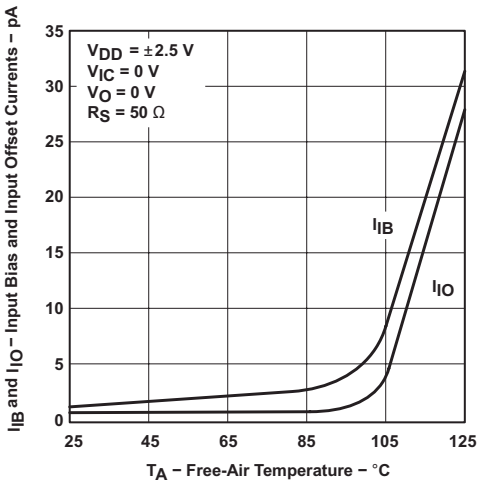


Figure 7. Input Bias and Input Offset Current vs Ambient Temperature

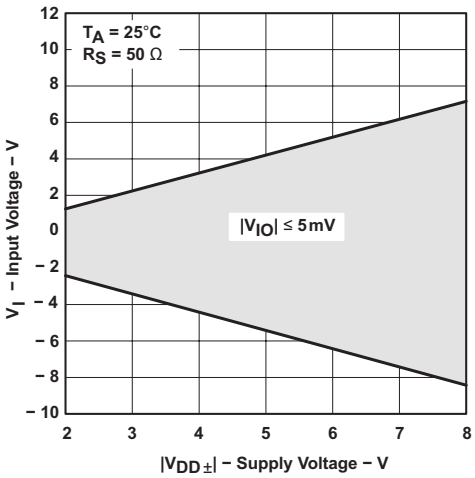


Figure 8. Input Voltage vs Supply Voltage

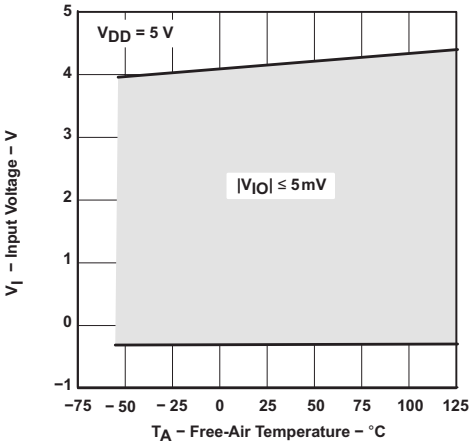


Figure 9. Input Voltage vs Ambient Temperature

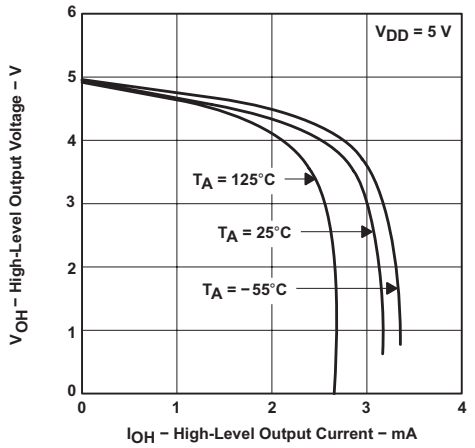


Figure 10. High-Level Output Voltage vs High-Level Output Current

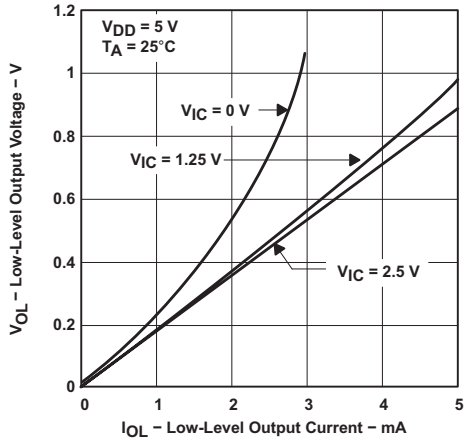


Figure 11. Low-Level Output Voltage vs Low-Level Output Current

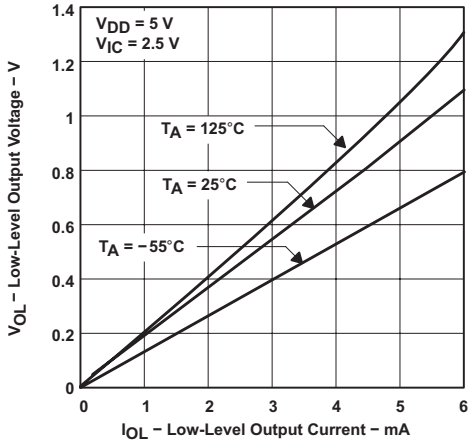


Figure 12. Low-Level Output Voltage vs Low-Level Output Current

Copyright © 2017, Texas Instruments Incorporated

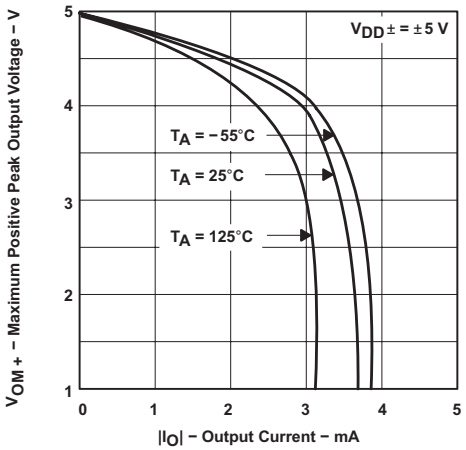


Figure 13. Maximum Positive Peak Output Voltage vs Output Current

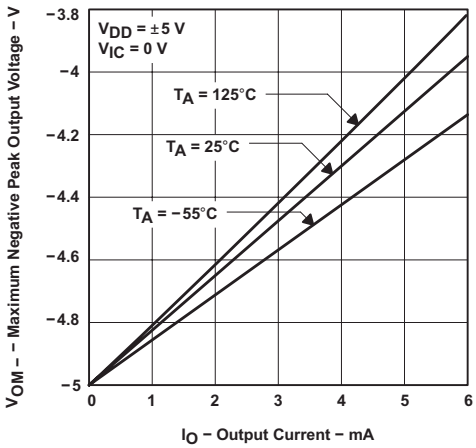


Figure 14. Maximum Negative Peak Output Voltage vs Output Current

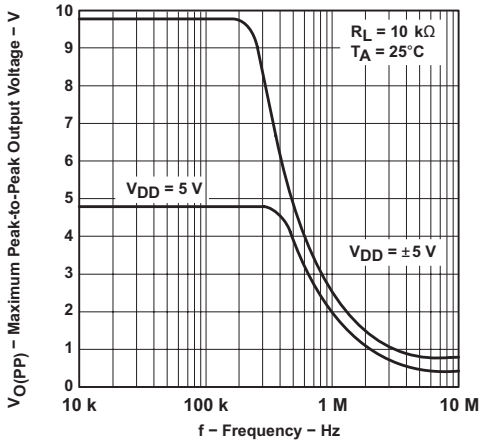


Figure 15. Maximum Peak-to-Peak Output Voltage vs Frequency

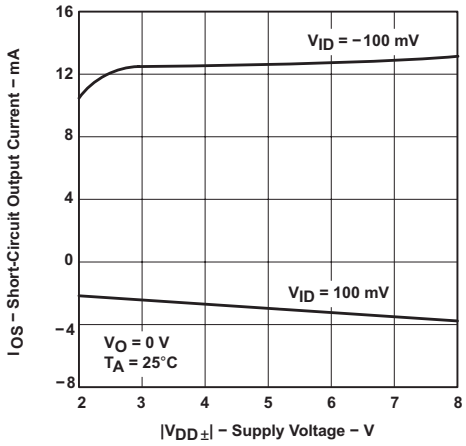


Figure 16. Short-Circuit Output Current vs Supply Voltage

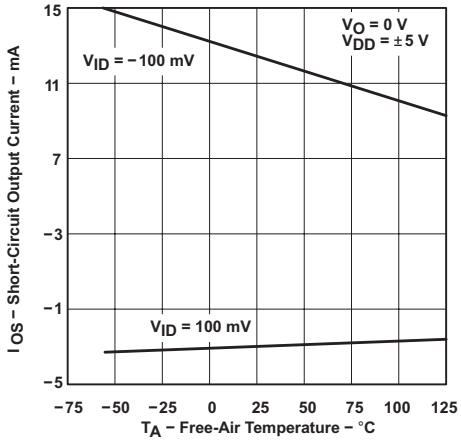


Figure 17. Short-Circuit Output Current vs Ambient Temperature

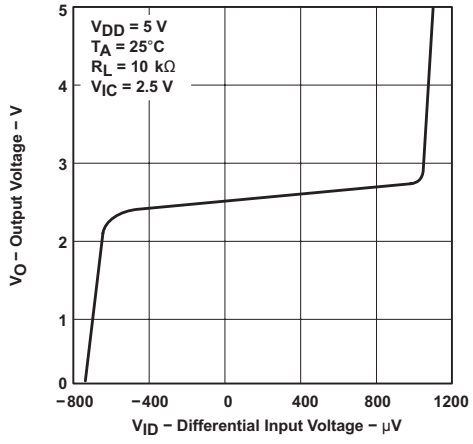


Figure 18. Output Voltage vs Differential Input Voltage

Copyright © 2017, Texas Instruments Incorporated

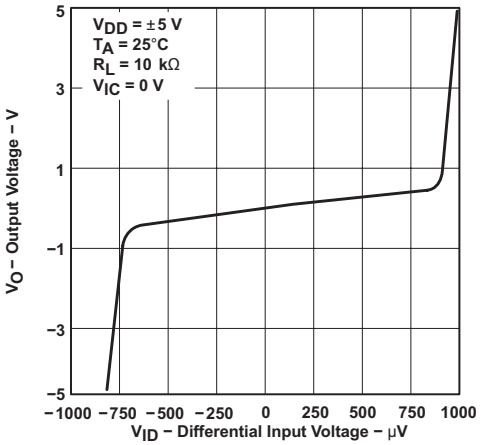


Figure 19. Output Voltage vs Differential Input Voltage

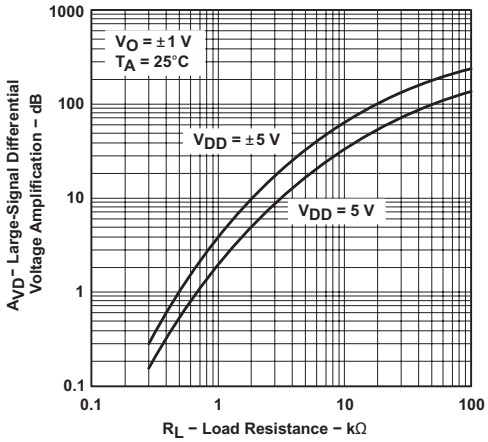


Figure 20. Large-Signal Differential Voltage Amplification vs Load Resistance

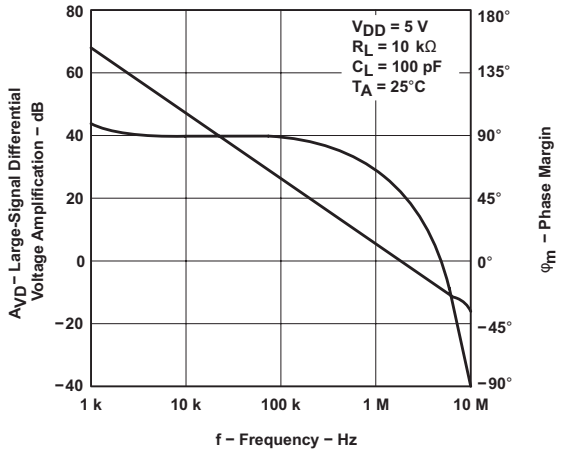


Figure 21. Large-Signal Differential Voltage Amplification and Phase Margin vs Frequency

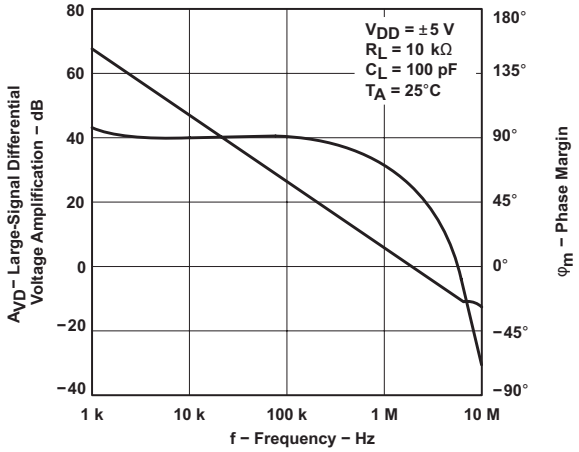


Figure 22. Large-Signal Differential Voltage Amplification and Phase Margin vs Frequency

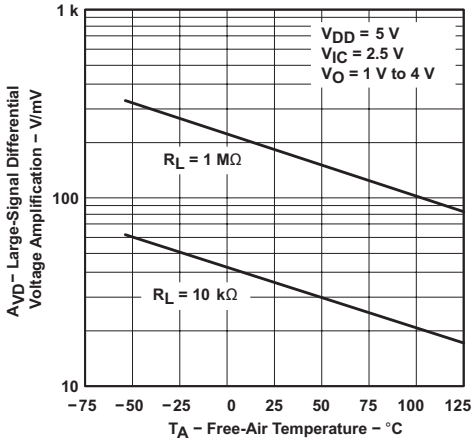


Figure 23. Large-Signal Differential Voltage Amplification vs Ambient Temperature

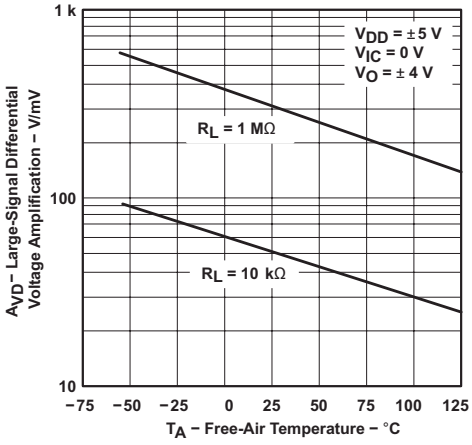


Figure 24. Large-Signal Differential Voltage Amplification vs Ambient Temperature

Copyright © 2017, Texas Instruments Incorporated

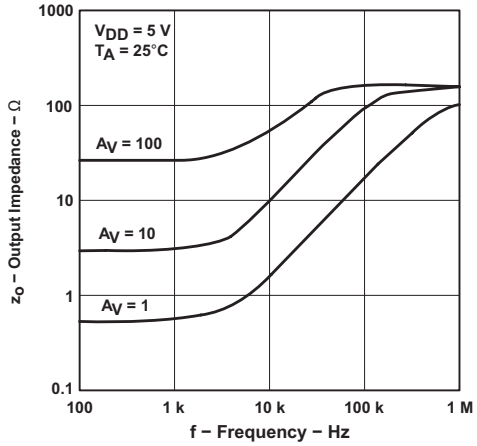


Figure 25. Output Impedance vs Frequency

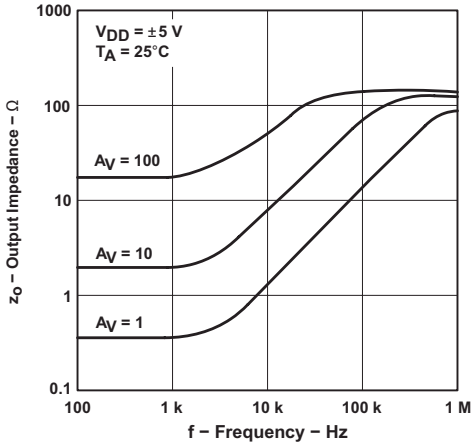


Figure 26. Output Impedance vs Frequency

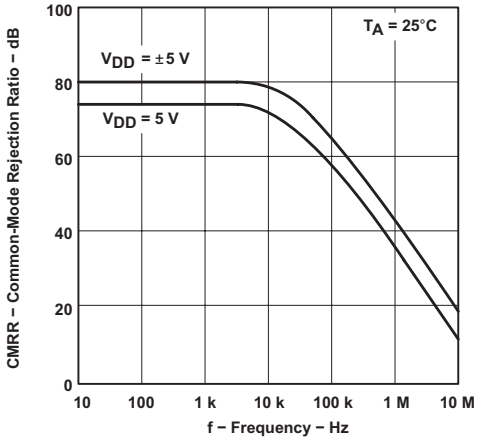


Figure 27. Common-Mode Rejection Ratio vs Frequency

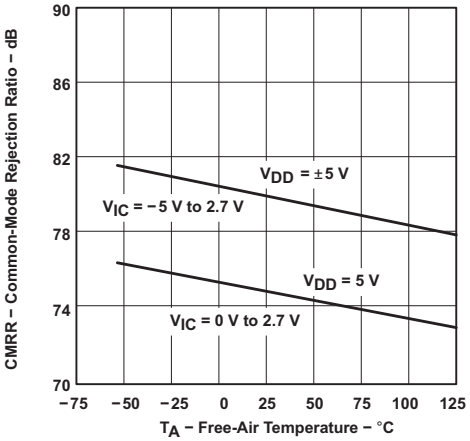


Figure 28. Common-Mode Rejection Ratio vs Ambient Temperature

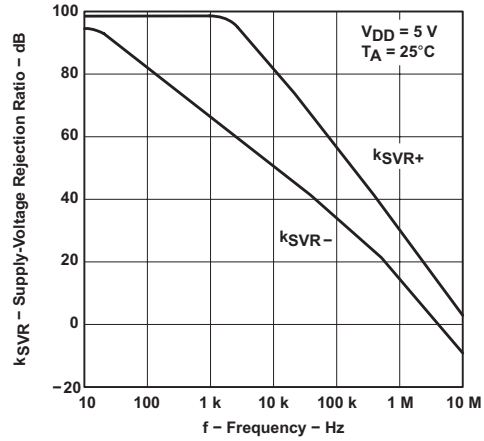


Figure 29. Supply-Voltage Rejection Ratio vs Frequency

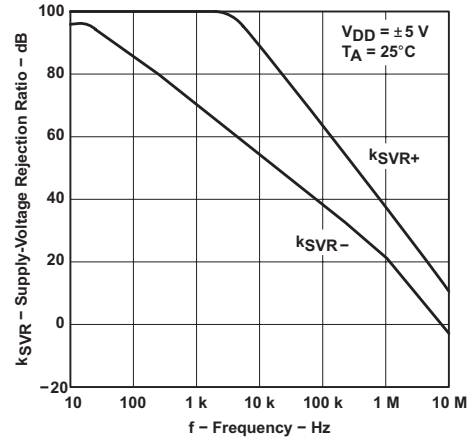


Figure 30. Supply-Voltage Rejection Ratio vs Frequency

Copyright © 2017, Texas Instruments Incorporated

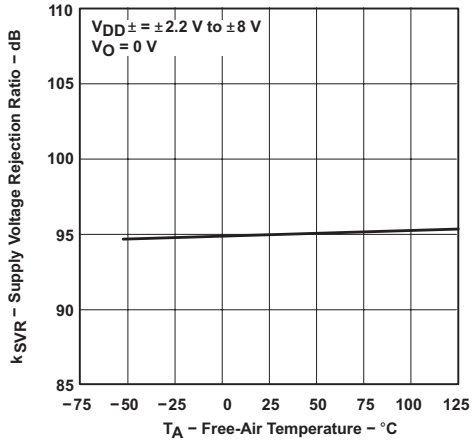


Figure 31. Supply-Voltage Rejection Ratio vs Ambient Temperature

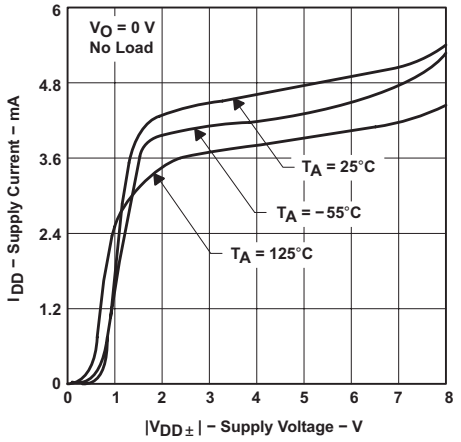


Figure 32. Supply Current vs Supply Voltage

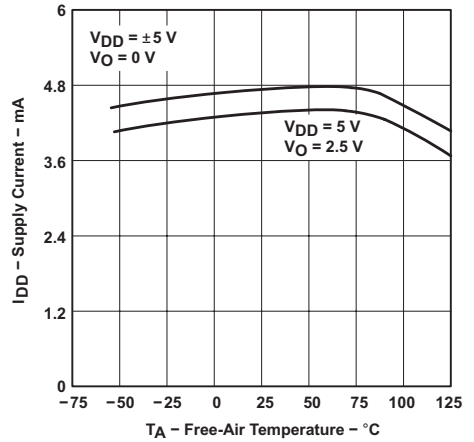


Figure 33. Supply Current vs Ambient Temperature

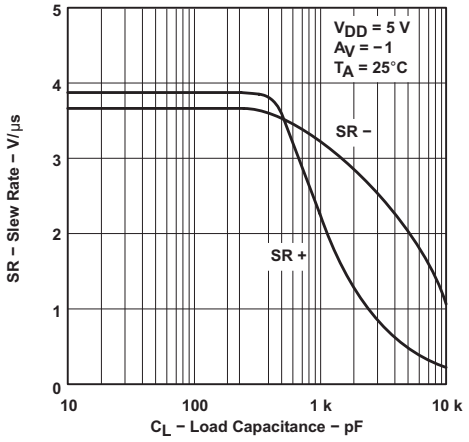


Figure 34. Slew Rate vs Load Capacitance

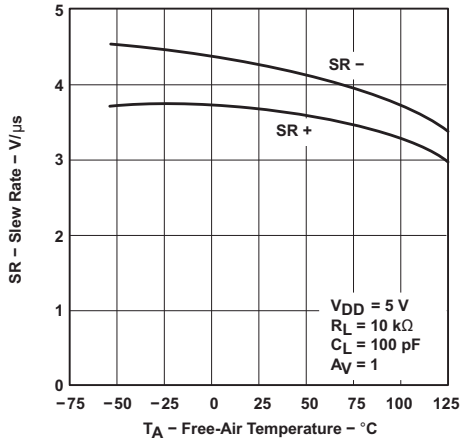


Figure 35. Slew Rate vs Ambient Temperature

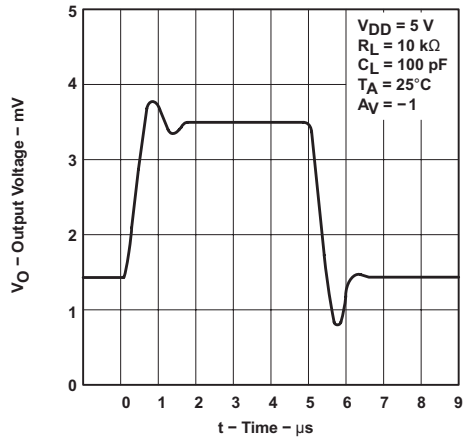


Figure 36. Inverting Large-Signal Pulse Response

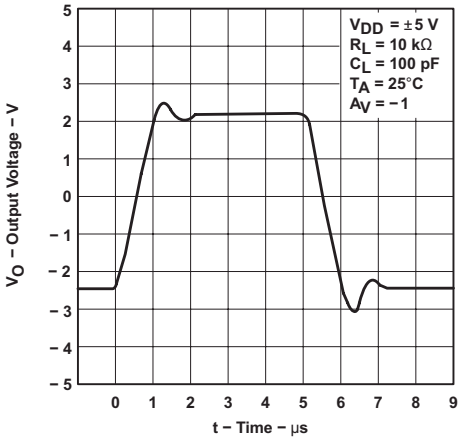


Figure 37. Inverting Large-Signal Pulse Response

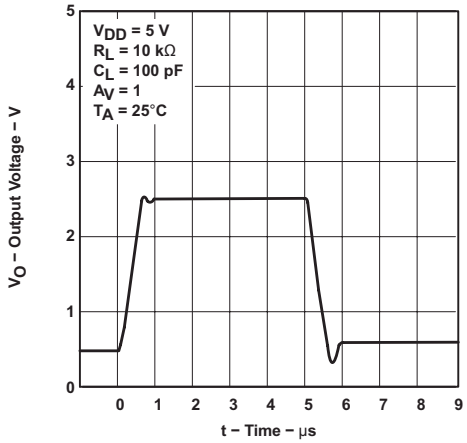


Figure 38. Voltage-Follower Large-Signal Pulse Response

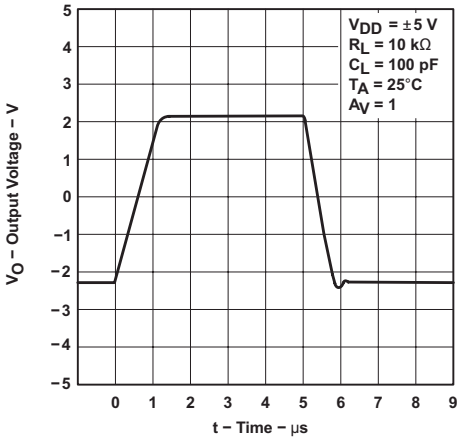


Figure 39. Voltage-Follower Large-Signal Pulse Response

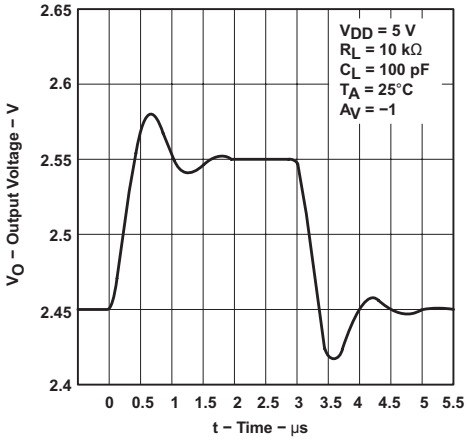


Figure 40. Inverting Small-Signal Pulse Response

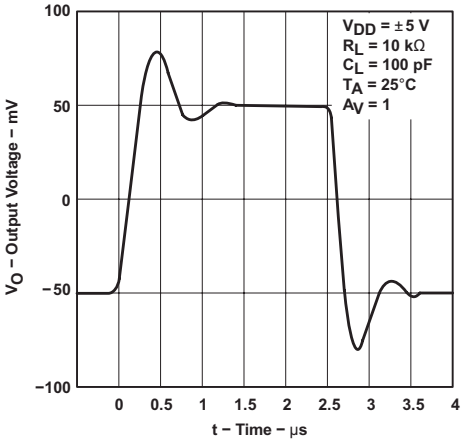


Figure 41. Inverting Small-Signal Pulse Response

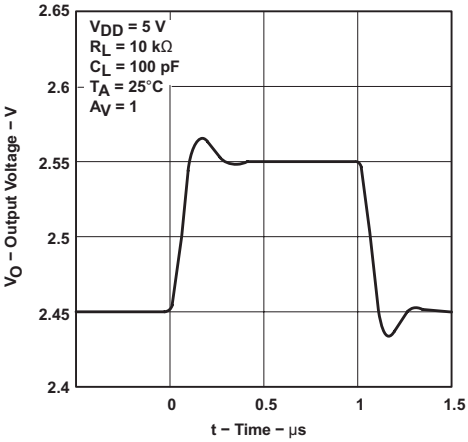


Figure 42. Voltage-Follower Small-Signal Pulse Response

Copyright © 2017, Texas Instruments Incorporated

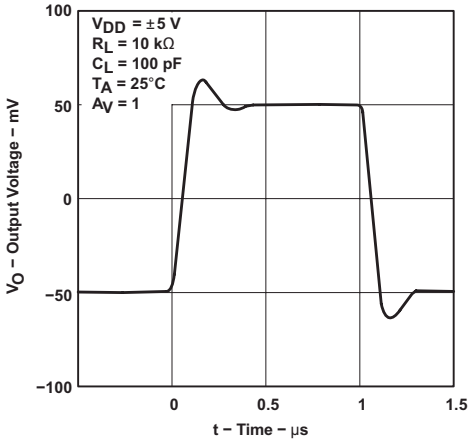


Figure 43. Voltage-Follower Small-Signal Pulse Response

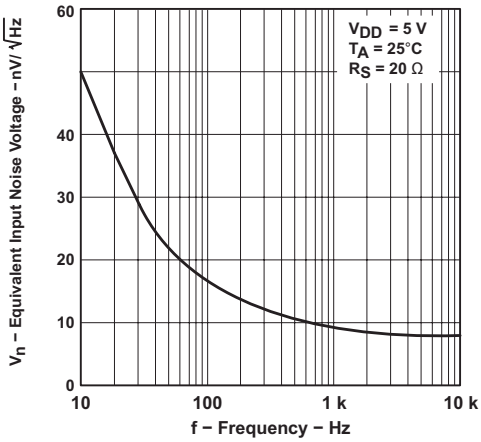


Figure 44. Equivalent Input Noise Voltage vs Frequency

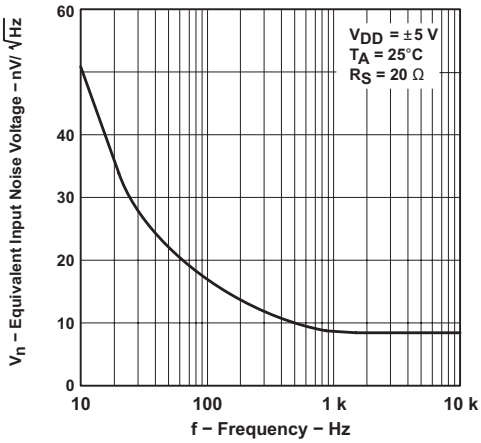


Figure 45. Equivalent Input Noise Voltage vs Frequency

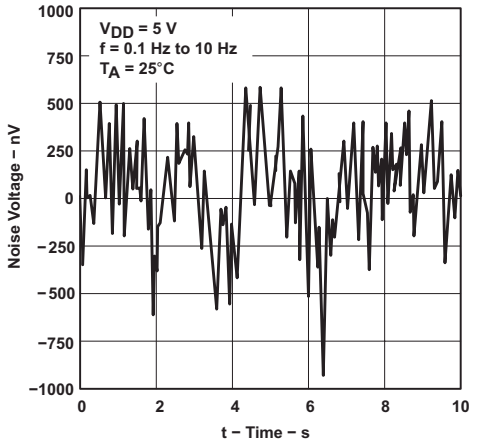


Figure 46. Noise Voltage Over a 10-Second Period

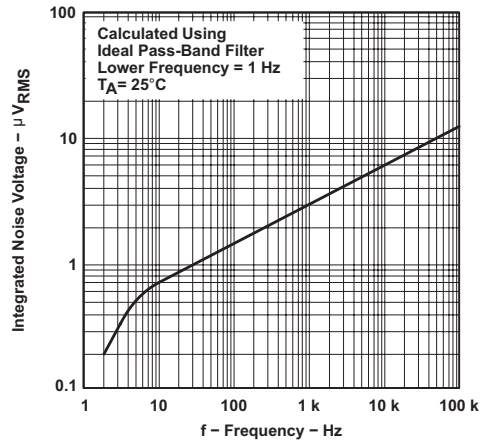


Figure 47. Integrated Noise Voltage vs Frequency

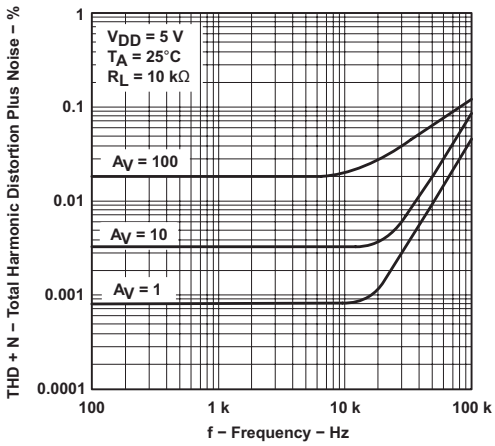


Figure 48. Total Harmonic Distortion + Noise vs Frequency

Copyright © 2017, Texas Instruments Incorporated

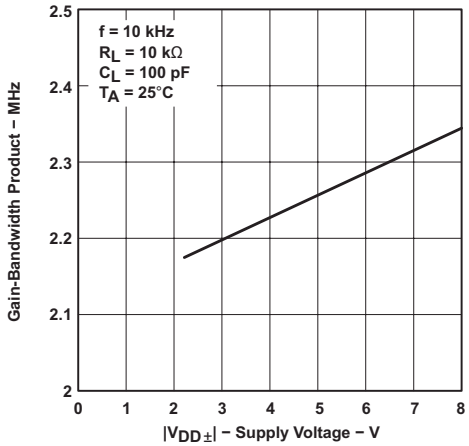


Figure 49. Gain-Bandwidth Product vs Supply Voltage

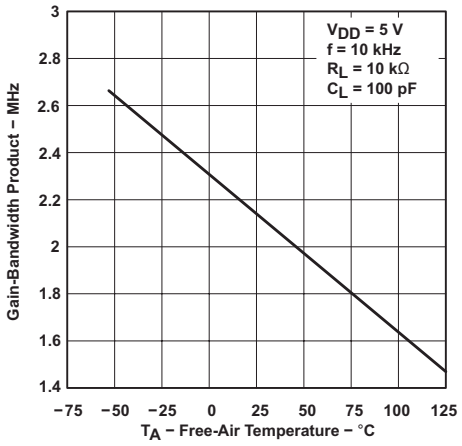


Figure 50. Gain-Bandwidth Product vs Ambient Temperature

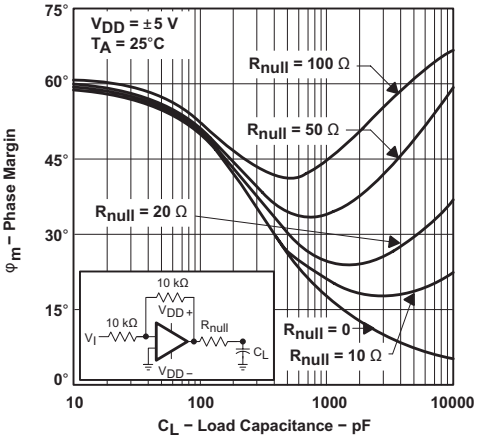


Figure 51. Phase Margin vs Load Capacitance

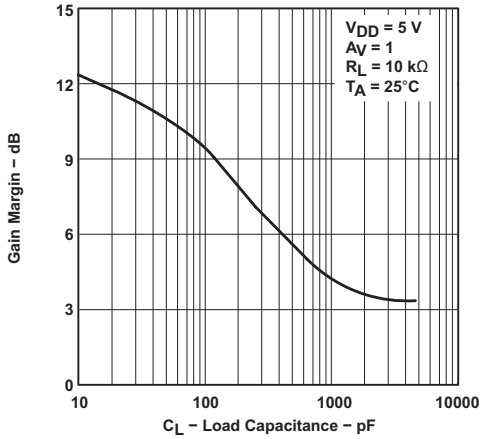


Figure 52. Gain Margin vs Load Capacitance

Copyright © 2017, Texas Instruments Incorporated

7 Detailed Description

7.1 Overview

The TLC2274M-MIL device is a rail-to-rail output operational amplifier. The device operates from a 4.4-V to 16-V single supply or ±2.2-V to ±8-V dual supply, is unity-gain stable, and is suitable for a wide range of general-purpose applications.

7.2 Functional Block Diagram

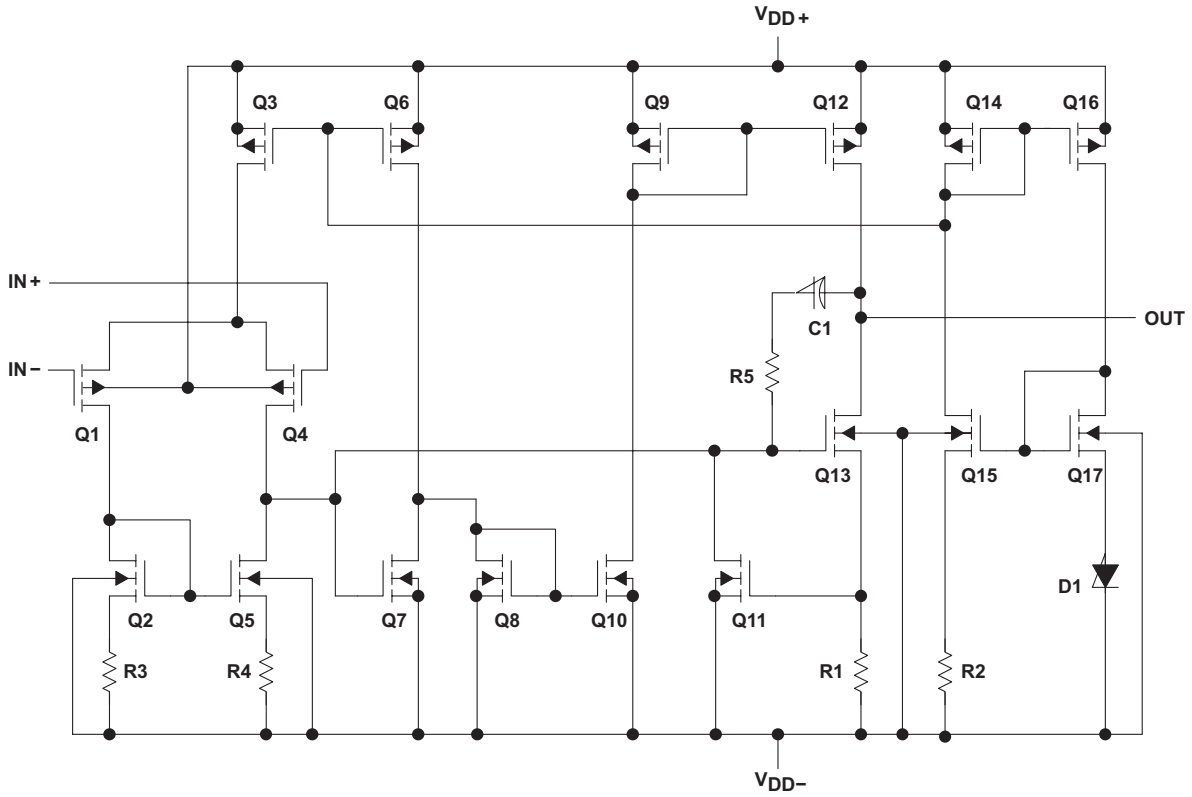


Table 2. Device Component Count(1)

COMPONENT	COUNT
Transistors	76
Resistors	52
Diodes	18
Capacitors	6

(1) Includes both amplifiers and all ESD, bias, and trim circuitry.

7.3 Feature Description

The TLC2274M-MIL device features 2-MHz bandwidth and voltage noise of 9 nV/$\sqrt{\text{Hz}}$ with performance rated from 4.4 V to 16 V across a temperature range (–55°C to 125°C). LinMOS suits a wide range of audio, automotive, industrial, and instrumentation applications.

7.4 Device Functional Modes

The TLC2274M-MIL device is powered on when the supply is connected. The device may operate with single or dual supply, depending on the application. The device is in its full-performance mode once the supply is above the recommended value.

Copyright © 2017, Texas Instruments Incorporated

8 Application and Implementation

NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

8.1.1 Macromodel Information

Macromodel information provided was derived using MicroSim Parts™, the model generation software used with MicroSim PSpice™. The Boyle macromodel (1) and subcircuit in Figure 53 were generated using the TLC2274M-MIL typical electrical and operating characteristics at T_A = 25°C. Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

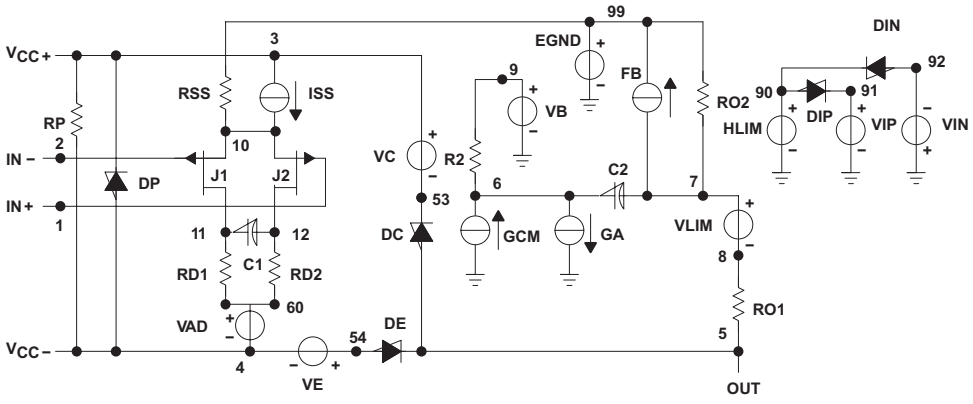


```
.SUBCKT TLC227x 1 2 3 4 5
C1      11      12      1214E−12
C2      6       7       760.00E−12
DC      5       53      53DX
DE      54      5       5DX
DLP     90      91      91DX
DLN     92      90      90DX
DP      4       3       3DX
EGND    99      0       0POLY (2) (3,0) (4,) 0 .5 .5
FB      99      0       0POLY (5) VB VC VE VLP VLN 0
+ 984.9E3 −1E6 1E6 1E6 −1E6
GA      6       0       011 12 377.0E−6
GCM 0 6 10 99 134E−9
ISS     3       10      10DC 216.OE−6
HLIM    90      0       0VLIM 1K
J1      11      1       210 JX
J2      12      2       110 JX
R2      6       9       9100.OE3
RD1     60      11      112.653E3
RD2     60      12      122.653E3
R01     8       5       550
R02     7       99      9950
RP      3       1       44.310E3
RSS     10      99      99925.9E3
VAD     60      4       4−.5
VB      9       0       0DC 0
VC 3 53 DC .78
VE      54      5       4DC .78
VLIM    7       8       8DC 0
VLP     91      0       0DC 1.9
VLN     0       92      92DC 9.4
.MODEL DX D (IS=800.0E−18)
.MODEL JX PJF (IS=1.500E−12BETA=1.316E-3
+ VTO=−.270)
.ENDS
```

Figure 53. Boyle Macromodel and Subcircuit

(1) *Macromodeling of Integrated Circuit Operational Amplifiers*, IEEE Journal of Solid-State Circuits, SC-9, 353 (1974).

Copyright © 2017, Texas Instruments Incorporated

8.2 Typical Application

8.2.1 High-Side Current Monitor

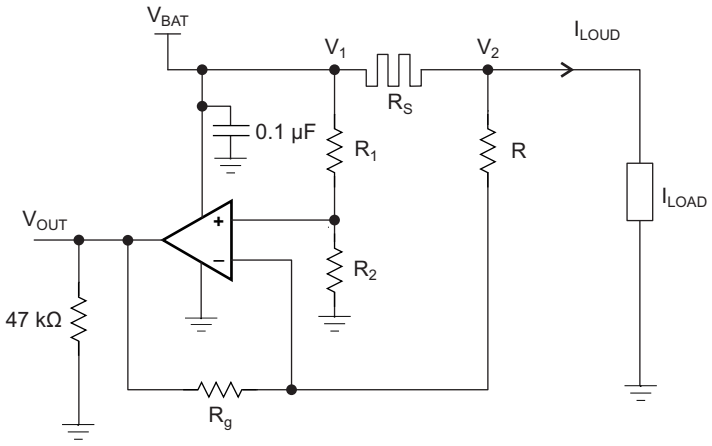


Figure 54. Equivalent Schematic (Each Amplifier)

8.2.1.1 Design Requirements

For this design example, use the parameters listed in Table 3 as the input parameters.

Table 3. Design Parameters

PARAMETER		VALUE
V_{BAT}	Battery voltage	12 V
R_{SENSE}	Sense resistor	0.1 Ω
I_{LOAD}	Load current	0 A to 10 A
	Operational amplifier	Set in differential configuration with gain = 10

8.2.1.2 Detailed Design Procedure

This circuit is designed for measuring the high-side current in automotive body control modules with a 12-V battery or similar applications. The operational amplifier is set as differential with an external resistor network.

8.2.1.2.1 Differential Amplifier Equations

Equation 1 and Equation 2 are used to calculate V_{OUT}.

$$V_{OUT} = \frac{R_g}{R}\left(\frac{\frac{R}{R_g}-\frac{R_1}{R_2}}{1+\frac{R_1}{R_2}}\times\frac{V_1+V_2}{2}+\frac{1+\frac{1}{2}\left(\frac{R_1}{R_2}+\frac{R}{R_g}\right)}{1+\frac{R_1}{R_2}}(V_1-V_2)\right) \quad (1)$$

$$V_{OUT} = \frac{R_g}{R}\left(\frac{\frac{R}{R_g}-\frac{R_1}{R_2}}{1+\frac{R_1}{R_2}}\times V_{BAT}+\frac{1+\frac{1}{2}\left(\frac{R_1}{R_2}+\frac{R}{R_g}\right)}{1+\frac{R_1}{R_2}}\times R_S\times I_{Load}\right) \quad (2)$$

In an ideal case $R_1 = R$ and $R_2 = R_g$, and V_{OUT} can then be calculated using Equation 3:

$$V_{OUT} = \frac{R_g}{R}\times R_S\times I_{Load} \quad (3)$$

However, as the resistors have tolerances, they cannot be perfectly matched.

$R_1 = R \pm \Delta R_1$

$R_2 = R_2 \pm \Delta R_2$

$R = R \pm \Delta R$

$R_g = R_g \pm \Delta R_g$

$$Tol = \frac{DR}{R} \tag{4}$$

By developing the equations and neglecting the second order, the worst case is when the tolerances add up. This is shown by Equation 5.

$$V_{OUT} = \pm (4\ Tol)\frac{R_g}{R + R_g} \times V_{BAT} + \left(1 \pm 2\ Tol\left(1 + \frac{2R}{R + R_g}\right)\right)\frac{R_g}{R} \times R_S \times I_{LOAD}$$

where

- Tol = 0.01 for 1%
- Tol = 0.001 for 0.1%

(5)

If the resistors are perfectly matched, then Tol = 0 and V_{OUT} is calculated using Equation 6.

$$V_{OUT} = \frac{R_g}{R} \times R_S \times I_{LOAD} \tag{6}$$

The highest error is from the common mode, as shown in Equation 7.

$$4\ (Tol)\frac{R_g}{R + R_g} \times V_{BAT} \tag{7}$$

Gain of 10, R_g / R = 10, and Tol = 1%:

Common mode error = ((4 × 0.01) / 1.1) × 12 V = 0.436 V

Gain of 10 and Tol = 0.1%:

Common mode error = 43.6 mV

The resistors were chosen from 2% batches.

R_1 and R 12 kΩ

R_2 and R_g 120 kΩ

Ideal Gain = 120 / 12 = 10

The measured value of the resistors:

R_1 = 11.835 kΩ

R = 11.85 kΩ

R_2 = 117.92 kΩ

R_g = 118.07 kΩ

Copyright © 2017, Texas Instruments Incorporated

8.2.1.3 Application Curves

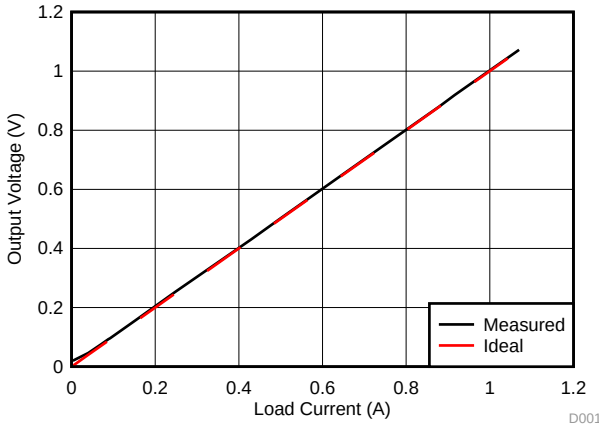


Figure 55. Output Voltage Measured vs Ideal (0 to 1 A)

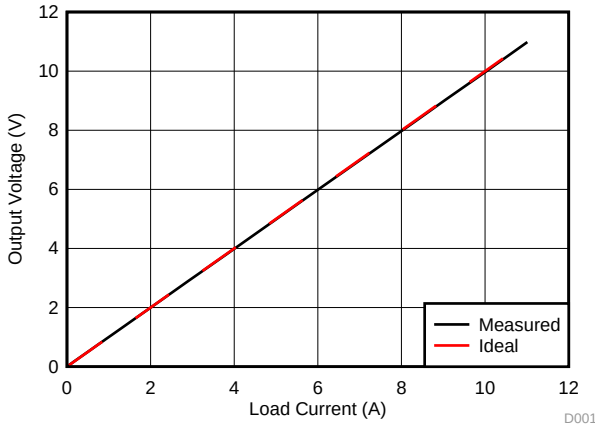


Figure 56. Output Voltage Measured vs Ideal (0 to 10 A)

9 Power Supply Recommendations

Supply voltage for a single supply is from 4.4 V to 16 V, and from ±2.2 V to ±8 V for a dual supply. In the high-side sensing application, the supply is connected to a 12-V battery.

Copyright © 2017, Texas Instruments Incorporated

10 Layout

10.1 Layout Guidelines

The TLC2274M-MIL device is a wideband amplifier. To realize the full operational performance of the device, good high-frequency printed-circuit-board (PCB) layout practices are required. Low-loss 0.1-μF bypass capacitors must be connected between each supply pin and ground as close to the device as possible. The bypass capacitor traces should be designed for minimum inductance.

10.2 Layout Example

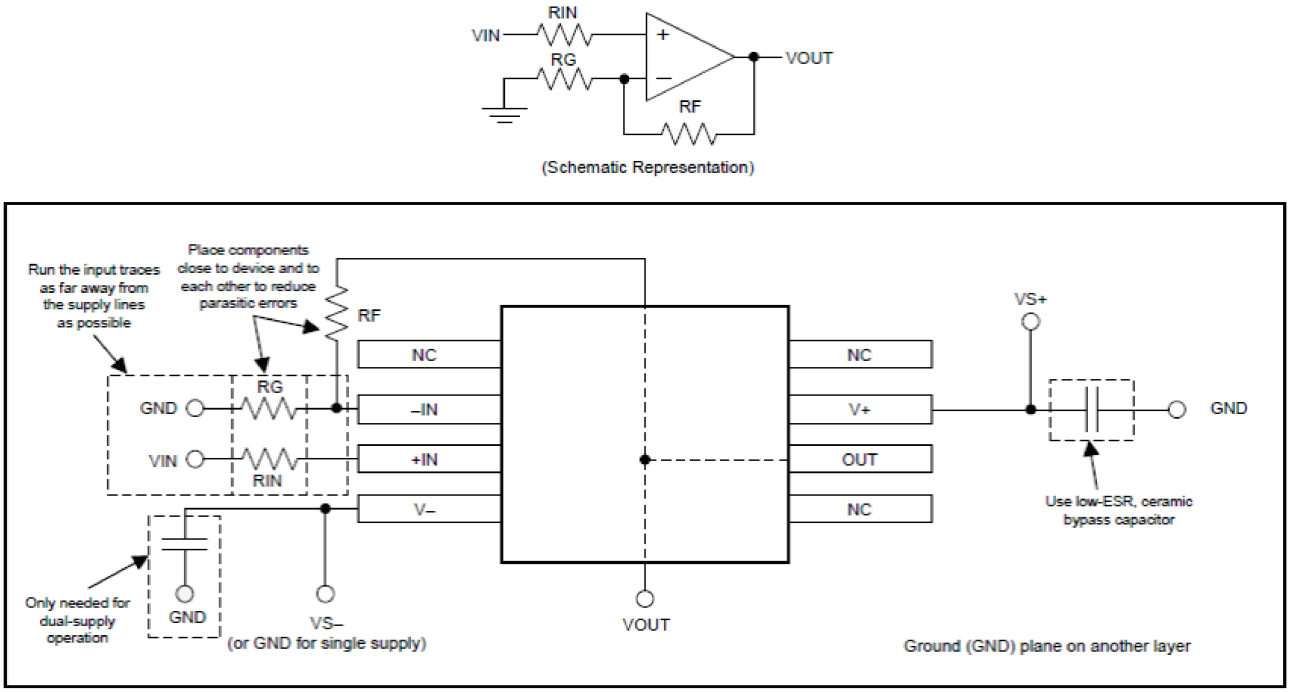


Figure 57. Layout Example

Copyright © 2017, Texas Instruments Incorporated

11 Device and Documentation Support

11.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community ***TI's Engineer-to-Engineer (E2E) Community.*** Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support ***TI's Design Support*** Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.3 Trademarks

E2E is a trademark of Texas Instruments.
MicroSim Parts, PSpice are trademarks of MicroSim.
All other trademarks are the property of their respective owners.

11.4 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

11.5 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most-current data available for the designated device. This data is subject to change without notice and without revision of this document. For browser-based versions of this data sheet, see the left-hand navigation pane.

Copyright © 2017, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
5962-9318201M2A	Active	Production	LCCC (FK) | 20	55 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201M2A TLC2274 MFKB
5962-9318201MCA	Active	Production	CDIP (J) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201MCA TLC2274MJB
5962-9318201QDA	Active	Production	CFP (W) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201QDA TLC2274MWB
TLC2274MFKB	Active	Production	LCCC (FK) | 20	55 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201M2A TLC2274 MFKB
TLC2274MFKB.A	Active	Production	LCCC (FK) | 20	55 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201M2A TLC2274 MFKB
TLC2274MJ	Active	Production	CDIP (J) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	TLC2274MJ
TLC2274MJ.A	Active	Production	CDIP (J) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	TLC2274MJ
TLC2274MJB	Active	Production	CDIP (J) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201MCA TLC2274MJB
TLC2274MJB.A	Active	Production	CDIP (J) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201MCA TLC2274MJB
TLC2274MWB	Active	Production	CFP (W) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201QDA TLC2274MWB
TLC2274MWB.A	Active	Production	CFP (W) | 14	25 | TUBE	No	SNPB	N/A for Pkg Type	-55 to 125	5962-9318201QDA TLC2274MWB

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TUBE

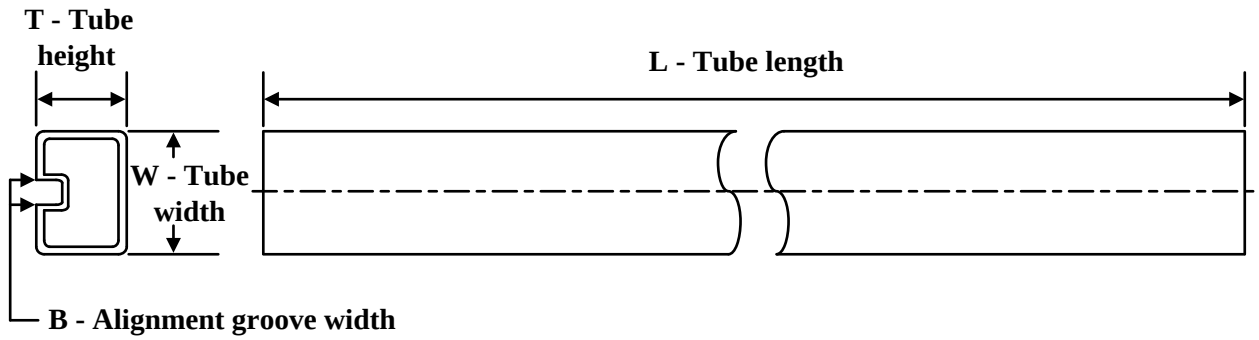

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
5962-9318201M2A	FK	LCCC	20	55	506.98	12.06	2030	NA
5962-9318201QDA	W	CFP	14	25	506.98	26.16	6220	NA
TLC2274MFKB	FK	LCCC	20	55	506.98	12.06	2030	NA
TLC2274MFKB.A	FK	LCCC	20	55	506.98	12.06	2030	NA
TLC2274MWB	W	CFP	14	25	506.98	26.16	6220	NA
TLC2274MWB.A	W	CFP	14	25	506.98	26.16	6220	NA

W (R–GDFP–F14) CERAMIC DUAL FLATPACK

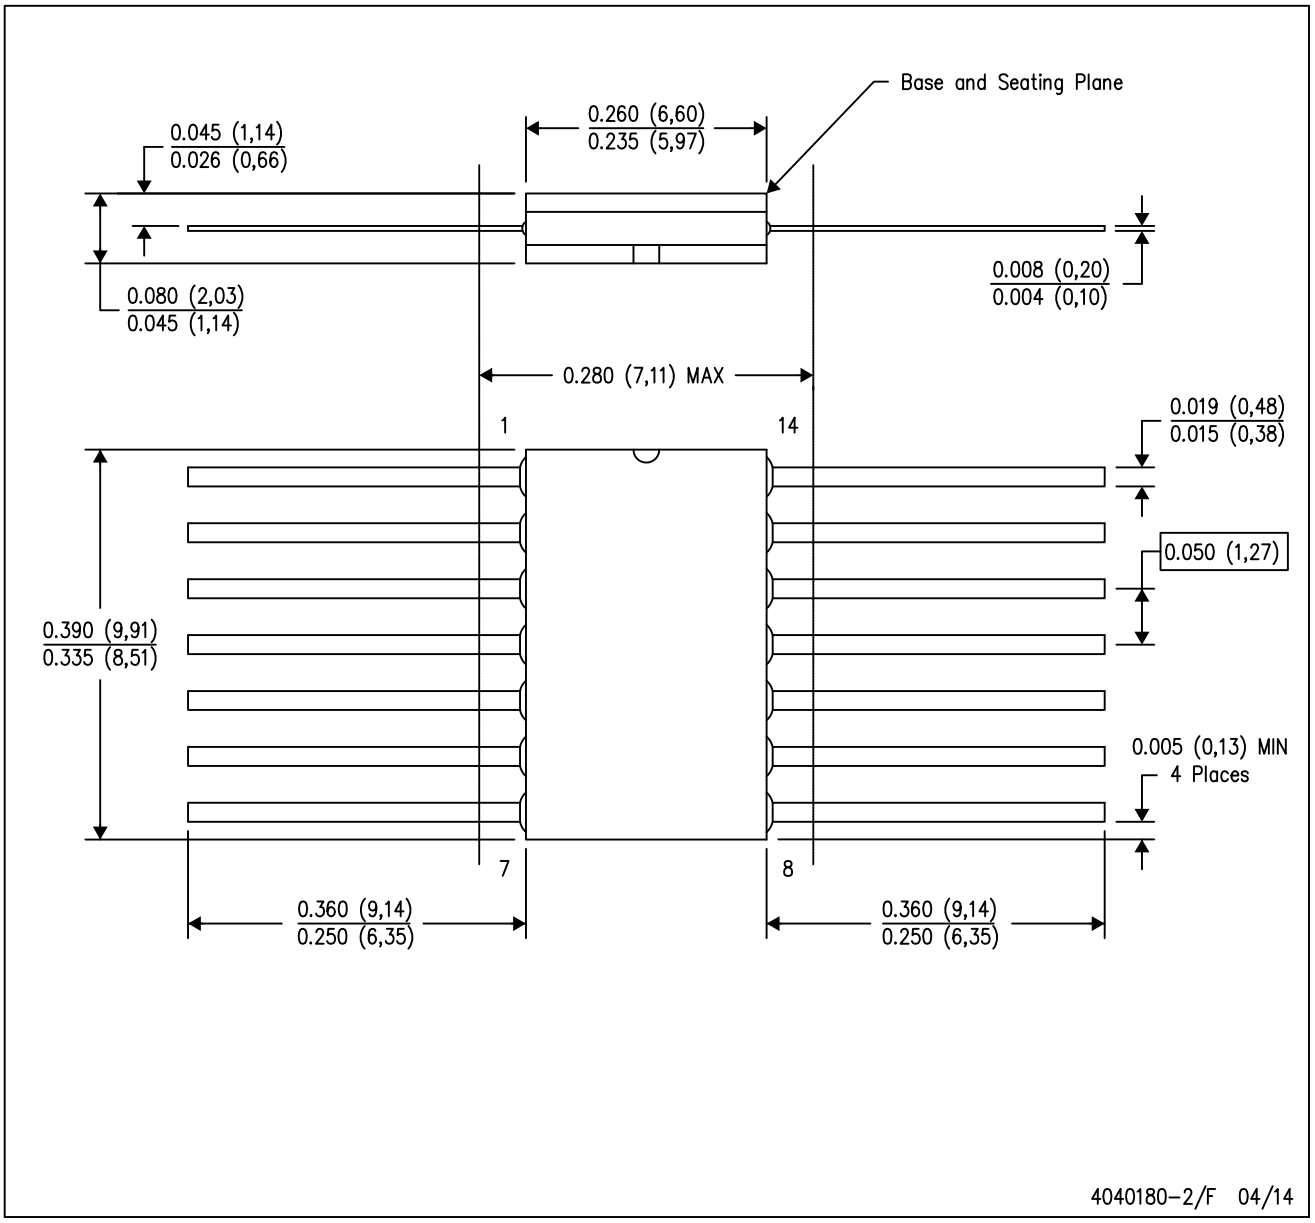

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. This package can be hermetically sealed with a ceramic lid using glass frit.
D. Index point is provided on cap for terminal identification only.
E. Falls within MIL STD 1835 GDFP1–F14

GENERIC PACKAGE VIEW


FK 20

LCCC - 2.03 mm max height

8.89 x 8.89, 1.27 mm pitch

LEADLESS CERAMIC CHIP CARRIER

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

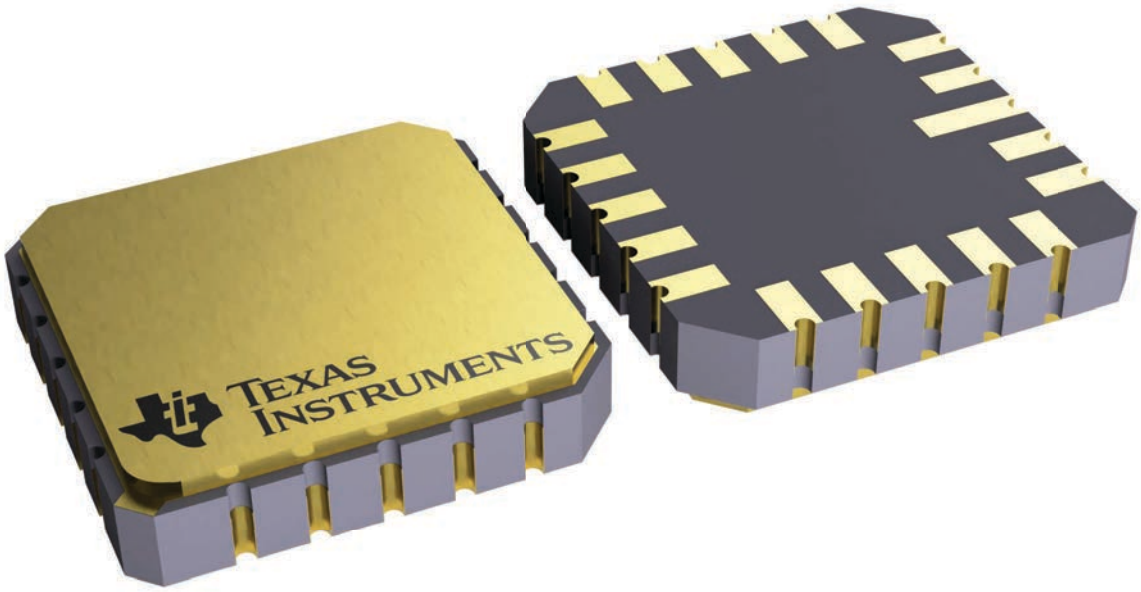


4229370VA\

GENERIC PACKAGE VIEW

J 14 CDIP - 5.08 mm max height

CERAMIC DUAL IN LINE PACKAGE

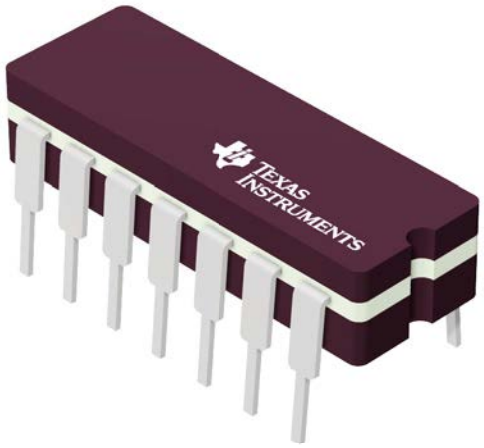

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4040083-5/G




PACKAGE OUTLINE

J0014A

CDIP - 5.08 mm max height

CERAMIC DUAL IN LINE PACKAGE

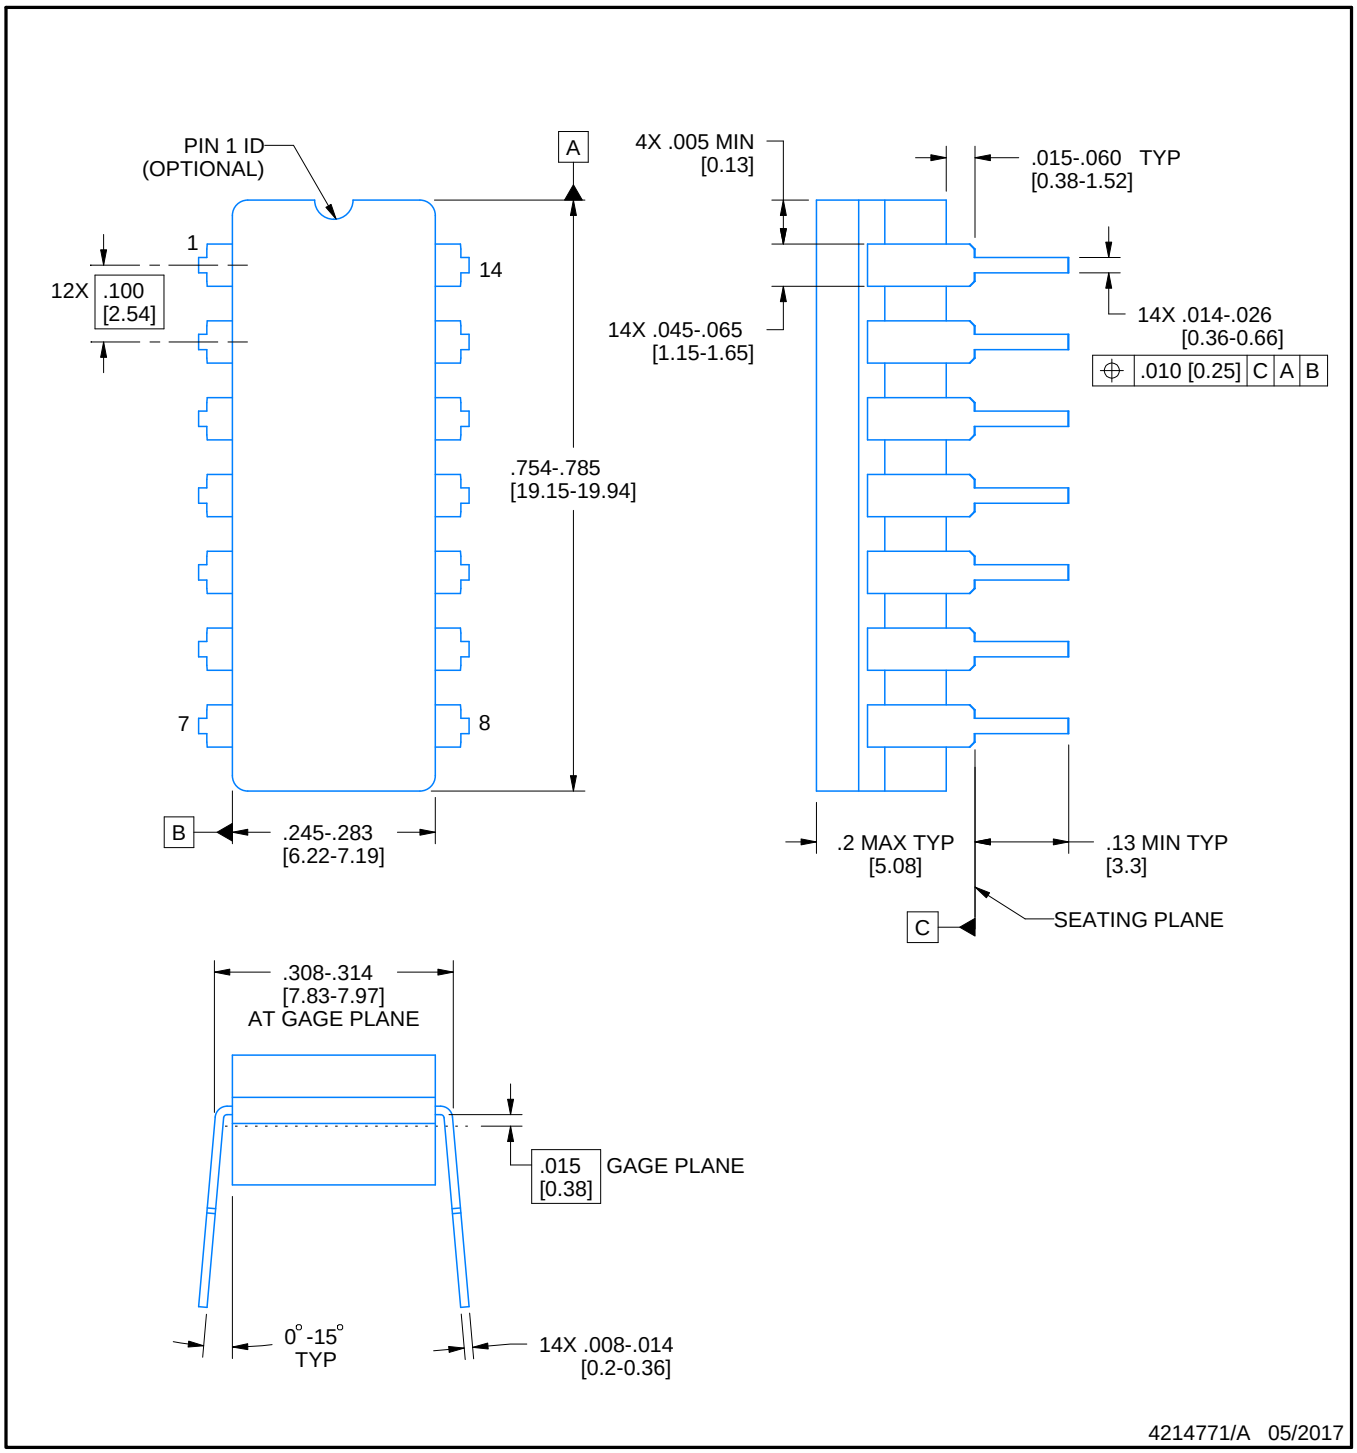

NOTES:


1. All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This package is hermitically sealed with a ceramic lid using glass frit.
4. Index point is provided on cap for terminal identification only and on press ceramic glass frit seal only.
5. Falls within MIL-STD-1835 and GDIP1-T14.

EXAMPLE BOARD LAYOUT


J0014A

CDIP - 5.08 mm max height


CERAMIC DUAL IN LINE PACKAGE

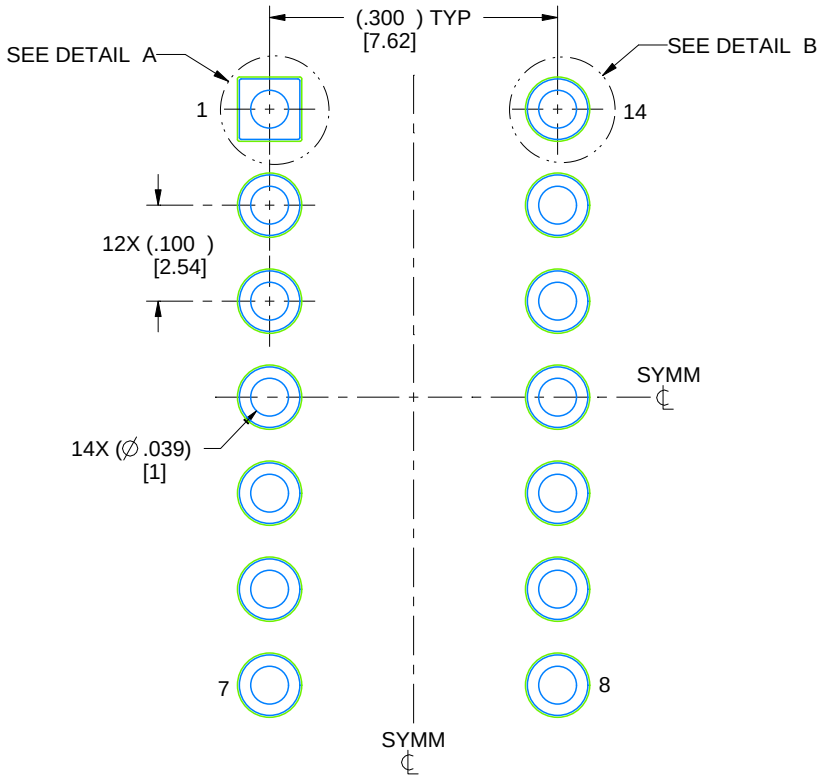

LAND PATTERN EXAMPLE
NON-SOLDER MASK DEFINED
SCALE: 5X

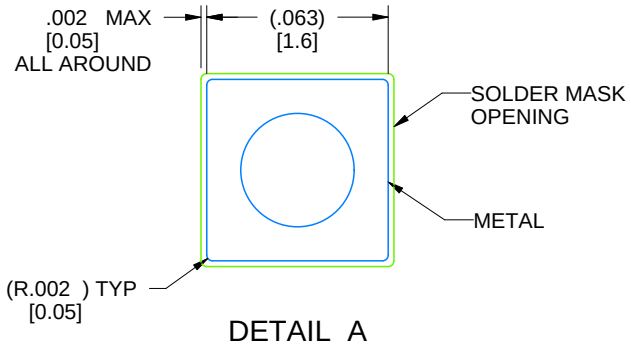

DETAIL A
SCALE: 15X

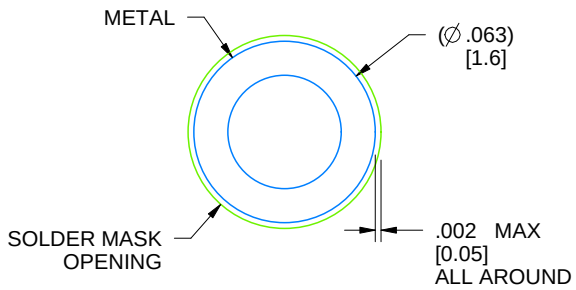

DETAIL B
13X, SCALE: 15X

4214771/A 05/2017

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025