
- **50-mW Stereo Output**
- **Low Supply Current . . . 0.75 mA**
- **Low Shutdown Current . . . 50 nA**
- **Minimal External Components Required**
- **Gain Set Internally to 14 dB**
- **Pop Reduction Circuitry**
- **Internal Mid-Rail Generation**
- **Thermal and Short-Circuit Protection**
- **Surface-Mount Packaging**
  - **MSOP**
  - **SOIC**
- **1.6-V to 3.6-V Supply Voltage Range**

D or DGK PACKAGE
(TOP VIEW)

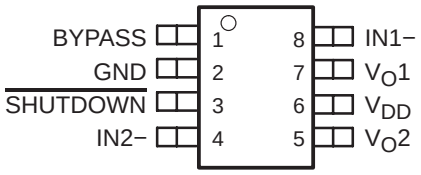


description

The TPA6102A2 is a stereo audio power amplifier packaged in either an 8-pin SOIC package or an 8-pin MOSP package capable of delivering 50 mW of continuous RMS power per channel into 16-Ω loads. Amplifier gain is internally set to 14 dB (inverting) to save board space by eliminating six external resistors.

The TPA6102A2 is optimized for battery applications because of its low-supply current, shutdown current, and THD+N. To obtain the low-supply voltage range, the TPA6102A2 biases BYPASS to $V_{DD}/4$.

When driving a 16-Ω load with 40-mW output power from 3.3 V, THD+N is 0.08% at 1 kHz, and less than 0.2% across the audio band of 20 Hz to 20 kHz. For 30 mW into 32-Ω loads, the THD+N is reduced to less than 0.06% at 1 kHz, and is less than 0.3% across the audio band of 20 Hz to 20 kHz.

typical application circuit

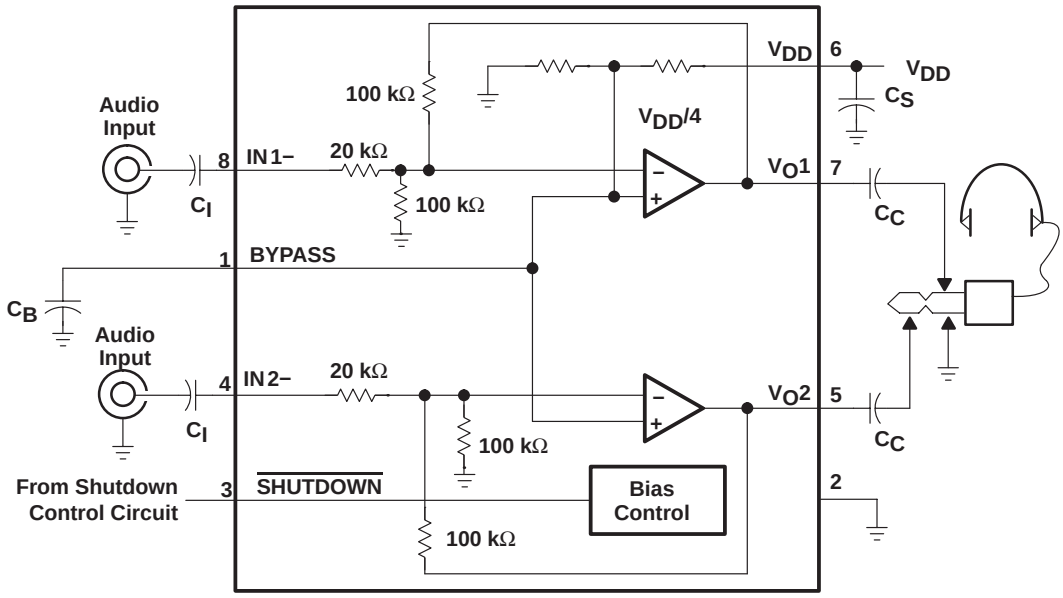

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2004, Texas Instruments Incorporated

AVAILABLE OPTIONS

T_A	PACKAGED DEVICE		MSOP SYMBOLIZATION
	SMALL OUTLINE (D)	MSOP (DGK)	
−40°C to 85°C	TPA6102A2D	TPA6102A2DGK	AJN

Terminal Functions

TERMINAL NAME	TERMINAL NO.	I/O	DESCRIPTION
BYPASS	1	I	Tap to voltage divider for internal mid-supply bias supply. BYPASS is set at V_{DD}/4. Connect to a 0.1-μF to 1-μF low ESR capacitor for best performance.
GND	2	I	GND is the ground connection.
IN1−	8	I	IN1− is the inverting input for channel 1.
IN2−	4	I	IN2− is the inverting input for channel 2.
$\overline{\text{SHUTDOWN}}$	3	I	Active-low input. When held low, the device is placed in a low supply current mode.
V_{DD}	6	I	V_{DD} is the supply voltage terminal.
V_O1	7	O	V_O1 is the audio output for channel 1.
V_O2	5	O	V_O2 is the audio output for channel 2.

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

Supply voltage, V_{DD} . . . . . 4 V
Input voltage, V_I . . . . . −0.3 V to V_{DD} + 0.3 V
Continuous total power dissipation . . . . . Internally Limited
Operating junction temperature range, T_J . . . . . −40°C to 150°C
Storage temperature range, T_{stg} . . . . . −65°C to 150°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds . . . . . 260°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

DISSIPATION RATING TABLE

PACKAGE	$T_A \le 25°C$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25°C$	$T_A = 70°C$ POWER RATING	$T_A = 85°C$ POWER RATING
D	710 mW	5.68 mW/°C	454 mW	369 mW
DGK	469 mW	3.75 mW/°C	300 mW	244 mW

recommended operating conditions

		MIN	MAX	UNIT
Supply voltage, V_{DD}		1.6	3.6	V
High-level input voltage, V_{IH} ($\overline{\text{SHUTDOWN}}$)		60% x V_{DD}		V
Low-level input voltage, V_{IL} ($\overline{\text{SHUTDOWN}}$)			25% x V_{DD}	V
Operating free-air temperature, T_A		−40	85	°C

dc electrical characteristics at T_A = 25°C, V_{DD} = 3.6 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OO}	Output offset voltage	A_V = 14 dB		5	40	mV
PSRR	Power supply rejection ratio	V_{DD} = 3 V to 3.6 V		72		dB
I_{DD}	Supply current	$\overline{SHUTDOWN}$ = 3.6 V		0.75	1.5	mA
$I_{DD(SD)}$	Supply current in $\overline{SHUTDOWN}$ mode	$\overline{SHUTDOWN}$ = 0 V		50	250	nA
$\|I_{IH}\|$	High-level input current ($\overline{SHUTDOWN}$)	V_{DD} = 3.6 V, V_I= V_{DD}			1	µA
$\|I_{IL}\|$	Low-level input current ($\overline{SHUTDOWN}$)	V_{DD} = 3.6 V, V_I= 0 V			1	µA
Z_I	Input impedance			20		kΩ

ac operating characteristics, V_{DD} = 3.3 V, T_A = 25°C, R_L = 16 Ω

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
G	Gain			14		dB
P_O	Output power (each channel)	THD ≤ 0.1%, f = 1 kHz		50		mW
THD+N	Total harmonic distortion + noise	P_O = 45 mW, 20−20 kHz		0.4%		
B_{OM}	Maximum output power BW	THD < 0.5%		> 20		kHz
k_{SVR}	Supply ripple rejection ratio	f = 1 kHz		47		dB
SNR	Signal-to-noise ratio	P_O = 50 mW		86		dB
V_n	Noise output voltage (no noise weighting filter)			45		µV(rms)

ac operating characteristics, V_{DD} = 3.3 V, T_A = 25°C, R_L = 32 Ω

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
G	Gain			14		dB
P_O	Output power (each channel)	THD ≤ 0.1%, f = 1 kHz		35		mW
THD+N	Total harmonic distortion + noise	P_O = 30 mW, 20−20 kHz		0.4%		
B_{OM}	Maximum output power BW	THD < 0.4%		>20		kHz
k_{SVR}	Supply ripple rejection ratio	f = 1 kHz		47		dB
SNR	Signal-to-noise ratio	P_O = 30 mW		86		dB
V_n	Noise output voltage (no noise weighting filter)			50		µV(rms)

dc electrical characteristics at T_A = 25°C, V_{DD} = 1.6 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OO}	Output offset voltage	A_V = 14 dB		5	40	mV
PSRR	Power supply rejection ratio	V_{DD} = 1.4 V to 1.8 V		80		dB
I_{DD}	Supply current	$\overline{SHUTDOWN}$ = 1.6 V		0.65	1.2	mA
$I_{DD(SD)}$	Supply current in $\overline{SHUTDOWN}$ mode	$\overline{SHUTDOWN}$ = 0 V		50	250	nA
$\|I_{IH}\|$	High-level input current ($\overline{SHUTDOWN}$)	V_{DD} = 1.6 V, $V_I = V_{DD}$			1	µA
$\|I_{IL}\|$	Low-level input current ($\overline{SHUTDOWN}$)	V_{DD} = 1.6 V, V_I = 0 V			1	µA
Z_I	Input impedance			20		kΩ

ac operating characteristics, V_{DD} = 1.6 V, T_A = 25°C, R_L = 16 Ω

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
G	Gain			14		dB
P_O	Output power (each channel)	THD ≤ 0.5%, f = 1 kHz		10		mW
THD+N	Total harmonic distortion + noise	P_O = 9.5 mW, 20−20 kHz		0.06%		
B_{OM}	Maximum output power BW	THD < 1%		> 20		kHz
k_{SVR}	Supply ripple rejection ratio	f = 1 kHz		47		dB
SNR	Signal-to-noise ratio	P_O = 10 mW		82		dB
V_n	Noise output voltage (no noise weighting filter)			32		µV(rms)

ac operating characteristics, V_{DD} = 1.6 V, T_A = 25°C, R_L = 32 Ω

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
G	Gain			14		dB
P_O	Output power (each channel)	THD ≤ 0.5%, f = 1 kHz		7.5		mW
THD+N	Total harmonic distortion + noise	P_O = 6.5 mW, 20−20 kHz		0.05%		
B_{OM}	Maximum output power BW	THD < 1%		>20		kHz
k_{SVR}	Supply ripple rejection ratio	f = 1 kHz		47		dB
SNR	Signal-to-noise ratio	P_O = 7.5 mW		84		dB
V_n	Noise output voltage (no noise weighting filter)			32		µV(rms)

TYPICAL CHARACTERISTICS

Table of Graphs

			FIGURE
THD+N	Total harmonic distortion plus noise	vs Frequency	1, 3, 5, 7, 9, 11
		vs Output power	2, 4, 6, 8, 10, 12
		vs Output voltage	13, 14
P_O	Output power	vs Load resistance	15, 16
k_{SVR}	Supply ripple rejection ratio	vs Frequency	17, 18
Vn	Output noise voltage	vs Frequency	19, 20
	Crosstalk	vs Frequency	21, 22
	Closed−loop gain and phase	vs Frequency	23, 24, 25, 26
I_{DD}	Supply current	vs Supply voltage	27
P_D	Power dissipation	vs Output power	28

TYPICAL CHARACTERISTICS

TOTAL HARMONIC DISTORTION PLUS NOISE vs FREQUENCY

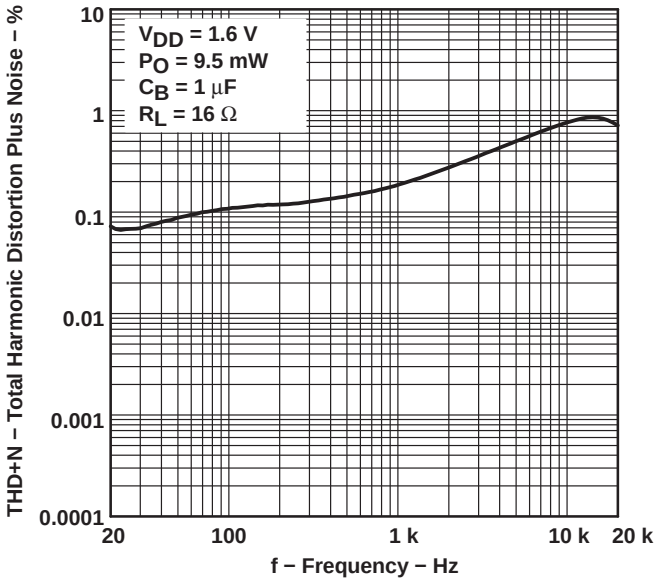


Figure 1

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT POWER

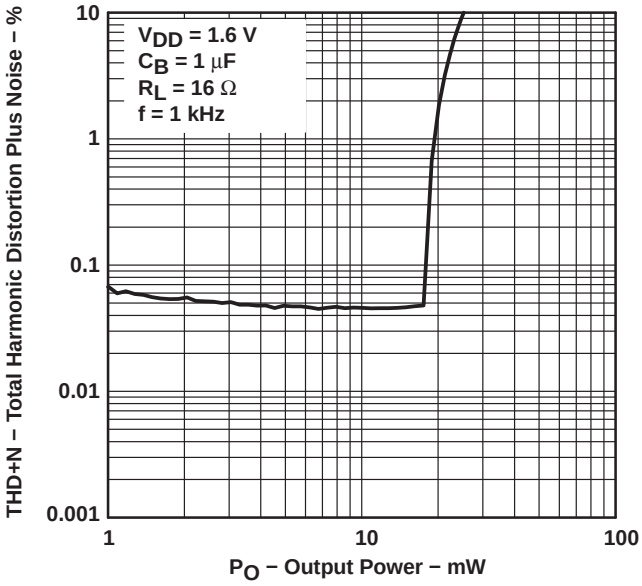


Figure 2

TOTAL HARMONIC DISTORTION PLUS NOISE vs FREQUENCY

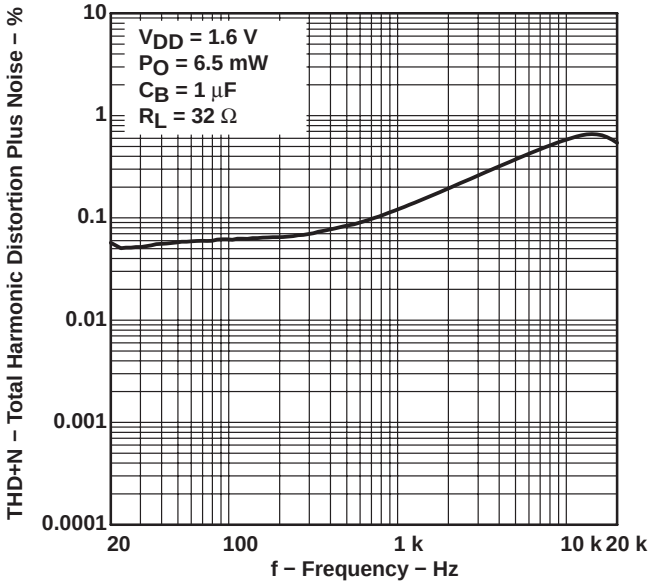


Figure 3

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT POWER

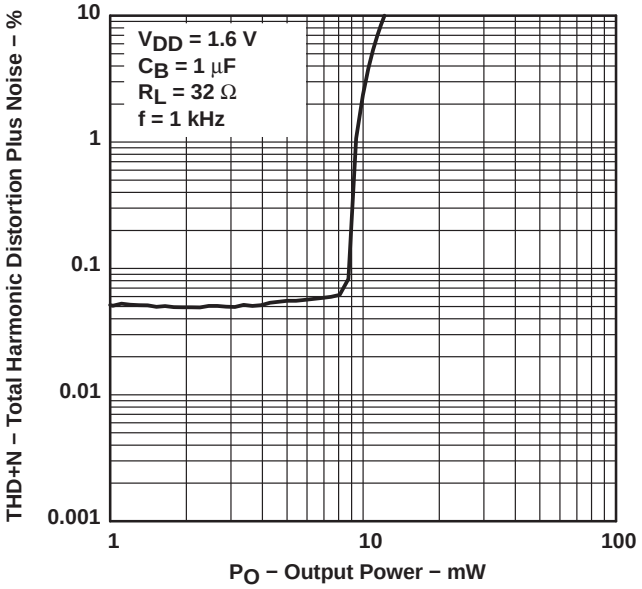


Figure 4

TYPICAL CHARACTERISTICS

TOTAL HARMONIC DISTORTION PLUS NOISE vs FREQUENCY

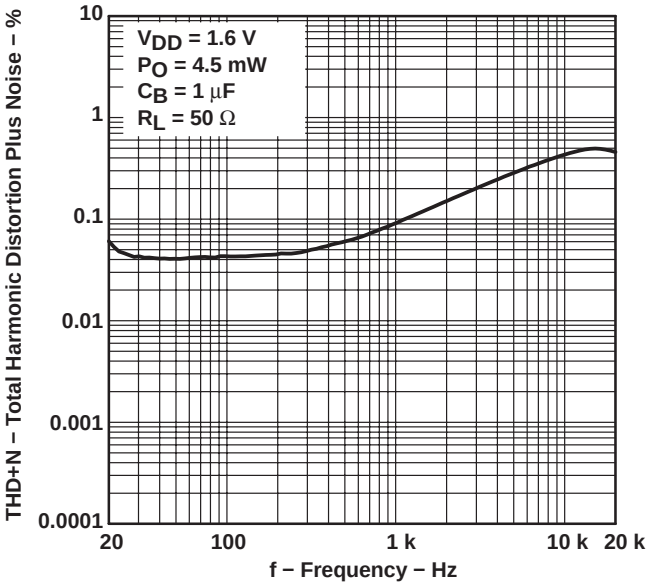


Figure 5

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT POWER

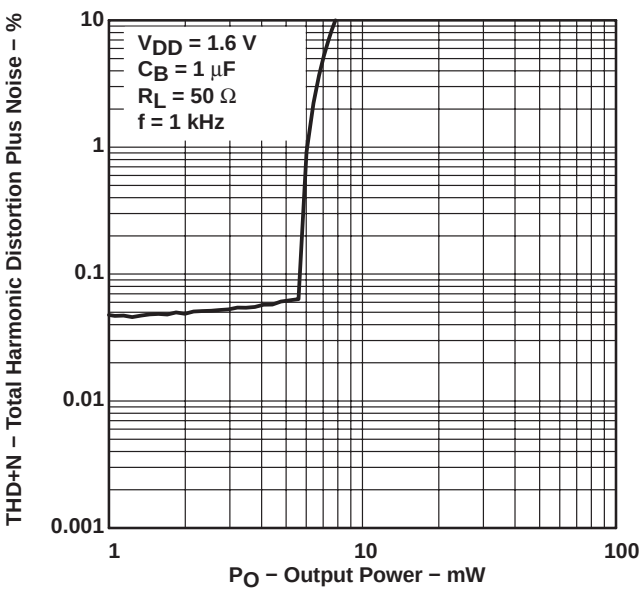


Figure 6

TOTAL HARMONIC DISTORTION PLUS NOISE vs FREQUENCY

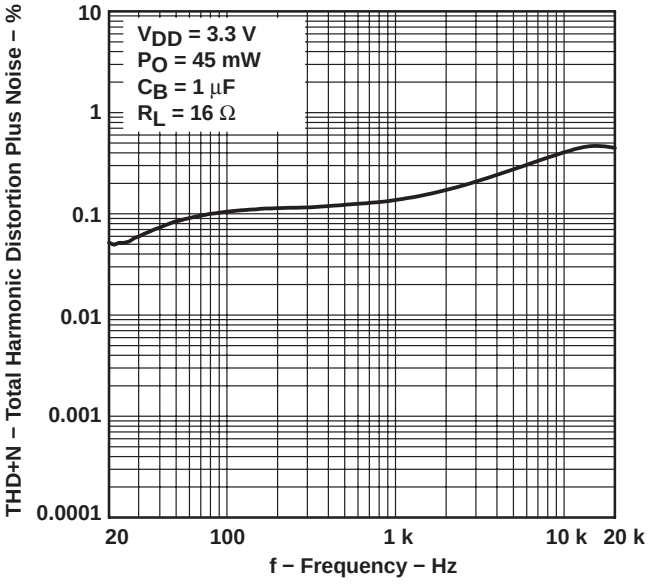


Figure 7

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT POWER

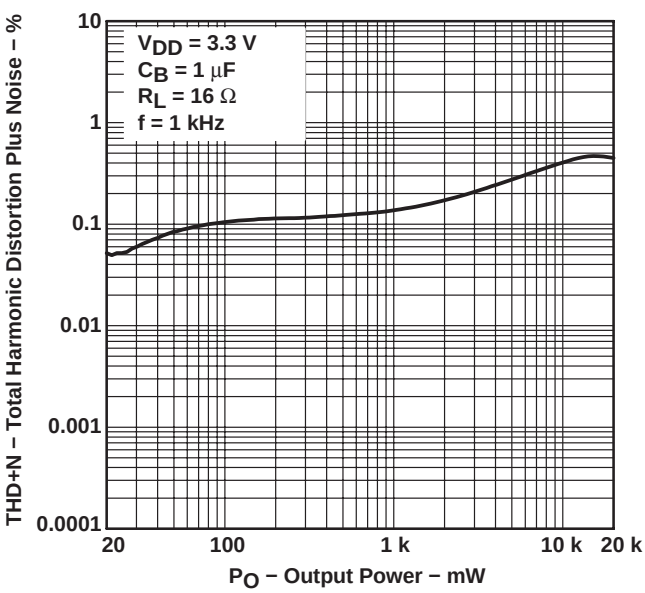


Figure 8

TYPICAL CHARACTERISTICS

TOTAL HARMONIC DISTORTION PLUS NOISE vs FREQUENCY

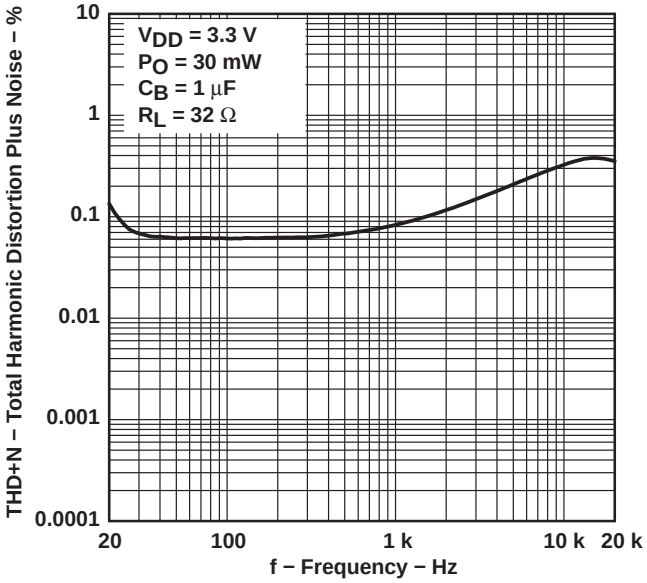


Figure 9

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT POWER

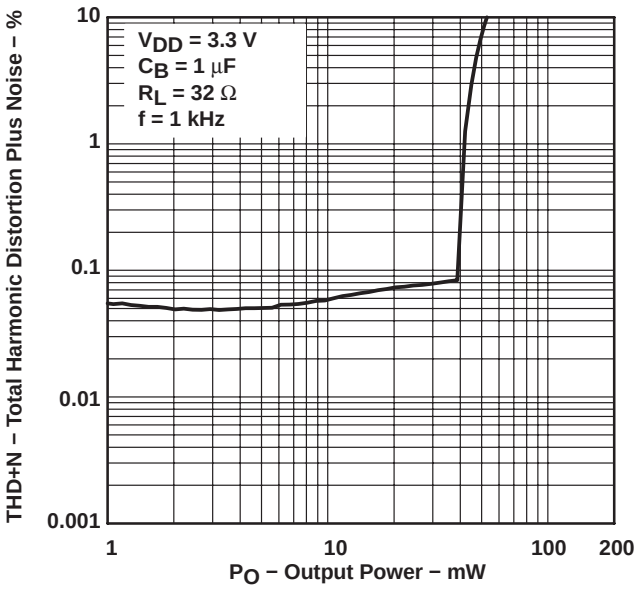


Figure 10

TOTAL HARMONIC DISTORTION PLUS NOISE vs FREQUENCY

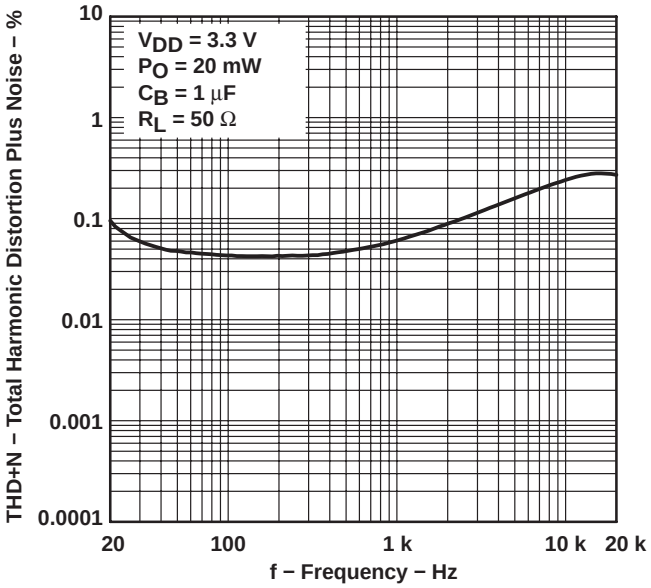


Figure 11

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT POWER

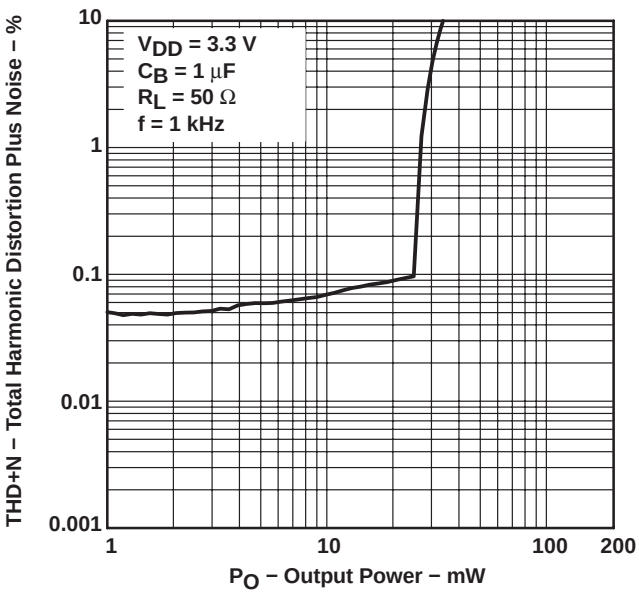


Figure 12

TYPICAL CHARACTERISTICS

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT VOLTAGE

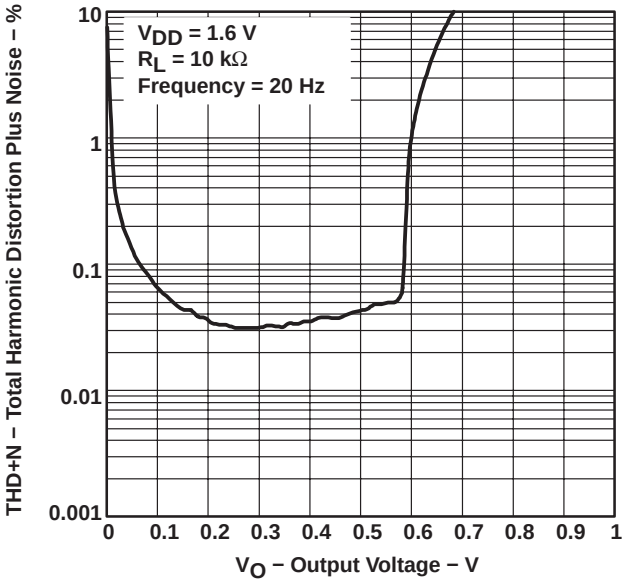


Figure 13

TOTAL HARMONIC DISTORTION PLUS NOISE vs OUTPUT VOLTAGE

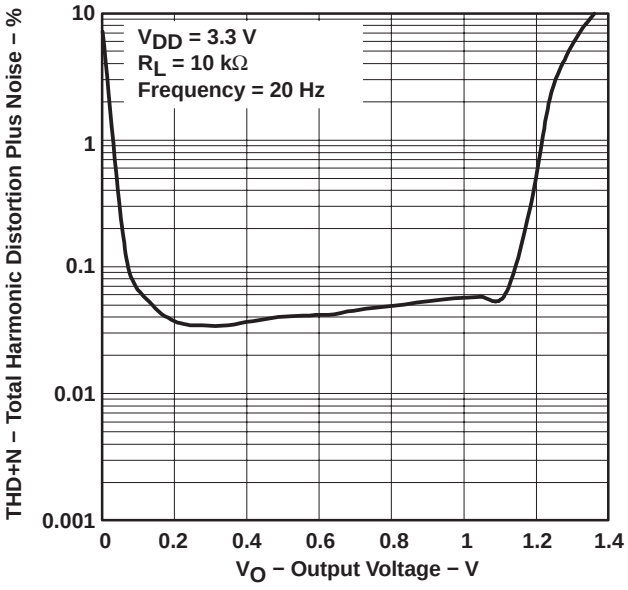


Figure 14

OUTPUT POWER vs LOAD RESISTANCE

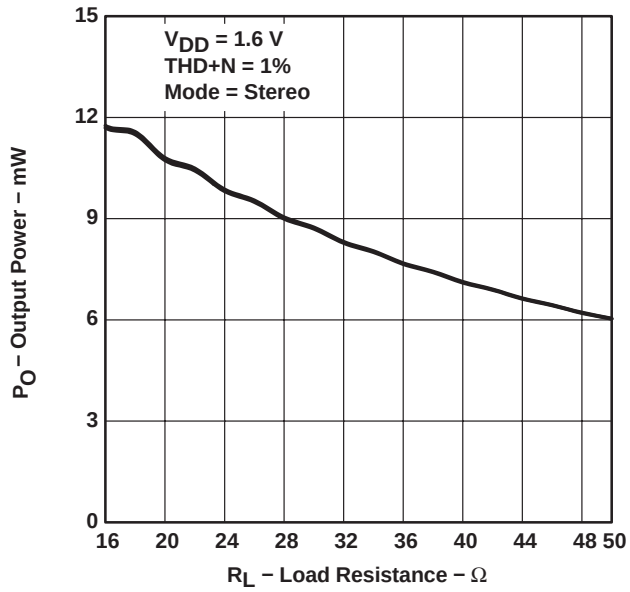


Figure 15

OUTPUT POWER vs LOAD RESISTANCE

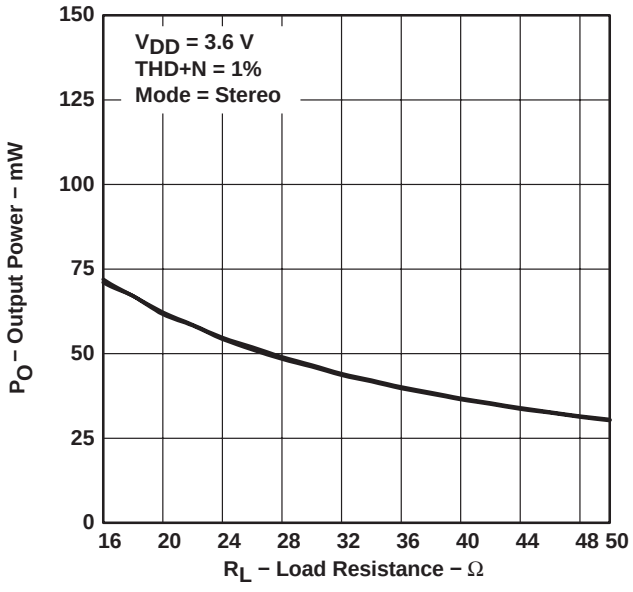


Figure 16

TYPICAL CHARACTERISTICS

SUPPLY RIPPLE REJECTION RATIO vs FREQUENCY

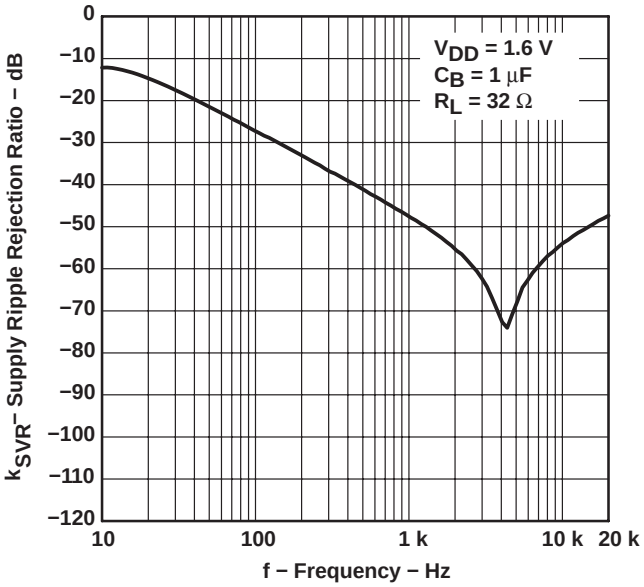


Figure 17

SUPPLY RIPPLE REJECTION RATIO vs FREQUENCY

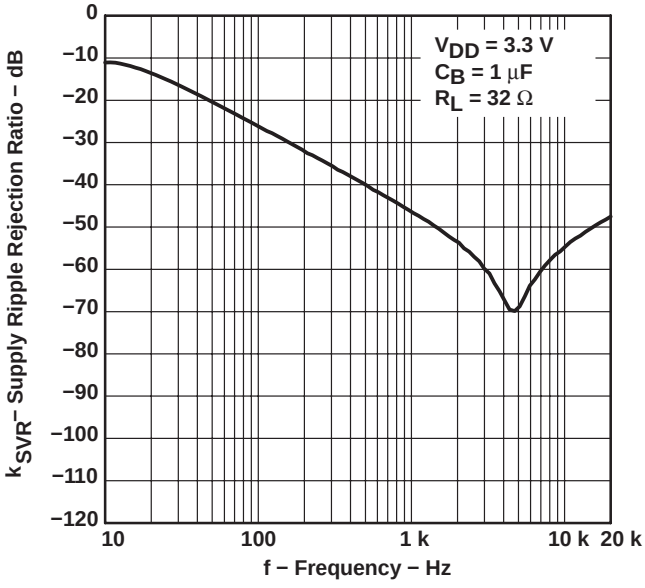


Figure 18

OUTPUT NOISE VOLTAGE vs FREQUENCY

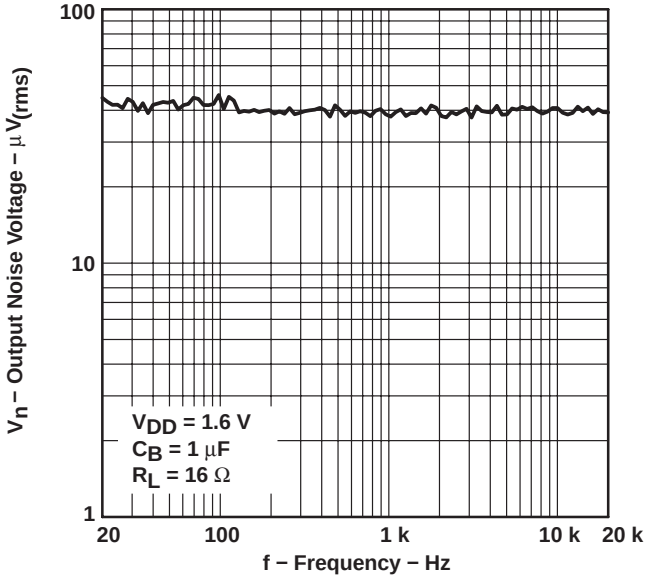


Figure 19

OUTPUT NOISE VOLTAGE vs FREQUENCY

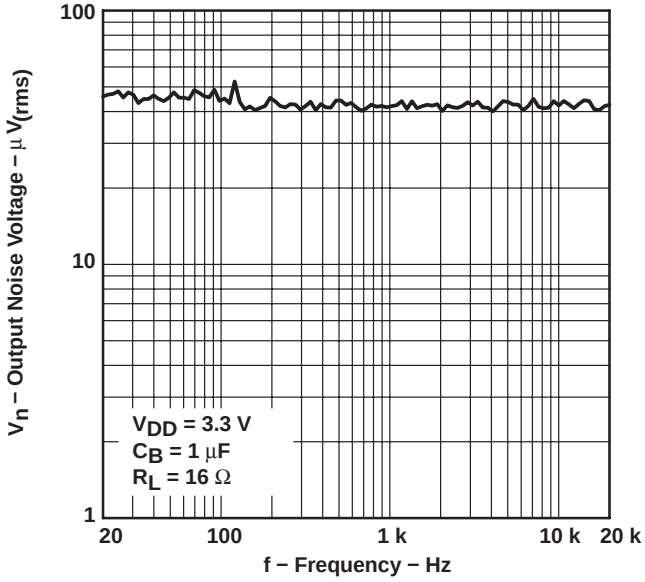


Figure 20

TYPICAL CHARACTERISTICS

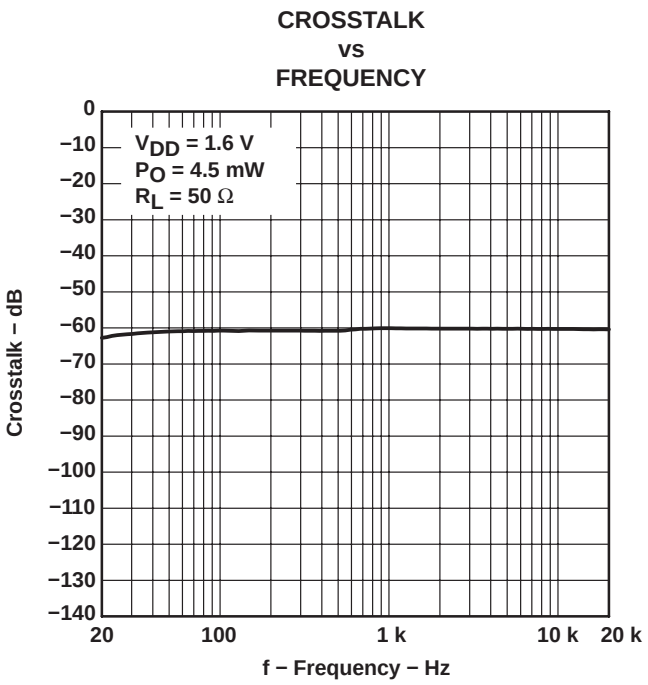


Figure 21

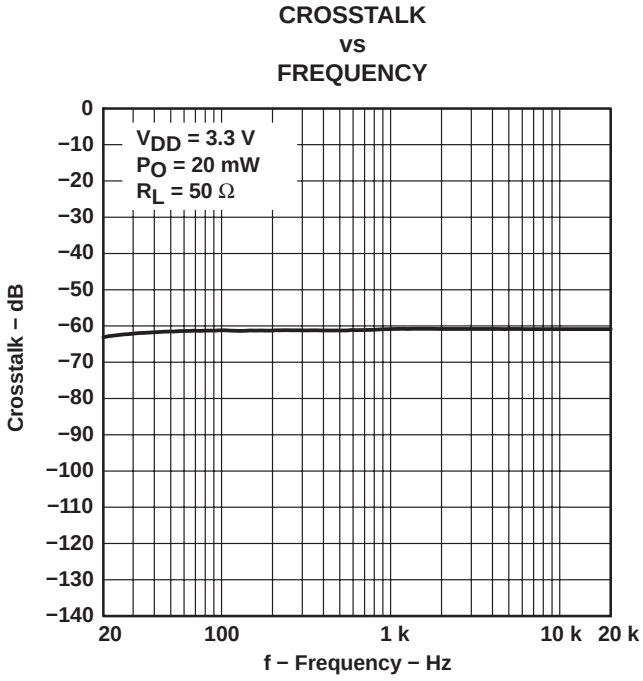


Figure 22

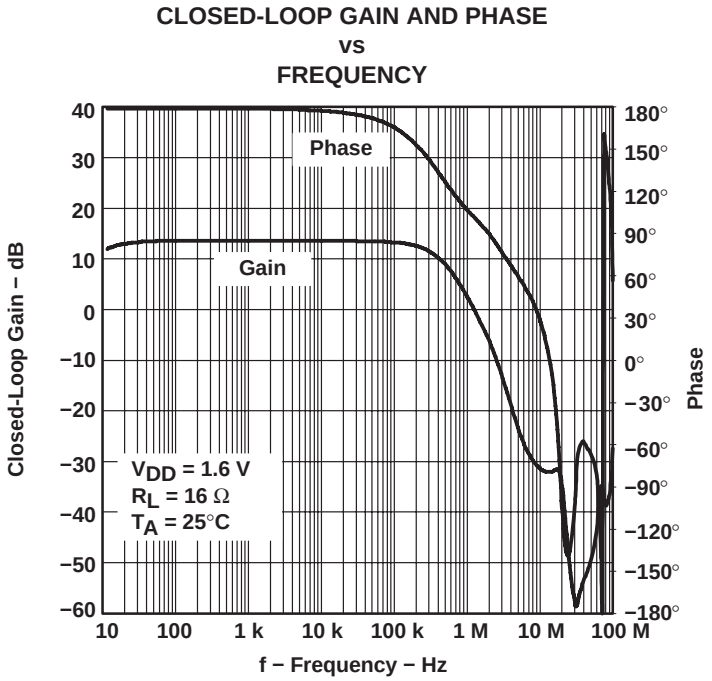


Figure 23

TYPICAL CHARACTERISTICS

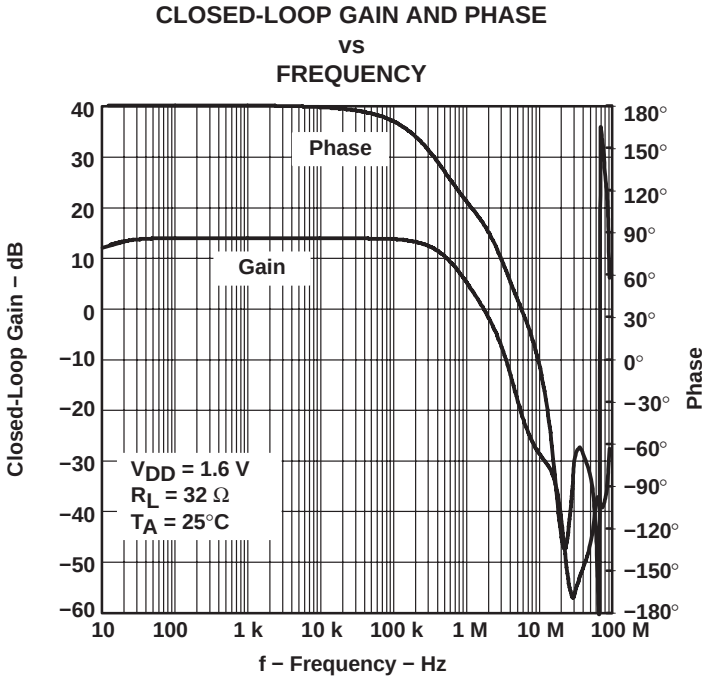


Figure 24

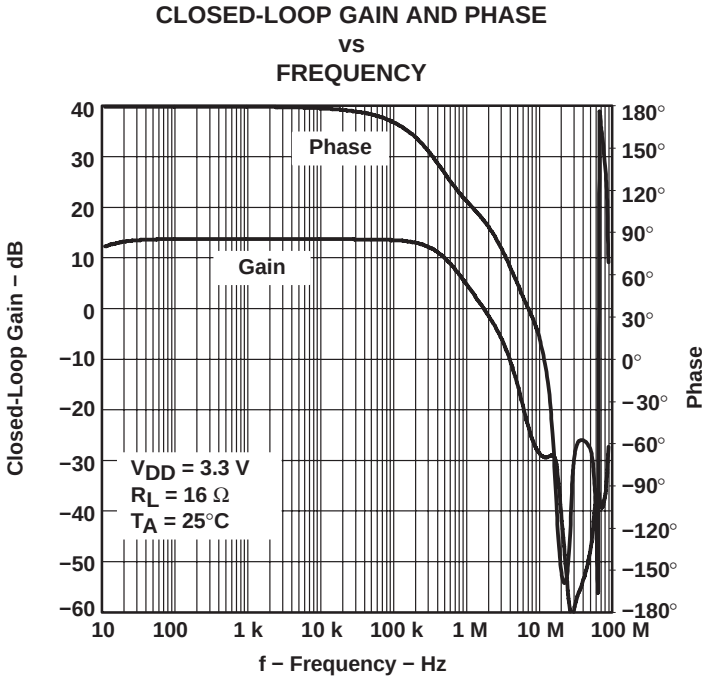


Figure 25

TYPICAL CHARACTERISTICS

CLOSED-LOOP GAIN AND PHASE vs FREQUENCY

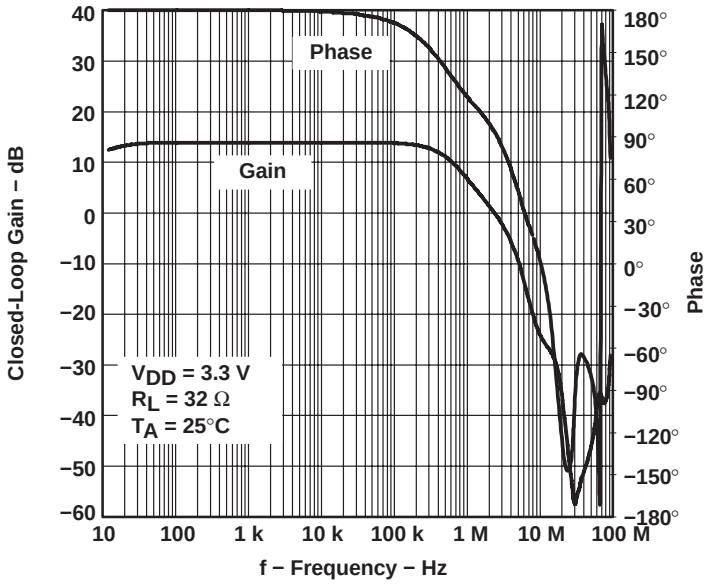


Figure 26

SUPPLY CURRENT vs SUPPLY VOLTAGE

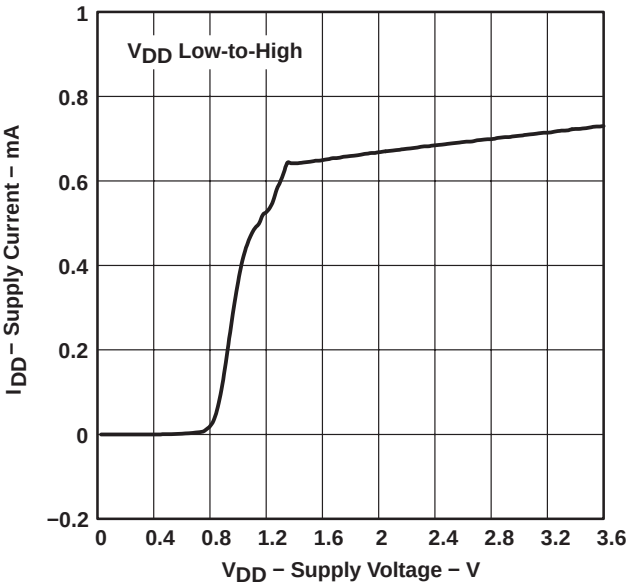


Figure 27

POWER DISSIPATION vs OUTPUT POWER

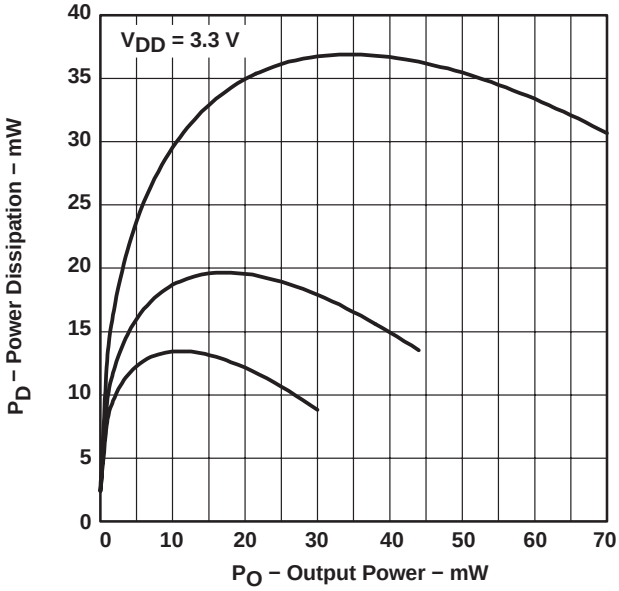


Figure 28

APPLICATION INFORMATION

input capacitor, C_I

In the typical application, an input capacitor (C_I) is required to allow the amplifier to bias the input signal to the proper dc level for optimum operation. In this case, C_I and R_I form a high-pass filter with the corner frequency determined in equation 1. R_I is set internally and is fixed at 20 kΩ.

$$f_c = \frac{1}{2\pi R_I C_I} \quad (1)$$

The value of C_I is important to consider, as it directly affects the bass (low frequency) performance of the circuit. Consider the example where the specification calls for a flat bass response down to 20 Hz. Equation 1 is reconfigured as equation 2.

$$C_I = \frac{1}{2\pi R_I f_c} \quad (2)$$

In this example, C_I is 0.40 μF, so one would likely choose a value in the range of 0.47 μF to 1 μF. A further consideration for this capacitor is the leakage path from the input source through the input network (R_I, C_I) and the feedback resistor (R_F) to the load. This leakage current creates a dc offset voltage at the input to the amplifier that reduces useful headroom. For this reason a low-leakage tantalum or ceramic capacitor is the best choice. When polarized capacitors are used, the positive side of the capacitor should face the amplifier input in most applications, as the dc level there is held at $V_{DD}/4$, which is likely higher than the source dc level. It is important to confirm the capacitor polarity in the application.

power supply decoupling, C_S

The TPA6102A2 is a high-performance CMOS audio amplifier that requires adequate power supply decoupling to ensure that the output total harmonic distortion (THD) is as low as possible. Power supply decoupling also prevents oscillations for long lead lengths between the amplifier and the speaker. The optimum decoupling is achieved by using two capacitors of different types that target different types of noise on the power supply leads. For higher frequency transients, spikes, or digital hash on the line, a good low equivalent-series-resistance (ESR) ceramic capacitor, typically 0.1 μF, placed as close as possible to the device V_{DD} lead, works best. For filtering lower-frequency noise signals, a larger aluminum electrolytic capacitor of 10 μF or greater placed near the power amplifier is recommended.

midrail bypass capacitor, C_B

The midrail bypass capacitor (C_B) serves several important functions. During start-up, C_B determines the rate at which the amplifier starts up. This helps to push the start-up pop noise into the subaudible range (so low it can not be heard). The second function is to reduce noise produced by the power supply caused by coupling into the output drive signal. This noise is from the midrail generation circuit internal to the amplifier. The capacitor is fed from a 55-kΩ source inside the amplifier. To keep the start-up pop as low as possible, the relationship shown in equation 3 should be maintained.

$$\frac{1}{\left(C_B \times 55\ k\Omega\right)} \leq \frac{1}{\left(C_I R_I\right)} \quad (3)$$

As an example, consider a circuit where C_B is 1 μF, C_I is 1 μF, and R_I is 20 kΩ. Inserting these values into the equation 3 results in: $18.18 \leq 50$ which satisfies the rule. Bypass capacitor (C_B) with values of 0.47-μF to 1-μF ceramic or tantalum low-ESR capacitors are recommended for the best THD and noise performance.

APPLICATION INFORMATION

output coupling capacitor, C_C

In the typical single-supply single-ended (SE) configuration, an output coupling capacitor (C_C) is required to block the dc bias at the output of the amplifier, thus preventing dc currents in the load. As with the input coupling capacitor, the output coupling capacitor and impedance of the load form a high-pass filter governed by equation 4.

$$f_c = \frac{1}{2\pi R_L C_C} \quad (4)$$

The main disadvantage, from a performance standpoint, is that the typically small load impedances drive the low-frequency corner higher. Large values of C_C are required to pass low-frequencies into the load. Consider the example where a C_C of 68 µF is chosen and loads vary from 32 Ω to 47 kΩ. Table 1 summarizes the frequency response characteristics of each configuration.

Table 1. Common-Load Impedances vs Low-Frequency Output Characteristics in SE Mode

R_L	C_C	Lowest Frequency
32 Ω	68 µF	73 Hz
10,000 Ω	68 µF	0.23 Hz
47,000 Ω	68 µF	0.05 Hz

As Table 1 indicates, headphone response is adequate and drive into line level inputs (a home stereo for example) is very good.

The output-coupling capacitor required in single-supply SE mode also places additional constraints on the selection of other components in the amplifier circuit. With the rules described earlier still valid, add the following relationship:

$$\frac{1}{\left(C_B \times 55\ k\Omega\right)} \leq \frac{1}{\left(C_I R_I\right)} \ll \frac{1}{R_L C_C} \quad (5)$$

using low-ESR capacitors

Low-ESR capacitors are recommended throughout this application. A real capacitor can be modeled simply as a resistor in series with an ideal capacitor. The voltage drop across this resistor minimizes the beneficial effects of the capacitor in the circuit. The lower the equivalent value of this resistance, the more the real capacitor behaves like an ideal capacitor.

3.3-V versus 1.6-V operation

The TPA6102A2 was designed for operation over a supply range of 1.6 V to 3.6 V. There are no special considerations for 1.6-V versus 3.3-V operation as far as supply bypassing, gain setting, or stability. Supply current is slightly reduced from 0.75 mA (typical) to 0.65 mA (typical). The most important consideration is that of output power. Each amplifier can produce a maxium output voltage swing within a few hundred millivolts of the rails with a 10-kΩ load. However, this voltage swing decreases as the load resistance decreases and the $r_{DS(on)}$ as the output stage transistors becomes more significant. For example, for a 32-Ω load, the maximum peak output voltage with V_{DD} = 1.6 V is approximately 0.7 V with no clipping distortion. This reduced voltage swing effectively reduces the maximum undistorted output power.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPA6102A2D	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	6102A2
TPA6102A2D.A	Active	Production	SOIC (D) | 8	75 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	6102A2
TPA6102A2DGK	Active	Production	VSSOP (DGK) | 8	80 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AJN
TPA6102A2DGK.A	Active	Production	VSSOP (DGK) | 8	80 | TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AJN
TPA6102A2DGKR	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AJN
TPA6102A2DGKR.A	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AJN

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

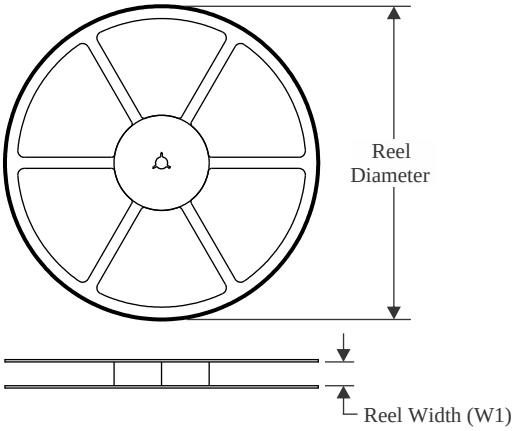


TAPE DIMENSIONS

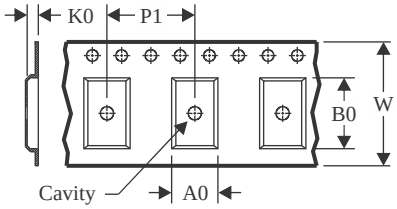

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

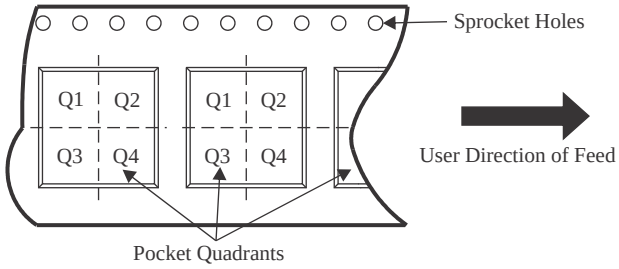

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPA6102A2DGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS

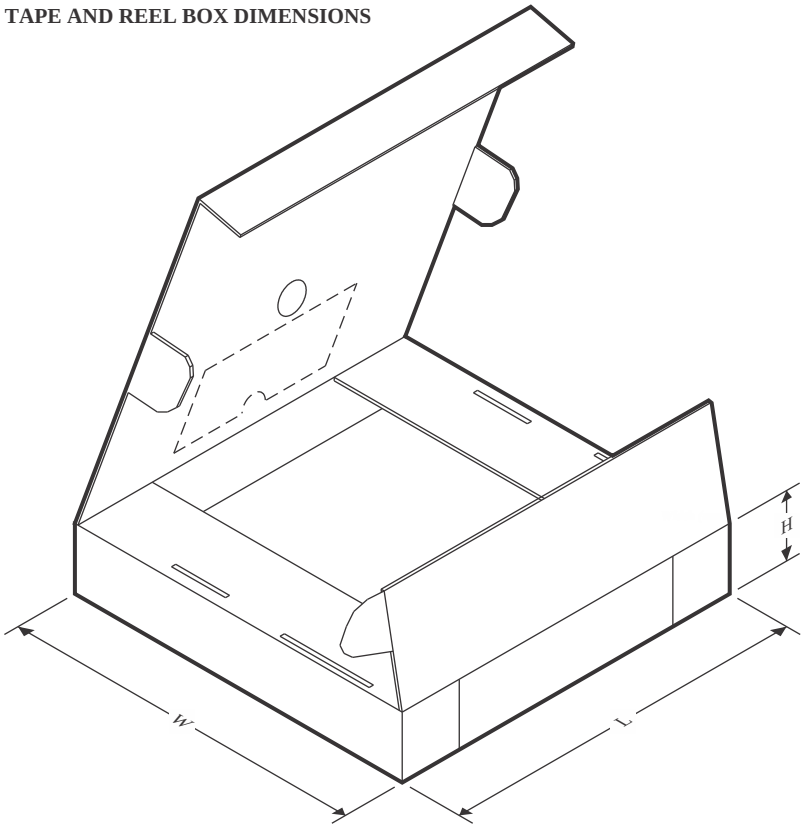

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPA6102A2DGKR	VSSOP	DGK	8	2500	358.0	335.0	35.0

TUBE

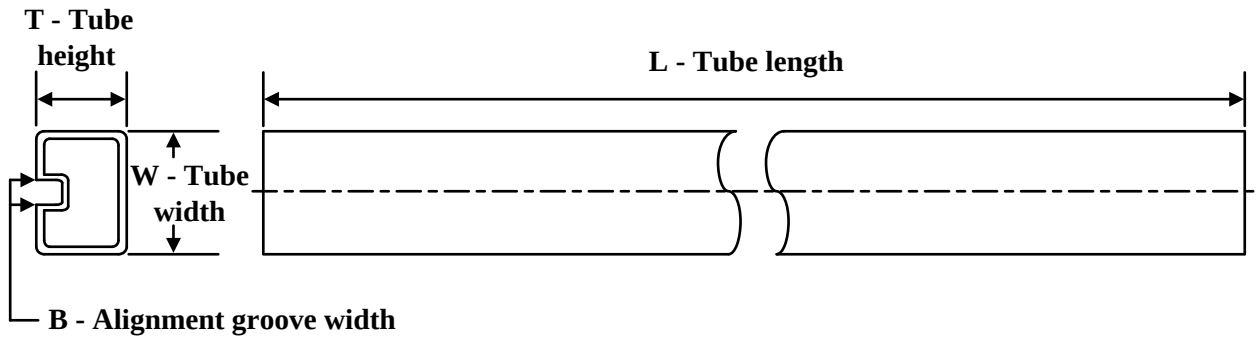

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
TPA6102A2D	D	SOIC	8	75	505.46	6.76	3810	4
TPA6102A2D.A	D	SOIC	8	75	505.46	6.76	3810	4
TPA6102A2DGK	DGK	VSSOP	8	80	274	6.2	2540	2.5
TPA6102A2DGK.A	DGK	VSSOP	8	80	274	6.2	2540	2.5




PACKAGE OUTLINE

D0008A


SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

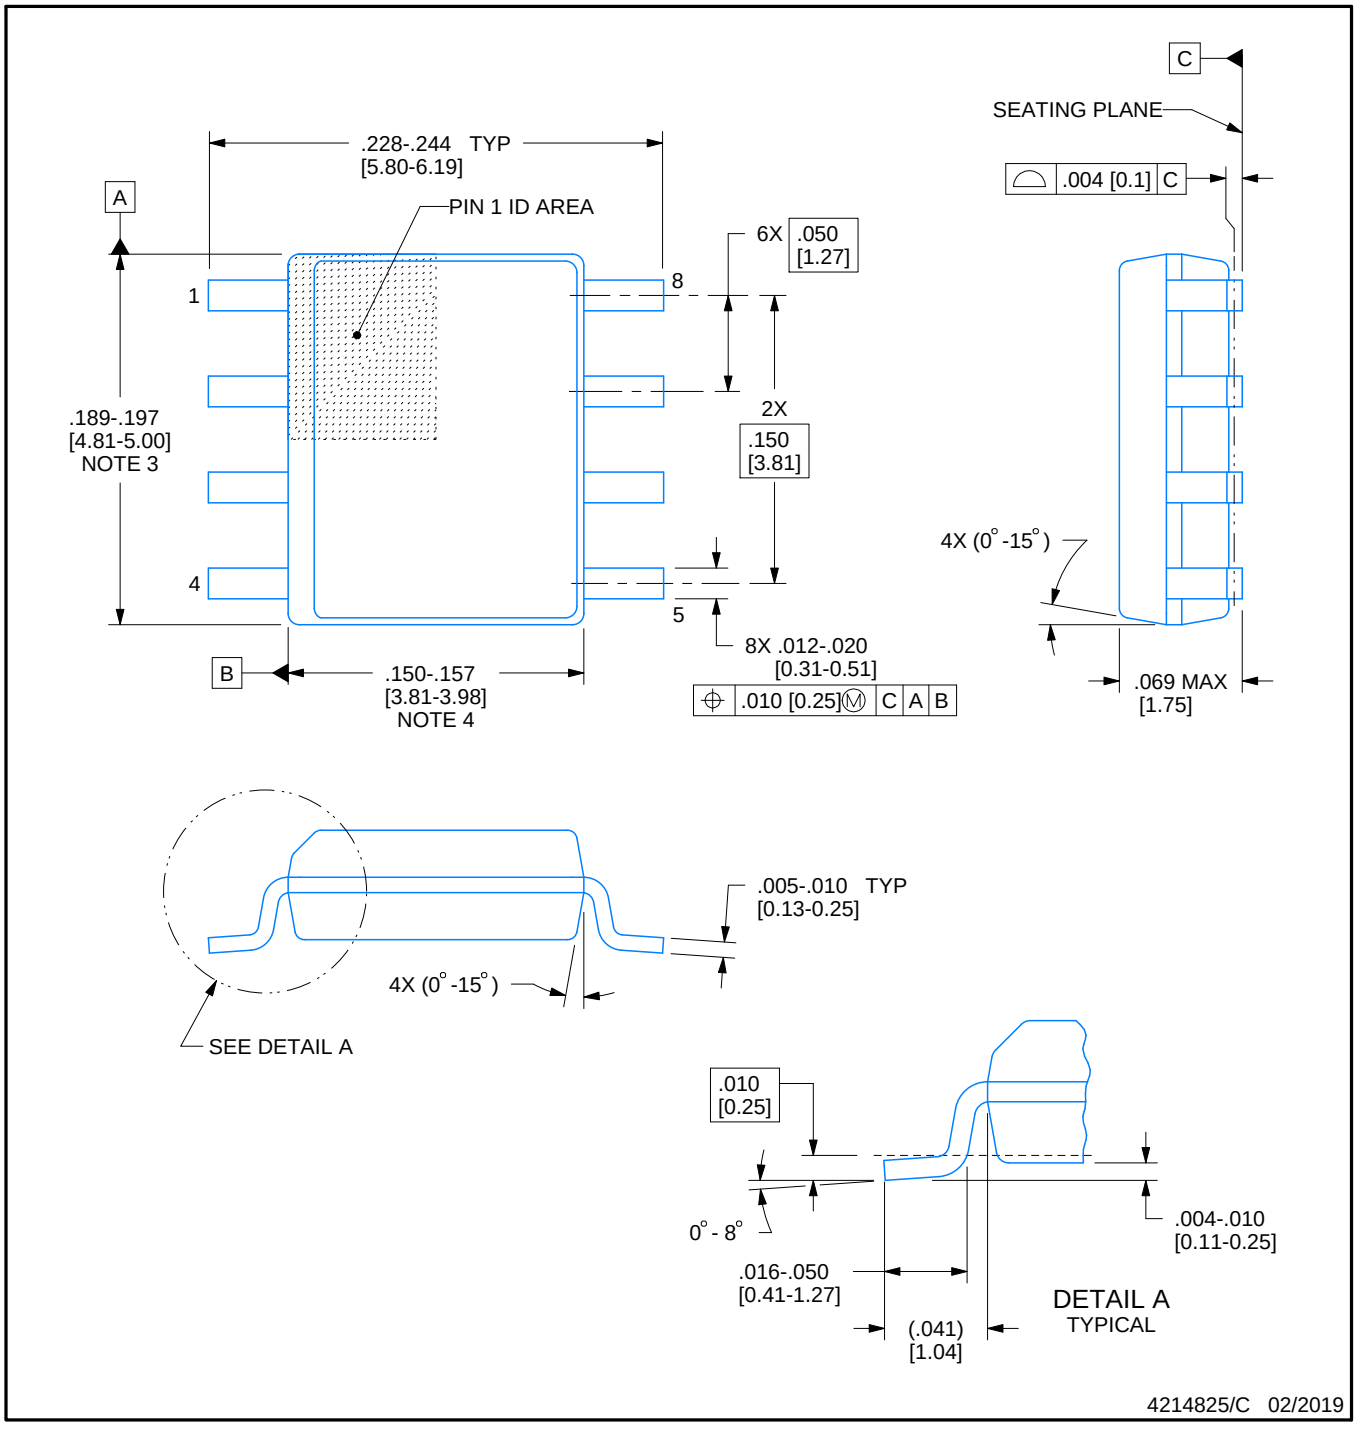


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

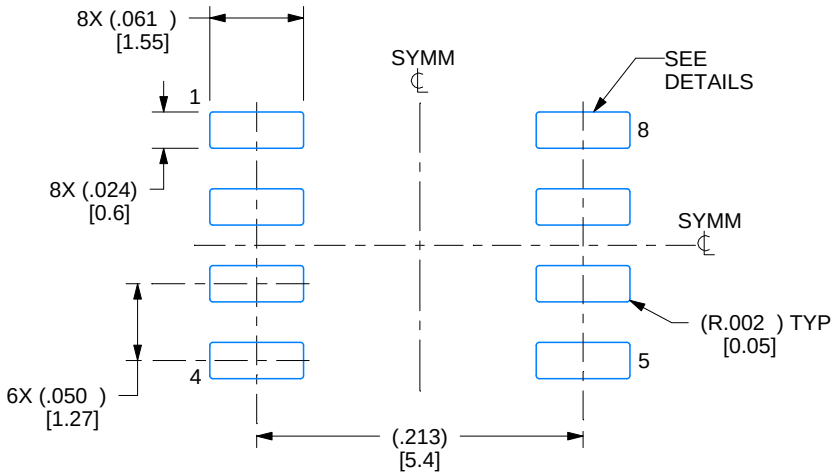

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

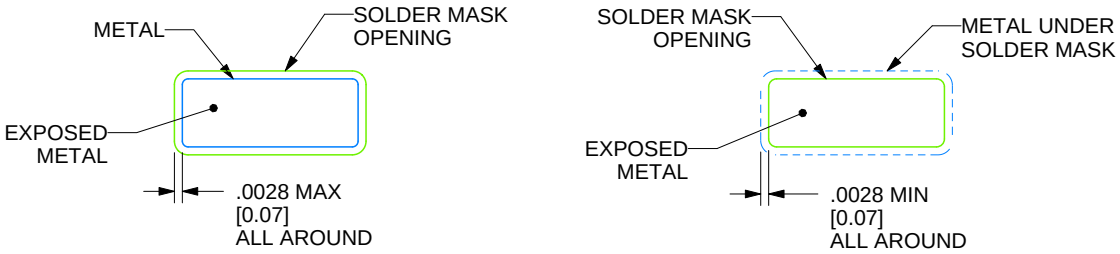

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

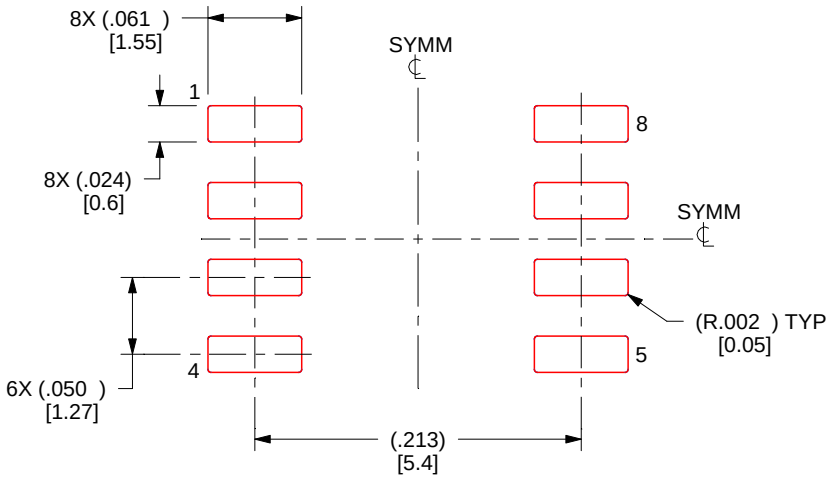

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

PACKAGE OUTLINE

DGK0008A

VSSOP - 1.1 mm max height


SMALL OUTLINE PACKAGE

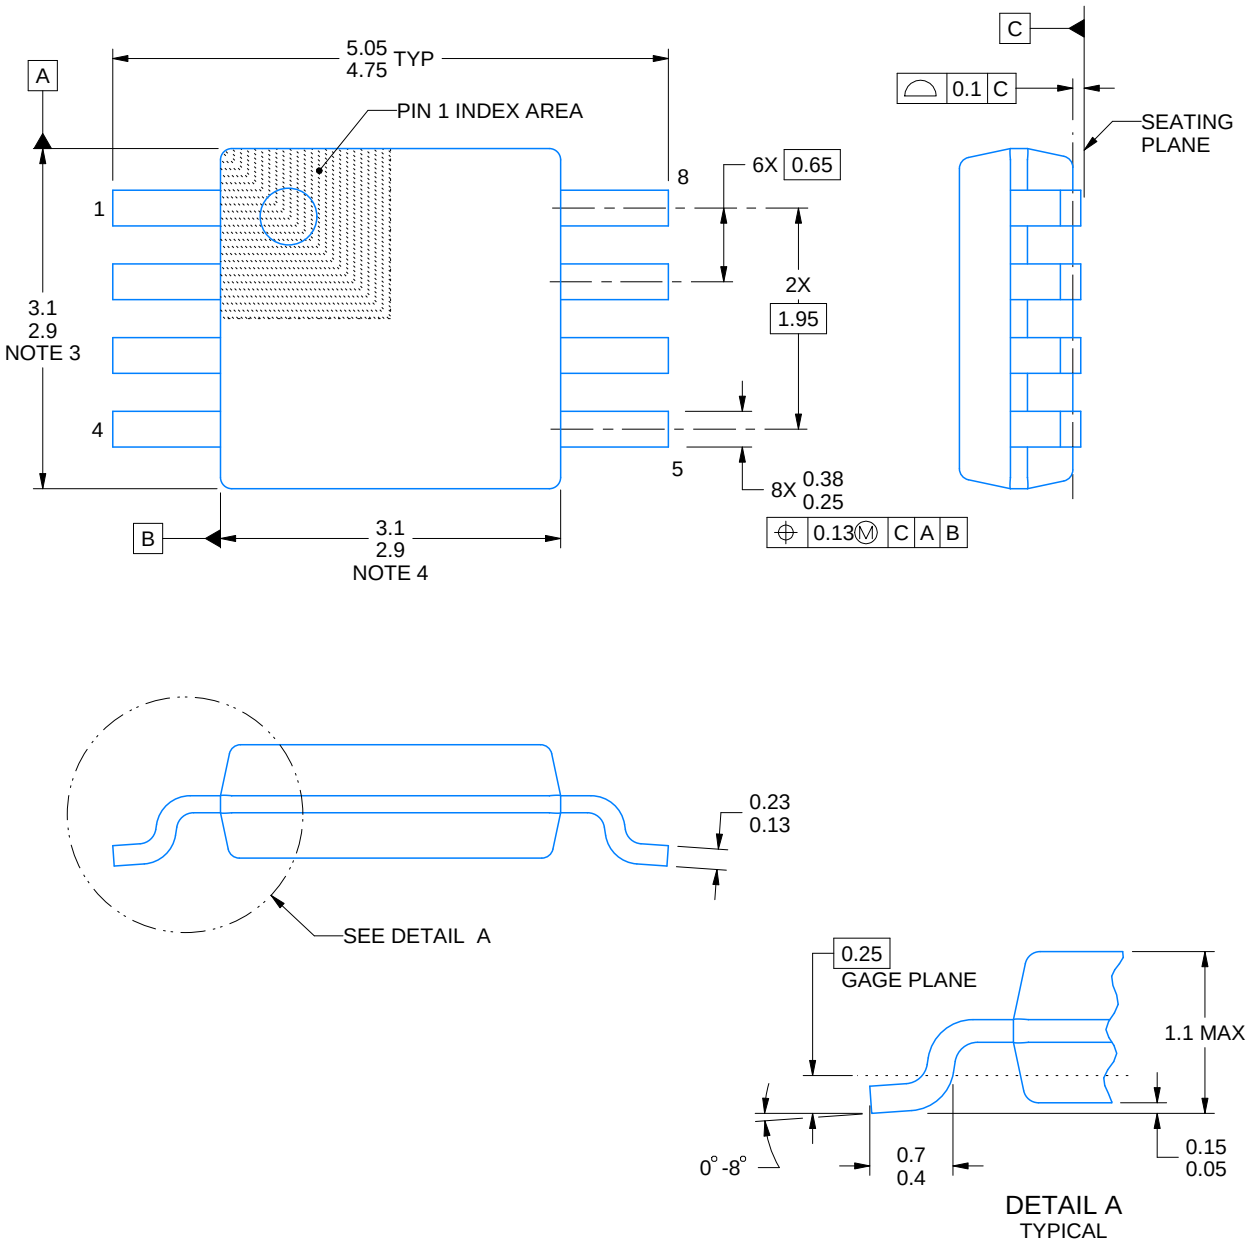


PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

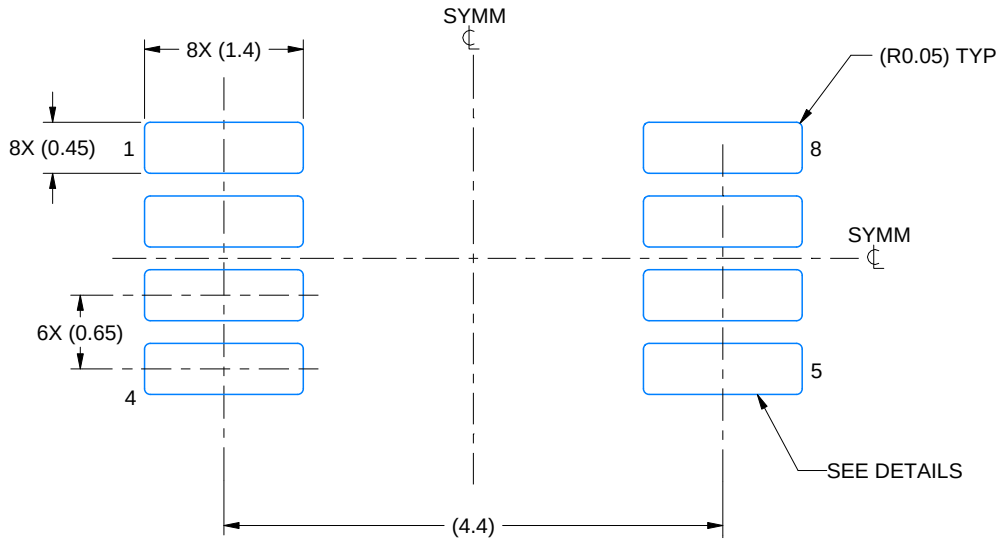

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

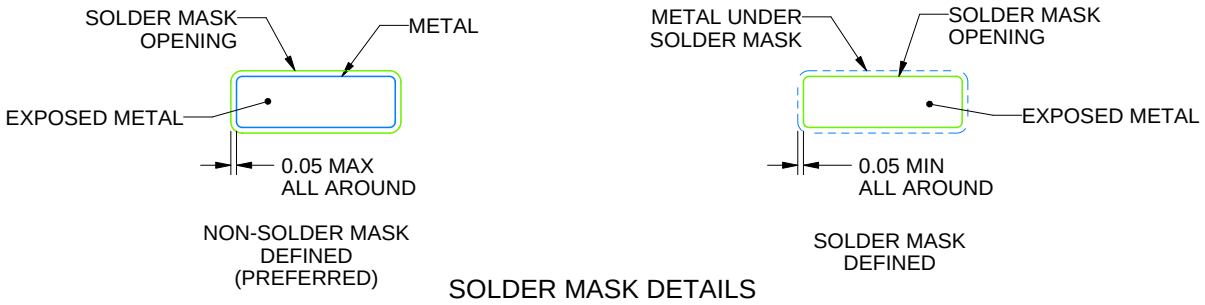


SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

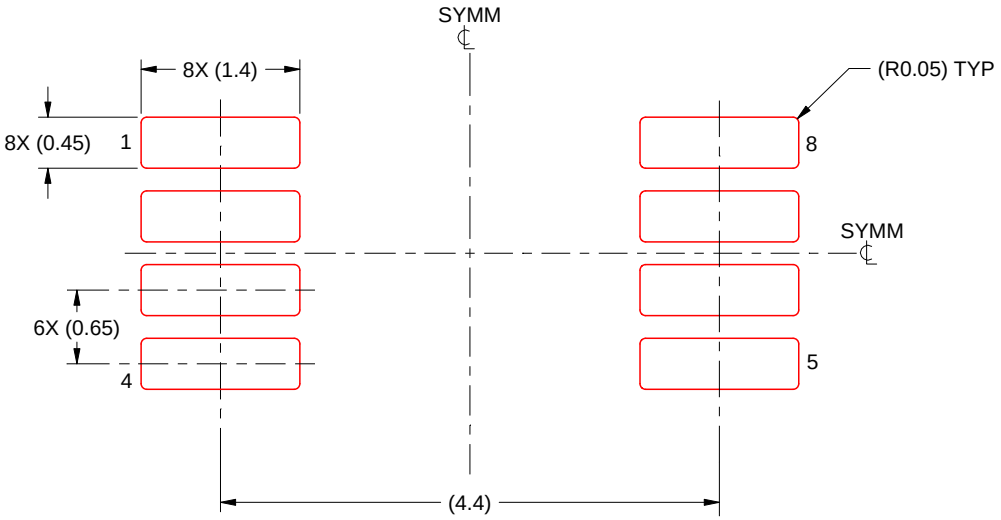

SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025