# TPS723 200-mA, Low-Noise, High-PSRR, Negative Output Low-Dropout Linear Regulators

## 1 Features

- Input voltage range: –2.7V to –10V (–11V abs. max)
- Available in –2.5V (fixed) and –1.186V to –10V (adjustable) versions
- $V_{OUT}$ accuracy (across line, load and temperature):
  - ±1.6% for new chip
  - ±3.0% for legacy chip
- Output current: Up to 200mA
- Ultra-low noise: 60μ$V_{RMS}$ (typ) with 10nF NR cap
- Low $I_Q$ (new chip): 30μA at $I_{LOAD}$ = 0mA
- High PSRR: 65dB (typ) at 1kHz, 40dB (typ) at 100kHz
- Low dropout voltage:
  - 140mV (typ) at 200mA, –2.5V (new chip)
  - 280mV (typ) at 200mA, –2.5V (legacy chip)
- Stable with a 2.2μF ceramic output capacitor
- Less than 2μA (max) quiescent current in shutdown mode
- Thermal and overcurrent protection
- Operating junction temperature: –40°C to +125°C
- Packages:
  - New chip:
    - 5-pin SOT-23 (DBV) [$R_{\theta JA}$: 153.7°C/W]
  - Legacy chip:
    - 5-pin SOT-23 (DBV) [$R_{\theta JA}$: 206.9°C/W]
    - 5-pin SOT-23-THIN (DDC) [$R_{\theta JA}$: 194.8°C/W]
    - 6-pin WSON (DRV) [$R_{\theta JA}$: 85.6°C/W]

## 2 Applications

- Optical modules
- Semiconductor manufacturing
- Medical accessories
- Oscilloscopes
- Active antenna system mMIMO (AAS)

## 3 Description

The TPS723 low-dropout (LDO) negative voltage regulator offers an ideal combination of features to support low noise analog and mixed-signal applications. The TPS723 supports input voltages from –10V to –2.7V, and outputs from –10V to –1.186V (in adjustable config). This regulator is stable with small, low-cost ceramic capacitors (up-to 2.2μF), and includes enable (EN) and noise reduction (NR) functions.


The TPS723 supports very tight DC accuracy of ±1.6% (new chip) over line, load and temperature range. The device responds quickly to line and load transients. The TPS723 supports a low dropout of typically 140mV (typ , new chip) at 200mA of load current. The device has built-in protection mechanism for over-current and overtemperature for reliable operation of the LDO.

The TPS723 supports low noise on output (60μ$V_{RMS}$ with NR cap of 10nF) and available in a small 5-pin SOT-23 package,with performance fully specified over a temperature range of –40°C to +125°C.

**Package Information**

| PART NUMBER | PACKAGE(1) (2) | PACKAGE SIZE(3) |
|---|---|---|
| TPS723 | DBV (SOT-23, 5) | 2.9mm × 2.8mm |
| | DDC (SOT-23-THIN, 5) | 2.9mm × 2.8mm |
| | DRV (WSON, 6) | 2mm × 2mm |

(1) For more information, see Section 10.
(2) The two SOT-23 packages are identical in size, but the SOT-23-THIN package is thinner.
(3) The package size (length × width) is a nominal value and includes pins, where applicable.

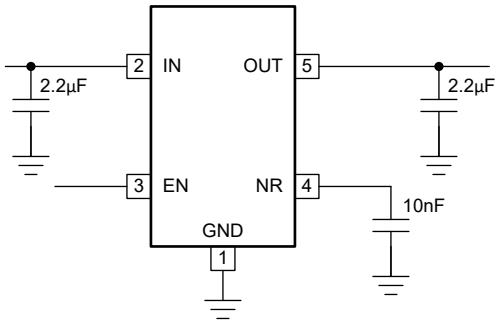


**Typical Application Circuit**

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

# Table of Contents

**1 Features**....1
**2 Applications**....1
**3 Description**....1
**4 Pin Configuration and Functions**....3
**5 Specifications**....4
5.1 Absolute Maximum Ratings....4
5.2 ESD Ratings....4
5.3 Recommended Operating Conditions....4
5.4 Thermal Information....5
5.5 Electrical Characteristics....5
5.6 Typical Characteristics....7
**6 Detailed Description**....21
6.1 Overview....21
6.2 Functional Block Diagrams....21
6.3 Feature Description....23
6.4 Device Functional Modes....25
**7 Application and Implementation**....26
7.1 Application Information....26
7.2 Typical Application....29
7.3 Best Design Practices....31
7.4 Power Supply Recommendations....31
7.5 Layout....31
**8 Device and Documentation Support**....32
8.1 Device Support....32
8.2 Receiving Notification of Documentation Updates....32
8.3 Support Resources....32
8.4 Trademarks....32
8.5 Electrostatic Discharge Caution....32
8.6 Glossary....32
**9 Revision History**....33
**10 Mechanical, Packaging, and Orderable Information**....33


Copyright © 2026 Texas Instruments Incorporated

# 4 Pin Configuration and Functions

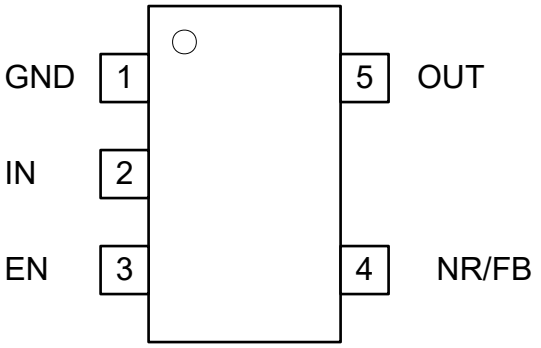



**Figure 4-1. DBV Package, 5-Pin SOT-23 (Top View)**

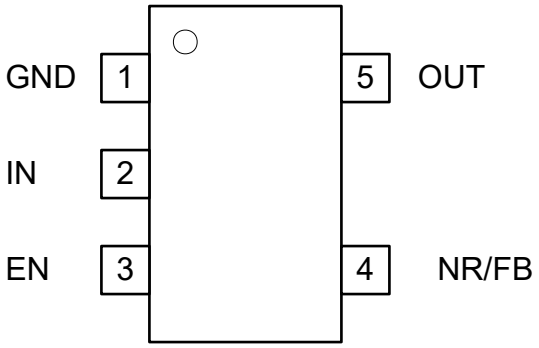



**Figure 4-2. DDC Package, 5-Pin SOT-23-THIN (Top View)**





**Figure 4-3. DRV Package, 6-Pin WSON (Top View)**

**Table 4-1. Pin Functions**

| PIN | | | I/O | DESCRIPTION |
|---|---|---|---|---|
| NAME | NO. | | | |
| | DBV, DDC | DRV | | |
| GND | 1 | 5 | — | Ground pin. |
| IN | 2 | 6 | I | Input supply pin. See the Section 5.3 table and the Section 7.1.3 section for more information. |
| EN | 3 | 4 | I | Bipolar enable pin. Driving this pin above the positive enable threshold or below the negative enable threshold turns on the regulator. Driving this pin below the positive disable threshold and above the negative disable threshold puts the regulator into shutdown mode. High and low thresholds are listed in the Section 5.5 table. This pin has a weak internal pulldown and can be left floating to enable. Refer to the Section 6.3.2 (EN) section for more details. |
| NR | 4 | 2 | — | Fixed voltage versions only. Connecting an external capacitor between this pin and ground, bypasses noise generated by the internal band gap. This configuration allows output noise to be reduced to very low levels. The capacitor on NR pin also helps in controlling the inrush current by introducing RC delay during start-up. Refer to the Section 6.3.7 section for more details. |
| FB | 4 | 2 | I | When using the adjustable device, this pin sets the output voltage with the help of a feedback divider. This functionality is only available in the adjustable configuration, and the pin must be connected through a resistor divider to the output for the device to function. |
| OUT | 5 | 1 | O | Output of the regulator. A capacitor is required from OUT to ground for stability. For best transient response, use the nominal recommended value or larger ceramic capacitor from OUT to ground; see the Section 5.3 table and the Section 7.1.3 section. Place the output capacitor as close to output of the device as possible. |
| N/C | — | 3 | — | Not internally connected. Leave this pin open or connected to any potential. Tie this pin to ground for improved thermal performance. |

Copyright © 2026 Texas Instruments Incorporated

# 5 Specifications

## 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

| | | | MIN | MAX | UNIT |
|---|---|---|---|---|---|
| Voltage | IN | Input supply voltage range | –11 | 0.3 | V |
| | EN | Enable voltage range | $-V_{IN}$ | 5.5 | |
| | OUT | Output voltage range | –11 | 0.3 | |
| | NR | NR voltage range (legacy chip) | –11 | 5.5 | |
| | | NR voltage range (new chip) | –6 | 0.3 | |
| Current | | OUT | Internally limited | | A |
| Output short-circuit duration | | | Indefinite | | |
| Continuous total power dissipation | | | See Thermal Information table | | |
| $T_J$ | | Operating junction temperature | –65 | 150 | °C |
| $T_{stg}$ | | Storage temperature | –65 | 150 | °C |

(1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

## 5.2 ESD Ratings

| | | | VALUE (New chip) | VALUE (Legacy chip) | UNIT |
|---|---|---|---|---|---|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1) | ±2000 | ±1000 | V |
| | | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins(2) | ±750 | ±500 | |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

## 5.3 Recommended Operating Conditions

over operating junction temperature range (unless otherwise noted)

| | | MIN | NOM | MAX | UNIT |
|---|---|---|---|---|---|
| $V_{IN}$ | Input supply voltage range | –10 | | –2.7 | V |
| $V_{OUT}$ | Output voltage range | –10 | | –1.186 | |
| $V_{EN}$ | Enable voltage range | –10 | | 5.0 | |
| $I_{OUT}$ | Output current | 0 | | 200 | mA |
| $C_{IN}$ (1) | Input capacitor (legacy chip) | 0.1 | | 2.2 | µF |
| | Input capacitor (new chip) | | 0.47 | | |
| $C_{OUT}$ (2) | Output capacitor | 2.2 | | 100 | |
| $C_{NR}$ | NR capacitor | | 0.01 | | |
| $C_{FF}$ (3) | Feed-forward capacitor (for adjustable, new chip only) | | 0.01 | | |
| $C_{OUT}$ ESR | Output capacitor ESR (for new chip) | | | 0.5 | Ω |
| $T_J$ | Operating junction temperature | –40 | | 125 | °C |

(1) An input capacitor is not required for LDO stability. However, an input capacitance with an effective value of 0.1µF minimum is recommended to counteract the effect of source resistance and inductance, which can in some cases cause symptoms of system level instability such as ringing or oscillation, especially in the presence of load transients.
(2) All capacitor values listed are the nominal value and the effective capacitance is assumed to derate to 50% of the nominal capacitor value.


Copyright © 2026 Texas Instruments Incorporated

(3) The $C_{FF}$ capacitor improves transient, noise, and PSRR performance, but is not required for regulator stability. Using a higher capacitance CFF is permissible but start-up time increases.

## 5.4 Thermal Information

| THERMAL METRIC(1) | | TPS723 | | | | UNIT |
|---|---|---|---|---|---|---|
| | | DBV (SOT23) [Legacy chip] | DBV (SOT23) [New chip] | DDC (SOT23–THIN) [Legacy chip] | DRV (WSON) [Legacy chip] | |
| | | 5 PINS | 5 PINS | 5 PINS | 6 PINS | |
| $R_{\theta JA}$ | Junction-to-ambient thermal resistance | 206.9 | 153.7 | 194.8 | 85.6 | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance | 120.5 | 73.4 | 41.4 | 83.7 | °C/W |
| $R_{\theta JB}$ | Junction-to-board thermal resistance | 35.9 | 34.8 | 35.9 | 47.3 | °C/W |
| $\Psi_{JT}$ | Junction-to-top characterization parameter | 13.3 | 7.6 | 1.0 | 3.7 | °C/W |
| $\Psi_{JB}$ | Junction-to-board characterization parameter | 35.0 | 34.5 | 35.7 | 47.3 | °C/W |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | N/A | N/A | N/A | 31.6 | °C/W |

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

## 5.5 Electrical Characteristics

Over operating junction temperature range ($T_J$ = –40°C to +125°C), $V_{IN}$ = – 2.7V or $V_{IN}$ = $V_{OUT(nom)}$ – 0.5V (whichever is lower), $I_{OUT}$ = 1mA, $V_{EN}$ = +1.5V, $C_{OUT}$ = 1µF, and $C_{NR}$ = 0.01µF, unless otherwise noted. Typical values are at $T_J$ = 25°C.

| PARAMETER | | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|---|
| $V_I$ | Input voltage range | | | –10 | | –2.7 | V |
| $V_{FB}$ | Feedback reference voltage (TPS72301) | Legacy chip | $T_J$ = 25°C | –1.210 | –1.186 | –1.162 | V |
| | Feedback reference voltage (TPS72301) | New chip | | –1.1883 | –1.186 | –1.1836 | |
| $V_O$ | Output voltage range (TPS72301) | | | –10 + $V_{DO}$ | | $V_{FB}$ | V |
| $V_O$ | Nominal | Legacy chip (TPS723) | $T_J$ = 25°C | –1 | | 1 | % |
| | Accuracy (fixed output) | | –10V ≤ $V_I$ ≤ $V_O$ – 0.5V, 10µA ≤ $I_O$ ≤ 200mA | –2 | ±1 | 2 | |
| | Accuracy (adjustable output) | | | –3 | ±1 | 3 | |
| | Accuracy (both fixed , adjustable) | New chip (TPS723) | –10V ≤ $V_I$ ≤ $V_O$ – 0.5V, 10µA ≤ $I_O$ ≤ 200mA | –1.6 | ±0.04 | 1.6 | |
| $\Delta V_O(\Delta V_I)$ | Line regulation | Legacy chip | –10V ≤ $V_I$ ≤ $V_{O(nom)}$ – 0.5V | | 0.04 | | %/V |
| | | New chip | | | –0.003 | | |
| $\Delta V_O(\Delta I_O)$ | Load regulation | Legacy chip | 0mA ≤ $I_O$ ≤ 200mA | | 0.002 | | %/mA |
| | | New chip | | | 0.0001 | | |
| $V_{DO}$ | Dropout voltage | Legacy chip | $I_O$ = 200mA, $V_O$ = 0.96 × $V_{O(NOM)}$ | | 280 | 500 | mV |
| | | New chip | | | 140 | 245 | |
| $V_{UVLO+}$ | Rising input supply UVLO | New chip | | –2.4 | –2.1 | | V |
| $V_{UVLO-}$ | Falling input supply UVLO | New chip | | | –1.9 | –1.4 | V |
| $I_{LIM}$ | Output current limit | Legacy chip | $V_O$ = 0.85 × $V_{O(NOM)}$ | 300 | 550 | 800 | mA |
| | | New chip | $V_O$ = 0.85 × $V_{O(NOM)}$ | 300 | 385 | 485 | |

Copyright © 2026 Texas Instruments Incorporated

## 5.5 Electrical Characteristics (continued)

Over operating junction temperature range ($T_J$ = –40°C to +125°C), $V_{IN}$ = – 2.7V or $V_{IN}$ = $V_{OUT(nom)}$ – 0.5V (whichever is lower), $I_{OUT}$ = 1mA, $V_{EN}$ = +1.5V, $C_{OUT}$ = 1µF, and $C_{NR}$ = 0.01µF, unless otherwise noted. Typical values are at $T_J$ = 25°C.

| PARAMETER | | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|---|
| $I_{GND}$ | Ground pin current | Legacy chip | $I_O$ = 0 mA ($I_Q$), –10V ≤ $V_I$ ≤ $V_O$ – 0.5V | | 130 | 200 | µA |
| | | | $I_O$ = 200 mA, –10V ≤ $V_I$ ≤ $V_O$ – 0.5V | | 350 | 500 | |
| | | New chip | $I_O$ = 0 mA ($I_Q$), –10V ≤ $V_I$ ≤ $V_O$ – 0.5V | | 30.0 | 55 | |
| | | | $I_O$ = 200 mA , –10V ≤ $V_I$ ≤ $V_O$ – 0.5V | | 290 | 450 | |
| $I_{SHDN}$ | Shutdown ground pin current | Legacy chip | – 0.4V ≤ $V_{EN}$ ≤ 0.4V, –10V ≤ $V_I$ ≤ $V_O$ – 0.5V | | 0.1 | 2.0 | µA |
| | | New chip | – 0.4V ≤ $V_{EN}$ ≤ 0.4V, –10V ≤ $V_I$ ≤ $V_O$ – 0.5V | | 0.7 | 2.0 | |
| $I_{FB}$ | Feedback pin current | Legacy chip | –10V ≤ $V_I$ ≤ $V_O$ – 0.5V | | 0.05 | 1.0 | µA |
| | | New chip | | | 0.001 | 0.1 | |
| $I_{EN}$ | EN pin current | Legacy chip | –10V ≤ $V_I$ ≤ $V_O$ – 0.5V, –10V ≤ $V_{EN}$ ≤ ±3.5V | | 0.1 | 2.0 | |
| | | New chip | | | 0.6 | 2.0 | |
| $V_{EN(HI)}$ | Enable threshold (positive) | Legacy chip | | 1.5 | | | V |
| $V_{EN(LO)}$ | Enable threshold (negative) | | | | | – 1.5 | V |
| $V_{DIS(HI)}$ | Disable threshold (positive) | | | | | 0.4 | V |
| $V_{DIS(LO)}$ | Disable threshold (negative) | | | – 0.4 | | | V |
| $V_{EN(HI)}$ | Enable threshold (positive) | New chip | | 1.5 | | | V |
| $V_{EN(LO)}$ | Enable threshold (negative) | | | | | – 1.5 | V |
| $V_{DIS(HI)}$ | Disable threshold (positive) | | | | | 0.4 | V |
| $V_{DIS(LO)}$ | Disable threshold (negative) | | | – 0.4 | | | V |
| $T_{sd+}$ | Thermal shutdown temperature | Legacy chip | Shutdown, temperature increasing | | 165 | | °C |
| $T_{sd-}$ | | | Reset, temperature decreasing | | 145 | | °C |
| $T_{sd+}$ | | New chip | Shutdown, temperature increasing | | 175 | | °C |
| $T_{sd-}$ | | | Reset, temperature decreasing | | 155 | | °C |
| PSRR | Power-supply ripple rejection | | $I_O$ = 200mA, 1kHz, $C_I$ = $C_O$ = 10µF | | 65 | | dB |
| | | | $I_O$ = 200mA, 10kHz, $C_I$ = $C_O$ = 10µF | | 48 | | |
| $V_n$ | Output noise voltage | | Bandwidth = 10Hz to 100kHz, $V_O$ = 2.5V, $I_O$ = 200mA, $C_{NR/SS}$ = 0.01µF, $C_O$ = 1µF | | 60 | | $\mu_{VRMS}$ |
| $t_{STR}$ | Start-up time | Legacy chip | $V_O$ = –2.5V, $C_O$ = 1µF, $R_L$ = 25Ω | | 1 | | ms |
| $t_{STR}$ | Start-up time | New chip | $V_O$ = –2.5V, $C_O$ = 1µF, $R_L$ = 25Ω | | 8 | | ms |


Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics

at $V_{IN} = V_{OUT(NOM)} – 0.5V$, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

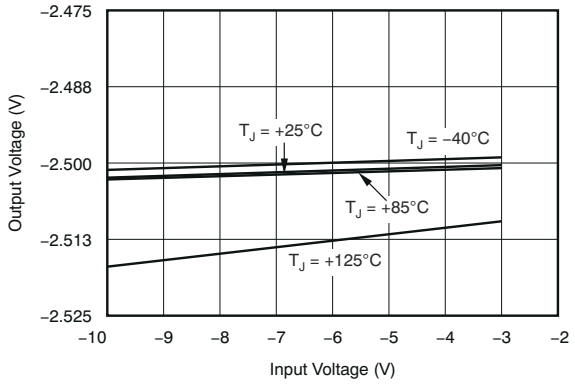



**Figure 5-1. Output Voltage vs Input Voltage (legacy chip)**

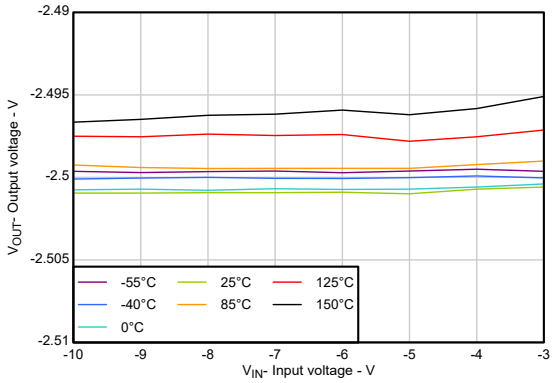



**Figure 5-2. Output Voltage vs Input Voltage (new chip)**

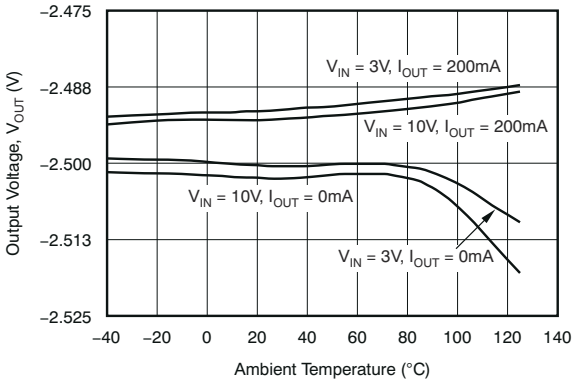



**Figure 5-3. Output Voltage vs Ambient Temperature (legacy chip)**

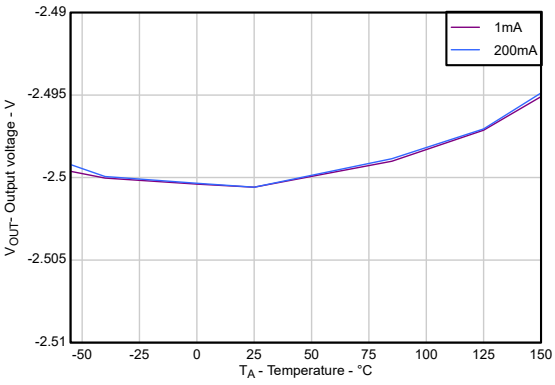



**Figure 5-4. Output Voltage vs Ambient Temperature (new chip)**

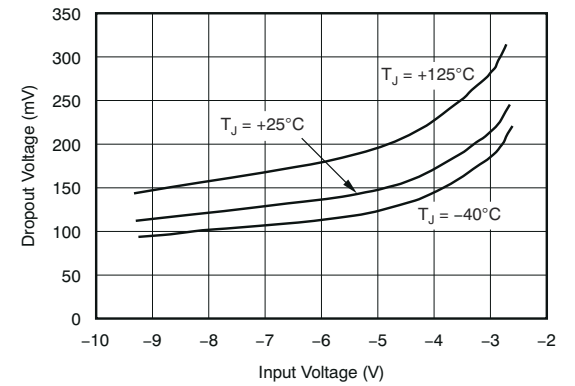



**Figure 5-5. TPS72301 Dropout Voltage vs Input Voltage (legacy chip)**

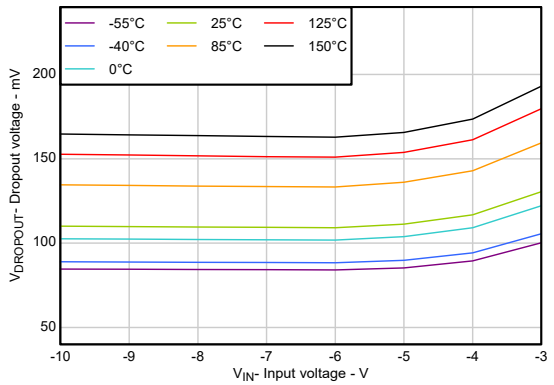



**Figure 5-6. TPS72301 Dropout Voltage vs Input Voltage (new chip)**

Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics (continued)

at $V_{IN} = V_{OUT(NOM)} – 0.5V$, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

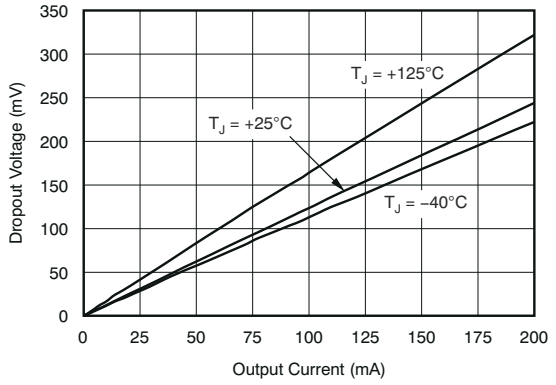



**Figure 5-7. Dropout Voltage vs Output Current (legacy chip)**

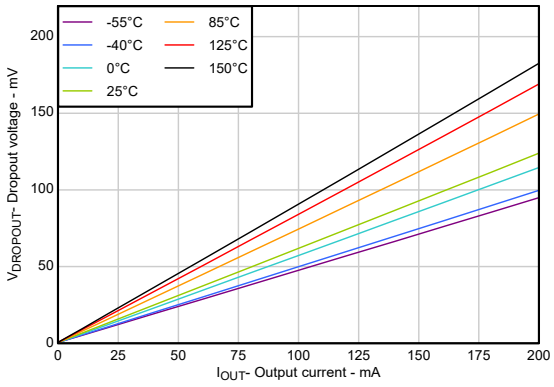



**Figure 5-8. Dropout Voltage vs Output Current (new chip)**

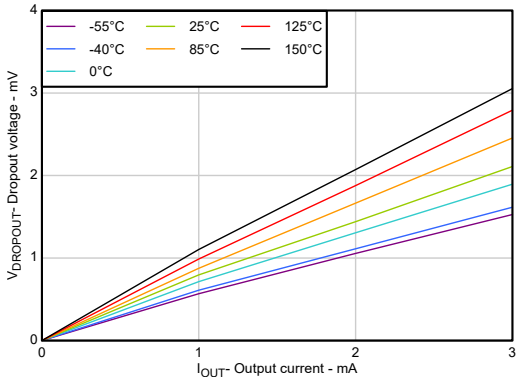



**Figure 5-9. Dropout Voltage vs Output Current (light loads, new chip)**

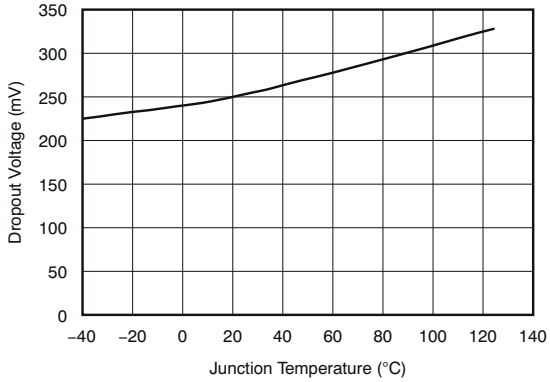



**Figure 5-10. TPS72325 Dropout Voltage vs Junction Temperature (legacy chip)**

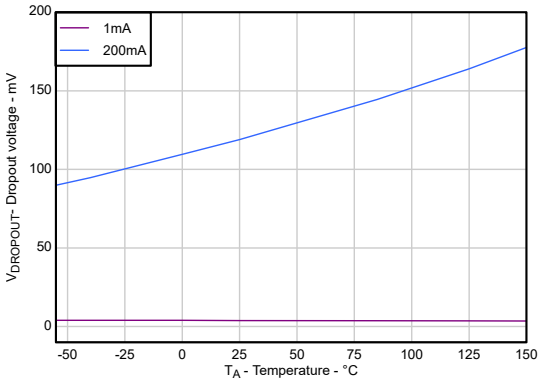



**Figure 5-11. TPS72325 Dropout Voltage vs Junction Temperature (new chip)**

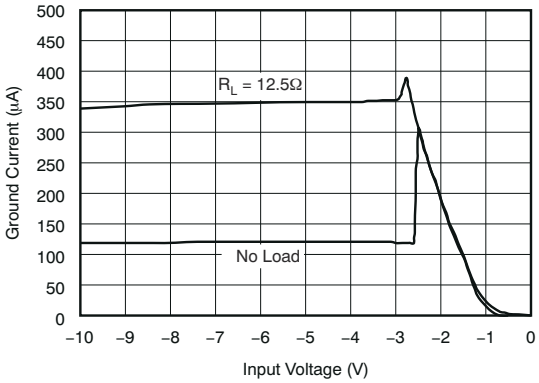



**Figure 5-12. Ground Current vs Input Voltage (legacy chip)**


Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics (continued)

at $V_{IN} = V_{OUT(NOM)} – 0.5V$, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

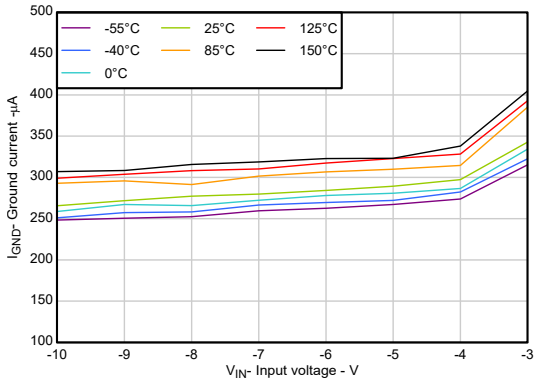



**Figure 5-13. Ground Current vs Input Voltage (new chip)**

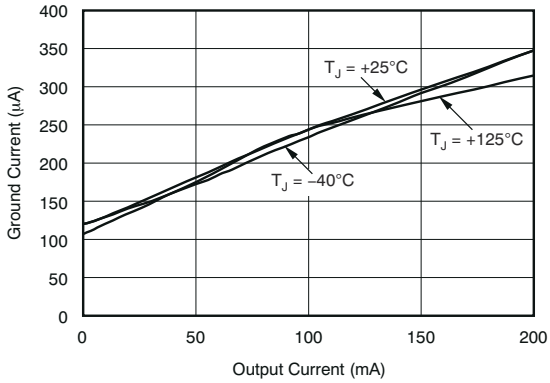



**Figure 5-14. Ground Current vs Output Current (legacy chip)**

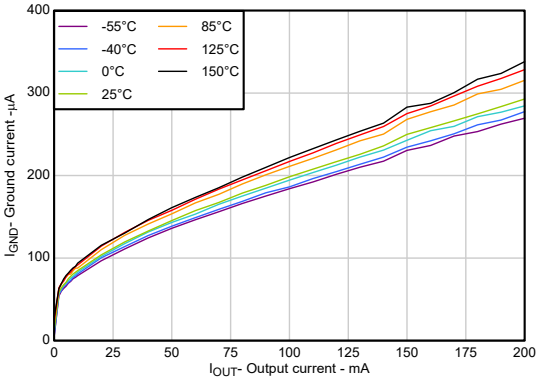



**Figure 5-15. Ground Current vs Output Current (new chip)**

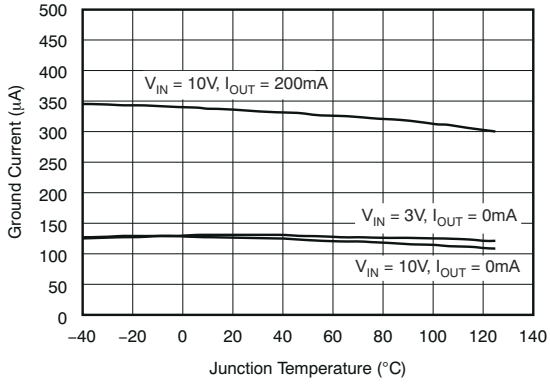



**Figure 5-16. Ground Current vs Junction Temperature (legacy chip)**

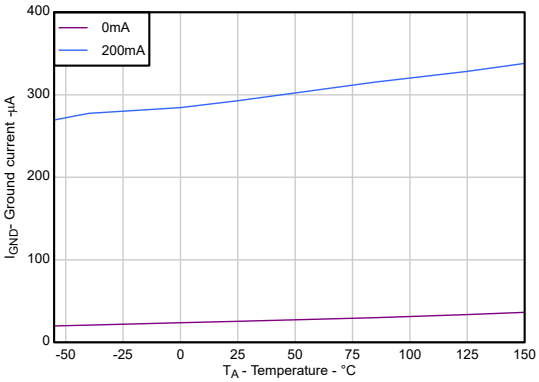



**Figure 5-17. Ground Current vs Junction Temperature (new chip)**

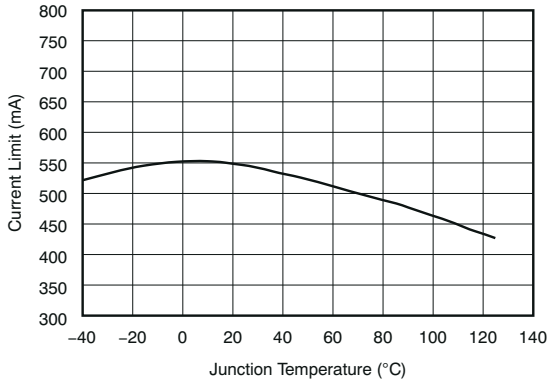



**Figure 5-18. TPS72325 Current Limit vs Junction Temperature (legacy chip)**

Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

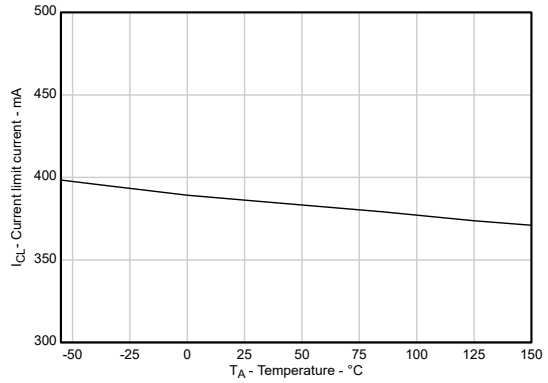



**Figure 5-19. TPS72325 Current Limit vs Junction Temperature (new chip)**

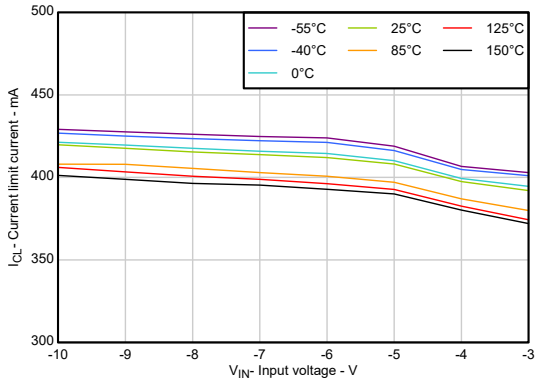



**Figure 5-20. TPS72325 Current Limit vs $V_{IN}$ (new chip)**

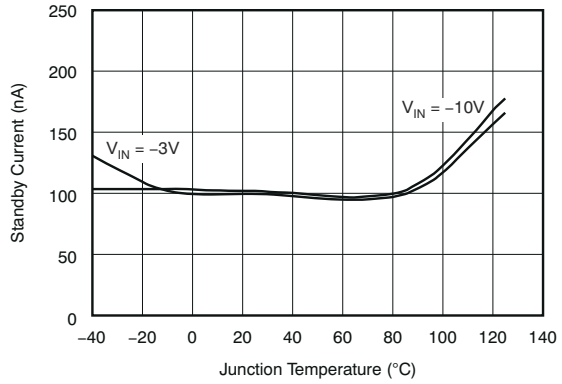



**Figure 5-21. Standby Current vs Junction Temperature (legacy chip)**

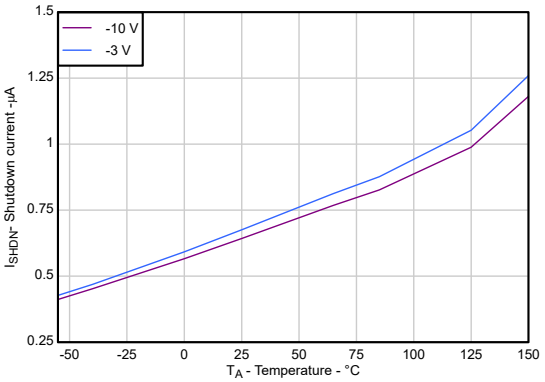



**Figure 5-22. Standby Current vs Junction Temperature (new chip)**

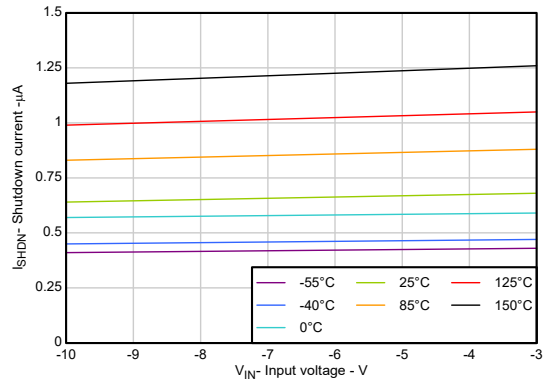



**Figure 5-23. Standby Current vs $V_{IN}$ (new chip)**

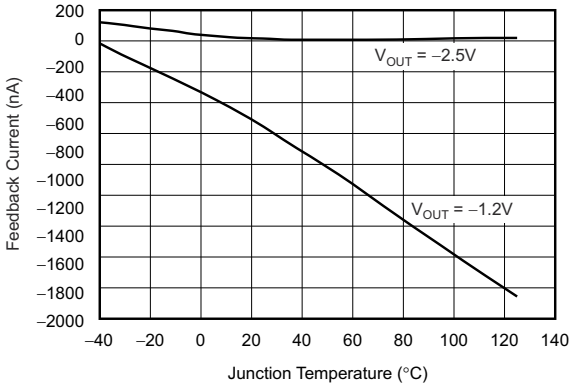



**Figure 5-24. TPS72301 Feedback Pin Current vs Junction Temperature (legacy chip)**


Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics (continued)

at $V_{IN} = V_{OUT(NOM)} – 0.5V$, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

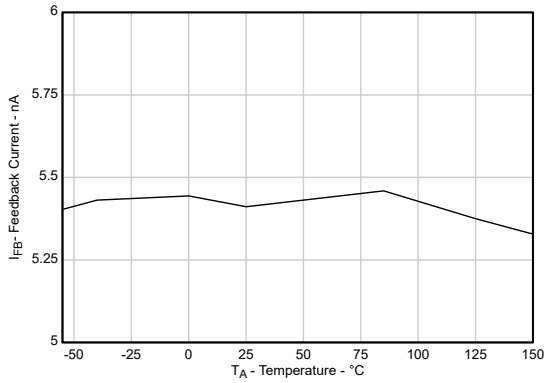



**Figure 5-25. TPS72301 Feedback Pin Current vs Junction Temperature (new chip)**

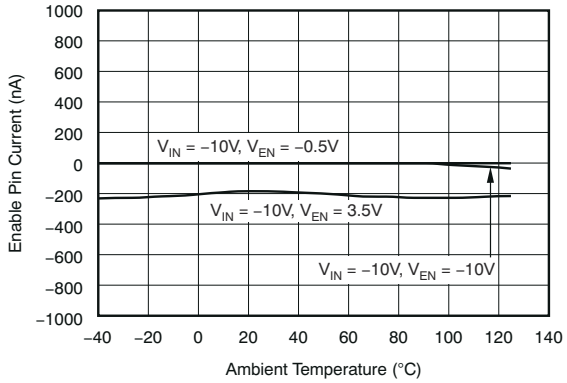



**Figure 5-26. Enable Pin Current vs Junction Temperature (legacy chip)**

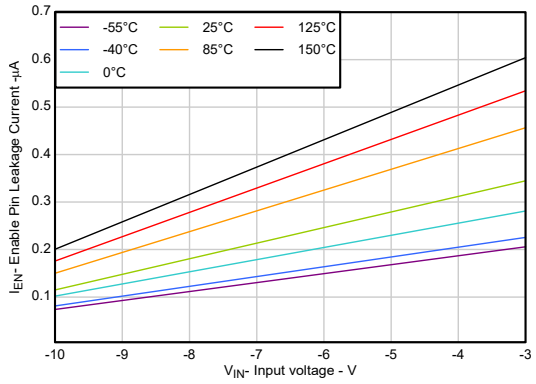



**Figure 5-27. Enable Pin Current vs Junction Temperature (new chip)**

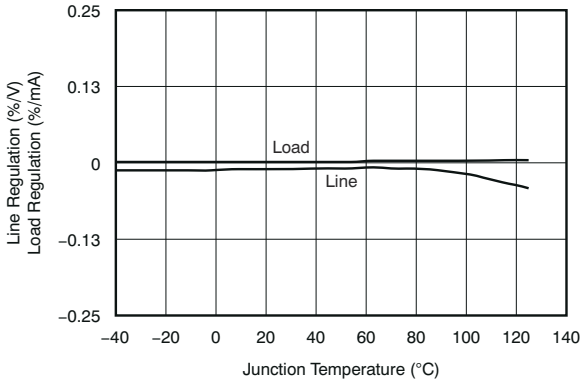



**Figure 5-28. Line And Load Regulation vs Junction Temperature (legacy chip)**

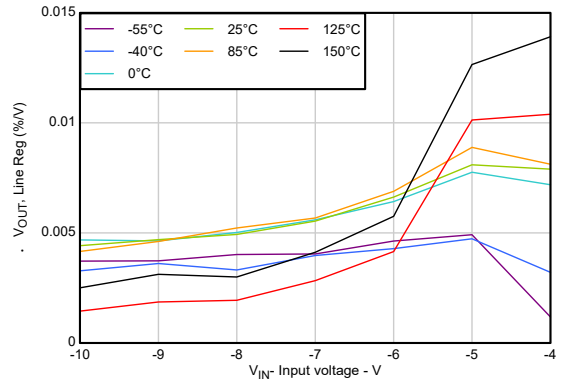



**Figure 5-29. Line Regulation vs Junction Temperature (new chip)**

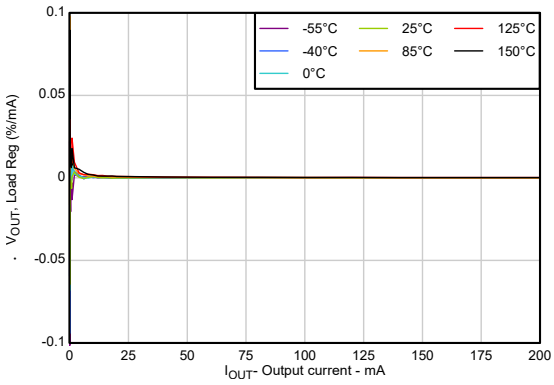



**Figure 5-30. Load Regulation vs Junction Temperature (new chip)**

## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

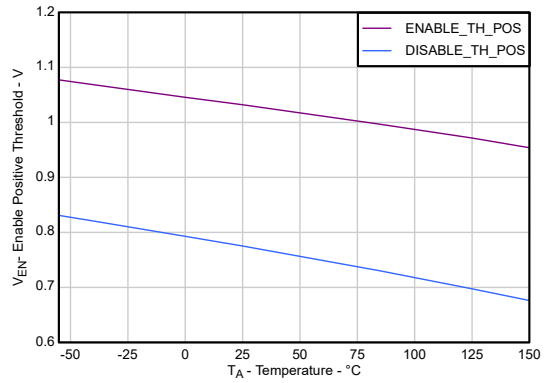



**Figure 5-31. EN Thresholds (Positive) vs Junction Temperature (new chip)**

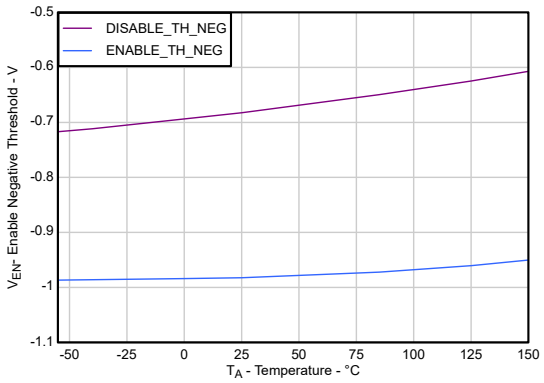



**Figure 5-32. EN Thresholds (Negative) vs Junction Temperature (new chip)**

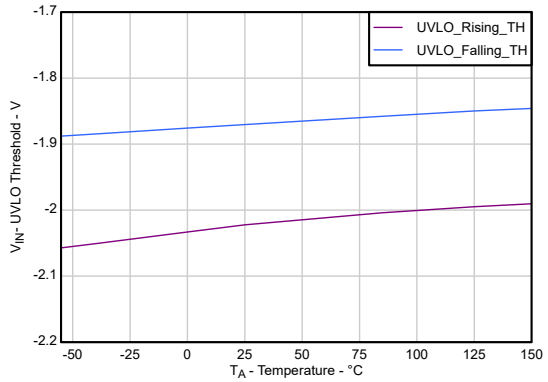



**Figure 5-33. UVLO vs Junction Temperature (new chip)**

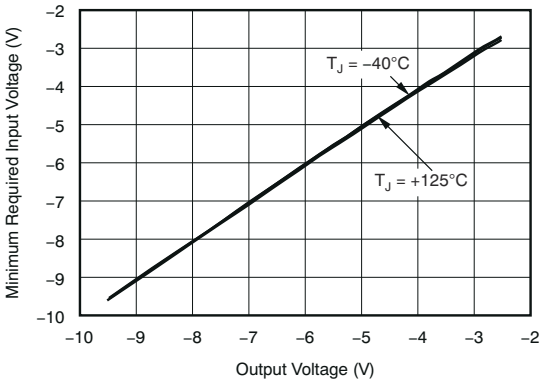



**Figure 5-34. TPS72301 Minimum Required Input Voltage vs Output Voltage (legacy chip)**


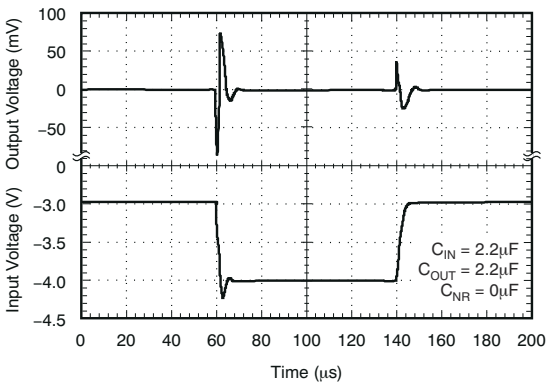



**Figure 5-35. TPS72325 Line Transient Response (legacy chip)**

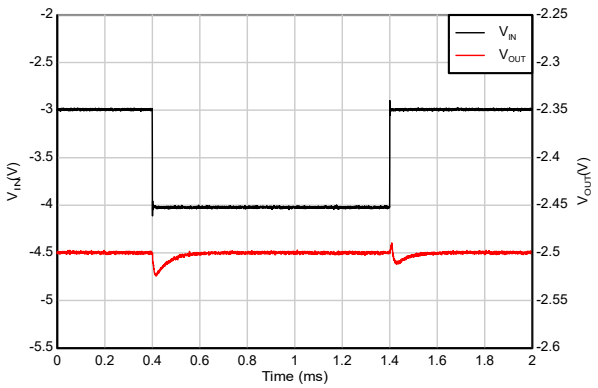



$V_{IN}$ = -3V to -4V with $dV_{IN}/dt$ = 1V/µs, $I_{OUT}$ = 1mA

**Figure 5-36. TPS72325 Line Transient Response (new chip)**


Copyright © 2026 Texas Instruments Incorporated


## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

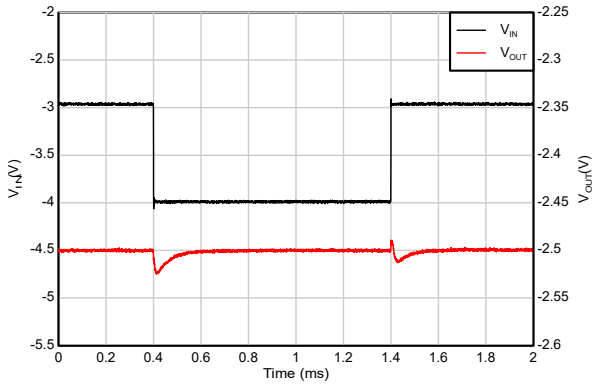



$V_{IN}$ = -3V to -4V with $dV_{IN}/dt$ = 1V/µs, $I_{OUT}$ = 200mA

**Figure 5-37. TPS72325 Line Transient Response (new chip)**

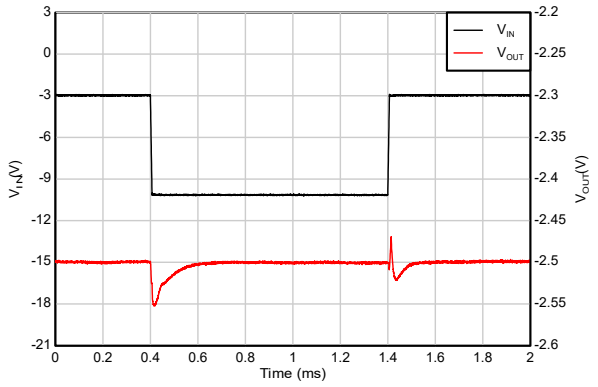



$V_{IN}$ = -3V to -10V with $dV_{IN}/dt$ = 1V/µs, $I_{OUT}$ = 1mA

**Figure 5-38. TPS72325 Line Transient Response (new chip)**

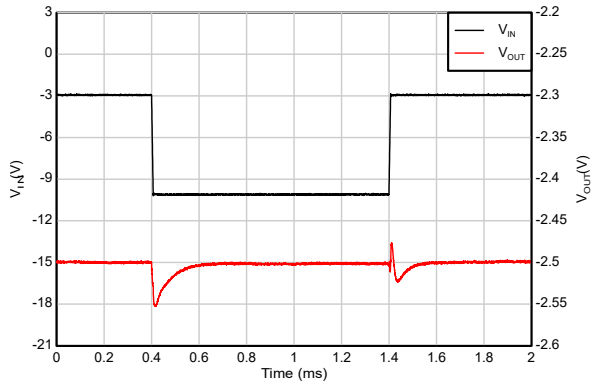



$V_{IN}$ = -3V to -10V with $dV_{IN}/dt$ = 1V/µs, $I_{OUT}$ = 200mA

**Figure 5-39. TPS72325 Line Transient Response (new chip)**

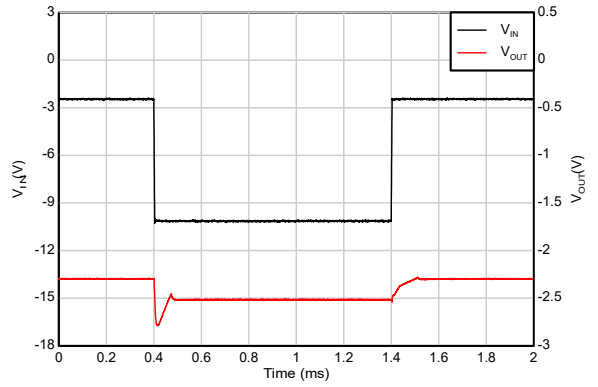


$V_{IN}$ = -2.5V to -10V with $dV_{IN}/dt$ = 2V/µs, $I_{OUT}$ = 1mA

**Figure 5-40. TPS72325 Dropout exit Response (new chip)**

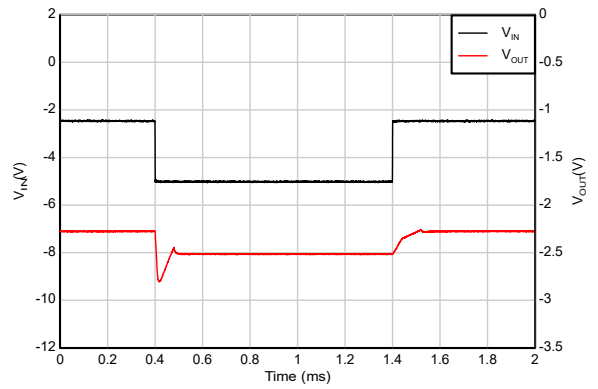


$V_{IN}$ = -2.5V to -5.0V with $dV_{IN}/dt$ = 2V/µs, $I_{OUT}$ = 1mA

**Figure 5-41. TPS72325 Dropout exit Response (new chip)**

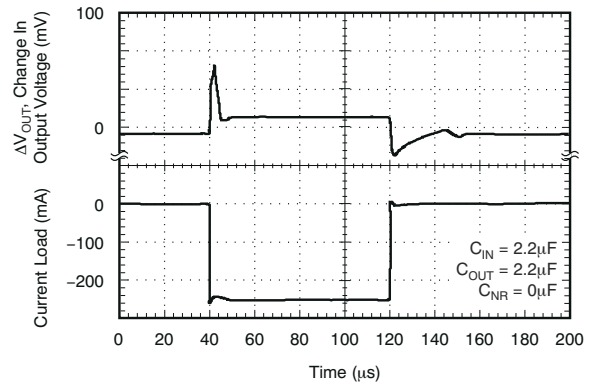



**Figure 5-42. TPS72325 Load Transient Response (legacy chip)**

## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)



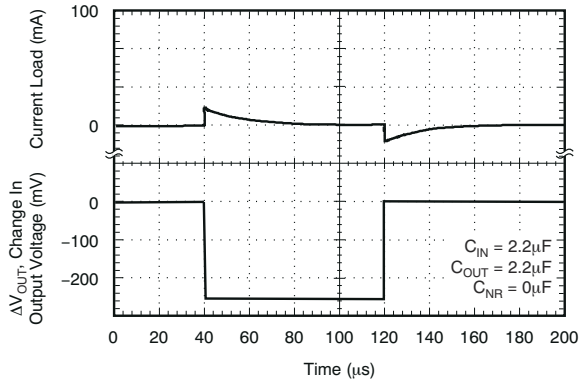



**Figure 5-43. TPS72325 Load Transient Response (legacy chip)**

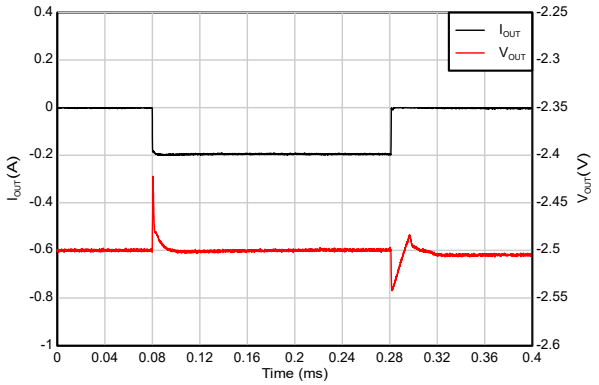



$I_{OUT}$ = 1µA to 200mA with $dI_{OUT}/dt$ = 1A/µs

**Figure 5-44. TPS72325 Load Transient Response (new chip)**

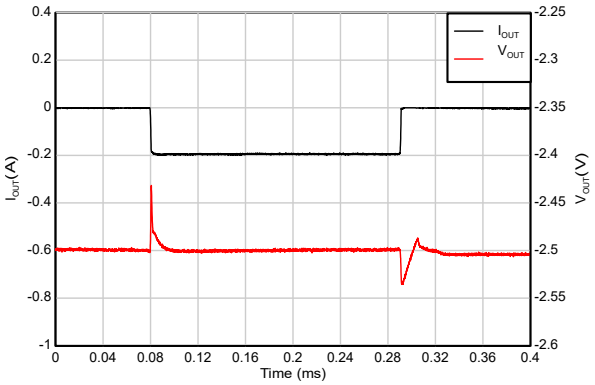


$I_{OUT}$ = 1µA to 200mA with $dI_{OUT}/dt$ = 0.2A/µs

**Figure 5-45. TPS72325 Load Transient Response (new chip)**

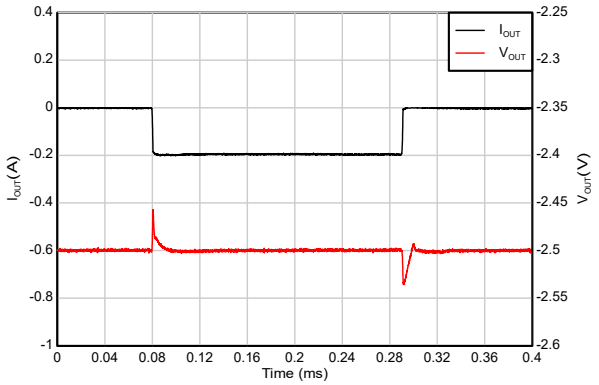


$I_{OUT}$ = 1mA to 200mA with $dI_{OUT}/dt$ = 0.2A/µs

**Figure 5-46. TPS72325 Load Transient Response (new chip)**

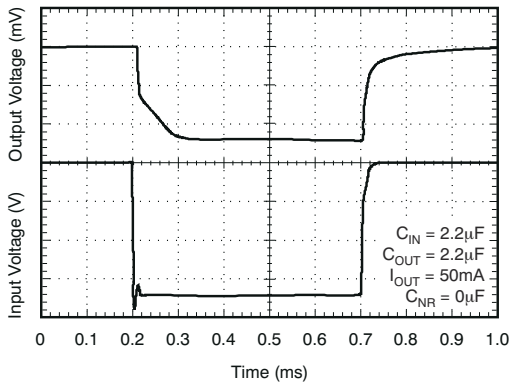



**Figure 5-47. TPS72325 Start-Up Response (legacy chip)**

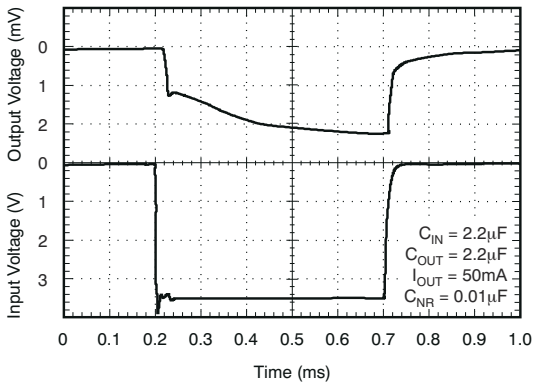



**Figure 5-48. TPS72325 Start-Up Response (legacy chip)**


Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)



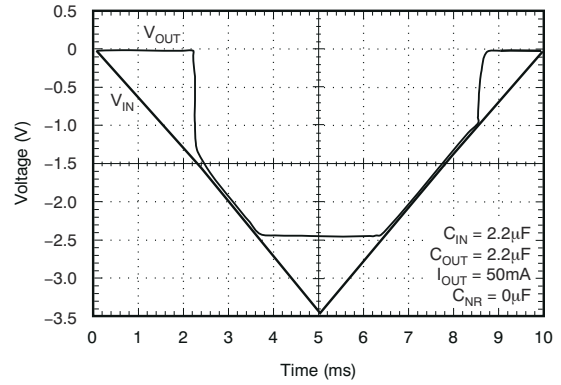



**Figure 5-49. TPS72325 Power-Up/Power-Down (legacy chip)**

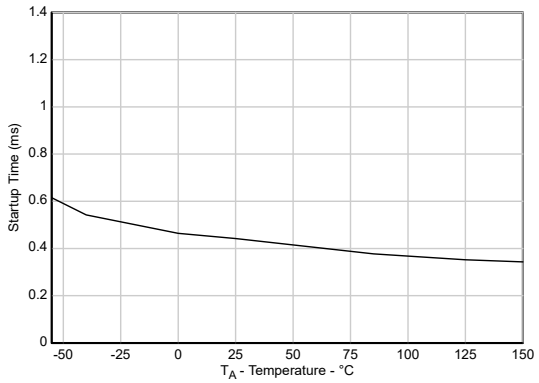



$I_{OUT}$ = 0mA, $C_{NR}$ not conneted.

**Figure 5-50. TPS72325 Start-up time vs Temp (new chip)**

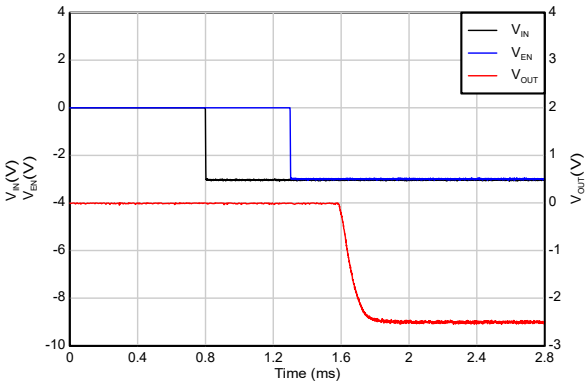



$I_{OUT}$ = 1mA

**Figure 5-51. TPS72325 Start-up Response ($V_{IN}$ ramping before EN) (New chip)**

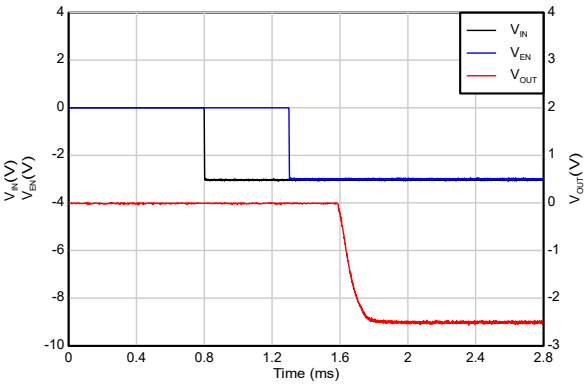



$I_{OUT}$ = 200mA

**Figure 5-52. TPS72325 Start-up Response ($V_{IN}$ ramping before EN) (New chip)**

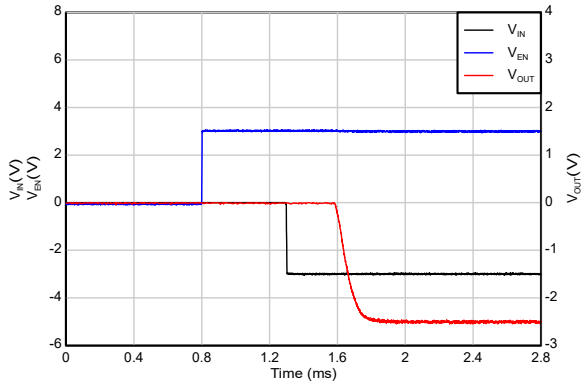


$I_{OUT}$ = 1mA

**Figure 5-53. TPS72325 Start-up Response ($V_{IN}$ ramping after EN) (New chip)**

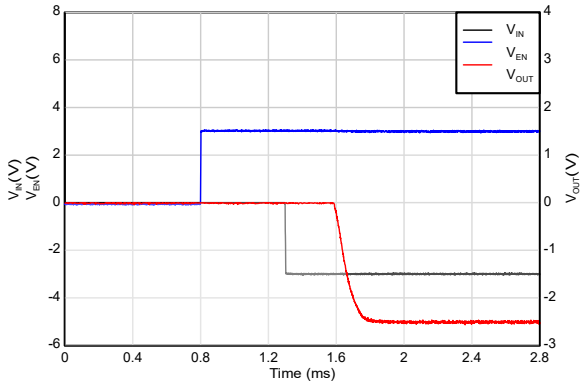



$I_{OUT}$ = 200mA

**Figure 5-54. TPS72325 Start-up Response ($V_{IN}$ ramping after EN) (New chip)**

Copyright © 2026 Texas Instruments Incorporated


## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

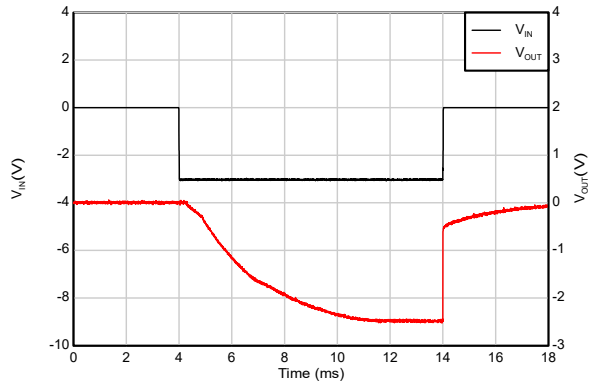



$I_{OUT}$ = 1mA, $C_{NR}$ = 10nF

**Figure 5-55. TPS72325 Start-up Response ($V_{IN}$ & EN tied together) (New chip)**

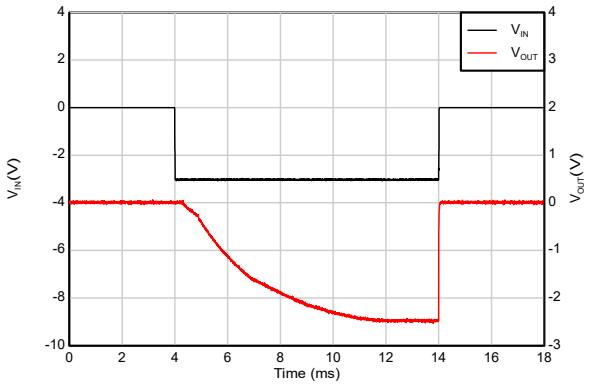


$I_{OUT}$ = 200mA, $C_{NR}$ = 10nF

**Figure 5-56. TPS72325 Start-up Response ($V_{IN}$ & EN tied together) (New chip)**

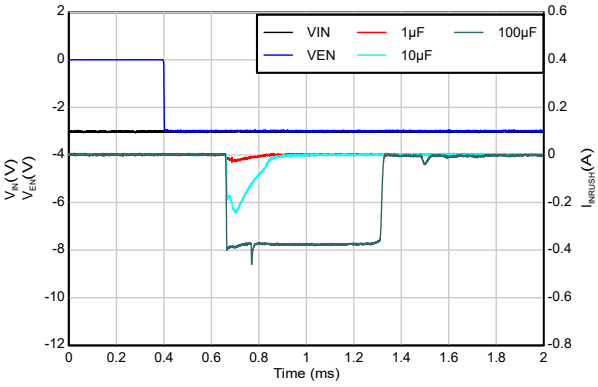


$I_{OUT}$ = 0mA

**Figure 5-57. Start-up inrush current vs $C_{OUT}$ (New chip)**



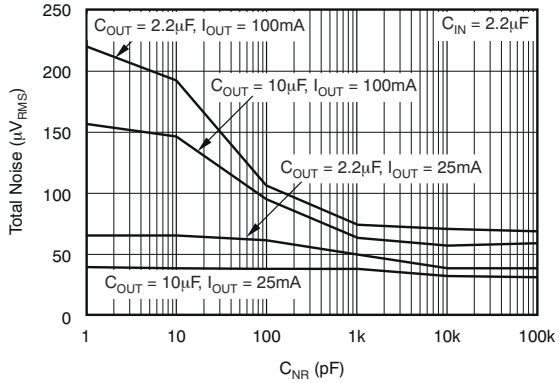



**Figure 5-58. TPS72325 Total Noise vs $C_{NR}$ (10Hz to 100kHz) (legacy chip)**

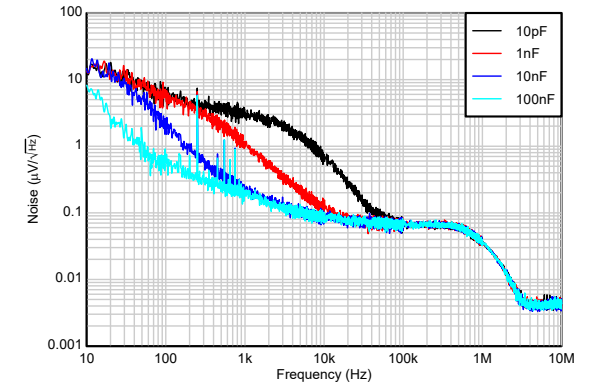


$I_{OUT}$ = 200mA

**Figure 5-59. TPS72325 Total Noise vs $C_{NR}$ (10Hz to 10MHz) (New chip)**

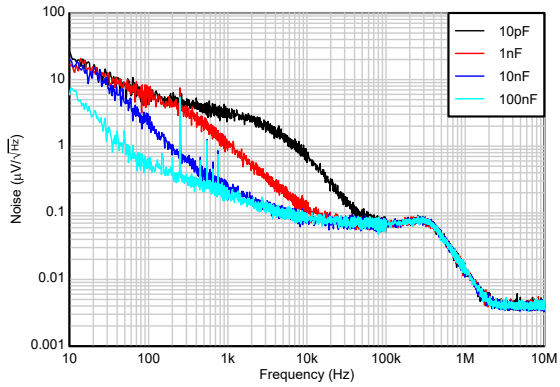



$I_{OUT}$ = 20mA

**Figure 5-60. TPS72325 Total Noise vs $C_{NR}$ (10Hz to 10MHz) (New chip)**


Copyright © 2026 Texas Instruments Incorporated


## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

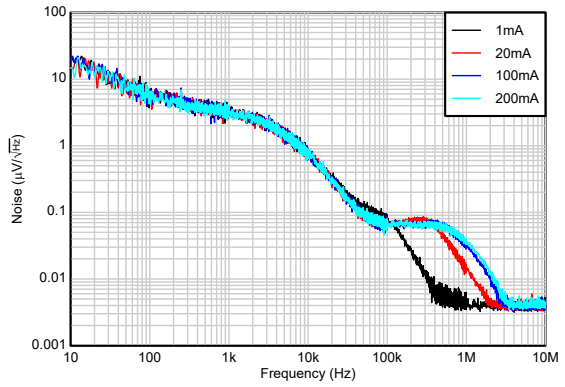



$V_{IN}$ = –3.0V

**Figure 5-61. TPS72325 Total Noise vs $I_{OUT}$ (10Hz to 10MHz) (New chip)**

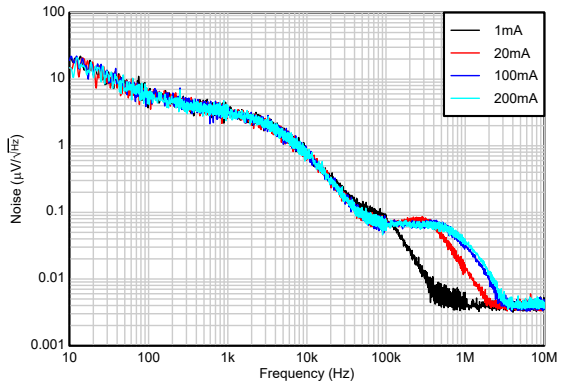



$I_{OUT}$ = 200mA

**Figure 5-62. TPS72325 Total Noise vs $V_{IN}$ (10Hz to 10MHz) (New chip)**

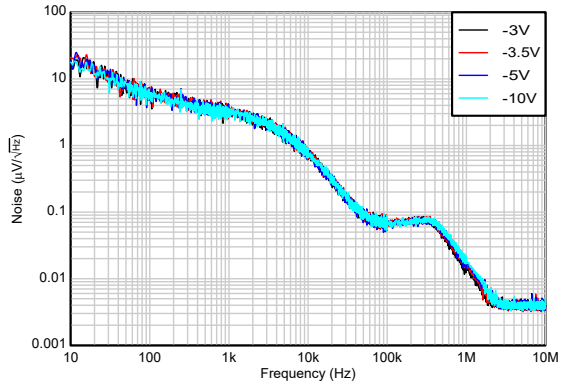



$I_{OUT}$ = 20mA

**Figure 5-63. TPS72325 Total Noise vs $V_{IN}$ (10Hz to 10MHz) (New chip)**

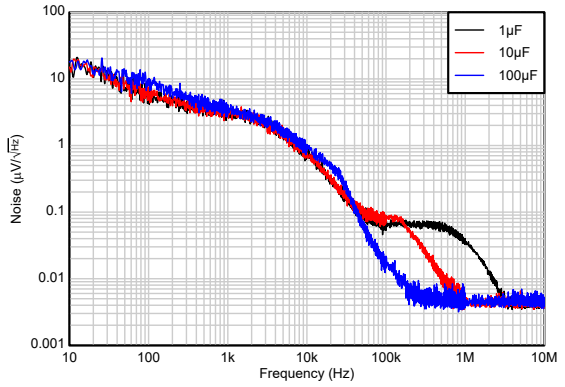



$I_{OUT}$ = 200mA

**Figure 5-64. TPS72325 Total Noise vs $C_{OUT}$ (10Hz to 10MHz) (New chip)**

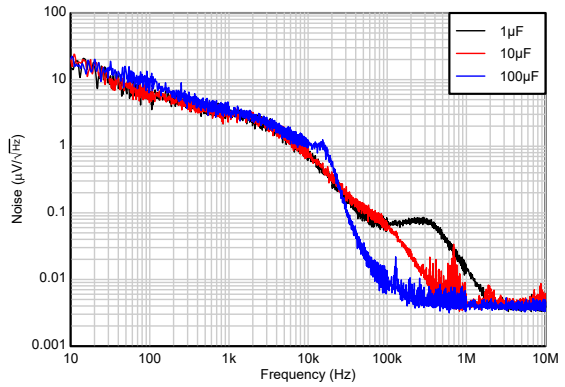


$I_{OUT}$ = 20mA

**Figure 5-65. TPS72325 Total Noise vs $C_{OUT}$ (10Hz to 10MHz) (New chip)**

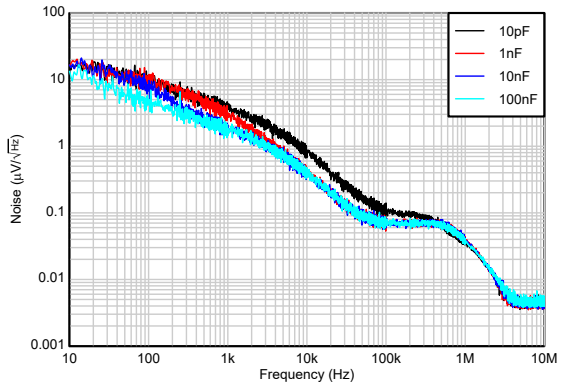


$I_{OUT}$ = 200mA

**Figure 5-66. TPS72301 Total Noise vs $C_{FF}$ (10Hz to 10MHz) (New chip)**

Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

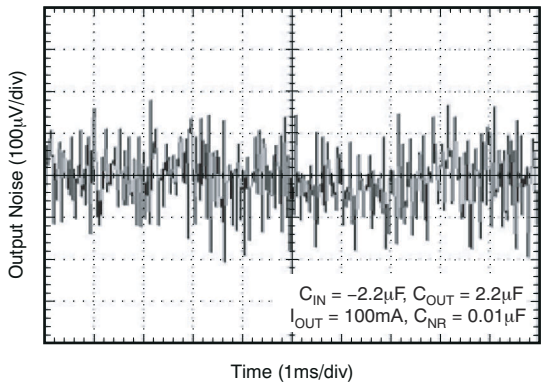



**Figure 5-67. TPS72325 Output Noise vs Time (legacy chip)**

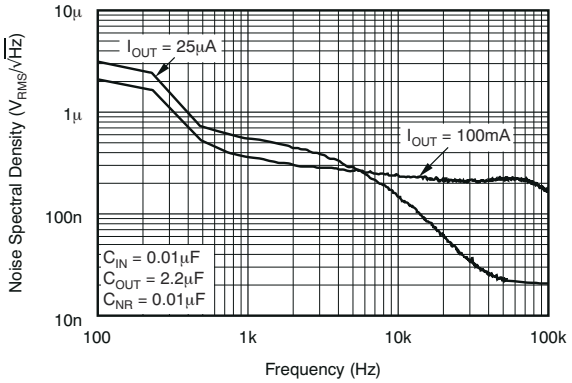



**Figure 5-68. TPS72325 Noise Spectral Density vs Frequency (legacy chip)**

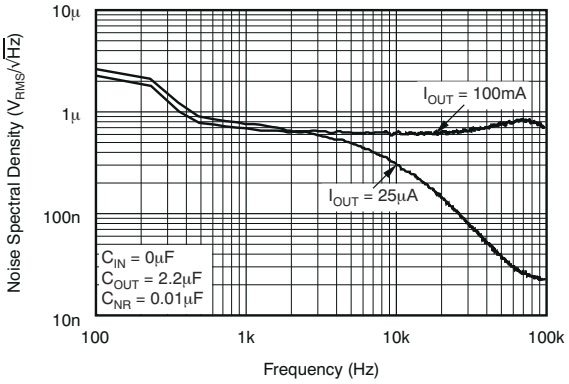



**Figure 5-69. TPS72325 Noise Spectral Density vs Frequency (legacy chip)**

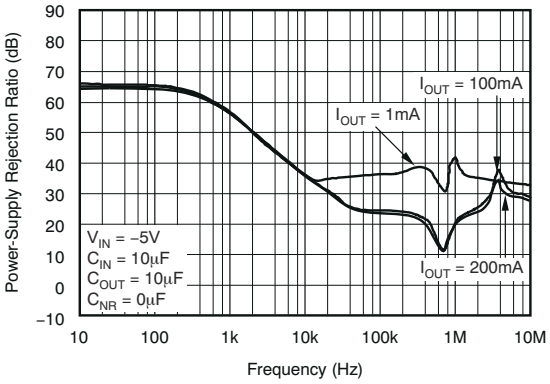



**Figure 5-70. PSRR vs Frequency (legacy chip)**

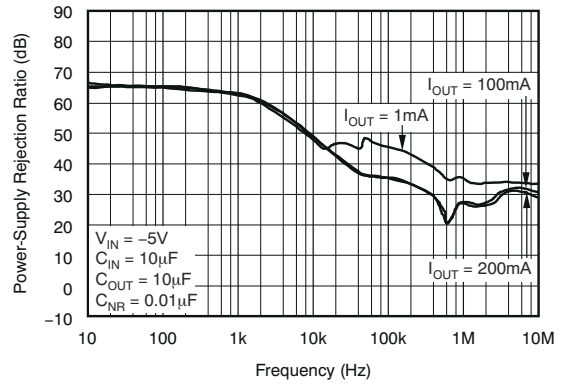



**Figure 5-71. PSRR vs Frequency (legacy chip)**


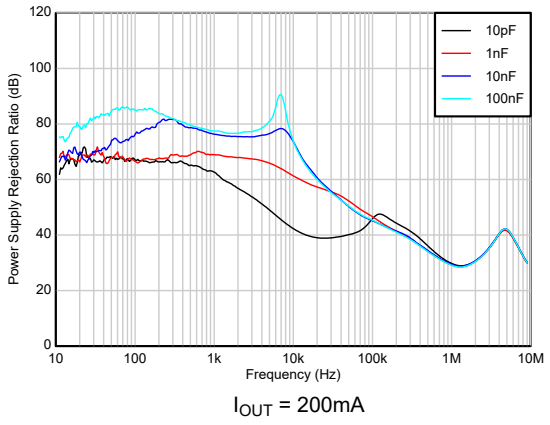



**Figure 5-72. PSRR vs $C_{NR}$ (New chip)**


Copyright © 2026 Texas Instruments Incorporated


## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

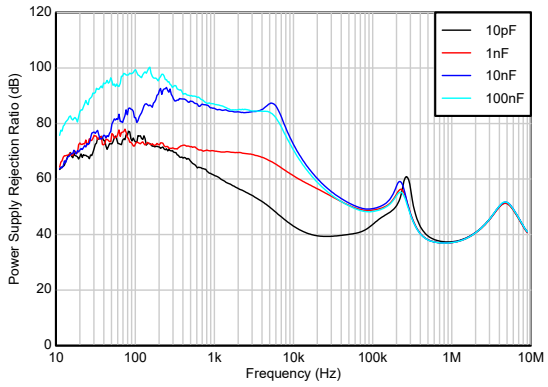



$I_{OUT}$ = 20mA

**Figure 5-73. PSRR vs $C_{NR}$ (New chip)**

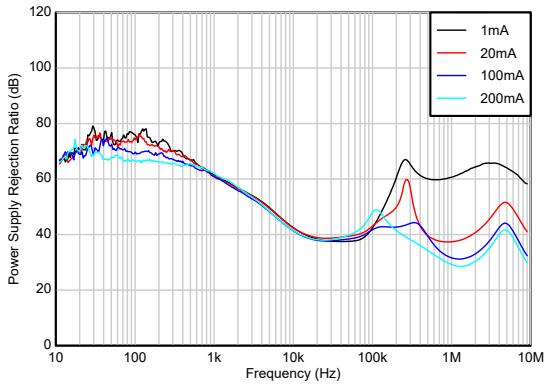



$V_{IN}$ = –3.0V

**Figure 5-74. PSRR vs $I_{OUT}$ (New chip)**

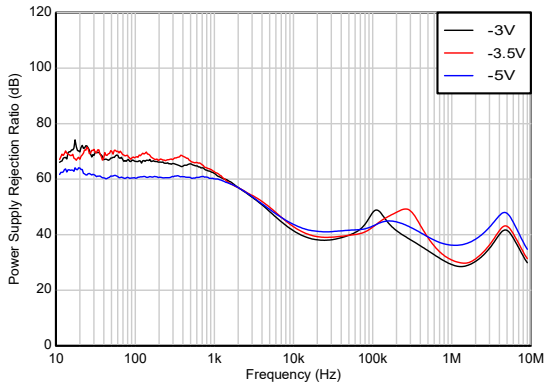



$I_{OUT}$ = 200mA

**Figure 5-75. PSRR vs $V_{IN}$ (New chip)**

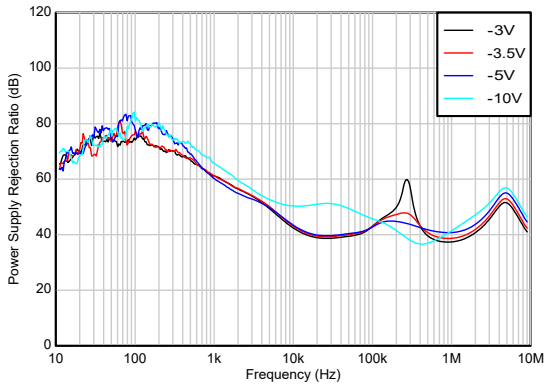



$I_{OUT}$ = 20mA

**Figure 5-76. PSRR vs $V_{IN}$ (New chip)**

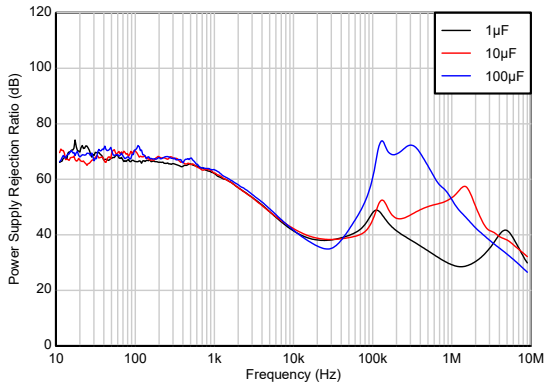


$I_{OUT}$ = 200mA

**Figure 5-77. PSRR vs $C_{OUT}$ (New chip)**

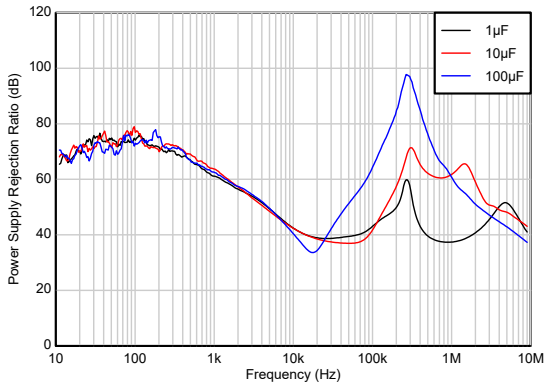



$I_{OUT}$ = 20mA

**Figure 5-78. PSRR vs $C_{OUT}$ (New chip)**

Copyright © 2026 Texas Instruments Incorporated

## 5.6 Typical Characteristics (continued)

at $V_{IN}$ = $V_{OUT(NOM)}$ – 0.5V, $V_{OUT}$ = -2.5V, = $I_{OUT}$ = 1mA, $V_{EN}$ = 1.5V, $C_{OUT}$ = 2.2µF, and $C_{NR}$ = 0.01µF (unless otherwise noted)

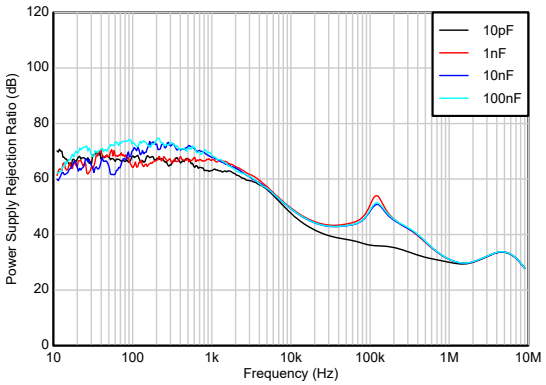


$I_{OUT}$ = 200mA

**Figure 5-79. PSRR vs $C_{FF}$ (adjustable only) (New chip)**



Copyright © 2026 Texas Instruments Incorporated

# 6 Detailed Description

## 6.1 Overview


The TPS723 is a low-dropout, negative linear voltage regulator with an output tolerance of ±1.6% across load, and temperature variation (for the new chip) and a rated load current of 200mA. The device is offered in trimmed output voltages between –1.5V and –5.2V and as an adjustable regulator from –1.186V to –10V. The device features very low noise (60 $\mu V_{RMS}$ with NR cap of 10nF) and high power-supply rejection ratio (40dB typical at 100kHz) , making the TPS723 designed for high-sensitivity analog and RF applications. A shutdown mode is available, reducing ground current to 2-μA maximum over temperature and process.

## 6.2 Functional Block Diagrams

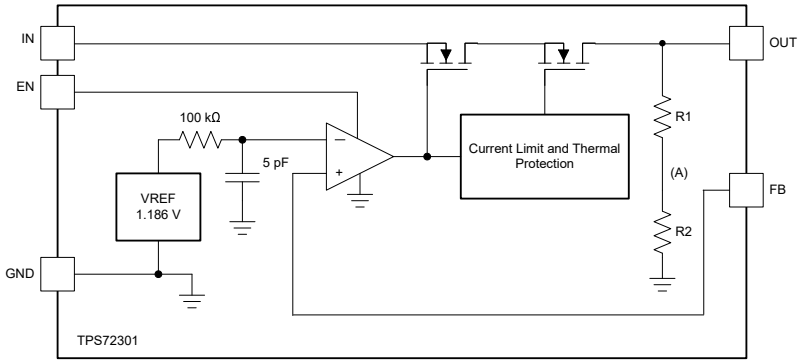


R1 + R2 = 100kΩ

**Figure 6-1. Functional Block Diagram (Adjustable, Legacy Chip)**

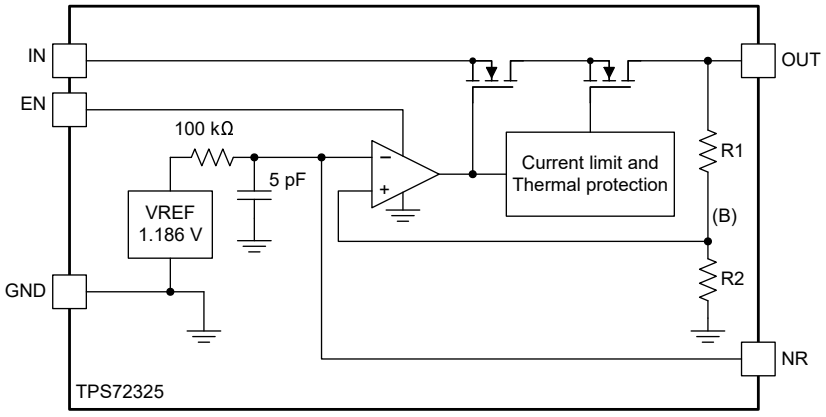


R1 + R2 = 97kΩ

**Figure 6-2. Functional Block Diagram (Fixed, Legacy Chip)**

Copyright © 2026 Texas Instruments Incorporated

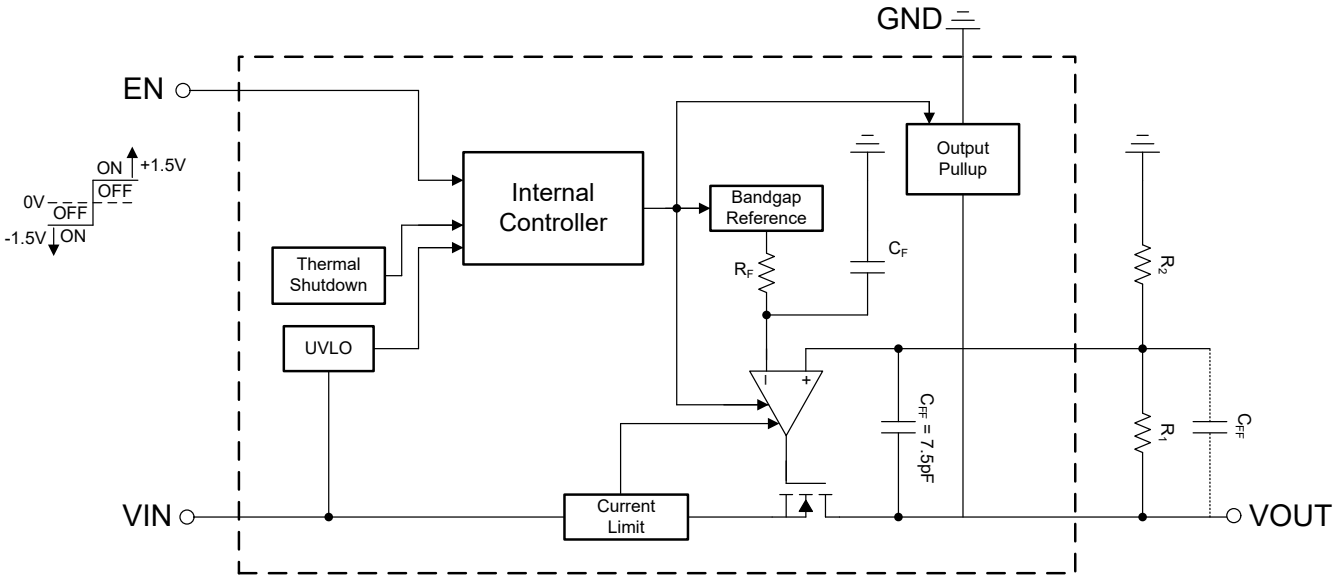



**Figure 6-3. Functional Block Diagram (Adjustable, New Chip)**

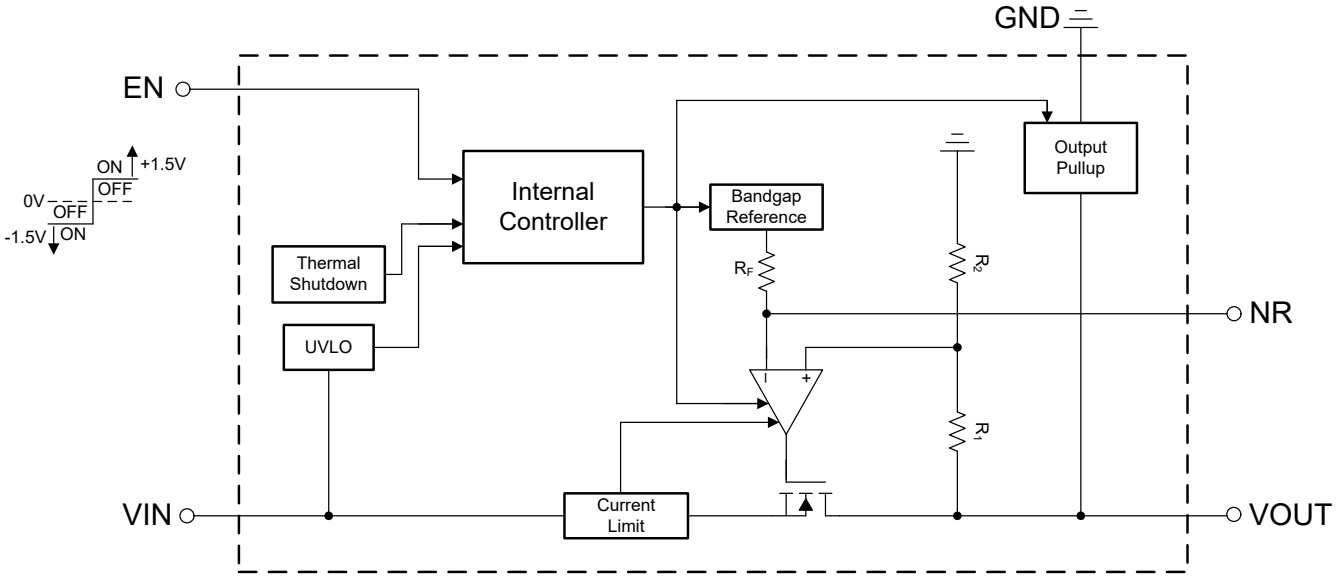



**Figure 6-4. Functional Block Diagram (Fixed, New Chip)**


Copyright © 2026 Texas Instruments Incorporated

## 6.3 Feature Description

### 6.3.1 Current Limit

The device has an internal current limit circuit that protects the regulator during transient high-load current faults or shorting events. The current limit is a brick-wall scheme. In a high-load current fault, the brick-wall scheme limits the output current to the current limit ($I_{CL}$). $I_{CL}$ is listed in the *Electrical Characteristics* table. Also see, Figure 5-18 in the *Typical Characteristics* section.

The output voltage is not regulated when the device is in current limit. When a current limit event occurs, the device begins to heat up because of the increase in power dissipation. When the device is in brick-wall current limit, the pass transistor dissipates power [($V_{IN}$ – $V_{OUT}$) × $I_{CL}$]. If thermal shutdown is triggered, the device turns off. After the device cools down, the internal thermal shutdown circuit turns the device back on. If the output current fault condition continues, the device cycles between current limit and thermal shutdown. For more information on current limits, see the *Know Your Limits* application note.

Figure 6-5 shows a diagram of the current limit.

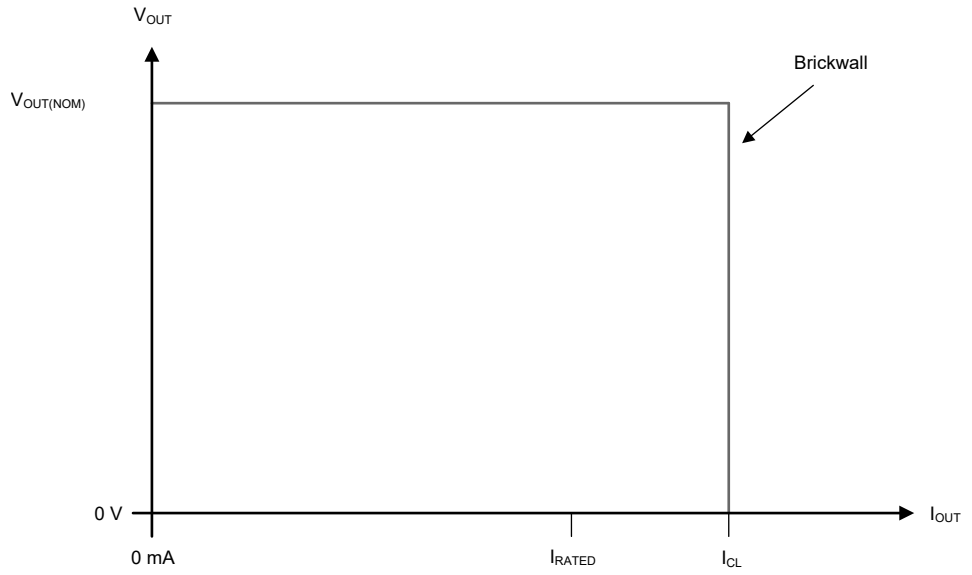



**Figure 6-5. Current Limit**

Do not drive the output less than 0.3V below the input. An output voltage less than 0.3V below the input voltage biases the body diode in the pass transistor, and allows current to flow from the input to the output. This current is not limited by the device. If this condition is expected, make sure to externally limit the reverse current. See the Reverse Current section for more details.

### 6.3.2 Enable

For TPS723, The enable pin (EN) is an active-high pin and supports a bipolar logic. The output is enabled when the voltage applied to EN is greater than $V_{EN(HI)}$ (≥ +1.5V) or is lower than $V_{EN(LO)}$ (≤ -1.5V). The device is disabled when EN is lower than $V_{DIS(HI)}$ (≤ 0.4V) and higher than $V_{DIS(LO)}$ (≥ -0.4V). If external control of the output voltage is not needed, connect EN to IN. When devices is disabled, most internal circuitry is turned off, putting the TPS723 into shutdown mode, drawing 2µA maximum ground current. See the Section 5.5 table for details on the values of $V_{EN(HI)}$, $V_{EN(LO)}$, $V_{DIS(HI)}$, and $V_{DIS(LO)}$.

In new chip only, the EN pin also has a weak internal pulldown functionality toward input supply and the EN pin can be left floating to enable the device. The internal pulldown current on the EN pin is captured in the Section 5.5 table as Enable current. However, care must be taken to verify that when EN is tied toward positive logic, the external logic driver must be able to provide the required pull-down current. The new chip also has an internal pullup circuit that activates when the device is disabled and actively charges the output voltage toward ground.

Copyright © 2026 Texas Instruments Incorporated

### 6.3.3 Dropout Voltage

Dropout voltage ($V_{DO}$) is defined as the output voltage minus the input voltage ($V_{OUT} – V_{IN}$) at the rated output current ($I_{RATED}$), where the pass transistor is fully on. $I_{RATED}$ is the maximum $I_{OUT}$ listed in the *Section 5.3* table. The pass transistor is in the ohmic or triode region of operation, and acts as a switch. The dropout voltage indirectly specifies a maximum input voltage lower than the nominal programmed output voltage at which the output voltage is expected to stay in regulation. If the input voltage rises to more than the nominal output regulation, then the output voltage rises as well.

For a CMOS regulator, the dropout voltage is determined by the drain-source on-state resistance ($R_{DS(ON)}$) of the pass transistor. Therefore, if the linear regulator operates at less than the rated current, the dropout voltage for that current scales accordingly. The following equation calculates the $R_{DS(ON)}$ of the device.

$$R_{DS(ON)} = \frac{V_{DO}}{I_{RATED}} \quad (1)$$

### 6.3.4 Output Pullup

The new chip has an output pullup circuit. The output pullup activates in the following conditions:

- When the device is disabled ($V_{EN} > V_{DIS(LO)}$ or $V_{EN} < V_{EN(LO)}$)
- If $V_{UVLO} < V_{IN} < -1.0V$

Do not rely on the output pullup circuit for charging a large amount of output capacitance toward ground after the input supply has collapsed because reverse current can flow from the input to the output. This reverse current flow can cause damage to the device. See also *Section 7.1.4*.

### 6.3.5 Thermal Shutdown

The device contains a thermal shutdown protection circuit to disable the device when the junction temperature ($T_J$) of the pass transistor rises to $T_{SD(shutdown)}$ (typical). Thermal shutdown hysteresis makes sure that the device resets (turns on) when the temperature falls to $T_{SD(reset)}$ (typical).

The thermal time-constant of the semiconductor die is fairly short, thus the device can cycle on and off when thermal shutdown is reached until power dissipation is reduced. Power dissipation during start up can be high from large $V_{OUT} – V_{IN}$ voltage drops across the device or from high inrush currents charging large output capacitors. Under some conditions, the thermal shutdown protection disables the device before start up completes.

For reliable operation, limit the junction temperature to the maximum listed in the *Section 5.3* table. Operation above this maximum temperature causes the device to exceed operational specifications. Although the internal protection circuitry of the device is designed to protect against thermal overall conditions, this circuitry is not intended to replace proper heat sinking. Continuously running the device into thermal shutdown or above the maximum recommended junction temperature reduces long-term reliability.

### 6.3.6 Undervoltage Lockout (UVLO)

The new chip has an independent undervoltage lockout (UVLO) circuit that monitors the input voltage, allowing a controlled and consistent turn on and off of the output voltage. To prevent the device from turning off if the input drops during turn on, the UVLO has hysteresis as specified in the Section 5.5 table.

### 6.3.7 NR and Programmable Soft Start

For TPS723, the NR (noise reduction) capacitor in conjunction with the noise-reduction resistor, forms a low-pass filter (LPF) that filters out the noise from the reference before being gained up with the error amplifier, thereby reducing the device noise floor. The LPF is a single-pole filter and the cutoff frequency can be calculated with Equation 2. The typical value of $R_F$ is 400kΩ (typical). Increasing the $C_{NR}$ capacitor has a greater affect because the output voltage increases when the noise from the reference is gained up even more at higher output voltages. For low-noise applications, a 10nF (typical) $C_{NR}$ is recommended.


Copyright © 2026 Texas Instruments Incorporated

$$f_{cutoff} = 1/(2 \times \pi \times R_F \times C_{NR}) \quad (2)$$

In a new chip version, this NR capacitor ($C_{NR}$) also helps in controlling the inrush current by introducing RC delay during start-up on the internal reference ($V_{NR}$). For any external $C_{NR}$, approximate start-up time, when the internal reference ($V_{NR}$) charges to the 90% of the typical value can be calculated with Equation 3.

$$T_{start-up} \approx 2.2 \times \tau = 2.2 \times R_F \times C_{NR} \quad (3)$$

For more information on current limits, see the *How a Noise-reduction Pin Improves System Performance* application note.

## 6.4 Device Functional Modes

### 6.4.1 Device Functional Mode Comparison

Table 6-1 shows the conditions that lead to the different modes of operation. See the *Section 5.5* table for parameter values.

**Table 6-1. Device Functional Mode Comparison**

| OPERATING MODE | PARAMETER | | | |
|---|---|---|---|---|
| | $V_{IN}$ | $V_{EN}$ | $I_{OUT}$ | $T_J$ |
| Normal operation | $V_{IN} < V_{OUT(nom)} - V_{DO}$ and $V_{IN} < V_{IN(max)}$ | $V_{EN} > V_{EN(HI)}$ or $V_{EN} < V_{EN(LO)}$ | $I_{OUT} < I_{OUT(max)}$ | $T_J < T_{SD(shutdown)}$ |
| Dropout operation | $V_{OUT(nom)} - V_{DO} < V_{IN} < V_{IN(max)}$ | $V_{EN} > V_{EN(HI)}$ or $V_{EN} < V_{EN(LO)}$ | $I_{OUT} < I_{OUT(max)}$ | $T_J < T_{SD(shutdown)}$ |
| Disabled (any true condition disables the device) | $V_{IN} > V_{UVLO-}$ | $V_{EN} < V_{DIS(HI)}$ or $V_{EN} > V_{DIS(LO)}$ | Not applicable | $T_J > T_{SD(shutdown)}$ |

### 6.4.2 Normal Operation

The device regulates to the nominal output voltage when the following conditions are met:

- The input voltage is lower than the nominal output voltage minus the dropout voltage ($V_{OUT(nom)} – V_{DO}$)
- The output current is less than the current limit ($I_{OUT} < I_{CL}$)
- The device junction temperature is less than the thermal shutdown temperature ($T_J < T_{SD}$)
- The EN voltage has previously crossing the $V_{EN(HI)}$ or $V_{EN(LO)}$ threshold voltage and has not yet crossed the disable thresholds ($V_{DIS(HI)}$ or $V_{DIS(LO)}$)

### 6.4.3 Dropout Operation

If the input voltage is more positive (higher) than the nominal output voltage minus the specified dropout voltage, but all other conditions are met for normal operation, the device operates in dropout mode. In this mode, the output voltage tracks the input voltage. During this mode, the transient performance of the device becomes significantly degraded because the pass transistor is in the ohmic or triode region, and acts as a switch. Line or load transients in dropout can result in large output-voltage deviations.

When the device is in a steady dropout state (defined as when the device is in dropout, $V_{IN} > V_{OUT(NOM)} – V_{DO}$, directly after being in a normal regulation state, but *not* during start up), the pass transistor is driven into the ohmic or triode region. When the input voltage returns to a value lower than or equal to the nominal output voltage minus the dropout voltage ($V_{OUT(NOM)} - V_{DO}$), the output voltage can overshoot for a short period of time while the device pulls the pass transistor back into the linear region.

### 6.4.4 Disabled

The output of the device can be shutdown by forcing the voltage of the EN pin either higher than the maximum $V_{DIS(LO)}$ or lower than the minimum $V_{DIS(HI)}$ pin input voltage (see the *Section 5.5* table). When disabled, the pass transistor is turned off, internal circuits are shutdown, and the output voltage is actively charged to ground by an internal discharge circuit from the output to ground.

Copyright © 2026 Texas Instruments Incorporated

# 7 Application and Implementation

**Note**

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

## 7.1 Application Information

### *7.1.1 Adjustable Device Feedback Resistor Selection*

The adjustable-version device requires external feedback divider resistors to set the output voltage. $V_{OUT}$ is set using the feedback divider resistors, $R_1$ and $R_2$, according to the following equation:

$$V_{OUT} = V_{FB} \times (1 + R_1 / R_2) \quad (4)$$

To ignore the FB pin current error term in the $V_{OUT}$ equation, set the feedback divider current to 100x the FB pin current ($I_{FB}$) listed in the *Section 5.5* table. This setting provides the maximum feedback divider series resistance, as shown in the following equation:

$$R_1 + R_2 \leq V_{OUT} / (I_{FB} \times 100) \quad (5)$$

### *7.1.2 Recommended Capacitor Types*

The new chip is designed to be stable using low equivalent series resistance (ESR) ceramic capacitors at the input and output. Multilayer ceramic capacitors have become the industry standard for these types of applications and are recommended, but must be used with good judgment. Ceramic capacitors that employ X7R-, X5R-, and C0G-rated dielectric materials provide relatively good capacitive stability across temperature, whereas the use of Y5V-rated capacitors is discouraged because of large variations in capacitance.

Regardless of the ceramic capacitor type selected, the effective capacitance varies with operating voltage and temperature. As a general rule, expect the effective capacitance to decrease by as much as 50%. For new chip, the input and output capacitors recommended in the *Section 5.3* table account for an effective capacitance of approximately 50% of the nominal value.

### *7.1.3 Input and Output Capacitor Selection*

**For new chip:** The TPS723 (new chip) requires an output capacitor of 2.2µF or larger (1.0µF or larger capacitance) for stability and an equivalent series resistance (ESR) between 0.0Ω and 0.5Ω. For best transient performance, use X5R- and X7R-type ceramic capacitors because these capacitors have minimal variation in value and ESR over temperature. When choosing a capacitor for a specific application, be mindful of the DC bias characteristics for the capacitor. Higher output voltages cause a significant derating of the capacitor.

**For new chip:** Although an input capacitor is not required for stability, good analog design practice is to connect a capacitor from IN to GND. Some input supplies have a high impedance, thus placing the input capacitor on the input supply helps reduce the input impedance. This capacitor counteracts reactive input sources and improves transient response, input ripple, and PSRR. If the input supply has a high impedance over a large range of frequencies, several input capacitors can be used in parallel to lower the impedance over frequency. Use a higher-value capacitor if large, fast, rise-time load transients are anticipated, or if the device is located several inches from the input power source.

**For legacy chip:** Appropriate input and output capacitors should be used for the intended application. The TPS723 (legacy chip) only requires a 2.2-µF ceramic output capacitor to be used for stable operation. Both the capacitor value and equivalent series resistance (ESR) affect stability, output noise, PSRR, and transient response. For typical applications, a 2.2-µF ceramic output capacitor located close to the regulator is sufficient.


Copyright © 2026 Texas Instruments Incorporated

### 7.1.4 Reverse Current

Excessive reverse current can damage this device. Reverse current flows through the intrinsic body diode of the pass transistor instead of the normal conducting channel. At high magnitudes, this current flow degrades the long-term reliability of the device.

Conditions where reverse current can occur are outlined in this section, all of which can exceed the absolute maximum rating of $V_{OUT} \geq V_{IN}$ - 0.3 V.

- If the device has a large $C_{OUT}$ and the input supply collapses with little or no load current
- The output is biased when the input supply is not established
- The output is biased below the input supply

If reverse current flow is expected in the application, external protection is recommended to protect the device. Reverse current is not limited in the device, so external limiting is required if extended reverse voltage operation is anticipated.

Figure 7-1 shows one approach for protecting the device.

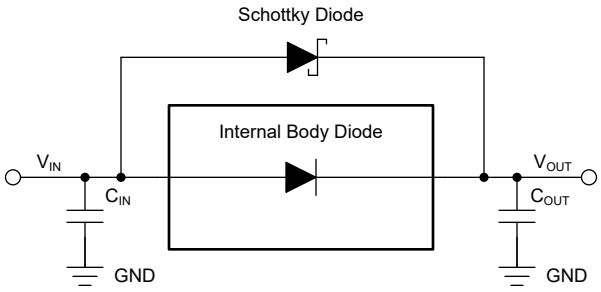



**Figure 7-1. Example Circuit for Reverse Current Protection Using a Schottky Diode**

### 7.1.5 Feed-Forward Capacitor ($C_{FF}$)

For the adjustable-voltage version device, a feed-forward capacitor ($C_{FF}$) can be connected from the OUT pin to the FB pin. $C_{FF}$ improves transient, noise, and PSRR performance, but is not required for regulator stability. Recommended $C_{FF}$ values (for new chip) are listed in the *Section 5.3* table. A higher capacitance $C_{FF}$ can be used; however, the start-up time increases. For a detailed description of $C_{FF}$ tradeoffs, see the *Pros and Cons of Using a Feedforward Capacitor with a Low-Dropout Regulator* application report.

$C_{FF}$ and $R_1$ form a zero in the loop gain at frequency $f_Z$, while $C_{FF}$, $R_1$, and $R_2$ form a pole in the loop gain at frequency $f_P$. $C_{FF}$ zero and pole frequencies can be calculated from the following equations:

$$f_Z = 1 / (2 \times \pi \times C_{FF} \times R_1) \quad (6)$$

$$f_P = 1 / (2 \times \pi \times C_{FF} \times (R_1 \parallel R_2)) \quad (7)$$

$C_{FF} \geq 10$ pF is required for stability if the feedback divider current is less than 10µA. Equation 8 calculates the feedback divider current.

$$I_{FB_Divider} = V_{OUT} / (R_1 + R_2) \quad (8)$$

To avoid start-up time increases from $C_{FF}$, limit the product $C_{FF} \times R_1 < 50$µs.

### 7.1.6 Power Dissipation ($P_D$)

Circuit reliability requires consideration of the device power dissipation, location of the circuit on the printed circuit board (PCB), and correct sizing of the thermal plane. The PCB area around the regulator must have few or no other heat-generating devices that cause added thermal stress.

To first-order approximation, power dissipation in the regulator depends on the input-to-output voltage difference and load conditions. The following equation calculates power dissipation ($P_D$).

Copyright © 2026 Texas Instruments Incorporated

$$P_D = (V_{OUT} – V_{IN}) \times I_{OUT} \quad (9)$$

**Note**

For negative voltage rails, the headroom across the LDO is calculated as $V_{OUT}$ - $V_{IN}$. Power dissipation can be minimized, and therefore greater efficiency can be achieved, by correct selection of the system voltage rails. For the lowest power dissipation use the minimum input voltage required for correct output regulation.

For devices with a thermal pad, the primary heat conduction path for the device package is through the thermal pad to the PCB. Solder the thermal pad to a copper pad area under the device. This pad area must contain an array of plated vias that conduct heat to additional copper planes for increased heat dissipation.

The maximum power dissipation determines the maximum allowable ambient temperature ($T_A$) for the device. According to the following equation, power dissipation and junction temperature are most often related by the junction-to-ambient thermal resistance ($R_{\theta JA}$) of the combined PCB and device package and the temperature of the ambient air ($T_A$).

$$T_J = T_A + (R_{\theta JA} \times P_D) \quad (10)$$

Thermal resistance ($R_{\theta JA}$) is highly dependent on the heat-spreading capability built into the particular PCB design, and therefore varies according to the total copper area, copper weight, and location of the planes. The junction-to-ambient thermal resistance listed in the Section 5.4 table is determined by the JEDEC standard PCB and copper-spreading area, and is used as a relative measure of package thermal performance.

### *7.1.7 Estimating Junction Temperature*

The JEDEC standard now recommends the use of psi (Ψ) thermal metrics to estimate the junction temperatures of the linear regulator when in-circuit on a typical PCB board application. These metrics are not thermal resistance parameters and instead offer a practical and relative way to estimate junction temperature. These psi metrics are determined to be significantly independent of the copper area available for heat-spreading. The Section 5.4 table lists the primary thermal metrics, which are the junction-to-top characterization parameter ($\psi_{JT}$) and junction-to-board characterization parameter ($\psi_{JB}$). These parameters provide two methods for calculating the junction temperature ($T_J$), as described in the following equations. Use the junction-to-top characterization parameter ($\psi_{JT}$) with the temperature at the center-top of device package ($T_T$) to calculate the junction temperature. Use the junction-to-board characterization parameter ($\psi_{JB}$) with the PCB surface temperature 1 mm from the device package ($T_B$) to calculate the junction temperature.

$$T_J = T_T + \psi_{JT} \times P_D \quad (11)$$

where:

- $P_D$ is the dissipated power
- $T_T$ is the temperature at the center-top of the device package

$$T_J = T_B + \psi_{JB} \times P_D \quad (12)$$

where


- $T_B$ is the PCB surface temperature measured 1 mm from the device package and centered on the package edge

For detailed information on the thermal metrics and how to use them, see the *Semiconductor and IC Package Thermal Metrics* application report.


Copyright © 2026 Texas Instruments Incorporated

## 7.2 Typical Application

The TPS72301 allows designers to specify any output voltage from –10V to –1.2V. As shown in the application circuit in Figure 7-2, an external resistor divider is used to scale the output voltage ($V_O$) to the reference voltage. For best accuracy, use precision resistors for $R_1$ and $R_2$. Use the equations in Figure 7-2 to determine the values for the resistor divider.

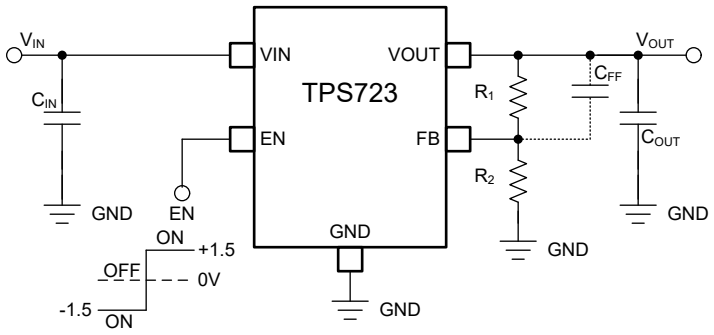


$V_{OUT}$ = –1.186 × (1 + $R_1$ / $R_2$), where $R_1$ + $R_2$ ≅ 100kΩ (for legacy chip) and $R_2$ ≤ 118.6kΩ (for new chip)

**Figure 7-2. TPS72301 Adjustable LDO Regulator Programming**

### *7.2.1 Design Requirements*

For this design example, use the parameters listed in Table 7-1 as the input parameters.

**Table 7-1. Design Parameters**

| DESIGN PARAMETER | EXAMPLE VALUE |
|---|---|
| Input voltage range | –10V to –2.7V |
| Output voltage | –2.5V |
| Output current | 200mA |
| Output capacitor | 2.2µF |

#### 7.2.1.1 Capacitor Selection for Stability

Appropriate input and output capacitors must be used for the intended application. The TPS723 only requires a 2.2-µF ceramic output capacitor to be used for stable operation. Both the capacitor value and equivalent series resistance (ESR) affect stability, output noise, PSRR, and transient response. For typical applications, a 2.2-µF ceramic output capacitor located close to the regulator is sufficient.

#### 7.2.1.2 Output Noise

Without external bypassing, output noise of the TPS723 from 10 Hz to 100 kHz is 200 $\mu V_{RMS}$ typical. The dominant contributor to output noise is the internal band-gap reference. Adding an external 0.01-µF capacitor to ground reduces noise to 60 $\mu V_{RMS}$. Best noise performance is achieved using appropriate low ESR capacitors for bypassing noise at the NR and OUT pins. See Figure 5-58 in the *Typical Characteristics* section.

#### 7.2.1.3 Power-Supply Rejection

The TPS723 offers a very high PSRR for applications with noisy input sources or highly sensitive output supply lines. For best PSRR, use high-quality input and output capacitors.

### *7.2.2 Detailed Design Procedure*

Select the desired device based on the output voltage.

Provide an input supply with adequate headroom to account for dropout and output current to account for the GND pin current, and power the load.

Copyright © 2026 Texas Instruments Incorporated

### 7.2.3 Application Curves

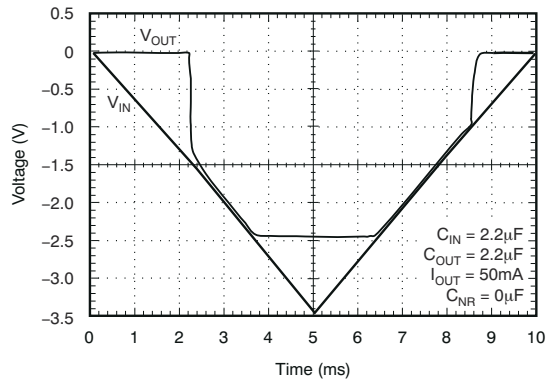



**Figure 7-3. TPS72325 Power-Up, Power-Down (legacy chip)**

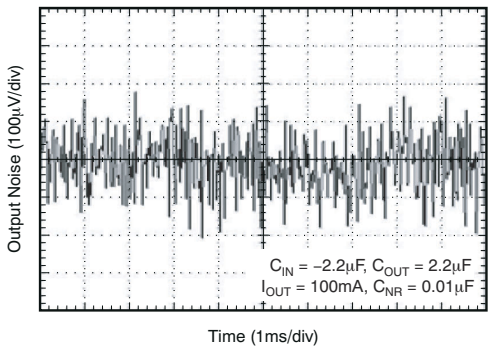



**Figure 7-4. TPS72325 Output Noise vs Time (legacy chip)**



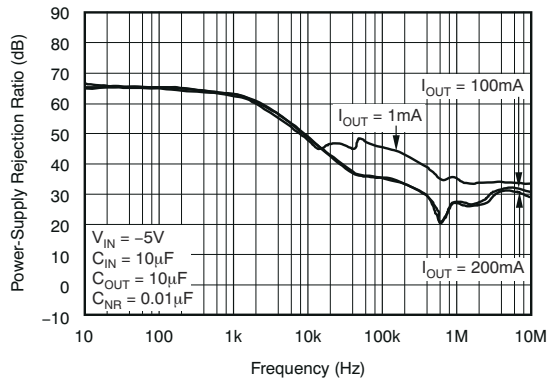



**Figure 7-5. PSRR vs Frequency (legacy chip)**

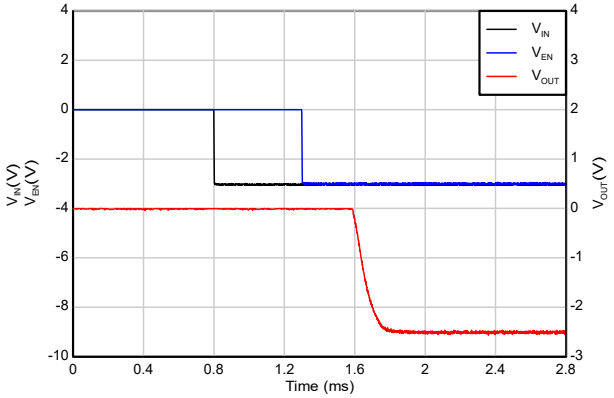



$I_{OUT}$ = 200mA

**Figure 7-6. TPS72325 Start-up Response ($V_{IN}$ ramping before EN) (New chip)**

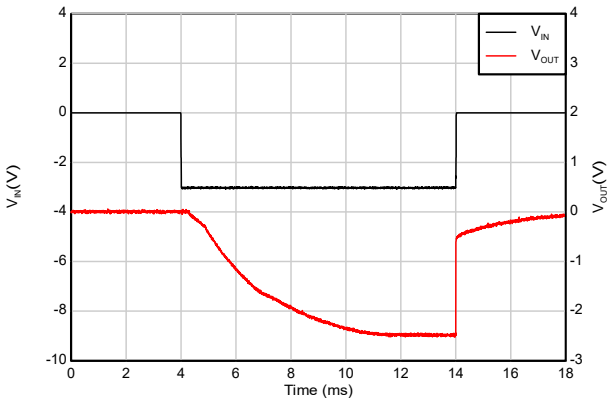


$I_{OUT}$ = 200mA, $C_{NR}$ = 10nF

**Figure 7-7. TPS72325 Start-up Response ($V_{IN}$ & EN tied together) (New chip)**

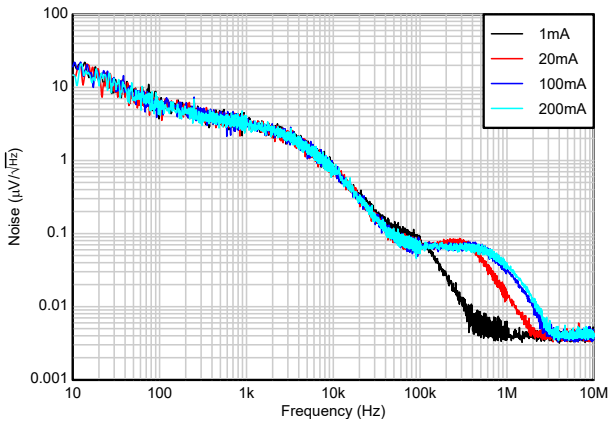


$V_{IN}$ = –3.0V

**Figure 7-8. TPS72325 Total Noise vs $I_{OUT}$ (10 Hz to 100 kHz) (New chip)**


Copyright © 2026 Texas Instruments Incorporated

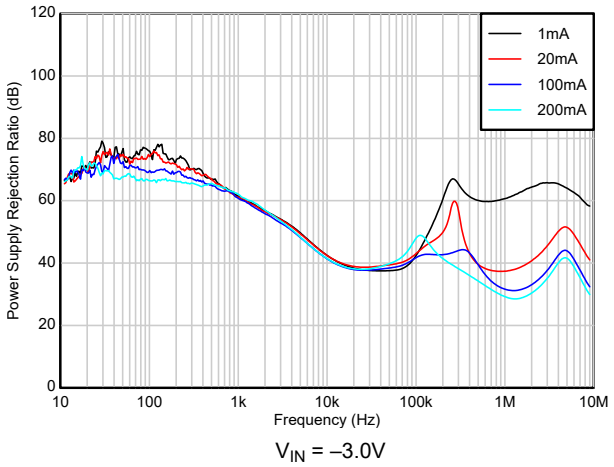



**Figure 7-9. PSRR vs $I_{OUT}$ (New chip)**

## 7.3 Best Design Practices

Do place at least one 2.2-µF ceramic capacitor as close as possible to the OUT pin of the regulator.

Do not place the output capacitor more than 10 mm away from the regulator.

Do connect a 0.1-µF to 2.2-µF low ESR capacitor across the IN pin and GND input of the regulator.

Do not exceed the absolute maximum ratings.

## 7.4 Power Supply Recommendations

These devices are designed to operate from an input voltage supply range between –10V and –2.7V. The input voltage range must provide adequate headroom in order for the device to have a regulated output. This input supply must be well-regulated and stable. If the input supply is noisy, additional input capacitors with low ESR can help improve the output noise performance.

## 7.5 Layout

### *7.5.1 Layout Guidelines*

To improve ac performance (such as PSRR, output noise, and transient response), design the board with separate ground planes for $V_I$ and $V_O$, with each ground plane connected only at the GND pin of the device. In addition, connect the bypass capacitor directly to the GND pin of the device.

### *7.5.2 Layout Example*

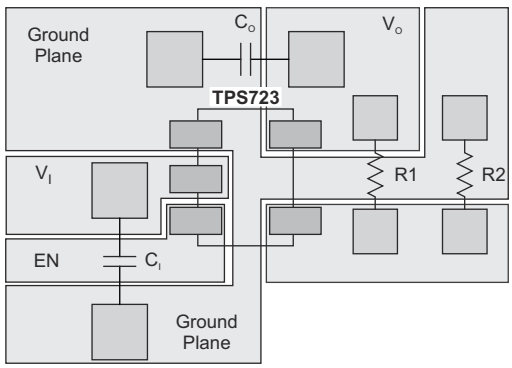



**Figure 7-10. Example Layout**

# 8 Device and Documentation Support

## 8.1 Device Support

### *8.1.1 Development Support*

#### 8.1.1.1 Spice Models

Computer simulation of circuit performance using SPICE is often useful when analyzing the performance of analog circuits and systems. A SPICE model for the TPS723 is available through the product folders under *Simulation Models*.

### *8.1.2 Device Nomenclature*

**Table 8-1. Device Nomenclature** (1)

| PRODUCT | $V_{OUT}$ |
|---|---|
| TPS723**xxyyyz M3** | **xx** is nominal output voltage (for example, 25 = 2.5 V, 01 = Adjustable).<br>**yyy** is package designator.<br>**z** is package quantity. This device either ships with the legacy chip (CSO: DLN ) or the new chip (CSO: DM6), which uses the latest manufacturing flow. The reel packaging label provides CSO information to distinguish which chip is used. Device performance for new and legacy chips is denoted throughout the document. M3 is a suffix designator only significant for the new chip with CSO:DM6, which uses the latest manufacturing flow. |

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or visit the device product folder at www.ti.com.

## 8.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 8.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

## 8.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

## 8.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 8.6 Glossary

TI Glossary — This glossary lists and explains terms, acronyms, and definitions.


Copyright © 2026 Texas Instruments Incorporated

## 9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision D (December 2019) to Revision E (March 2026) | Page |
|---|---|
| • Updated the numbering format for tables, figures, and cross-references throughout the document | 1 |
| • Updated the *Features* section to add information about the new chip | 1 |
| • Updated the *Description* section to highlight key device performance parameters for both new and legacy chip | 1 |
| • Updated the *Pin Configuration and Functions* section to add detailed functionality about each pin | 3 |
| • Updated the *Absolute Maximum Ratings, ESD Ratings, Recommended Operating Conditions and Electrical Characteristics* to add performance details about the new chip and comparison with the legacy chip | 4 |
| • Updated *Typical Characteristics* section to show performance comparison between legacy and new chip | 7 |
| • Updated *Overview* section to provide information about the new chip | 21 |
| • Added functional block diagrams for the new chip and updated functional block diagrams for the fixed and adjustable devices | 21 |
| • Updated *Current Limit* section to show detailed information about device functionality | 23 |
| • Updated *Enable* section to show detailed information about device functionality | 23 |
| • Added *Dropout voltage* section to show detailed information about device functionality | 24 |
| • Added *Output Pullup* section to show detailed information about device functionality | 24 |
| • Added *Thermal Shutdown* section to show detailed information about device functionality | 24 |
| • Added *Undervoltage Lockout (UVLO)* section to show detailed information about device functionality | 24 |
| • Added *NR and Programmable Soft Start* section to show detailed information about device functionality | 24 |
| • Updated the *Device Functional Modes* section to show functionality of the device | 25 |
| • Added *Adjustable Device Feedback Resistor Selection* section to show detailed application information of the device | 26 |
| • Added *Recommended Capacitor Types* section to show detailed application information of the device | 26 |
| • Added *Input and Output Capacitor Selection* section to show detailed application information of the device | 26 |
| • Added *Reverse Current* section to show detailed application information of the device | 27 |
| • Added *Feed-Forward Capacitor ($C_{FF}$)* section to show detailed application information of the device | 27 |
| • Added *Power Dissipation ($P_D$)* section to show detailed application information of the device | 27 |
| • Added *Estimating Junction Temperature* section to show detailed application information of the device | 28 |
| • Updated Figure 7-2 and added note comparing the legacy and new chip | 29 |
| • Added Table 7-1 | 29 |
| • Added new curves to *Application Curves* | 30 |
| • Deleted the *Power Dissipation* and *Thermal Protection* sections | 31 |
| • Updated *Device Nomenclature* to provide further details about the device | 32 |

| Changes from Revision C (September 2014) to Revision D (December 2019) | Page |
|---|---|
| • Added DRV package to document | 1 |
| • Changed *Applications* section to link to end equipment | 1 |

## 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2026 Texas Instruments Incorporated

## PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package \| Pins | Package qty \| Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|---|---|---|---|---|---|---|---|---|---|
| TPS72301DBVR | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU \| SN | Level-1-260C-UNLIM | -40 to 125 | T08I |
| TPS72301DBVR.A | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | SN | Level-1-260C-UNLIM | -40 to 125 | T08I |
| TPS72301DBVRG4 | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | T08I |
| TPS72301DBVRG4.A | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | T08I |
| TPS72301DBVRM3 | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | SN | Level-1-260C-UNLIM | -40 to 125 | T08I |
| TPS72301DBVT | Obsolete | Production | SOT-23 (DBV) \| 5 | - | - | Call TI | Call TI | -40 to 125 | T08I |
| TPS72301DDCR | NRND | Production | SOT-23-THIN (DDC) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | T08I |
| TPS72301DDCR.A | NRND | Production | SOT-23-THIN (DDC) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | T08I |
| TPS72301DDCT | Active | Production | SOT-23-THIN (DDC) \| 5 | 250 \| SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | T08I |
| TPS72301DDCT.A | Active | Production | SOT-23-THIN (DDC) \| 5 | 250 \| SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | T08I |
| TPS72301DRVR | NRND | Production | WSON (DRV) \| 6 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 1TLM |
| TPS72301DRVR.A | NRND | Production | WSON (DRV) \| 6 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 1TLM |
| TPS72301DRVT | Active | Production | WSON (DRV) \| 6 | 250 \| SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 1TLM |
| TPS72301DRVT.A | Active | Production | WSON (DRV) \| 6 | 250 \| SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 1TLM |
| TPS72325DBVR | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU \| SN | Level-1-260C-UNLIM | -40 to 125 | T02I |
| TPS72325DBVR.A | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | SN | Level-1-260C-UNLIM | -40 to 125 | T02I |
| TPS72325DBVRG4 | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | T02I |
| TPS72325DBVRG4.A | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | T02I |
| TPS72325DBVRM3 | Active | Production | SOT-23 (DBV) \| 5 | 3000 \| LARGE T&R | Yes | SN | Level-1-260C-UNLIM | -40 to 125 | T02I |

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

**(4) Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**(5) MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

**(6) Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TPS723 :**


- Automotive : TPS723-Q1

NOTE: Qualified Version Definitions:


- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

## TAPE AND REEL INFORMATION

**REEL DIMENSIONS**

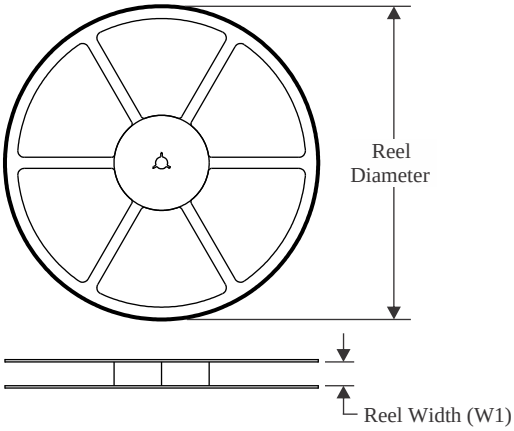



**TAPE DIMENSIONS**

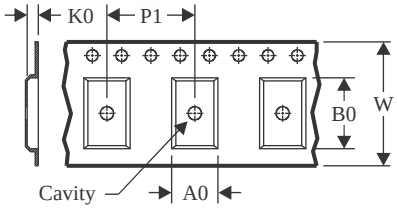


| | |
|---|---|
| A0 | Dimension designed to accommodate the component width |
| B0 | Dimension designed to accommodate the component length |
| K0 | Dimension designed to accommodate the component thickness |
| W | Overall width of the carrier tape |
| P1 | Pitch between successive cavity centers |


**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**

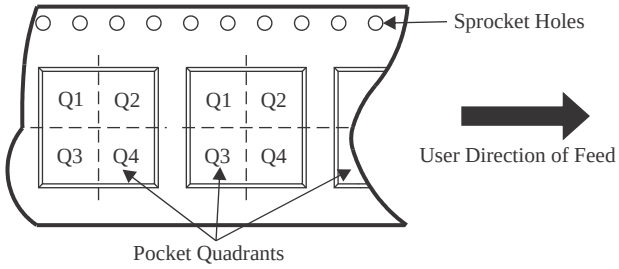


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| TPS72301DBVR | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72301DBVR | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72301DBVRG4 | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72301DBVRM3 | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72301DDCR | SOT-23-THIN | DDC | 5 | 3000 | 179.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72301DDCT | SOT-23-THIN | DDC | 5 | 250 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72301DRVR | WSON | DRV | 6 | 3000 | 178.0 | 8.4 | 2.25 | 2.25 | 1.0 | 4.0 | 8.0 | Q2 |
| TPS72301DRVT | WSON | DRV | 6 | 250 | 178.0 | 8.4 | 2.25 | 2.25 | 1.0 | 4.0 | 8.0 | Q2 |
| TPS72325DBVR | SOT-23 | DBV | 5 | 3000 | 179.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72325DBVR | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72325DBVRG4 | SOT-23 | DBV | 5 | 3000 | 179.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| TPS72325DBVRM3 | SOT-23 | DBV | 5 | 3000 | 180.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |

TAPE AND REEL BOX DIMENSIONS

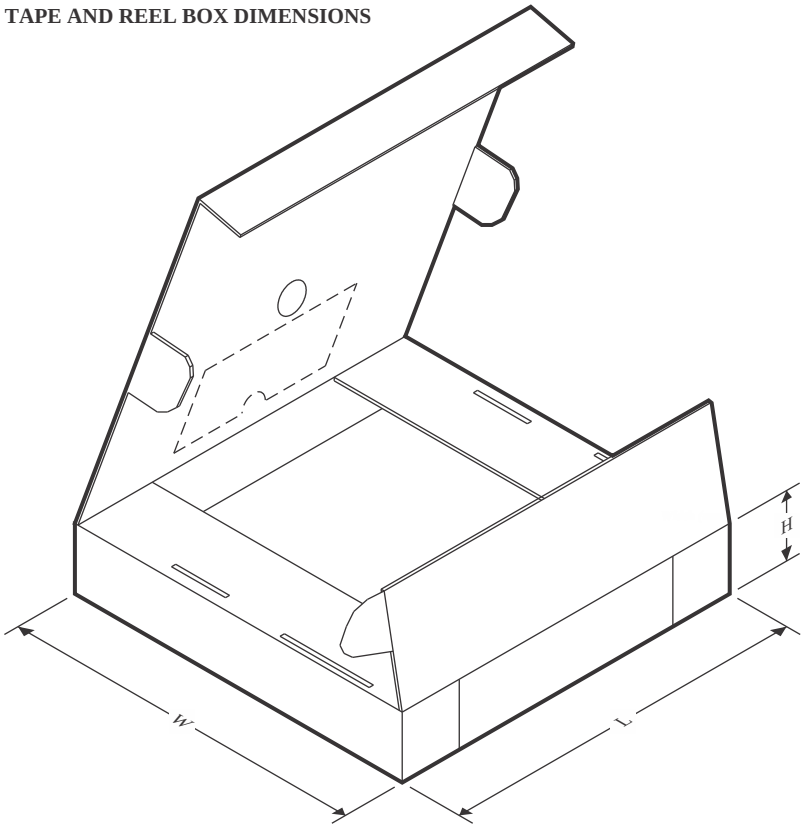


*All dimensions are nominal


| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---|---|---|---|---|---|---|---|
| TPS72301DBVR | SOT-23 | DBV | 5 | 3000 | 200.0 | 183.0 | 25.0 |
| TPS72301DBVR | SOT-23 | DBV | 5 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS72301DBVRG4 | SOT-23 | DBV | 5 | 3000 | 200.0 | 183.0 | 25.0 |
| TPS72301DBVRM3 | SOT-23 | DBV | 5 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS72301DDCR | SOT-23-THIN | DDC | 5 | 3000 | 213.0 | 191.0 | 35.0 |
| TPS72301DDCT | SOT-23-THIN | DDC | 5 | 250 | 213.0 | 191.0 | 35.0 |
| TPS72301DRVR | WSON | DRV | 6 | 3000 | 205.0 | 200.0 | 33.0 |
| TPS72301DRVT | WSON | DRV | 6 | 250 | 205.0 | 200.0 | 33.0 |
| TPS72325DBVR | SOT-23 | DBV | 5 | 3000 | 200.0 | 183.0 | 25.0 |
| TPS72325DBVR | SOT-23 | DBV | 5 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS72325DBVRG4 | SOT-23 | DBV | 5 | 3000 | 200.0 | 183.0 | 25.0 |
| TPS72325DBVRM3 | SOT-23 | DBV | 5 | 3000 | 210.0 | 185.0 | 35.0 |


# PACKAGE OUTLINE

## DDC0005A

## SOT-23 - 1.1 max height

SMALL OUTLINE TRANSISTOR

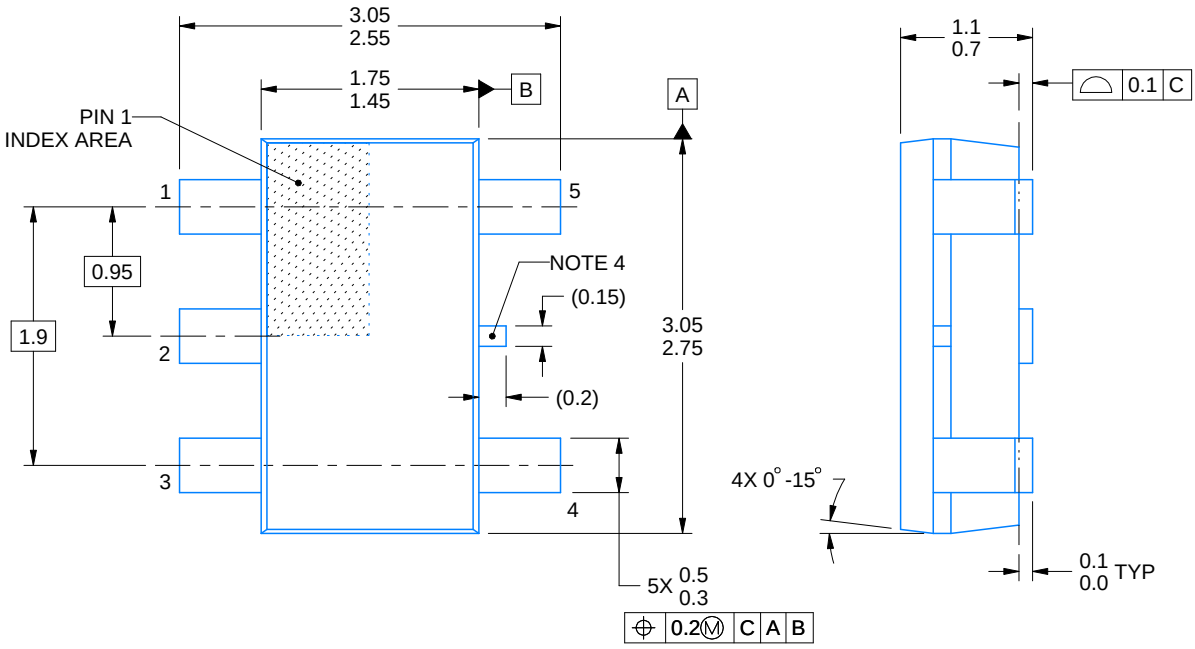


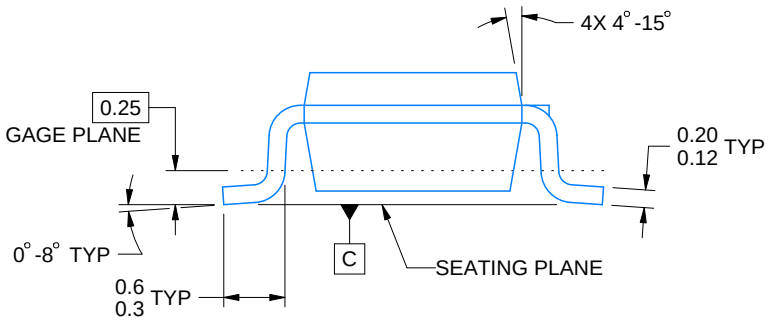

4220752/C 08/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-193.
4. Support pin may differ or may not be present.

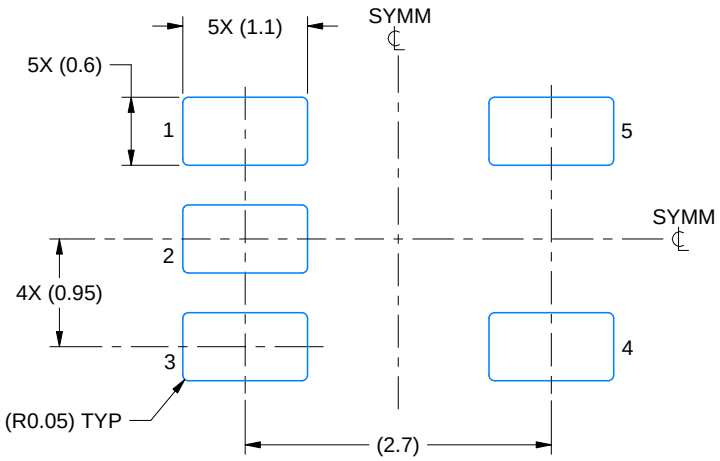


LAND PATTERN EXAMPLE
EXPLOSED METAL SHOWN
SCALE:15X

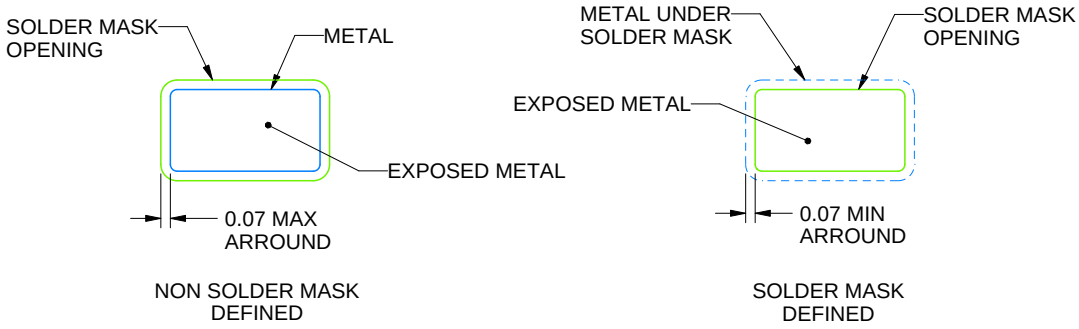



SOLDERMASK DETAILS

4220752/C 08/2024

NOTES: (continued)

4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

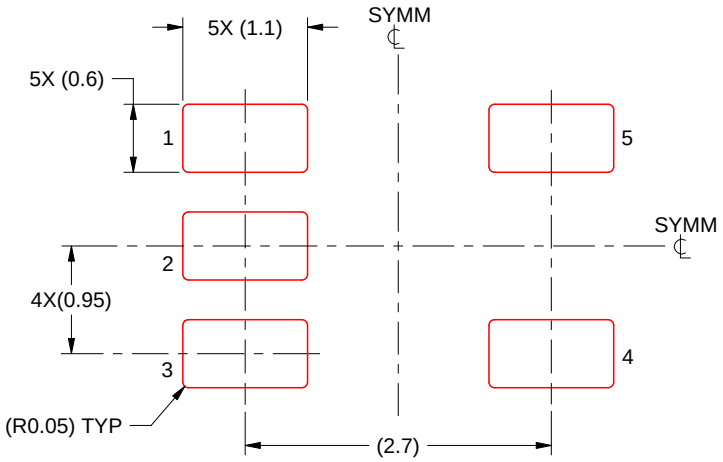


SOLDER PASTE EXAMPLE
BASED ON 0.125 THICK STENCIL
SCALE:15X

4220752/C 08/2024

NOTES: (continued)


6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

# PACKAGE OUTLINE

## DBV0005A

## SOT-23 - 1.45 mm max height


SMALL OUTLINE TRANSISTOR

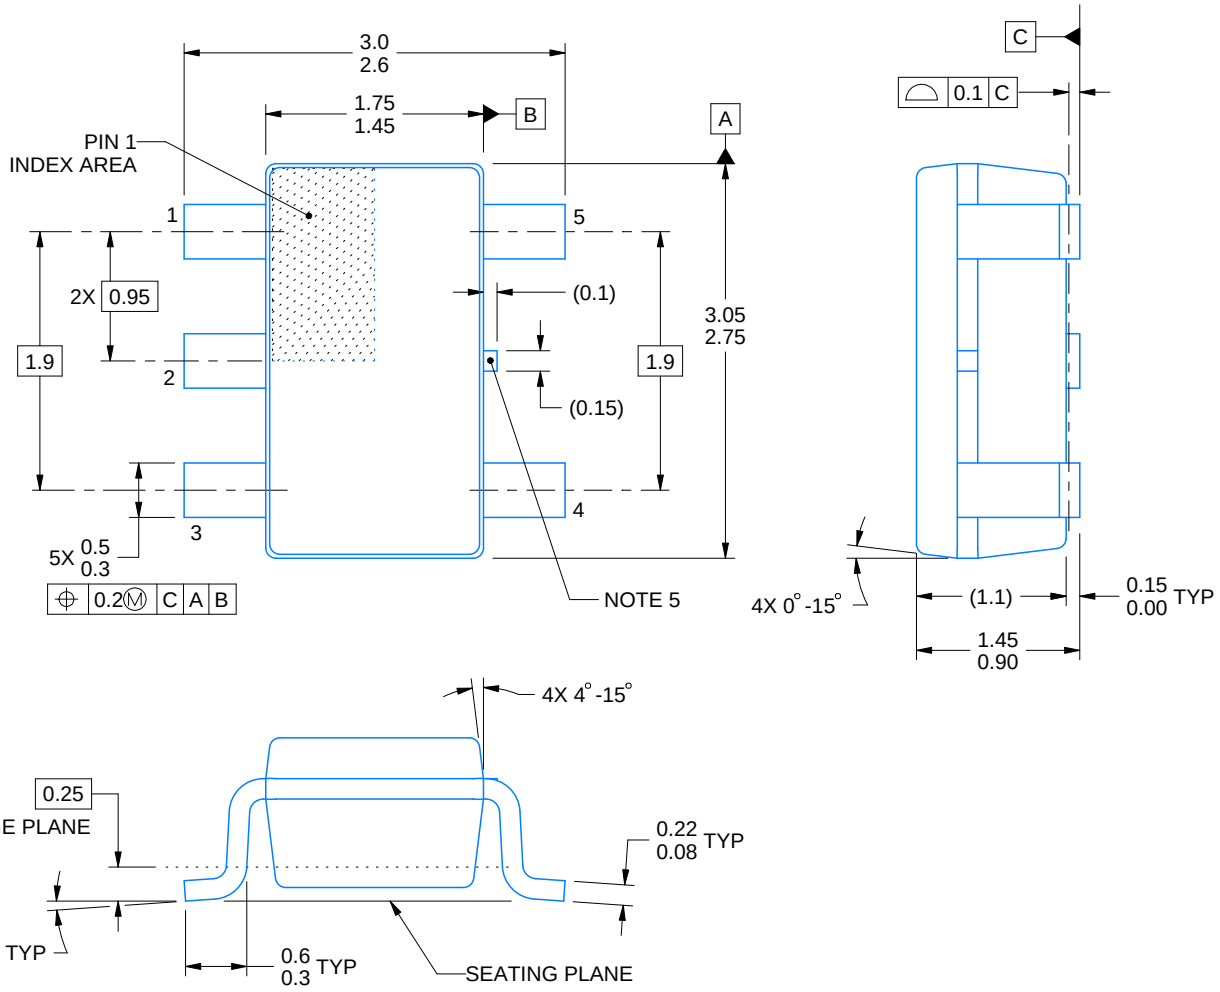



4214839/K 08/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Refernce JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

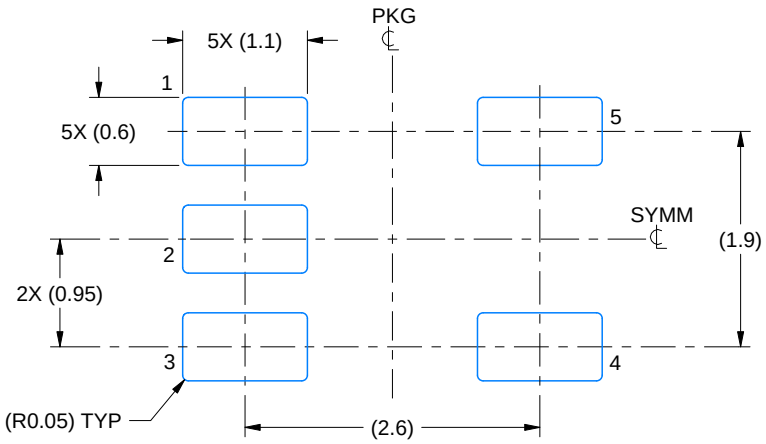


LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

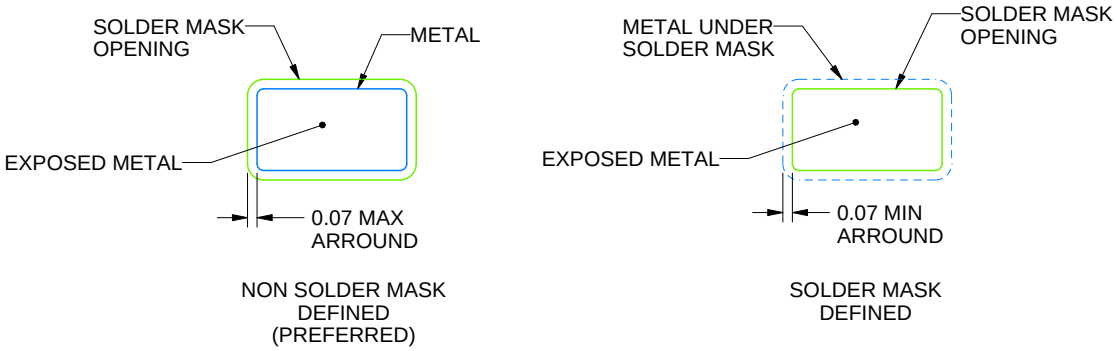



SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

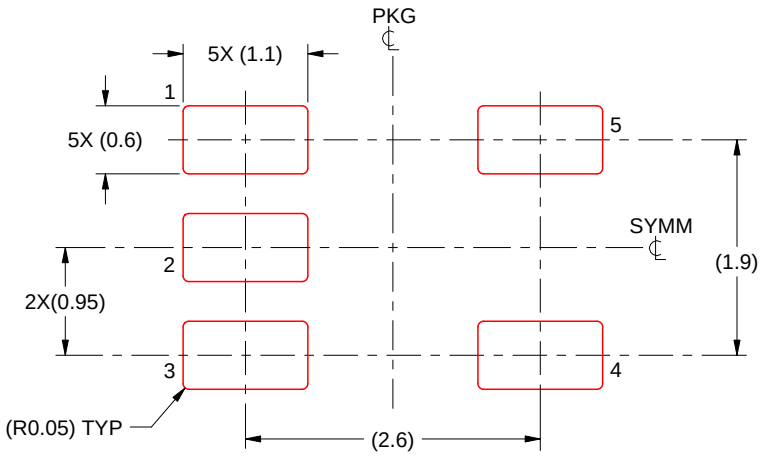


SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X


4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

# DRV 6 WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

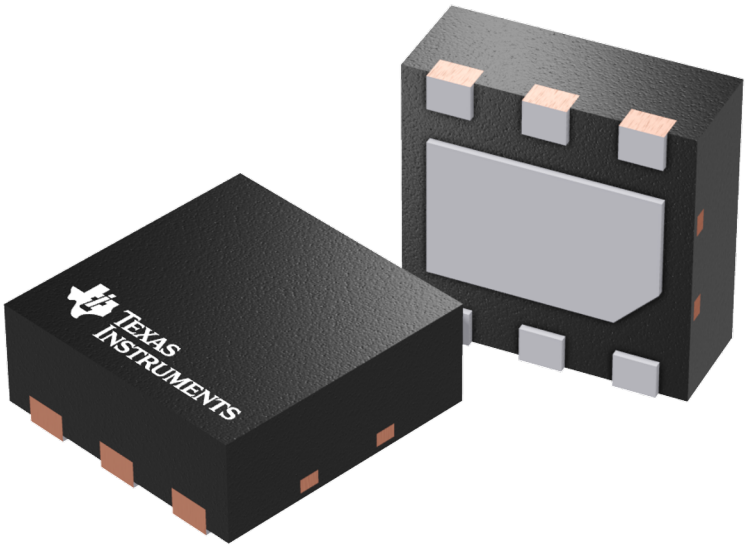


Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

# IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025