

# TPSM265R1 65-V Input, 100-mA Power Module with Ultra-Low $I_Q$

## 1 Features

- Wide input voltage range of 3 V to 65 V
- Output voltage options:
  - Adjustable 1.223 V to 15 V
  - Fixed 3.3 V or 5 V
- 100-mA output current
- 10.5- $\mu$ A quiescent current
- $\pm 1\%$  internal voltage reference
- PFM mode of operation
- $-40^\circ\text{C}$  to  $125^\circ\text{C}$  ambient temperature range
- Active slew rate control for low EMI
- Meets CISPR11 (EN55011) EMI standards
- Monotonic start-up into prebiased output
- Power-good flag
- Precision enable and input UVLO with hysteresis
- Thermal shutdown protection with hysteresis
- 2.8-mm x 3.7-mm x 1.9-mm package
- Create a custom regulator design with the TPSM265R1 using [WEBENCH® Power Designer](#)

## 2 Applications

- [Field transmitter and process sensors](#)
- [Position and proximity sensors](#)
- [PLC, DCS, and PAC](#)
- [Servo drive power supply module](#)
- [Negative output applications](#)

## 3 Description


The TPSM265R1 is a compact, easy-to-use module that operates over a wide input voltage range up to a maximum continuous input voltage of 65 V. The module fully integrates a controller, MOSFETs, and an output inductor. The module is designed to quickly and easily implement a power design in a small PCB footprint. There are two fixed output voltage options, 3.3 V and 5 V, and an adjustable output voltage option that can be adjusted from 1.223 V to 15 V. Each option has a load current rating of 100 mA. The TPSM265R1 operates in Pulse Frequency Modulation (PFM) mode, providing optimal efficiency at light loads. The control scheme does not require loop compensation, providing excellent line and load transient.

Although designed for small size and simplicity, the TPSM265R1 offers many features. Precision enable, adjustable UVLO, and hysteresis allow for specific power-up and power-down requirements. Selectable/adjustable start-up timing options include minimum delay (no soft start), internally fixed (900  $\mu$ s), and externally programmable soft start via an external capacitor. An open-drain PGOOD indicator can be used for sequencing and output voltage monitoring. The very small 2.8-mm  $\times$  3.7-mm  $\times$  1.9-mm package is a good fit for space-constrained applications.


### Device Information

| PART NUMBER <sup>(1)</sup> | OUTPUT          | PACKAGE |
|----------------------------|-----------------|---------|
| TPSM265R1                  | 1.223 V to 15 V | uSiP    |
| TPSM265R1V3                | 3.3 V           |         |
| TPSM265R1V5                | 5 V             |         |

- (1) For all available packages, see the orderable addendum at the end of the data sheet.

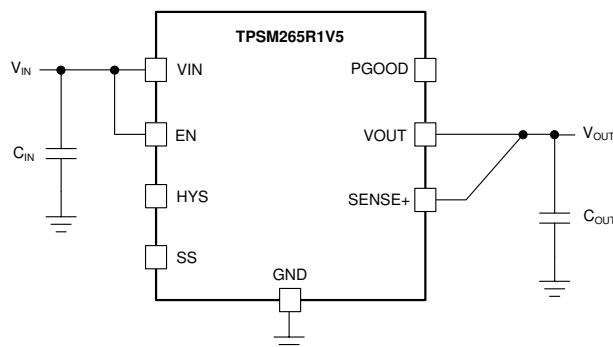

Typical Schematic, Fixed Output

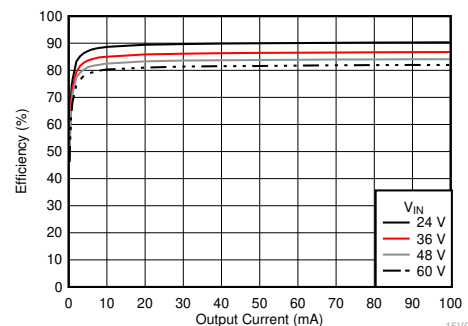

Typical Efficiency,  $V_{OUT} = 15\text{ V}$



## 5 Pin Configuration and Functions

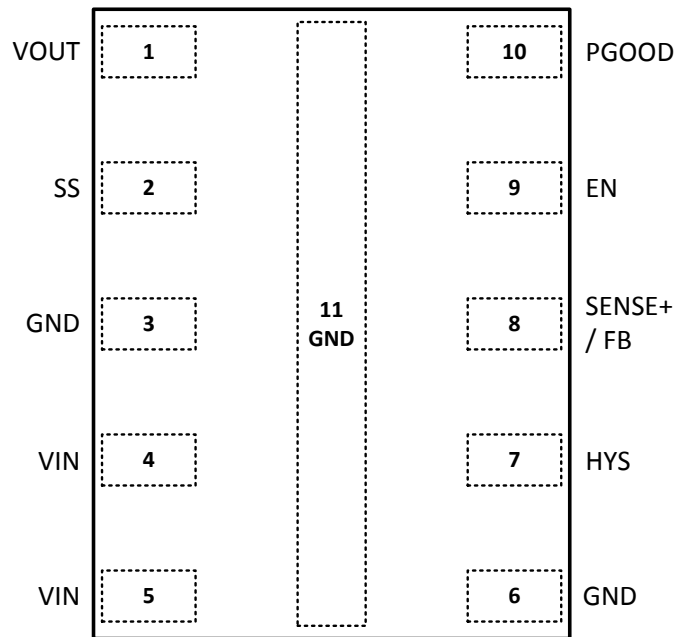


Figure 5-1. 10-Pin uSiP Exposed Thermal Pad SIL-10C Package (Top View)

Table 5-1. Pin Functions

| PIN      |           | TYPE <sup>(1)</sup> | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------|-----------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NO.      | NAME      |                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 1        | VOUT      | O                   | Output voltage pin. The VOUT pin is connected to the internal output inductor. Connect the VOUT pin to an external output capacitor and the output load. The output capacitor connections must be made as close as possible to the VOUT and GND pin 11 of the module. See <a href="#">Section 10.2</a> .                                                                                                                                                        |
| 2        | SS        | I                   | Soft-start programming pin. If the SS pin is floating, the output voltage ramp up time is approximately 1 ms after the device is enabled by the EN pin. If a 100-kΩ resistor is placed from the SS pin to GND, the internal soft start is disabled and the output voltage ramps up immediately after the device is enabled with the EN pin. Other output voltage ramp up times can be obtained by connecting an appropriate capacitance from the SS pin to GND. |
| 3, 6, 11 | GND       | G                   | Ground pins. Connect all GND pins to the system ground plane. <b>Pin 3 is not connected to GND internal to the module.</b> Connect pin 3 directly to pin 11 on the host PCB. See <a href="#">Section 10.2</a> .                                                                                                                                                                                                                                                 |
| 4, 5     | VIN       | I                   | Input supply pins. The VIN pins are connected to the internal controller and power MOSFETs. Connect the VIN pins to an external input capacitor and the input power source. The input capacitor connections must be made as close as possible to the VIN pins and GND pin 6 of the module. See <a href="#">Section 10.2</a> .                                                                                                                                   |
| 7        | HYS       | O                   | Enable hysteresis pin. The open-drain HYS pin can be used along with external resistors to program the hysteresis of a user-defined UVLO using the EN pin. HYS is internally pulled to GND when EN is below its turnon threshold and HYS goes open drain when EN is above its turnon threshold.                                                                                                                                                                 |
| 8        | SENSE+/FB | I                   | Output voltage feedback pin. For fixed output voltage options, the SENSE+ pin must be externally connected to VOUT. For the adjustable output voltage option, the FB pin must be connected to an external resistor divider that is connected between VOUT and GND.                                                                                                                                                                                              |
| 9        | EN        | I                   | Enable pin. The module is enabled when the EN pin is pulled high and disabled when the EN pin is pulled low. An external resistor divider can be connected to the EN pin to act as an external UVLO.                                                                                                                                                                                                                                                            |
| 10       | PGOOD     | O                   | Power Good pin. The open-drain PGOOD pin is pulled low when the SENSE+ or FB pin is below the VOUT regulation target. An external 10-kΩ to 100-kΩ pullup resistor can be used to pull the PGOOD pin high when VOUT meets the regulation target.                                                                                                                                                                                                                 |

(1) G = Ground, I = Input, O = Output

## Table of Contents

|                                                |           |                                                        |           |
|------------------------------------------------|-----------|--------------------------------------------------------|-----------|
| <b>1 Features</b> .....                        | <b>1</b>  | 7.3 Feature Description.....                           | <b>13</b> |
| <b>2 Applications</b> .....                    | <b>1</b>  | 7.4 Device Functional Modes.....                       | <b>17</b> |
| <b>3 Description</b> .....                     | <b>1</b>  | <b>8 Applications and Implementation</b> .....         | <b>18</b> |
| <b>4 Revision History</b> .....                | <b>3</b>  | 8.1 Application Information.....                       | <b>18</b> |
| <b>5 Pin Configuration and Functions</b> ..... | <b>2</b>  | 8.2 Typical Applications.....                          | <b>18</b> |
| <b>6 Specifications</b> .....                  | <b>4</b>  | <b>9 Power Supply Recommendations</b> .....            | <b>21</b> |
| 6.1 Absolute Maximum Ratings.....              | <b>4</b>  | <b>10 Layout</b> .....                                 | <b>22</b> |
| 6.2 ESD Ratings.....                           | <b>4</b>  | 10.1 Layout Guidelines.....                            | <b>22</b> |
| 6.3 Recommended Operating Conditions.....      | <b>4</b>  | 10.2 Layout Example.....                               | <b>22</b> |
| 6.4 Thermal Information.....                   | <b>5</b>  | <b>11 Device and Documentation Support</b> .....       | <b>26</b> |
| 6.5 Electrical Characteristics.....            | <b>5</b>  | 11.1 Device Support.....                               | <b>26</b> |
| 6.6 Typical Characteristics (VIN = 5 V).....   | <b>7</b>  | 11.2 Documentation Support.....                        | <b>26</b> |
| 6.7 Typical Characteristics (VIN = 12 V).....  | <b>8</b>  | 11.3 Receiving Notification of Documentation Updates.. | <b>26</b> |
| 6.8 Typical Characteristics (VIN = 24 V).....  | <b>8</b>  | 11.4 Support Resources.....                            | <b>26</b> |
| 6.9 Typical Characteristics (VIN = 48 V).....  | <b>9</b>  | 11.5 Trademarks.....                                   | <b>27</b> |
| 6.10 Typical Characteristics (VIN = 65 V)..... | <b>10</b> | 11.6 Electrostatic Discharge Caution.....              | <b>27</b> |
| <b>7 Detailed Description</b> .....            | <b>12</b> | 11.7 Glossary.....                                     | <b>27</b> |
| 7.1 Overview.....                              | <b>12</b> | <b>12 Mechanical, Packaging, and Orderable</b>         |           |
| 7.2 Functional Block Diagram.....              | <b>12</b> | <b>Information</b> .....                               | <b>27</b> |

## 4 Revision History

| Changes from Revision A (November 2019) to Revision B (December 2020)                                 | Page     |
|-------------------------------------------------------------------------------------------------------|----------|
| • Updated the numbering format for tables, figures and cross-references throughout the document. .... | <b>1</b> |
| • Changed device status from Advance Information to Production Data.....                              | <b>1</b> |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

Over operating junction temperature range (unless otherwise noted) <sup>(1)</sup>

|                                                |                                                        | MIN  | MAX  | UNIT |
|------------------------------------------------|--------------------------------------------------------|------|------|------|
| Input voltage                                  | VIN, EN                                                | –0.3 | 68   | V    |
|                                                | SENSE+, PGOOD                                          | –0.3 | 16   | V    |
|                                                | HYS                                                    | –0.3 | 7    | V    |
|                                                | FB, SS                                                 | –0.3 | 3.6  | V    |
| Output voltage                                 | VOOUT                                                  | –0.3 | 16   | V    |
| Operating junction temperature, T <sub>J</sub> |                                                        | –40  | 125  | °C   |
| Storage temperature, T <sub>stg</sub>          |                                                        | –55  | 150  | °C   |
| Peak reflow case temperature                   |                                                        |      | 260  | °C   |
| Maximum number of reflows allowed              |                                                        |      | 3    |      |
| Mechanical shock                               | Mil-STD-883D, Method 2002.3, 1 msec, 1/2 sine, mounted |      | 1500 | G    |
| Mechanical vibration                           | Mil-STD-883D, Method 2007.2, 20 to 2000 Hz             |      | 20   | G    |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

|                    |                         |                                                                                | VALUE | UNIT |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2500 | V    |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

Over operating ambient temperature range (unless otherwise noted)

|                  |                               |                    | MIN               | NOM | MAX | UNIT |
|------------------|-------------------------------|--------------------|-------------------|-----|-----|------|
| Input voltage    | VIN                           |                    | 3 <sup>(1)</sup>  |     | 65  | V    |
|                  | PGOOD                         |                    |                   |     | 12  | V    |
|                  | HYS                           |                    |                   |     | 5   | V    |
| Output voltage   | VOOUT                         | Adjustable option  | 1.223             |     | 15  | V    |
|                  |                               | Fixed 5 V option   |                   | 5   |     | V    |
|                  |                               | Fixed 3.3 V option |                   | 3.3 |     | V    |
| Output current   | I <sub>OUT</sub>              |                    |                   |     | 100 | mA   |
| T <sub>A</sub>   | Operating ambient temperature |                    | –40               |     | 125 | °C   |
| C <sub>IN</sub>  | Input capacitance             | Ceramic            | 1 <sup>(2)</sup>  |     |     | μF   |
| C <sub>OUT</sub> | Output capacitance            | Ceramic            | 10 <sup>(3)</sup> |     |     | μF   |

- (1) The minimum input voltage is 3.0 V or (V<sub>OUT</sub> + 1 V), whichever is greater.

- (2) See [Section 8.2.2.3](#) of the data sheet for more information.

- (3) See [Section 7.3.3](#) of the data sheet for more information.

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPSM265R1 | UNIT |
|-------------------------------|----------------------------------------------|-----------|------|
|                               |                                              | SIL-10C   |      |
|                               |                                              | 10 PINS   |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 49.7      | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 2.3       | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 28.7      | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics Application Report](#).

## 6.5 Electrical Characteristics

Limits apply over T<sub>A</sub> = –40°C to +125°C, V<sub>IN</sub> = 12 V, V<sub>OUT</sub> = 5 V, (unless otherwise noted); C<sub>IN1</sub> = 1 μF, 100-V, 1206 ceramic, C<sub>IN2</sub> = 33 μF, 100-V, electrolytic (optional), and C<sub>OUT</sub> = 47 μF, 16-V, 1210 ceramic. Minimum and maximum limits are specified through production test or by design. Typical values represent the most likely parametric norm and are provided for reference only.

| PARAMETER                                  |                                            | TEST CONDITIONS                                                           | MIN              | TYP   | MAX   | UNIT |
|--------------------------------------------|--------------------------------------------|---------------------------------------------------------------------------|------------------|-------|-------|------|
| <b>SUPPLY VOLTAGE</b>                      |                                            |                                                                           |                  |       |       |      |
| V <sub>IN</sub>                            | Input supply voltage range                 | Over I <sub>OUT</sub> range                                               | 3 <sup>(1)</sup> |       | 65    | V    |
| UVLO                                       | VIN UVLO rising threshold                  | VIN rising                                                                | 2.60             | 2.75  | 2.95  | V    |
|                                            | VIN UVLO falling threshold                 | VIN falling                                                               | 2.35             | 2.45  | 2.60  | V    |
| I <sub>Q(VIN)</sub>                        | VIN operating non-switching supply current | V <sub>FB</sub> = 1.5 V, T <sub>A</sub> = 25°C                            |                  | 10.5  | 15    | μA   |
| I <sub>SD(VIN)</sub>                       | VIN shutdown supply current                | V <sub>EN</sub> = 0 V, T <sub>A</sub> = 25°C                              |                  | 4.6   | 6.0   | μA   |
| <b>ENABLE</b>                              |                                            |                                                                           |                  |       |       |      |
| V <sub>EN(rise)</sub>                      | EN voltage rising threshold                | EN voltage rising                                                         | 1.163            | 1.212 | 1.262 | V    |
| V <sub>EN(fall)</sub>                      | EN voltage falling threshold               | EN voltage falling                                                        | 1.109            | 1.144 | 1.178 | V    |
| V <sub>EN(hyst)</sub>                      | EN voltage hysteresis                      |                                                                           |                  | 68    |       | mV   |
| V <sub>EN(sd)</sub>                        | EN shutdown threshold                      | EN voltage falling                                                        | 0.3              | 0.6   |       | V    |
| R <sub>HYS</sub>                           | HYS on-resistance                          | V <sub>EN</sub> = 1 V                                                     |                  | 80    | 200   | Ω    |
| I <sub>HYS(LKG)</sub>                      | HYS off-state leakage current              | V <sub>EN</sub> = 1.5 V, V <sub>HYS</sub> = 5.5 V                         |                  | 10    | 100   | nA   |
| <b>FEEDBACK (Adjustable option)</b>        |                                            |                                                                           |                  |       |       |      |
| V <sub>FB</sub>                            | Feedback voltage <sup>(2) (4)</sup>        | Lower regulation threshold                                                | 1.205            | 1.223 | 1.241 | V    |
|                                            |                                            | Upper regulation threshold                                                | 1.220            | 1.233 | 1.246 | V    |
|                                            |                                            | Hysteresis                                                                |                  | 10    |       | mV   |
|                                            | Line regulation                            | Over V <sub>IN</sub> range, T <sub>A</sub> = 25°C, I <sub>OUT</sub> = 0 A |                  | 0.3%  |       |      |
|                                            | Load regulation                            | Over I <sub>OUT</sub> range, T <sub>A</sub> = 25°C                        |                  | 0.3%  |       |      |
|                                            | Temperature variation                      | –40°C ≤ T <sub>A</sub> = T <sub>J</sub> ≤ 125°C, I <sub>OUT</sub> = 0 A   |                  | 0.5%  |       |      |
| I <sub>FB</sub>                            | Input bias current into FB pin             | V <sub>FB</sub> = 1 V                                                     |                  |       | 100   | nA   |
| <b>OUTPUT VOLTAGE (Fixed 5 V option)</b>   |                                            |                                                                           |                  |       |       |      |
| V <sub>OUT</sub>                           | Output voltage set-point                   | SENSE+ connected to VOUT                                                  | 4.9              | 5.0   | 5.1   | V    |
|                                            | Line regulation                            | Over V <sub>IN</sub> range, T <sub>A</sub> = 25°C, I <sub>OUT</sub> = 0 A |                  | 0.3%  |       |      |
|                                            | Load regulation                            | Over I <sub>OUT</sub> range, T <sub>A</sub> = 25°C                        |                  | 0.3%  |       |      |
|                                            | Temperature variation                      | –40°C ≤ T <sub>A</sub> = T <sub>J</sub> ≤ 125°C, I <sub>OUT</sub> = 0 A   |                  | 0.5%  |       |      |
| ISENSE+                                    | SENSE+ input current                       |                                                                           |                  | 6.7   |       | μA   |
| eff                                        | Efficiency                                 | V <sub>OUT</sub> = 5.0 V, I <sub>OUT</sub> = 50 mA                        |                  | 83.0% |       |      |
| <b>OUTPUT VOLTAGE (Fixed 3.3 V option)</b> |                                            |                                                                           |                  |       |       |      |
| V <sub>OUT</sub>                           | Output voltage set-point                   | SENSE+ connected to VOUT                                                  | 3.23             | 3.3   | 3.37  | V    |
|                                            | Line regulation                            | Over V <sub>IN</sub> range, T <sub>A</sub> = 25°C, I <sub>OUT</sub> = 0 A |                  | 0.3%  |       |      |
|                                            | Load regulation                            | Over I <sub>OUT</sub> range, T <sub>A</sub> = 25°C                        |                  | 0.3%  |       |      |
|                                            | Temperature variation                      | –40°C ≤ T <sub>A</sub> = T <sub>J</sub> ≤ 125°C, I <sub>OUT</sub> = 0 A   |                  | 0.5%  |       |      |
| ISENSE+                                    | SENSE+ input current                       |                                                                           |                  | 3.9   |       | μA   |

## 6.5 Electrical Characteristics (continued)


Limits apply over  $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ,  $V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 5\text{ V}$ , (unless otherwise noted);  $C_{IN1} = 1\text{ }\mu\text{F}$ , 100-V, 1206 ceramic,  $C_{IN2} = 33\text{ }\mu\text{F}$ , 100-V, electrolytic (optional), and  $C_{OUT} = 47\text{ }\mu\text{F}$ , 16-V, 1210 ceramic. Minimum and maximum limits are specified through production test or by design. Typical values represent the most likely parametric norm and are provided for reference only.

| PARAMETER               |                                            | TEST CONDITIONS                                          | MIN | TYP   | MAX  | UNIT               |
|-------------------------|--------------------------------------------|----------------------------------------------------------|-----|-------|------|--------------------|
| eff                     | Efficiency                                 | $V_{OUT} = 3.3\text{ V}$ , $I_{OUT} = 50\text{ mA}$      |     | 77.2% |      |                    |
| <b>CURRENT</b>          |                                            |                                                          |     |       |      |                    |
| $I_{OUT}$               | Output current                             | See SOA curves for any thermal derating                  | 0   |       | 100  | mA                 |
| $I_{OCL}$               | Overcurrent limit threshold                | $V_{OUT}$ foldback                                       |     | 130   |      | mA                 |
| <b>SOFT-START</b>       |                                            |                                                          |     |       |      |                    |
| $I_{SS}$                | Soft-start charge current                  | $V_{SS} = 1\text{ V}$                                    |     | 10    |      | $\mu\text{A}$      |
| $T_{SS}$                | Soft-start rise time                       | SS pin open                                              |     | 900   |      | $\mu\text{s}$      |
| <b>POWER GOOD</b>       |                                            |                                                          |     |       |      |                    |
| PGOOD                   | PGOOD threshold                            | PGOOD high, $V_{OUT}$ rising                             |     | 94%   |      |                    |
| PGOOD                   | PGOOD threshold                            | PGOOD low, $V_{OUT}$ falling                             |     | 87%   |      |                    |
| $I_{PGOOD(LKG)}$        | PGOOD leakage current                      | $V_{PGOOD} = 5.5\text{ V}$ , PGOOD high                  |     | 10    | 100  | nA                 |
| $R_{PGOOD}$             | PGOOD ON-resistance                        | PGOOD low                                                |     | 80    | 200  | $\Omega$           |
|                         | Min $V_{IN}$ for valid PGOOD output        | $I_{PGOOD} = 0.1\text{ mA}$ , $V_{PGOOD} < 0.5\text{ V}$ |     | 1.2   | 1.65 | V                  |
| <b>THERMAL SHUTDOWN</b> |                                            |                                                          |     |       |      |                    |
| $T_{SDN}$               | Thermal shutdown threshold <sup>(3)</sup>  | Temperature rising                                       |     | 170   |      | $^{\circ}\text{C}$ |
| $T_{HYST}$              | Thermal shutdown hysteresis <sup>(3)</sup> |                                                          |     | 10    |      | $^{\circ}\text{C}$ |


- (1) The recommended minimum input voltage is 3.0 V or ( $V_{OUT} + 1\text{ V}$ ), whichever is greater.
- (2) The FB pin has both lower and upper thresholds associated with the hysteretic control scheme of the module.
- (3) Specified by design. Not production tested.
- (4) The overall output voltage tolerance will be affected by the tolerance of the external  $R_{FBT}$  and  $R_{FBB}$  resistors.

## 6.6 Typical Characteristics (VIN = 5 V)


Refer to [Section 8.2](#) for circuit designs.  $T_A = 25^\circ\text{C}$  unless otherwise noted.

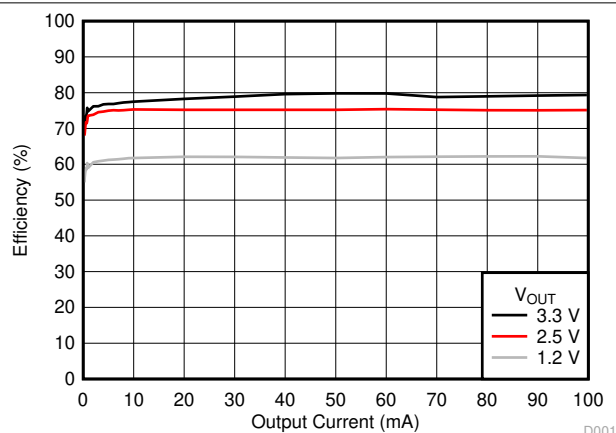


**Figure 6-1. Efficiency**

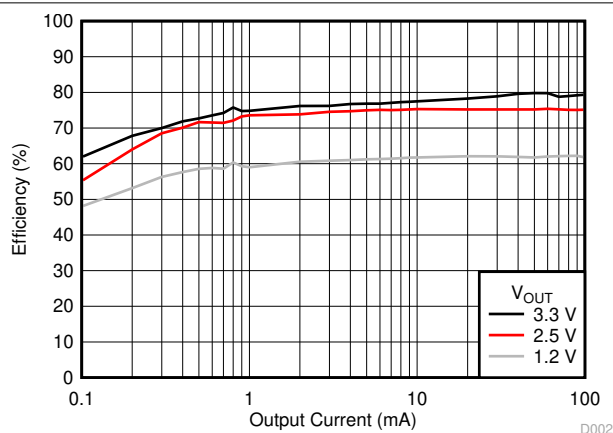


**Figure 6-2. Efficiency Log Scale**

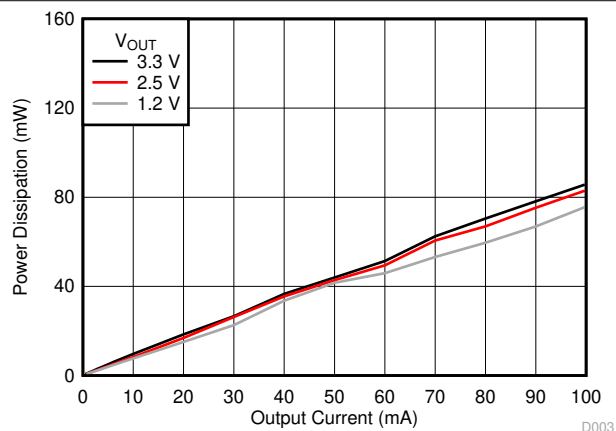

**Figure 6-3. Power Dissipation**

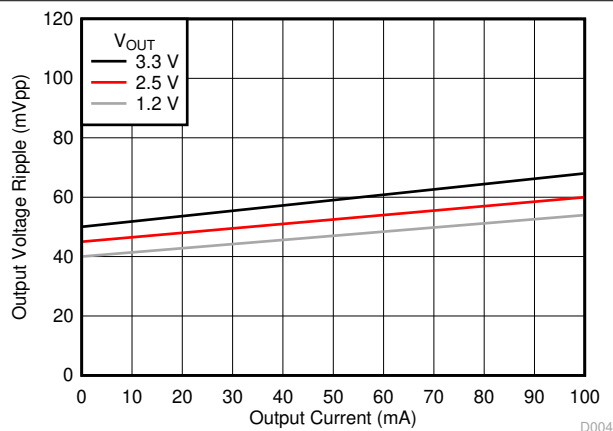

**Figure 6-4. Output Voltage Ripple**  
 $C_{OUT} = 47 \mu\text{F}$ , 16-V, ceramic

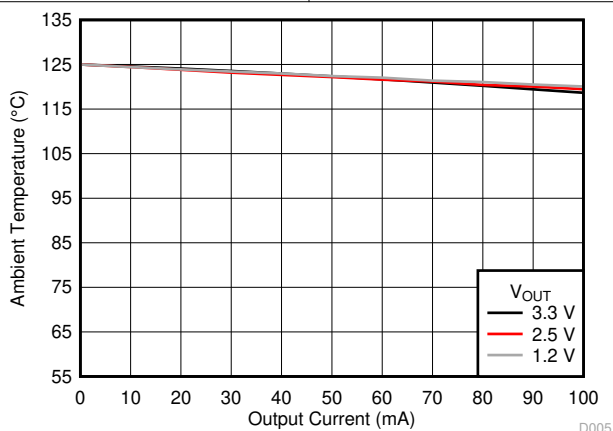


Applies to a device soldered to a 50-mm  $\times$  75-mm, 4-layer PCB


**Figure 6-5. Safe Operating Area**

## 6.7 Typical Characteristics (VIN = 12 V)


Refer to [Section 8.2](#) for circuit designs.  $T_A = 25^\circ\text{C}$  unless otherwise noted.

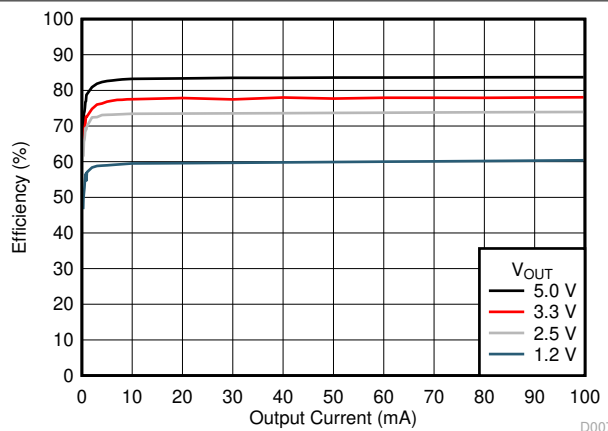


**Figure 6-6. Efficiency**

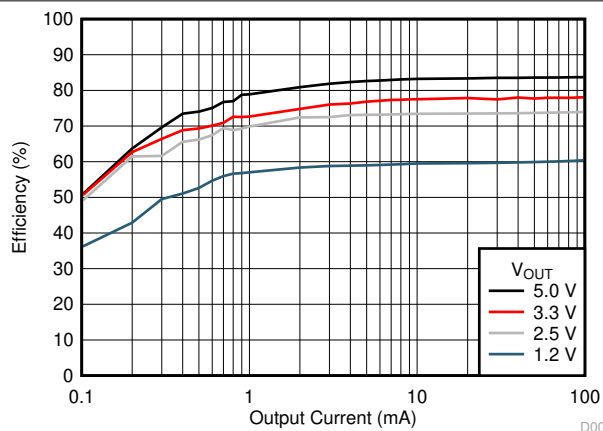

**Figure 6-7. Efficiency Log Scale**

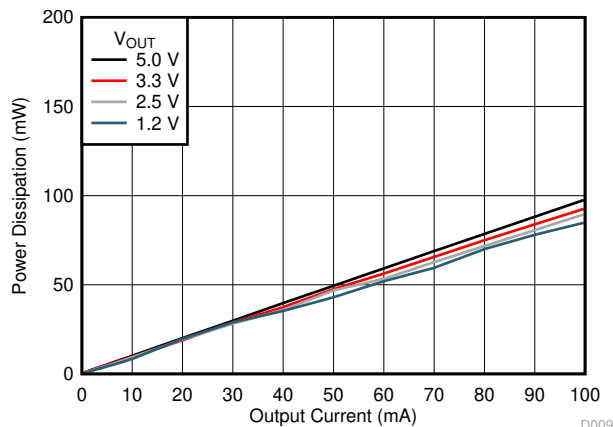


**Figure 6-8. Power Dissipation**

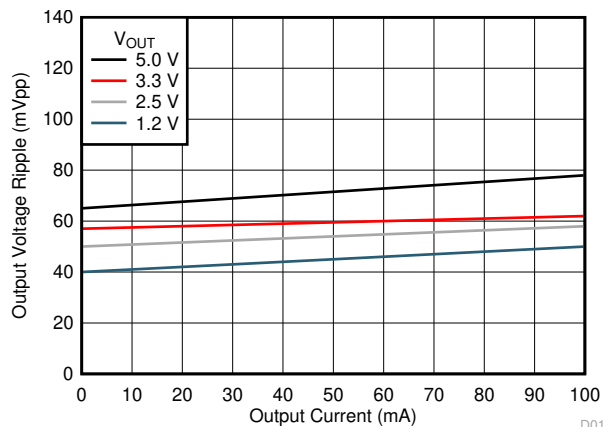

$C_{OUT} = 47\ \mu\text{F}$ , 16-V, ceramic

**Figure 6-9. Output Voltage Ripple**

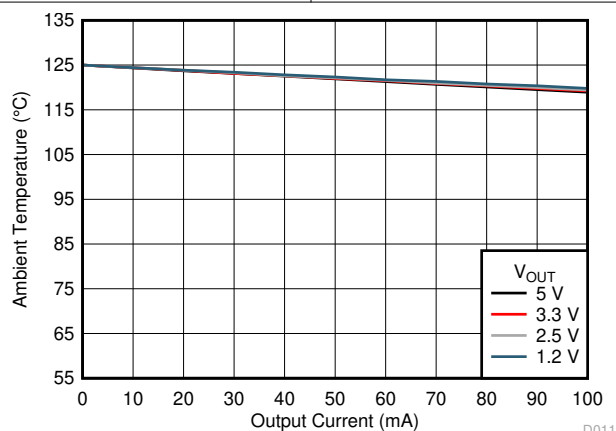


Applies to a device soldered to a 50-mm × 75-mm, 4-layer PCB


**Figure 6-10. Safe Operating Area**

## 6.8 Typical Characteristics (VIN = 24 V)


Refer to the [Section 8.2](#) for circuit designs.  $T_A = 25^\circ\text{C}$  unless otherwise noted.

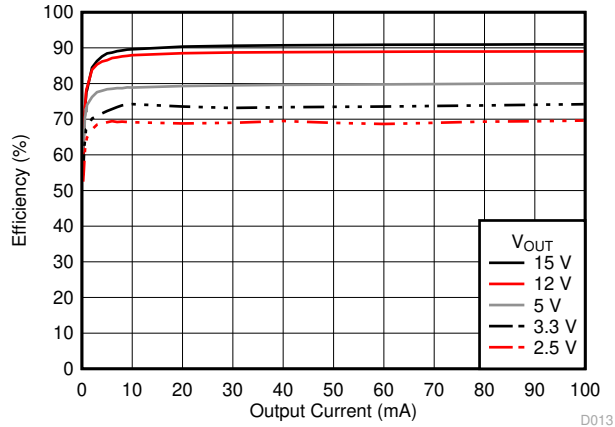


**Figure 6-11. Efficiency**

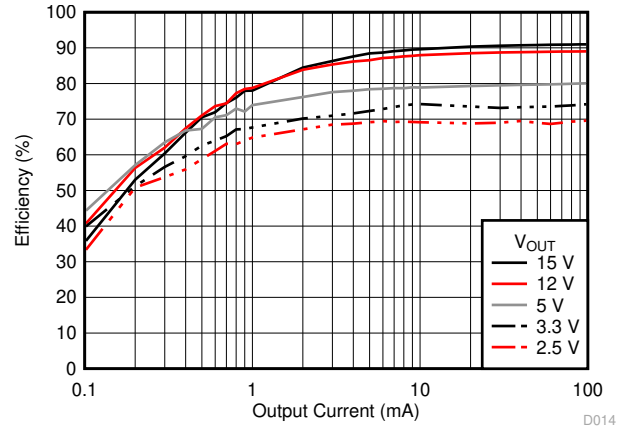


**Figure 6-12. Efficiency Log Scale**

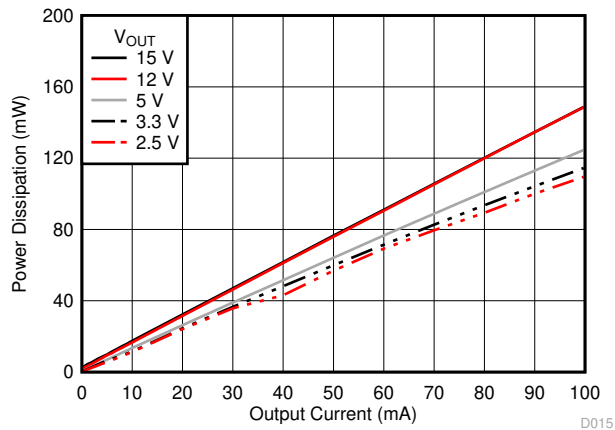

**Figure 6-13. Power Dissipation**

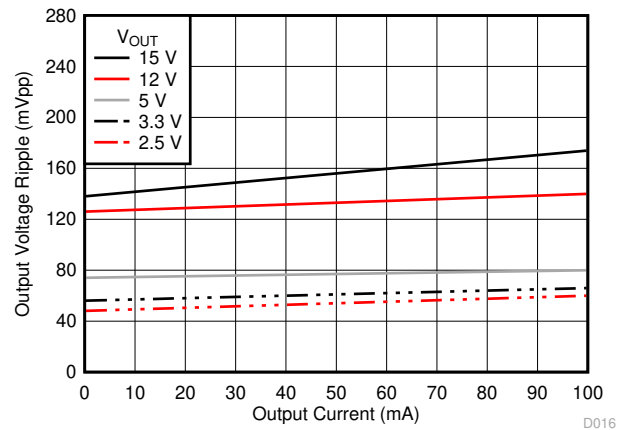

$C_{OUT} = 47 \mu\text{F}$ , 16-V, ceramic  
**Figure 6-14. Output Voltage Ripple**

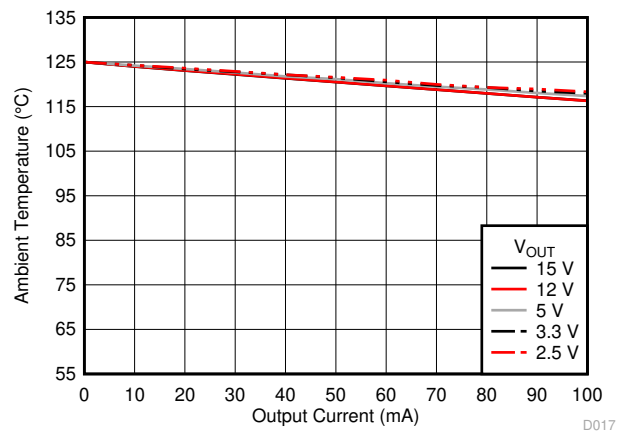

Applies to a device soldered to a 50 mm × 75 mm, 4-layer PCB

**Figure 6-15. Safe Operating Area**

## 6.9 Typical Characteristics (VIN = 48 V)

Refer to [Section 8.2](#) for circuit designs.  $T_A = 25^\circ\text{C}$  unless otherwise noted.

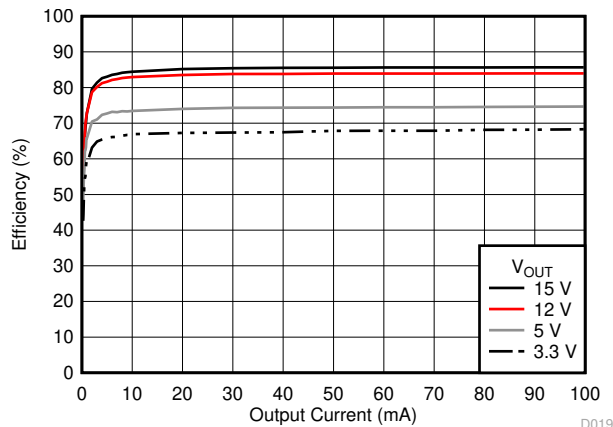


Figure 6-16. Efficiency

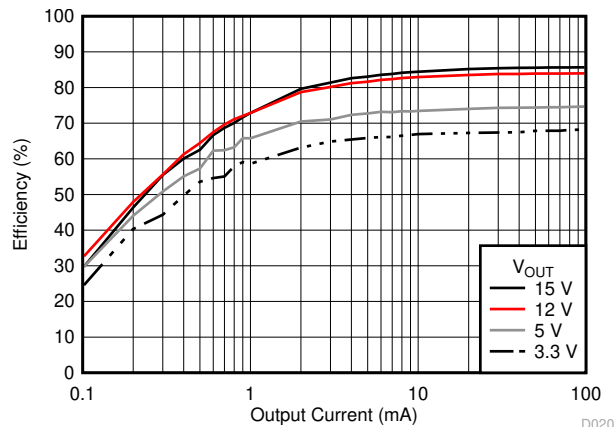


Figure 6-17. Efficiency Log Scale

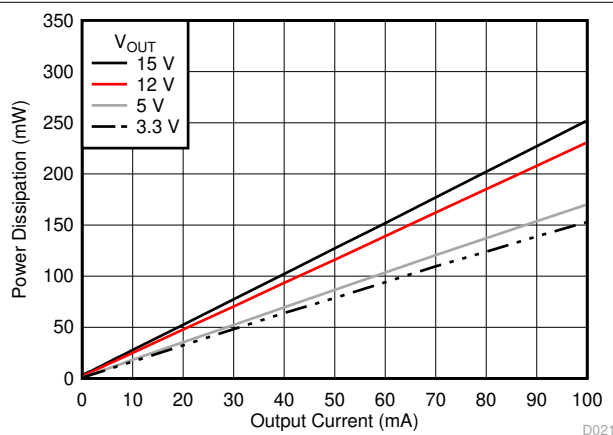


Figure 6-18. Power Dissipation


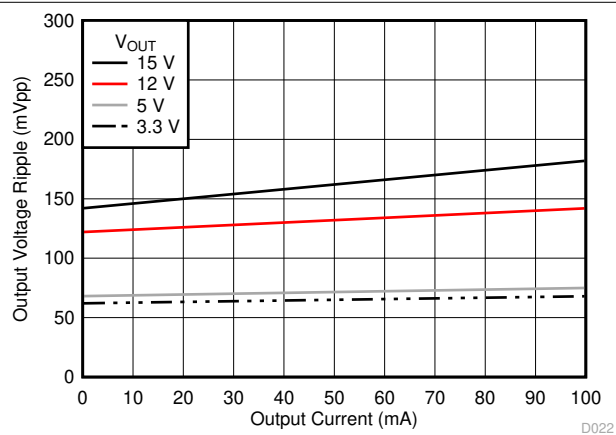
 $C_{OUT} = 47 \mu\text{F}$ , 16-V, ceramic

Figure 6-19. Output Voltage Ripple

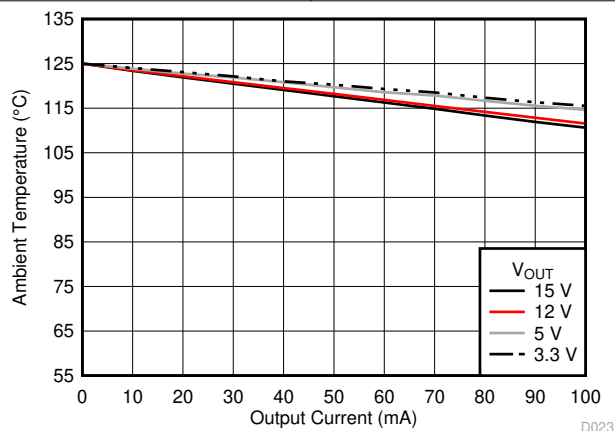


Applies to a device soldered to a 50-mm × 75-mm, 4-layer PCB


Figure 6-20. Safe Operating Area

## 6.10 Typical Characteristics (VIN = 65 V)


Refer to [Section 8.2](#) for circuit designs.  $T_A = 25^\circ\text{C}$  unless otherwise noted.

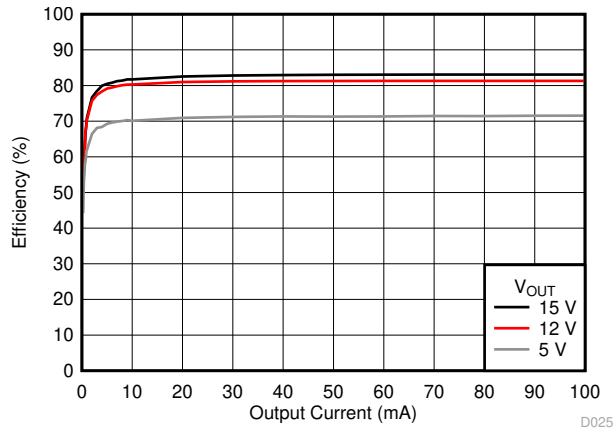


**Figure 6-21. Efficiency**

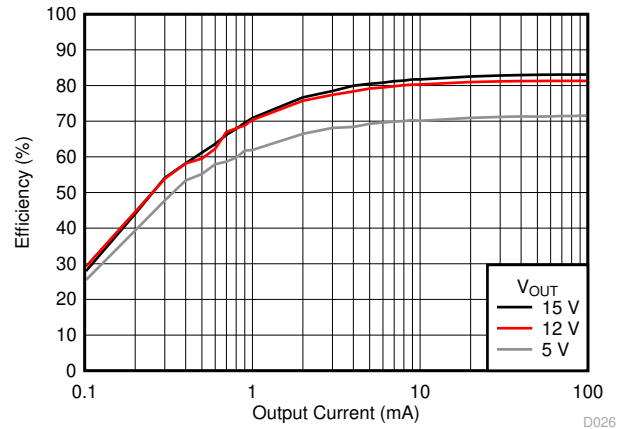


**Figure 6-22. Efficiency Log Scale**

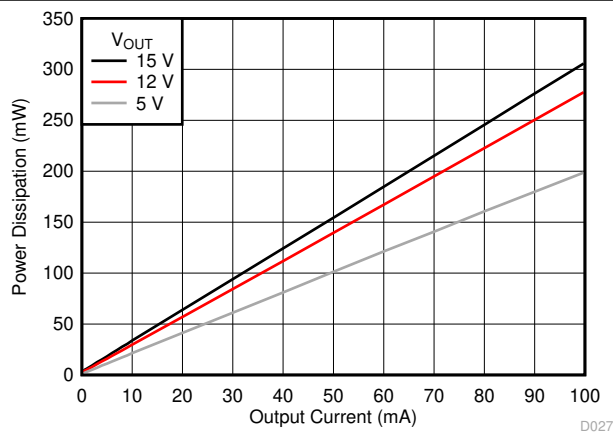

**Figure 6-23. Power Dissipation**

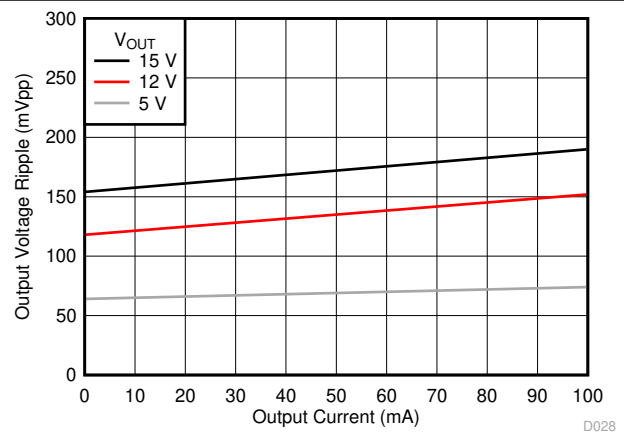

**Figure 6-24. Output Voltage Ripple**  
 $C_{OUT} = 47 \mu\text{F}$ , 16-V, ceramic

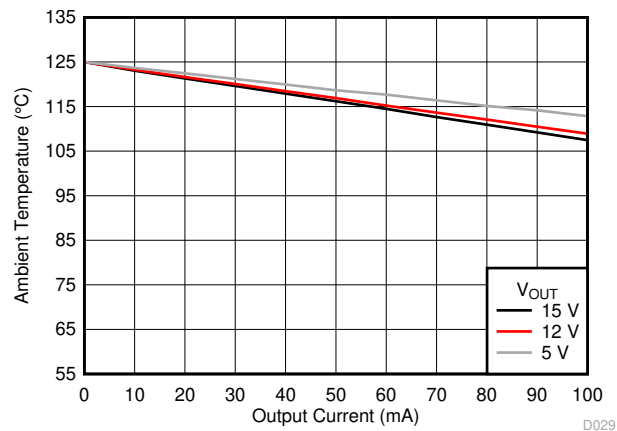

Applies to a device soldered to a 50-mm × 75-mm, 4-layer PCB

**Figure 6-25. Safe Operating Area**


## 7 Detailed Description

### 7.1 Overview

The TPSM265R1 converter is an easy-to-use, synchronous buck, DC-DC power module that operates from a 3-V to 65-V supply voltage. The device is intended for step-down conversions from 3.3-V, 5-V, 12-V, 24-V, and 48-V unregulated, semi-regulated, or fully-regulated supply rails. With integrated power controller, inductor, and MOSFETs, the TPSM265R1 delivers up to 100-mA DC load current, with high efficiency and ultra-low input quiescent current, in a very small solution size. Although designed for simple implementation, this device offers flexibility to optimize its usage according to the target application. Operation in pulse frequency modulation (PFM) mode achieves exceptional light-load efficiency performance. Control-loop compensation is not required, reducing design time and external component count.

The TPSM265R1 incorporates several features for comprehensive system requirements, including an open-drain Power Good circuit for power-rail sequencing and fault reporting, internally-fixed, or externally-adjustable soft start, monotonic start-up into prebiased loads, precision enable with customizable hysteresis for programmable line undervoltage lockout (UVLO), and thermal shutdown with automatic recovery. These features enable a flexible and easy-to-use platform for a wide range of applications. The pin arrangement is designed for simple [layout](#), requiring as few as two external components.

### 7.2 Functional Block Diagram

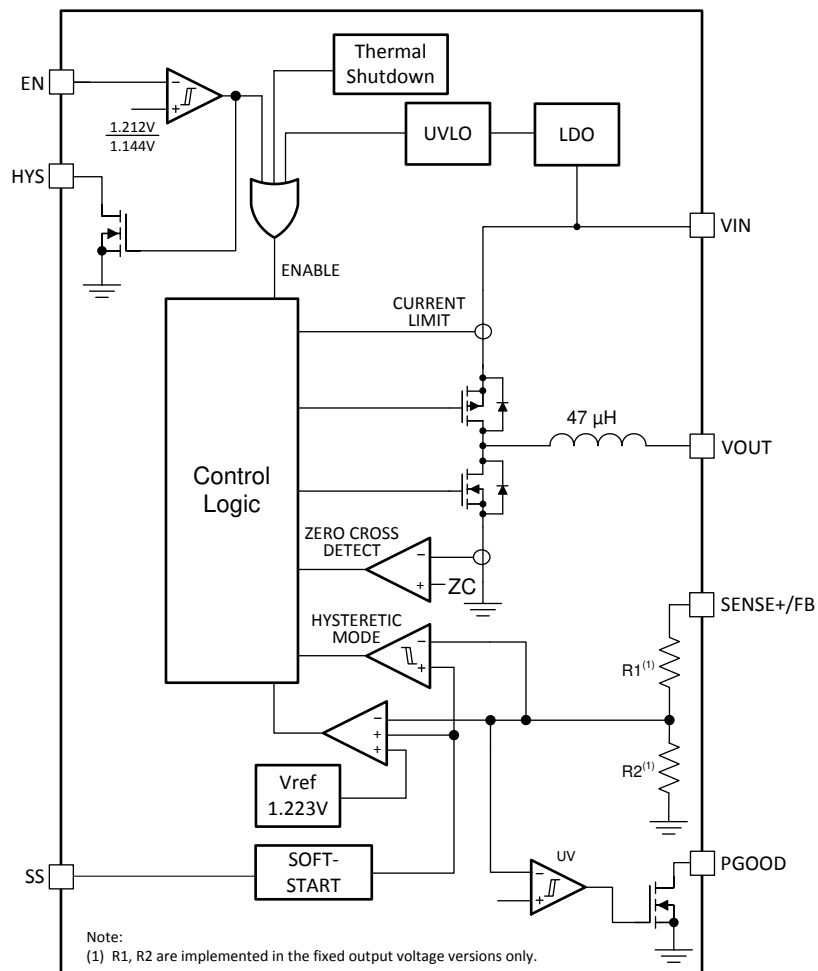


## 7.3 Feature Description

### 7.3.1 Adjustable Output Voltage (FB)

The TPSM265R1 has three voltage feedback options: fixed 3.3 V, fixed 5 V, and adjustable 1.223 V to 15 V. The fixed 3.3-V and 5-V versions include internal feedback resistors that sense the output directly through the SENSE+ pin; the adjustable voltage option senses the output through an external resistor divider connected from the output to the FB pin.

Setting the output voltage of the adjustable option requires two resistors:  $R_{FBT}$  and  $R_{FBB}$  (see Figure 7-1). Connect  $R_{FBT}$  between VOUT, at the regulation point, and the FB pin. Connect  $R_{FBB}$  between the FB pin and GND (pin 6). A resistor divider programs the ratio from output voltage  $V_{OUT}$  to FB. The recommended value of  $R_{FBT}$  is 100 k $\Omega$ . The value for  $R_{FBB}$  can be calculated using Equation 1.

$$R_{FBB} = \frac{1.223}{V_{OUT} - 1.223} \times R_{FBT} \quad (1)$$

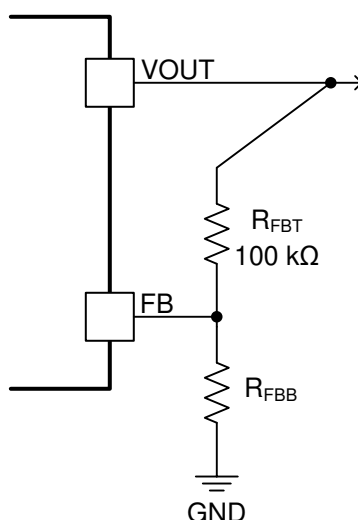

**Figure 7-1. FB Resistor Divider**

**Table 7-1. Standard  $R_{FBB}$  Values**

| VOUT (V) | $R_{FBB}$ (k $\Omega$ ) <sup>(1)</sup> | VOUT (V) | $R_{FBB}$ (k $\Omega$ ) <sup>(1)</sup> |
|----------|----------------------------------------|----------|----------------------------------------|
| 1.223    | open                                   | 3.3      | 59.0                                   |
| 1.5      | 442                                    | 5.0      | 32.4                                   |
| 1.8      | 210                                    | 7.5      | 19.6                                   |
| 2.0      | 158                                    | 10       | 14.0                                   |
| 2.5      | 95.3                                   | 12       | 11.3                                   |
| 3.0      | 68.1                                   | 15       | 8.87                                   |

(1)  $R_{FBT} = 100$  k $\Omega$

Selecting an  $R_{FBT}$  value of 100 k $\Omega$  is recommended for most applications. A larger  $R_{FBT}$  consumes less DC current, which is mandatory if light-load efficiency, is critical. However,  $R_{FBT}$  larger than 1 M $\Omega$  is not recommended as the feedback path becomes more susceptible to noise. High feedback resistance generally requires more careful layout of the feedback path. It is important to keep the feedback trace as short as possible while keeping the feedback trace away from the noisy area of the PCB. For more layout recommendations, see Section 10.

### 7.3.2 Input Capacitor Selection

The TPSM265R1 requires a minimum of 1  $\mu\text{F}$  of ceramic type input capacitance. Use only high-quality ceramic type X5R or X7R capacitors with sufficient voltage rating. TI recommends adding additional capacitance for applications with transient load requirements. The voltage rating of input capacitors must be greater than the maximum input voltage. To compensate for the derating of ceramic capacitors, TI recommends a voltage rating of twice the maximum input voltage or placing multiple capacitors in parallel. [Table 7-2](#) includes a preferred list of capacitors by vendor.

**Table 7-2. Recommended Input Capacitors**

| VENDOR <sup>(1)</sup> | TEMPERATURE COEFFICIENT <sup>(3)</sup> | PART NUMBER          | CASE SIZE | CAPACITOR CHARACTERISTICS |                                              |
|-----------------------|----------------------------------------|----------------------|-----------|---------------------------|----------------------------------------------|
|                       |                                        |                      |           | WORKING VOLTAGE (V)       | CAPACITANCE <sup>(2)</sup> ( $\mu\text{F}$ ) |
| Murata                | X7R                                    | GCJ21BR71H105KA01L   | 0805      | 50                        | 1                                            |
| TDK                   | X7R                                    | CGA4J3X7R1H105K125AB | 0805      | 50                        | 1                                            |
| Murata                | X7S                                    | GRJ21BC72A105KE11L   | 0805      | 100                       | 1                                            |
| TDK                   | X7S                                    | CGA4J3X7S2A105K125AB | 0805      | 100                       | 1                                            |
| Murata                | X7S                                    | GCM31CC72A225KE02L   | 1206      | 100                       | 2.2                                          |
| TDK                   | X7S                                    | C3216X7S2A225K160AB  | 1206      | 100                       | 2.2                                          |
| TDK                   | X7R                                    | CGA5L3X7R1H475K160AE | 1206      | 50                        | 4.7                                          |
| Murata                | X7R                                    | GRM31CR71H475KA12L   | 1206      | 50                        | 4.7                                          |

(1) Consult capacitor suppliers regarding availability, material composition, RoHS and lead-free status, and manufacturing process requirements for any capacitors identified in this table.

(2) Specified capacitance values

(3) Maximum ESR at 100 kHz, 25°C

### 7.3.3 Output Capacitor Selection

The minimum amount of required output capacitance for the TPSM265R1 is 10  $\mu\text{F}$  of ceramic type. TI recommends adding additional capacitance for applications with transient load requirements. See [Table 7-3](#) for a preferred list of output capacitors by vendor.

**Table 7-3. Recommended Output Capacitors**

| VENDOR <sup>(1)</sup> | TEMPERATURE COEFFICIENT | PART NUMBER          | CASE SIZE | CAPACITOR CHARACTERISTICS |                                              |
|-----------------------|-------------------------|----------------------|-----------|---------------------------|----------------------------------------------|
|                       |                         |                      |           | VOLTAGE (V)               | CAPACITANCE ( $\mu\text{F}$ ) <sup>(2)</sup> |
| TDK                   | X7R                     | CGA5L1X7R1C106K160AC | 1206      | 16                        | 10                                           |
| Murata                | X7R                     | GCM31CR71C106KA64L   | 1206      | 16                        | 10                                           |
| TDK                   | X7R                     | C3216X7R1E106K160AB  | 1206      | 25                        | 10                                           |
| Murata                | X7S                     | GCJ31CC71E106KA15L   | 1206      | 25                        | 10                                           |
| TDK                   | X5R                     | C3225X5R1C226M       | 1210      | 16                        | 22                                           |
| Murata                | X5R                     | GRM32ER61C226K       | 1210      | 16                        | 22                                           |
| TDK                   | X5R                     | C3216X5R1E226M160AB  | 1206      | 25                        | 22                                           |
| Murata                | X6S                     | GRM31CC81E226K       | 1206      | 25                        | 22                                           |
| Murata                | X7R                     | GRM32ER71E226M       | 1210      | 25                        | 22                                           |
| TDK                   | X5R                     | C3225X5R1A476M       | 1210      | 10                        | 47                                           |
| Murata                | X5R                     | GRM32ER61C476K       | 1210      | 16                        | 47                                           |

(1) Consult capacitor suppliers regarding availability, material composition, RoHS and lead-free status, and manufacturing process requirements for any capacitors identified in [Table 7-3](#).


(2) Specified capacitance values

### 7.3.4 Precision Enable (EN), Undervoltage Lockout (UVLO), and Hysteresis (HYS)


The EN pin provides precision ON and OFF control for the TPSM265R1. Once the EN pin voltage exceeds the threshold voltage, the device starts operation. The simplest way to enable the TPSM265R1 is to connect EN directly to VIN. This allows the TPSM265R1 to start up when VIN is within its valid operating range. An external logic signal can also be used to drive the EN input to toggle the output on and off and for system sequencing or protection.

The TPSM265R1 implements internal undervoltage lockout (UVLO) circuitry on the VIN pin. The device is disabled when the VIN pin voltage is below the internal VIN UVLO threshold. The internal VIN UVLO rising threshold is 2.95 V (max) with a typical hysteresis of 300 mV.

If an application requires a higher UVLO threshold, the EN input supports adjustable UVLO by connecting a resistor divider from VIN to the EN pin. The EN pin connects to an internal comparator referenced to a 1.212-V bandgap voltage with 68-mV hysteresis. However, applications requiring specific power-up and power-down requirements can program the hysteresis voltage independently using the HYS pin. Figure 7-2 shows the resistor divider connection to establish a precision UVLO level with fixed internal hysteresis. Figure 7-3 shows the resistor divider connection used to set the precision UVLO level as well as the adjustable hysteresis.

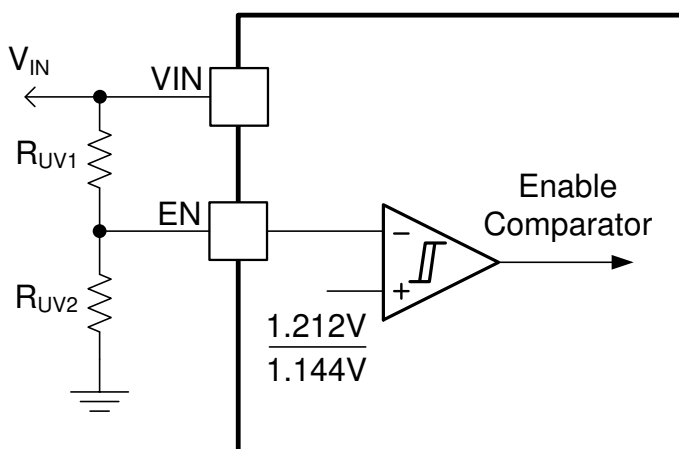

**Figure 7-2. Programmable  $V_{IN}$  UVLO with Fixed Hysteresis**

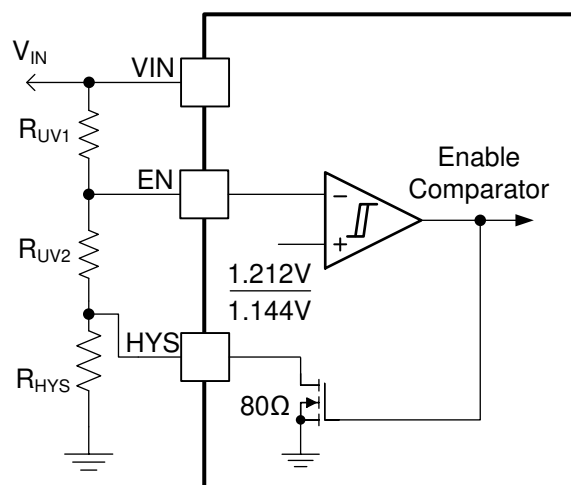

**Figure 7-3. Programmable  $V_{IN}$  UVLO with Adjustable Hysteresis**

Use Equation 2 and Equation 3 to calculate the input UVLO voltages turnon and turnoff voltages, respectively.

$$V_{IN(on)} = 1.212V \cdot \left( 1 + \frac{R_{UV1}}{R_{UV2}} \right) \quad (2)$$

$$V_{IN(off)} = 1.144V \cdot \left( 1 + \frac{R_{UV1}}{R_{UV2} + R_{HYS}} \right) \quad (3)$$

There is also a low  $I_Q$  shutdown mode when EN is pulled below 0.6 V (typ). If EN is below this shutdown threshold, the internal LDO regulator powers off, shutting down the bias currents of the TPSM265R1. The TPSM265R1 operates in standby mode when the EN voltage is between the shutdown and precision enable thresholds.

### 7.3.5 PFM Operation

The TPSM265R1 operates in Pulse Frequency Modulation (PFM) mode. The TPSM265R1 behaves as a hysteretic voltage regulator operating within upper and lower feedback regulation thresholds with typical 10 mV of hysteresis. Figure 7-4 is a representation of the relevant voltage waveforms and inductor current waveform. The TPSM265R1 provides the required switching pulses to recharge the output capacitance, followed by a sleep period where most of the internal circuits are shut off. The load current is supported by the output capacitor during this time, and the TPSM265R1 current consumption approaches the sleep quiescent current of 10.5  $\mu\text{A}$  (typ). The sleep period duration depends on load current and output capacitance.

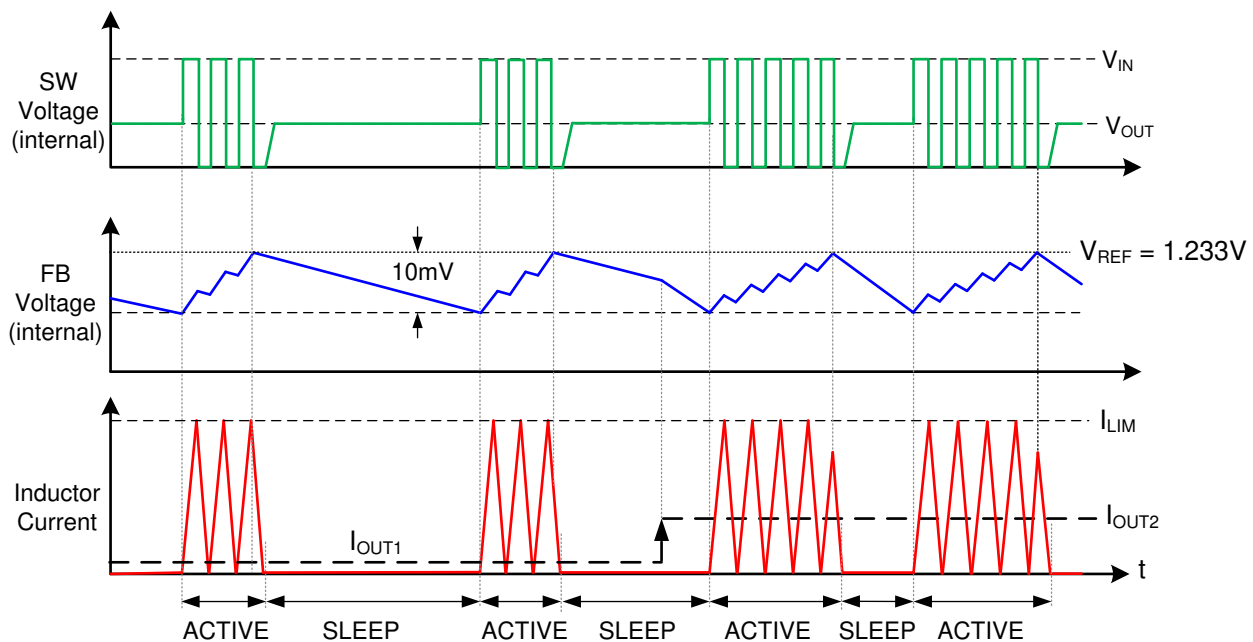


Figure 7-4. PFM Mode SW Node Voltage, Feedback Voltage, and Inductor Current Waveforms

### 7.3.6 Power Good (PGOOD)

The TPSM265R1 provides a PGOOD signal to indicate when the output voltage is within regulation. Use the PGOOD signal for output monitoring, fault protection, or start-up sequencing of downstream converters. PGOOD is an open-drain output that requires a pullup resistor to a DC supply not greater than 12 V. Typical range of pullup resistance is 10 k $\Omega$  to 100 k $\Omega$ . If necessary, use a resistor divider to decrease the voltage from a higher voltage pullup rail.

When the output voltage exceeds 94% of the setpoint, the internal PGOOD switch turns off and PGOOD can be pulled high by the external pullup. If the FB voltage falls below 87% of the setpoint, the internal PGOOD switch turns on, and PGOOD is pulled low to indicate that the output voltage is out of regulation. The rising edge of PGOOD has a built-in deglitch delay of 5  $\mu\text{s}$ .

### 7.3.7 Configurable Soft Start (SS)

The TPSM265R1 has a flexible and easy-to-use soft-start control pin, SS. The soft-start feature prevents inrush current when power is first applied. Soft start is achieved by slowly ramping up the target regulation voltage when the device is powered up or enabled. Selectable and adjustable start-up timing options include minimum delay (no soft start), 900- $\mu\text{s}$  internally fixed soft start, and an externally programmable soft start.

Leaving the SS pin open enables the internal soft-start control ramp with a soft-start interval of 900  $\mu\text{s}$ . The soft-start time can be increased by connecting an external capacitor,  $C_{SS}$ , from SS to GND. Applications with a large amount of output capacitance or higher output voltage can benefit from increasing the soft-start time. Longer soft-start time reduces the supply current needed to charge the output capacitors and supply any output loading. An internal current source,  $I_{SS}$ , of 10  $\mu\text{A}$  charges  $C_{SS}$  and generates a ramp to control the ramp rate of the output voltage. Use Equation 4 to calculate the  $C_{SS}$  capacitance for a desired soft-start time,  $t_{SS}$ .

$$C_{SS} [\text{nF}] = 8.1 \cdot t_{SS} [\text{ms}] \quad (4)$$

$C_{SS}$  is discharged by an internal FET when  $V_{OUT}$  is shut down by EN, UVLO, or thermal shutdown.

It is desirable in some applications for the output voltage to reach its nominal setpoint in the shortest possible time. Connecting a 100-k $\Omega$  resistor from SS to GND disables the soft-start circuit, and the TPSM265R1 operates in current limit during start-up to rapidly charge the output capacitance.

#### 7.3.7.1 Prebiased Start-up

To prevent discharge of a prebiased output voltage, the TPSM265R1 is capable of start-up into prebiased output conditions. When a prebiased voltage is present at start-up, the TPSM265R1 waits until the soft-start ramp voltage is above the prebiased voltage before it begins switching and then follows the soft-start ramp to the regulation setpoint.

#### 7.3.8 Overcurrent Protection (OCP)

The TPSM265R1 is protected from overcurrent conditions using cycle-by-cycle current limiting of the peak inductor current. The current is compared every switching cycle to the current limit threshold. During an overcurrent condition, the output voltage decreases.

#### 7.3.9 Thermal Shutdown

Thermal shutdown is an integrated self-protection used to limit junction temperature and prevent damage related to overheating. Thermal shutdown turns off the device when the junction temperature exceeds 170°C (typ) to prevent further power dissipation and temperature rise. Junction temperature decreases after shutdown, and the TPSM265R1 restarts when the junction temperature falls to 160°C (typ).

### 7.4 Device Functional Modes

#### 7.4.1 Shutdown Mode

The EN pin provides ON and OFF control for the TPSM265R1. When  $V_{EN}$  is below approximately 0.6 V, the device is in shutdown mode. Both the internal LDO and the switching regulator are off. The quiescent current in shutdown mode drops to 4.6  $\mu\text{A}$  at  $V_{IN} = 12\text{ V}$ . The TPSM265R1 also employs internal bias rail undervoltage protection. If the internal bias supply voltage is below its UV threshold, the regulator remains off.

#### 7.4.2 Standby Mode

The internal bias rail LDO has a lower enable threshold than the regulator itself. When  $V_{EN}$  is above 0.6 V and below the precision enable threshold (1.212 V typically), the internal LDO is on and regulating. The precision enable circuitry is turned on once the internal  $V_{CC}$  is above its UV threshold. The switching action and voltage regulation are not enabled until  $V_{EN}$  rises above the precision enable threshold.

#### 7.4.3 Active Mode

The TPSM265R1 is in active mode when  $V_{EN}$  and the internal bias rail are above their relevant thresholds, FB has fallen below the lower hysteresis level, and boundary conduction mode is recharging the output capacitor to the upper hysteresis level. There is a 4- $\mu\text{s}$  wake-up delay from sleep to active states.

#### 7.4.4 Sleep Mode

The TPSM265R1 is in sleep mode when  $V_{EN}$  and the internal bias rail are above the relevant threshold levels,  $V_{FB}$  has exceeded the upper hysteresis level, and the output capacitor is sourcing the load current. In sleep mode, the TPSM265R1 operates with very low quiescent current.

## 8 Applications and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The TPSM265R1 only requires a few external components to convert from a wide range of supply voltages to a fixed output voltage. To expedite and streamline the process of designing of a TPSM265R1, WEBENCH® online software is available to generate complete designs, leveraging iterative design procedures and access to comprehensive component databases. The following section describes the design procedure to configure the TPSM265R1 power module.

As mentioned previously, the TPSM265R1 also integrates several optional features to meet system design requirements, including precision enable, UVLO, programmable soft start, and PGOOD indicator. The application circuit detailed below shows TPSM265R1 configuration options suitable for several application use cases. Refer to the [TPSM265R1EVM User's Guide](#) for more detail.

### 8.2 Typical Applications

Figure 8-1 shows the schematic diagram of a 5-V, 100-mA converter.

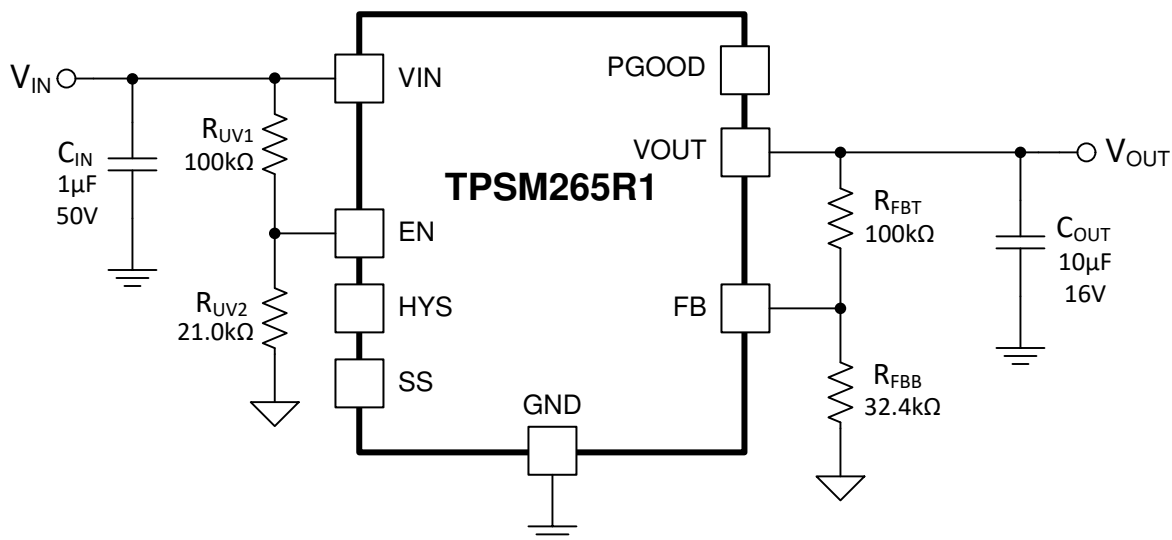


Figure 8-1. TPSM265R1 Typical Schematic

#### 8.2.1 Design Requirements

For this design example, use the parameters listed in [Table 8-1](#) as the input parameters and follow the design procedures in the [Section 8.2.2](#).

Table 8-1. Design Example Parameters

| DESIGN PARAMETER         | VALUE                 |
|--------------------------|-----------------------|
| Input voltage $V_{IN}$   | 24 V typical          |
| Output voltage $V_{OUT}$ | 5 V                   |
| Output current rating    | 100 mA (50 $\Omega$ ) |

## 8.2.2 Detailed Design Procedure

### 8.2.2.1 Custom Design With WEBENCH® Tools

[Click here](#) to create a custom design using the TPSM265R1 device with the WEBENCH® Power Designer.

1. Start by entering the input voltage ( $V_{IN}$ ), output voltage ( $V_{OUT}$ ), and output current ( $I_{OUT}$ ) requirements.
2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance.
- Run thermal simulations to understand board thermal performance.
- Export customized schematic and layout into popular CAD formats.
- Print PDF reports for the design, and share the design with colleagues.

Get more information about WEBENCH tools at [www.ti.com/WEBENCH](http://www.ti.com/WEBENCH).

### 8.2.2.2 Output Voltage Setpoint

The output voltage of the TPSM265R1 device is externally adjustable using a resistor divider. The recommended value of  $R_{FBT}$  is 100 kΩ. The value for  $R_{FBB}$  can be selected from [Table 7-1](#) or calculated using [Equation 5](#):

$$R_{FBB} = \frac{1.223}{V_{OUT} - 1.223} \times R_{FBT} \quad (5)$$

For the desired output voltage of 5 V, the formula yields a value of 32.38 kΩ. Choose the closest available standard value of 32.4 kΩ for  $R_{FBB}$ .

### 8.2.2.3 Input Capacitors

The TPSM265R1 requires a minimum input capacitance of 1-μF ceramic type. High-quality ceramic type X5R or X7R capacitors with sufficient voltage rating are recommended. The voltage rating of input capacitors must be greater than the maximum input voltage.

For this design, a single, 1-μF, 50-V ceramic capacitor is selected.

### 8.2.2.4 Output Capacitor Selection

The TPSM265R1 requires a minimum of 10 μF of ceramic output capacitance for proper operation. Additional output capacitance can be added to reduce ripple voltage or for applications with transient load requirements.

For this design example, a single 10-μF, 16-V, ceramic capacitor is used.

### 8.2.2.5 UVLO Programming

Applications requiring a higher UVLO threshold can benefit from applying a resistor divider on the EN pin. The values for the resistors can be calculated using [Equation 6](#) and [Equation 7](#).

$$V_{IN(on)} = 1.212V \cdot \left( 1 + \frac{R_{UV1}}{R_{UV2}} \right) \quad (6)$$

$$V_{IN(off)} = 1.144V \cdot \left( 1 + \frac{R_{UV1}}{R_{UV2} + R_{HYS}} \right) \quad (7)$$


For this application, the UVLO was raised to 7 V ( $R_{UV1} = 100$  kΩ,  $R_{UV2} = 21.0$  kΩ, and  $R_{HYS} = 0$  (not used)).

### 8.2.2.6 Soft-Start Capacitor – $C_{SS}$

In this application, the SS pin was left open, resulting in a 900  $\mu$ s soft-start rise time. Applications requiring a longer soft-start time can calculate the soft-start capacitor value using [Equation 8](#):


$$C_{SS} [\text{nF}] = 8.1 \cdot t_{SS} [\text{ms}] \quad (8)$$

### 8.2.3 Application Curves

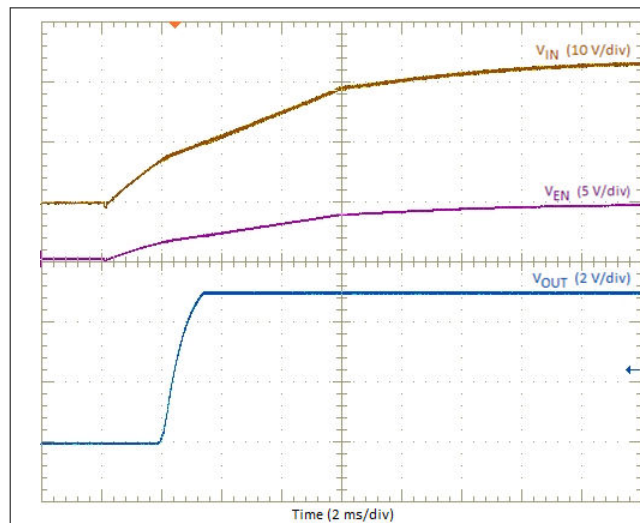

$V_{IN} = 24 \text{ V}$        $V_{OUT} = 5 \text{ V}$        $R_{LOAD} = 50 \Omega$   
 $R_{UV1} = 100 \text{ k}\Omega$      $R_{UV2} = 21.0 \text{ k}\Omega$

**Figure 8-2. Start-up Waveforms**

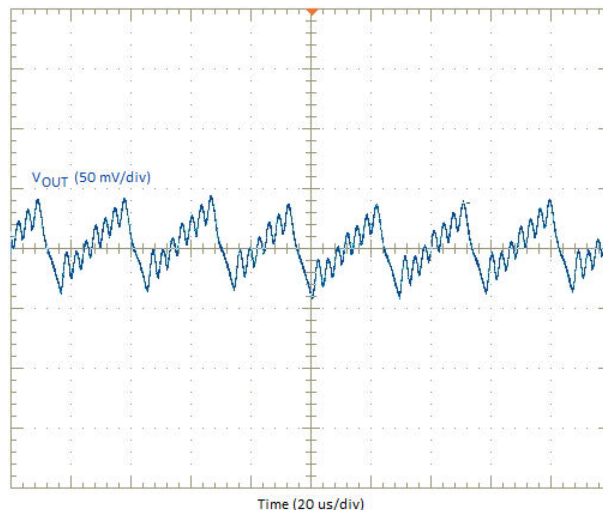

$V_{IN} = 24 \text{ V}$        $V_{OUT} = 5 \text{ V}$        $C_{OUT} = 10 \mu\text{F}$   
 $R_{LOAD} = 50 \Omega$

**Figure 8-3. Output Voltage Ripple**

## 9 Power Supply Recommendations

The TPSM265R1 is designed to operate from an input voltage supply range between 3 V and 65 V. This input supply must be able to provide the maximum input current and maintain a voltage above the set UVLO voltage. Ensure that the resistance of the input supply rail is low enough that an input current transient does not cause a high enough drop at the TPSM265R1 supply rail to cause a false UVLO fault triggering and system reset. If the input supply is located more than a few inches from the TPSM265R1, additional bulk capacitance can be required in addition to the ceramic input capacitance. A 4.7- $\mu$ F electrolytic capacitor is a typical choice for this function, whereby the capacitor ESR provides a level of damping against input filter resonances. A typical ESR of 0.5  $\Omega$  provides enough damping for most input circuit configurations.

## 10 Layout

The performance of any switching power supply depends as much upon the layout of the PCB as the component selection. Use the following guidelines to design a PCB with the best power conversion performance, optimal thermal performance, and minimal generation of unwanted EMI.

### 10.1 Layout Guidelines

To achieve optimal electrical and thermal performance, an optimized PCB layout is required. [Figure 10-1](#) and [Figure 10-2](#) show a typical PCB layout. Some considerations for an optimized layout are:

- Use large copper areas for power planes (VIN, VOUT, and GND) to minimize conduction loss and thermal stress.
- **Connect all GND pins together using copper plane or thick copper traces.**
- Place ceramic input and output capacitors close to the device pins to minimize high frequency noise.
- Locate additional output capacitors between the ceramic capacitor and the load.
- Place  $R_{FBT}$  and  $R_{FBB}$  as close as possible to their respective pins.
- Use multiple vias to connect the power planes to internal layers.

### 10.2 Layout Example

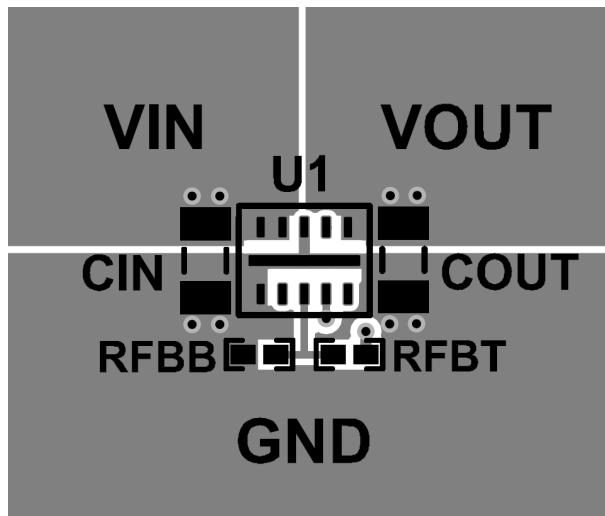


Figure 10-1. Typical Top-Layer Layout

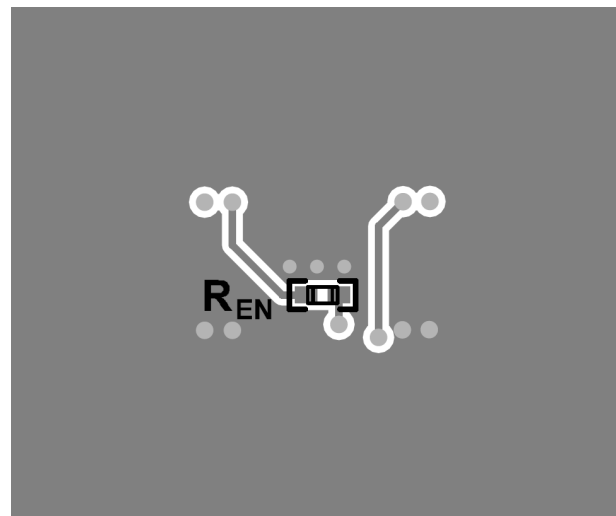


Figure 10-2. Typical Bottom-Layer Layout

### 10.2.1 Theta JA versus PCB Area

The amount of PCB copper affects the thermal performance of the device. Figure 10-3 shows the effects of copper area on the junction-to-ambient thermal resistance ( $R_{\theta JA}$ ) of the TPSM265R1. The junction-to-ambient thermal resistance is plotted for a 4-layer PCB with an area from 0.5 cm<sup>2</sup> to 39 cm<sup>2</sup>.

To determine the required copper area for an application:

1. Determine the maximum power dissipation of the device in the application by referencing the power dissipation graphs in [Section 6.6](#) to [Section 6.10](#).
2. Calculate the maximum  $\theta_{JA}$  using [Equation 9](#) and the maximum ambient temperature of the application.

$$\theta_{JA} = \frac{(125^{\circ}\text{C} - T_{A(\text{max})})}{P_{D(\text{max})}} \quad (^{\circ}\text{C}/\text{W}) \quad (9)$$

3. Reference [Figure 10-3](#) to determine the minimum required PCB area for the application conditions.

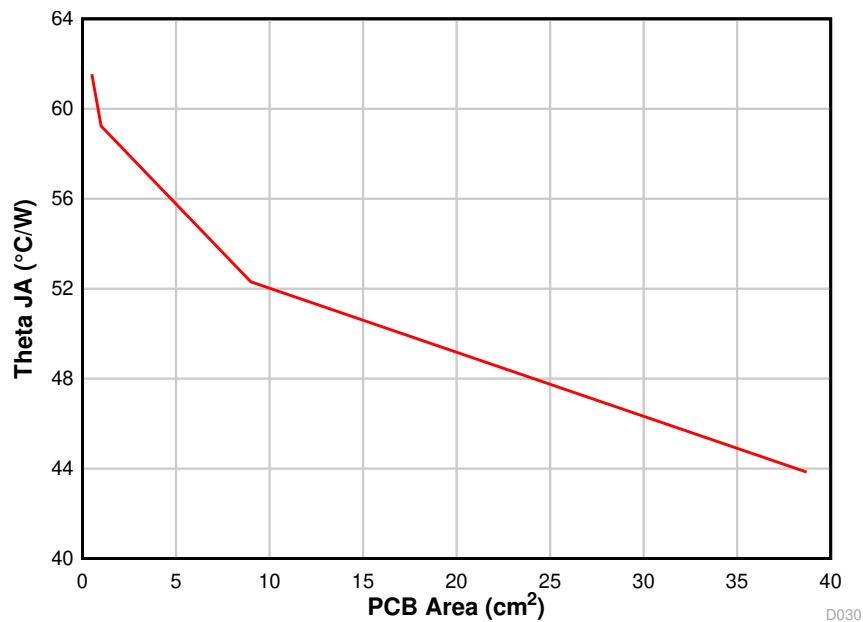


Figure 10-3.  $\theta_{JA}$  versus PCB Area

### 10.2.2 Package Specifications


Table 10-1. Package Specifications Table

| TPSM265R1                   |                                                                             | VALUE | UNIT |
|-----------------------------|-----------------------------------------------------------------------------|-------|------|
| Weight                      |                                                                             | 37.7  | mg   |
| Flammability                | Meets UL 94 V-O                                                             |       |      |
| MTBF Calculated Reliability | Per Bellcore TR-332, 50% stress, $T_A = 40^{\circ}\text{C}$ , ground benign | 139   | MHrs |


### 10.2.3 EMI

The TPSM265R1 is compliant with EN55011 radiated emissions. Figure 10-4, Figure 10-5, and Figure 10-6 show typical examples of radiated emission plots for the TPSM265R1. The graphs include the plots of the antenna in the horizontal and vertical positions.


EMI plots were measured using the standard TPSM265R1EVM with no input filter.

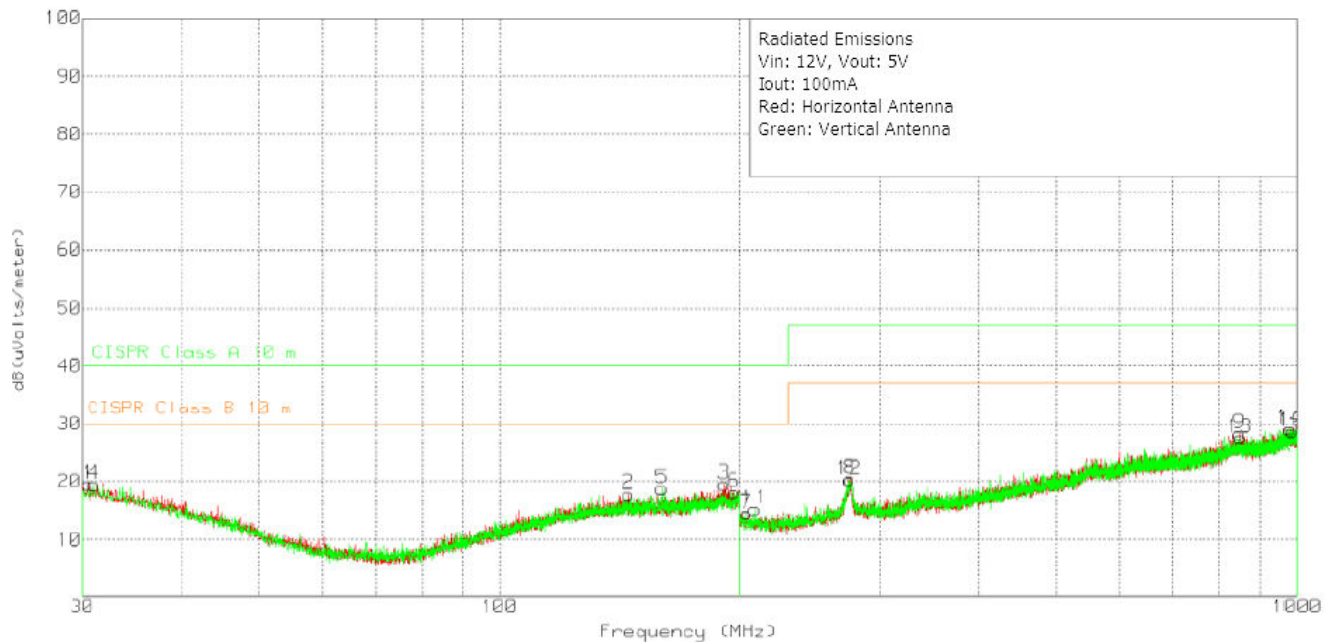

**Figure 10-4. Radiated Emissions 12-V Input, 5-V Output, 100-mA Load**

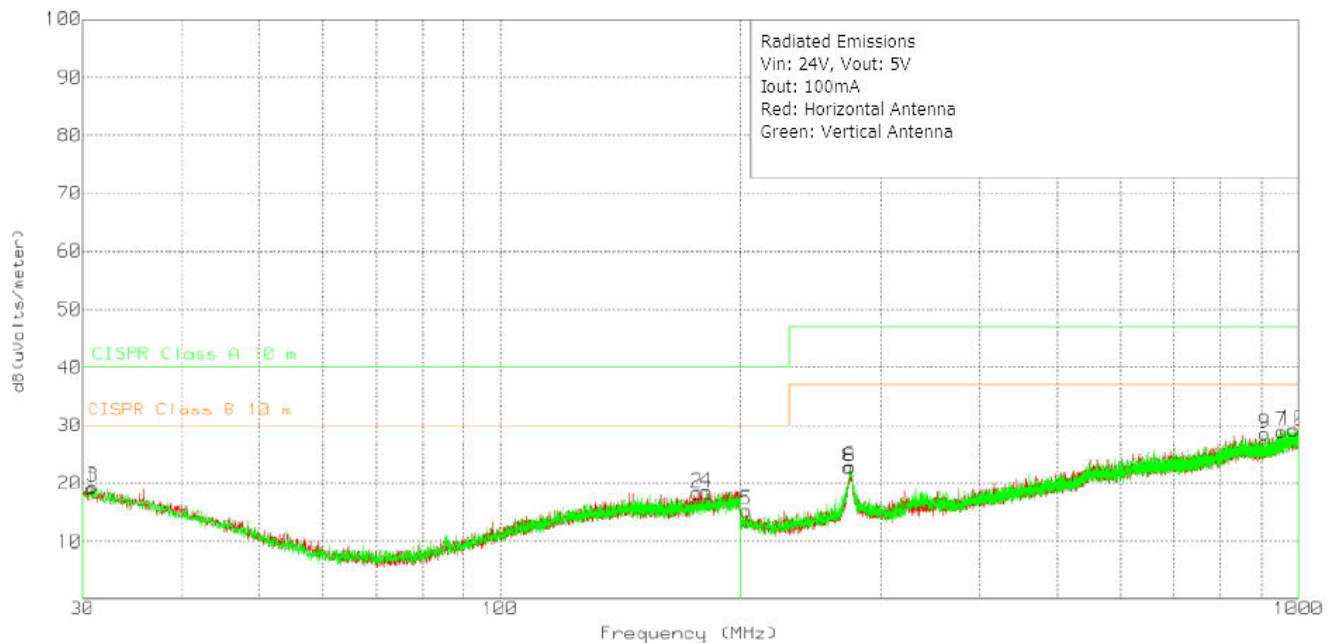

**Figure 10-5. Radiated Emissions 24-V Input, 5-V Output, 100-mA Load**

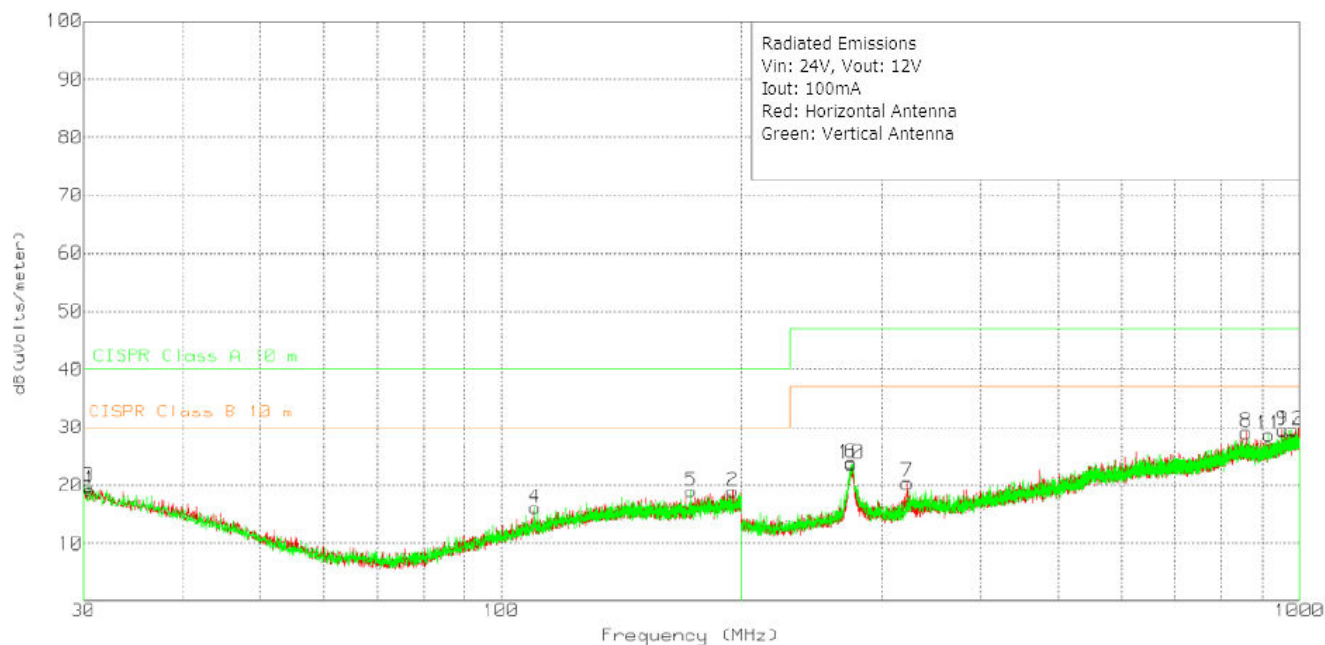

**Figure 10-6. Radiated Emissions 24-V Input, 12-V Output, 100-mA Load**

## 11 Device and Documentation Support

### 11.1 Device Support

#### 11.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

#### 11.1.2 Development Support

For development support, see the following:

- For TI's reference design library, visit [TI reference designs](#).
- For TI's WEBENCH Design Environment, visit the [WEBENCH® Design Center](#).
- To view a related device of this product, see the [LM5166](#).

#### 11.1.3 Custom Design With WEBENCH® Tools

[Click here](#) to create a custom design using the TPSM265R1 device with WEBENCH® Power Designer.

1. Start by entering the input voltage ( $V_{IN}$ ), output voltage ( $V_{OUT}$ ), and output current ( $I_{OUT}$ ) requirements.
2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance.
- Run thermal simulations to understand board thermal performance.
- Export customized schematic and layout into popular CAD formats.
- Print PDF reports for the design, and share the design with colleagues.

Get more information about WEBENCH tools at [www.ti.com/WEBENCH](http://www.ti.com/WEBENCH).

### 11.2 Documentation Support

#### 11.2.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [TPSM265R1EVM User's Guide](#)
- Texas Instruments, [Using the TPSM265R1 in an Inverting Buck-Boost Topology Application Report](#)
- Texas Instruments, [Using New Thermal Metrics Application Report](#)
- Texas Instruments, [Semiconductor and IC Package Thermal Metrics Application Report](#)

#### 11.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 11.4 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

## 11.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.  
WEBENCH® are registered trademarks of Texas Instruments.  
is a registered trademark of Texas Instruments.  
All trademarks are the property of their respective owners.

## 11.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.


ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 11.7 Glossary


[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this datasheet, refer to the left-hand navigation.

**SIL0010C****PACKAGE OUTLINE****uSIP™ - 1.9 mm max height**

MICRO SYSTEM IN PACKAGE

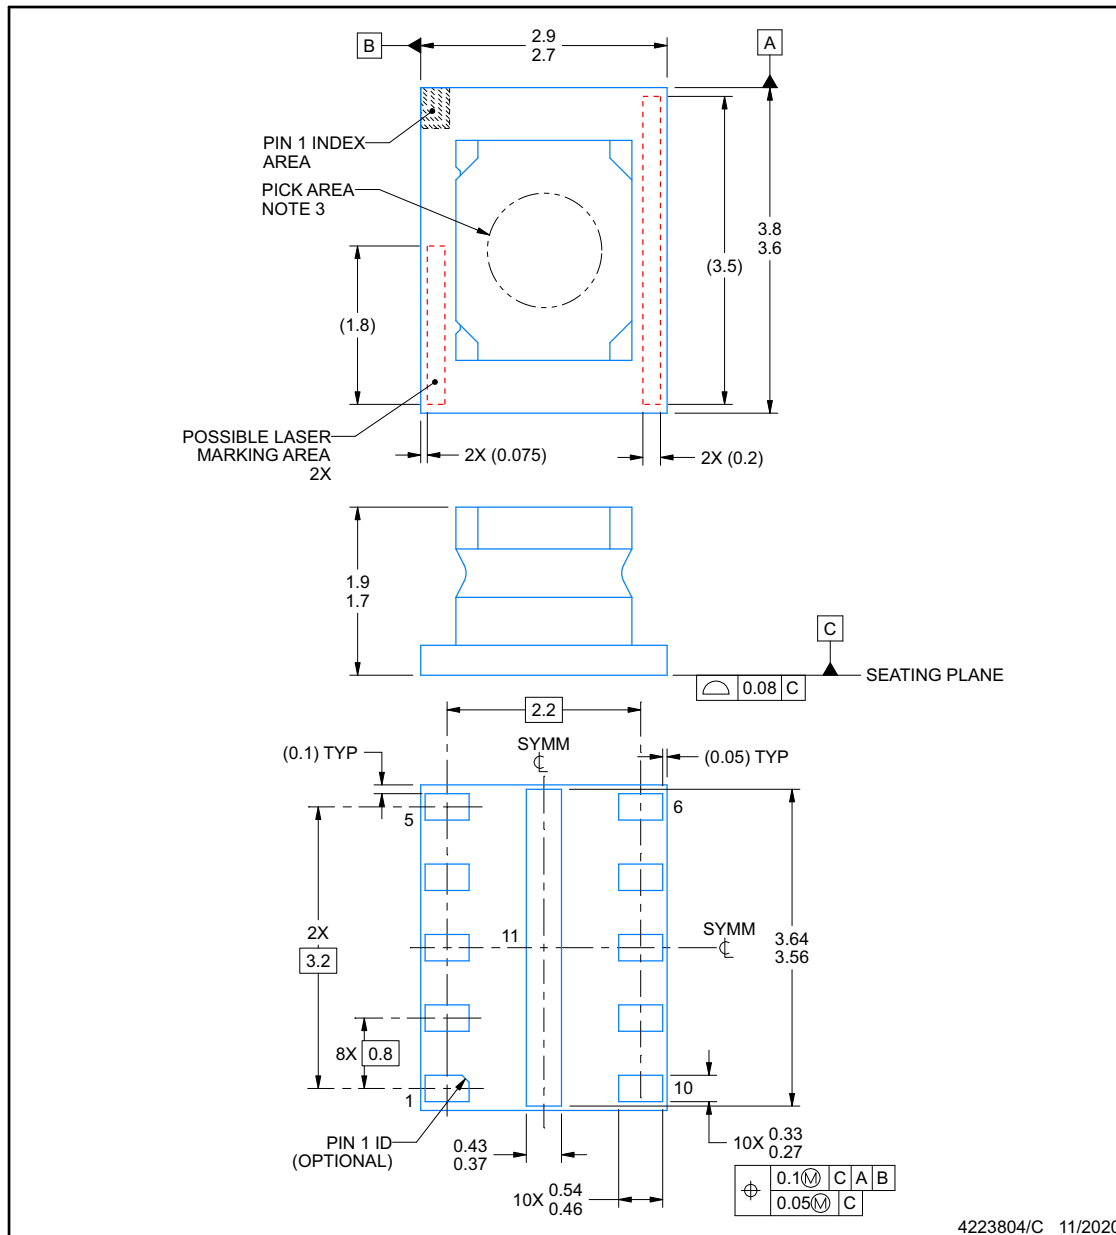**NOTES:**

MicroSiP is a trademark of Texas Instruments


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Pick and place nozzle  $\varnothing$  1.3 mm or smaller recommended.
4. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

## EXAMPLE BOARD LAYOUT

**SIL0010C**

## uSIP™ - 1.9 mm max height

MICRO SYSTEM IN PACKAGE

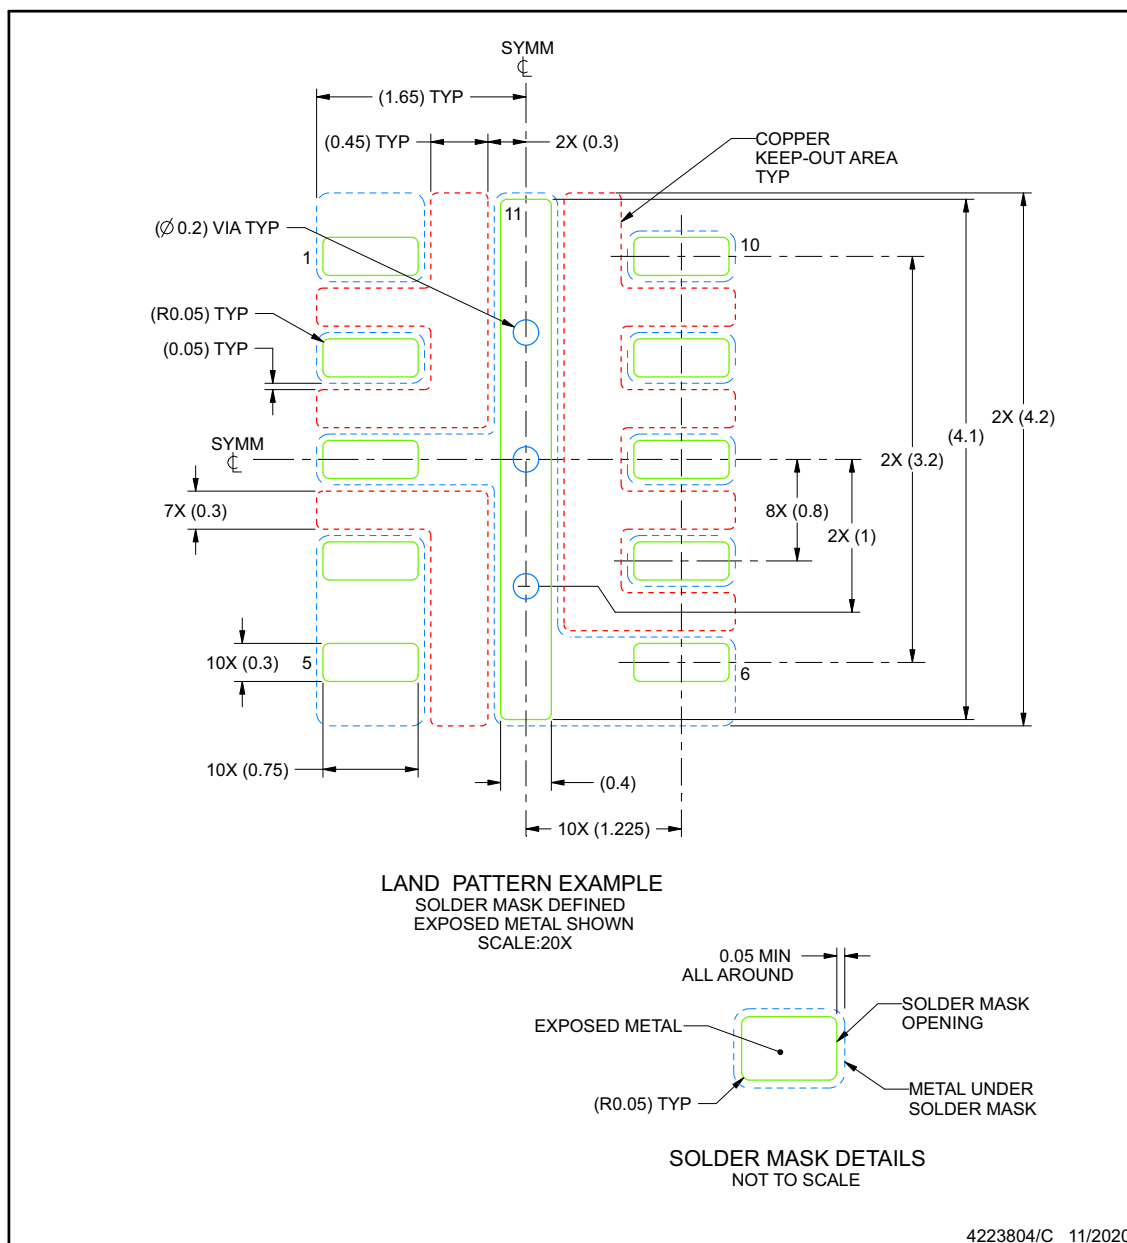


NOTES: (continued)

5. This package is designed to be soldered to thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sl原因271](http://www.ti.com/lit/sl原因271)).
6. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

**EXAMPLE STENCIL DESIGN****SIL0010C****uSIP™ - 1.9 mm max height**

MICRO SYSTEM IN PACKAGE

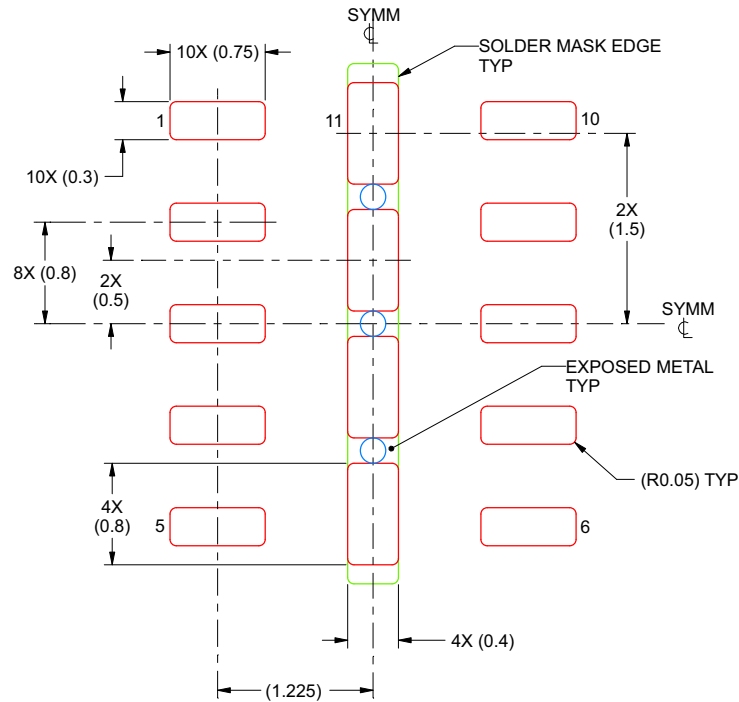

**SOLDER PASTE EXAMPLE**  
 BASED ON 0.125 mm THICK STENCIL  
 78% SOLDER COVERAGE BY PRINTED  
 AREA ON CENTER THERMAL PAD  
 SCALE:20X

4223804/C 11/2020

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPSM265R1SILR</a>   | Active        | Production           | uSiP (SIL)   10 | 3000   LARGE T&R      | Yes         | NIAU                                 | Level-3-260C-168 HR               | -40 to 125   | TPSM265R1           |
| TPSM265R1SILR.A                 | Active        | Production           | uSiP (SIL)   10 | 3000   LARGE T&R      | Yes         | NIAU                                 | Level-3-260C-168 HR               | -40 to 125   | TPSM265R1           |
| <a href="#">TPSM265R1V3SILR</a> | Active        | Production           | uSiP (SIL)   10 | 3000   LARGE T&R      | Yes         | NIAU                                 | Level-3-260C-168 HR               | -40 to 125   | TPSM265R1V3         |
| TPSM265R1V3SILR.A               | Active        | Production           | uSiP (SIL)   10 | 3000   LARGE T&R      | Yes         | NIAU                                 | Level-3-260C-168 HR               | -40 to 125   | TPSM265R1V3         |
| <a href="#">TPSM265R1V5SILR</a> | Active        | Production           | uSiP (SIL)   10 | 3000   LARGE T&R      | Yes         | NIAU                                 | Level-3-260C-168 HR               | -40 to 125   | TPSM265R1V5         |
| TPSM265R1V5SILR.A               | Active        | Production           | uSiP (SIL)   10 | 3000   LARGE T&R      | Yes         | NIAU                                 | Level-3-260C-168 HR               | -40 to 125   | TPSM265R1V5         |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPSM265R1SILR   | uSiP         | SIL             | 10   | 3000 | 330.0              | 12.4               | 3.15    | 4.05    | 2.15    | 8.0     | 12.0   | Q1            |
| TPSM265R1V3SILR | uSiP         | SIL             | 10   | 3000 | 330.0              | 12.4               | 3.15    | 4.05    | 2.15    | 8.0     | 12.0   | Q1            |
| TPSM265R1V5SILR | uSiP         | SIL             | 10   | 3000 | 330.0              | 12.4               | 3.15    | 4.05    | 2.15    | 8.0     | 12.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPSM265R1SILR   | uSiP         | SIL             | 10   | 3000 | 383.0       | 353.0      | 58.0        |
| TPSM265R1V3SILR | uSiP         | SIL             | 10   | 3000 | 383.0       | 353.0      | 58.0        |
| TPSM265R1V5SILR | uSiP         | SIL             | 10   | 3000 | 383.0       | 353.0      | 58.0        |

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

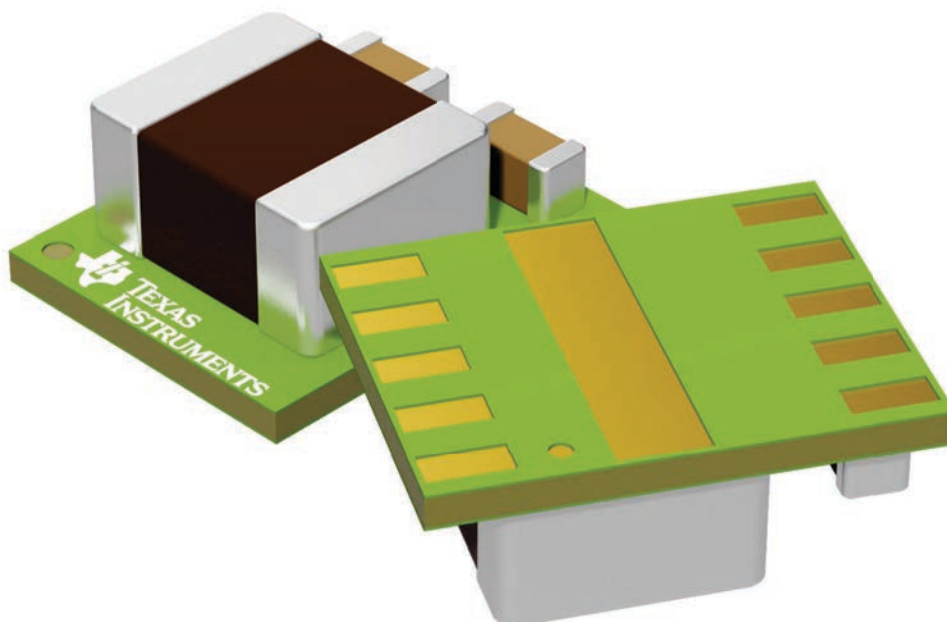

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025