

LM118JAN Operational Amplifier

Check for Samples: [LM118JAN](#)

FEATURES

- 15 MHz Small Signal Bandwidth
- Ensured 50V/μs Slew Rate
- Maximum Bias Current of 250 nA
- Operates from Supplies of ±5V to ±20V
- Internal Frequency Compensation
- Input and Output Overload Protected
- Pin Compatible with General Purpose Op Amps


DESCRIPTION

The LM118 is a precision high speed operational amplifier designed for applications requiring wide bandwidth and high slew rate. It features a factor of ten increase in speed over general purpose devices without sacrificing DC performance.

The LM118 has internal unity gain frequency compensation. This considerably simplifies its application since no external components are necessary for operation. However, unlike most internally compensated amplifiers, external frequency compensation may be added for optimum performance. For inverting applications, feed forward compensation will boost the slew rate to over 150V/μs and almost double the bandwidth. Overcompensation can be used with the amplifier for greater stability when maximum bandwidth is not needed. Further, a single capacitor can be added to reduce the 0.1% settling time to under 1 μs.

The high speed and fast settling time of this op amp makes it useful in A/D converters, oscillators, active filters, sample and hold circuits, or general purpose amplifiers. This device is easy to apply and offers an order of magnitude better AC performance than industry standards such as the LM709.

Fast Voltage Follower

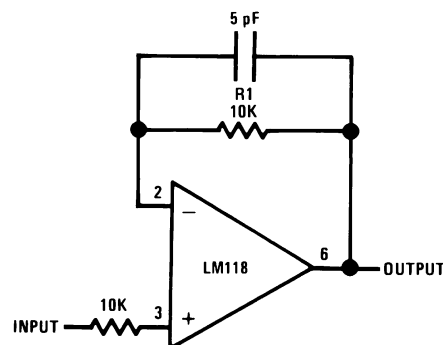

Do not hard-wire as voltage follower ($R1 \geq 5 \text{ k}\Omega$)




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2005–2013, Texas Instruments Incorporated

Connection Diagram

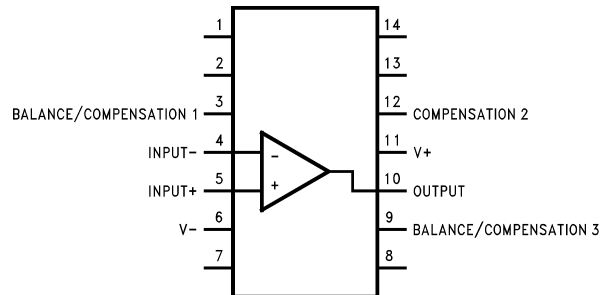


**Figure 1. CDIP Package
Top View**
See Package Number J0014A

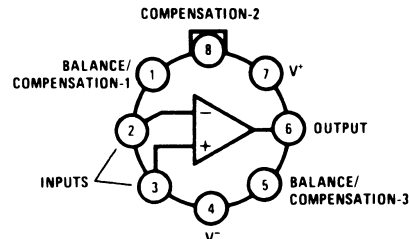


Pin connections shown on schematic diagram and typical applications are for TO-5 package.

**Figure 2. TO Package
Top View**
See Package Number LMC0008C

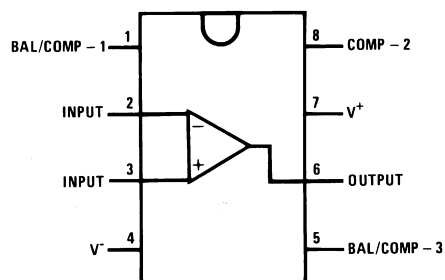


**Figure 3. CDIP Package
Top View**
See Package Number NAB0008A

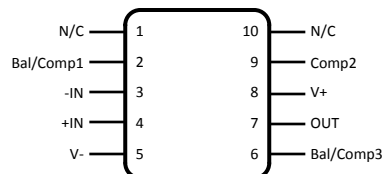

**Figure 4. CLGA Package
Top View**
See Package Number NAD0010A

Schematic Diagram

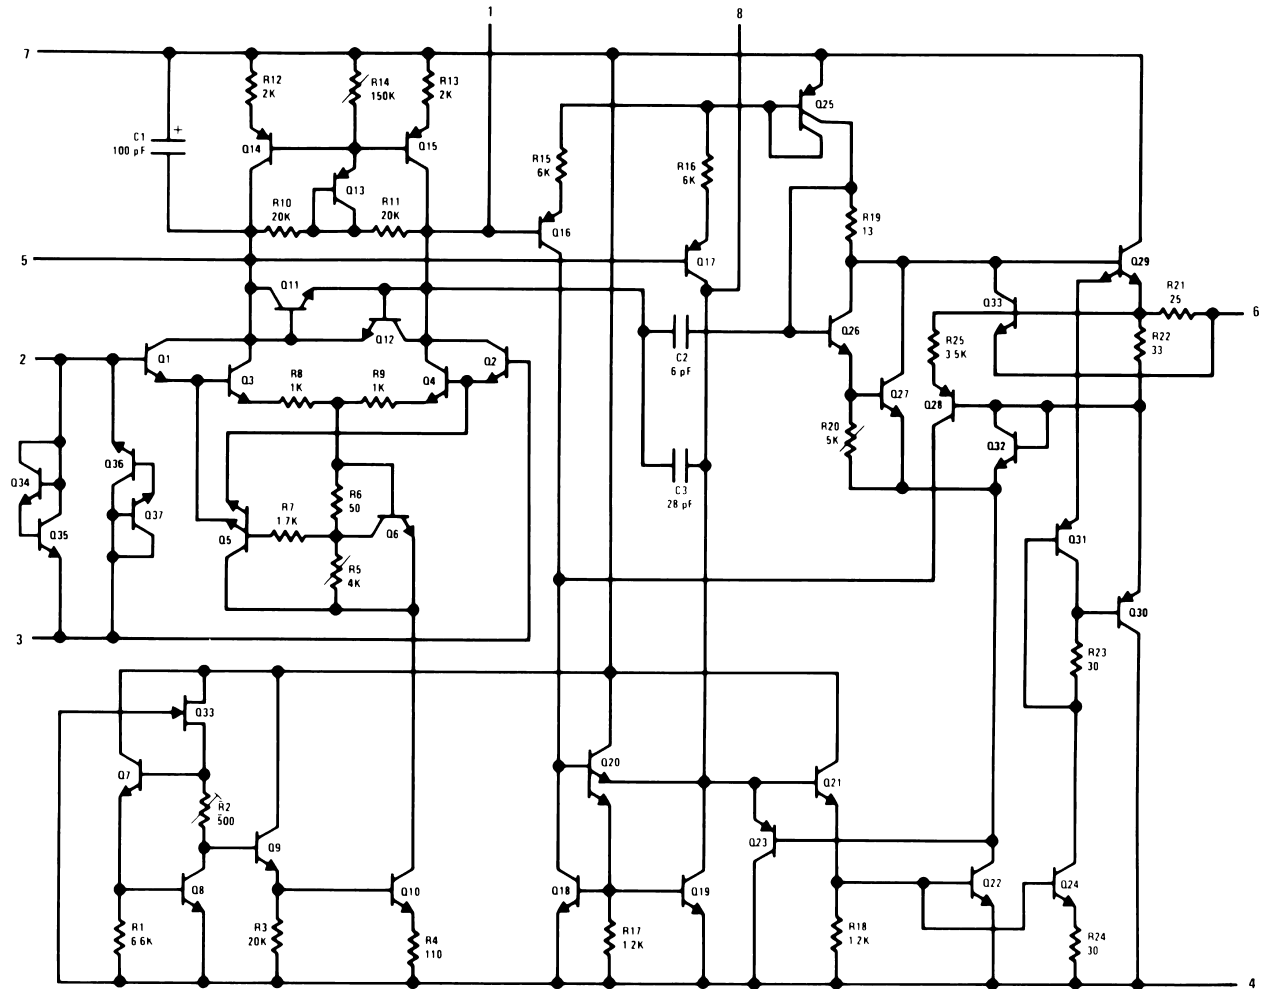

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings⁽¹⁾

Supply Voltage			±20V
Power Dissipation ⁽²⁾		8 LD TO	750mW
		8LD CDIP	1000mW
		14LD CDIP	1250mW
		10LD CLGA	600mW
Differential Input Current ⁽³⁾			±10 mA
Input Voltage ⁽⁴⁾			±15V
Output Short-Circuit Duration			Continuous
Operating Temperature Range			-55°C ≤ T _A ≤ +125°C
Thermal Resistance	θ _{JA}	8 LD TO (Still Air @ 0.5W)	160°C/W
		8 LD TO (500LF / Min Air flow @ 0.5W)	86°C/W
		8LD CDIP (Still Air @ 0.5W)	120°C/W
		8LD CDIP (500LF / Min Air flow @ 0.5W)	66°C/W
		14LD CDIP (Still Air @ 0.5W)	87°C/W
		14LD CDIP (500LF / Min Air flow @ 0.5W)	51°C/W
		10LD CLGA (Still Air @ 0.5W)	198°C/W
		10LD CLGA (500LF / Min Air flow @ 0.5W)	124°C/W
	θ _{JC}	8 LD TO	48°C/W
		8LD CDIP	17°C/W
		14LD CDIP	17°C/W
		10LD CLGA	22°C/W
Storage Temperature Range			-65°C ≤ T _A ≤ +150°C
Lead Temperature (Soldering, 10 seconds)			300°C
ESD Tolerance ⁽⁵⁾			2000V

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. For ensured specifications and test conditions, see the Electrical Characteristics. The ensured specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.
- (2) The maximum power dissipation must be derated at elevated temperatures and is dictated by T_{Jmax} (maximum junction temperature), θ_{JA} (package junction to ambient thermal resistance), and T_A (ambient temperature). The maximum allowable power dissipation at any temperature is P_{Dmax} = (T_{Jmax} - T_A)/θ_{JA} or the number given in the Absolute Maximum Ratings, whichever is lower.
- (3) The inputs are shunted with back-to-back diodes for over voltage protection. Therefore, excessive current will flow if a differential input voltage in excess of 1V is applied between the inputs unless some limiting resistance is used.
- (4) For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.
- (5) Human body model, 1.5 kΩ in series with 100 pF.

Quality Conformance Inspection

Mil-Std-883, Method 5005; Group A

Subgroup	Description	Temp°C
1	Static tests at	25
2	Static tests at	125
3	Static tests at	-55
4	Dynamic tests at	25
5	Dynamic tests at	125
6	Dynamic tests at	-55
7	Functional tests at	25
8A	Functional tests at	125
8B	Functional tests at	-55
9	Switching tests at	25
10	Switching tests at	125
11	Switching tests at	-55
12	Settling time at	25
13	Settling time at	125
14	Settling time at	-55

LM118JAN Electrical Characteristics DC Parameters

The following conditions apply to all the following parameters, unless otherwise specified.

DC: $V_{CC} = \pm 20V$

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
V_{IO}	Input Offset Voltage	$+V_{CC} = 35V, -V_{CC} = -5V, V_{CM} = -15V$		-4.0	4.0	mV	1
				-6.0	6.0	mV	2, 3
		$+V_{CC} = 5V, -V_{CC} = -35V, V_{CM} = 15V$		-4.0	4.0	mV	1
				-6.0	6.0	mV	2, 3
		$V_{CM} = 0V$		-4.0	4.0	mV	1
				-6.0	6.0	mV	2, 3
I_{IO}	Input Offset Current	$+V_{CC} = 35V, -V_{CC} = -5V, V_{CM} = -15V, R_S = 100K\Omega$	See ⁽¹⁾	-40	40	nA	1
			See ⁽¹⁾	-80	80	nA	2, 3
		$+V_{CC} = 5V, -V_{CC} = -35V, V_{CM} = 15V, R_S = 100K\Omega$	See ⁽¹⁾	-40	40	nA	1
			See ⁽¹⁾	-80	80	nA	2, 3
		$V_{CM} = 0V, R_S = 100K\Omega$	See ⁽¹⁾	-40	40	nA	1
			See ⁽¹⁾	-80	80	nA	2, 3
$\pm I_{IB}$	Input Bias Current	$+V_{CC} = 35V, -V_{CC} = -5V, V_{CM} = -15V, R_S = 100K\Omega$	See ⁽¹⁾	1.0	250	nA	1, 2
			See ⁽¹⁾	1.0	400	nA	3
		$+V_{CC} = 5V, -V_{CC} = -35V, V_{CM} = 15V, R_S = 100K\Omega$	See ⁽¹⁾	1.0	250	nA	1, 2
			See ⁽¹⁾	1.0	400	nA	3
		$V_{CM} = 0V, R_S = 100K\Omega$	See ⁽¹⁾	1.0	250	nA	1, 2
			See ⁽¹⁾	1.0	400	nA	3
		$+V_{CC} = 5V, -V_{CC} = -5V, V_{CM} = 0V, R_S = 100K\Omega$	See ⁽¹⁾	1.0	250	nA	1, 2
			See ⁽¹⁾	1.0	400	nA	3

(1) Slash Sheet: $R_S = 20K\Omega$, tested with $R_S = 100K\Omega$ for better resolution.

LM118JAN Electrical Characteristics DC Parameters (continued)

The following conditions apply to all the following parameters, unless otherwise specified.

DC: $V_{CC} = \pm 20V$

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
+PSRR	Power Supply Rejection Ratio	$+V_{CC} = 10V, -V_{CC} = -20V$		-100	100	$\mu V/V$	1
				-150	150	$\mu V/V$	2, 3
-PSRR	Power Supply Rejection Ratio	$+V_{CC} = 20V, -V_{CC} = -10V$		-100	100	$\mu V/V$	1
				-150	150	$\mu V/V$	2, 3
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 15V,$ $V_{CC} = \pm 35V$ to $\pm 5V$		80		dB	1, 2, 3
+ V_{IO} adj.	Offset Null			7.0		mV	1, 2, 3
- V_{IO} adj.	Offset Null				-7.0	mV	1, 2, 3
Delta V_{IO} / Delta T	Temperature Coefficient of Input Offset Voltage	$25^{\circ}C \leq T_A \leq 125^{\circ}C$	See ⁽²⁾	-50	50	$\mu V/^{\circ}C$	2
		$-55^{\circ}C \leq T_A \leq 25^{\circ}C$	See ⁽²⁾	-50	50	$\mu V/^{\circ}C$	3
Delta I_{IO} / Delta T	Temperature Coefficient of Input Offset Current	$25^{\circ}C \leq T_A \leq 125^{\circ}C$	See ⁽²⁾	-1000	1000	$pA/^{\circ}C$	2
		$-55^{\circ}C \leq T_A \leq 25^{\circ}C$	See ⁽²⁾	-1000	1000	$pA/^{\circ}C$	3
+ I_{OS}	Short Circuit Current	$+V_{CC} = 15V, -V_{CC} = -15V,$ $t \leq 25mS, V_{CM} = -15V$		-65		mA	1, 2, 3
- I_{OS}	Short Circuit Current	$+V_{CC} = 15V, -V_{CC} = -15V,$ $t \leq 25mS, V_{CM} = 15V$			65	mA	1, 2
					80	mA	3
I_{CC}	Power Supply Current	$+V_{CC} = 15V, -V_{CC} = -15V$			8.0	mA	1
					7.0	mA	2
					9.0	mA	3
+ V_{Opp}	Output Voltage Swing	$R_L = 10K\Omega, V_{CM} = -20V$		17		V	4, 5, 6
		$R_L = 2K\Omega, V_{CM} = -20V$		16		V	4, 5, 6
- V_{Opp}	Output Voltage Swing	$R_L = 10K\Omega, V_{CM} = 20V$			-17	V	4, 5, 6
		$R_L = 2K\Omega, V_{CM} = 20V$			-16	V	4, 5, 6
+ A_{VS}	Open Loop Voltage Gain	$V_O = 15V, R_L = 2K\Omega$	See ⁽³⁾	50		V/mV	4
			See ⁽³⁾	32		V/mV	5, 6
		$V_O = 15V, R_L = 10K\Omega$	See ⁽³⁾	50		V/mV	4
			See ⁽³⁾	32		V/mV	5, 6
- A_{VS}	Open Loop Voltage Gain	$V_O = -15V, R_L = 2K\Omega$	See ⁽³⁾	50		V/mV	4
			See ⁽³⁾	32		V/mV	5, 6
		$V_O = -15V, R_L = 10K\Omega$	See ⁽³⁾	50		V/mV	4
			See ⁽³⁾	32		V/mV	5, 6
A_{VS}	Open Loop Voltage Gain	$\pm V_{CC} = \pm 5V, V_O = \pm 2V,$ $R_L = 2K\Omega$	See ⁽³⁾	10		V/mV	4, 5, 6
		$\pm V_{CC} = \pm 5V, V_O = \pm 2V,$ $R_L = 10K\Omega$	See ⁽³⁾	10		V/mV	4, 5, 6

(2) Calculated parameter.

(3) Datalog in K = V/mV

LM118JAN Electrical Characteristics AC Parameters

The following conditions apply to all the following parameters, unless otherwise specified.

AC: $V_{CC} = \pm 20V$

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
NI_{BB}	Noise Input Broadband	$BW = 10Hz \text{ to } 5KHz$, $R_S = 0\Omega$			25	μV_{RMS}	7
NI_{PC}	Noise Input Popcorn	$BW = 10Hz \text{ to } 5KHz$, $R_S = 20K\Omega$			80	μV_{PK}	7
TR_{IR}	Transient Response: Rise Time	$V_I = 50mV$, $PRR = 1KHz$			40	nS	7, 8A, 8B
TR_{OS}	Transient Response: Overshoot	$V_I = 50mV$, $PRR = 1KHz$			50	%	7, 8A, 8B
+SR	Slew Rate	$A_V = 1$, $V_I = -5V \text{ to } +5V$		50		$V/\mu S$	7, 8B
				40		$V/\mu S$	8A
-SR	Slew Rate	$A_V = 1$, $V_I = +5V \text{ to } -5V$		50		$V/\mu S$	7, 8B
				40		$V/\mu S$	8A
+ t_S	Settling Time	$V_I = -5V \text{ to } +5V$	See ⁽¹⁾		800	nS	12
			See ⁽¹⁾		1200	nS	13, 14
- t_S	Settling Time	$V_I = +5V \text{ to } -5V$	See ⁽¹⁾		800	nS	12
			See ⁽¹⁾		1200	nS	13, 14

(1) Errorband = $\pm 2\%$.

LM118JAN Electrical Characteristics DC Drift Parameters







The following conditions apply to all the following parameters, unless otherwise specified.

DC: $V_{CC} = \pm 20V$







Delta calculations performed on JAN S devices at group B, subgroup 5 only.

Symbol	Parameter	Conditions	Notes	Min	Max	Unit	Sub-groups
V_{IO}	Input Offset Voltage	$V_{CM} = 0V$		-1.0	1.0	mV	1
$\pm I_{IB}$	Input Bias Current	$V_{CM} = 0V$, $R_S = 100K\Omega$		-25	25	nA	1







Typical Performance Characteristics

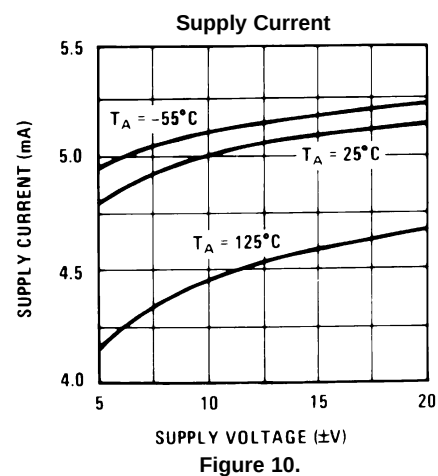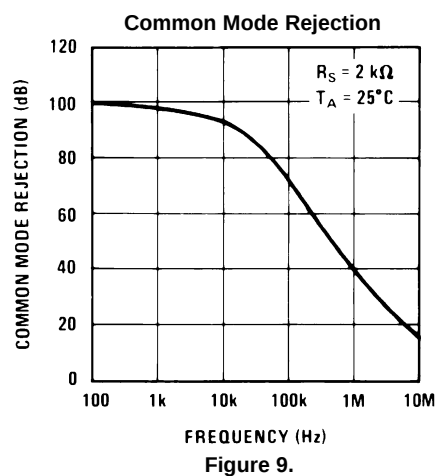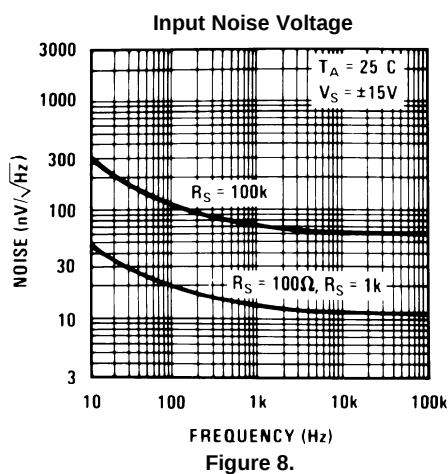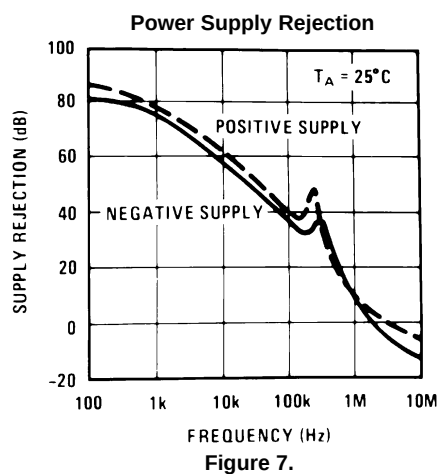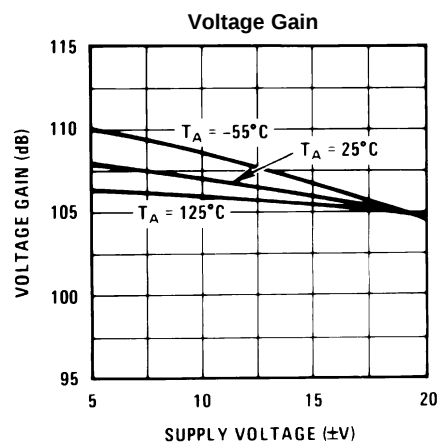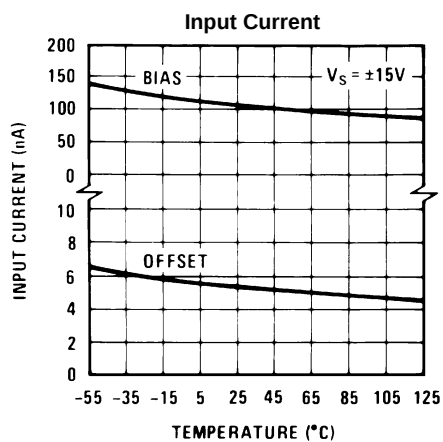

Typical Performance Characteristics (continued)

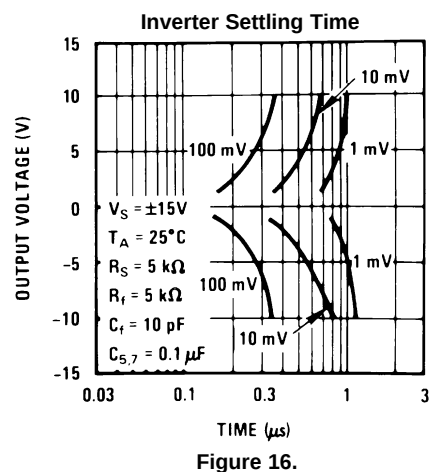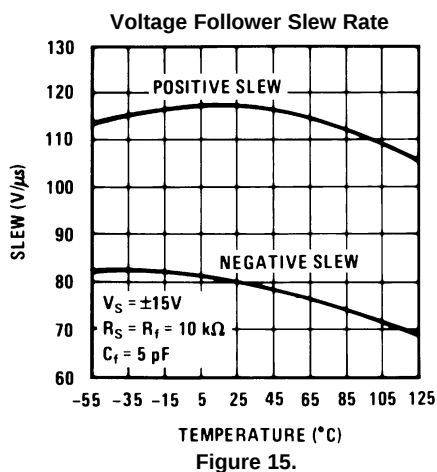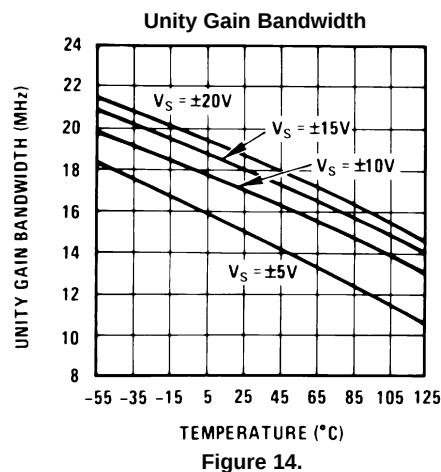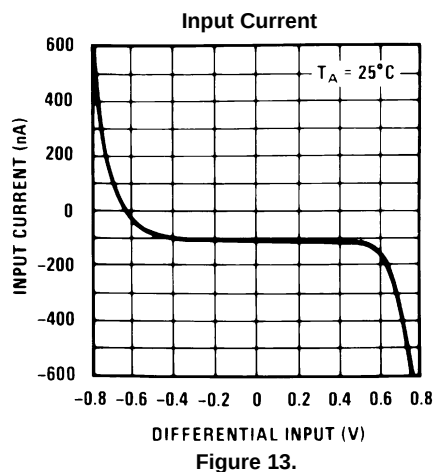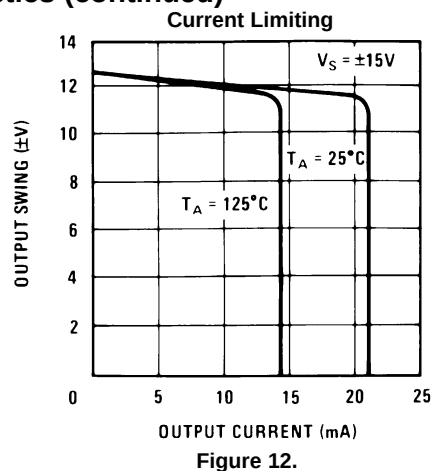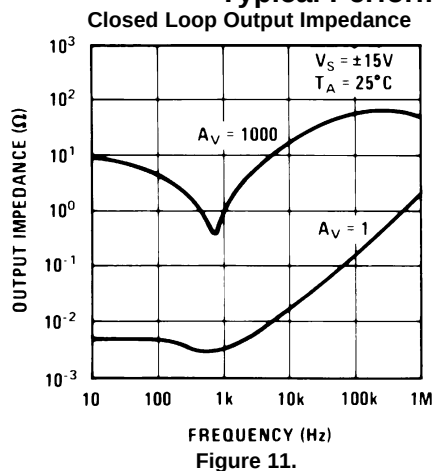


Typical Performance Characteristics (continued)

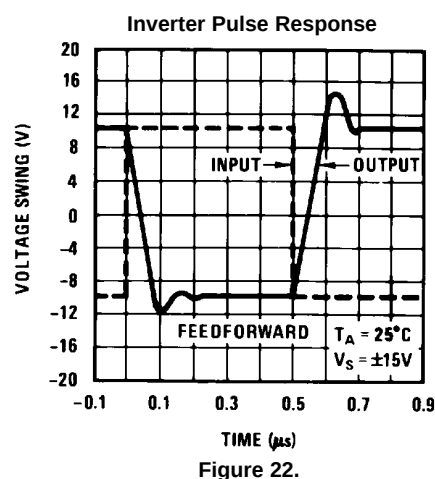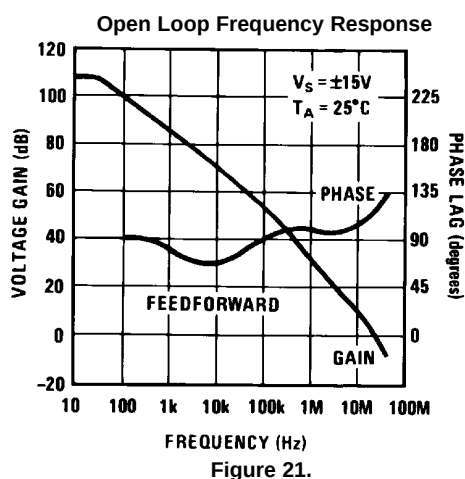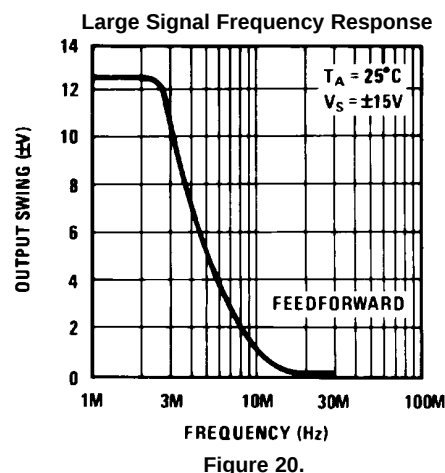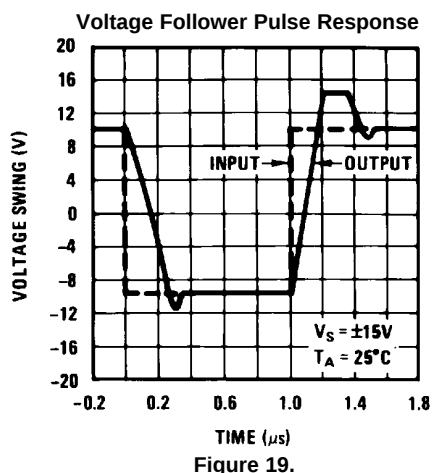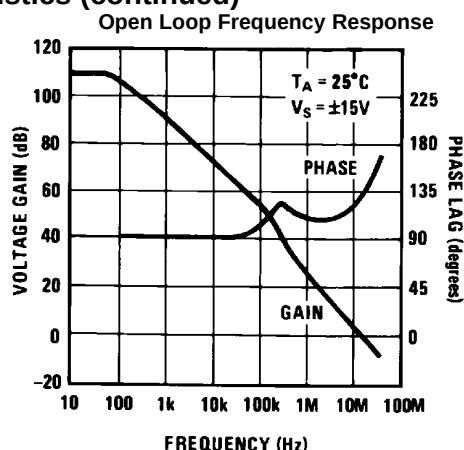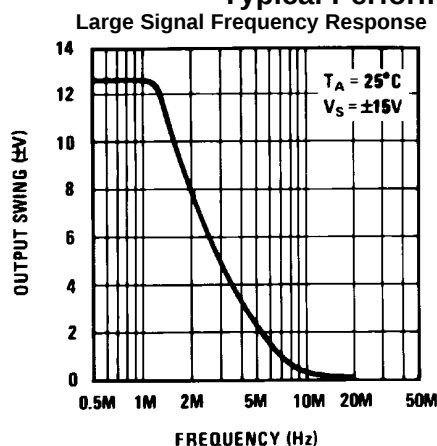

AUXILIARY CIRCUITS


Figure 23. Feedforward Compensation for Greater Inverting Slew Rate

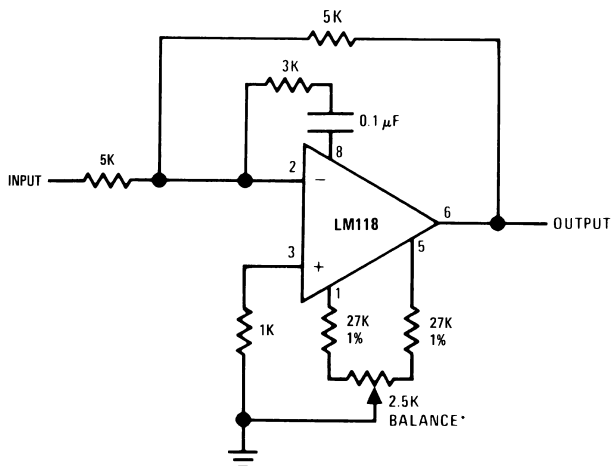

*Balance circuit necessary for increased slew.

Slew rate typically 150V/μs.

Figure 24. Compensation for Minimum Settling Time

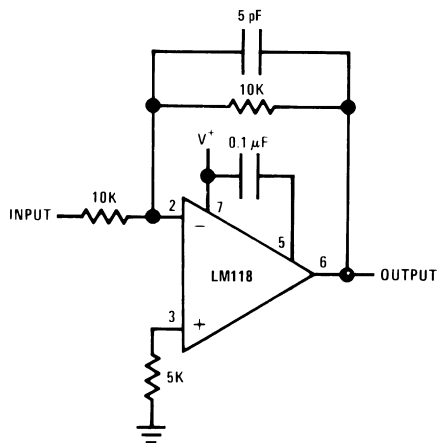

Slew and settling time to 0.1% for a 10V step change is 800 ns.

Figure 25. Offset Balancing




Figure 26. Isolating Large Capacitive Loads


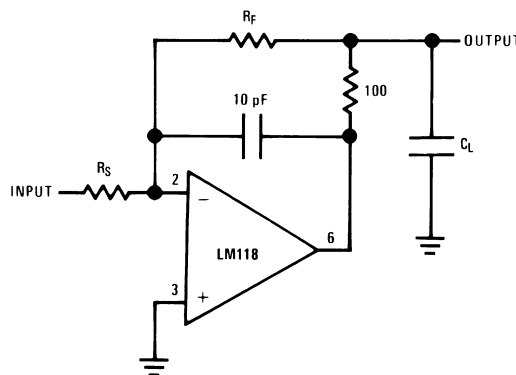


Figure 27. Overcompensation



Typical Applications

Figure 28. Fast Voltage Follower


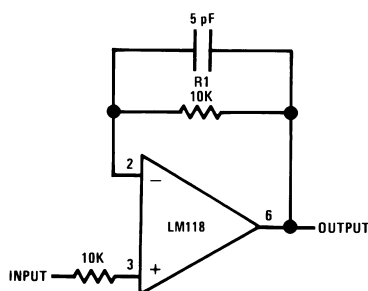


Figure 29. Integrator or Slow Inverter




C_F = Large

($C_F \geq 50$ pF)

*Do not hard-wire as integrator or slow inverter; insert a 10k-5 pF network in series with the input, to prevent oscillation.

- (1) Do not hard-wire as voltage follower ($R_1 \geq 5$ k Ω)

Fast Summing Amplifier

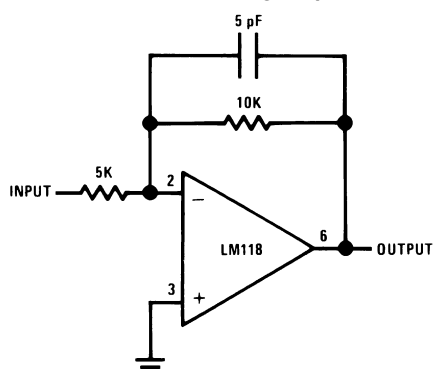

Differential Amplifier

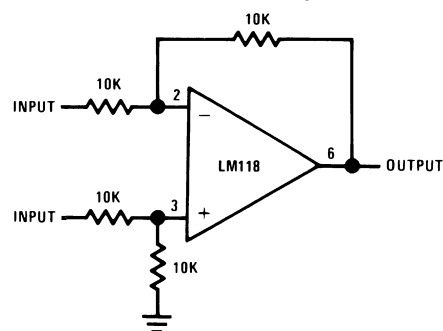


Figure 30. Fast Sample and Hold



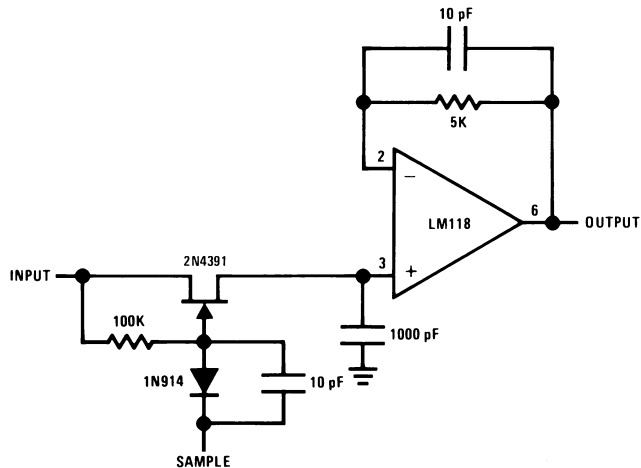


Figure 31. D/A Converter Using Ladder Network

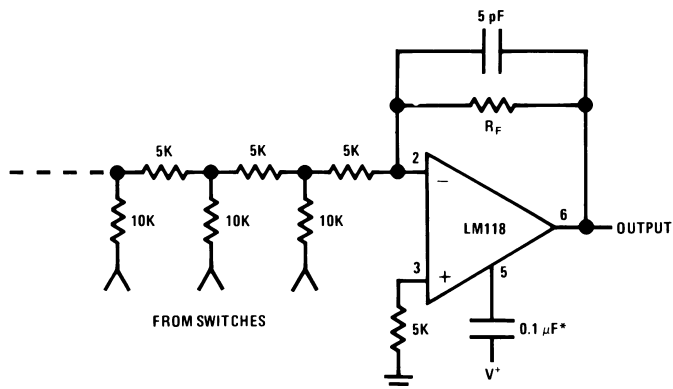


*Optional—Reduces settling time.

Figure 32. Four Quadrant Multiplier

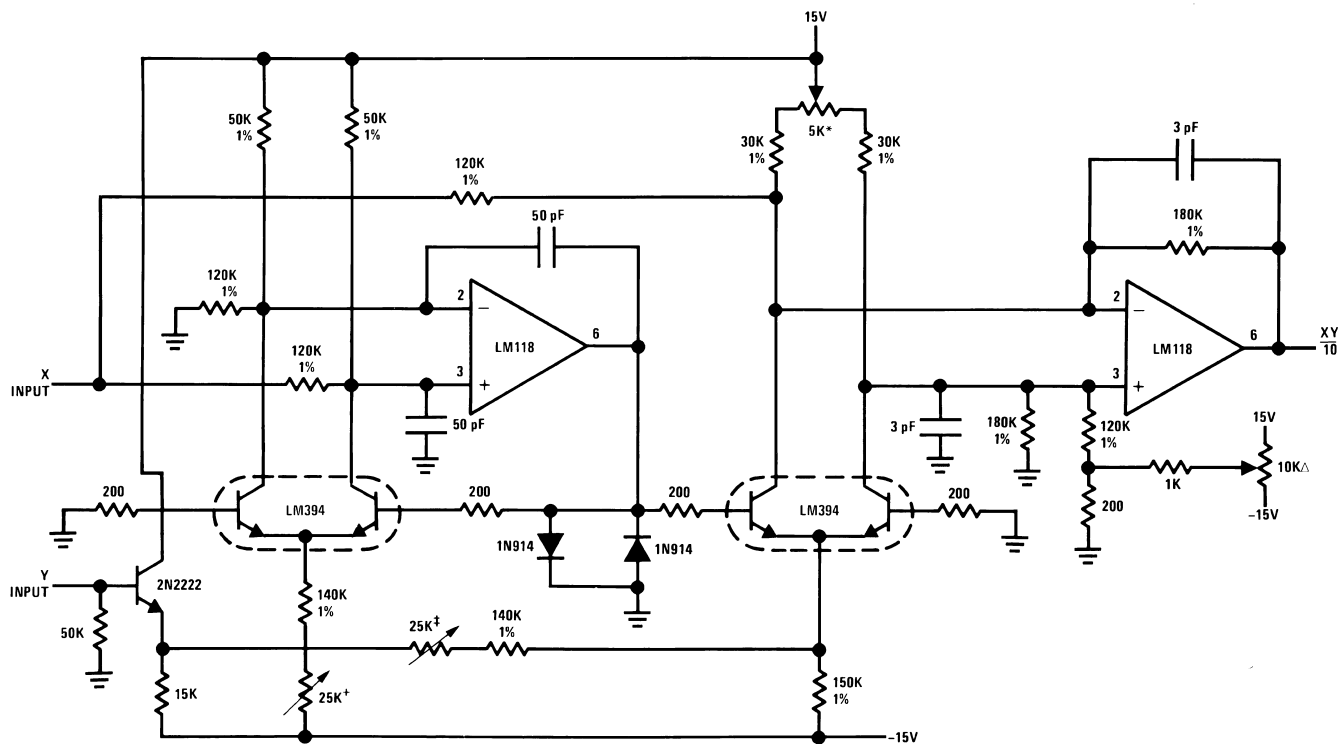


ΔOutput zero.
 *"Y" zero
 + "X" zero
 ‡Full scale adjust.

Figure 33. D/A Converter Using Binary Weighted Network

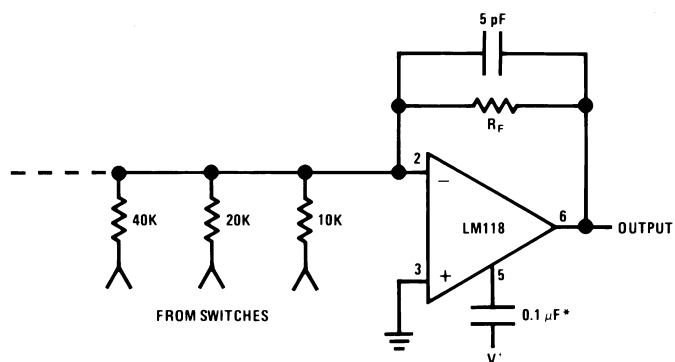


*Optional—Reduces settling time.

Figure 34. Fast Summing Amplifier with Low Input Current

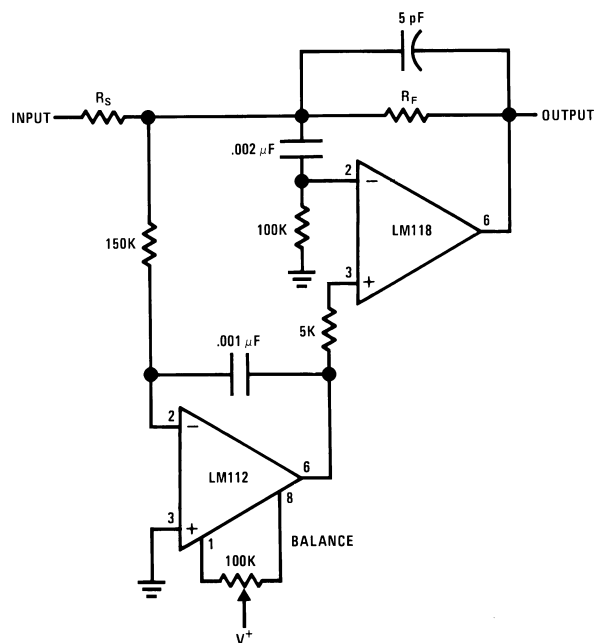

Wein Bridge Sine Wave Oscillator

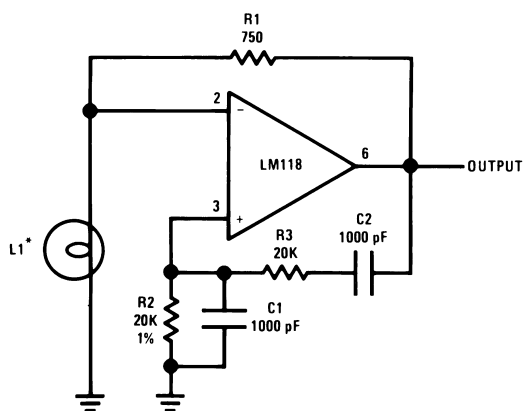


*L1—10V—14 mA bulb ELDEMA 1869

$R_1 = R_2$

$C_1 = C_2$

$$f = \frac{1}{2\pi R_2 C_1}$$

Instrumentation Amplifier

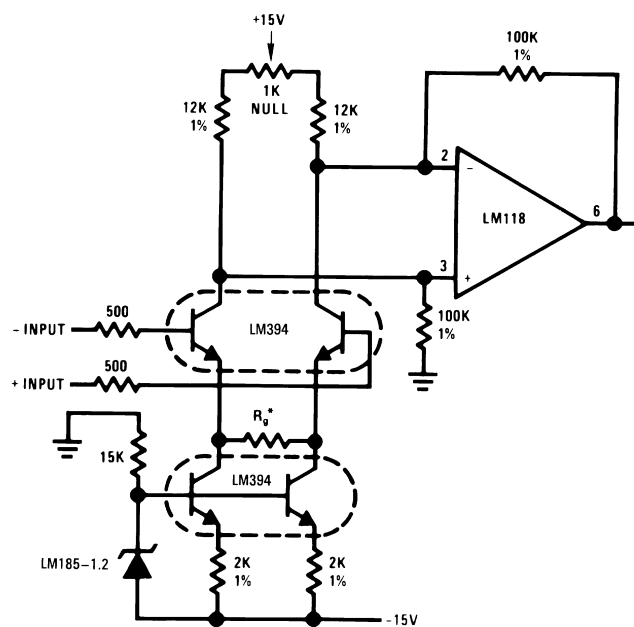

$$\text{*Gain} \geq \frac{200 \text{ K}}{R_g} \text{ for } 1.5 \text{ K} \leq R_g \leq 200 \text{ K}$$

REVISION HISTORY SECTION

Date Released	Revision	Section	Originator	Changes
07/12/05	A	New Release, Corporate format	L. Lytle	1 MDS data sheet, MJLM118–X Rev 0A0 was converted into the Corp. datasheet format. MDS datasheet will be archived.
03/20/2013	A	All Sections		Changed layout of National Data Sheet to TI format

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
JL118BPA	Active	Production	CDIP (NAB) 8	40 TUBE	No	Call TI	Call TI	-55 to 125	JL118BPA Q JM38510/ 10107BPA ACO (10107BPA >T, 1010 7BPA MYS)

- ⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).
- ⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- ⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- ⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- ⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- ⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TUBE





*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
JL118BPA	NAB	CDIP	8	40	506.98	15.24	13440	NA

NAB0008A

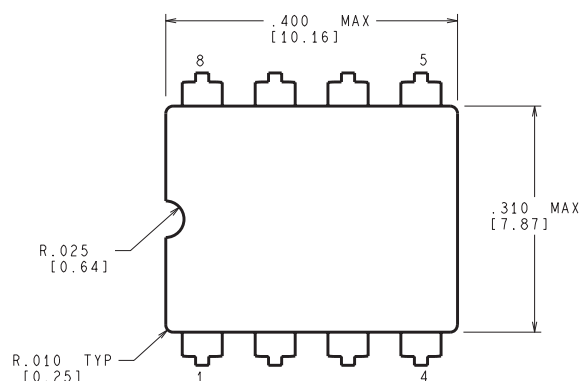

CONTROLLING DIMENSION IS INCH
VALUES IN [] ARE MILLIMETERS

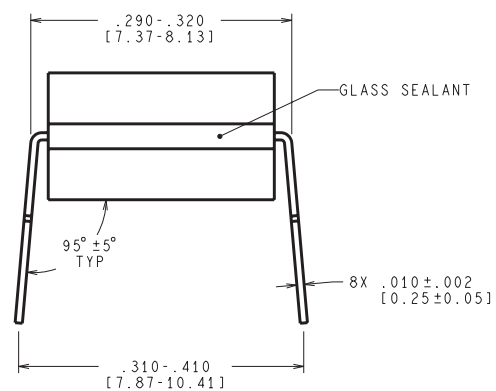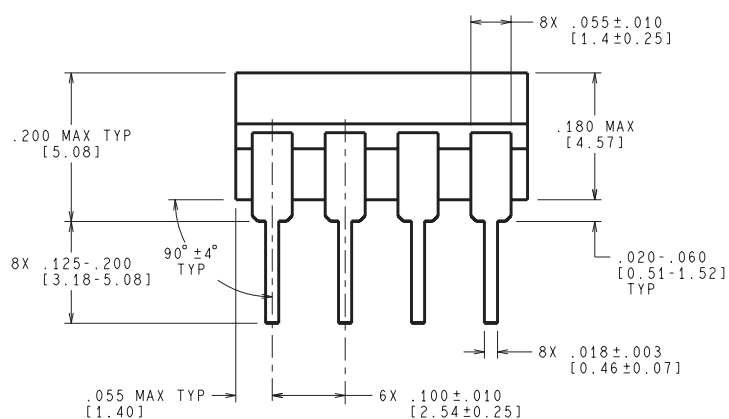

J08A (Rev M)

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025