


TLC59025 低功耗 16 通道恒流下沉式 LED 驱动器

1 特性

- 16 个恒流输出通道
- 业界通用的 IOUT 与外部电阻匹配
- 恒定的输出电流不随负载电压变化而变化
- 输出电流精度：
 - 通道间： $< \pm 5\%$ (最大值)
 - IC 间： $< \pm 6\%$ (最大值)
- 恒定输出电流范围：
 - 3mA 至 45mA
- 可通过外部电阻器调节输出电流
- 可实现快速的输出电流响应， $\overline{OE}$ (最小值)：100ns
- 30MHz 时钟频率
- 施密特触发器输入
- 3.0V 至 5.5V 电源电压
- 热关断可提供过热保护
- ESD 性能：1kV HBM

2 应用

- 游戏机/娱乐
- 通用 LED 应用
- LED 显示系统
- 标牌 LED 照明
- 白色家电

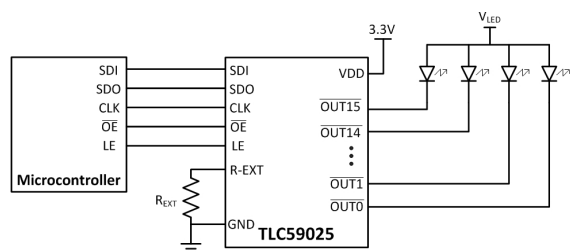

典型应用图

3 说明


TLC59025 器件适用于 LED 显示和 LED 照明应用。TLC59025 包含一个 16 位移位寄存器和数据锁存器，它们将串行输入数据转换为并行输出格式。TLC59025 输出级有 16 个稳流端口，可提供均匀且恒定的电流，从而驱动各种变频型号的 LED。TLC59025 用于 LED 显示应用 (例如 LED 面板) 的系统设计中，具有出色的灵活性和器件性能。用户可通过外部电阻 R_{ext} 将输出电流从 3mA 调节到 45mA，从而灵活地控制 LED 的光强度。TLC59025 在输出端口可提供最高 17V 的电压。另外，30MHz 的高时钟频率可满足大容量数据传输的系统要求。

串行数据通过 SDI 传送到 TLC59025，在移位寄存器中移位，然后通过 SDO 传送出去。LE 可以将移位寄存器中的串行数据锁存到输出锁存器。 $\overline{OE}$ 使输出驱动器可以灌入电流。

器件信息⁽¹⁾

器件型号	封装	封装尺寸 (标称值)
TLC59025	SSOP (24)	8.65mm × 3.90mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

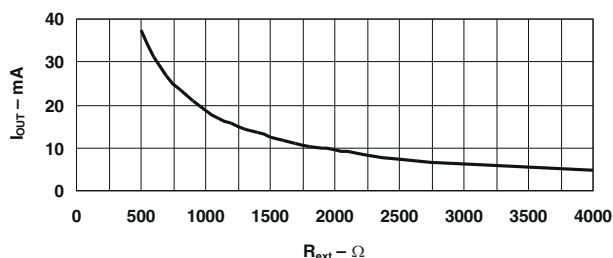

I_{OUT} 和 R_{EXT} 对比



Table of Contents

1 特性	1	8.1 Overview	13
2 应用	1	8.2 Functional Block Diagram	13
3 说明	1	8.3 Feature Description	13
4 Revision History	2	8.4 Device Functional Modes	13
5 Pin Configuration and Functions	3	9 Application and Implementation	15
6 Specifications	4	9.1 Application Information	15
6.1 Absolute Maximum Ratings.....	4	9.2 Typical Application	16
6.2 ESD Ratings.....	4	10 Power Supply Recommendations	17
6.3 Recommended Operating Conditions.....	4	11 Layout	17
6.4 Thermal Information.....	5	11.1 Layout Guidelines.....	17
6.5 Electrical Characteristics for 3-V Input Voltage.....	5	11.2 Layout Example.....	17
6.6 Electrical Characteristics for 5.5-V Input Voltage.....	6	12 Device and Documentation Support	18
6.7 Power Dissipation Ratings.....	6	12.1 支持资源.....	18
6.8 Timing Requirements.....	7	12.2 Trademarks.....	18
6.9 Switching Characteristics for 3-V Input Voltage.....	8	12.3 静电放电警告.....	18
6.10 Switching Characteristics for 5.5-V Input Voltage.....	9	12.4 术语表.....	18
6.11 Typical Characteristics.....	10	13 Mechanical, Packaging, and Orderable Information	18
7 Parameter Measurement Information	11		
8 Detailed Description	13		

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision B (February 2015) to Revision C (February 2021)	Page
• 更新了整个文档的表、图和交叉参考的编号格式.....	1
• Updated "T _J " to "T _A " in <i>Electrical Characteristics for 3-V Input Voltage</i> table.....	5
• Updated "T _J " to "T _A " in <i>Electrical Characteristics for 5.5-V Input Voltage</i> table.....	6
• Added note to <i>Constant Current</i> section.....	13

Changes from Revision A (March 2013) to Revision B (February 2015)	Page
• 添加了引脚配置和功能部分、ESD 等级表、特性说明部分、器件功能模式、应用和实施部分、电源相关建议部分、布局部分、器件和文档支持部分以及机械、封装和可订购信息部分.....	1
• 删除了订购信息表.....	1

5 Pin Configuration and Functions

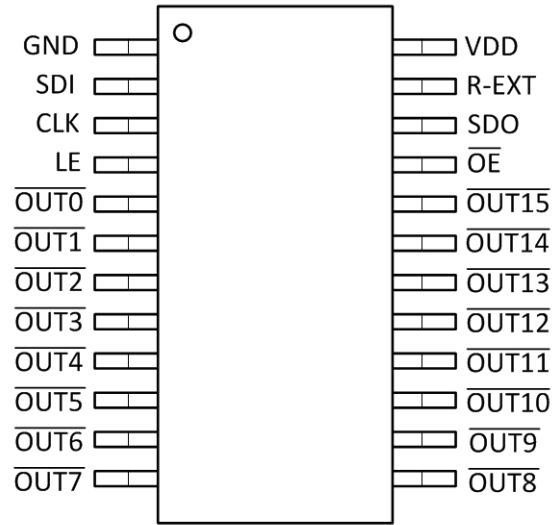


图 5-1. DBQ Package 24-Pin SSOP Top View

表 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
CLK	3	I	Clock input for data shift on rising edge
GND	1	—	Ground for control logic and current sink
LE	4	I	Data strobe input Serial data is transferred to the respective latch when LE is high. The data is latched when LE goes low. LE has an internal pulldown resistor.
OE	21	I	Output enable When OE is active (low), the output drivers are enabled. When OE is high, all output drivers are turned OFF (blanked). OE has an internal pullup resistor.
OUT0	5	O	Constant-current output
OUT1	6	O	Constant-current output
OUT2	7	O	Constant-current output
OUT3	8	O	Constant-current output
OUT4	9	O	Constant-current output
OUT5	10	O	Constant-current output
OUT6	11	O	Constant-current output
OUT7	12	O	Constant-current output
OUT8	13	O	Constant-current output
OUT9	14	O	Constant-current output
OUT10	15	O	Constant-current output
OUT11	16	O	Constant-current output
OUT12	17	O	Constant-current output
OUT13	18	O	Constant-current output
OUT14	19	O	Constant-current output
OUT15	20	O	Constant-current output
R-EXT	23	I	Input used to connect an external resistor (R _{ext}) for setting output currents

表 5-1. Pin Functions (continued)

PIN		I/O	DESCRIPTION
NAME	NO.		
SDI	2	I	Serial-data input to the Shift register
SDO	22	O	Serial-data output to the following SDI of next driver IC or to the microcontroller
VDD	24	—	Supply voltage

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

	MIN	MAX	UNIT
V _{DD} Supply voltage	0	7	V
V _I Input voltage	– 0.4	V _{DD} + 0.4	V
V _O Output voltage	– 0.5	20	V
I _{OUT} Output current		45	mA
I _{GND} GND terminal current		750	mA
T _J Operating virtual-junction temperature	– 40	150	°C
T _{stg} Storage temperature	– 55	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

		VALUE	UNIT
V _(ESD) Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±1000	V
	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Pins listed as ±1000 V may actually have higher performance.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Pins listed as ±500 V may actually have higher performance.

6.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
V _{DD} Supply voltage	3	5.5	V
V _O Output voltage		17	V
V _{IH} Input voltage	0.7 × V _{DD}	V _{DD} + 0.4	V
V _{IL} Output voltage	GND	0.3 × V _{DD}	V
I _{OUT} Output current	V _O ≥ 0.6 V	3	mA
	V _O ≥ 1.0 V	45	mA
I _{OH} High-level output current, source	– 1		mA
I _{OL} Low-level output current, sink	1		mA
T _A Operating free-air temperature	– 40	125	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TLC59025	UNIT
		DBQ (SSOP)	
		24 PINS	
$R_{\theta JA}$ Junction-to-ambient thermal resistance	Mounted on JEDEC 1-layer board (JESD 51-3), No airflow	99.8	°C/W
	Mounted on JEDEC 4-layer board (JESD 51-7), No airflow	61	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

6.5 Electrical Characteristics for 3-V Input Voltage

$V_{DD} = 3\text{ V}$, $T_A = -40^\circ\text{C}$ to 125°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{leak} Output leakage current	$V_{OH} = 17\text{ V}$	$T_A = 25^\circ\text{C}$			0.5	μA
		$T_A = 125^\circ\text{C}$			2	
V_{OH} High-level output voltage	SDO, $I_{OL} = -1\text{ mA}$		$V_{DD} - 0.4$			V
V_{OL} Low-level output voltage	SDO, $I_{OH} = 1\text{ mA}$				0.4	V
$I_{O(1)}$	Output current 1	$V_{OUT} = 0.6\text{ V}$, $R_{ext} = 1440\ \Omega$		13		mA
	Output current error, die-die	$I_{OL} = 13\text{ mA}$, $V_O = 0.6\text{ V}$, $R_{ext} = 1440\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 3\%$	$\pm 6\%$	
	Output current error, channel-to-channel	$I_{OL} = 13\text{ mA}$, $V_O = 0.6\text{ V}$, $R_{ext} = 1440\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 1.5\%$	$\pm 5\%$	
$I_{O(2)}$	Output current 2	$V_O = 0.8\text{ V}$, $R_{ext} = 720\ \Omega$		26		mA
	Output current error, die-die	$I_{OL} = 26\text{ mA}$, $V_O = 0.8\text{ V}$, $R_{ext} = 720\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 3\%$	$\pm 6\%$	
	Output current error, channel-to-channel	$I_{OL} = 26\text{ mA}$, $V_O = 0.8\text{ V}$, $R_{ext} = 720\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 1.5\%$	$\pm 5\%$	
I_{OUT} vs V_{OUT}	Output current vs output voltage regulation	$V_O = 1\text{ V}$ to 3 V , $I_O = 13\text{ mA}$	± 0.1			% / V
		$V_{DD} = 3.0\text{ V}$ to 5.5 V , $I_O = 13\text{ mA}$ to 45 mA	± 1			
	Pullup resistance	$\overline{OE}$	500			k Ω
	Pulldown resistance	LE	500			k Ω
T_{sd} Overtemperature shutdown ⁽¹⁾			150	175	200	°C
T_{hys} Restart temperature hysteresis			15			°C
I_{DD} Supply current		$R_{ext} = \text{Open}$	7		10	mA
		$R_{ext} = 1440\ \Omega$	9		12	
		$R_{ext} = 720\ \Omega$	11		13	
C_{IN} Input capacitance	$V_I = V_{DD}$ or GND, CLK, SDI, SDO, $\overline{OE}$				10	pF

(1) Specified by design

6.6 Electrical Characteristics for 5.5-V Input Voltage

$V_{DD} = 5.5\text{ V}$, $T_A = -40^\circ\text{C}$ to 125°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
I_{leak}	Output leakage current	$V_{OH} = 17\text{ V}$	$T_A = 25^\circ\text{C}$			0.5	μA
			$T_A = 125^\circ\text{C}$			2	
V_{OH}	High-level output voltage	SDO, $I_{OL} = -1\text{ mA}$		$V_{DD} - 0.4$			V
V_{OL}	Low-level output voltage	SDO, $I_{OH} = 1\text{ mA}$				0.4	V
$I_{O(1)}$	Output current 1	$V_{OUT} = 0.6\text{ V}$, $R_{ext} = 1440\ \Omega$		13			mA
	Output current error, die-die	$I_{OL} = 13\text{ mA}$, $V_O = 0.6\text{ V}$, $R_{ext} = 1440\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 3\%$		$\pm 6\%$	
	Output current error, channel-to-channel	$I_{OL} = 13\text{ mA}$, $V_O = 0.6\text{ V}$, $R_{ext} = 1440\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 1.5\%$		$\pm 5\%$	
$I_{O(2)}$	Output current 2	$V_O = 0.8\text{ V}$, $R_{ext} = 720\ \Omega$		26			mA
	Output current error, die-die	$I_{OL} = 26\text{ mA}$, $V_O = 0.8\text{ V}$, $R_{ext} = 720\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 3\%$		$\pm 6\%$	
	Output current error, channel-to-channel	$I_{OL} = 26\text{ mA}$, $V_O = 0.8\text{ V}$, $R_{ext} = 720\ \Omega$, $T_A = 25^\circ\text{C}$		$\pm 1.5\%$		$\pm 5\%$	
I_{OUT} vs V_{OUT}	Output current vs output voltage regulation	$V_O = 1\text{ V}$ to 3 V , $I_O = 26\text{ mA}$		± 0.1			%/V
		$V_{DD} = 3.0\text{ V}$ to 5.5 V , $I_O = 13\text{ mA}$ to 45 mA		± 1			
	Pullup resistance	$\overline{OE}$		500			k Ω
	Pulldown resistance	LE		500			k Ω
T_{sd}	Overtemperature shutdown ⁽¹⁾			150	175	200	$^\circ\text{C}$
T_{hys}	Restart temperature hysteresis			15			$^\circ\text{C}$
I_{DD}	Supply current	$R_{ext} = \text{Open}$		9		11	mA
		$R_{ext} = 1440\ \Omega$		12		14	
		$R_{ext} = 720\ \Omega$		14		16	
C_{IN}	Input capacitance	$V_I = V_{DD}$ or GND, CLK, SDI, SDO, $\overline{OE}$				10	pF

(1) Specified by design

6.7 Power Dissipation Ratings

			MIN	MAX	UNIT
P_D	Power dissipation	Mounted on JEDEC 4-layer board (JESD 51-7), No airflow, $T_A = 25^\circ\text{C}$, $T_J = 125^\circ\text{C}$		1.6	W
		DBQ package			

6.8 Timing Requirements

$V_{DD} = 3\text{ V to }5.5\text{ V}$ (unless otherwise noted)

		MIN	MAX	UNIT
$t_{w(L)}$	LE pulse duration	15		ns
$t_{w(CLK)}$	CLK pulse duration	15		ns
$t_{w(OE)}$	OE pulse duration	300		ns
$t_{su(D)}$	Setup time for SDI	3		ns
$t_{h(D)}$	Hold time for SDI	2		ns
$t_{su(L)}$	Setup time for LE	5		ns
$t_{h(L)}$	Hold time for LE	5		ns
f_{CLK}	Clock frequency	Cascade operation		30 MHz

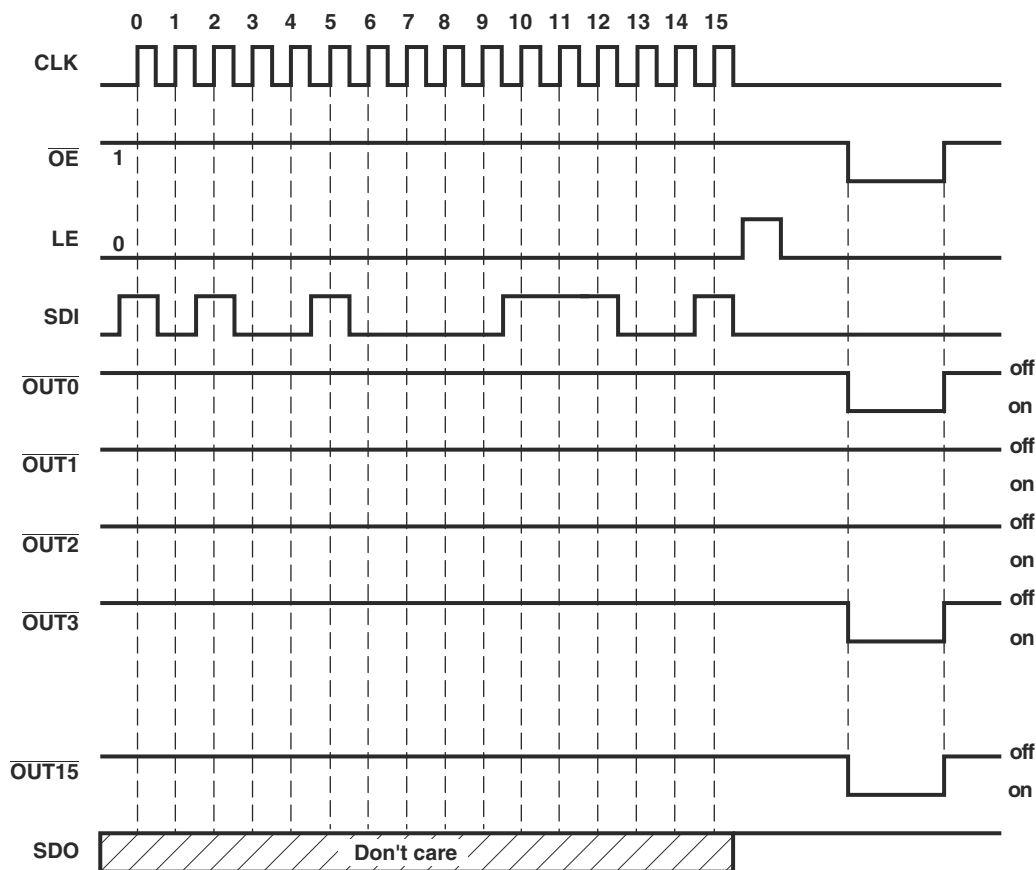


图 6-1. Timing Diagram

6.9 Switching Characteristics for 3-V Input Voltage

$V_{DD} = 3\text{ V}$, $T_A = -40^\circ\text{C}$ to 125°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH1}	Low-to-high propagation delay time, CLK to $\overline{OUTn}$	$V_{IH} = V_{DD}$, $V_{IL} = \text{GND}$, $R_{ext} = 720\ \Omega$, $V_L = 4\text{ V}$, $R_L = 88\ \Omega$, $C_L = 10\text{ pF}$	30	45	60	ns
t_{PLH2}	Low-to-high propagation delay time, LE to $\overline{OUTn}$		30	45	60	ns
t_{PLH3}	Low-to-high propagation delay time, $\overline{OE}$ to $\overline{OUTn}$		30	45	60	ns
t_{PLH4}	Low-to-high propagation delay time, CLK to SDO			30	40	ns
t_{PHL1}	High-to-low propagation delay time, CLK to $\overline{OUTn}$		40	65	100	ns
t_{PHL2}	High-to-low propagation delay time, LE to $\overline{OUTn}$		40	65	100	ns
t_{PHL3}	High-to-low propagation delay time, $\overline{OE}$ to $\overline{OUTn}$		40	65	100	ns
t_{PHL4}	High-to-low propagation delay time, CLK to SDO			30	40	ns
$t_{W(CLK)}$	Pulse duration, CLK		15			ns
$t_{W(L)}$	Pulse duration LE		15			ns
$t_{W(OE)}$	Pulse duration, $\overline{OE}$		300			ns
$t_{h(D)}$	Hold time, SDI		2			ns
$t_{su(D)}$	Setup time, SDI		3			ns
$t_{h(L)}$	Hold time, LE		5			ns
$t_{su(L)}$	Setup time, LE		5			ns
t_r	Rise time, CLK ⁽¹⁾				500	ns
t_f	Fall time, CLK ⁽¹⁾				500	ns
t_{or}	Rise time, outputs (off)		35	50	70	ns
t_{of}	Rise time, outputs (on)		15	50	120	ns
f_{CLK}	Clock frequency	Cascade operation			30	MHz

- (1) If the devices are connected in cascade and t_r or t_f is large, it may be critical to achieve the timing required for data transfer between two cascaded devices.




6.10 Switching Characteristics for 5.5-V Input Voltage

$V_{DD} = 5.5\text{ V}$, $T_A = -40^\circ\text{C}$ to 125°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH1}	Low-to-high propagation delay time, CLK to $\overline{OUTn}$	$V_{IH} = V_{DD}$, $V_{IL} = \text{GND}$, $R_{ext} = 720\ \Omega$, $V_L = 4\text{ V}$, $R_L = 88\ \Omega$, $C_L = 10\text{ pF}$	20	35	55	ns
t_{PLH2}	Low-to-high propagation delay time, LE to $\overline{OUTn}$		20	35	55	ns
t_{PLH3}	Low-to-high propagation delay time, $\overline{OE}$ to $\overline{OUTn}$		20	35	55	ns
t_{PLH4}	Low-to-high propagation delay time, CLK to SDO			20	30	ns
t_{PHL1}	High-to-low propagation delay time, CLK to $\overline{OUTn}$		15	28	42	ns
t_{PHL2}	High-to-low propagation delay time, LE to $\overline{OUTn}$		15	28	42	ns
t_{PHL3}	High-to-low propagation delay time, $\overline{OE}$ to $\overline{OUTn}$		15	28	42	ns
t_{PHL4}	High-to-low propagation delay time, CLK to SDO			20	30	ns
$t_{W(CLK)}$	Pulse duration, CLK		10			ns
$t_{W(L)}$	Pulse duration LE		10			ns
$t_{W(OE)}$	Pulse duration, $\overline{OE}$		200			ns
$t_{h(D)}$	Hold time, SDI		2			ns
$t_{su(D)}$	Setup time, SDI		3			ns
$t_{h(L)}$	Hold time, LE		5			ns
$t_{su(L)}$	Setup time, LE		5			ns
t_r	Rise time, CLK ⁽¹⁾				500	ns
t_f	Fall time, CLK ⁽¹⁾				500	ns
t_{or}	Rise time, outputs (off)		25	45	65	ns
t_{of}	Rise time, outputs (on)		7	12	20	ns
f_{CLK}	Clock frequency	Cascade operation			30	MHz

- (1) If the devices are connected in cascade and t_r or t_f is large, it may be critical to achieve the timing required for data transfer between two cascaded devices.

6.11 Typical Characteristics

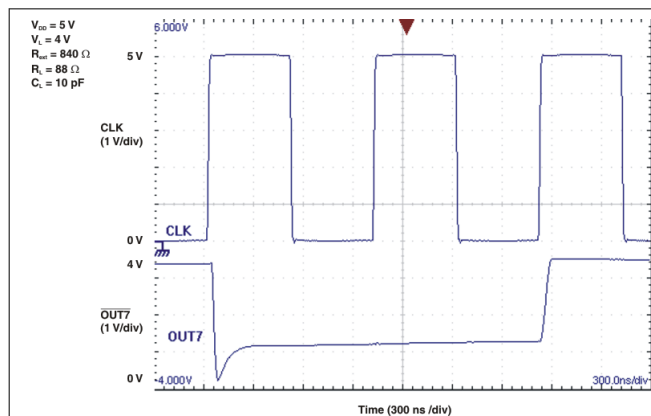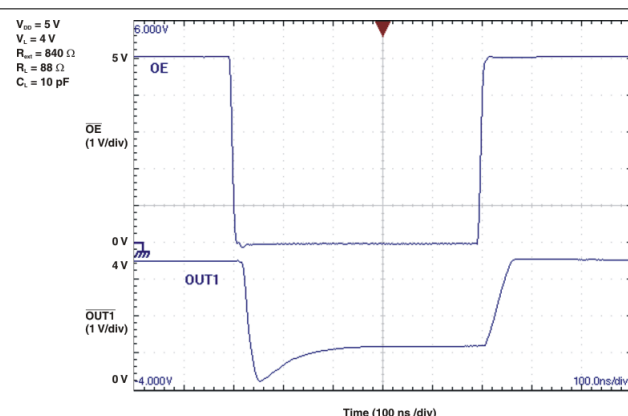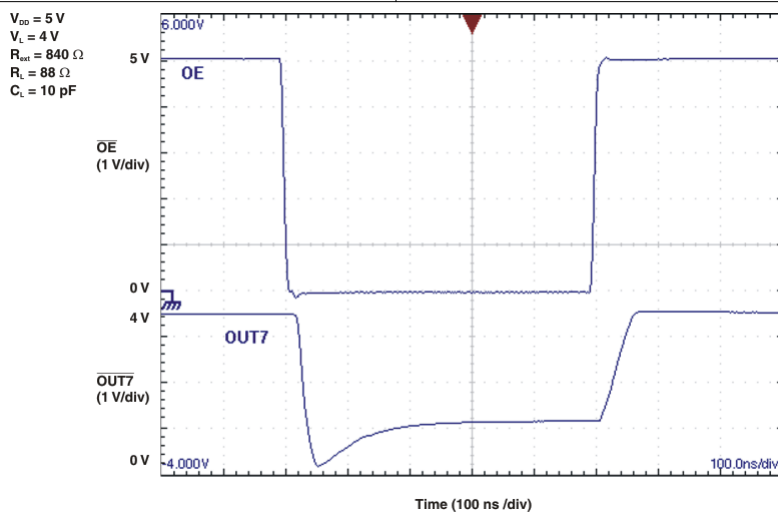图 6-2. CLK to $\overline{\text{OUT7}}$ 图 6-3. $\overline{\text{OE}}$ to $\overline{\text{OUT1}}$ 图 6-4. $\overline{\text{OE}}$ to $\overline{\text{OUT7}}$

7 Parameter Measurement Information

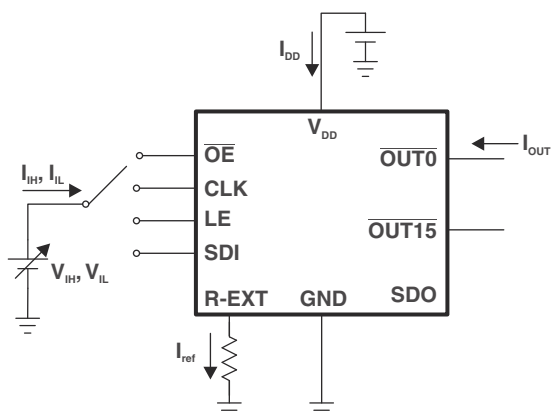


图 7-1. Test Circuit for Electrical Characteristics

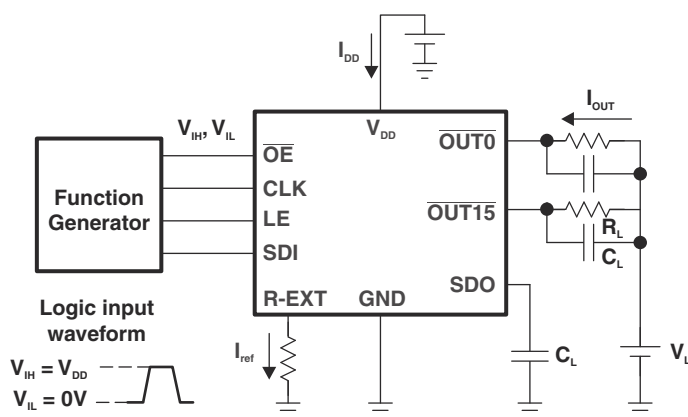


图 7-2. Test Circuit for Switching Characteristics

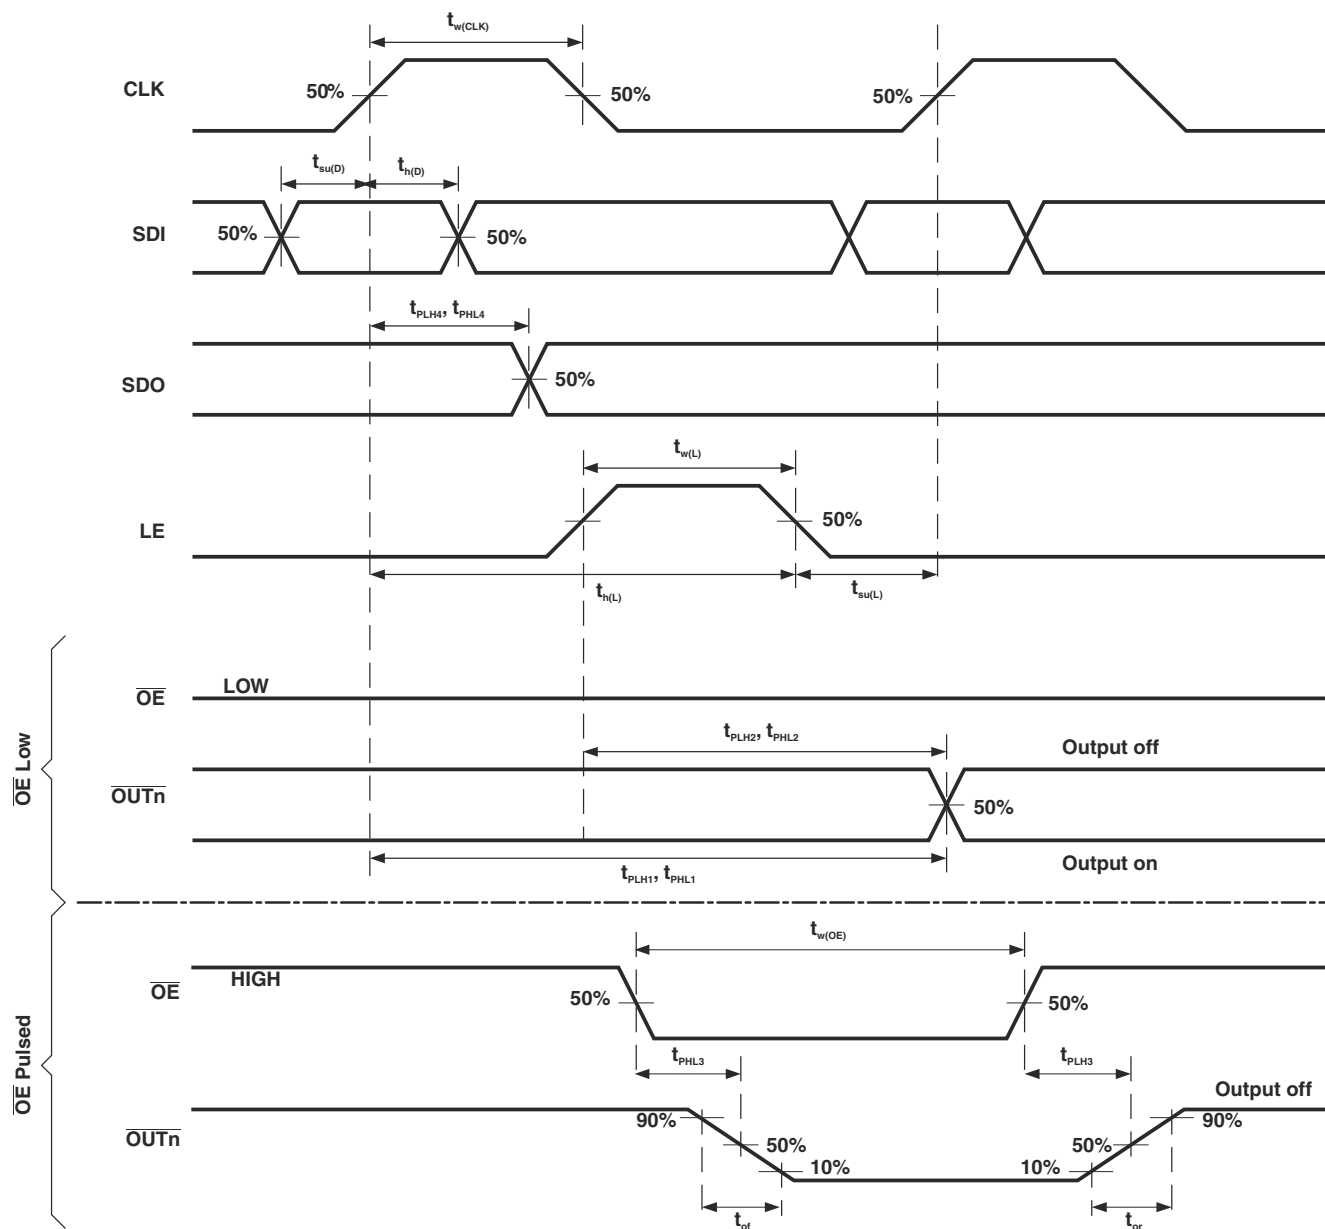



图 7-3. Normal Mode Timing Waveforms

8 Detailed Description

8.1 Overview

The TLC59025 is a 16-channel LED driver designed for LED displays and LED lighting applications. The TLC59025 contains a 16-bit shift register and data latches, which convert serial input data into parallel output format. At the TLC59025 output stage, 16 regulated-current ports provide uniform and constant current for driving LEDs within a wide range of V_F variations. Used in system design for LED display applications (for example, LED panels), the TLC59025 provides great flexibility and device performance. Users can adjust the output current from 3 mA to 45 mA through an external resistor, R_{EXT} , which gives flexibility in controlling the light intensity of LEDs. TLC59025 is designed for up to 17 V at the output port. The high clock frequency, 30 MHz, also satisfies the system requirements of high-volume data transmission.

8.2 Functional Block Diagram

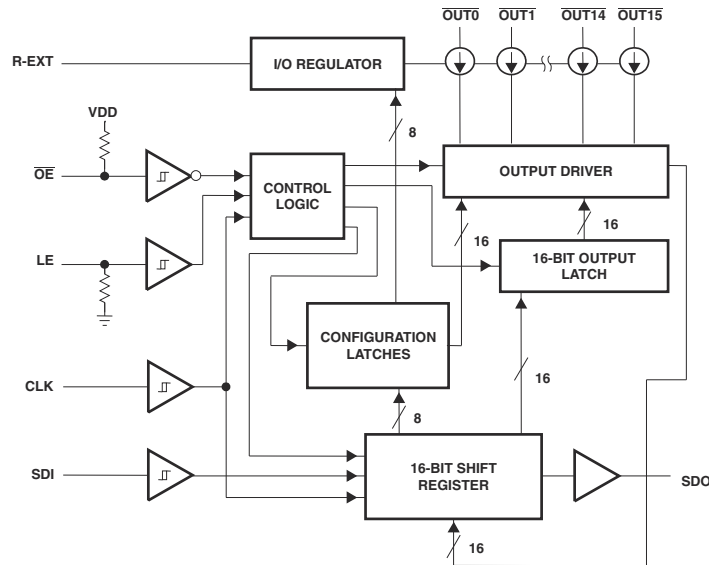

8.3 Feature Description

8.3.1 Constant Current

In LED display applications, TLC59025 provides nearly no current variations from channel to channel and from IC to IC. While $I_{OUT} \leq 45$ mA, the maximum current skew between channels is less than $\pm 5\%$ and between ICs is less than $\pm 6\%$.

Note

When the TLC59025 is used in very low current applications, reduced current accuracy can be expected. For example, current accuracy is estimated to degrade to as much as $\pm 10\%$ when $I_{OUT} = 1.7$ mA.

8.4 Device Functional Modes

表 8-1 lists the functional modes for the TLC59025.

表 8-1. Truth Table in Normal Operation

CLK	LE	OE	SDI	OUT0... OUT15... OUT15	SDO
↑	H	L	Dn	Dn...Dn - 7...Dn - 15	Dn - 15
↑	L	L	Dn + 1	No change	Dn - 14
↑	H	L	Dn + 2	Dn + 2...Dn - 5...Dn - 13	Dn - 13
↓	X	L	Dn + 3	Dn + 2...Dn - 5...Dn - 13	Dn - 13

表 8-1. Truth Table in Normal Operation (continued)

CLK	LE	OE	SDI	OUT0... OUT15... OUT15	SDO
↓	X	H	Dn + 3	off	Dn - 13

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 Turning on the LEDs

To turn on an LED connected to one of the outputs of the device, the output must be pulled low. To do this, the SDI signal must let the device know which outputs should be activated. Using the rising edge of CLK, the logic level of the SDI signal latches the desired state of each output into the shift register. Once this is complete, the LE signal must be toggled from low to high then back to low. Once /OE is pulled down, the corresponding outputs will be pulled low and the LEDs will be turned on. The below diagram shows outputs 0, 3, 4, 5, 10, 13, and 15 being activated.

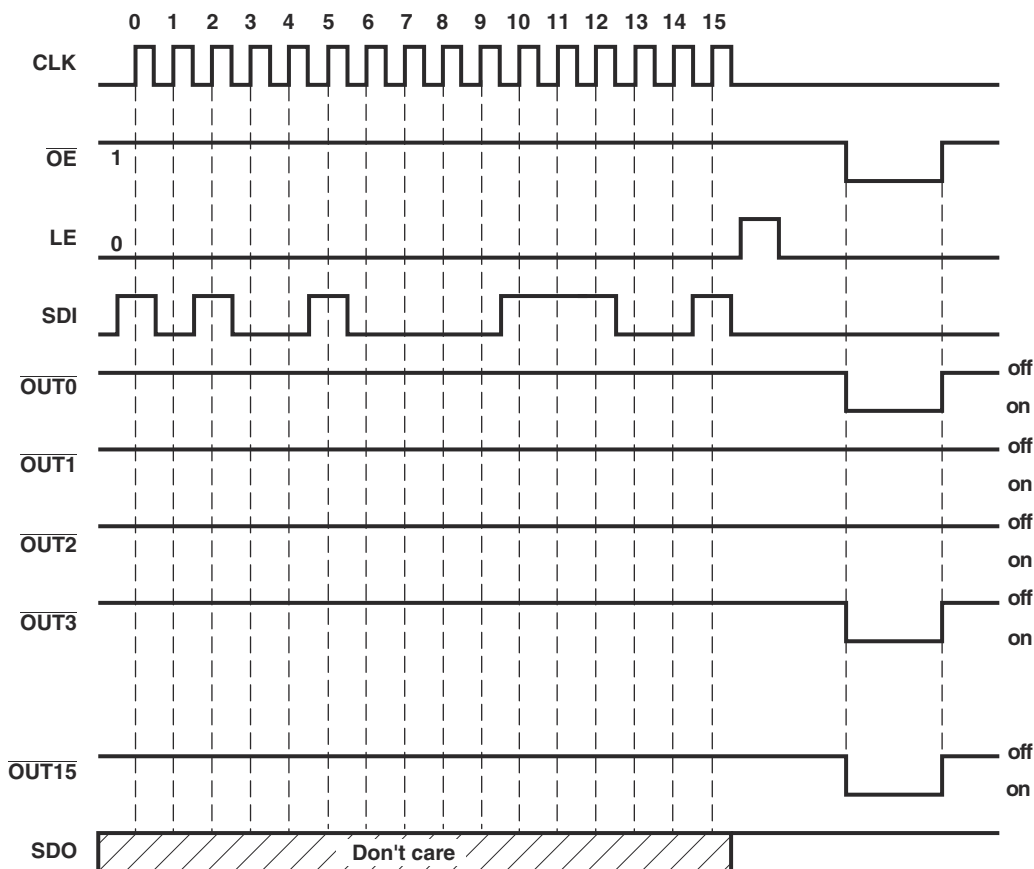


图 9-1. Timing Diagram

9.2 Typical Application

This application shows how to calculate the output current for $\overline{\text{OUT0}}$ through $\overline{\text{OUT15}}$.

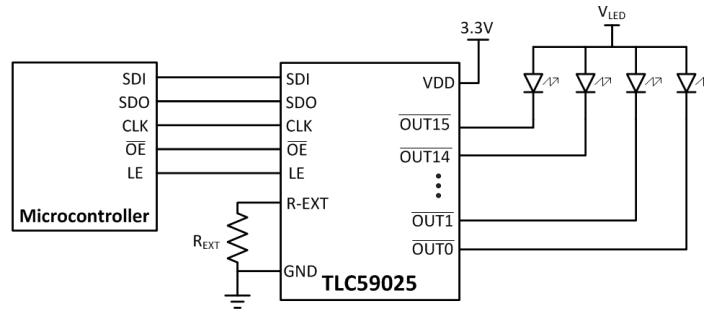


图 9-2. Typical Application Diagram

9.2.1 Design Requirements

For the following design procedure, the input voltage (V_{DD}) is between 3 V and 5.5 V.

9.2.2 Detailed Design Procedure

9.2.2.1 Adjusting Output Current

TLC59025 sets I_{OUT} based on the external resistor R_{EXT} . Users can follow the below formula to calculate the target output current $I_{OUT,target}$ in the saturation region:

$$I_{OUT,target} = (1.21 \text{ V} / R_{EXT}) \times 15.5$$

Where R_{EXT} is the external resistance connected between R-EXT and GND. Using this equation, the output current is calculated to be approximately 26 mA at 720 Ω and 13 mA at 1440 Ω .

9.2.3 Application Curve

The default relationship after power on between $I_{OUT,target}$ and R_{EXT} is shown in 图 9-3.

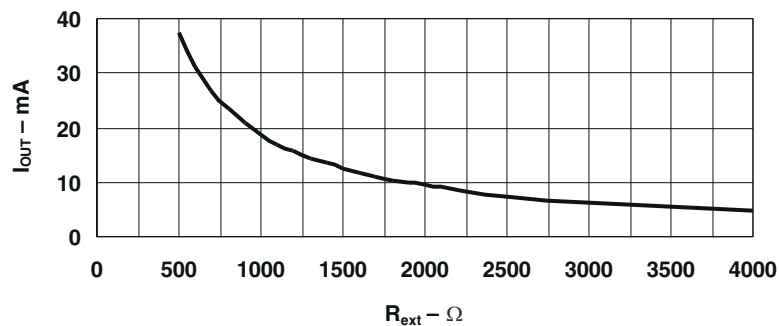


图 9-3. Default Relationship Curve Between $I_{OUT,target}$ and R_{ext} After Power Up

10 Power Supply Recommendations

The TLC59025 is designed to operate with a VDD range between 3 V and 5.5 V.

11 Layout

11.1 Layout Guidelines

The SDI, CLK, SDO, LE, and $\overline{OE}$ signals should all be kept from potential noise sources.

All traces carrying power through the LEDs should be wide enough to handle necessary currents.

All LED current passes through the device and into the ground node. There must be a strong connection between the device ground and the circuit board ground.

11.2 Layout Example

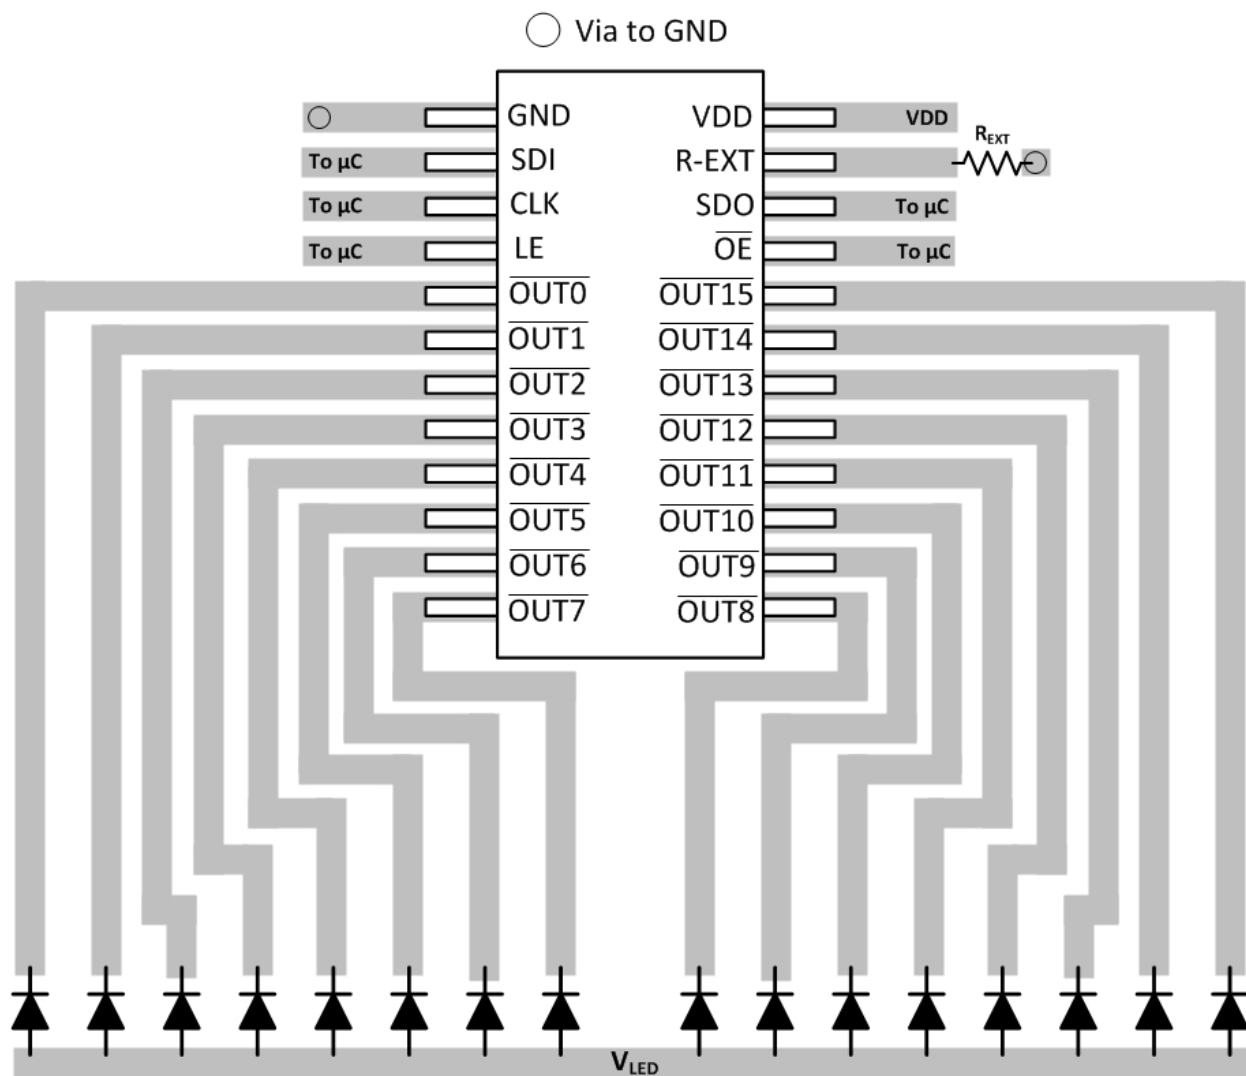


图 11-1. Layout Recommendation

12 Device and Documentation Support

12.1 支持资源

[TI E2E™ 支持论坛](#)是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

12.2 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

12.3 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

12.4 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TLC59025IDBQR	Active	Production	SSOP (DBQ) 24	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TLC59025I
TLC59025IDBQR.B	Active	Production	SSOP (DBQ) 24	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TLC59025I

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

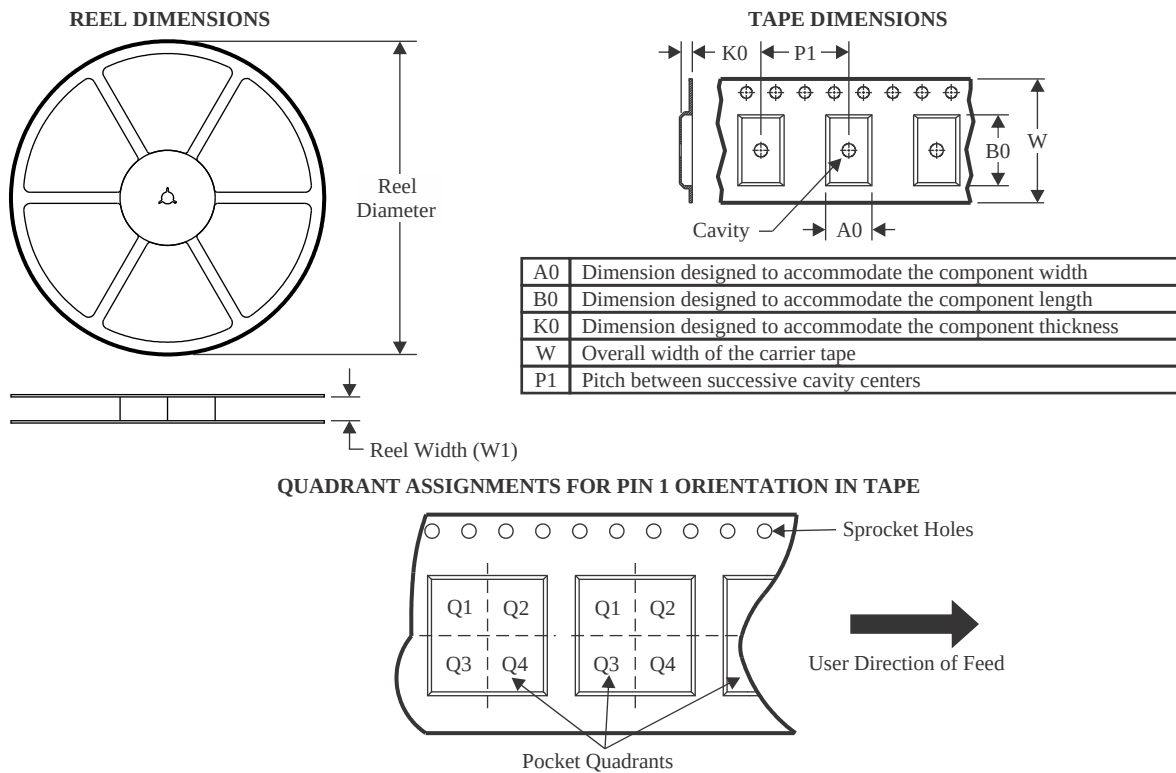

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLC59025IDBQR	SSOP	DBQ	24	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLC59025IDBQR	SSOP	DBQ	24	2500	353.0	353.0	32.0

DBQ (R-PDSO-G24)

PLASTIC SMALL-OUTLINE PACKAGE

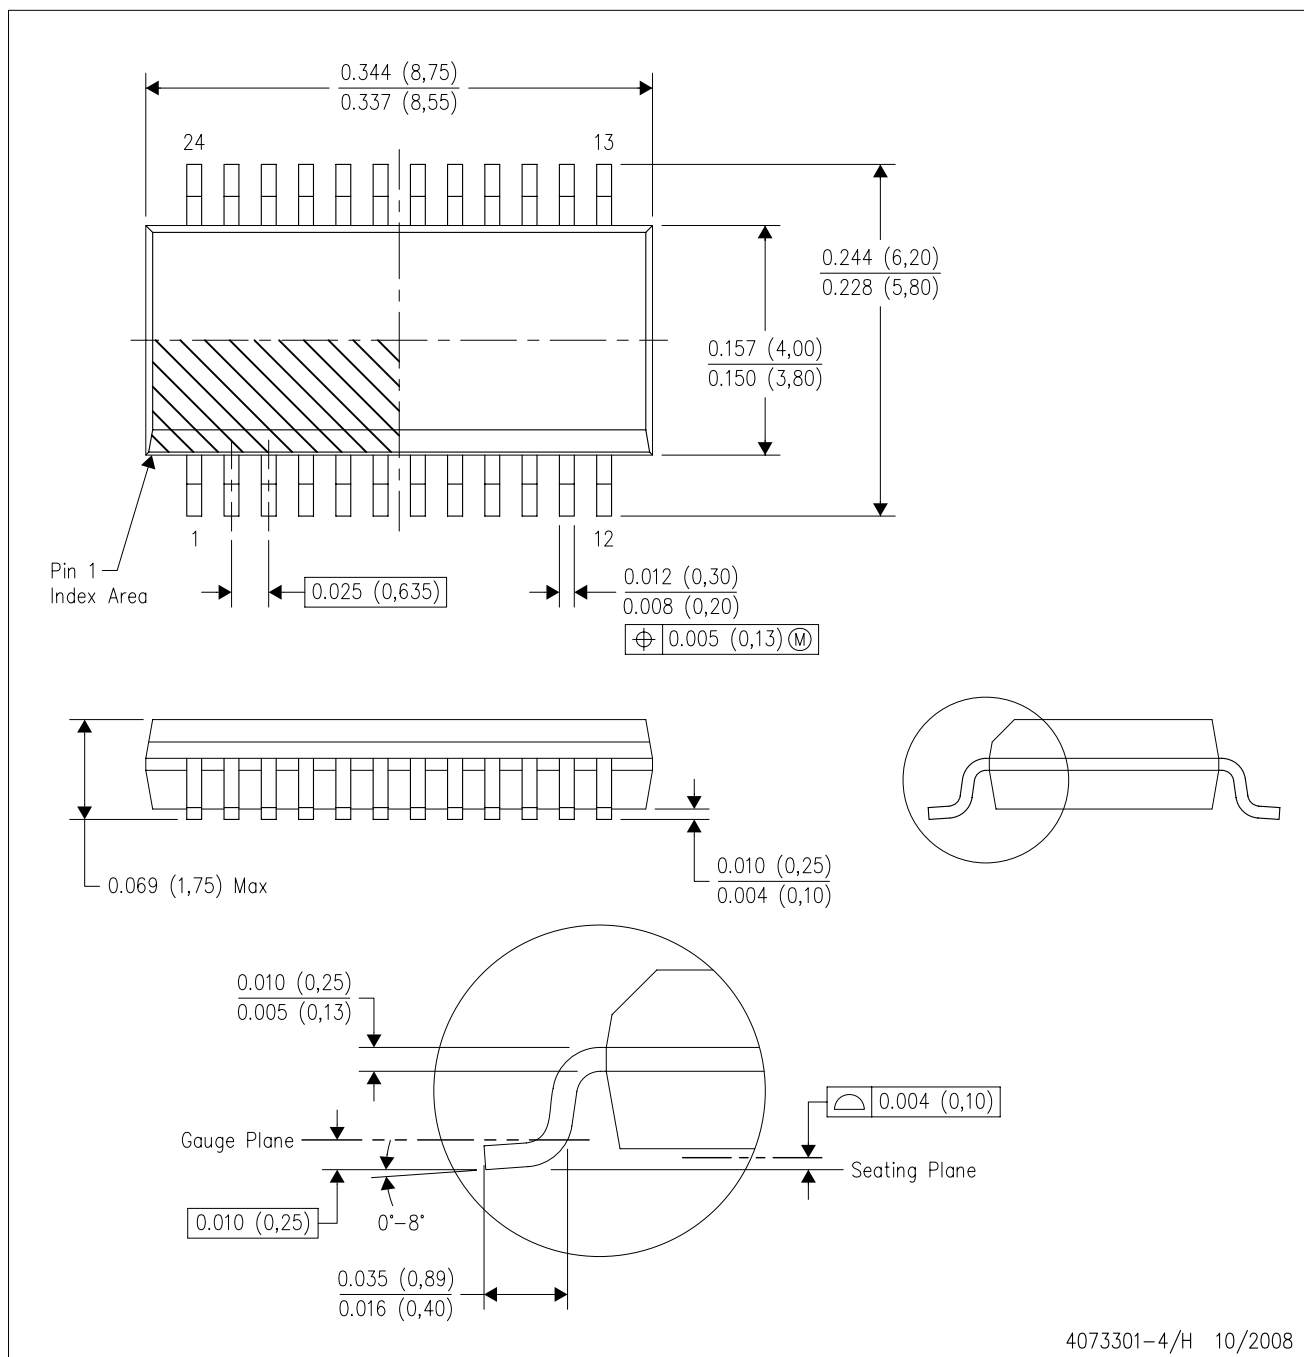

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
 - D. Falls within JEDEC MO-137 variation AE.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月