

## SYNCHRONOUS-BUCK MOSFET DRIVERS WITH DRIVE REGULATOR

### FEATURES

- Integrated Drive Regulator (4 V to 14 V)
- Adjustable/Adaptive Dead-Time Control
- 4-A Peak current at VDRV of 14 V
- 10-V to 15-V Supply Voltage Range
- TTL-Compatible Inputs
- Internal Schottky Diode Reduces Part Count
- Synchronous or Nonsynchronous Operation

### DESCRIPTION

The TPS2838/39/48/49 devices are MOSFET drivers designed for high-performance synchronous power supplies. The drivers can source and sink up to 4-A peak current at a 14-V drive voltage. These are ideal devices to use with power supply controllers that do not have on-chip drivers. The low-side driver is capable of driving loads of 3.3 nF in 10-ns rise/fall times and has 40-ns propagation delays at room temperature.


The MOSFET drivers have an integrated 150-mA regulator, so the gate drive voltage can be optimized for specific MOSFETs. The TPS2848 and TPS2849 have a fixed 8-V drive regulator, while the TPS2838/39 allow the drive regulator to be adjusted from 4 V to 14 V by selection of two external resistors.

- Inverting and Noninverting Options
- TSSOP PowerPad™ Package for Excellent Thermal Performance

### APPLICATIONS

- Single or Multiphase Synchronous-Buck Power Supplies
- High-Current DC/DC Power Modules

The devices feature VDRV to PGND shoot-through protection with adaptive/adjustable deadtime control. The deadtime, for turning on the high-side FET from LOWDR transitioning low, is adjustable with an external capacitor on the DELAY pin. This allows compensation for the effect the gate resistor has on the synchronous FET turn off. The adaptive deadtime prevents the turning on of the low-side FET until the voltage on the BOOTLO pin falls below a threshold after the high-side FET stops conducting. The high-side drive can be configured as a ground referenced driver or a floating bootstrap driver. The internal Schottky diode minimizes the size and number of external components needed for the bootstrap driver circuit. Only one external ceramic capacitor is required to configure the bootstrap driver.

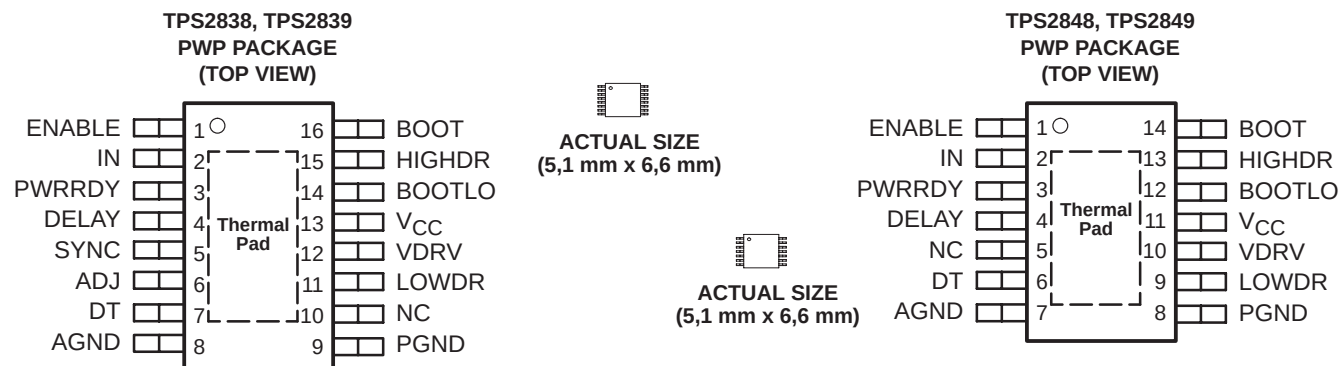

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


**description (continued)**

The SYNC pin can be used regardless of load to disable the synchronous FET driver and operate the power supply nonsynchronously.


A power ready/undervoltage lockout function outputs the status of the  $V_{CC}$ -pin voltage and driver regulator output on the open-drain PWRRDY pin. This feature can be used to enable a controller's output once the  $V_{CC}$  voltage reaches the threshold and the regulator output is stable. This function ensures both FET drivers are off when the  $V_{CC}$  voltage is below the voltage threshold.

The TPS2838/39/48/49 devices are offered in the thermally enhanced 14-pin and 16-pin PowerPAD TSSOP package. The PowerPAD package features an exposed leadframe on the bottom that can be soldered to the printed-circuit board to improve thermal efficiency. The TPS2838/48 are noninverting control logic while the TPS2839/49 drivers are inverting control logic.

functional block diagram (TPS2838, TPS2839)

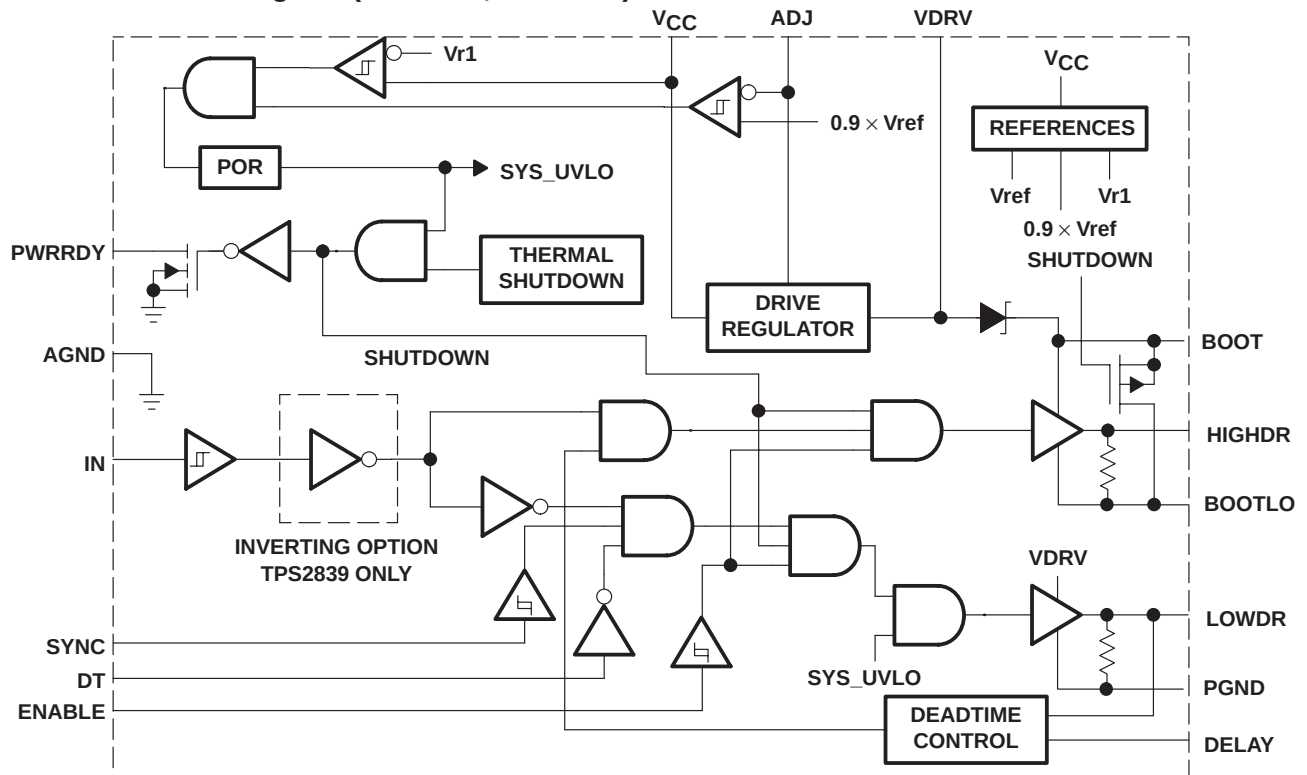

functional block diagram (TPS2848, TPS2849)

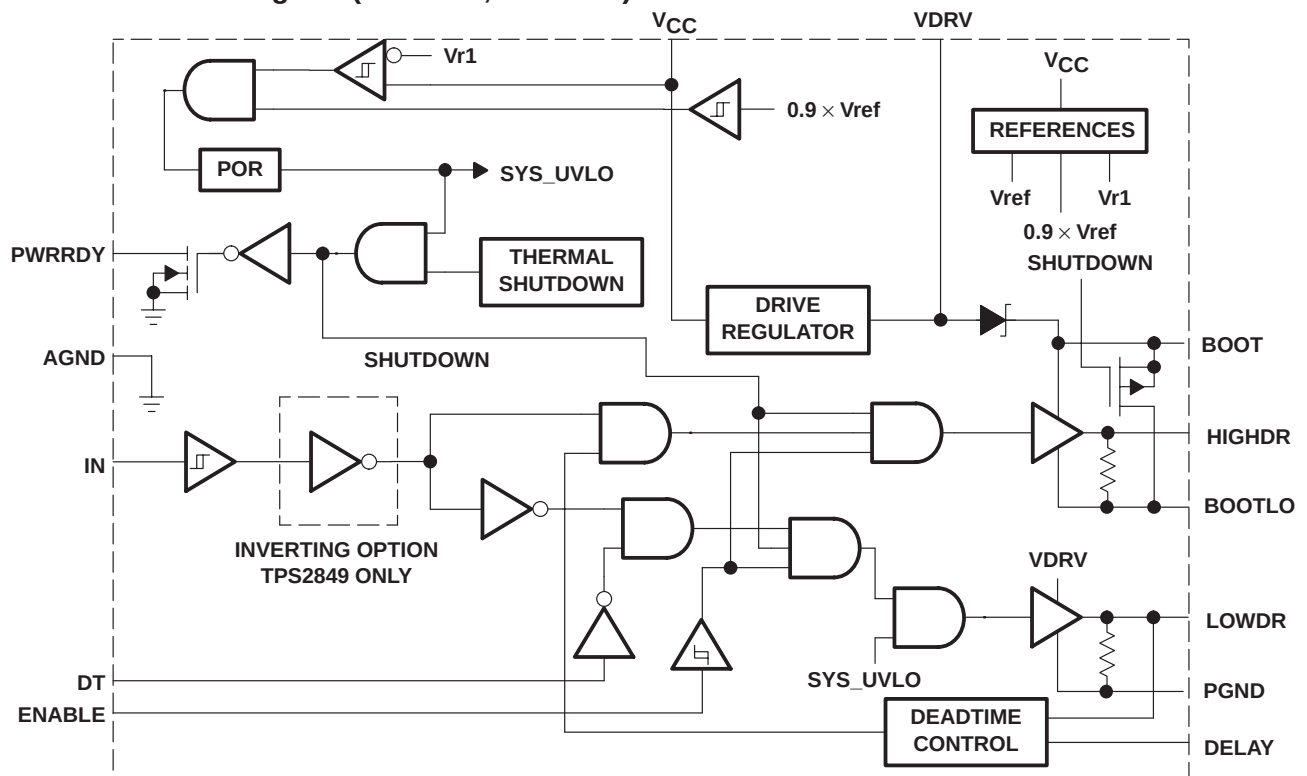

## Terminal Functions

| TERMINAL        |         |         | DESCRIPTION                                                                                                                                                                                        |
|-----------------|---------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME            | NO.     |         |                                                                                                                                                                                                    |
|                 | TPS283x | TPS284x |                                                                                                                                                                                                    |
| ADJ             | 6       | —       | Adjust. The adjust pin is the feedback pin for the drive regulator (TPS283X only)                                                                                                                  |
| AGND            | 8       | 7       | Analog ground                                                                                                                                                                                      |
| BOOT            | 16      | 14      | Bootstrap. A capacitor is connected between the BOOT and BOOTLO pins to develop the floating bootstrap voltage for the high-side MOSFET. The capacitor value is typically between 0.1 μF and 1 μF. |
| BOOTLO          | 14      | 12      | Boot low. This pin connects to the junction of the high-side and low-side MOSFETs.                                                                                                                 |
| DELAY           | 4       | 4       | Delay. Connecting a capacitor between this pin and ground adjusts the deadtime for high-side driver                                                                                                |
| DT              | 7       | 6       | Deadtime control. Connect DT to the junction of the high-side and low-side MOSFETs                                                                                                                 |
| ENABLE          | 1       | 1       | Enable. If ENABLE is low, both drivers are off.                                                                                                                                                    |
| HIGHDR          | 15      | 13      | High drive. This pin is the output drive for the high-side power MOSFET.                                                                                                                           |
| IN              | 2       | 2       | Input. This pin is the input signal to the MOSFET drivers.                                                                                                                                         |
| LOWDR           | 11      | 9       | Low drive. This pin is the output drive for the low-side power MOSFET.                                                                                                                             |
| NC              | 10      | 5       | No internal connection                                                                                                                                                                             |
| PGND            | 9       | 8       | Power ground. This pin is connected to the FET power ground.                                                                                                                                       |
| PWRRDY          | 3       | 3       | Power ready. This open-drain pin indicates a power good for VDRV and V <sub>CC</sub> .                                                                                                             |
| SYNC            | 5       | —       | Synchronous rectifier enable. If SYNC is low, the low-side driver is always off; if SYNC is high, the low-side driver provides gate drive to the low-side MOSFET.                                  |
| V <sub>CC</sub> | 13      | 11      | Input power supply. It is recommended that a capacitor (minimum 1 μF) be connected from V <sub>CC</sub> to PGND. Note that V <sub>CC</sub> must be 2 V higher than VDRV.                           |
| VDRV            | 12      | 10      | Drive regulator output voltage. It is recommended that a capacitor (minimum 1 μF) be connected from VDRV to PGND. Note that V <sub>CC</sub> must be 2 V higher than VDRV.                          |

## detailed description

### low-side driver

The low-side driver is designed to drive low  $r_{DS(on)}$  N-channel MOSFETs. The current rating of the driver is 4 A, source and sink.

### high-side driver

The high-side driver is designed to drive low  $r_{DS(on)}$  N-channel MOSFETs. The current rating of the driver is 4 A minimum, source and sink. The high-side driver can be configured as a GND-reference driver or as a floating-bootstrap driver. The internal bootstrap diode is a Schottky, for improved drive efficiency. The maximum voltage that can be applied from BOOT to ground is 30 V.

### dead-time (DT) control

Dead-time control prevents shoot-through current from flowing through the main power FETs during switching transitions by controlling the turnon times of the MOSFET drivers. The high-side driver is not allowed to turn on until the gate drive voltage to the low-side FET is low, and the low-side driver is not allowed to turn on until the voltage at the junction of the power FETs (BOOTLO) is low. The TTL-compatible DT terminal connects to the junction of the power FETs.

### ENABLE

The ENABLE terminal enables the drivers. When enable is low, the output drivers are low. ENABLE is a TTL-compatible digital terminal.

## detailed description (continued)

### IN

The IN terminal is a TTL-compatible digital terminal that is the input control signal for the drivers. The TPS2838/48 have noninverting inputs; the TPS2839/49 have inverting inputs. On the TPS2838 and TPS2848, a high on IN results in a high on HIGHDR. On the TPS2839 and TPS2849, a high on IN results in a low on HIGHDR.

### SYNC (TPS283x only)

The SYNC terminal controls whether the drivers operate in synchronous or nonsynchronous mode. In synchronous mode, the low-side FET is operated as a synchronous rectifier. In nonsynchronous mode, the low-side FET is always off. SYNC is a TTL-compatible digital terminal.

### PWRRDY

Depicts the status of the  $V_{CC}$  pin voltage and the driver regulator output on the open-drain PWRRDY pin.

### DELAY

Adjustable high-side turnon delay from from when the low-side FET is turned off.

### ADJ (TPS283x only)

Input for adjusting the driver regulator output. See the *application information* section for the adjustment formula.

## absolute maximum ratings over operating free-air temperature (unless otherwise noted)<sup>†</sup>

|                                                                        |                              |
|------------------------------------------------------------------------|------------------------------|
| Supply voltage range, $V_{CC}$ (see Note 1)                            | –0.3 V to 16 V               |
| Input voltage range: ADJ                                               | –0.3 V to 7 V                |
| BOOT to PGND (high-side driver ON)                                     | –0.3 V to 30 V               |
| BOOTLO to PGND                                                         | –0.3 V to 16 V               |
| BOOT to BOOTLO                                                         | –0.3 V to 16 V               |
| ENABLE, IN, and SYNC                                                   | –0.3 V to 16 V               |
| VDRV, PWRRDY, and DELAY                                                | –0.3 V to 16 V               |
| DT                                                                     | –0.3 V to 16 V               |
| Continuous total power dissipation                                     | See Dissipation Rating Table |
| Operating virtual junction temperature range, $T_J$                    | –40°C to 125°C               |
| Storage temperature range, $T_{stg}$                                   | –65°C to 150°C               |
| Lead temperature soldering 1,6 mm (1/16 inch) from case for 10 seconds | 260°C                        |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: Unless otherwise specified, all voltages are with respect to PGND.

**DISSIPATION RATING TABLE**

| PACKAGE                                | T <sub>A</sub> ≤ 25°C | DERATING FACTOR | T <sub>A</sub> = 70°C | T <sub>A</sub> = 85°C |
|----------------------------------------|-----------------------|-----------------|-----------------------|-----------------------|
| 14-pin PWP with solder <sup>‡</sup>    | 2668                  | 26.68 mW/°C     | 1467                  | 1067                  |
| 14-pin PWP without solder <sup>‡</sup> | 1024                  | 10.24 mW/°C     | 563                   | 409                   |
| 16-pin PWP with solder <sup>‡</sup>    | 2739                  | 27.39 mW/°C     | 1506                  | 1095                  |
| 16-pin PWP without solder <sup>‡</sup> | 1108                  | 11.08 mW/°C     | 609                   | 443                   |

**JUNCTION-CASE THERMAL RESISTANCE TABLE**

|            |                                  |           |
|------------|----------------------------------|-----------|
| 14-pin PWP | Junction-case thermal resistance | 2.07 °C/W |
| 16-pin PWP | Junction-case thermal resistance | 2.07 °C/W |

<sup>‡</sup> Test Board Conditions:

1. Thickness: 0.062"
2. 3" × 3" (for packages < 27 mm long)
3. 4" × 4" (for packages > 27 mm long)
4. 2-oz copper traces located on the top of the board (0,071 mm thick)
5. Copper areas located on the top and bottom of the PCB for soldering
6. Power and ground planes, 1-oz copper (0,036 mm thick)
7. Thermal vias, 0,33 mm diameter, 1,5 mm pitch
8. Thermal isolation of power plane

For more information, refer to TI technical brief literature number SLMA002.

## recommended operating conditions

|                                              | MIN | NOM | MAX | UNIT |
|----------------------------------------------|-----|-----|-----|------|
| Supply voltage, V <sub>CC</sub>              | 10  |     | 15  | V    |
| Input voltage, V <sub>I</sub>   BOOT to PGND | 10  |     | 29  | V    |

**electrical characteristics over recommended operating virtual junction temperature range,  
V<sub>CC</sub> = 12 V, ENABLE = High, C<sub>L</sub> = 3.3 nF (unless otherwise noted)**

## supply current

| PARAMETER                         | TEST CONDITIONS                          | MIN | TYP | MAX | UNIT |
|-----------------------------------|------------------------------------------|-----|-----|-----|------|
| I <sub>CC</sub> Quiescent current | V(ENABLE) = Low, V <sub>CC</sub> = 13 V  |     |     | 425 | μA   |
|                                   | V(ENABLE) = High, V <sub>CC</sub> = 13 V |     |     | 1   | mA   |

NOTE 2: Ensured by design, not production tested.

**electrical characteristics over recommended operating virtual junction temperature range,  
 $V_{CC} = 12\text{ V}$ ,  $\text{ENABLE} = \text{High}$ ,  $C_L = 3.3\text{ nF}$  (unless otherwise noted) (continued)**

**dead-time control**

| PARAMETER                                             | TEST CONDITIONS                                                                                               | MIN | TYP | MAX | UNIT  |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----|-----|-----|-------|
| $V_{IH}(\text{LOWDR})$ LOWDR high-level input voltage | Over full VDRV range See Note 2                                                                               | 50  |     |     | %VDRV |
| $V_{IL}(\text{LOWDR})$ LOWDR low-level input voltage  | Over full VDRV range See Note 2                                                                               |     |     | 1   | V     |
| $V_{IH}(\text{DT})$ DT high-level input voltage       | Over full $V_{CC}$ range                                                                                      | 2   |     |     | V     |
| $V_{IL}(\text{DT})$ DT low-level input voltage        | Over full $V_{CC}$ range                                                                                      |     |     | 1   | V     |
| Deadtime delay                                        | $V(\text{VDRV}) = 4\text{ V to }14\text{ V}$ See Note 2                                                       | 0.5 | 1   | 1.5 | ns/pF |
| Driver nonoverlap time (DT to LOWDR)                  | $V(\text{VDRV}) = 4.5\text{ V}$ , $T_J = 25^\circ\text{C}$ , See Note 2                                       | 30  |     | 150 | ns    |
|                                                       | $V(\text{VDRV}) = 14.5\text{ V}$ , $T_J = 25^\circ\text{C}$ , See Note 2                                      | 30  |     | 100 | ns    |
| Driver nonoverlap time (LOWDR to HIGHDR)              | $V(\text{VDRV}) = 4.5\text{ V}$ , $C_L(\text{Delay}) = 50\text{ pF}$ , $T_J = 25^\circ\text{C}$ , See Note 2  | 75  |     | 180 | ns    |
|                                                       | $V(\text{VDRV}) = 14.5\text{ V}$ , $C_L(\text{Delay}) = 50\text{ pF}$ , $T_J = 25^\circ\text{C}$ , See Note 2 | 58  |     | 125 |       |
| Driver nonoverlap time (LOWDR to HIGHDR)              | $V(\text{VDRV}) = 4.5\text{ V}$ , $C_L(\text{Delay}) = 0\text{ pF}$ , $T_J = 25^\circ\text{C}$ , See Note 2   | 50  |     | 125 | ns    |
|                                                       | $V(\text{VDRV}) = 14.5\text{ V}$ , $C_L(\text{Delay}) = 0\text{ pF}$ , $T_J = 25^\circ\text{C}$ , See Note 2  | 30  |     | 100 |       |

NOTE 2: Ensured by design, not production tested.

**high-side driver**

| PARAMETER                                                                     | TEST CONDITIONS                                                                        | MIN                                      | TYP | MAX | UNIT       |
|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------|-----|-----|------------|
| Peak output current                                                           | $V(\text{BOOT}) - V(\text{BOOTLO}) = 4\text{ V}$ ,<br>See Note 2                       | $V(\text{HIGHDR}) = 0.5\text{ V (src)}$  | 1   | 1.3 | A          |
|                                                                               |                                                                                        | $V(\text{HIGHDR}) = 4\text{ V (sink)}$   | 2   | 2.4 |            |
|                                                                               | $V(\text{BOOT}) - V(\text{BOOTLO}) = 8\text{ V}$ ,<br>See Note 2                       | $V(\text{HIGHDR}) = 0.5\text{ V (src)}$  | 2   | 2.4 |            |
|                                                                               |                                                                                        | $V(\text{HIGHDR}) = 8\text{ V (sink)}$   | 2   | 3.3 |            |
| $r_o$ Output resistance                                                       | $V(\text{BOOT}) - V(\text{BOOTLO}) = 14\text{ V}$ ,<br>See Note 2                      | $V(\text{HIGHDR}) = 0.5\text{ V (src)}$  | 2   | 3.9 | $\Omega$   |
|                                                                               |                                                                                        | $V(\text{HIGHDR}) = 14\text{ V (sink)}$  | 2   | 4.4 |            |
|                                                                               | $V(\text{BOOT}) - V(\text{BOOTLO}) = 4.5\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$       | $V(\text{HIGHDR}) = 4\text{ V (src)}$    |     | 45  |            |
|                                                                               |                                                                                        | $V(\text{HIGHDR}) = 0.5\text{ V (sink)}$ |     | 6   |            |
| $t_r/t_f$ Rise and fall time<br>(see Notes 2 and 3)                           | $V(\text{BOOT}) - V(\text{BOOTLO}) = 7.5\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$       | $V(\text{HIGHDR}) = 7\text{ V (src)}$    |     | 26  | ns         |
|                                                                               |                                                                                        | $V(\text{HIGHDR}) = 0.5\text{ V (sink)}$ |     | 5   |            |
|                                                                               | $V(\text{BOOT}) - V(\text{BOOTLO}) = 11.5\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$      | $V(\text{HIGHDR}) = 11\text{ V (src)}$   |     | 20  |            |
|                                                                               |                                                                                        | $V(\text{HIGHDR}) = 0.5\text{ V (sink)}$ |     | 4   |            |
| HIGHDRV-to-BOOTLO resistor                                                    |                                                                                        |                                          | 250 |     | k $\Omega$ |
| $t_r/t_f$ Rise and fall time<br>(see Notes 2 and 3)                           | $C_L = 3.3\text{ nF}$ , $V(\text{BOOTLO}) = \text{GND}$ ,<br>$T_J = 125^\circ\text{C}$ | $V(\text{BOOT}) = 4\text{ V}$            |     | 85  | ns         |
|                                                                               |                                                                                        | $V(\text{BOOT}) = 8\text{ V}$            |     | 70  |            |
|                                                                               |                                                                                        | $V(\text{BOOT}) = 14\text{ V}$           |     | 65  |            |
|                                                                               | $C_L = 10\text{ nF}$ , $V(\text{BOOTLO}) = \text{GND}$ ,<br>$T_J = 125^\circ\text{C}$  | $V(\text{BOOT}) = 4\text{ V}$            |     | 170 |            |
|                                                                               |                                                                                        | $V(\text{BOOT}) = 8\text{ V}$            |     | 140 |            |
|                                                                               |                                                                                        | $V(\text{BOOT}) = 14\text{ V}$           |     | 100 |            |
| $t_{PHL}$ Propagation delay time,<br>HIGHDR going low<br>(excluding deadtime) | $V(\text{BOOTLO}) = \text{GND}$ , $T_J = 125^\circ\text{C}$ ,<br>See Notes 2 and 3     | $V(\text{BOOT}) = 4\text{ V}$            |     | 120 | ns         |
|                                                                               |                                                                                        | $V(\text{BOOT}) = 8\text{ V}$            |     | 100 |            |
|                                                                               |                                                                                        | $V(\text{BOOT}) = 14\text{ V}$           |     | 80  |            |

NOTES: 2: Ensured by design, not production tested.

3. The pullup/pulldown circuits of the drivers are bipolar and MOSFET transistors in parallel. The peak output current rating is the combined current from the bipolar and MOSFET transistors. The output resistance is the  $r_{DS(on)}$  of the MOSFET transistor when the voltage on the driver output is less than the saturation voltage of the bipolar transistor.

**electrical characteristics over recommended operating virtual junction temperature range,  
 $V_{CC} = 12\text{ V}$ ,  $\text{ENABLE} = \text{High}$ ,  $C_L = 3.3\text{ nF}$  (unless otherwise noted) (continued)**

**low-side driver**

| PARAMETER                                                                      |                                                  | TEST CONDITIONS                                                                    |                                         | MIN | TYP | MAX | UNIT       |
|--------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------|-----|-----|-----|------------|
| Peak output current                                                            |                                                  | $V(\text{VDRV}) = 4\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$ ,<br>See Note 2        | $V(\text{LOWDR}) = 0.5\text{ V (src)}$  | 1   | 1.6 |     | A          |
|                                                                                |                                                  |                                                                                    | $V(\text{LOWDR}) = 4\text{ V (sink)}$   | 2   | 2.4 |     |            |
|                                                                                |                                                  | $V(\text{VDRV}) = 8\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$ ,<br>See Note 2        | $V(\text{HIGHDR}) = 0.5\text{ V (src)}$ | 2   | 2.4 |     |            |
|                                                                                |                                                  |                                                                                    | $V(\text{HIGHDR}) = 8\text{ V (sink)}$  | 2   | 3.3 |     |            |
|                                                                                |                                                  | $V(\text{VDRV}) = 14\text{ V (src)}$ ,<br>$T_J = 25^\circ\text{C}$ ,<br>See Note 2 | $V(\text{HIGHDR}) = 0.5\text{ V (src)}$ | 2   | 3.9 |     |            |
|                                                                                |                                                  |                                                                                    | $V(\text{HIGHDR}) = 14\text{ V (sink)}$ | 2   | 4.4 |     |            |
| $r_o$ Output resistance                                                        |                                                  | $V(\text{VDRV}) = 4.5\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$                      | $V(\text{LOWDR}) = 4\text{ V (src)}$    |     |     | 30  | $\Omega$   |
|                                                                                |                                                  |                                                                                    | $V(\text{LOWDR}) = 0.5\text{ V (sink)}$ |     |     | 8   |            |
|                                                                                |                                                  | $V(\text{VDRV}) = 7.5\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$                      | $V(\text{LOWDR}) = 7\text{ V (src)}$    |     |     | 25  |            |
|                                                                                |                                                  |                                                                                    | $V(\text{LOWDR}) = 0.5\text{ V (sink)}$ |     |     | 7   |            |
|                                                                                |                                                  | $V(\text{VDRV}) = 11.5\text{ V}$ ,<br>$T_J = 25^\circ\text{C}$                     | $V(\text{LOWDR}) = 11\text{ V (src)}$   |     |     | 22  |            |
|                                                                                |                                                  |                                                                                    | $V(\text{LOWDR}) = 0.5\text{ V (sink)}$ |     |     | 6   |            |
| LOWDR-to-PGND resistor                                                         |                                                  |                                                                                    |                                         |     | 250 |     | k $\Omega$ |
| $t_r/t_f$ Rise and fall time                                                   |                                                  | $C_L = 3.3\text{ nF}$ ,<br>$T_J = 125^\circ\text{C}$ ,<br>See Note 2               | $V(\text{VDRV}) = 4\text{ V}$           |     |     | 60  | ns         |
|                                                                                |                                                  |                                                                                    | $V(\text{VDRV}) = 8\text{ V}$           |     |     | 50  |            |
|                                                                                |                                                  |                                                                                    | $V(\text{VDRV}) = 14\text{ V}$          |     |     | 40  |            |
|                                                                                |                                                  | $C_L = 10\text{ nF}$ ,<br>$T_J = 125^\circ\text{C}$ ,<br>See Note 2                | $V(\text{VDRV}) = 4\text{ V}$           |     |     | 110 |            |
|                                                                                |                                                  |                                                                                    | $V(\text{VDRV}) = 8\text{ V}$           |     |     | 100 |            |
|                                                                                |                                                  |                                                                                    | $V(\text{VDRV}) = 14\text{ V}$          |     |     | 80  |            |
| $t_{\text{PLH}}$ Propagation delay time, LOWDR going high (excluding deadtime) | $T_J = 125^\circ\text{C}$ ,<br>See Notes 2 and 3 | $V(\text{VDRV}) = 4\text{ V}$                                                      |                                         |     | 110 | ns  |            |
|                                                                                |                                                  | $V(\text{VDRV}) = 8\text{ V}$                                                      |                                         |     | 90  | ns  |            |
|                                                                                |                                                  | $V(\text{VDRV}) = 14\text{ V}$                                                     |                                         |     | 80  | ns  |            |

NOTES: 2: Ensured by design, not production tested.

3: The pullup/pulldown circuits of the drivers are bipolar and MOSFET transistors in parallel. The peak output current rating is the combined current from the bipolar and MOSFET transistors. The output resistance is the  $r_{DS(on)}$  of the MOSFET transistor when the voltage on the driver output is less than the saturation voltage of the bipolar transistor.

**$V_{CC}$  undervoltage lockout**

| PARAMETER                       | TEST CONDITIONS             | MIN | TYP | MAX  | UNIT |
|---------------------------------|-----------------------------|-----|-----|------|------|
| Start threshold voltage         |                             |     |     | 10.3 | V    |
| Stop threshold voltage          |                             | 7.5 |     |      | V    |
| $V_{hys}$ Hysteresis voltage    |                             | 1   | 1.5 |      | V    |
| $t_{pd}$ Propagation delay time | 50-mV overdrive, See Note 2 |     | 300 | 1000 | ns   |
| $t_d$ Falling-edge delay time   | See Note 2                  | 2   |     | 5    | us   |

NOTE 2: Ensured by design, not production tested.



**electrical characteristics over recommended operating virtual junction temperature range,  
 $V_{CC} = 12\text{ V}$ , ENABLE = High,  $C_L = 3.3\text{ nF}$  (unless otherwise noted) (continued)**

**digital control (IN, ENABLE, SYNC)**

| PARAMETER                     |                          | TEST CONDITIONS | MIN                             | TYP | MAX | UNIT |
|-------------------------------|--------------------------|-----------------|---------------------------------|-----|-----|------|
| V <sub>IH</sub>               | High-level input voltage | IN              | Over full V <sub>CC</sub> range |     |     | V    |
|                               |                          | ENABLE, SYNC    | Over full V <sub>CC</sub> range |     |     | V    |
| V <sub>IL</sub>               | Low-level input voltage  | IN              | Over full V <sub>CC</sub> range |     |     | V    |
|                               |                          | ENABLE, SYNC    | Over full V <sub>CC</sub> range |     |     | V    |
| ENABLE propagation delay time |                          | See Note 2      | 2                               |     | 7   | μs   |

NOTE 2: Ensured by design, not production tested.

**thermal shutdown**

| PARAMETER        |                         | TEST CONDITIONS | MIN | TYP | MAX | UNIT               |
|------------------|-------------------------|-----------------|-----|-----|-----|--------------------|
| Thermal shutdown |                         | See Note 2      | 155 | 170 | 185 | $^{\circ}\text{C}$ |
| $t_d$            | Falling edge delay time | See Note 2      | 10  |     | 20  | $\mu\text{s}$      |

NOTE 2: Ensured by design, not production tested.

**drive regulator**

| PARAMETER                  |                   | TEST CONDITIONS                                                              | MIN | TYP   | MAX  | UNIT          |
|----------------------------|-------------------|------------------------------------------------------------------------------|-----|-------|------|---------------|
| Recommended output voltage |                   |                                                                              | 4   |       | 14   | V             |
| $V_O$                      | Output voltage    | $V_{CC} = 10\text{ V to }15\text{ V}$ , $I_O = 5\text{ mA to }150\text{ mA}$ | -2  |       | 2    | %nom          |
| $V_{ref}$                  | Reference voltage | $V_{CC} = 10\text{ V to }15\text{ V}$                                        |     | 1.235 |      | V             |
| Dropout voltage            |                   | $V_{CC} = 10\text{ V}$ ,<br>See Note 2 $I_O = 150\text{ mA}$                 |     | 1000  | 1100 | mV            |
| Line regulation            |                   | $V_{CC} = 10\text{ V to }15\text{ V}$ , $I_O = 5\text{ mA}$                  |     | 0.2   |      | %/V           |
| Load regulation            |                   | $V_{CC} = 10\text{ V}$ , $I_O = 5\text{ mA to }150\text{ mA}$                |     | 2     |      | %             |
| Current limit              |                   | $V_{CC} = 8\text{ V}$                                                        |     | 0.5   | 0.6  | A             |
| PWRRDY saturation voltage  |                   | $I_O = 5\text{ mA}$                                                          |     |       | 0.8  | V             |
| $I_{lkg}$                  | Leakage current   | $V_I(\text{PWRRDY}) = 4.5\text{ V}$                                          |     |       | 1    | $\mu\text{A}$ |

**drive regulator undervoltage lockout**

| PARAMETER               |                        | TEST CONDITIONS             | MIN | TYP | MAX  | UNIT          |
|-------------------------|------------------------|-----------------------------|-----|-----|------|---------------|
| Start threshold voltage |                        | See Note 2                  |     |     | 85   | %Vref         |
| Stop threshold voltage  |                        | See Note 2                  | 80  |     |      | %Vref         |
| $V_{hys}$               | Hysteresis voltage     | See Note 2                  | 2.5 | 5   |      | %Vref         |
| $t_{pd}$                | Propagation delay time | 50-mV overdrive, See Note 2 |     | 300 | 1000 | ns            |
| Falling-edge delay time |                        | See Note 2                  | 2   |     | 5    | $\mu\text{s}$ |
| Power on reset time     |                        | See Note 2                  |     | 100 | 1000 | $\mu\text{s}$ |

NOTE 2: Ensured by design, not production tested.

PARAMETER MEASUREMENT INFORMATION

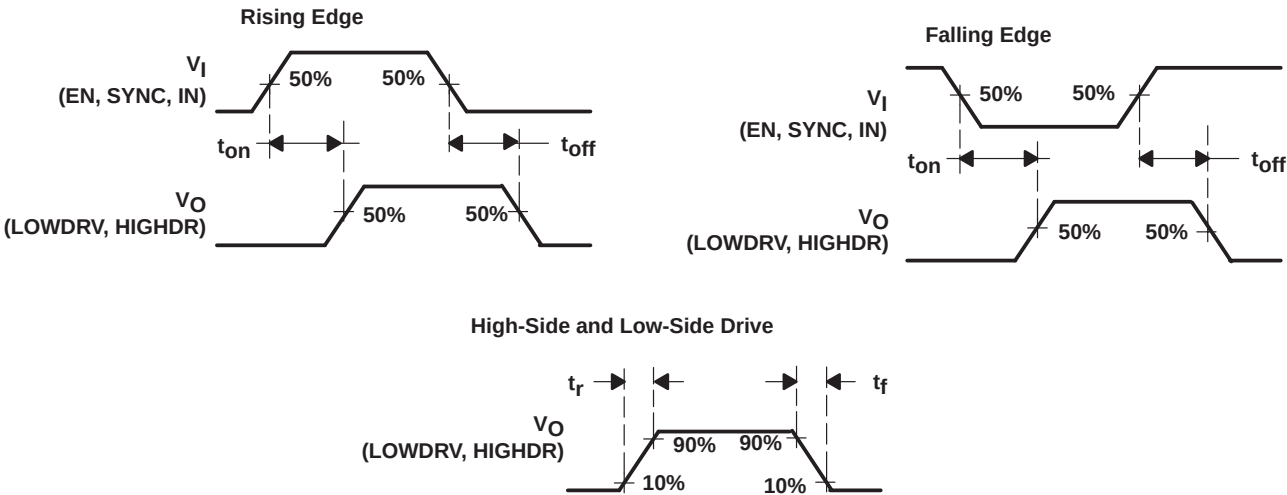


Figure 1. Voltage Waveforms

TYPICAL CHARACTERISTICS

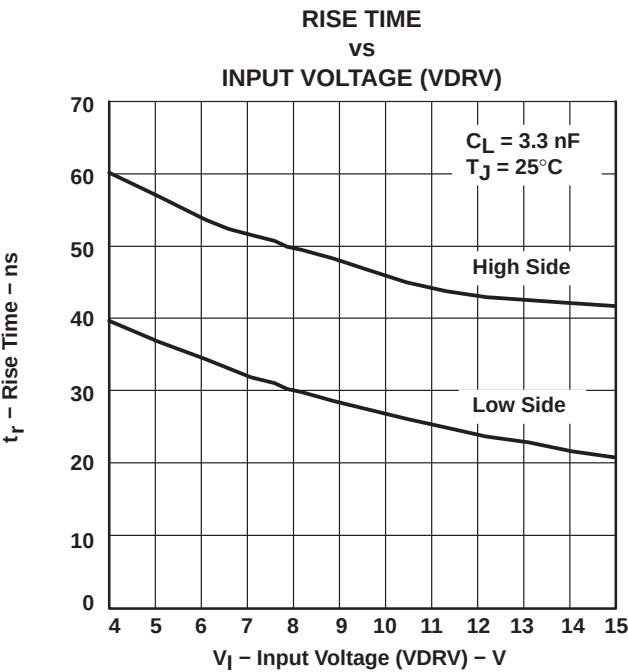


Figure 2

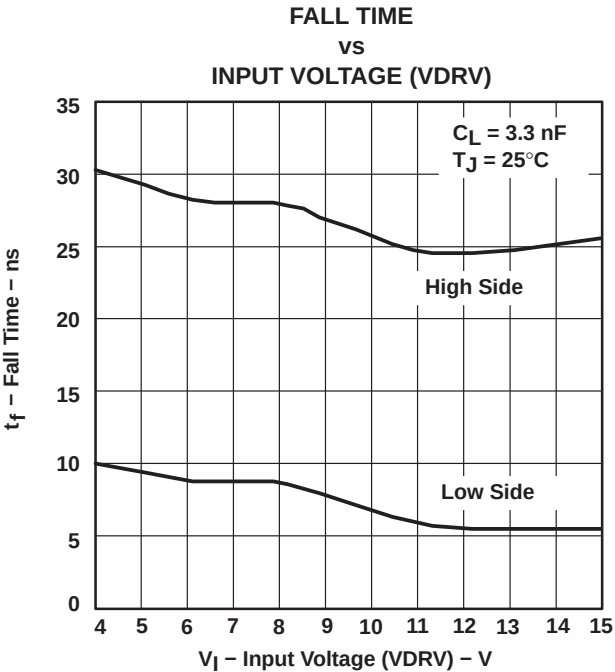


Figure 3

## TYPICAL CHARACTERISTICS

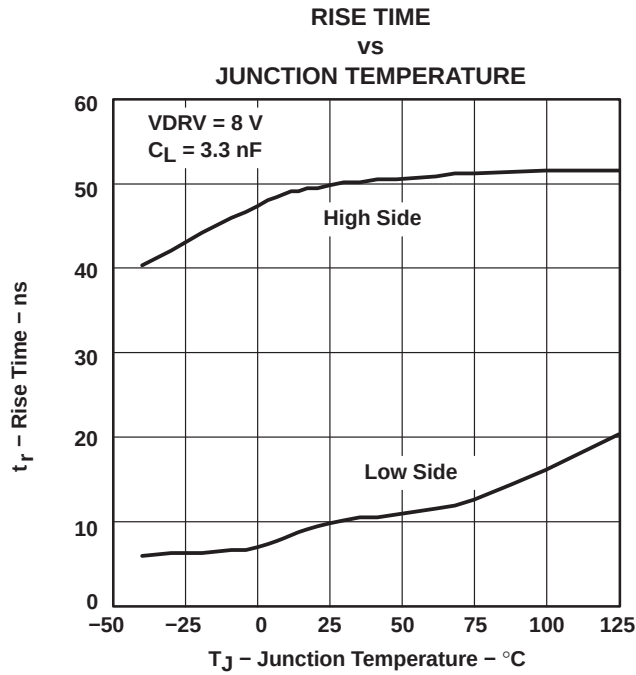


Figure 4

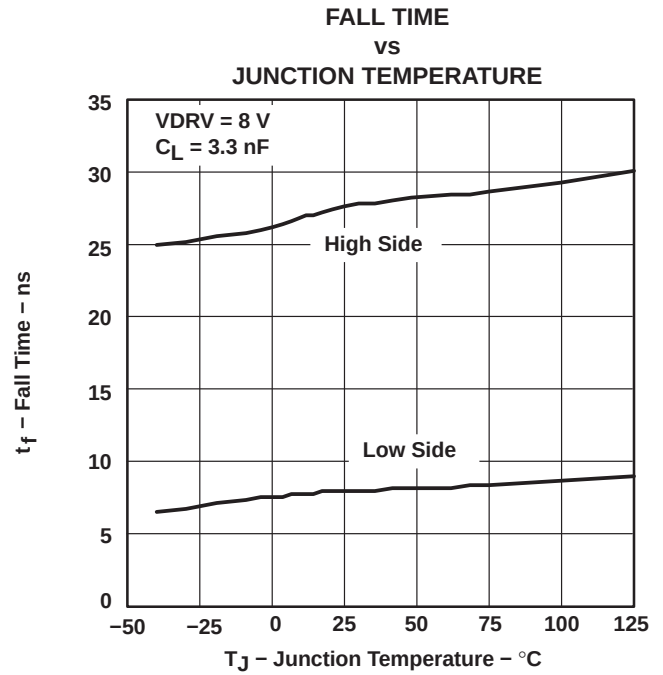


Figure 5

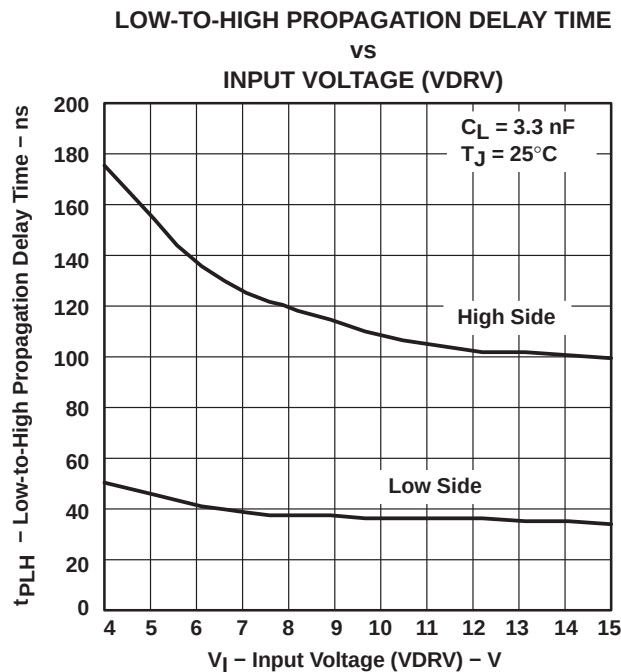


Figure 6

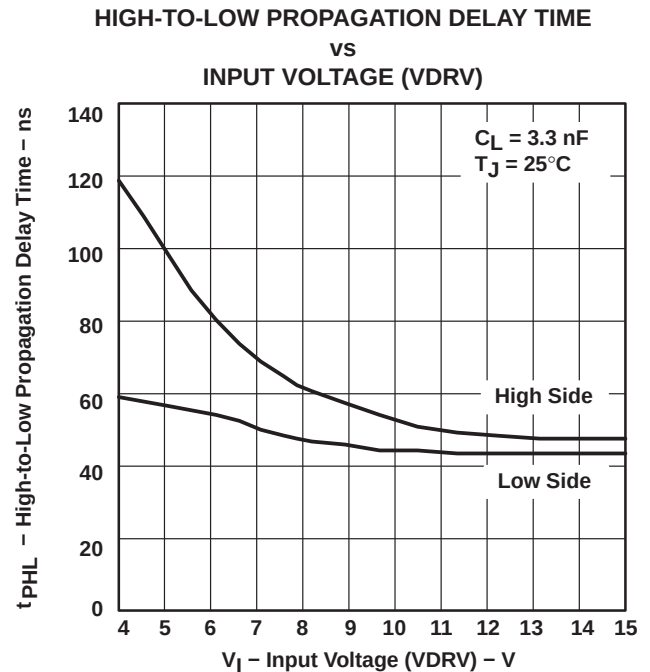


Figure 7

## TYPICAL CHARACTERISTICS

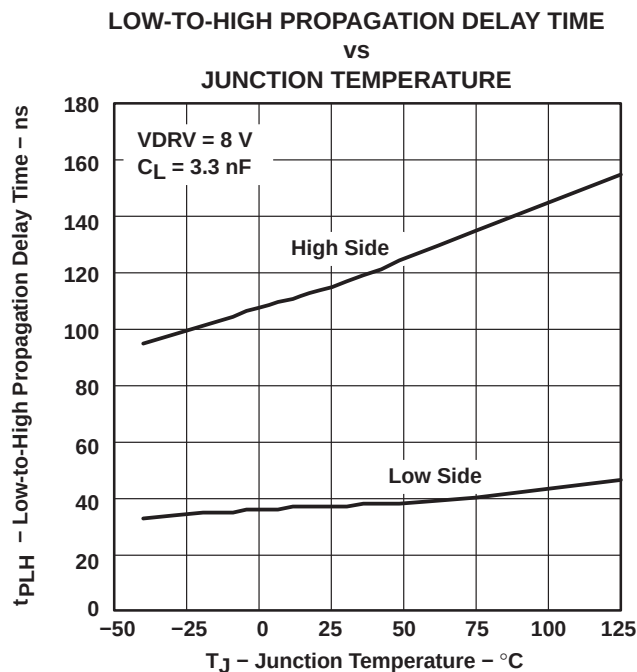


Figure 8

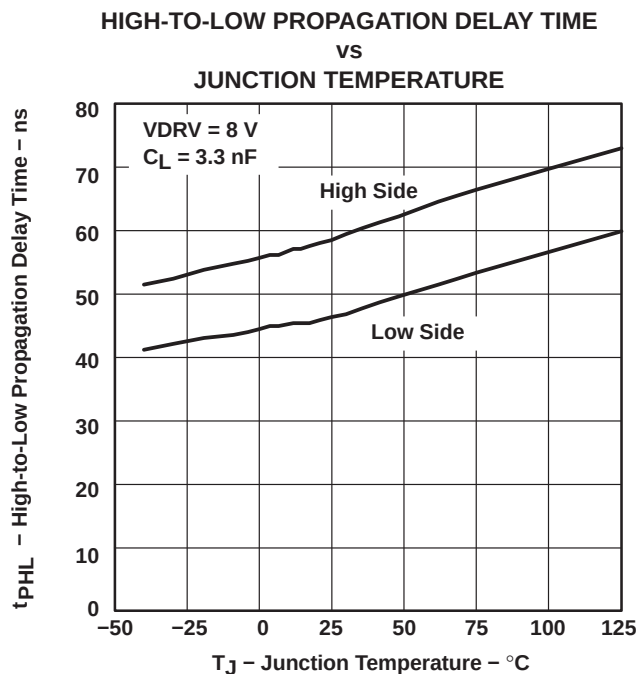


Figure 9

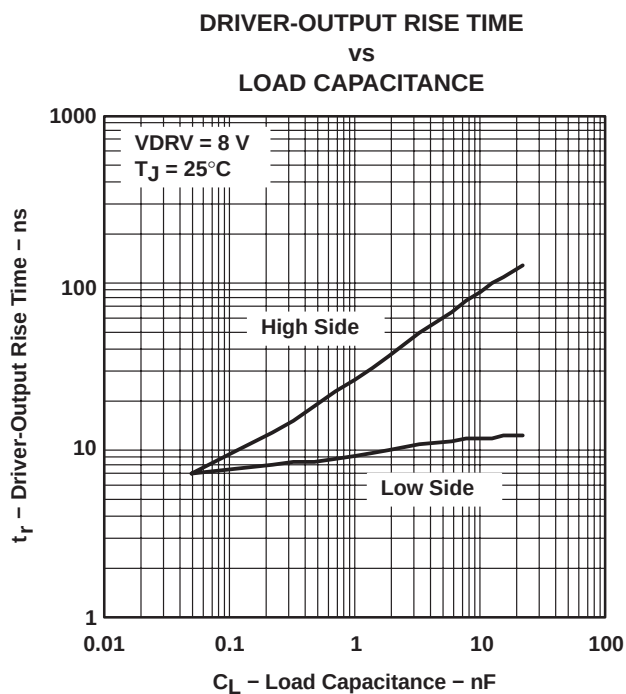


Figure 10

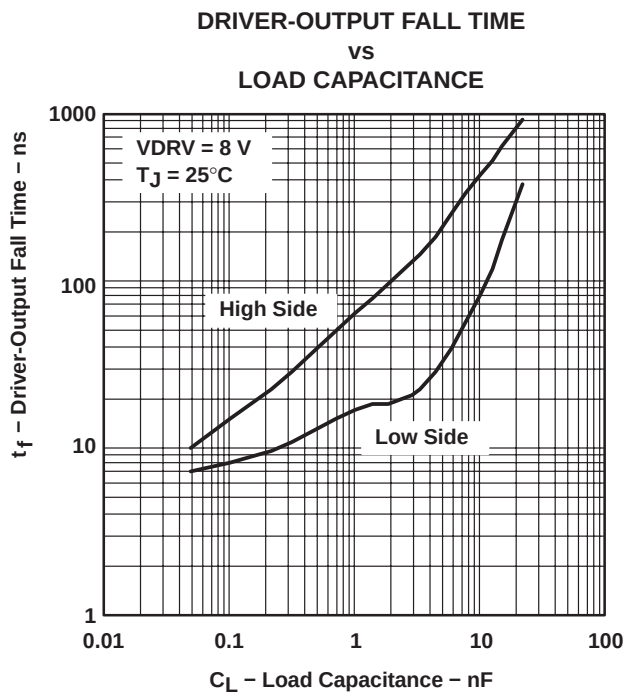


Figure 11

## TYPICAL CHARACTERISTICS

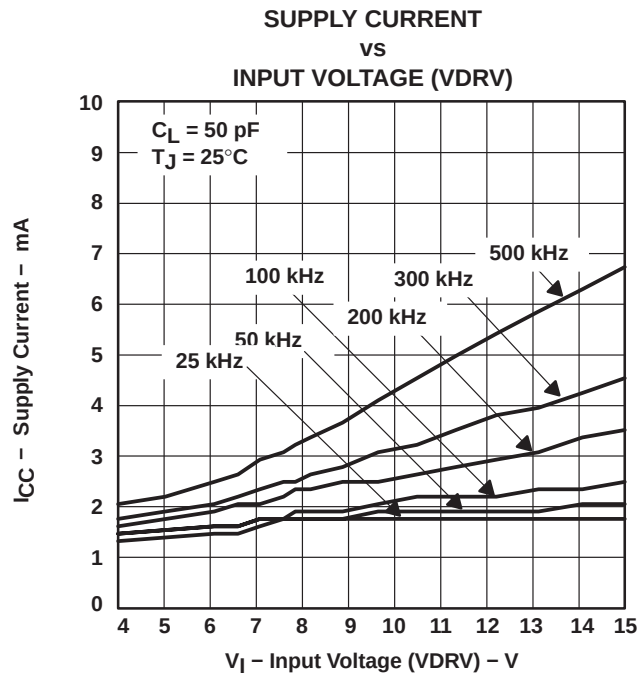


Figure 12

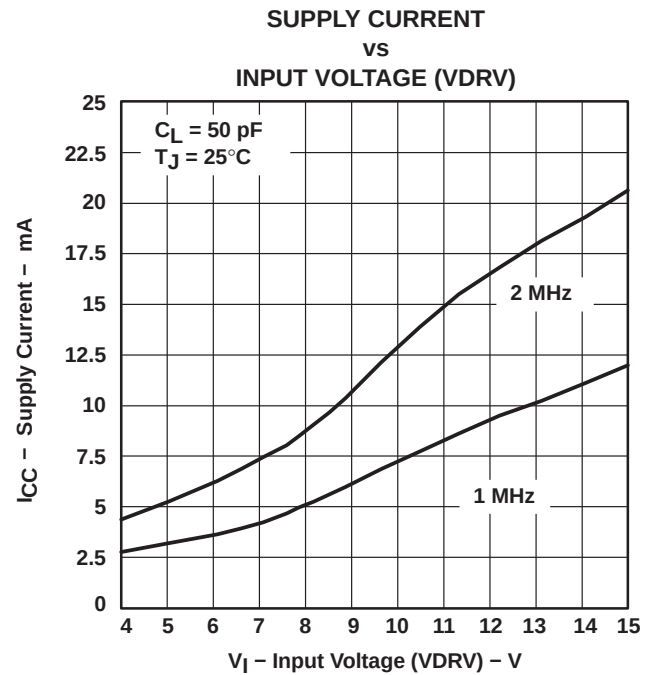


Figure 13

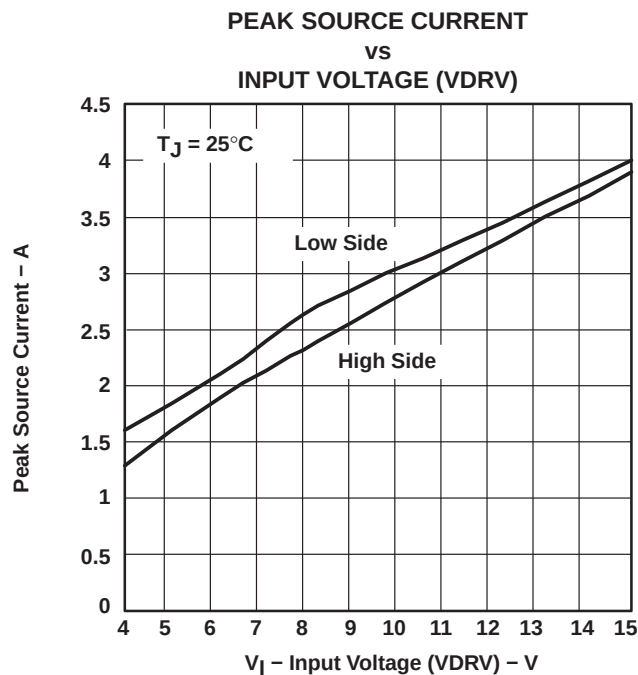


Figure 14

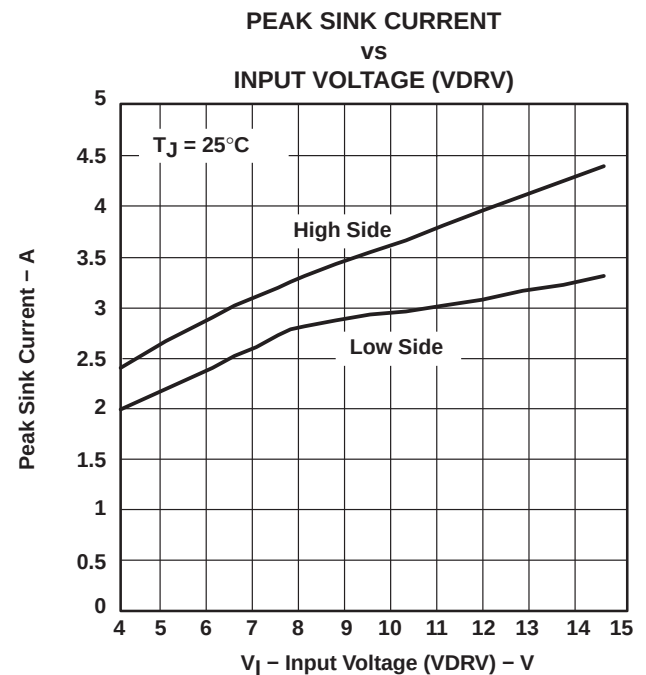


Figure 15

## TYPICAL CHARACTERISTICS

START/STOP  $V_{CC}$  UNDERVOLTAGE LOCKOUT  
VS  
JUNCTION TEMPERATURE

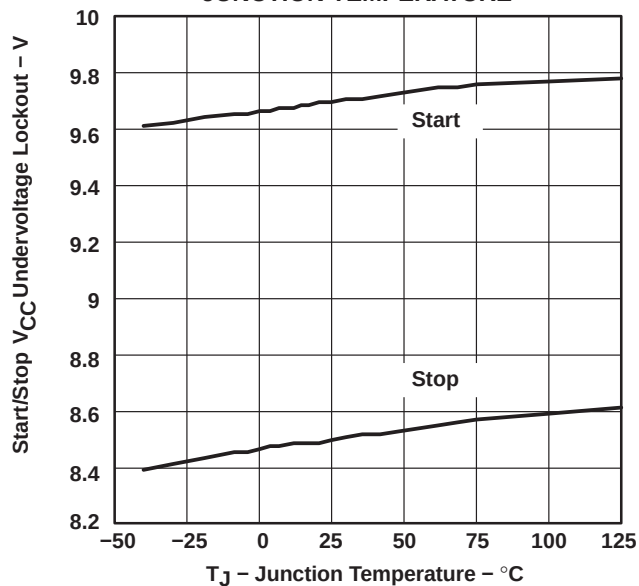


Figure 16

BOOTSTRAP SCHOTTKY DIODE  
INPUT CURRENT  
VS  
OUTPUT VOLTAGE

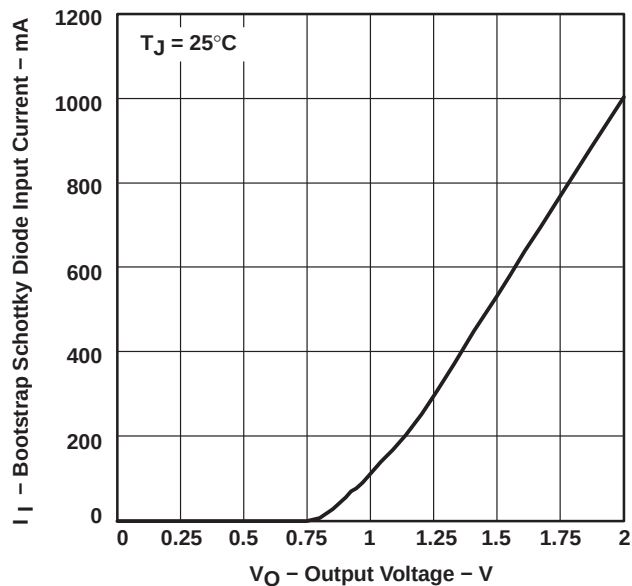


Figure 17

DELAY TIME (DEAD TIME)  
VS  
INPUT VOLTAGE (VDRV)

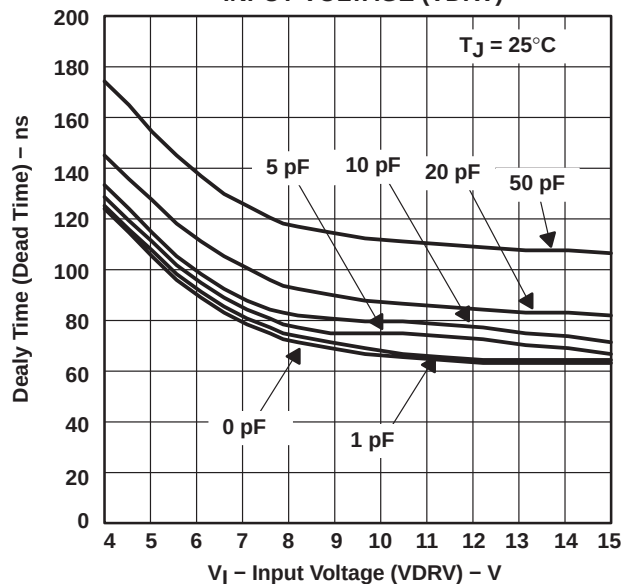


Figure 18

DELAY TIME  
VS  
JUNCTION TEMPERATURE

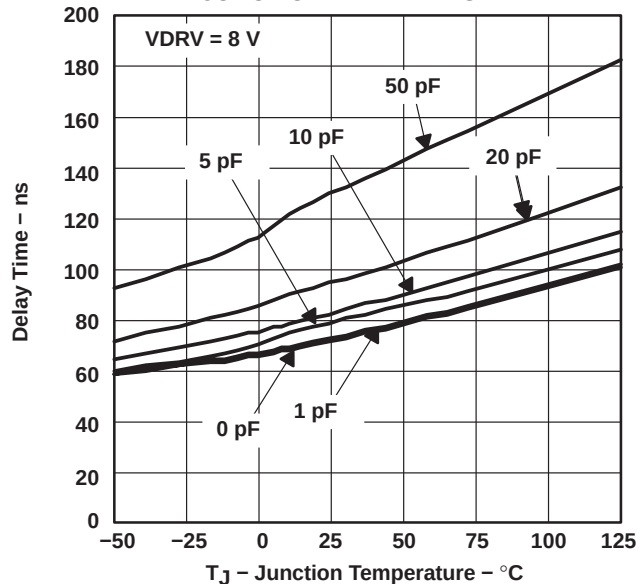


Figure 19

## TYPICAL CHARACTERISTICS

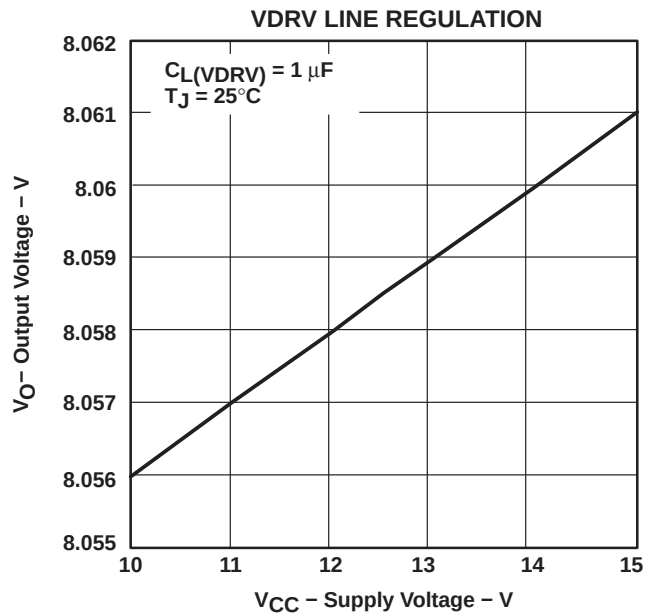


Figure 20


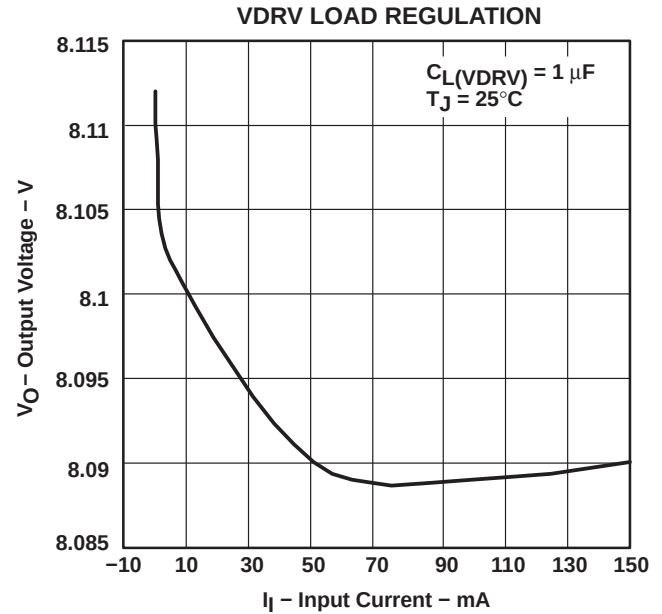


Figure 21

## APPLICATION INFORMATION

Figure 22 shows the circuit schematic of a 100-kHz synchronous-buck converter implemented with a TL5001ACD pulse-width-modulation (PWM) controller and a TPS2838 driver. The converter operates over an input range from 4.5 V to 12 V and has a 3.3-V output. The circuit can supply 3-A continuous load. The converter achieves an efficiency of 94% for V<sub>IN</sub> = 5 V, I<sub>L</sub> = 1 A, and 93% for V<sub>IN</sub> = 5 V, I<sub>L</sub> = 3 A.

| R1<br>(kΩ) | R2<br>(kΩ) | VDRV<br>Voltage<br>(V) |
|------------|------------|------------------------|
| 30         | 67         | 4                      |
| 30         | 91         | 5                      |
| 30         | 165        | 8                      |
| 30         | 261        | 12                     |
| 30         | 322        | 14.5                   |



To set the regulator voltage (TPS2838/39) use the following equation:

$$R2 = \left( \frac{R1}{1.235} \times VDRV \right) - R1$$

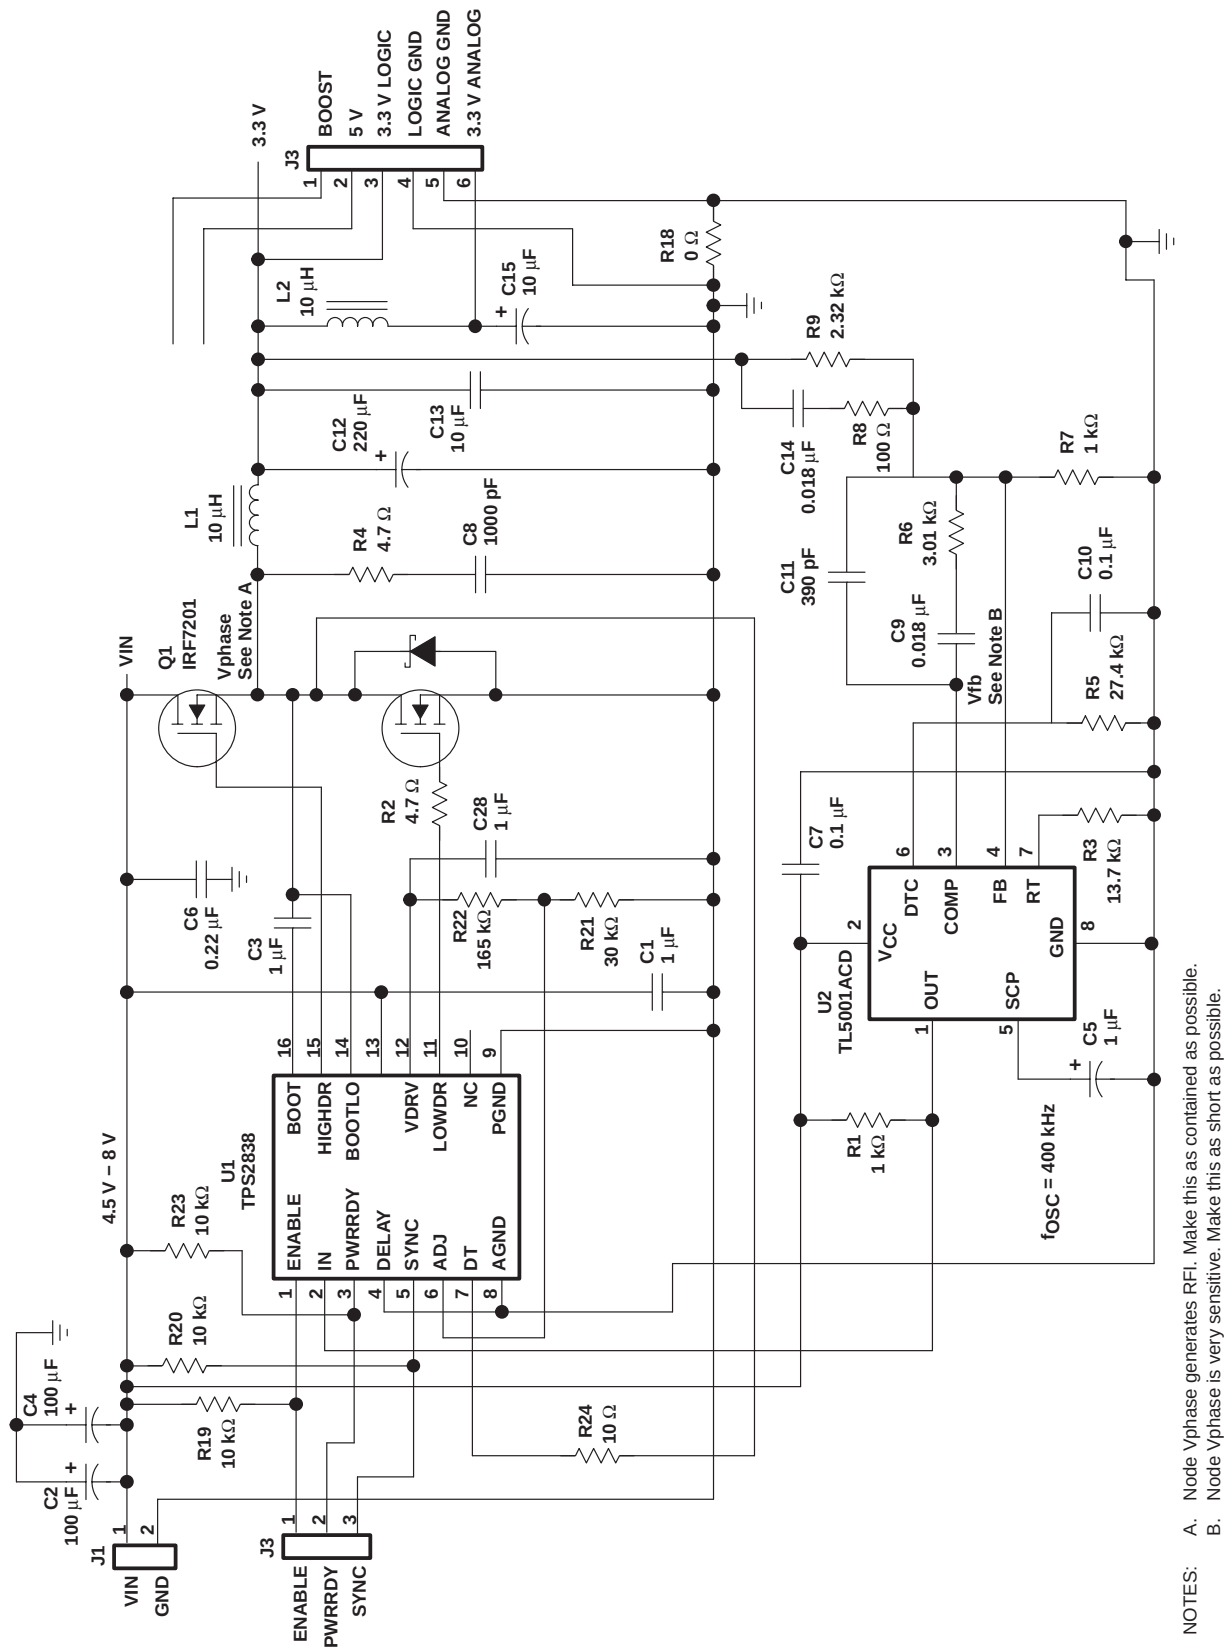


Figure 22. 3.3-V 3-A Synchronous-Buck Converter Circuit



## APPLICATION INFORMATION

Great care should be taken when laying out the PC board. The power-processing section is the most critical and will generate large amounts of EMI if not properly configured. The junction of Q1, Q2, and L1 should be very tight. The connection from Q1 drain to the positive sides of C5, C10, and C11 and the connection from Q2 source to the negative sides of C5, C10, and C11 should be as short as possible. The negative terminals of C7 and C12 should also be connected to Q2 source.

Next, the traces from the MOSFET driver to the power switches should be considered. The BOOTLO signal from the junction of Q1 and Q2 carries the large gate drive current pulses and should be as heavy as the gate drive traces. The bypass capacitor (C14) should be tied directly across  $V_{CC}$  and PGND.

The next most sensitive node is the FB node on the controller (terminal 4 on the TL5001A). This node is very sensitive to noise pickup and should be isolated from the high-current power stage and be as short as possible. The ground around the controller and low-level circuitry should be tied to the power ground as the output. If these three areas are properly laid out, the rest of the circuit should not have other EMI problems and the power supply will be relatively free of noise.

## PACKAGING INFORMATION

| Orderable part number      | Status<br>(1) | Material type<br>(2) | Package   Pins    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|----------------------------|---------------|----------------------|-------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS2838PWP</a> | NRND          | Production           | HTSSOP (PWP)   16 | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TPS2838             |
| TPS2838PWP.A               | NRND          | Production           | HTSSOP (PWP)   16 | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TPS2838             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TUBE

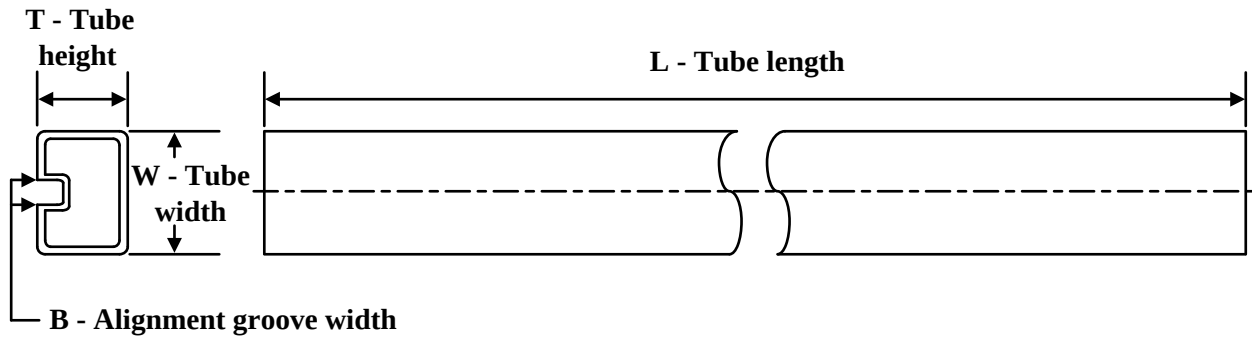

\*All dimensions are nominal

| Device       | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|--------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TPS2838PWP   | PWP          | HTSSOP       | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TPS2838PWP.A | PWP          | HTSSOP       | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |

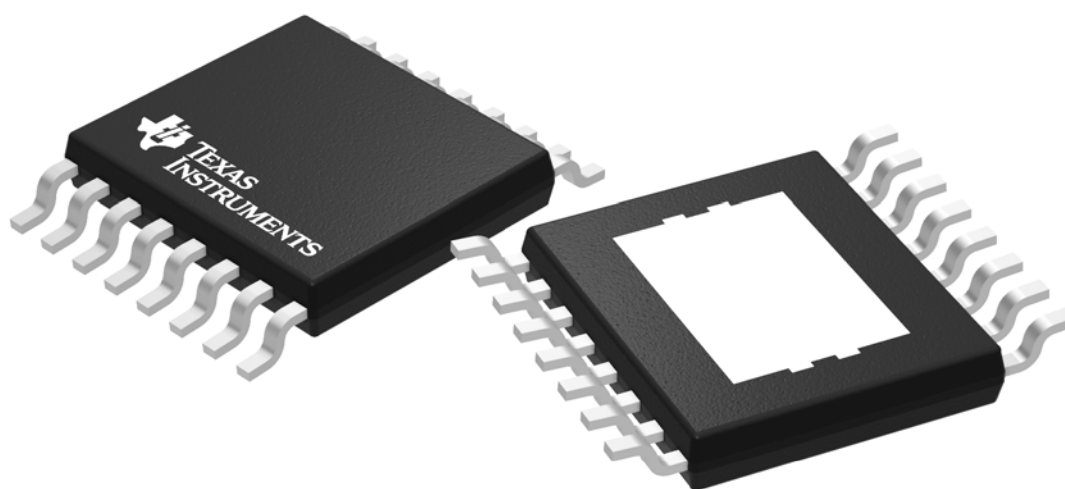


Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.



**PWP0016A**

# PowerPAD™ HTSSOP - 1.2 mm max height

## PLASTIC SMALL OUTLINE

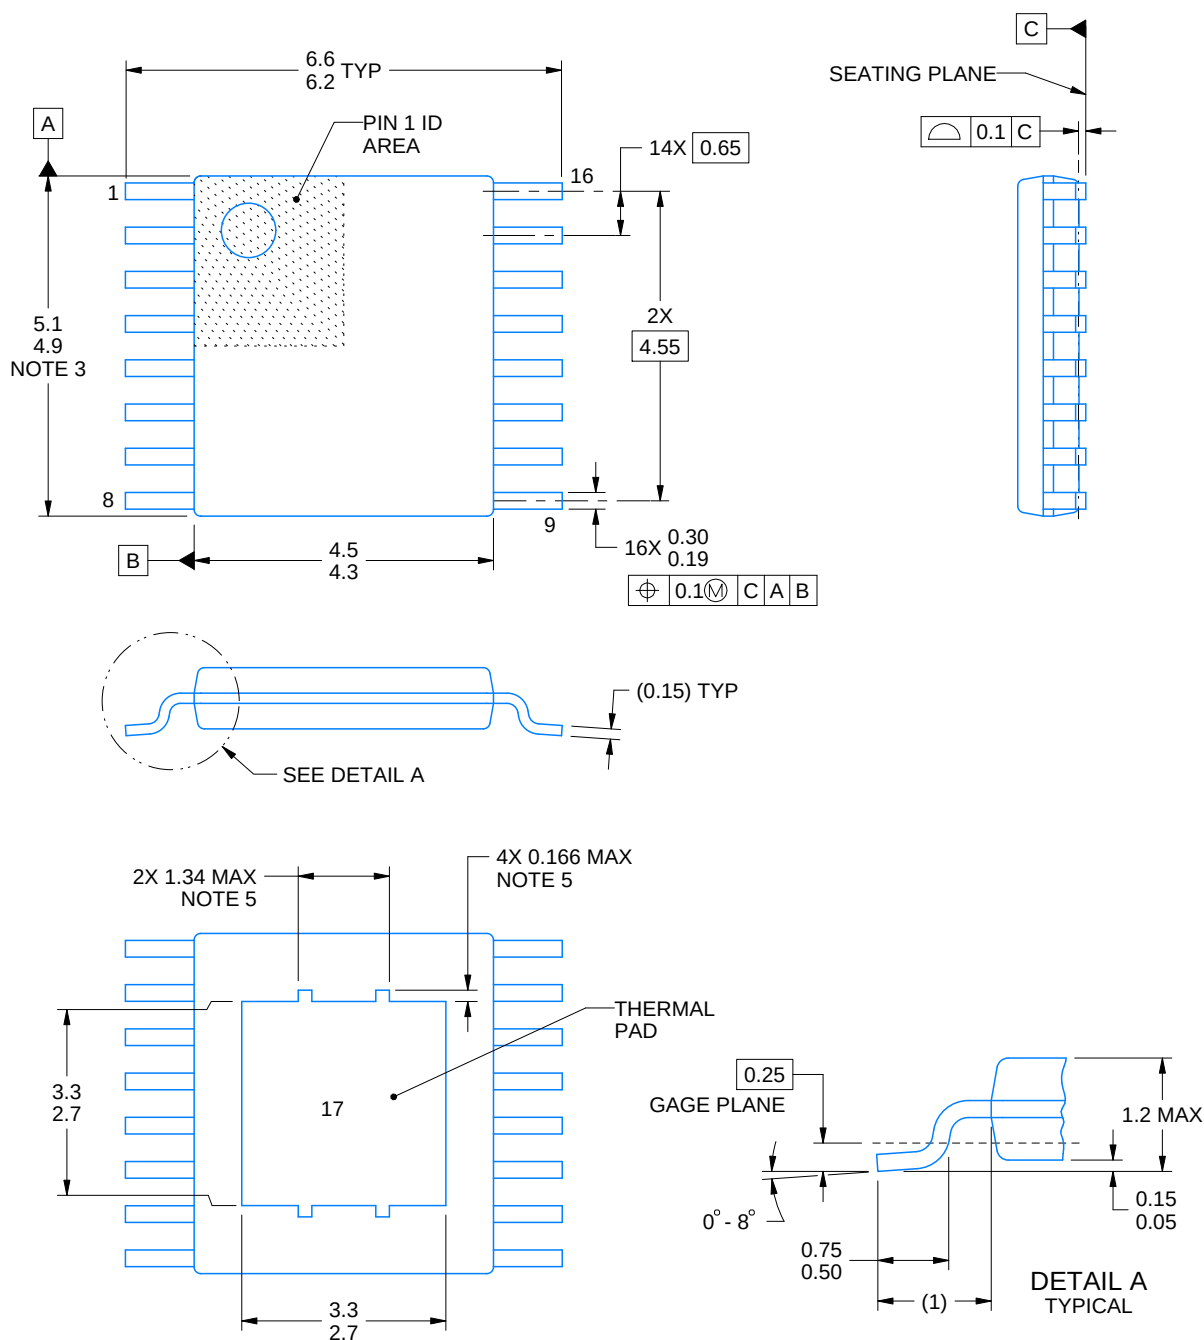

4214868/A 02/2017

NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-153.
5. Features may not be present.

# EXAMPLE BOARD LAYOUT


PWP0016A

PowerPAD™ HTSSOP - 1.2 mm max height


PLASTIC SMALL OUTLINE

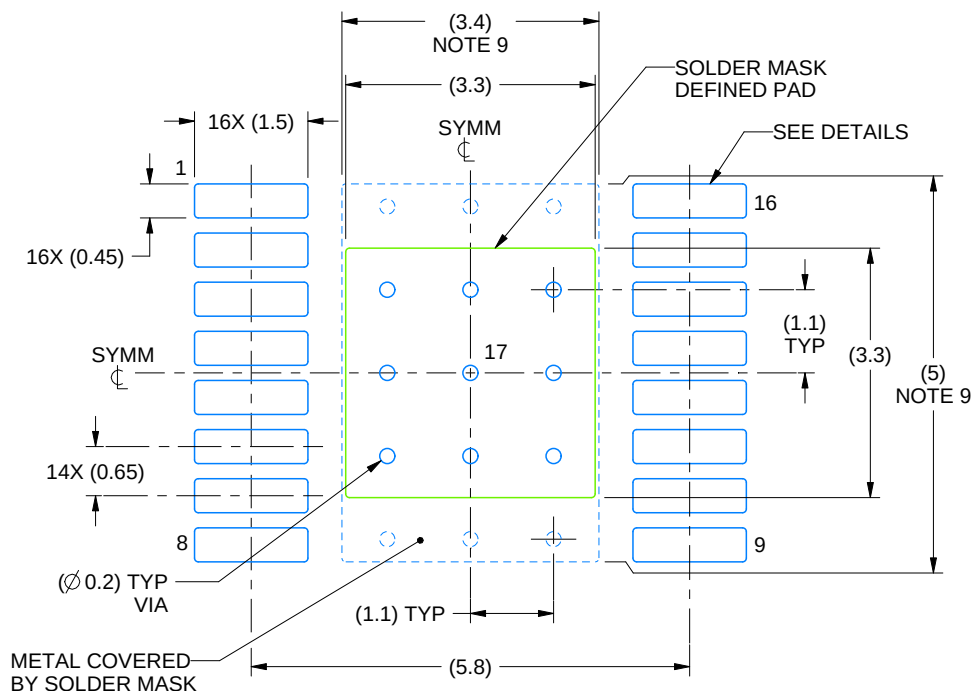

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:10X

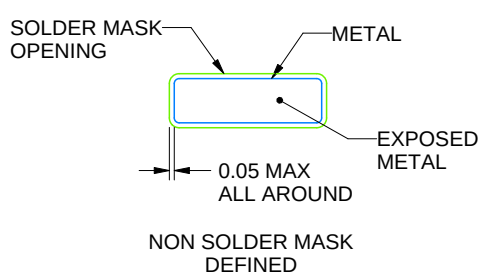

NON SOLDER MASK  
DEFINED

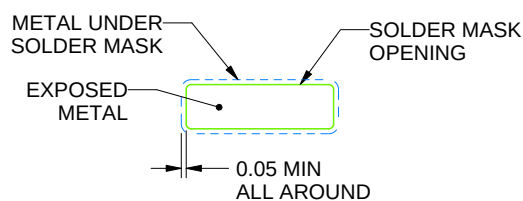

SOLDER MASK  
DEFINED

SOLDER MASK DETAILS  
PADS 1-16

4214868/A 02/2017


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 ([www.ti.com/lit/slma002](http://www.ti.com/lit/slma002)) and SLMA004 ([www.ti.com/lit/slma004](http://www.ti.com/lit/slma004)).
9. Size of metal pad may vary due to creepage requirement.

**PWP0016A**

## PowerPAD™ HTSSOP - 1.2 mm max height

## PLASTIC SMALL OUTLINE

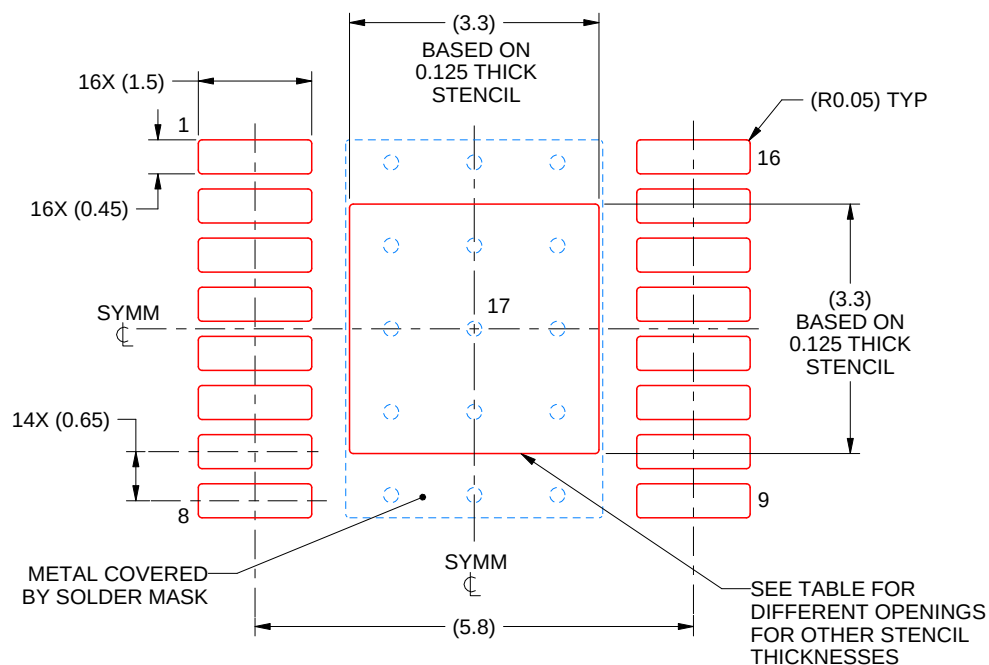

SOLDER PASTE EXAMPLE  
EXPOSED PAD  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE:10X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 3.69 X 3.69            |
| 0.125             | 3.3 X 3.3 (SHOWN)      |
| 0.15              | 3.01 X 3.01            |
| 0.175             | 2.79 X 2.79            |

4214868/A 02/2017

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025