

TS3A5223 0.45Ω 双通道 SPDT 双向模拟开关

1 特性

- 低导通电阻开关
 - 电压为 3.6V 时为 0.45Ω（典型值）
 - 电压为 1.8V 时为 0.85Ω（典型值）
- 宽电源电压：1.65V 至 3.6V
- 1.0V 兼容逻辑接口
- 高切换带宽 80MHz
- 在整个波段上，总谐波失真 (THD) 为 0.01%
- 额定最小先开后合
- 双向切换
- 75dB 通道至通道串扰
- 具有极低功率耗散和泄漏电流的 -70dB 通道至通道关闭隔离
- 极小型 QFN-10 封装：1.8mm x 1.4mm
- 针对所有引脚的 ESD 保护
 - 2kV HBM, 500V CDM

2 应用

- 便携式电子产品
- 智能手机、平板电脑
- 家用电器
- 有线通信

3 说明

TS3A5223 是一款高速双通道模拟开关，此开关具有先断后通以及双向信号切换功能。TS3A5223 可被用作一个双路 2:1 复用器或者一个 1:2 双路去复用器。

TS3A5223 提供极低的导通电阻、很低的 THD 和通道间串扰以及很高的关闭隔离。这些特性使得 TS3A5223 适用于音频信号传输和切换应用。


TS3A5223 控制逻辑支持 1V - 3.6V CMOS 逻辑电平。此逻辑接口可在不增加电源输出电流 (I_{CC}) 的前提下实现与各种 CPU 和微控制器的直接对接，从而降低了功耗。

器件信息⁽¹⁾

器件型号	封装	封装尺寸（标称值）
TS3A5223	μQFN (10)	1.80mm x 1.40mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

功能图

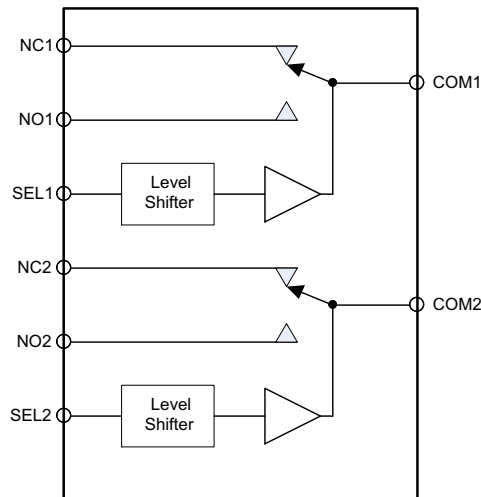

Copyright © 2017, Texas Instruments Incorporated



目录

1	特性	1	8.4	Device Functional Modes.....	11
2	应用	1	9	Application and Implementation	12
3	说明	1	9.1	Application Information.....	12
4	修订历史记录	2	9.2	Typical Application	12
5	Pin Configuration and Functions	3	10	Power Supply Recommendations	13
6	Specifications	4	11	Layout	14
6.1	Absolute Maximum Ratings	4	11.1	Layout Guidelines	14
6.2	ESD Ratings	4	11.2	Layout Example	14
6.3	Recommended Operating Conditions.....	4	12	器件和文档支持	15
6.4	Thermal Information	4	12.1	文档支持	15
6.5	Electrical Characteristics.....	5	12.2	接收文档更新通知	15
6.6	Typical Characteristics.....	6	12.3	社区资源.....	15
7	Parameter Measurement Information	7	12.4	商标.....	15
8	Detailed Description	10	12.5	静电放电警告.....	15
8.1	Overview	10	12.6	Glossary	15
8.2	Functional Block Diagram	10	13	机械、封装和可订购信息	15
8.3	Feature Description.....	10			


4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

Changes from Revision A (February 2013) to Revision B	Page
• 添加了器件信息表、ESD 额定值表、热性能信息表、特性说明部分、器件功能模式、应用和实施部分、电源建议部分、布局部分、器件和文档支持部分以及机械、封装和可订购信息部分	1
• Changed the V_{Max} MAX value From: 3.6 V To: V_{CC} in the <i>Recommended Operating Conditions</i> table	4
• Deleted: "dt/dv, SEL pin Input rise and fall time limit" from the <i>Recommended Operating Conditions</i> table.....	4
• Deleted the Dissipation Ratings table.....	4

Changes from Original (January 2013) to Revision A	Page
• 将器件状态从“预览”更改为“生产”	1

5 Pin Configuration and Functions

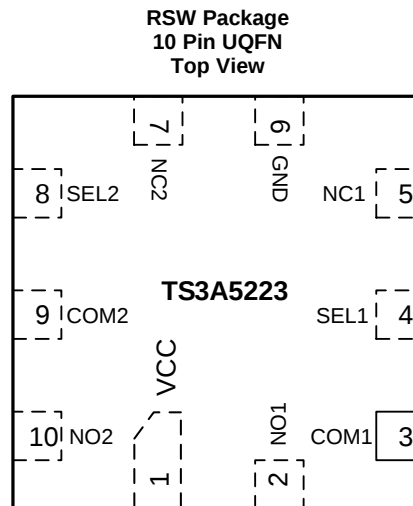

Pin Functions

NAME	PIN NUMBER	DESCRIPTION
VCC	1	Positive supply Input – Connect 1.65 V to 3.6 V supply voltage
NC1	5	Signal path Input/Output signal pins
NO1	2	
NC2	7	
NO2	10	
COM1, COM2	3, 9	Common signal path Input/Output signal pins
GND	6	Ground reference pin
SEL1, SEL2	4, 8	Select digital logic pin. Logic low connects COM to NC, Logic high connects COM to NO

6 Specifications

6.1 Absolute Maximum Ratings⁽¹⁾

Specified at $T_A = -40^{\circ}\text{C}$ to 85°C unless otherwise noted.

			VALUE		UNIT
			MIN	MAX	
V _{CC}	Positive DC supply voltage		−0.3	4.3 ⁽²⁾	V
V _{COM} V _{NO} V _{NC}	Analog voltage		−0.3	4.3 ⁽²⁾	V
I _{COM} I _{NO} I _{NC}	On-state switch continuous current			±300	mA
I _{COM} I _{NO} I _{NC}	On-state switch peak current (1ms pulse at 10% duty cycle)			±500	mA
P _D	Total device power dissipation at $T_A = 85^{\circ}\text{C}$	10-μQFN RSW		430	mW
T _A	Operating free-air ambient temperature range		−40	85	°C
T _J	Junction temperature range		−55	150	°C
T _{stg}	Storage temperature range		−55	150	°C

- (1) Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Not rated for continuous operation, 0.5% duty cycle at 1 kHz recommended

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _{CC}	Positive DC supply voltage		1.65	3.6	V
V _{COM} , V _{NO} , V _{NC}	Analog voltage range		0	V _{CC}	V
V _{SEL1} V _{SEL2}	Digital logic voltage		0	V _{CC}	V
T _A	Operating free-air ambient temperature range		−40	85	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TS3A5223	UNIT
		RSW (UQFN)	
		10 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	92.5	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	46.0	°C/W
R _{θJB}	Junction-to-board thermal resistance	44.5	°C/W
ψ _{JT}	Junction-to-top characterization parameter	1.5	°C/W
ψ _{JB}	Junction-to-board characterization parameter	44.5	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	31.2	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.







6.5 Electrical Characteristics

Specified over the recommended junction temperature range $T_A = T_J = -40^{\circ}\text{C}$ to 85°C . Typical values are at $T_A = T_J = 25^{\circ}\text{C}$ (unless otherwise noted).

PARAMETER		V_{CC} (V)	TEST CONDITIONS	MIN	TYP	MAX	UNIT
DC CHARACTERISTICS							
V_{IH}	High-level Input voltage SEL1, SEL2 inputs	3.6		0.8			V
		2.3		0.8			
		1.8		0.8			
V_{IL}	Low-level Input voltage SEL1, SEL2 inputs	3.6				0.3	V
		2.3				0.3	
		1.8				0.3	
R_{ON}	Switch ON Resistance	3.6	$V_S = 0$ to V_{CC} , $I_S = 100$ mA, $V_{SEL} = 1$ V, 0 V		0.45	0.6	Ω
		2.3			0.6	0.8	
		1.8			0.85	1.2	
ΔR_{ON}	Difference of on-state resistance between switches	3.6	$V_S = 2$ V, 0.8 V, $I_S = 100$ mA, $V_{SEL} = 1$ V, 0 V		0.05		Ω
$R_{ON-FLAT}$	ON resistance flatness	3.6	$V_S = 0$ to V_{CC} , $I_S = 100$ mA, $V_{SEL} = 1$ V, 0 V		0.1	0.2	Ω
		2.3			0.15	0.35	
		1.8			0.4	0.65	
I_{OFF}	NC, NO pin leakage current when switch is off	3.6	$V_S = 0.3$ or 3.0 V, $V_{COM} = 3$ or 0.3 V		5	90	nA
$I_{S(ON)}$	NC, NO pin leakage current when switch is on	3.6	$V_S = 0.3$ or 3.0 V, $V_{COM} = \text{No Load}$		4	60	nA
I_{SEL}	Select pin input leakage current	V_S	$V_S = 0$ or 3.6 V			100	nA
I_{CC}	Quiescent supply current	3.6	$V_{SEL} = 0$ or V_{CC}		700	2000	nA
I_{CCLV}	Supply current change	3.6	$V_{SEL} = 1$ V to $V_{SEL} = V_{CC}$			200	nA
SWITCHING PARAMETERS ⁽¹⁾⁽²⁾							
t_{PHL}	Logic high to low propagation delay	3.6	$R_L = 50$ Ω , $C_L = 35$ pF		0.1		ns
		2.5			0.2		
		1.8			0.2		
t_{PLH}	Logic low to high propagation delay	3.6	$R_L = 50$ Ω , $C_L = 35$ pF		0.1		ns
		2.5			0.2		
		1.8			0.2		
t_{ON}	Turn-ON time	2.3 - 3.6	$R_L = 50$ Ω , $C_L = 35$ pF, $V_S = 1.5$ V			70	ns
t_{OFF}	Turn-OFF time	2.3 - 3.6	$R_L = 50$ Ω , $C_L = 35$ pF, $V_S = 1.5$ V			75	ns
t_{BBM}	Break-before-make time delay	3.6	$R_L = 50$ Ω , $C_L = 35$ pF, $V_S = 1.5$ V	2	8		ns
Q_{INJ}	Charge Injection	3.6	$C_L = 1$ nF, $V_S = 0$ V		40		pC
AC CHARACTERISTICS							
BW	-3 dB Bandwidth	1.65 - 3.6	$R_L = 50$ Ω , $C_L = 35$ pF		80		MHz
V_{ISO}	Channel OFF isolation	1.65 - 3.6	$V_S = 1$ Vrms, $f = 100$ kHz		-70		dB
V_{Xtalk}	Channel-to-Channel Crosstalk	1.65 - 3.6	$V_S = 1$ Vrms, $f = 100$ kHz		-75		dB
THD	Total harmonic distortion	1.65 - 3.6	$R_L = 600$ Ω , $V_{SEL} = 2$ Vpk-pk, $f = 20$ Hz to 20 kHz		0.01%		
C_{SEL}	Select pin input capacitance	3.3	$f = 1$ MHz		3		pF
C_{ON}	NC, NO, and COM input capacitance when switch is on	3.3	$f = 1$ MHz		115		pF
C_{OFF}	NC, NO, and COM input capacitance when switch is off	3.3	$f = 1$ MHz		50		pF

- (1) Rise and Fall propagation delays, t_{PHL} and t_{PLH} , are measured between 50% values of the input and the corresponding output signal amplitude transition.
- (2) Specified by characterization only. Validated during qualification. Not measured in production testing.

6.6 Typical Characteristics

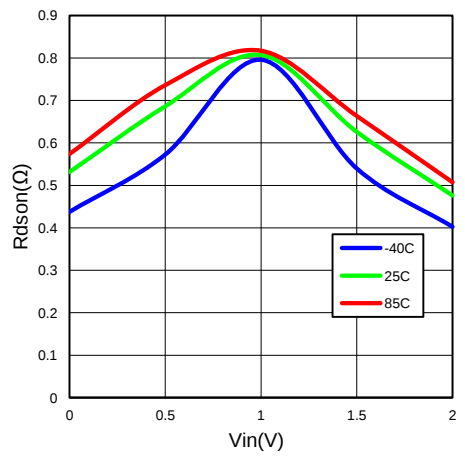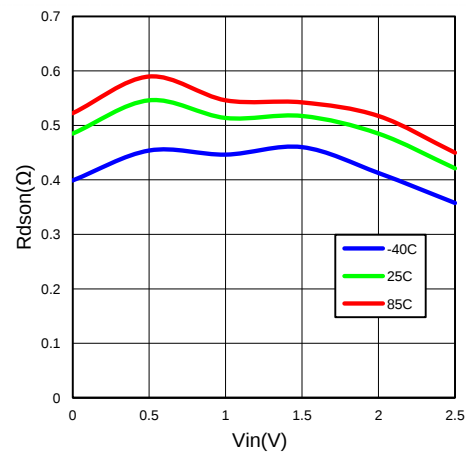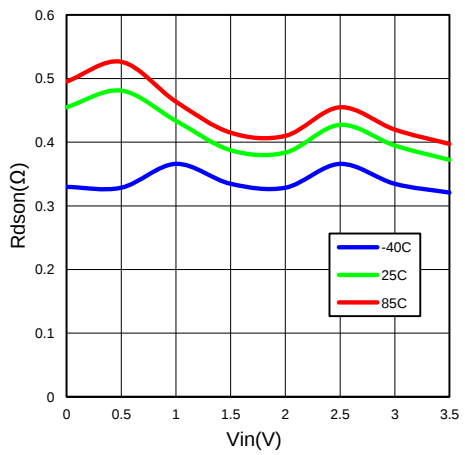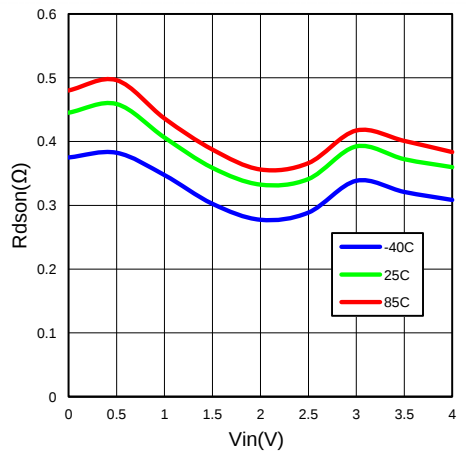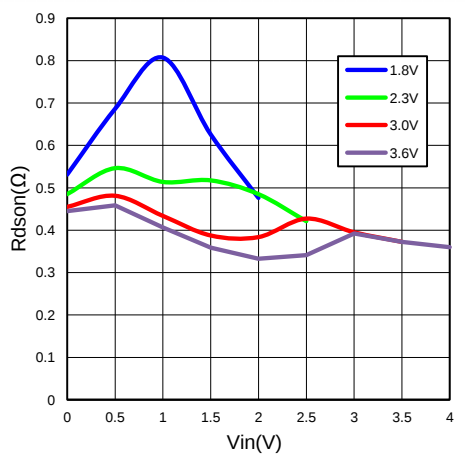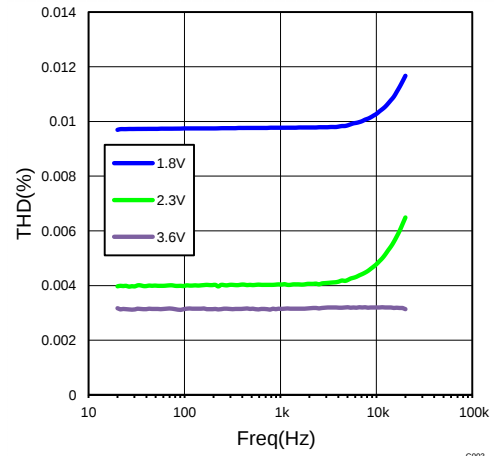
 $V_{CC} = 1.8 \text{ V}$
Figure 1. On-Resistance vs Switch Input Voltage

 $V_{CC} = 2.3 \text{ V}$
Figure 2. On-Resistance vs Switch Input Voltage

 $V_{CC} = 3 \text{ V}$
Figure 3. On-Resistance vs Switch Input Voltage

 $V_{CC} = 3.6 \text{ V}$
Figure 4. On-Resistance vs. Switch Input Voltage

 $T_A = 25^\circ\text{C}$
Figure 5. On-Resistance vs. Switch Input Voltage

Figure 6. Total Harmonic Distortion

7 Parameter Measurement Information

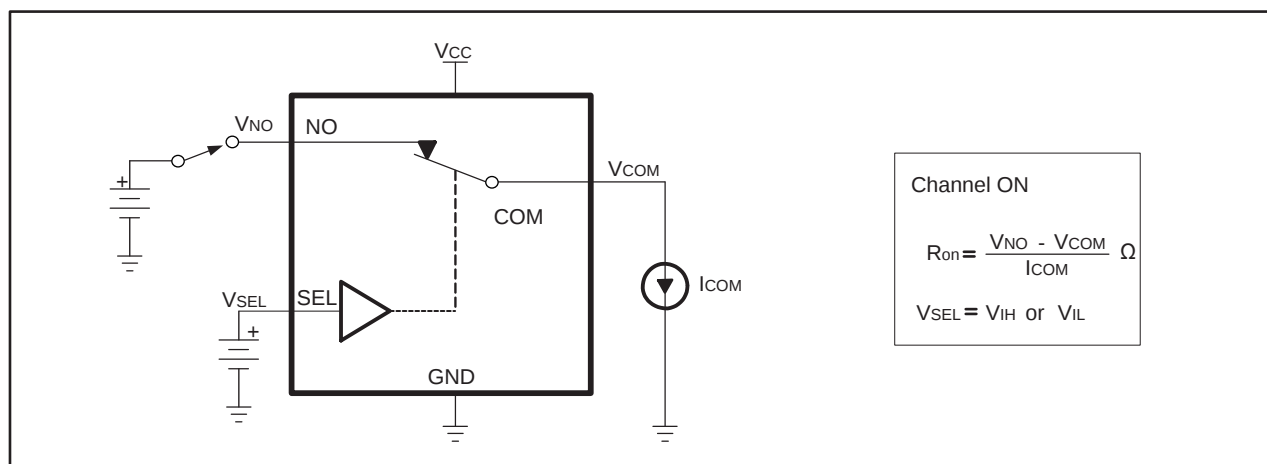


Figure 7. ON-State Resistance (R_{ON})

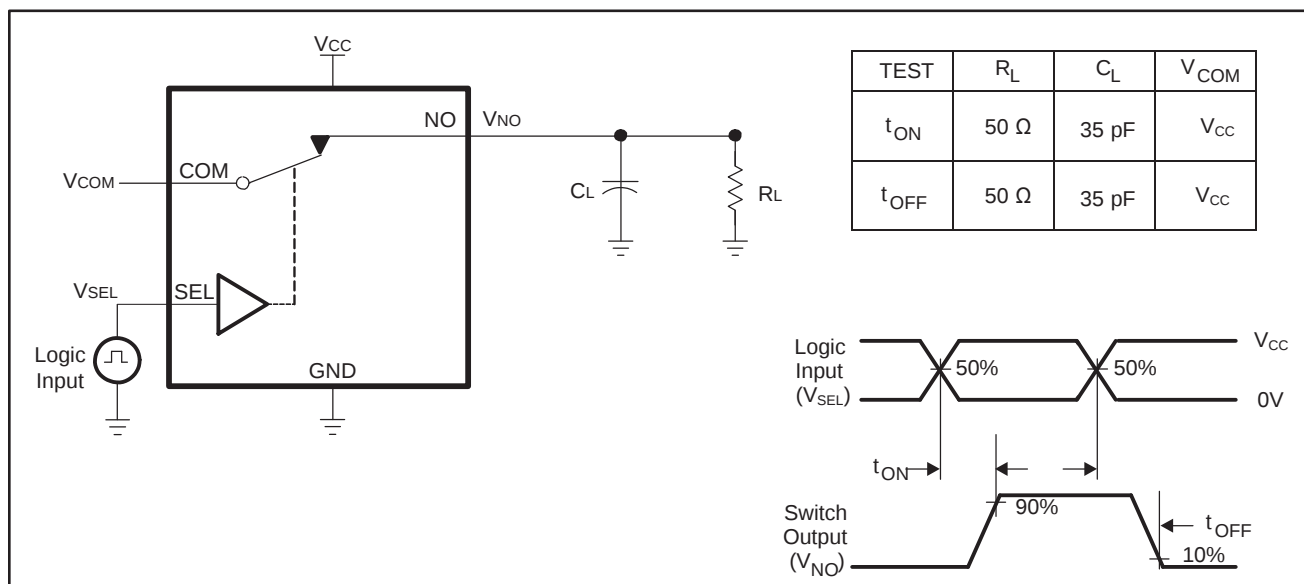
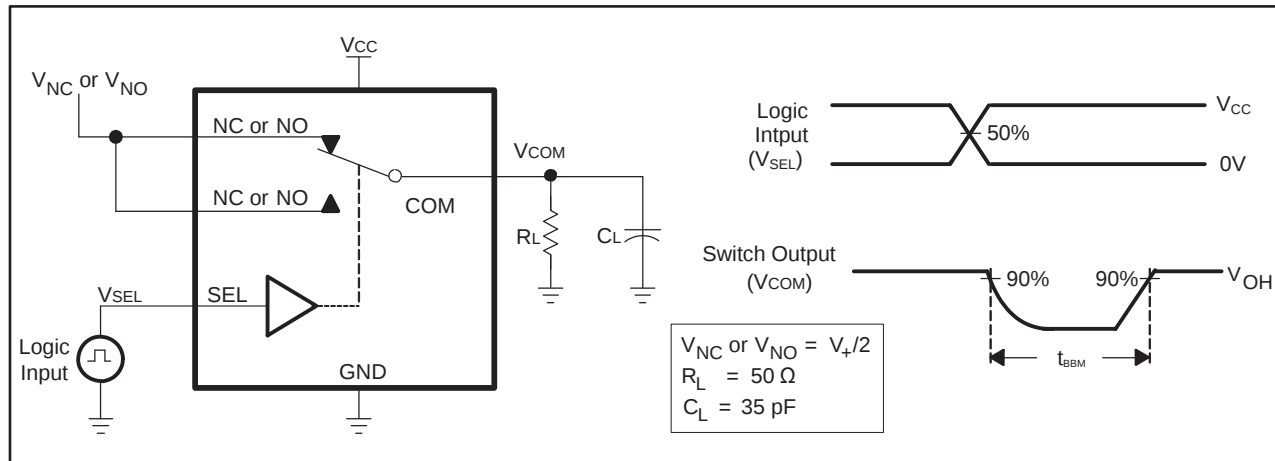
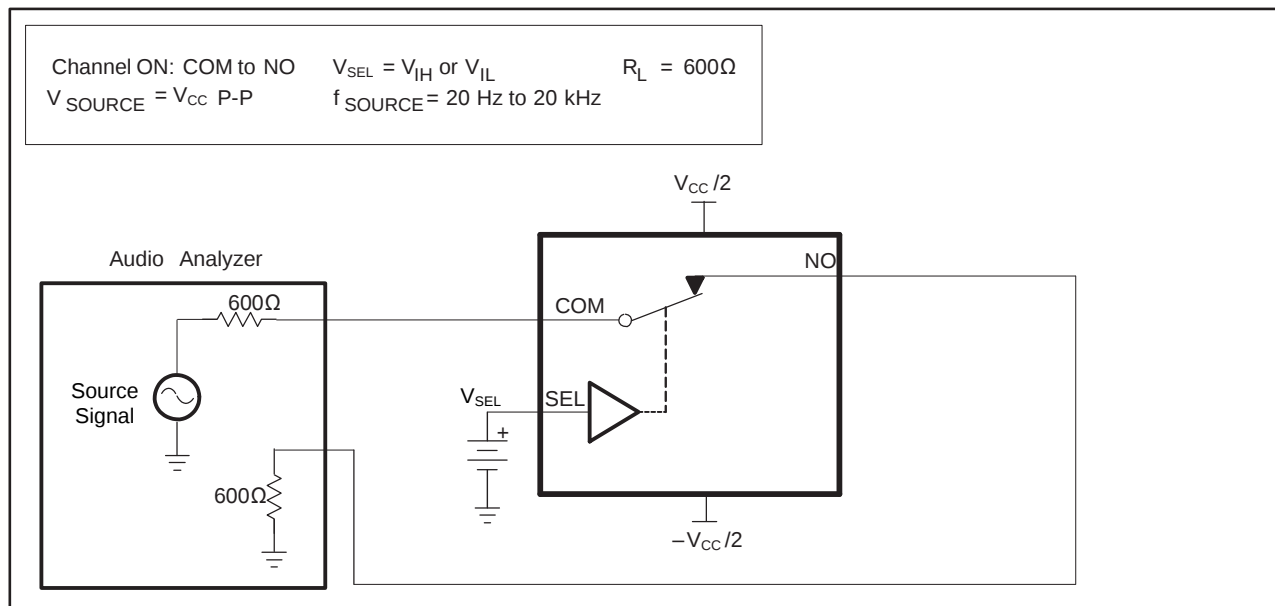


Figure 8. Turn-On (t_{ON}) and Turn-Off Time (t_{OFF})

Parameter Measurement Information (continued)

Figure 9. Break-Before-Make Time (t_{BBM})

Figure 10. TOTAL HARMONIC DISTORTION (THD)

Parameter Measurement Information (continued)

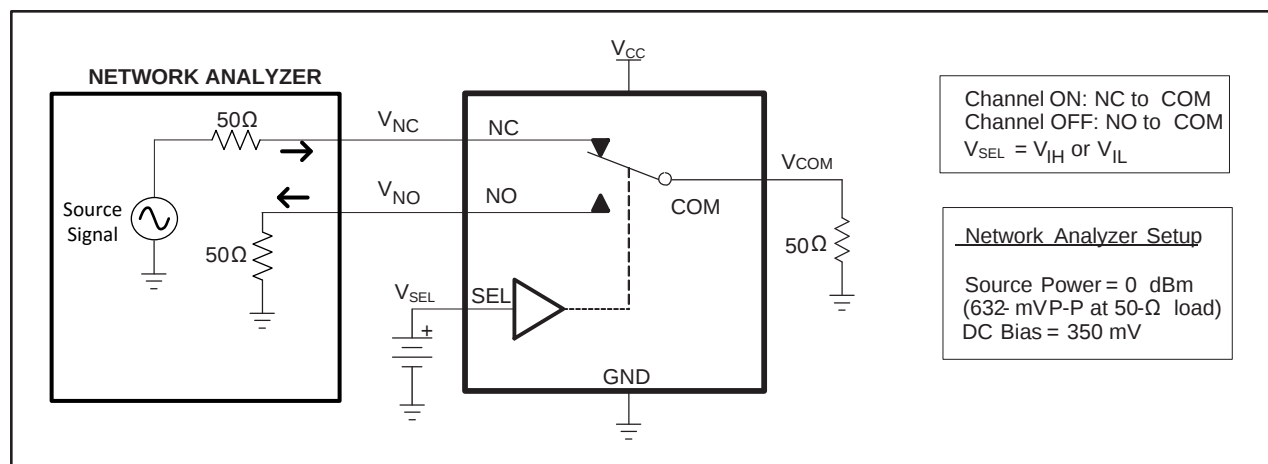


Figure 11. Crosstalk (X_{TALK})

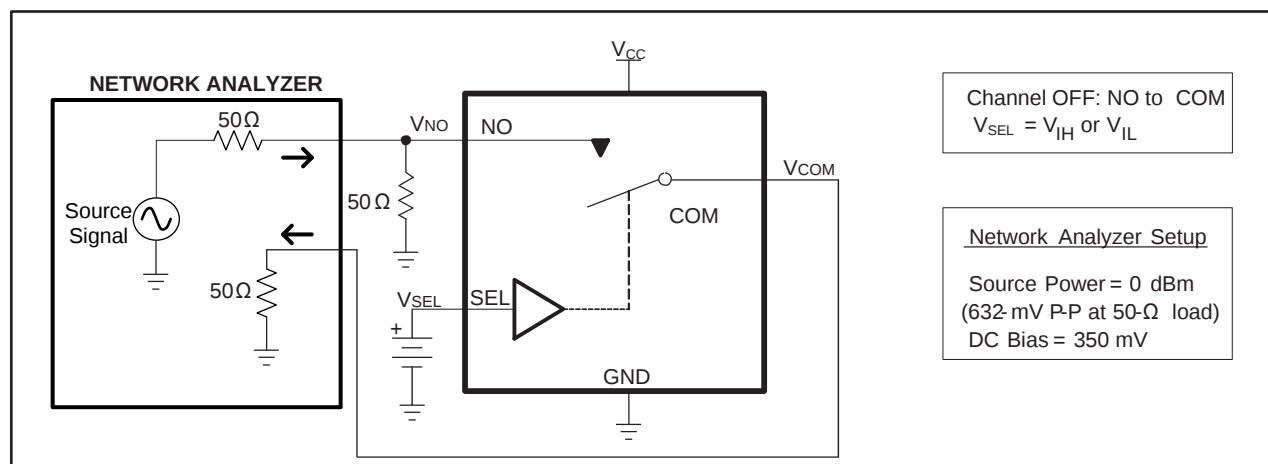



Figure 12. OFF Isolation (O_{ISO})

8 Detailed Description

8.1 Overview

The TS3A5223 is a bidirectional, 2-channel, single-pole double-throw (2:1 SPDT) analog switch that is designed to operate from 1.65 V to 3.6 V. This switch solution comes in a small 1.4mm x 1.8 mm QFN package while maintaining excellent signal integrity, which makes the TS3A5223 suitable for a wide range of applications in personal electronics, portable instrumentation, and test and home electronics. The device maintains the signal integrity by its low ON-state resistance, excellent ON-state resistance matching, and total harmonic distortion (THD) performance. To prevent signal distortion during the transferring of a signal from one channel to another, the TS3A5223 device also has a specified break-before-make feature.

8.2 Functional Block Diagram

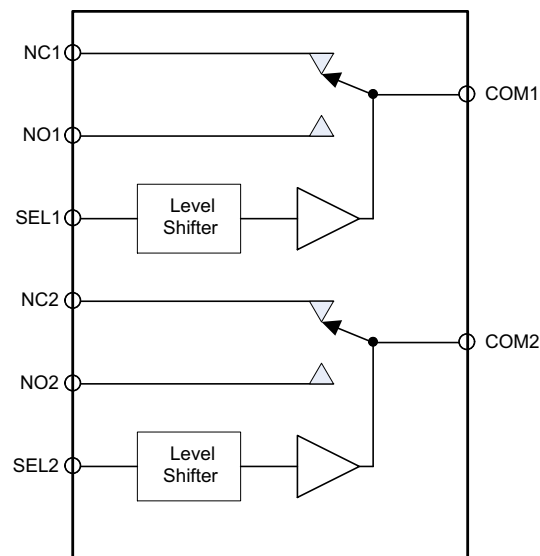

Copyright © 2017, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Digital Logic Translation

The TS3A5223 devices supports down to 1-V logic signals irrespective of the supply voltage. The device accomplishes this with integrated level shifters on the digital input SEL1 and SEL2 pins.

8.3.2 Break-Before-Make

The TS3A5223 devices prevents signal distortions when switching signals between the NO and NC pins by completely turning off one signal path before turning on the other signal path. The break-before-make timing specifications are found in the [Electrical Characteristics](#) table.

8.4 Device Functional Modes

Logic low voltage on SEL1 or SEL2 pins connect the COM pin to NC pin.

Logic high voltage on SEL1 or SEL2 pins connect the COM pin to NO pin.

Table 1. TS3A5223 Function Table

SEL1	SEL2	COM1	COM2
0	0	NC1	NC2
1	1	NO1	NO2
1	0	NO1	NC2
0	1	NC1	NO2

9 Application and Implementation


NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The TS3A5223 switch is bidirectional, so the NO, NC and COM pins can be used as either inputs or outputs. This switch is typically used when there is only one signal path that needs to be able to communicate to 2 different signal paths.

9.2 Typical Application

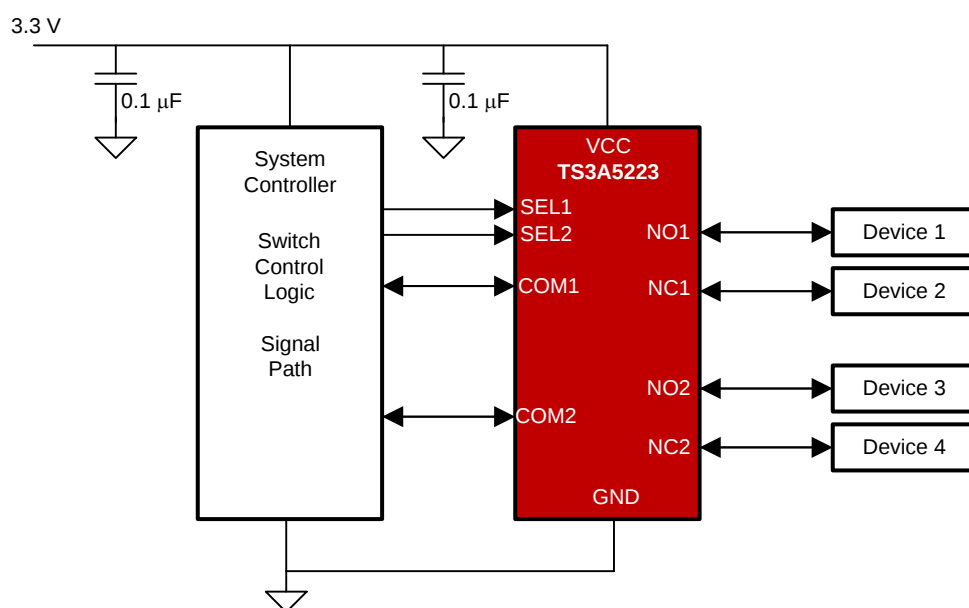

Copyright © 2017, Texas Instruments Incorporated

Figure 13. Typical Application

9.2.1 Design Requirements

The TS3A5223 can be properly operated without any external components.

Unused, pins COM, NC, and NO may be left floating or grounded.


Digital control pins IN must be pulled up to VCC or down to GND to avoid undesired switch positions that could result from the floating pin and cause excess current consumption. For more information, refer to the application note [Implications of Slow or Floating CMOS Inputs \(SCBA002\)](#).

9.2.2 Detailed Design Procedure

Ensure that all of the signals passing through the switch are within the ranges specified in [Recommended Operating Conditions](#) to ensure proper performance.

Typical Application (continued)

9.2.3 Application Curves

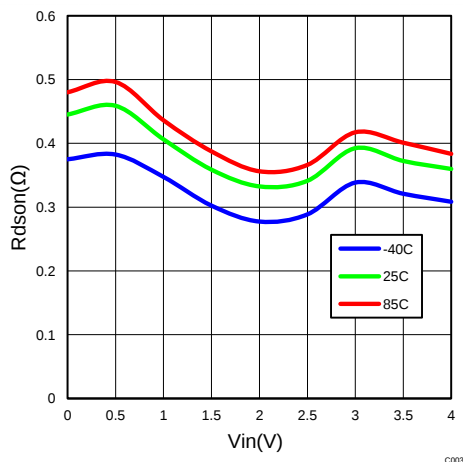

$$V_{CC} = 3.6 \text{ V}$$

Figure 14. On-Resistance vs. Switch Input Voltage

10 Power Supply Recommendations

TI recommends proper power-supply sequencing for all CMOS devices. Do not exceed the absolute-maximum ratings, because stresses beyond the listed ratings can cause permanent damage to the device. Always sequence VCC on first, followed by NO, NC, or COM. Although it is not required, power-supply bypassing improves noise margin and prevents switching noise propagation from the VCC supply to other components. A 0.1-μF capacitor, connected from VCC to GND, is adequate for most applications.

11 Layout

11.1 Layout Guidelines

- TI recommends following common printed-circuit board layout guidelines to ensure reliability of the device.
- Bypass capacitors should be used on power supplies.
- Short trace lengths should be used to avoid excessive loading.

11.2 Layout Example

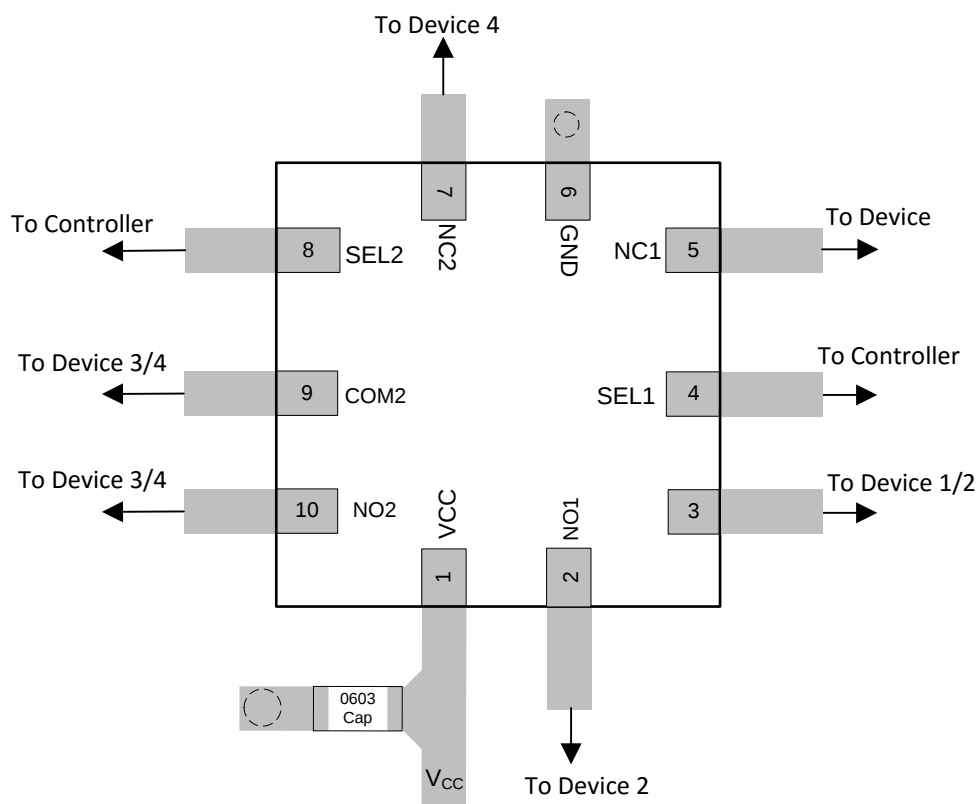


Figure 15. Layout Example

12 器件和文档支持

12.1 文档支持

12.2 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。请单击右上角的通知我 进行注册，即可收到任意产品信息更改每周摘要。有关更改的详细信息，请查看任意已修订文档中包含的修订历史记录。

12.3 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.4 商标

E2E is a trademark of Texas Instruments.

12.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

12.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 机械、封装和可订购信息

以下页面包括机械、封装和可订购信息。这些信息是指定器件的最新可用数据。这些数据发生变化时，我们可能不会另行通知或修订此文档。如欲获取此产品说明书的浏览器版本，请参见左侧的导航栏。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TS3A5223RSWR	Active	Production	UQFN (RSW) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	B2A
TS3A5223RSWR.B	Active	Production	UQFN (RSW) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	B2A
TS3A5223RSWRG4	Active	Production	UQFN (RSW) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	B2A
TS3A5223RSWRG4.B	Active	Production	UQFN (RSW) 10	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	B2A

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

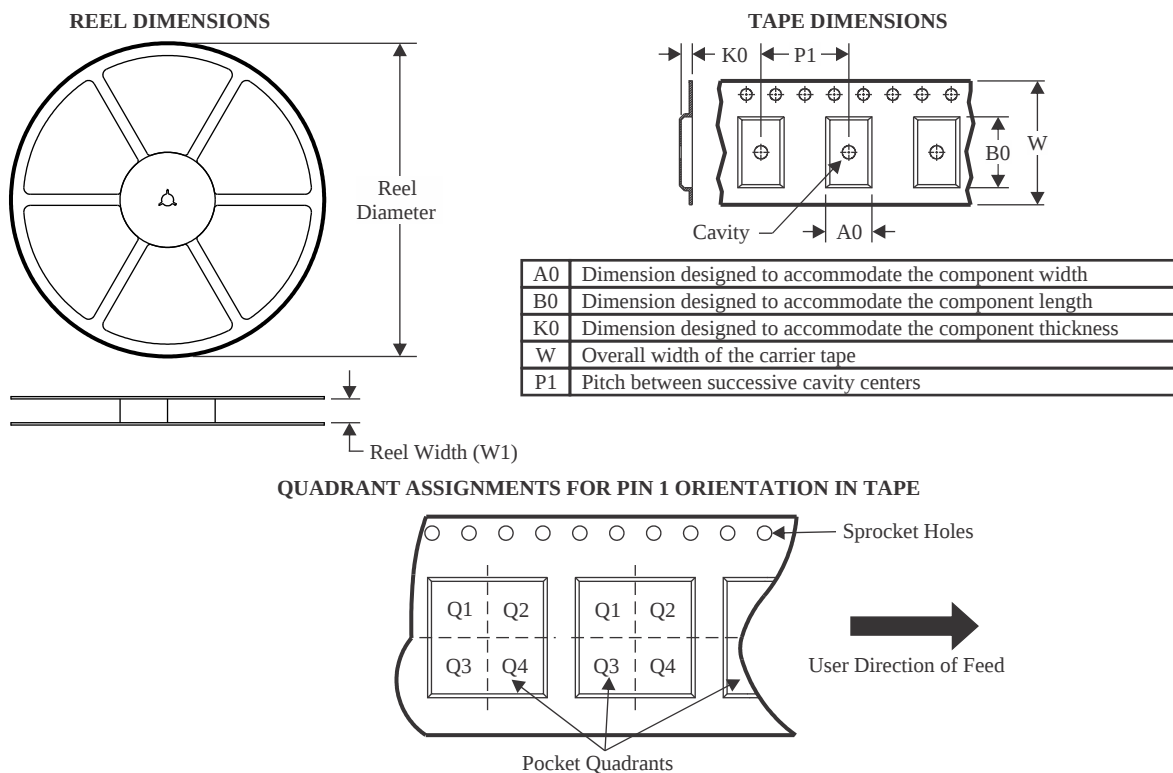

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TS3A5223RSWR	UQFN	RSW	10	3000	180.0	8.4	1.7	2.1	0.7	4.0	8.0	Q1
TS3A5223RSWR	UQFN	RSW	10	3000	180.0	9.5	1.6	2.0	4.0	4.0	8.0	Q1
TS3A5223RSWRG4	UQFN	RSW	10	3000	180.0	8.4	1.7	2.1	0.7	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TS3A5223RSWR	UQFN	RSW	10	3000	210.0	185.0	35.0
TS3A5223RSWR	UQFN	RSW	10	3000	184.0	184.0	19.0
TS3A5223RSWRG4	UQFN	RSW	10	3000	210.0	185.0	35.0




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This package complies to JEDEC MO-288 variation UDEE, except minimum package height.

EXAMPLE BOARD LAYOUT


RSW0010A

UQFN - 0.55 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

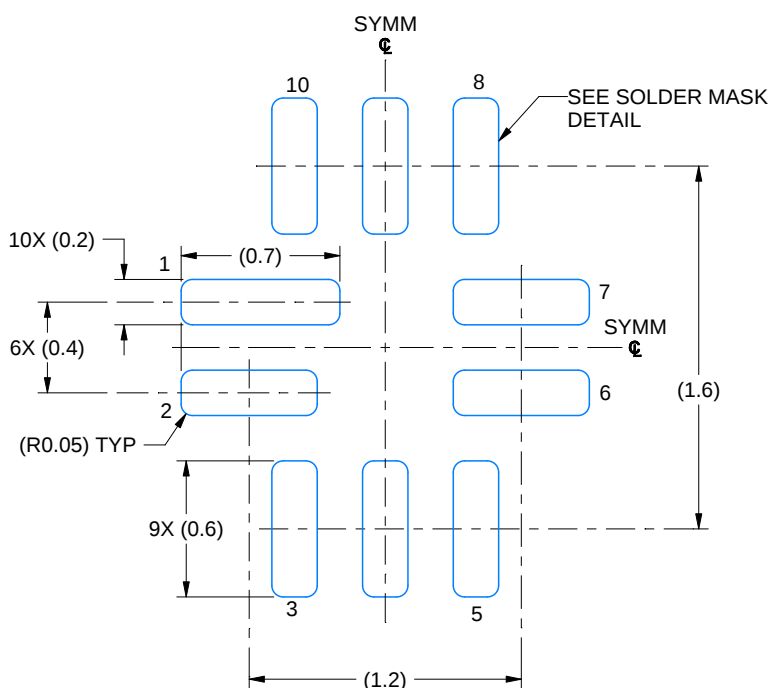

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 30X

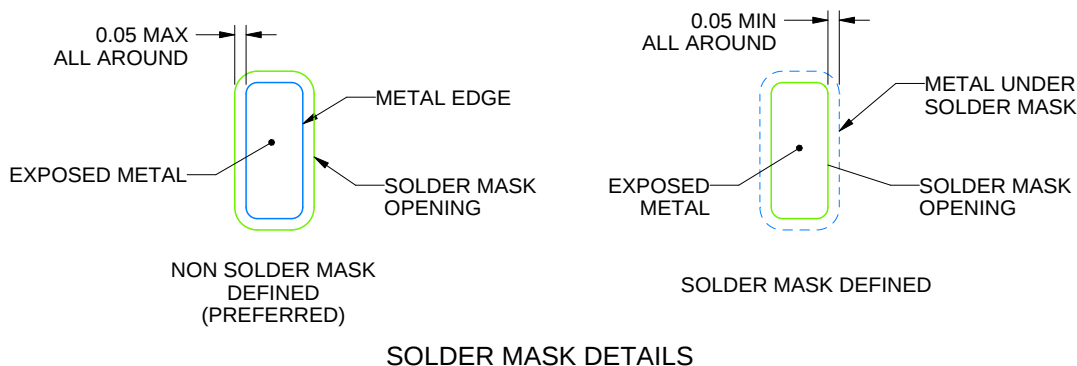

4224897/A 03/2019

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slue271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RSW0010A

UQFN - 0.55 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

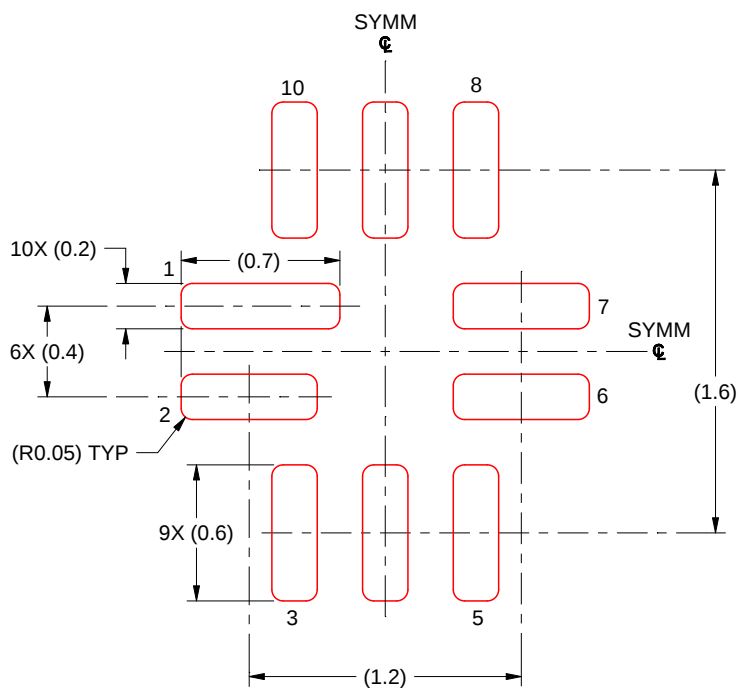

SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 30X

4224897/A 03/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月