

VCA824 超宽带、增益调节范围大于 40dB 的 V/V 线性可变增益放大器

1 特性

- 710MHz 小信号带宽 ($G = 2V/V$)
- 320MHz、 $4V_{PP}$ 带宽 ($G = 10V/V$)
- 0.1dB 增益平坦度达 135MHz
- $2500V/\mu s$ 压摆率
- 增益调节范围大于 40dB
- 高增益精度: $20dB \pm 0.3dB$
- 高输出电流: $\pm 90mA$

2 应用

- 差动线路接收器
- 差分均衡器
- 脉冲振幅补偿
- 可变衰减器
- 电压可调的有源滤波器

3 说明

VCA824 是一种直流耦合、宽带、V/V 线性、连续可变的压控增益放大器。该器件为具有高阻抗增益控制输入的单端转换提供了差动输入，用于将由增益电阻器 (R_G) 和反馈电阻器 (R_F) 设定的额定最大增益降低 40dB。


VCA824 内部架构包括两个输入缓冲器和一个与乘法器内核集成的输出电流反馈放大级，从而提供一个不需要外部缓冲的完整可变增益放大器 (VGA) 系统。最大增益可通过两个电阻器在外部设置，实现了设计灵活性。最大增益应设置在 $2V/V$ 和 $40V/V$ 之间。在 $\pm 5V$ 供电条件下，随着控制电压从 $1V$ 变为 $-1V$ ，VCA824 的增益控制电压会按照 V/V 线性方式调整增益。例如，将最大增益设置为 $10V/V$ 时，VCA824 的增益控制范围为 $10V/V$ ($1V$ 输入时) 至 $0.1V/V$ ($-1V$ 输入时)。VCA824 具有出色的增益线性。当最大增益为 20dB 且增益控制输入电压在 $0V$ 和 $1V$ 之间变化时，增益偏差不会超过 $\pm 0.3dB$ (在 $25^\circ C$ 时最大)。

器件信息⁽¹⁾


器件型号	封装	封装尺寸 (标称值)
VCA824	SOIC (14)	8.65mm × 3.91mm
	VSSOP (10)	3.00mm × 3.00mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

差分均衡器

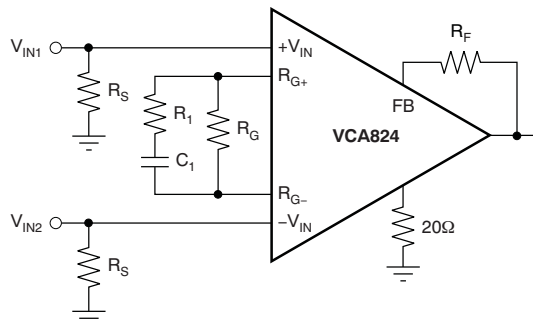

RC 负载的差分均衡过程

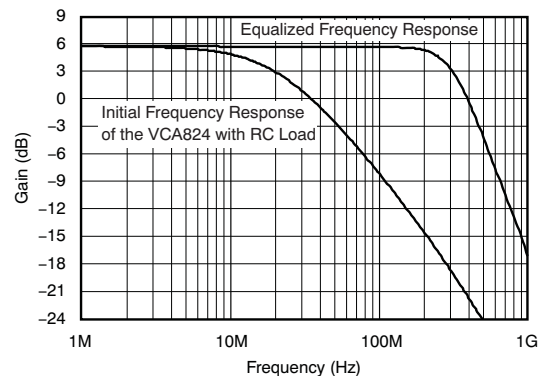

目录

1	特性	1	8.2	Functional Block Diagram	19
2	应用	1	8.3	Feature Description	19
3	说明	1	8.4	Device Functional Modes	19
4	修订历史记录	2	9	Application and Implementation	22
5	Device Comparison Table	3	9.1	Application Information	22
6	Pin Configuration and Functions	3	9.2	Typical Application	28
7	Specifications	4	10	Power Supply Recommendations	30
7.1	Absolute Maximum Ratings	4	11	Layout	30
7.2	ESD Ratings	4	11.1	Layout Guidelines	30
7.3	Recommended Operating Conditions	4	11.2	Layout Example	31
7.4	Thermal Information	4	12	器件和文档支持	32
7.5	Electrical Characteristics: $V_S = \pm 5\text{ V}$	5	12.1	器件支持	32
7.6	Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 2\text{ V/V}$...	7	12.2	接收文档更新通知	32
7.7	Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 10\text{ V/V}$	11	12.3	社区资源	32
7.8	Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 40\text{ V/V}$	15	12.4	商标	32
8	Detailed Description	19	12.5	静电放电警告	32
8.1	Overview	19	12.6	Glossary	32
			13	机械、封装和可订购信息	32


4 修订历史记录

Changes from Revision D (January 2016) to Revision E	Page
• Changed <i>Output Voltage Swing</i> parameter $R_L = 100\ \Omega$ specifications	6
• Changed <i>Output Current</i> parameter specifications	6
Changes from Revision C (December 2008) to Revision D	Page
• 已添加 添加了引脚配置和功能 部分、ESD 额定值 表、特性 说明部分，器件功能模式，应用和实施部分，电源相关建议部分，布局部分，器件和文档支持部分以及机械、封装和可订购信息部分	1
• Deleted Thermal Characteristics rows from <i>Electrical Characteristics</i>	5
Changes from Revision B (August 2008) to Revision C	Page
• Revised second paragraph in the <i>Wideband Variable Gain Amplifier Operation</i> section describing pin 9	28
Changes from Revision A (December 2007) to Revision B	Page
• Changed storage temperature range rating in Absolute Maximum Ratings table from $-40\ ^\circ\text{C}$ to $125\ ^\circ\text{C}$ to $-65\ ^\circ\text{C}$ to $125\ ^\circ\text{C}$	4
Changes from Original (November 2007) to Revision A	Page
• Added typical value for output impedance	6
• Changed wording of explanation for X2Y capacitor usage at end of paragraph	28


5 Device Comparison Table

SINGLES	DUALS	GAIN ADJUST RANGE (dB)	INPUT NOISE (nV/ $\sqrt{\text{Hz}}$)	SIGNAL BANDWIDTH (MHz)
VCA810	—	80	2.4	35
—	VCA2612	45	1.25	80
—	VCA2613	45	1	80
—	VCA2615	52	0.8	50
—	VCA2617	48	4.1	50
VCA820	—	40	8.2	150
VCA821	—	40	6.0	420
VCA822	—	40	8.2	150
VCA824	—	40	6.0	420

6 Pin Configuration and Functions

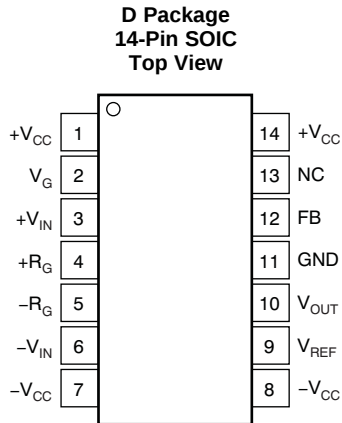

NC = No Connection



Pin Functions

PIN			I/O	DESCRIPTION
NAME	SOIC	VSSOP		
V _{CC}	1,14	2	P	Positive supply voltage
V _G	2	3	I	Gain control voltage
+V _{IN}	3	4	I	noninverting input
+R _G	4	5	I	Gain set resistor noninverting input
-R _G	5	6	I	Gain set resistor inverting input
-V _{IN}	6	7	I	Inverting input
-V _{CC}	7,8	8	P	Negative supply voltage
V _{REF}	9	—	I	Output reference voltage (Non- Inverting input of output buffer)
V _{OUT}	10	9	O	Output voltage
GND	11	10	P	Ground
FB	12	1	I	Feedback resistor (inverting input of output buffer)
NC	13	—	—	Not connected

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

	MIN	MAX	UNIT
Power supply		±6.5	V
Internal power dissipation	See Thermal Information		
Input voltage		±V _S	V
Junction temperature (T _J)		260	°C
Junction temperature (T _J), continuous operation		140	°C
Storage temperature	–65	125	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±500	
		Machine model (MM)	±200	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

	MIN	NOM	MAX	UNIT
Operating voltage	7	10	12	V
Operating temperature	–40	25	85	°C

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		VCA824		UNIT
		D (SOIC)	DGS (VSSOP)	
		14 PINS	10 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	90.3	173.1	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	49.8	46.6	°C/W
R _{θJB}	Junction-to-board thermal resistance	44.9	94.3	°C/W
ψ _{JT}	Junction-to-top characterization parameter	13.8	2.2	°C/W
ψ _{JB}	Junction-to-board characterization parameter	44.6	92.7	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	n/a	n/a	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application report](#).

7.5 Electrical Characteristics: $V_S = \pm 5\text{ V}$

At $A_{VMAX} = 10\text{ V/V}$, $V_G = 1\text{ V}$, $R_F = 402\ \Omega$, $R_G = 80\ \Omega$, and $R_L = 100\ \Omega$, unless otherwise noted.

PARAMETER		TEST CONDITIONS		TEST LEVEL ⁽¹⁾	MIN	TYP	MAX	UNIT
AC PERFORMANCE								
Small-Signal Bandwidth		A _{VMAX} = 2 V/V, V _G = 1 V, V _O = 500 mV _{PP}		C		710		MHz
		A _{VMAX} = 10 V/V, V _G = 1 V, V _O = 500 mV _{PP}				420		
		A _{VMAX} = 40 V/V, V _G = 1 V, V _O = 500 mV _{PP}				170		
Large-Signal Bandwidth		A _{VMAX} = 10 V/V, V _G = 1 V, V _O = 4 V _{PP}		C		320		MHz
Gain Control Bandwidth		V _O = 200 mV _{PP} , T _A = 25°C		B		240	330	MHz
						235		
						235		
Bandwidth for 0.1-dB Flatness		A _{VMAX} = 10 V/V, V _G = 1 V, V _O = 2 V _{PP}		C		135		MHz
Slew Rate		A _{VMAX} = 10 V/V, V _G = 1 V, V _O = 4 V Step		B		1800	2500	V/μs
						1700		
						1700		
Rise-and-Fall Time		A _{VMAX} = 10 V/V, V _G = 1 V, V _O = 4 V Step		B		1.5	1.8	ns
							1.9	
							1.9	
Settling Time to 0.01%		A _{VMAX} = 10 V/V, V _G = 1 V, V _O = 4 V Step		C		11		ns
Harmonic Distortion	2nd-Harmonic	V _O = 2 V _{PP} , f = 20 MHz		B		-64	-66	dBc
						-64		
						-64		
	3rd-Harmonic	V _O = 2 V _{PP} , f = 20 MHz		B		-61	-63	dBc
						-61		
						-61		
Input Voltage Noise		f > 100 kHz		C		6		nV/√Hz
Input Current Noise		f > 100 kHz		C		2.6		pA/√Hz
GAIN CONTROL								
Gain Error		A _{VMAX} = 10 V/V, V _G = 1 V		A		±0.1	±0.4	dB
						±0.5		
						±0.6		
Gain Deviation		A _{VMAX} = 10 V/V, 0 < V _G < 1		A		±0.05	±0.3	dB
						±0.34		
						±0.37		
Gain Deviation		A _{VMAX} = 10 V/V, -0.8 < V _G < 1		A		±1.06	±1.9	dB
						±2.1		
						±2.2		
Gain at V _G = -0.9V		Relative to max gain		A		-26	-24	dB
						-24		
						-23		
Gain Control Bias Current		T _A = 25°C T _A = 0°C to 70°C T _A = -40°C to 85°C		A		22	30	μA
						35		
						37		
Average Gain Control Bias Current Drift		T _A = 0°C to 70°C T _A = -40°C to 85°C		B		±100		nA/°C
						±100		
Gain Control Input Impedance		T _A = 25°C		C		1.5 0.6		MΩ pF
DC PERFORMANCE								
Input Offset Voltage		A _{VMAX} = 10 V/V, V _{CM} = 0 V, V _G = 1 V		A		±4	±17	mV
						±17.8		
						±19		
Average Input Offset Voltage Drift		A _{VMAX} = 10 V/V, V _{CM} = 0 V, V _G = 1 V		B		±30	±30	μV/°C
Input Bias Current		A _{VMAX} = 10 V/V, V _{CM} = 0V, V _G = 1 V		A		19	25	μA
						29		
						31		

(1) Test levels: (A) 100% tested at 25°C . Over temperature limits set by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

Electrical Characteristics: $V_S = \pm 5\text{ V}$ (continued)

At $A_{VMAX} = 10\text{ V/V}$, $V_G = 1\text{ V}$, $R_F = 402\ \Omega$, $R_G = 80\ \Omega$, and $R_L = 100\ \Omega$, unless otherwise noted.

PARAMETER		TEST CONDITIONS		TEST LEVEL ⁽¹⁾	MIN	TYP	MAX	UNIT
Average Input Bias Current Drift		A _{VMAX} = 10 V/V, V _{CM} = 0 V, V _G = 1 V	T _A = 0°C to 70°C	B			±90	nA/°C
			T _A = −40°C to 85°				±90	
Input Offset Current		A _{VMAX} = 10 V/V, V _{CM} = 0 V, V _G = 1 V	T _A = 25°C	A		±0.5	±2.5	μA
			T _A = 0°C to 70°C				±3.2	
			T _A = −40°C to 85°C				±3.5	
Average Input Offset Current Drift		A _{VMAX} = 10 V/V, V _{CM} = 0 V, V _G = 1 V	T _A = 0°C to 70°C	B			±16	nA/°C
			T _A = −40°C to 85°C				±16	
Max Current Through Gain Resistance		T _A = 25°C T _A = 0°C to 70°C T _A = −40°C to 85°C		B		±2.6	±2.55	mA
							±2.55	
							±2.5	
INPUT								
Most Positive Common-Mode Input Voltage		R _L = 100 Ω	T _A = 25°C	A	1.6	1.6		V
			T _A = 0°C to 70°C		1.6			
			T _A = −40°C to 85°C		1.6			
Most Negative Common-Mode Input Voltage		R _L = 100 Ω	T _A = 25°C	A		−2.1	−2.1	V
			T _A = 0°C to 70°C				−2.1	
			T _A = −40°C to 85°C				−2.1	
Common-Mode Rejection Ratio		V _{CM} = ±0.5 V	T _A = 25°C	A		80	65	dB
			T _A = 0°C to 70°C				60	
			T _A = −40°C to 85°C				60	
Input Impedance	Differential			C		1 1		MΩ pF
	Common-Mode			C		1 2		MΩ pF
OUTPUT								
Output Voltage Swing		R _L = 1 kΩ	T _A = 25°C	A	±3.6	±3.9		V
			T _A = 0°C to 70°C		±3.4			
			T _A = −40°C to 85°C		±3.3			
		R _L = 100 Ω	T _A = 25°C	A	3.5	3.6		V
			T _A = 0°C to 70°C			−3.3	−3.2	
			T _A = −40°C to 85°C		3.3		−3	
Output Current		V _O = 0V, R _L = 10 Ω	Source, T _A = 25°C	A	60	90		mA
			Sink, T _A = 25°C			−55	−50	
			T _A = 0°C to 70°C		50		−42	
			T _A = −40°C to 85°C		45		−38	
Output Impedance		A _{VMAX} = 10 V/V, f > 100 kHz		C		0.01		Ω
POWER SUPPLY								
Specified Operating Voltage				C		±5		V
Minimum Operating Voltage		T _A = 25°C		B	±4			V
		T _A = 0°C to 70°C			±4			
		T _A = −40°C to 85°C			±4			
Maximum Operating Voltage		T _A = 25°C		A			±6	V
		T _A = 0°C to 70°C					±6	
		T _A = −40°C to 85°C					±6	
Maximum Quiescent Current		V _G = 0 V	T _A = 25°C	A		36.5	37.5	mA
			T _A = 0°C to 70°C				38	
			T _A = −40°C to 85°C				38.5	
Minimum Quiescent Current		V _G = 0 V	T _A = 25°C	A		36.5	35	mA
			T _A = 0°C to 70°C				34.5	
			T _A = −40°C to 85°C				34	
Power-Supply Rejection Ratio (-PSRR)		V _G = 1 V	T _A = 25°C	A	−61	−68		dB
			T _A = 0°C to 70°C		−59			
			T _A = −40°C to 85°C		−58			

7.6 Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 2\text{ V/V}$

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 453\ \Omega$, $R_G = 453\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and 14-Pin SOIC package, unless otherwise noted.

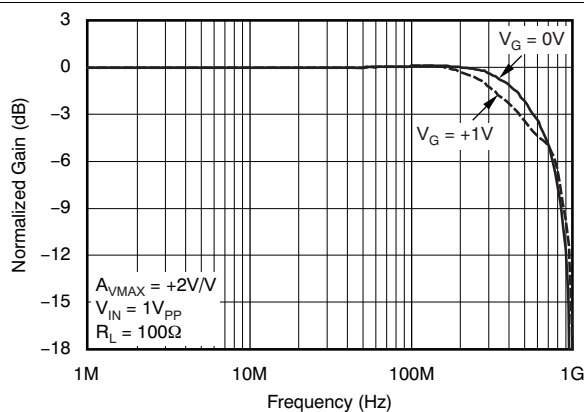


Figure 1. Small-Signal Frequency Response

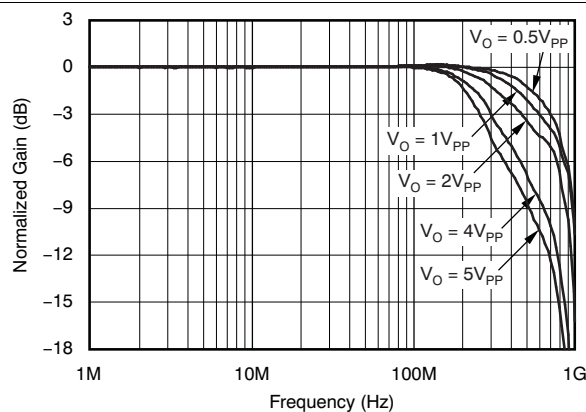


Figure 2. Large-Signal Frequency Response

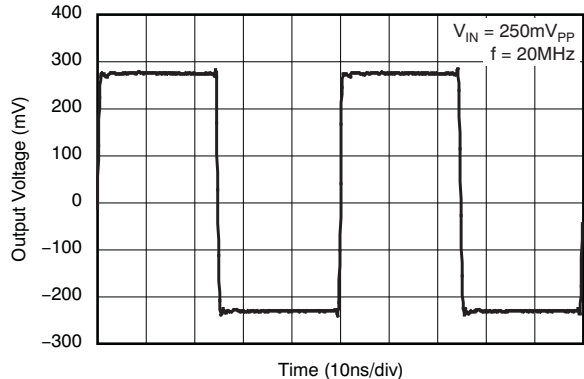


Figure 3. Small-Signal Pulse Response

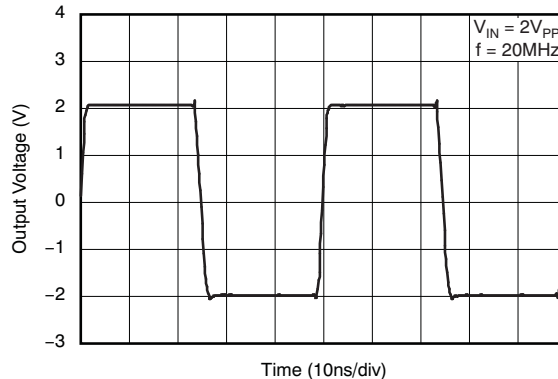


Figure 4. Large-Signal Pulse Response

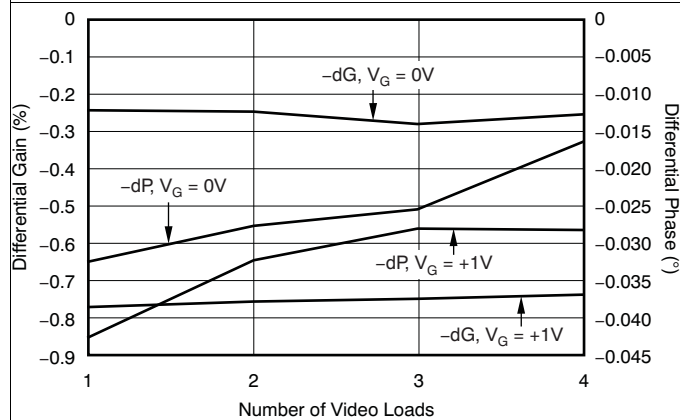


Figure 5. Composite Video dG/dP

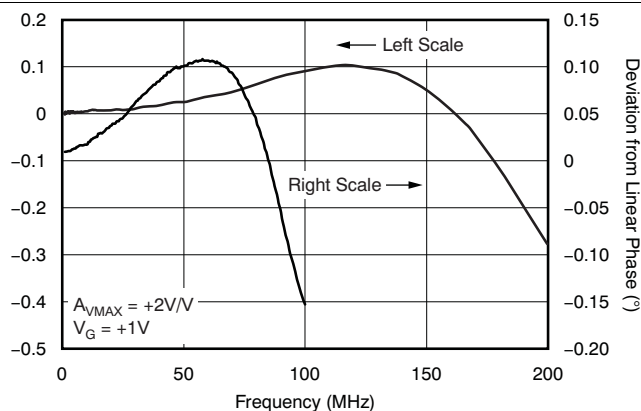


Figure 6. Gain Flatness, Deviation From Linear Phase

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 2\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 453\ \Omega$, $R_G = 453\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and 14-Pin SOIC package, unless otherwise noted.

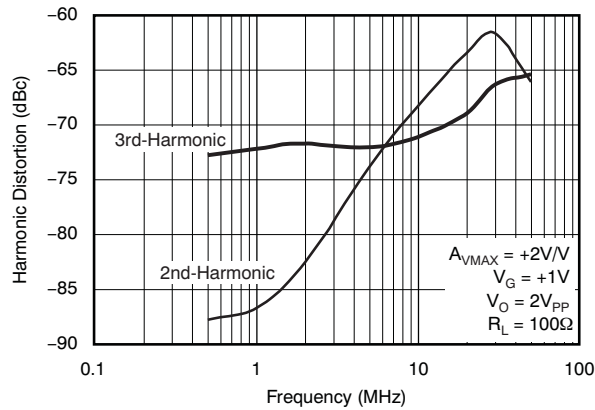


Figure 7. Harmonic Distortion vs Frequency

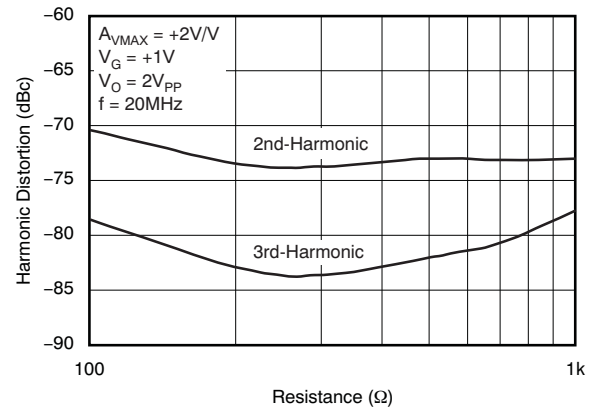


Figure 8. Harmonic Distortion vs Load Resistance

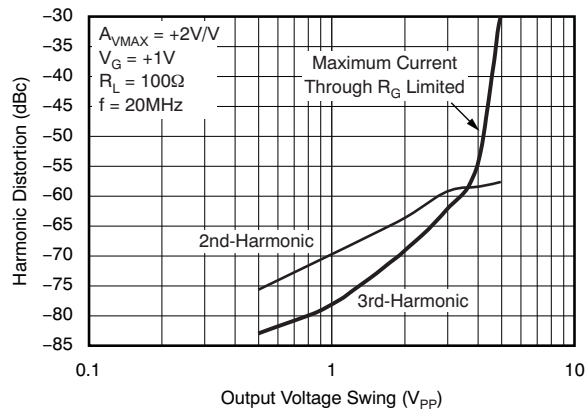


Figure 9. Harmonic Distortion vs Output Voltage

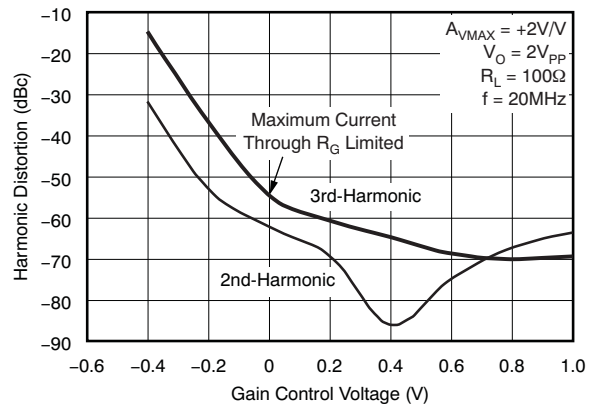


Figure 10. Harmonic Distortion vs Gain Control Voltage

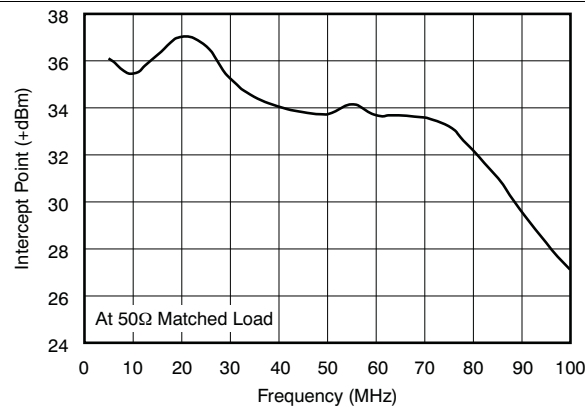


Figure 11. Two-Tone, 3rd-Order Intermodulation Intercept

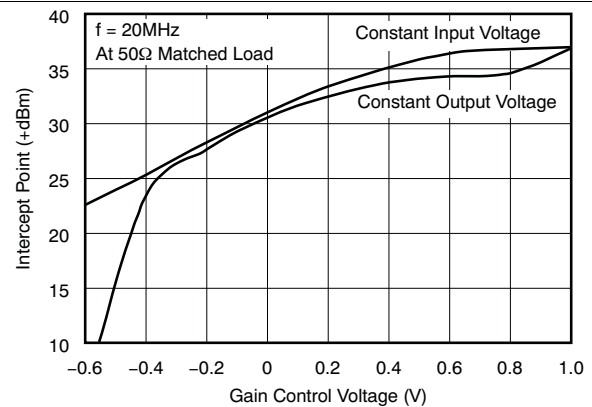


Figure 12. Two-Tone, 3rd-Order Intermodulation Intercept vs Gain Control Voltage

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{V_{MAX}} = 2\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 453\ \Omega$, $R_G = 453\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and 14-Pin SOIC package, unless otherwise noted.

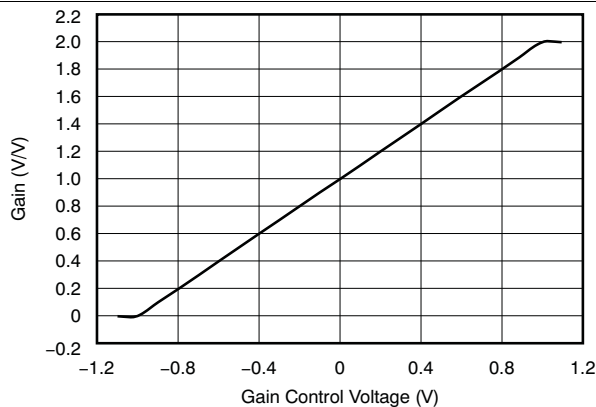


Figure 13. Gain vs Gain Control Voltage

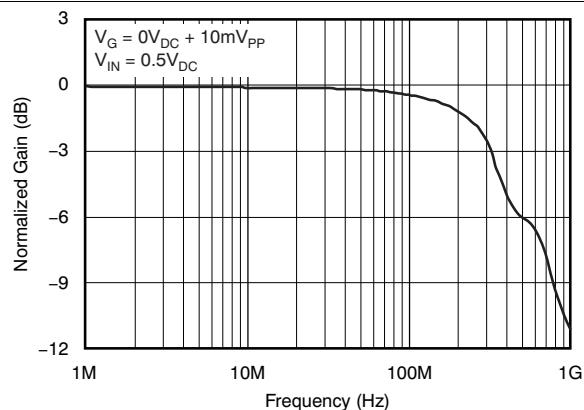


Figure 14. Gain Control Frequency Response

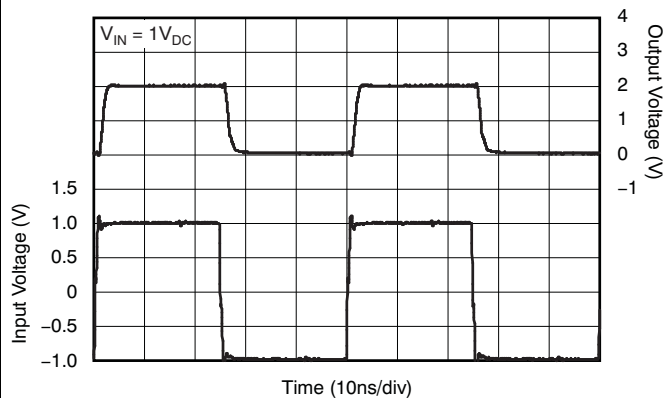


Figure 15. Gain Control Pulse Response

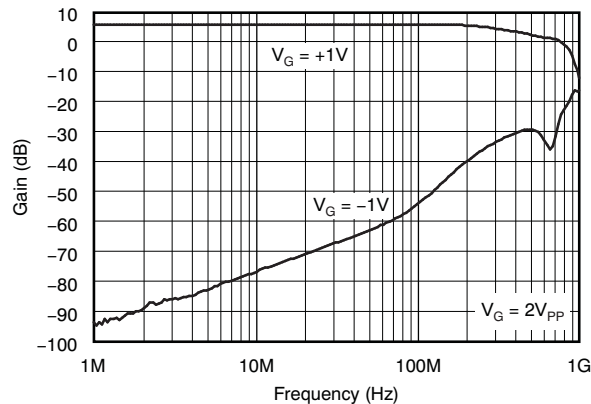


Figure 16. Fully-Attenuated Response

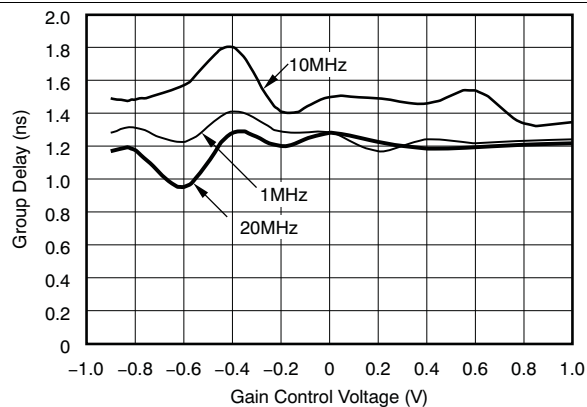


Figure 17. Group Delay vs Gain Control Voltage

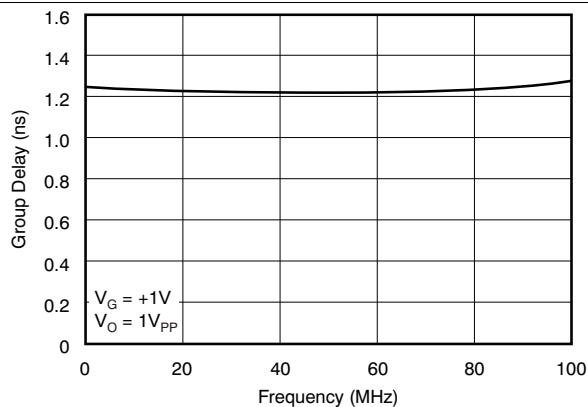


Figure 18. Group Delay vs Frequency

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{V_{MAX}} = 2\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 453\ \Omega$, $R_G = 453\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and 14-Pin SOIC package, unless otherwise noted.

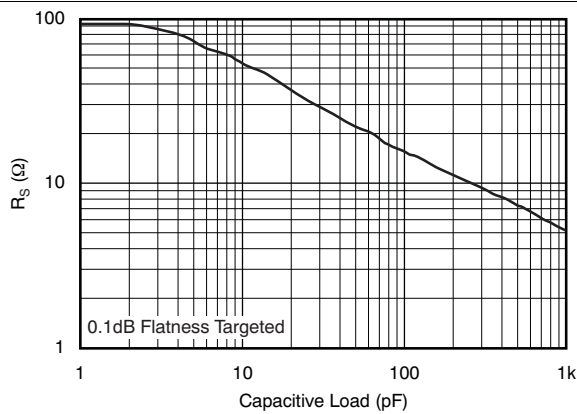


Figure 19. Recommended R_S vs Capacitive Load

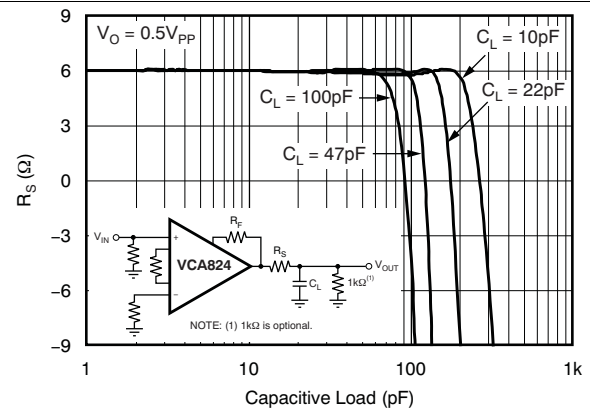


Figure 20. Frequency Response vs Capacitive Load

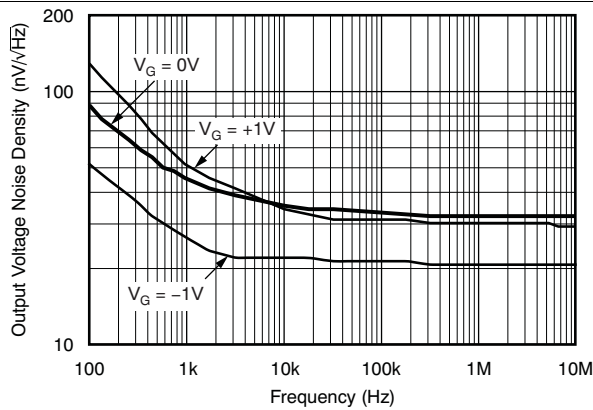


Figure 21. Output Voltage Noise Density

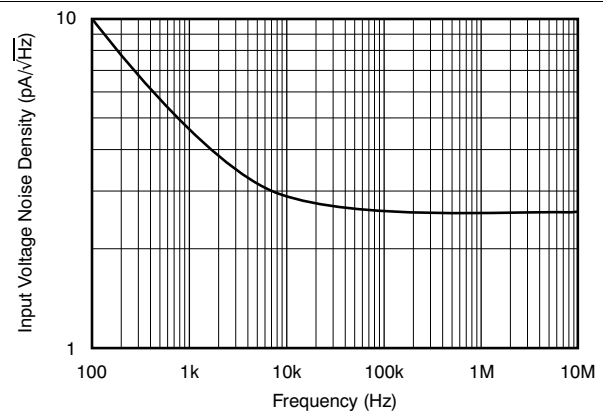


Figure 22. Input Current Noise Density

7.7 Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{V\text{MAX}} = 10\text{ V/V}$

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 80\ \Omega$, $V_G = 1\text{ V}$, and V_{IN} = single-ended input on $+V_{\text{IN}}$ with $-V_{\text{IN}}$ at ground, unless otherwise noted.

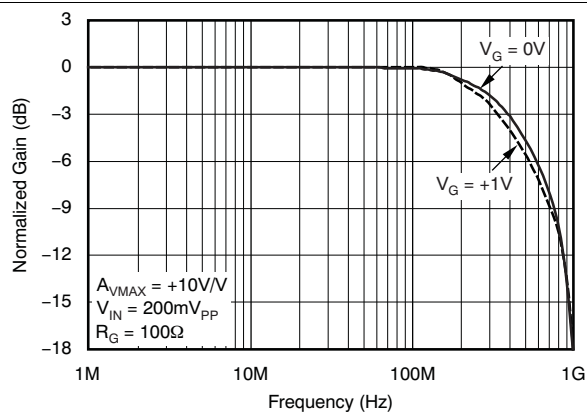


Figure 23. Small-Signal Frequency Response

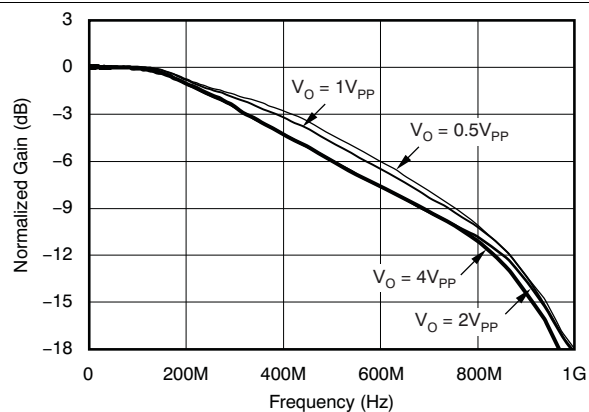


Figure 24. Large-Signal Frequency Response

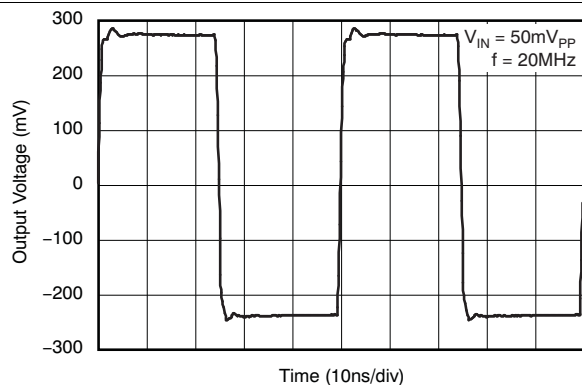


Figure 25. Small-Signal Pulse Response

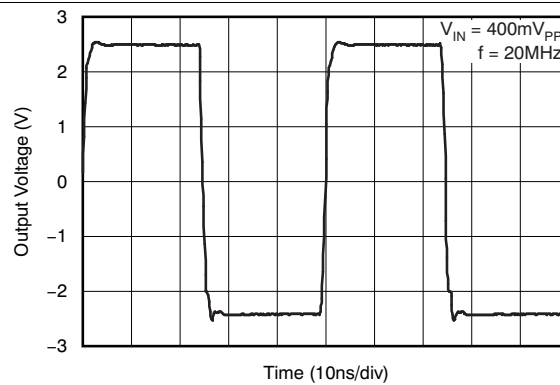


Figure 26. Large-Signal Pulse Response

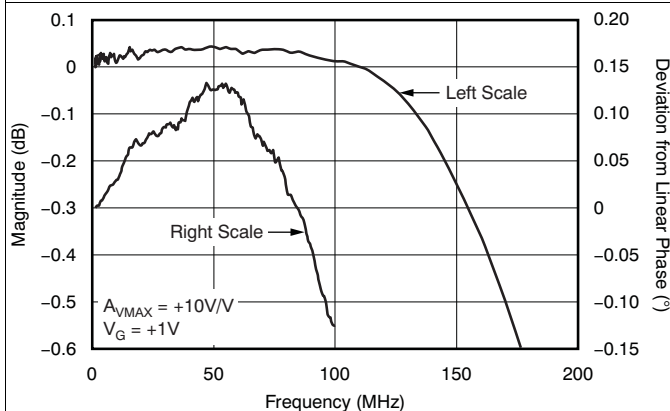


Figure 27. Gain Flatness, Deviation from Linear Phase

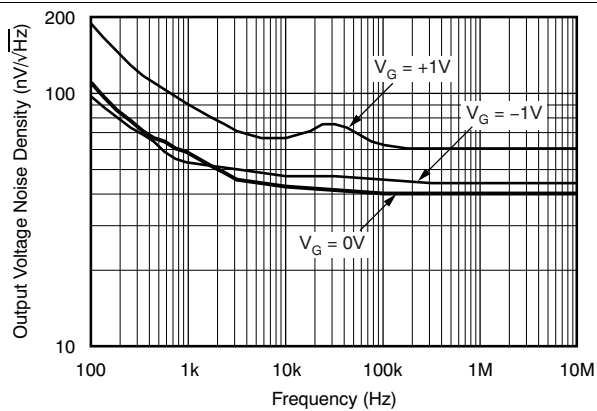


Figure 28. Output Voltage Noise Density

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 10\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 80\ \Omega$, $V_G = 1\text{ V}$, and V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, unless otherwise noted.

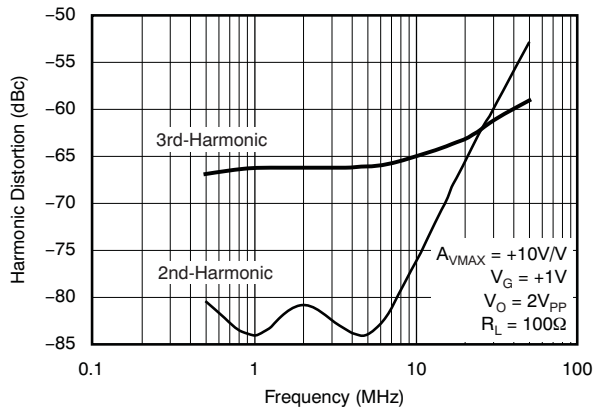


Figure 29. Harmonic Distortion vs Frequency

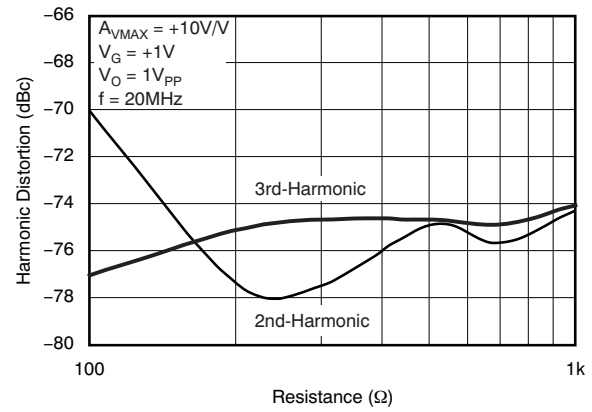


Figure 30. Harmonic Distortion vs Load Resistance

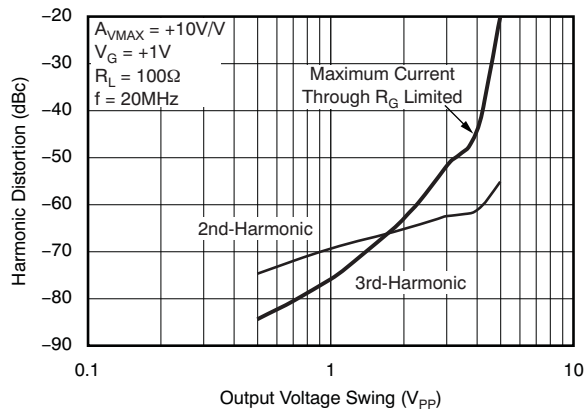


Figure 31. Harmonic Distortion vs Output Voltage

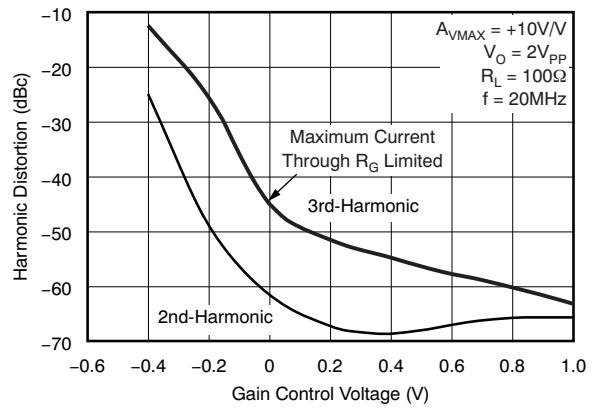


Figure 32. Harmonic Distortion vs Gain Control Voltage

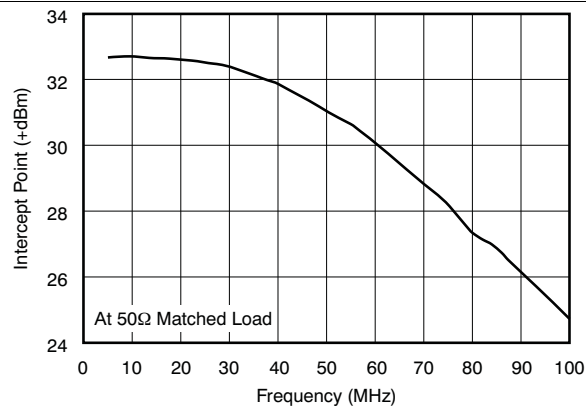


Figure 33. Two-Tone, 3rd-Order Intermodulation Intercept

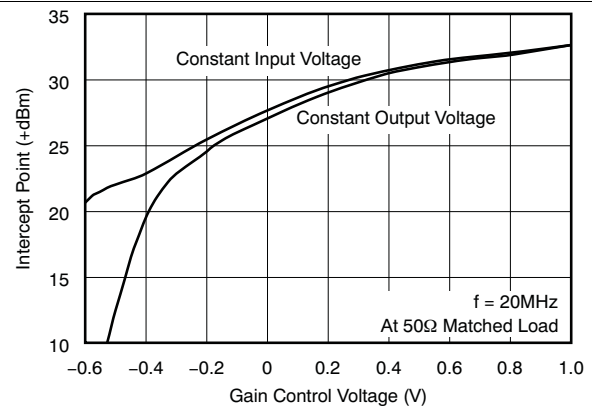


Figure 34. Two-Tone, 3rd-Order Intermodulation Intercept vs Gain Control Voltage

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 10\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 80\ \Omega$, $V_G = 1\text{ V}$, and V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, unless otherwise noted.

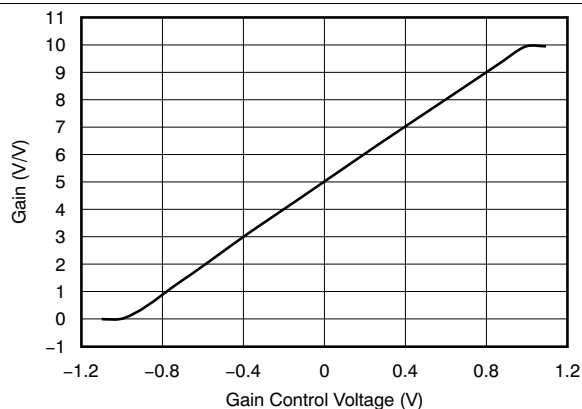


Figure 35. Gain vs Gain Control Voltage

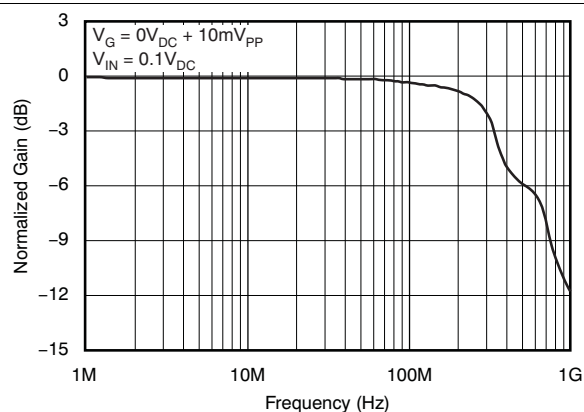


Figure 36. Gain Control Frequency Response

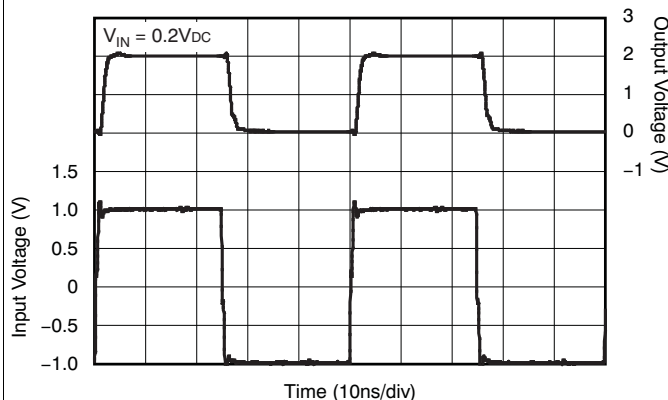


Figure 37. Gain Control Pulse Response

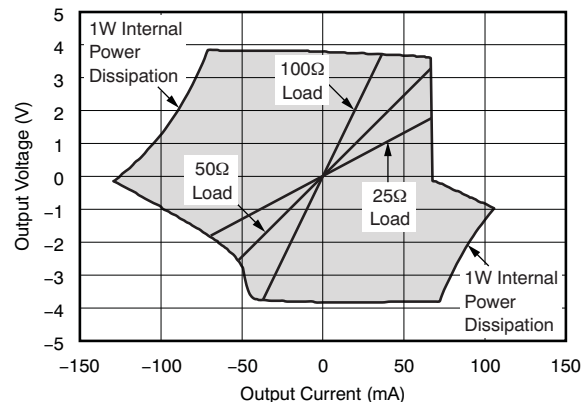


Figure 38. Output Voltage and Current Limitations

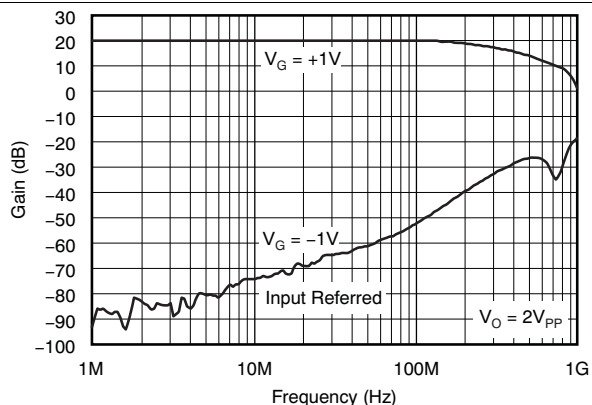


Figure 39. Fully-Attenuated Response

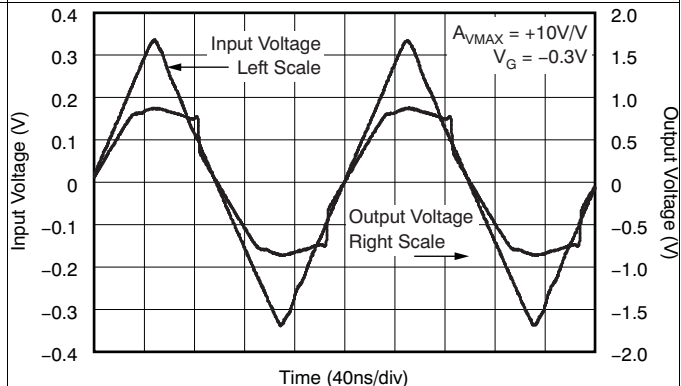


Figure 40. I_{RG} Limited Overdrive Recovery

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{V_{MAX}} = 10\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 80\ \Omega$, $V_G = 1\text{ V}$, and V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, unless otherwise noted.

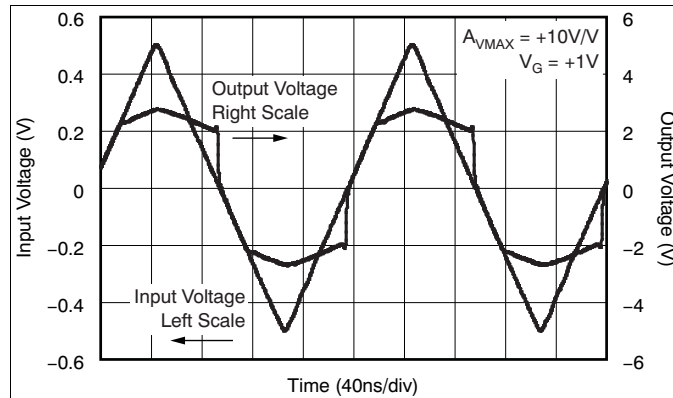


Figure 41. Output Limited Overdrive Recovery

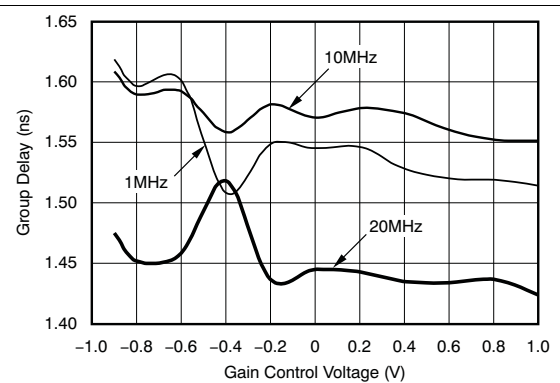


Figure 42. Group Delay vs Gain Control Voltage

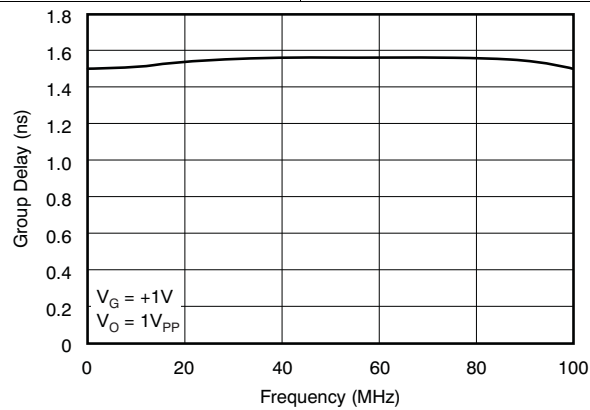


Figure 43. Group Delay vs Frequency

7.8 Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 40\text{ V/V}$

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 18\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and SO-14 package, unless otherwise noted.

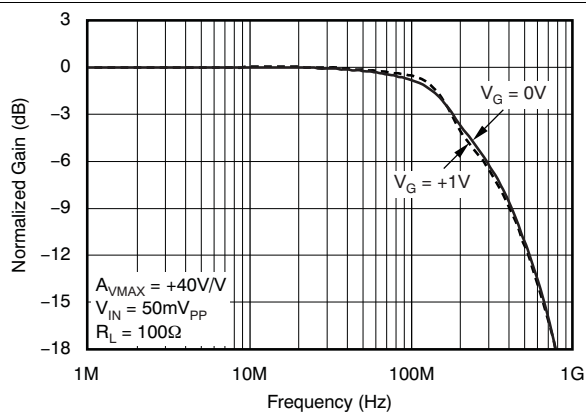


Figure 44. Small-Signal Frequency Response

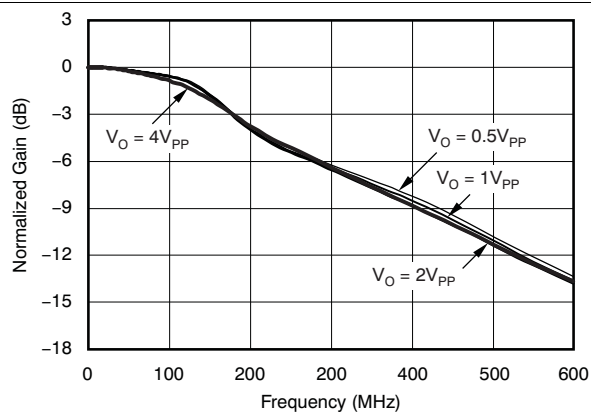


Figure 45. Large-Signal Frequency Response

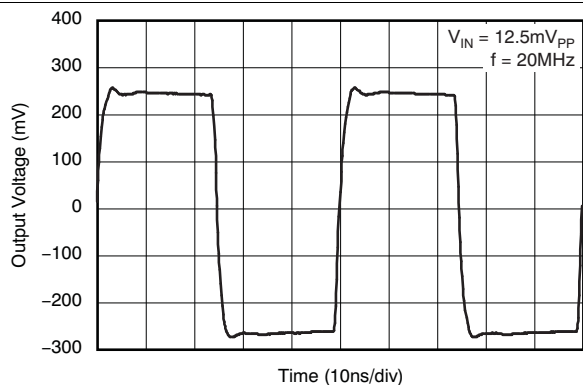


Figure 46. Small-Signal Pulse Response

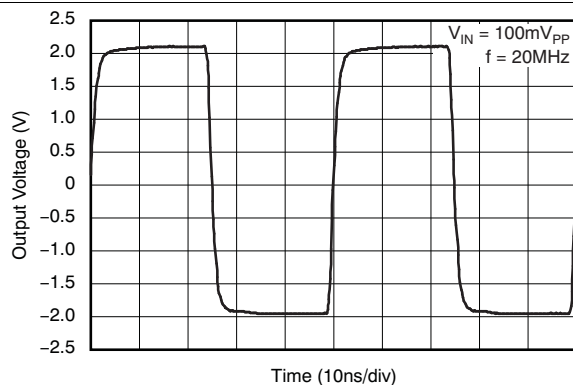


Figure 47. Large-Signal Pulse Response

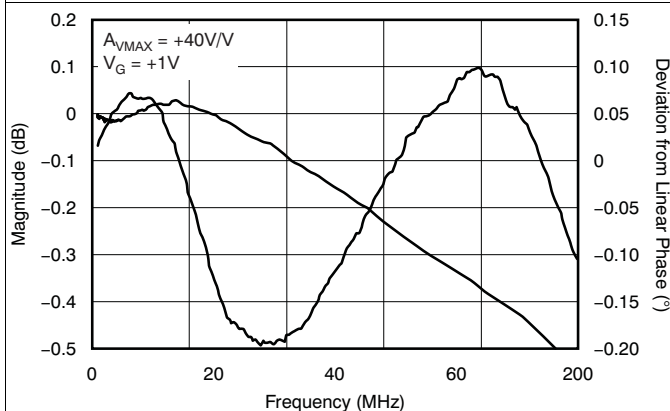


Figure 48. Gain Flatness, Deviation from Linear Phase

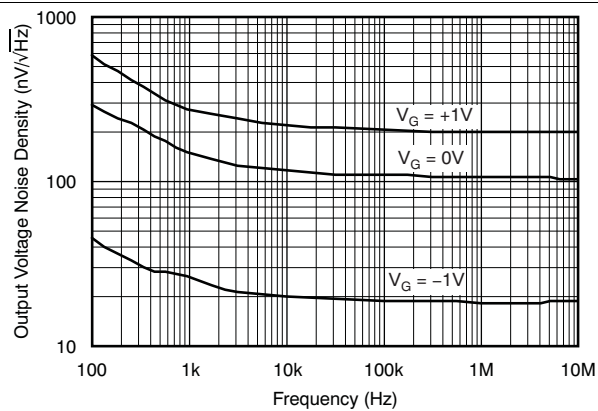


Figure 49. Output Voltage Noise Density

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 40\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 18\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and SO-14 package, unless otherwise noted.

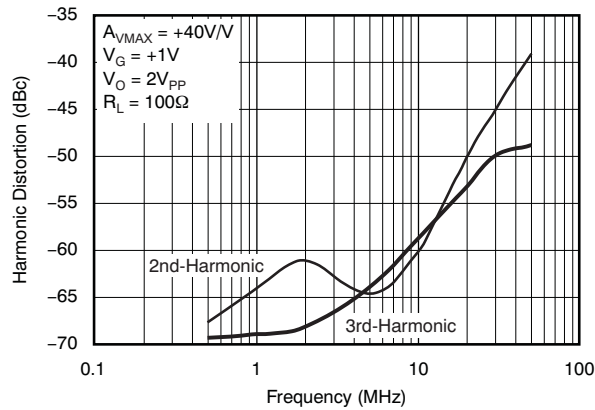


Figure 50. Harmonic Distortion vs Frequency

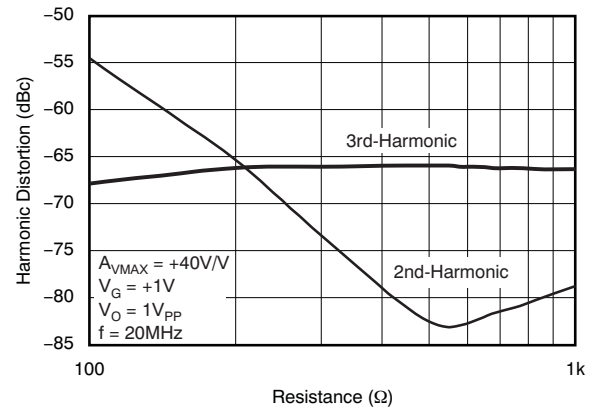


Figure 51. Harmonic Distortion vs Load Resistance

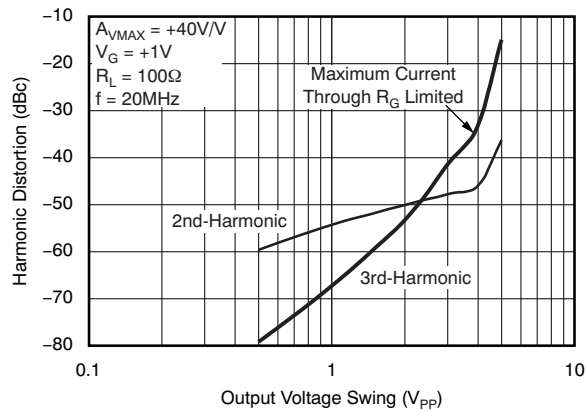


Figure 52. Harmonic Distortion vs Output Voltage

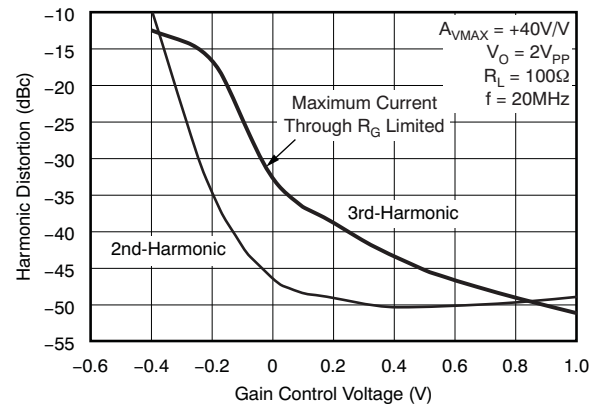


Figure 53. Harmonic Distortion vs Gain Control Voltage

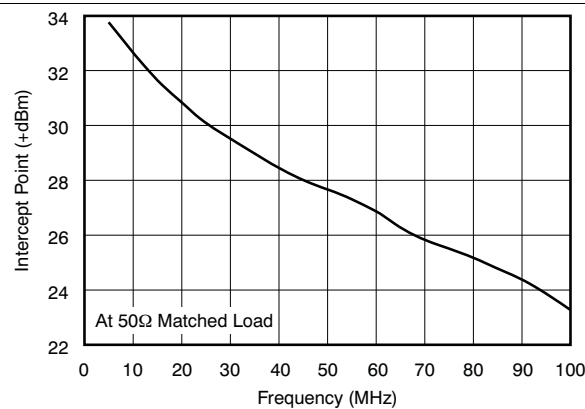


Figure 54. Two-Tone, 3rd-Order Intermodulation Intercept

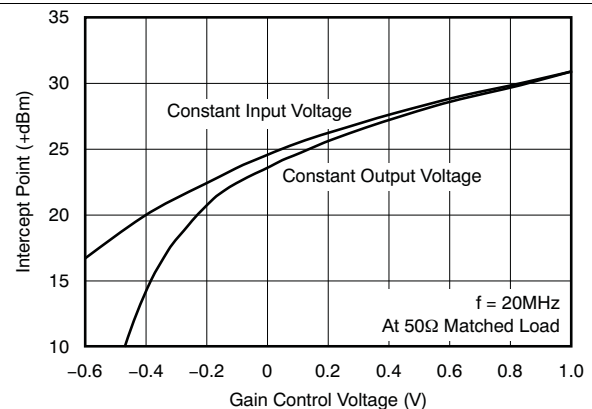


Figure 55. Two-Tone, 3rd-Order Intermodulation Intercept vs Gain Control Voltage

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{VMAX} = 40\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 18\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and SO-14 package, unless otherwise noted.

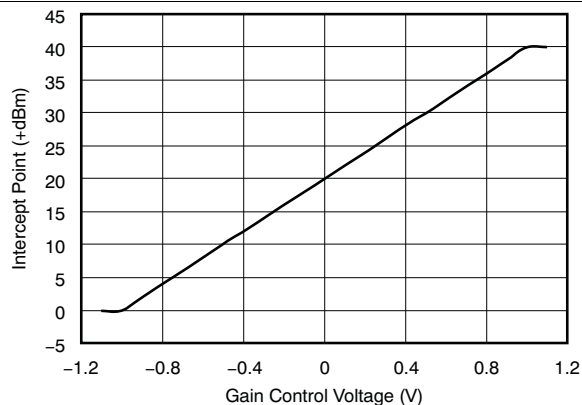


Figure 56. Gain vs Gain Control Voltage

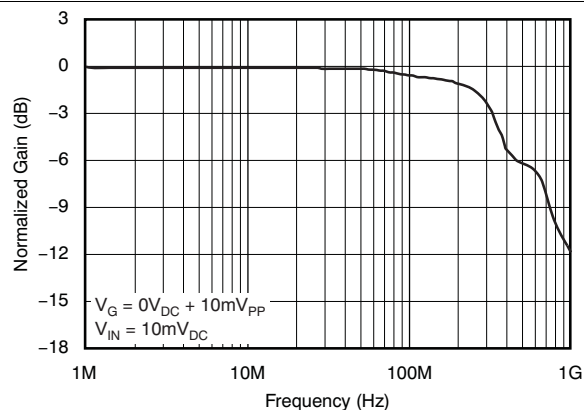


Figure 57. Gain Control Frequency Response

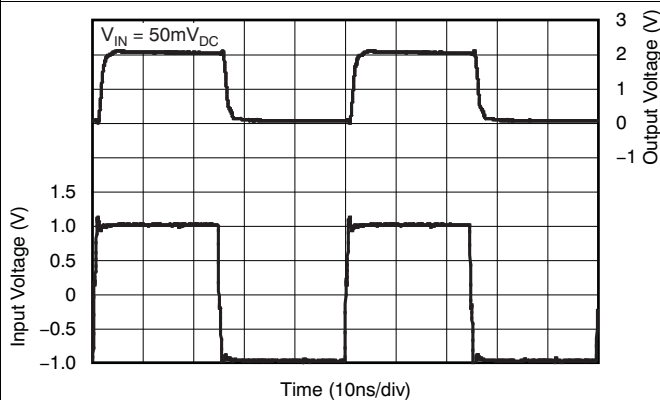


Figure 58. Gain Control Pulse Response

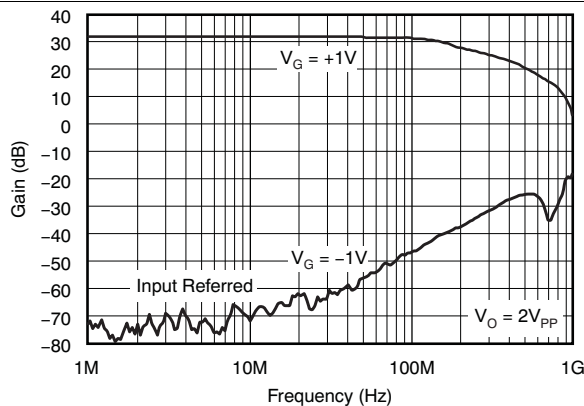


Figure 59. Fully Attenuated Response

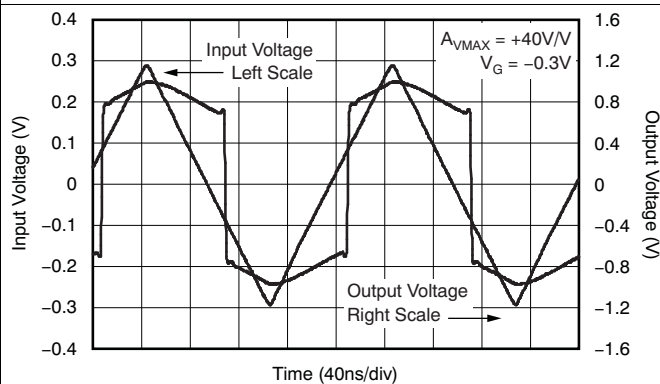


Figure 60. I_{RG} Limited Overdrive Recovery

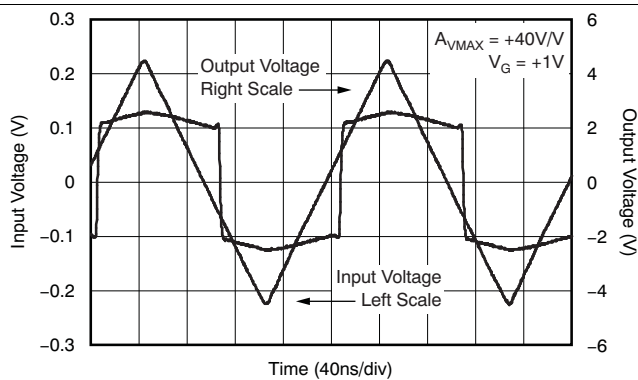


Figure 61. Output Limited Overdrive Recovery

Typical Characteristics: $V_S = \pm 5\text{ V}$, $A_{V_{MAX}} = 40\text{ V/V}$ (continued)

At $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, $R_F = 402\ \Omega$, $R_G = 18\ \Omega$, $V_G = 1\text{ V}$, V_{IN} = single-ended input on $+V_{IN}$ with $-V_{IN}$ at ground, and SO-14 package, unless otherwise noted.

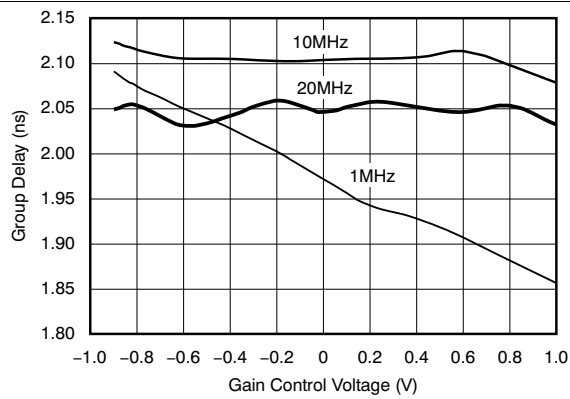


Figure 62. Group Delay vs Gain Control Voltage

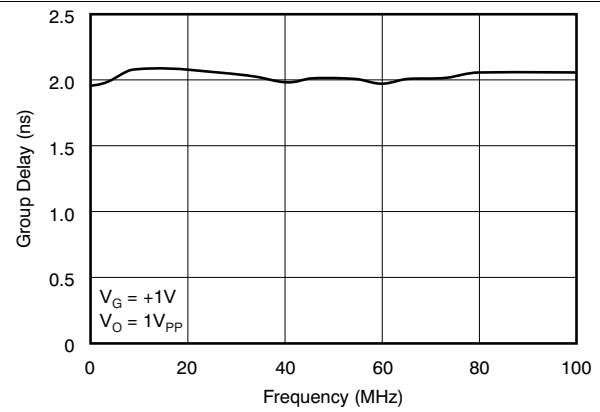



Figure 63. Group Delay vs Frequency

8 Detailed Description

8.1 Overview

The VCA824 is a voltage controlled variable gain amplifier with differential inputs and a single ended output. The maximum gain is set by external resistors while the gain range is controlled by an external analog voltage. The maximum gain is designed for gains of 2 V/V up to 100 V/V and the analog control allows a gain range of over 40 dB. The VCA824 Input consists of two buffers, which together create a fully symmetrical, high impedance differential input with a typical common mode rejection of 80 dB. The gain set resistor is connected between the two input buffer output pins, so that the input impedance is independent of the gain settings. The bipolar inputs have a input voltage range of 1.6 and -2.1 V on ± 5 V supplies. The amplifier maximum gain is set by external resistors, but the internal gain control circuit is controlled by a continuously variable, analog voltage. The gain control is a multiplier stage which is linear in V/V. The gain control input pin operates over a voltage range of -1 V to 1 V. The VCA824 contains a high-speed, high-current output buffer. The output stage can typically swing ± 3.9 V and source/sink ± 90 mA. The VCA824 can be operated over a voltage range of ± 3.5 V to ± 6 V.

8.2 Functional Block Diagram

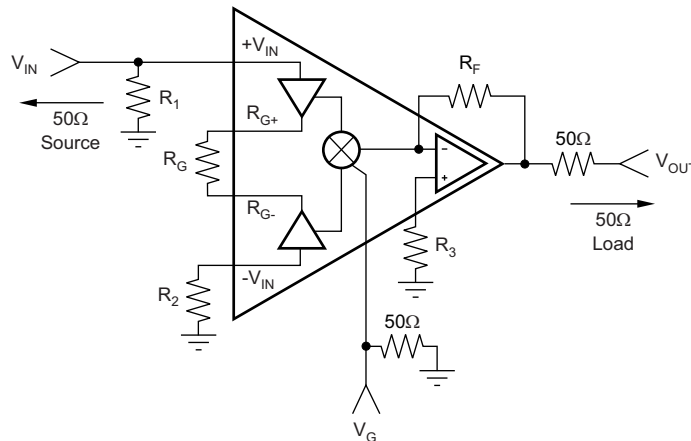

8.3 Feature Description

The VCA824 can be operated with both single ended or differential input signals. The inputs present consistently high impedance across all gain configurations. By using an analog control signal the amplifier gain is continuously variable for smooth, glitch free gain changes. With a large signal bandwidth of 320 Mhz and a slew rate of 2500 V/us the VCA824 offers linear performance over a wide range of signal amplitudes and gain settings. The low impedance/high current output buffer can drive loads ranging from low impedance transmission lines to high-impedance, switched-capacitor analog-to-digital converters. By using closely matched internal components, the VCA824 offers gain accuracy of ± 0.3 dB.

8.4 Device Functional Modes

The VCA824 functions as a differential input, single maximum gain of operation-ended output variable gain amplifier. This functional mode is enabled by applying power to the amplifier supply pins and is disabled by turning the power off. The gain is continuously variable through the analog gain control input. While the gain range is fixed, the maximum gain is set by two external components, R_f and R_g , as shown in the [Functional Block Diagram](#). The maximum gain is equal to $2 \times (R_f / R_g)$. This gain is achieved with a 1-V voltage on the gain adjust pin V_G . As the voltage decreases on the V_G pin, the gain decreases in a linear in dB fashion with over 40 dB of gain range from 1-V to -1 -V control voltage. As with most other differential input amplifiers, inputs can be applied to either one or both of the amplifier inputs. The amplifier gain is controlled through the gain control pin.

8.4.1 Maximum Gain Of Operation

This section describes the use of the VCA824 in a fixed-gain application in which the V_G control pin is set at $V_G = 1$ V. The tradeoffs described here are with bandwidth, gain, and output voltage range.

Device Functional Modes (continued)

In the case of an application that does not make use of the V_{GAIN} , but requires some other characteristic of the VCA824, the R_G resistor must be set such that the maximum current flowing through the resistance I_{RG} is less than ± 2.6 mA typical, or 5.2 mA_{PP} as defined in [Electrical Characteristics: \$V_S = \pm 5\$ V](#), and must follow [Equation 1](#).

$$I_{RG} = \frac{V_{\text{OUT}}}{A_{V\text{MAX}} \times R_G} \quad (1)$$

As [Equation 1](#) illustrates, once the output dynamic range and maximum gain are defined, the gain resistor is set. This gain setting in turn affects the bandwidth, because in order to achieve the gain (and with a set gain element), the feedback element of the output stage amplifier is set as well. Keeping in mind that the output amplifier of the VCA824 is a current-feedback amplifier, the larger the feedback element, the lower the bandwidth because the feedback resistor is the compensation element.

Limiting the discussion to the input voltage only and ignoring the output voltage and gain, [Equation 2](#) illustrates the tradeoff between the input voltage and the current flowing through the gain resistor.

8.4.2 Output Current And Voltage

The VCA824 provides output voltage and current capabilities that are unsurpassed in a low-cost monolithic VCA. Under no-load conditions at 25°C, the output voltage typically swings closer than 1 V to either supply rails; the 25°C swing limit is within 1.2 V of either rails. Into a 15-Ω load (the minimum tested load), the VCA824 device is tested to deliver more than ± 160 mA.

The specifications described above, though familiar in the industry, consider voltage and current limits separately. In many applications, it is the voltage $\times$ current, or *V-I product*, that is more relevant to circuit operation (See [Figure 38](#)). The X- and Y-axes of this graph show the zero-voltage output current limit and the zero-current output voltage limit, respectively. The four quadrants give a more detailed view of the VCA824 output drive capabilities, noting that the graph is bounded by a *Safe Operating Area* of 1-W maximum internal power dissipation. Superimposing resistor load lines onto the plot shows that the VCA824 can drive ± 2.5 V into 25-Ω or ± 3.5 V into 50-Ω without exceeding the output capabilities or the 1-W dissipation limit. A 100-Ω load line (the standard test circuit load) shows the full ± 3.9 -V output swing capability, as shown in [Typical Characteristics](#).

The minimum specified output voltage and current overtemperature are set by worst-case simulations at the cold temperature extreme. Only at cold startup do the output current and voltage decrease to the numbers shown in [Electrical Characteristic](#). As the output transistors deliver power, the respective junction temperatures increase, thereby increasing the available output voltage swing and output current.

In steady-state operation, the available output voltage and current are always greater than the temperature shown in the overtemperature specifications because the output stage junction temperatures are higher than the specified operating ambient.

8.4.3 Input Voltage Dynamic Range

The VCA824 has a input dynamic range limited to 1.6 V and -2.1 V. Increasing the input voltage dynamic range can be done by using an attenuator network on the input. If the VCA824 is trying to regulate the amplitude at the output, such as in an AGC application, the input voltage dynamic range is directly proportional to [Equation 2](#).

$$V_{\text{IN(PP)}} = R_G \times I_{\text{RG(PP)}} \quad (2)$$

As such, for unity-gain or under-attenuated conditions, the input voltage must be limited to the CMIR of ± 1.6 V (3.2 V_{PP}) and the current (I_{RG}) must flow through the gain resistor, ± 2.6 mA (5.2 mA_{PP}). This configuration sets a minimum value for R_E such that the gain resistor must be greater than [Equation 3](#).

$$R_{\text{GMIN}} = \frac{3.2V_{\text{PP}}}{5.2\text{mA}_{\text{PP}}} = 615.4\Omega \quad (3)$$

Values lower than 615.4 Ω are gain elements that result in reduced input range, as the dynamic input range is limited by the current flowing through the gain resistor R_G (I_{RG}). If the I_{RG} current limits the performance of the circuit, the input stage of the VCA824 goes into overdrive, resulting in limited output voltage range. Such I_{RG} -limited overdrive conditions are shown in [Figure 40](#) for the gain of 10V/V and [Figure 60](#) for the gain of 40 V/V.

Device Functional Modes (continued)

8.4.4 Output Voltage Dynamic Range

With its large output current capability and its wide output voltage swing of ± 3.9 V typical on 100- Ω load, it is easy to forget other types of limitations that the VCA824 can encounter. For these limitations, careful analysis must be done to avoid input stage limitation: either voltage or I_{RG} current. Note that if control pin V_G varies, the gain limitation may affect other aspects of the circuit.

8.4.5 Bandwidth

The output stage of the VCA824 is a wideband current-feedback amplifier. As such, the feedback resistance is the compensation of the last stage. Reducing the feedback element and maintaining the gain constant limits the useful range of I_{RG} , and therefore, reduces the gain adjust range. For a given gain, reducing the gain element limits the maximum achievable output voltage swing.

8.4.6 Offset Adjustment

As a result of the internal architecture used on the VCA824, the output offset voltage originates from the output stage and from the input stage and multiplier core. Figure 67 shows how to compensate both sources of the output offset voltage. Use this procedure to compensate the output offset voltage: starting with the output stage compensation, set $V_G = -1$ V to eliminate all offset contribution of the input stage and multiplier core. Adjust the output stage offset compensation potentiometer. Finally, set $V_G = 1$ V to the maximum gain and adjust the input stage and multiplier core potentiometer. This procedure effectively eliminates all offset contribution at the maximum gain. Because adjusting the gain modifies the contribution of the input stage and the multiplier core, some residual output offset voltage remains.

8.4.7 Noise

The VCA824 offers 6 nV/ $\sqrt{\text{Hz}}$ input-referred voltage noise density at a gain of 10 V/V and 2.6-pA/ $\sqrt{\text{Hz}}$ input-referred current noise density. The input-referred voltage noise density considers that all noise terms (except the input current noise but including the thermal noise of both the feedback resistor and the gain resistor) are expressed as one term.

This model is formulated in Equation 4 and Figure 68.

$$e_o = A_{V_{MAX}} \times \sqrt{2 \times (R_s \times i_n)^2 + e_n^2 + 2 \times 4kTR_s} \quad (4)$$

A more complete model is shown in Figure 69. For additional information on this model and the actual modeled noise terms, please contact the High-Speed Product Application Support team at www.ti.com.

8.4.8 Input and ESD Protection

The VCA824 is built using a very high-speed complementary bipolar process. The internal junction breakdown voltages are relatively low for these very small geometry devices. These breakdowns are reflected in the [Absolute Maximum Ratings](#).

All pins on the VCA824 are internally protected from ESD by means of a pair of back-to-back reverse-biased diodes to either power supply, as shown in Figure 64. These diodes begin to conduct when the pin voltage exceeds either power supply by about 0.7 V. This situation can occur with loss of the amplifier power supplies while a signal source is still present. The diodes can typically withstand a continuous current of 30 mA without destruction. To ensure long-term reliability, however, diode current should be externally limited to 10 mA whenever possible.

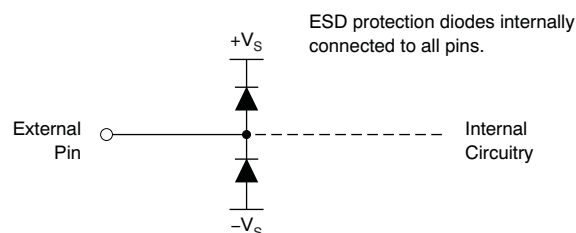


Figure 64. Internal ESD Protection

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 Difference Amplifier

Because both inputs of the VCA824 are high-impedance, a difference amplifier can be implemented without any major problem. Figure 65 shows this implementation. This circuit provides excellent common-mode rejection ratio (CMRR) as long as the input is within the CMRR range of -2.1 V to 1.6 V . Note that this circuit does not make use of the gain control pin, V_G . Also, it is recommended to choose R_S such that the pole formed by R_S and the parasitic input capacitance does not limit the bandwidth of the circuit. Figure 66 shows the common-mode rejection ratio for this circuit implemented in a gain of 10 V/V for $V_G = 1\text{ V}$. Note that because the gain control voltage is fixed and is normally set to 1 V , the feedback element can be reduced in order to increase the bandwidth. When reducing the feedback element, make sure that the VCA824 is not limited by common-mode input voltage, the current flowing through R_G , or any other limitation described in this data sheet.

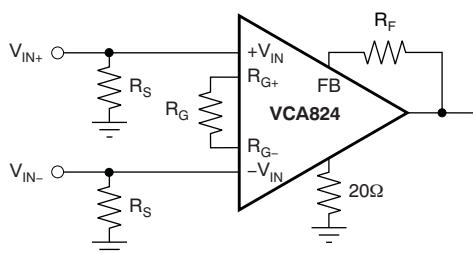


Figure 65. Difference Amplifier

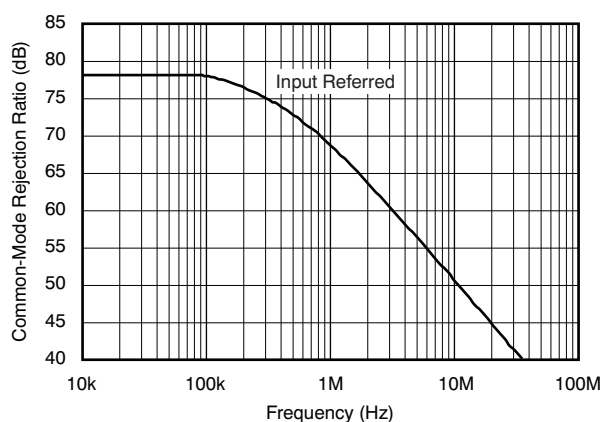


Figure 66. Common-Mode Rejection Ratio

Application Information (continued)

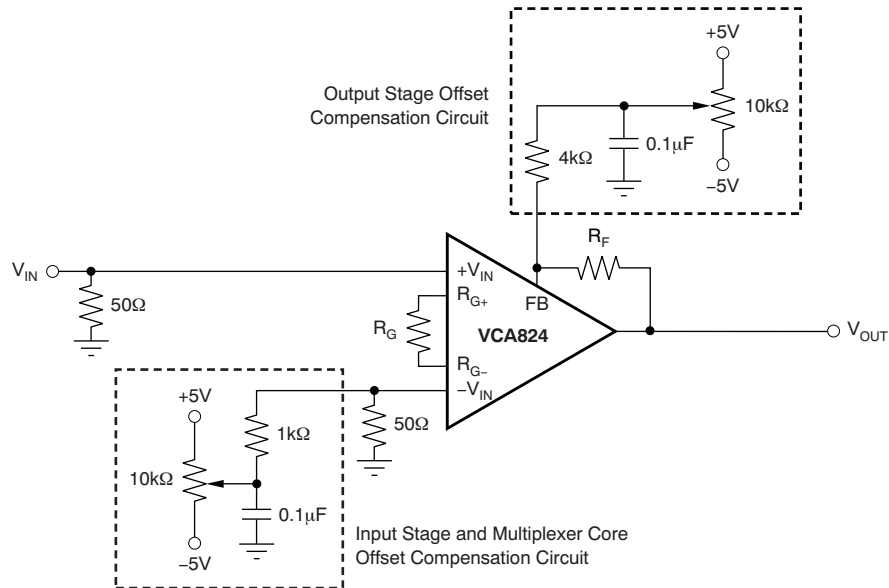


Figure 67. Adjusting the Input and Output Voltage Sources

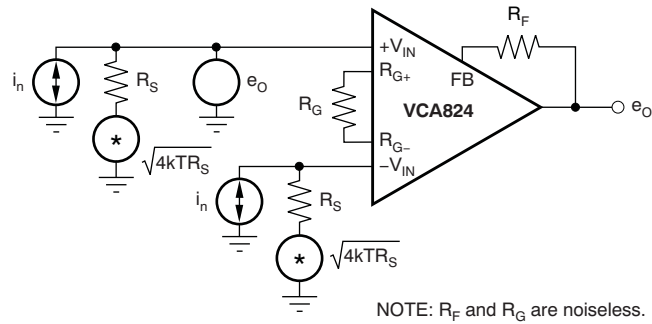


Figure 68. Simple Noise Model

Application Information (continued)

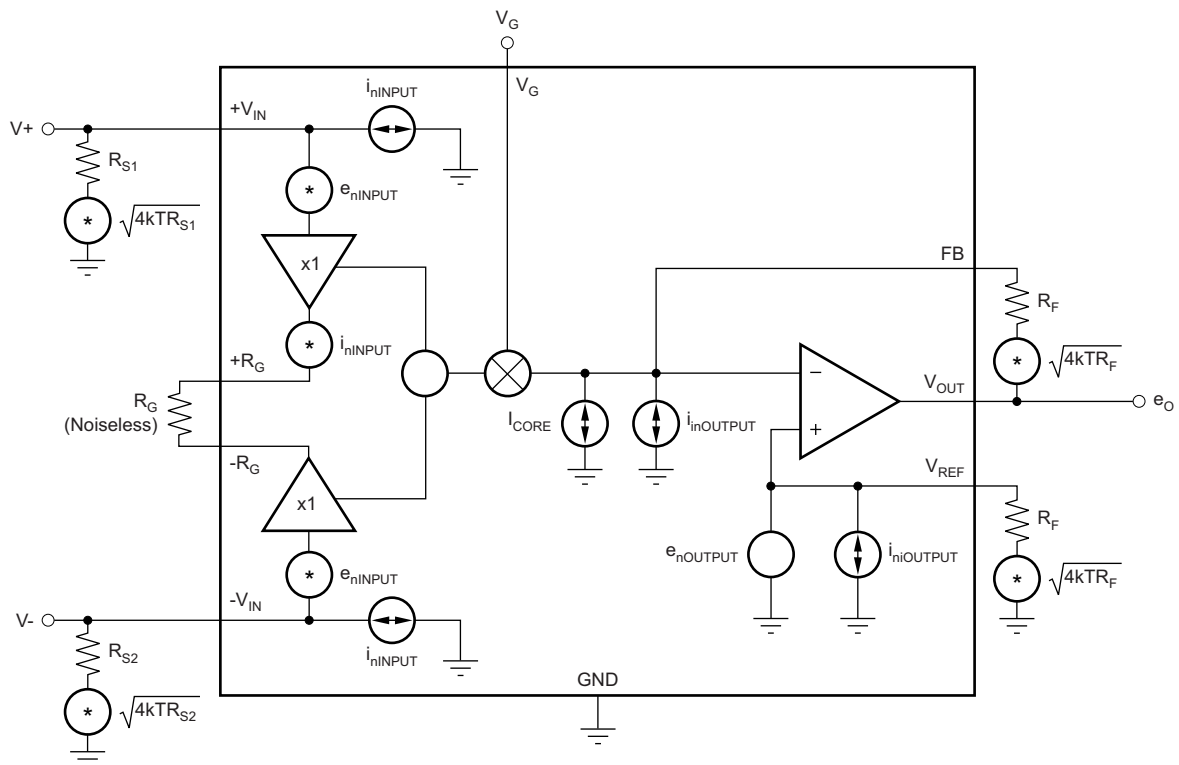


Figure 69. Full Noise Model

Application Information (continued)

9.1.2 Differential Equalizer

If the application requires frequency shaping (the transition from one gain to another), the VCA824 can be used advantageously because its architecture allows the application to isolate the input from the gain setting elements. [Figure 70](#) shows an implementation of such a configuration. The transfer function is shown in [Equation 5](#).

$$G = 2 \times \frac{R_F}{R_G} \times \frac{1 + sR_G C_1}{1 + sR_1 C_1} \quad (5)$$

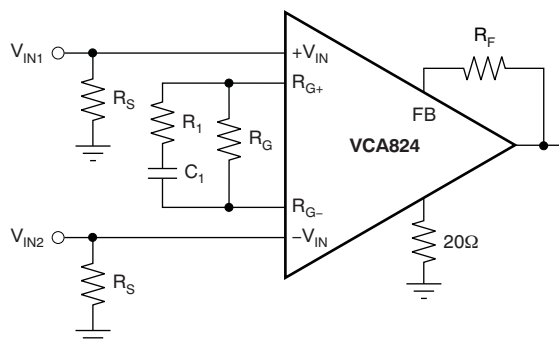


Figure 70. Differential Equalizer

This transfer function has one pole, P_1 (located at $R_G C_1$), and one zero, Z_1 (located at $R_1 C_1$). When equalizing an RC load, R_L and C_L , compensate the pole added by the load located at $R_L C_L$ with the zero Z_1 . Knowing R_L , C_L , and R_G allows the user to select C_1 as a first step and then calculate R_1 . Using $R_L = 75\text{-}\Omega$, $C_L = 100\text{pF}$ and wanting the VCA824 to operate at a gain of 2 V/V, which gives $R_F = R_G = 453\text{-k}\Omega$, allows the user to select $C_1 = 15.5\text{ pF}$ to ensure a positive value for the resistor R_1 . With all these values known, to achieve greater than 300 MHz bandwidth, R_1 can be calculated to be 20- Ω . [Figure 71](#) shows the frequency response for both the initial, unequalized frequency response and the resulting equalized frequency response.

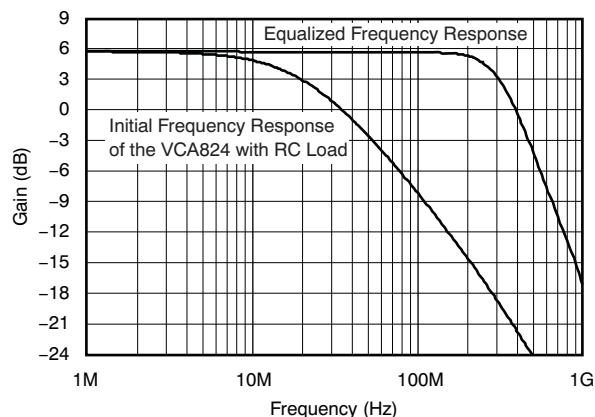


Figure 71. Differential Equalization of an RC Load

9.1.3 Differential Cable Equalizer

A differential cable equalizer can easily be implemented using the VCA824. An example of a cable equalization for 100 feet of Belden Cable 1694F is illustrated in [Figure 73](#), with [Figure 72](#) showing the result for this implementation. This implementation has a maximum error of 0.2 dB from DC to 70 MHz.

Application Information (continued)

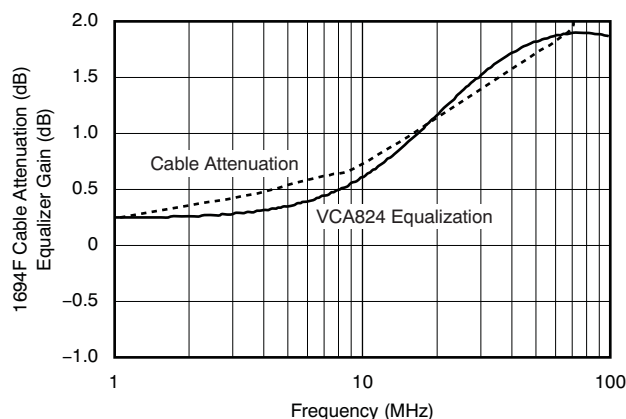


Figure 72. Cable Attenuation vs Equalizer Gain

Note that this implementation shows the cable attenuation side-by-side with the equalization in the same plot. For a given frequency, the equalization function realized with the VCA824 matches the cable attenuation. The circuit in Figure 73 is a driver circuit. To implement a receiver circuit, the signal is received differentially between the $+V_{IN}$ and $-V_{IN}$ inputs.

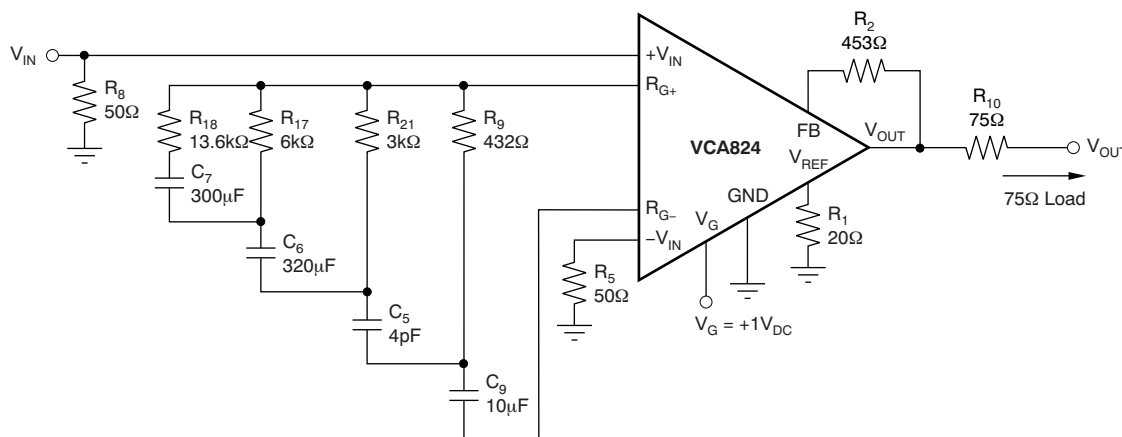


Figure 73. Differential Cable Equalizer

9.1.4 Voltage-Controlled Lowpass Filter [application sub]

In the circuit of Figure 74, the VCA824 serves as the variable-gain element of a voltage-controlled low-pass filter. This section discusses how this implementation expands the circuit voltage swing capability over that normally achieved with the equivalent multiplier implementation. The circuit control voltage, V_G , is calculated as according to the simplified relationship described in Equation 6.

$$\frac{V_{OUT}}{V_{IN}} = -\frac{R_2}{R_1} \times \frac{1}{1 + s \frac{R_2 C}{G}} \quad (6)$$

Application Information (continued)

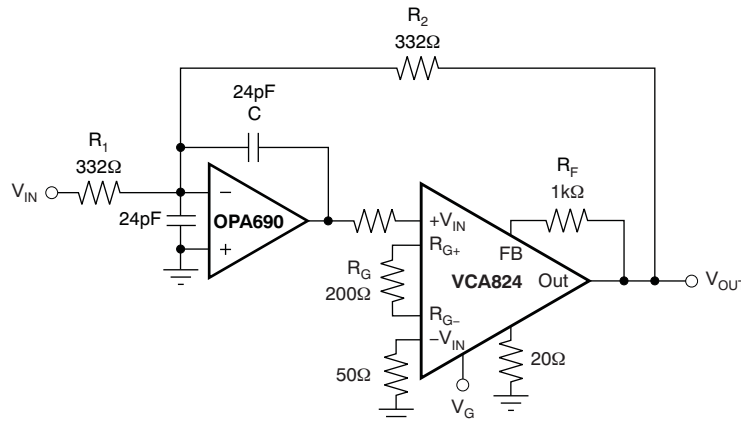


Figure 74. Voltage-Control Low-Pass Filter

The response control results from amplification of the feedback voltage applied to R_2 . First, consider the case where the VCA824 produces $G = 1V/V$. Then this circuit performs as if the amplifier were replaced by a short circuit. Visually replacing the amplifier by a short leaves a simple voltage-feedback amplifier with a feedback resistor bypassed by a capacitor. Replacing this gain with a variable gain, G , the pole can be written as shown in Equation 7.

$$f_8 = \frac{G}{2\pi R_2 C} \quad (7)$$

Because the VCA824 is most linear in the midrange, the median of the adjustable pole should be set at $V_G = 0V$ (see Figure 13, Figure 33, Figure 54, and Equation 8). Selecting $R_1 = R_2 = 332\Omega$, and targeting a median frequency of 10MHz, the capacitance (C) is 24pF. Because the OPA690 was selected for the circuit of Figure 74, and in order to limit peaking in the OPA690 frequency response, a capacitor equal to C was added on the inverting mode to ground. This architecture has the effect of setting the high-frequency noise gain of the OPA690 to 2V/V, ensuring stability and providing flat frequency response.

$$-0.8V \leq V_G \leq 0.8V \quad (8)$$

Once the median frequency is set, the maximum and minimum frequencies can be determined by using $V_G = -0.8V$ and $V_G = 0.8V$ in the gain equation of Equation 9. Note that this is a first-order analysis and does not take into consideration the open-loop gain limitation of the OPA690.

$$G = 2 \times \frac{R_F}{R_G} \times \frac{V_G + 1}{2} \quad (9)$$

With the components shown, the circuit provides a linear variation of the low-pass cutoff from 2MHz to 20MHz, using $-1V \leq V_G \leq 1V$.

9.1.5 Wideband Variable Gain Amplifier Operation

The VCA824 provides an exceptional combination of high output power capability with a wideband, greater than 40dB gain adjust range, linear in V/V variable gain amplifier. The VCA824 input stage places the transconductance element between two input buffers, using the output currents as the forward signal. As the differential input voltage rises, a signal current is generated through the gain element. This current is then mirrored and gained by a factor of two before reaching the multiplier. The other input of the multiplier is the voltage gain control pin, V_G . Depending on the voltage present on V_G , up to two times the gain current is provided to the transimpedance output stage. The transimpedance output stage is a current-feedback amplifier providing high output current capability and high slew rate, 2500 V/ μ s. This exceptional full-power performance comes at the price of relatively high quiescent current (36.5 mA), but low input voltage noise for this type of architecture (6 nV/ $\sqrt{Hz}$).

Application Information (continued)

Figure 75 shows the dc-coupled, gain of 10 V/V, dual power-supply circuit used as the basis of *Electrical Characteristics*- $V_S = \pm 5\text{ V}$ *Electrical Characteristics*: $V_S = \pm 5\text{ V}$ and *Typical Characteristics*. For test purposes, the input impedance is set to 50- Ω with a resistor to ground and the output impedance is set to 50- Ω with a series output resistor. Voltage swings reported in *Electrical Characteristics*- $V_S = \pm 5\text{ V}$ are taken directly at the input and output pins, while output power (dBm) is at the matched 50- Ω load. For the circuit in Figure 75, the total effective load is 100- $\Omega \parallel 1\text{-k}\Omega$. Note that for the 14-pin, SOIC package, there is a voltage reference pin, V_{REF} (pin 9). For the 14-pin SOIC package, this pin must be connected to ground through a 20- Ω resistor to avoid possible oscillations of the output stage. In the 10-pin, MSOP package, this pin is internally connected and does not require such precaution. An X2Y[®] capacitor has been used for power-supply bypassing. The combination of low inductance, high resonance frequency, and integration of three capacitors in one package (two capacitors to ground and one across the supplies) enables the VCA824 to achieve the low second-harmonic distortion reported in *Electrical Characteristics*- $V_S = \pm 5\text{ V}$.

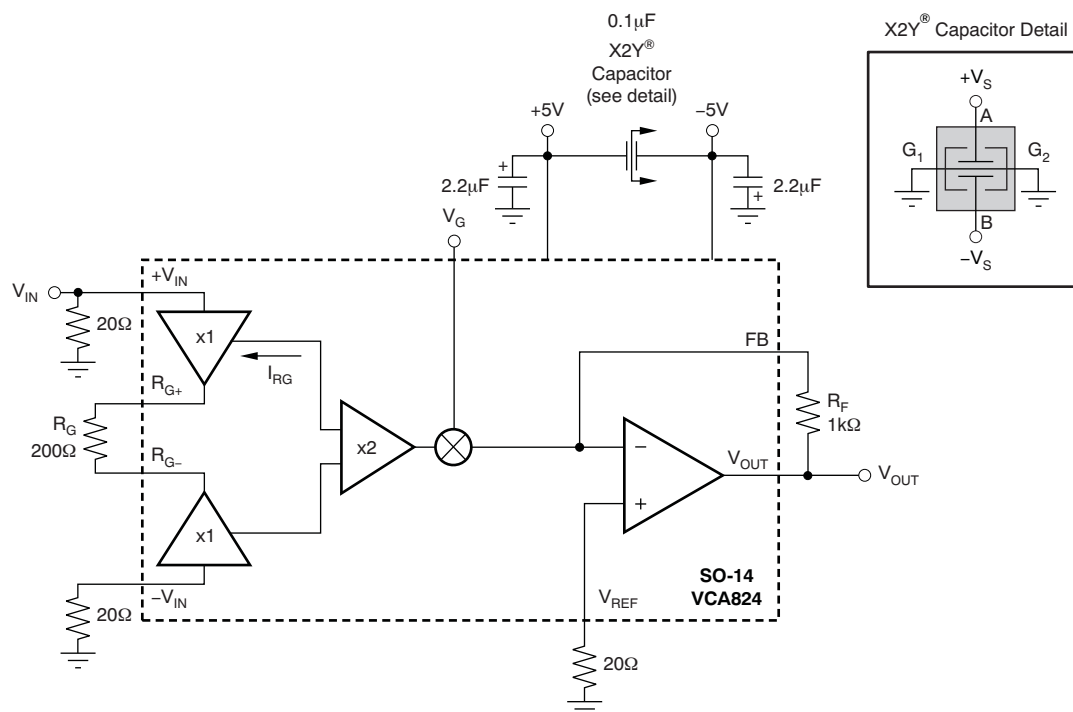


Figure 75. DC-Coupled, $A_{VMAX} = 10\text{ V/V}$, Bipolar Supply Specification and Test Circuit

9.2 Typical Application

A four-quadrant multiplier can easily be implemented using the VCA824. By placing a resistor between FB and V_{IN} , the transfer function depends upon both V_{IN} and V_G , as shown in Equation 10.

$$V_{OUT} = \frac{R_F}{R_G} \times V_G \times V_{IN} + \left[\frac{R_F}{R_G} - \frac{R_F}{R_1} \right] \times V_{IN} \quad (10)$$

Setting R_1 to equal R_G , the term that depends only on V_{IN} drops out of the equation, leaving only the term that depends on both V_G and V_{IN} . V_{OUT} then follows Equation 11.

$$V_{OUT} = \frac{R_F}{R_G} \times V_{IN} \times V_G \quad (11)$$

Typical Application (continued)

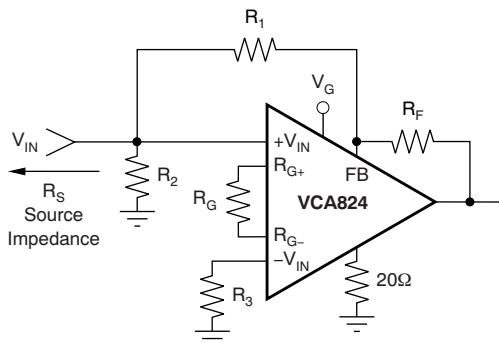


Figure 76. Four-Quadrant Multiplier Circuit

Figure 77 illustrates the behavior of this circuit. Keeping the input amplitude of a 1-MHz signal constant and varying the V_G voltage (100 kHz, 2 V_{PP}) gives the modulated output voltage shown in Figure 77.

9.2.1 Design Requirements

A multiplier requires two inputs, one for the X input and one for the Y input. The output of the multiplier circuit is in the form of $V_{out} = aV_{in1} \times bV_{in2}$: where a and b are real numbers and should not be negative. For four quadrant operation both positive and negative inputs must be supported on the X and Y inputs.

A four-quadrant multiplier can easily be implemented using the VCA824. By placing a resistor between FB and VIN, the transfer function depends upon both VIN and V_G , as shown in Equation 10

9.2.2 Detailed Design Procedure

Setting R1 to equal RG, the term that depends only on VIN drops out of the equation, leaving only the term that depends on both VG and VIN. VOUT then follows Equation 11.

The behavior of this circuit is illustrated in Figure 77. Keeping the input amplitude of a 1MHz signal constant and varying the VG voltage (100 kHz, 2 VPP) gives the modulated output voltage shown in Figure 77.

9.2.3 Application Curve

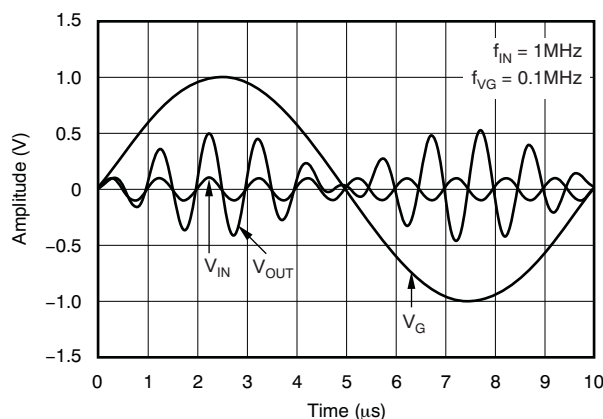


Figure 77. Modulated Output Signal of the 4-Quadrant Multiplier Circuit

10 Power Supply Recommendations

High-speed amplifiers require low inductance power supply traces and low ESR bypass capacitors. When possible both power and ground planes should be used in the printed circuit board design and the power plane should be adjacent to the ground plane in the board stack-up. The power supply voltage should be centered on the desired amplifier output voltage, so for ground referenced output signals, split supplies are required. The power supply voltage should be from 7-V to 12-V.

11 Layout

11.1 Layout Guidelines

Achieving optimum performance with a high-frequency amplifier such as the VCA824 requires careful attention to printed circuit board (PCB) layout parasitics and external component types. Recommendations to optimize performance include:

- a. **Minimize parasitic capacitance** to any AC ground for all of the signal I/O pins. This recommendation includes the ground pin (pin 2). Parasitic capacitance on the output can cause instability: on both the inverting input and the noninverting input, it can react with the source impedance to cause unintentional band limiting. To reduce unwanted capacitance, a window around the signal I/O pins should be opened in all of the ground and power planes around those pins. Otherwise, ground and power planes should be unbroken elsewhere on the board. Place a small series resistance (greater than 25-Ω) with the input pin connected to ground to help decouple package parasitics.
- b. **Minimize the distance** (less than 0.25") from the power-supply pins to high-frequency 0.1-μF decoupling capacitors. At the device pins, the ground and power plane layout should not be in close proximity to the signal I/O pins. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. The power-supply connections should always be decoupled with these capacitors. Larger (2.2-μF to 6.8-μF) decoupling capacitors, effective at lower frequencies, should also be used on the main supply pins. These capacitors may be placed somewhat farther from the device and may be shared among several devices in the same area of the PCB.
- c. **Careful selection and placement** of external components preserve the high-frequency performance of the VCA824. Resistors should be a very low reactance type. Surface-mount resistors work best and allow a tighter overall layout. Metal-film and carbon composition, axially-leaded resistors can also provide good high-frequency performance. Again, keep the leads and PCB trace length as short as possible. Never use wire-wound type resistors in a high-frequency application. Because the output pin is the most sensitive to parasitic capacitance, always position the series output resistor, if any, as close as possible to the output pin. Other network components, such as inverting or noninverting input termination resistors, should also be placed close to the package.
- d. **Connections to other wideband devices** on the board may be made with short direct traces or through onboard transmission lines. For short connections, consider the trace and the input to the next device as a lumped capacitive load. Relatively wide traces (50 mils to 100 mils, or 1.27 mm to 2.54 mm) should be used, preferably with ground and power planes opened up around them.
- e. **Socketing a high-speed part like the VCA824 device is not recommended.** The additional lead length and pin-to-pin capacitance introduced by the socket can create an extremely troublesome parasitic network, which can make it almost impossible to achieve a smooth, stable frequency response. Best results are obtained by soldering the VCA824 device onto the board.

11.1.1 Thermal Considerations

The VCA824 does not require heatsinking or airflow in most applications. The maximum desired junction temperature sets the maximum allowed internal power dissipation as described in this section. In no case should the maximum junction temperature be allowed to exceed 150°C.

Operating junction temperature (T_J) is given by [Equation 12](#):

$$T_J = T_A + P_D \times \theta_{JA} \quad (12)$$

Layout Guidelines (continued)

The total internal power dissipation (P_D) is the sum of quiescent power (P_{DQ}) and additional power dissipated in the output stage (P_{DL}) to deliver load power. Quiescent power is simply the specified no-load supply current times the total supply voltage across the part. P_{DL} depends on the required output signal and load; for a grounded resistive load, however, it is at a maximum when the output is fixed at a voltage equal to one-half of either supply voltage (for equal bipolar supplies). Under this worst-case condition, $P_{DL} = V_S^2 / (4 \times R_L)$, where R_L is the resistive load.

Note that it is the power in the output stage and not in the load that determines internal power dissipation. As a worst-case example, compute the maximum T_J using a VCA824ID (SO-14 package) in the circuit of Figure 75 operating at maximum gain and at the maximum specified ambient temperature of 85°C.

$$P_D = 10V(38.5mA) + 5^2 / (4 \times 100\Omega) = 447.5mW \quad (13)$$

$$\text{Maximum } T_J = +85^\circ\text{C} + (0.449W \times 80^\circ\text{C/W}) = 120.8^\circ\text{C} \quad (14)$$

This maximum operating junction temperature is well below most system level targets. Most applications should be lower because an absolute worst-case output stage power was assumed in this calculation of $V_{CC}/2$, which is beyond the output voltage range for the VCA824.

11.2 Layout Example

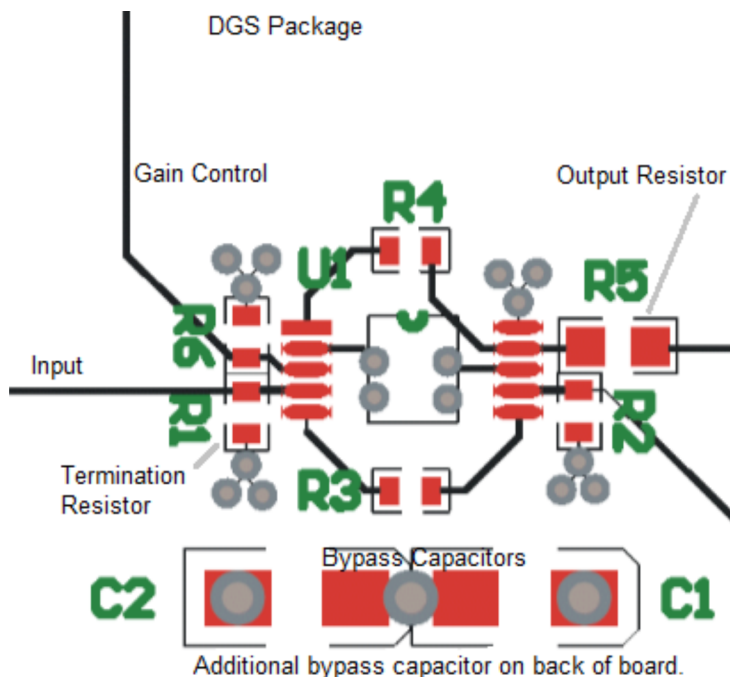


Figure 78. Layout Recommendation

12 器件和文档支持

12.1 器件支持

12.1.1 开发支持

12.1.1.1 演示板

我们提供两块印刷电路板 (PCB)，可帮助初步评估在两种封装方案中使用 VCA824 时的电路性能。两块电路板都作为空白 PCB 免费提供，并随附一份用户指南。这些装置的摘要信息如表 1 所示。

表 1. EVM 订购信息

产品	封装	电路板器件型号	文献申请编号
VCA824ID	SO-14	DEM-VCA-SO-1B	SBOU050
VCA824IDGS	MSOP-10	DEM-VCA-MSOP-1A	SBOU051

可在德州仪器 (TI) 网站 (www.ti.com.cn) 上的 VCA824 产品文件夹下申请这些演示装置。

12.2 接收文档更新通知

要接收文档更新通知，请导航至 TI.com.cn 上的器件产品文件夹。单击右上角的通知我 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

12.3 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.4 商标

E2E is a trademark of Texas Instruments.

X2Y is a registered trademark of X2Y Attenuators LLC.

All other trademarks are the property of their respective owners.

12.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

12.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请查阅左侧的导航栏。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
VCA824ID	Active	Production	SOIC (D) 14	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	VCA824ID
VCA824ID.A	Active	Production	SOIC (D) 14	50 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	VCA824ID
VCA824IDGST	Active	Production	VSSOP (DGS) 10	250 SMALL T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 85	BOT
VCA824IDGST.A	Active	Production	VSSOP (DGS) 10	250 SMALL T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 85	BOT

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
VCA824IDGST	VSSOP	DGS	10	250	180.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
VCA824IDGST	VSSOP	DGS	10	250	213.0	191.0	35.0

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
VCA824ID	D	SOIC	14	50	506.6	8	3940	4.32
VCA824ID.A	D	SOIC	14	50	506.6	8	3940	4.32

D0014A**PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



4220718/A 09/2016

NOTES:

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE
SCALE:8X

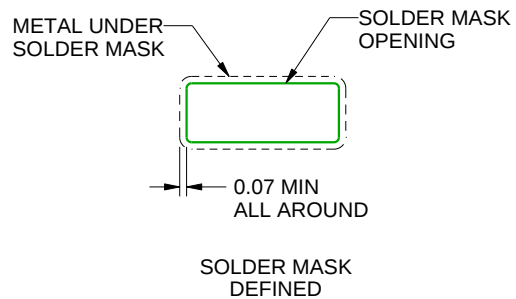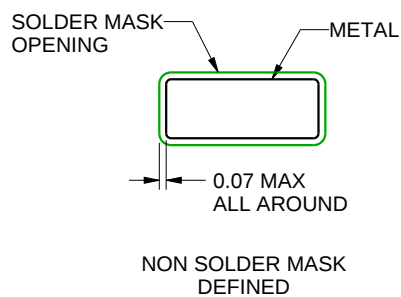

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT




SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

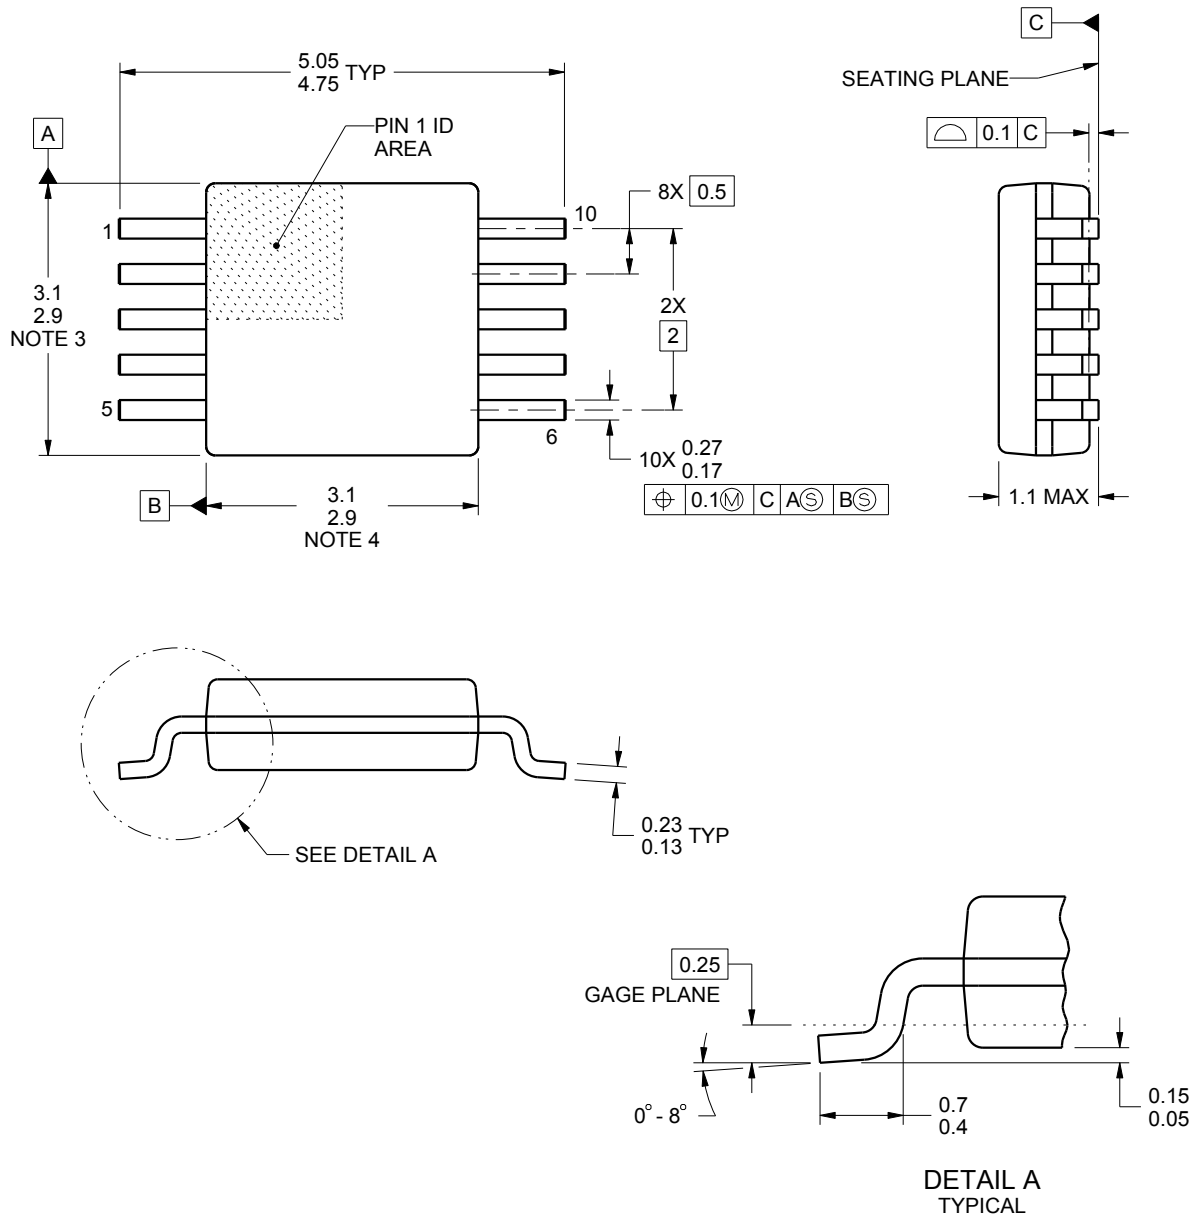

4221984/A 05/2015

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187, variation BA.

EXAMPLE BOARD LAYOUT


DGS0010A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
SCALE:10X

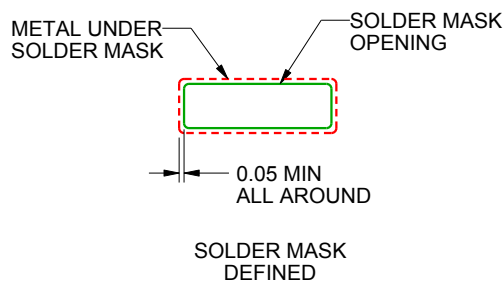

SOLDER MASK DETAILS
NOT TO SCALE

4221984/A 05/2015

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DGS0010A

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

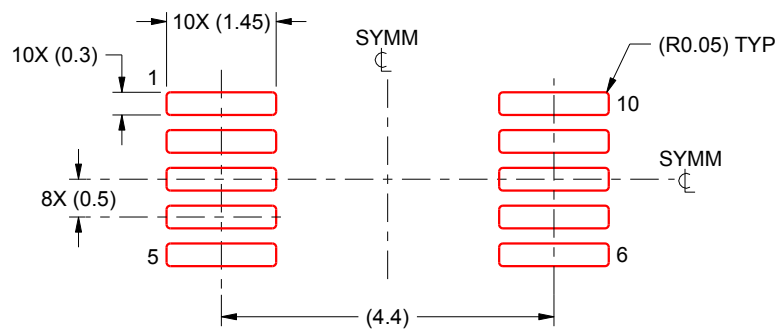

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:10X

4221984/A 05/2015

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月