

Introduction to SimpliciTI

Low-power RF protocol from Texas Instruments

Free source code available

Agenda

- Overview – What is SimpliciTI?
- Device types and network topologies
- SimpliciTI software architecture
- Example: How to configure SimpliciTI devices
- Insight on packet format and addressing
- Supported hardware platforms
- Demonstration: Temp sensor network

What is SimpliciTI?

SimpliciTI is:

- Low Power: a TI proprietary **low-power RF** network protocol
- Low Cost: uses < 8K FLASH, 1K RAM depending on configuration
- Flexible: simple **star** w/ extendor and/or **p2p** communication
- Simple: Utilizes a very **basic** core API
- Versatile: **MSP430+CC110x/2500**, CC1110/2510, CC1111/CC2511, CC2430, CC2520
- Low Power: Supports **sleeping** devices

Application Areas

SimpliciTI supports:

- alarm & security: occupancy sensors, light sensors, carbon monoxide sensors, glass-breakage detectors
- smoke detectors
- remote controls
- AMR: gas meters, water meters, e-meters
- home automation: garage door openers, appliances, environmental devices



Agenda


- Overview – What is SimpliciTI?
- Device types and network topologies
- SimpliciTI software architecture
- Example: How to configure SimpliciTI devices
- Insight on packet format and addressing
- Supported hardware platforms
- Demonstration: Temp sensor network

SimpliciTI Network topology

wireless sensing application

- Range can be extended through repeaters.

- The circles represent range of gateway and extended range of repeaters.

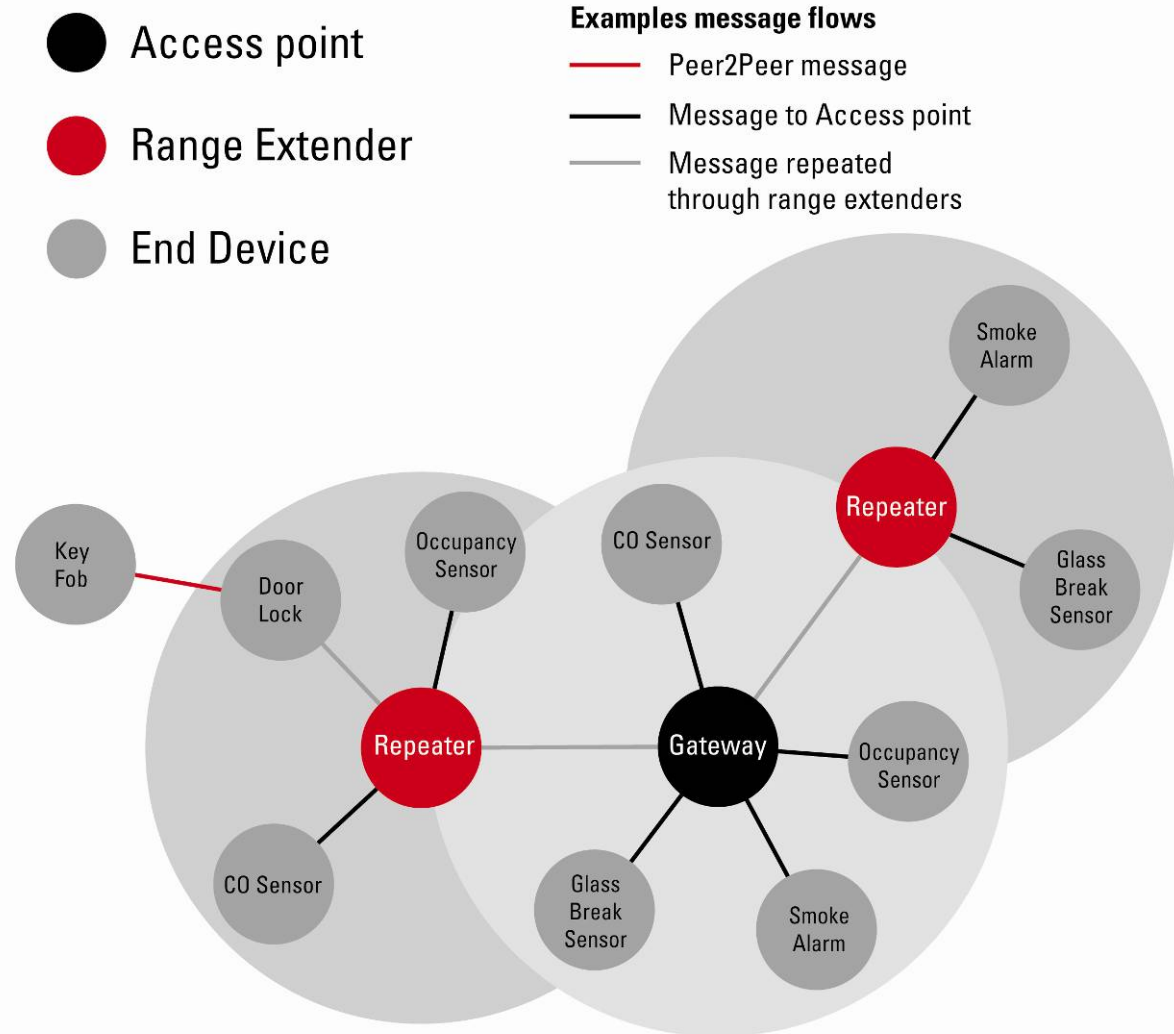


SimpliciTI Network topology

Active RF tags

- Active RF tags typically enter and exit the network ad-hoc.

- Tags must be able to quickly associate to the network while maintaining low power consumption.

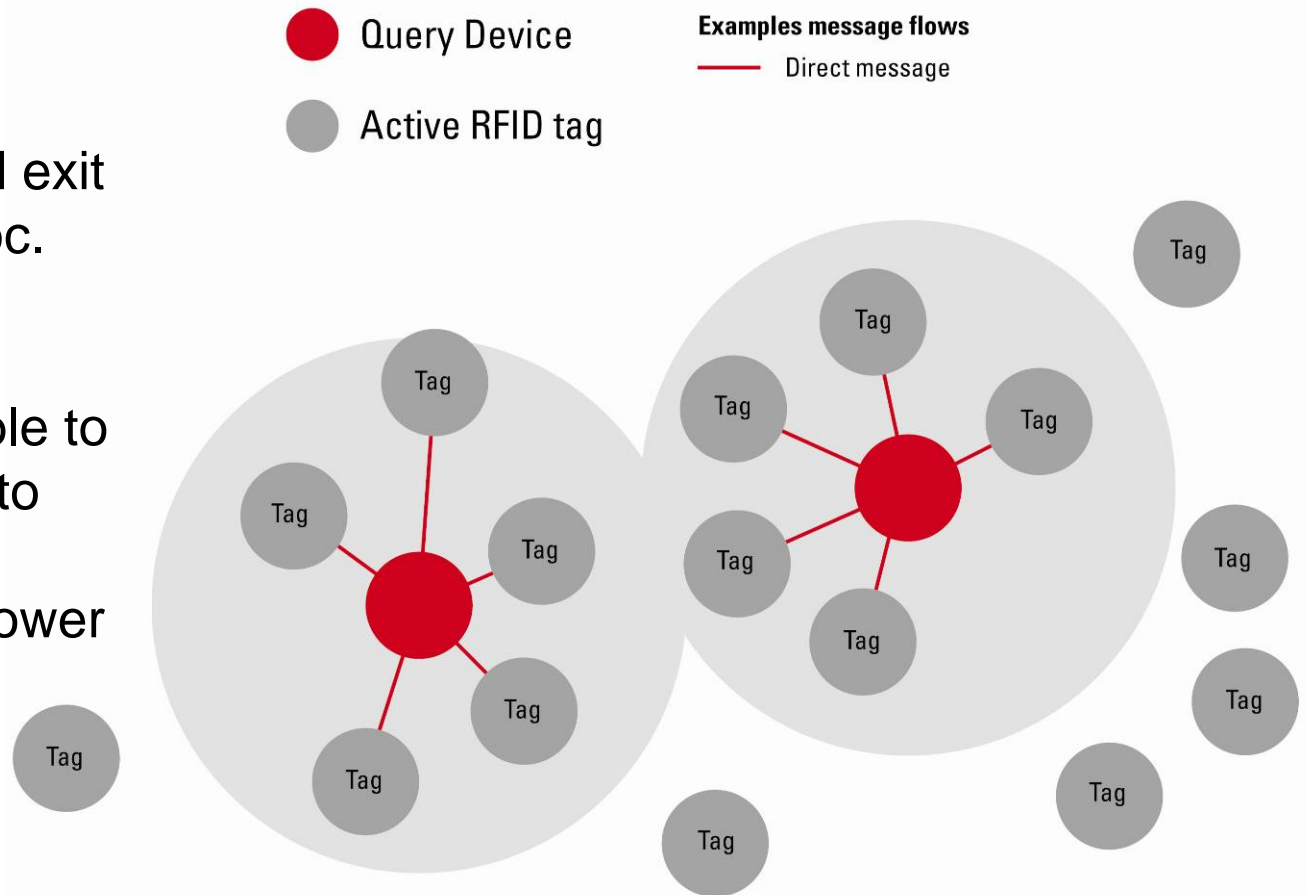

SimpliciTI Network topology

Smoke Detector System




Optional Access point



Sensor / Extender




Alarm Triggered Device

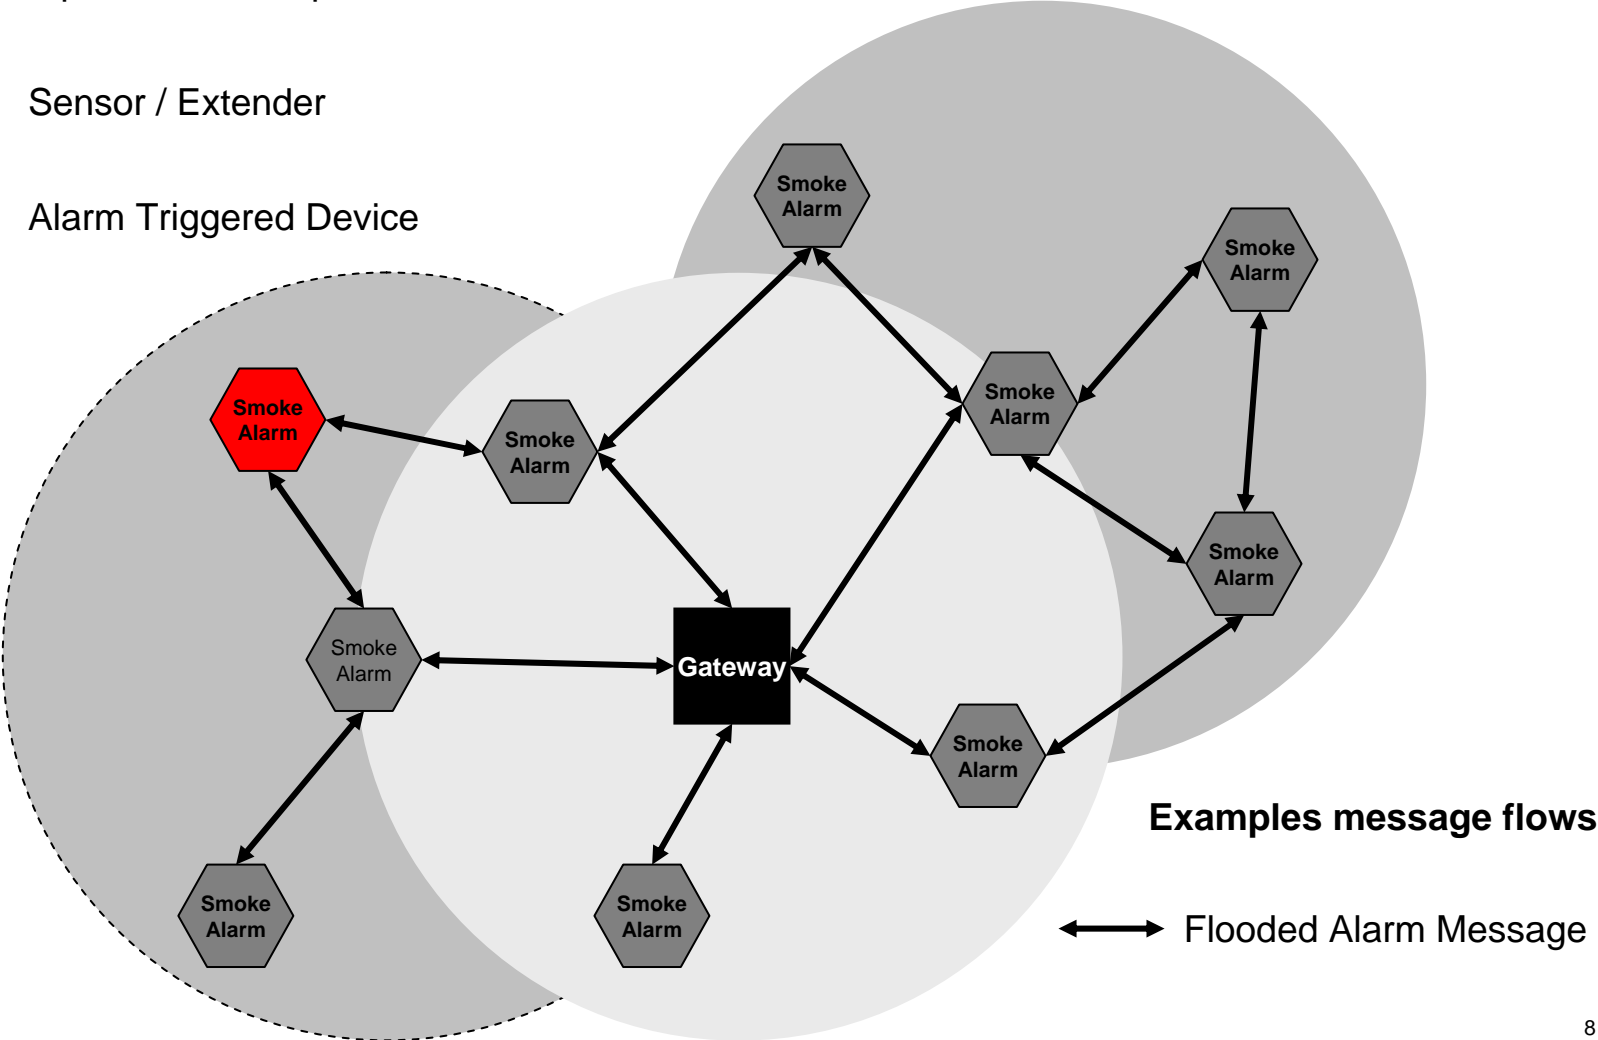

Agenda

- Overview – What is SimpliciTI?
- Device types and network topologies
- SimpliciTI software architecture
- Example: How to configure SimpliciTI devices
- Insight on packet format and addressing
- Supported hardware platforms
- Demonstration: Temp sensor network

Architectural Overview

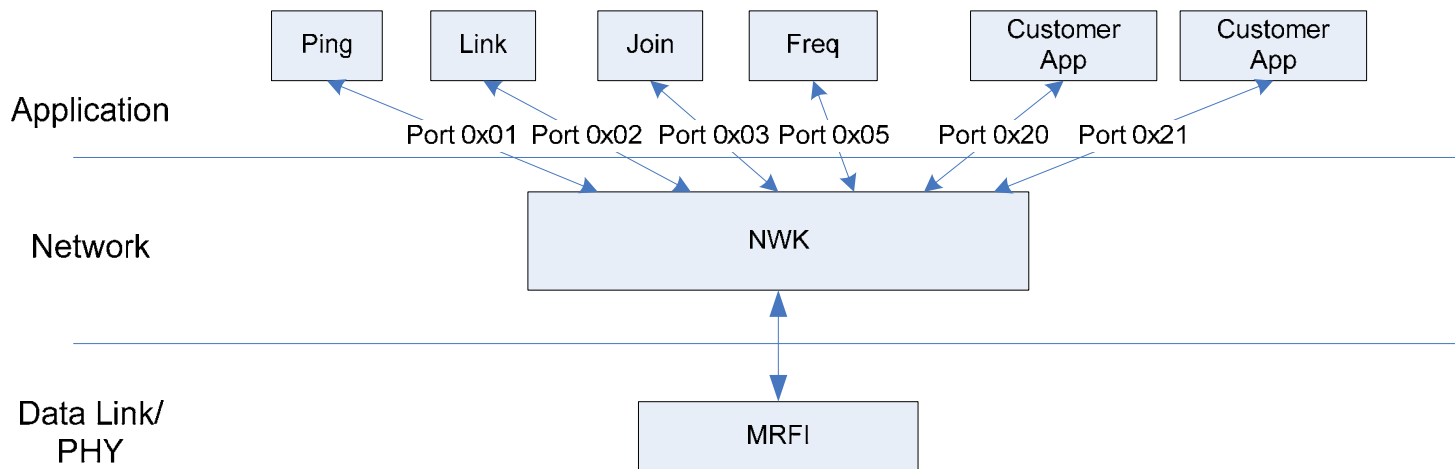

- Layers

- MRFI (“minimal RF interface”)
- NWK
- nwk applications (modules)
- customer applications

- Network Support

- init
- ping
- link / linklisten
- nwk mgmt
- send / receive
- I/O

Application Programming Interface (API)

- initialization

- `smplStatus_t SMPL_Init(uint8_t (*callback)(linkID_t));`

- linking (bi-directional by default)

- `smplStatus_t SMPL_Link(linkID_t *linkID);`

- `smplStatus_t SMPL_LinkListen(linkID_t *linkID);`

- peer-to-peer messaging

- `smplStatus_t SMPL_Send(lid, *msg, len);`

- `smplStatus_t SMPL_Receive(lid, *msg, *len);`

- configuration

- `smplStatus_t SMPL_ioctl(object, action, *val);`

Simple Configuration

- operational mode (type)
- power mode (sleep support)
- topology
- addressing / identification
- RAM allocation
 - packet size
 - buffer sizes
 - # supported links (connections)
- security tokens
- messaging (hop ct, repeaters)
- radio (freq, crypto key, modulation, CCA parameters)

```
/* FROM smpl_config.dat */  
  
// Number of connections supported  
-DNUM_CONNECTIONS=4  
  
// Maximum size of application payload  
-DMAX_APP_PAYLOAD=20  
  
// size of low level queues for sent and received frames.  
-DSIZE_INFRAME_Q=2  
-DSIZE_OUTFRAME_Q=2  
  
// default Link token  
-DDEFAULT_LINK_TOKEN=0x01020304  
  
// default Join token  
-DDEFAULT_JOIN_TOKEN=0x05060708  
  
// this device's address.  
-DTHIS_DEVICE_ADDRESS="{0x79, 0x56, 0x34, 0x12}"  
  
// device type  
-DEND_DEVICE  
  
// for End Devices specify the Rx type.  
//-DRX_LISTENS  
//-DRX_POLLS  
//-DRX_NEVER  
-DRX_ALWAYS
```

Runtime Configuration

- radio frequency
- encryption key
- app access to frame header
- app access to radio controls
- AP nwk mgmt control

Object	Description	Comments
IOCTL_OBJ_FREQ	Get/Set radio frequency	Frequency agility. May be used by APP or NWK .
IOCTL_OBJ_CRYPTKEY	Set encryption key	Customer may provide external means for user to set a non-default key. Requires reset to take effect.
IOCTL_OBJ_RAW_IO	Application layer access to the frame header to directly send or receive a frame.	This object is used for example to ping another device where the network address of the target device is supplied directly and not done through the connection table.
IOCTL_OBJ_RADIO	Application layer access to some radio controls.	Limited access to radio directly. For example, sleeping and awakening the radio and getting signal strength information.
IOCTL_OBJ_AP_JOIN	Access Point join-allow context	Interface to control whether Access Point will allow devices to join or not.

Agenda

- Overview – What is SimpliciTI?
- Device types and network topologies
- SimpliciTI software architecture
- Example: How to configure SimpliciTI devices
- Insight on packet format and addressing
- Supported hardware platforms
- Demonstration: Temp sensor network

Example

How to configure Access Point

- star hub in the network (1 / net)
- always-on (acts as range extender)
- store and fwd for sleeping devices
- linking and token (link and join) mgmt
- AP can implement end device functionality (link listen, receive)

```
// Initialize the HW/Radio
BSP_Init(); // initialize the BSP (API subject to change)
SMPL_Init(0);

// Handle Linking
SMPL_LinkListen(&linkID1);

// Receive Messages
While (1) {
    while((SMPL_SUCCESS == SMPL_Receive(linkID1, msg, &len) {
        // do something
    }}
}}
```

Example

How to configure Range Extender

- always-on device
- repeats received frames (with limitations)
- limited to 4 / net (although flexible in design)

```
// Initialize the HW/Radio
BSP_Init();
SMPL_Init(0);

// No Linking or application level functionality
while(1) ;
```


Example

How to configure End Device

- poll for data
 - polling is Port specific
 - no data results in blank (empty) response
- API e.g. Sequence
 - Init (and Join)
 - Link (assumes listen)
 - Sample Temp
 - Send
- option to sleep

```
void main()
{
    linkID_t linkID;
    uint32_t temp;

    // Initialize the board's HW
    BSP_Init();
    SMPL_Init(0);
    // link.
    SMPL_Link(&linkID);


    while (TRUE)
    {
        // sleep until timer. read temp sensor
        MCU_Sleep();
        HW_ReadTempSensor(&temp);
        if (temp > TOO_HIGH)
        {
            SMPL_Send(linkID, "Hot!", 4);
        }
        if (temp < TOO_LOW)
        {
            SMPL_Send(linkID, "Cold!", 5);
        }
    }
}
```

Agenda

- Overview – What is SimpliciTI?
- Device types and network topologies
- SimpliciTI software architecture
- Example: How to configure SimpliciTI devices
- Insight on packet format and addressing
- Supported hardware platforms
- Demonstration: Temp sensor network

Packet Format

PREAMBLE	SYNC	LENGTH	MISC	DSTADDR	SRCADDR	PORT	DEVICE INFO	TRACTID	App Payload	FCS
RD*	RD*	1	RD*	4	4	1	1	1	<i>n</i>	RD*


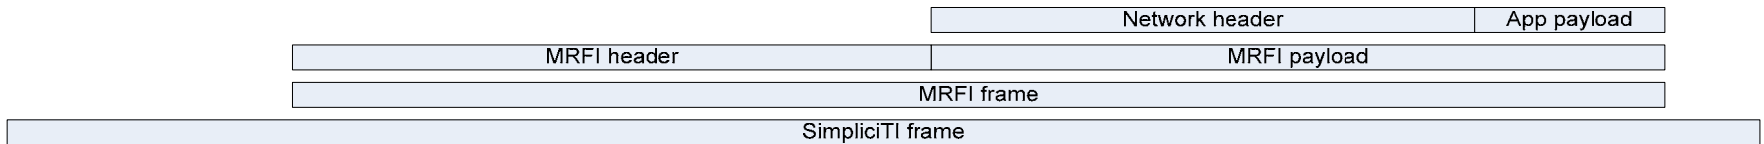


*RD: Radio-dependent populated by MRFI or handled by the radio itself


- preamble: hw sync
- sync: hw sync
- length: bytes non-phy
- dstaddr
- srcaddr
- port: app port number
- dev info: capabilities
- tractid: transaction nonce or seq num
- app pyld: $0 \leq n \leq 52$ byte/113 byte (radio dependent)
- crc: must be valid

Addressing and Communication


- net address = hw addr (4 byte) + app port
 - statically assigned hw addr
 - no address resolution mechanism
- byte 1: 0x00, 0xFF – reserved for broadcast
- communication topologies:




- direct peer-2-peer

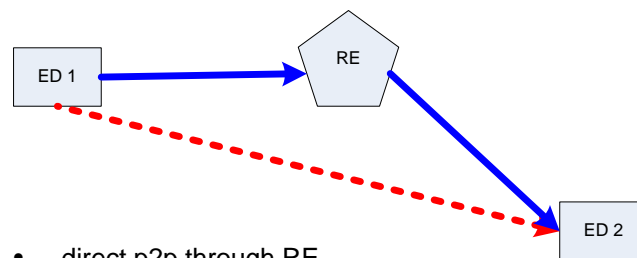

- direct p2p through RE



- store and fwd p2p through AP

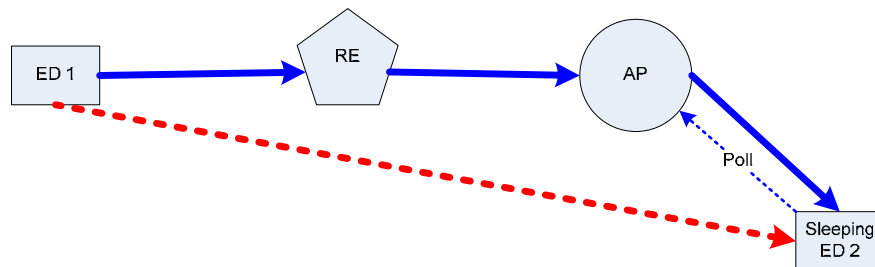

- store and fwd p2p through RE and AP

Additional Details

- IAR development environment
- minimal hw abstraction
- no driver support (UART, SPI, LCD, Timers)
- no heap utilization
- no runtime (nwk) context storage
- single thread (app), no tasks or scheduling
- nwk api is synchronous (does not return until operation is complete)
- retries and acks must be managed by app



Agenda

- Overview – What is SimpliciTI?
- Device types and network topologies
- SimpliciTI software architecture
- Example: How to configure SimpliciTI devices
- Insight on packet format and addressing
- Supported hardware platforms
- Demonstration: Temp sensor network

Hardware Support

- MSP-EXP430FG4618 Experimenters Board
 - (MSP430FG4618) w/ Socket Interface for CC110x / CC2500
- eZ430RF-2500
 - MSP430F2274 + CC2500

- CC2510-CC2511DK and CC1110 CC1111DK
- DSSS (MSP430 +CC2420, CC2430)
- CC2520

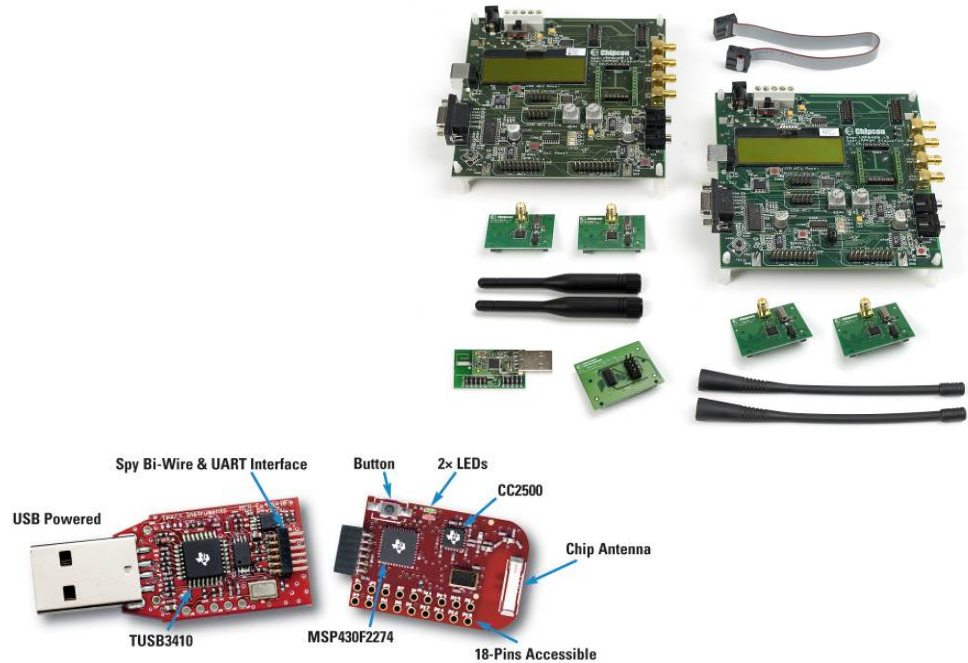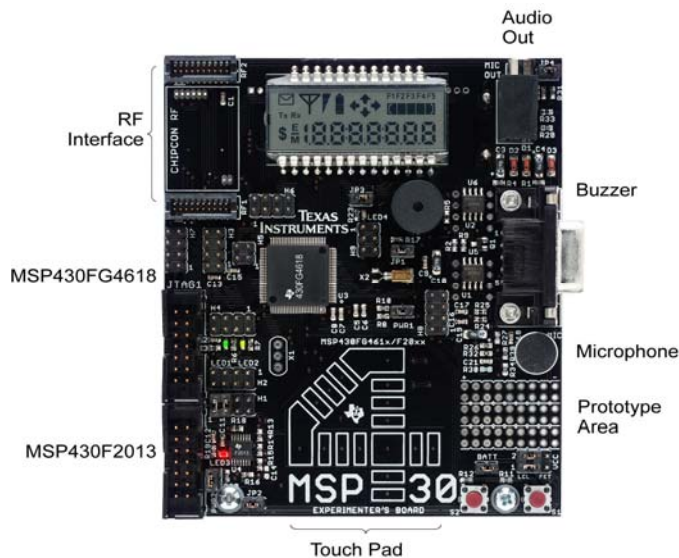


Agenda


- Overview – What is SimpliciTI?
- Device types and network topologies
- SimpliciTI software architecture
- Example: How to configure SimpliciTI devices
- Insight on packet format and addressing
- Supported hardware platforms
- Demonstration: Temp sensor network

Example

Hardware configuration

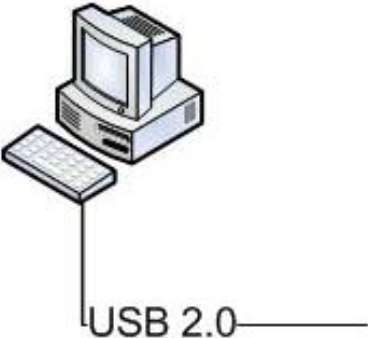

Access Point:
CC2511 USB Dongle

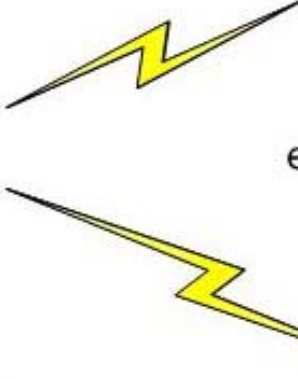

End Device:
eZ430 RF Target Board



End Device:
CC2510EM

Development Tools

Packet sniffer

- two end devices are reading their internal temperature sensor
- 1/sec they report their value to the access point
- the access point feeds the data to a terminal window on the PC via a virtual COM port
- all RF traffic can be monitored with the TI SimpliciTI packet sniffer


The screenshot shows the Texas Instruments General Packet Sniffer SimpliciTI interface. The main window displays a table of captured packets. The table has columns for Dest. Address, Source Address, Port, Encryption Number, Rec.Type, Device Info, Send.Type, HCount, Transaction ID, Application payload, and RSSI (dBm). The packets are color-coded: yellow for application payloads, green for join messages, and red for link messages. Below the table is a timeline view showing packet activity over time. The timeline has a vertical axis for time and a horizontal axis for packet activity. The status bar at the bottom shows Packet count: 49, Error count: 1, and Filter Off.

Packet sniffer screenshot

Current Consumption

How to estimate and measure?

- Guideline to SimplicTI current consumption as presented in application note:
- Wireless Sensor Monitor Using the eZ430-RF2500.
- <http://www.ti.com/litv/pdf/slaa378a>

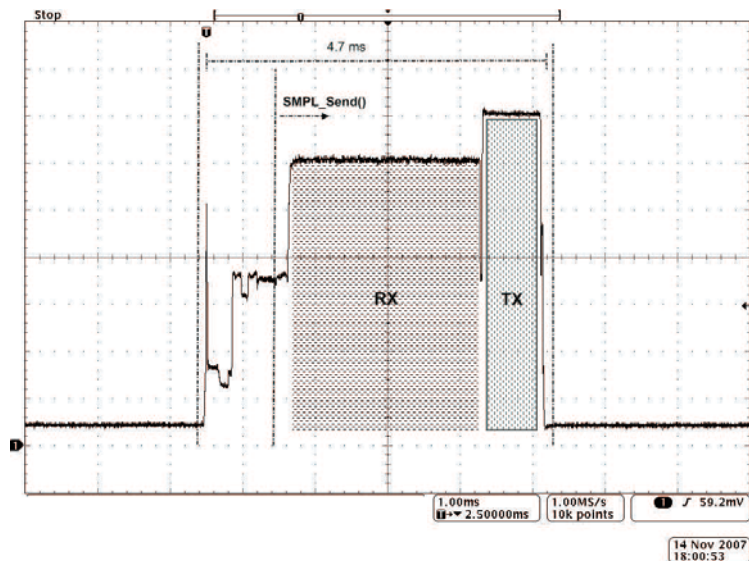

eZ430-RF2500
Wireless Development Tool



Available examples

Where	What	Notes
SimpliciTI distribution	SimpliciTI examples: <ul style="list-style-type: none">- 2 ED with bi-di- AP as data hub- Cascading ED- Simple polling with AP	
eZ430-RF2500	<ul style="list-style-type: none">- Temp.Sens network with PC gui	<ul style="list-style-type: none">- Distributed with eZ430-RF2500.- Comes with app.note

www.ti.com/simpliciti

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated