

Hermetic Package Reflow Profiles, Termination Finishes, and Lead Trim and Form



Katherine Stadnyk

ABSTRACT

Hermetic microcircuits are still widely used in mission-critical aerospace, defense, and industrial applications. Customers occasionally have questions regarding board-level assembly of these packages. A general set of guidelines are addressed in this application note.

Table of Contents

1 Reflow Profiles.....	2
2 Critical Considerations for Gold-Plated Termination-Finishes.....	3
3 Considerations for Leadless Ceramic Chip Carrier Packages.....	3
4 Lead Forming.....	4
5 Ceramic Packaging.....	4
6 References.....	5
7 Revision History.....	6

List of Figures

Figure 1-1. Starting Profile for Typical Pb/Sn Solder Paste.....	2
--	---

List of Tables

Table 2-1. MIL-PRF-38535 TABLE A-III Composition and Coating Thickness Requirements.....	3
--	---

Trademarks

All trademarks are the property of their respective owners.

1 Reflow Profiles

Board-level solder reflow profiles are dependent on numerous factors including, but not limited to, solder type, flux, package type, the number of components, the number of board layers, the board size, reflow oven type, and accuracy as well as pre- and post-cleaning processes. Because of the number of variables it is not possible to provide a single reflow profile that is representative of every board using a specific package type. Typically, manufacturing houses have reflow profiles in place and modify them for specific hardware.

TI suggests using the flux manufacturer's recommended profile as a starting point. Variations of course need to be comprehended based on the time required to volatilize the flux prior to the solder reaching liquidus. In general, ceramic parts are compatible with ramp-up rates of $< 3^{\circ}\text{C/s}$ and ramp-down rates of $< 6^{\circ}\text{C/s}$ with a maximum peak temperature of 260°C .

A hermetic package will withstand three passes of reflow if the peak temperature and ramp rates are not exceeded.

Most metal lid packages use an 80%Au-20%Sn solder preform to attach the lid. Gold-tin solder will begin to soften at 270°C and has a eutectic point of 280°C . The package body temperature must not exceed 260°C at any time or the hermetic seal of the package will be damaged. Note that through-hole hermetic devices specify a maximum temperature for soldering as a lead-temperature of 300°C for 10 seconds. This is not a reflow temperature.

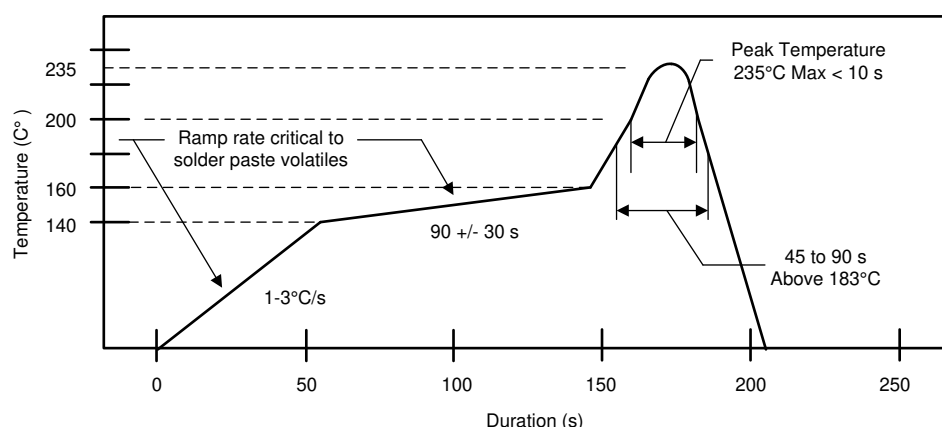


Figure 1-1. Starting Profile for Typical Pb/Sn Solder Paste

2 Critical Considerations for Gold-Plated Termination-Finishes

TI offers a variety of termination finishes for compliant hermetic packages, for example:

- Alloy-42 leads with Sn63Pb37 hot solder dip.
- Alloy-42 or Kovar leads with 50μ-in to 350 μ-in of nickel underplate and 60 μ-in to 225 μ-in of gold finish plate.
- Alloy-42 or Kovar leads with 50μ-in to 350 μ-in of nickel underplate and SN63Pb37 hot solder dip.

Table 2-1. MIL-PRF-38535 TABLE A-III Composition and Coating Thickness Requirements

Coating	Minimum	Maximum
Hot solder dip (for all round leads)	60 μ-in	Not Specified
Hot solder dip (for all shapes other than round leads which have ≤ 25 mil pitch)	150 μ-in	Not Specified
Hot solder dip (for all shapes other than round leads with > 25 mil pitch)	200 μ-in	Not Specified
Tin-lead plate (as plated)	300 μ-in	Not Specified
Tin-lead plate (fused)	200 μ-in	Not Specified
Gold plate	50 μ-in	225 μ-in
Nickel plate (electroplate)	50 μ-in	350 μ-in
Nickel plate (electroless)	50 μ-in	250 μ-in
Nickel cladding	50 μ-in	350 μ-in

The electronics industry currently recognizes a threshold level of 3% gold by weight that can be dissolved into eutectic tin-lead solder above which the solder-joint can exhibit gold embrittlement.

With the specified gold thickness it is recommended that gold-plated leads be pre-tinned (solder-dipped) before board mounting to scavenge the gold from the leads. If this is not done, there is a chance of gold-embrittlement of the board-level solder-joints. A flowing solder-pot or two passes in a static solder-pot is recommended. Solder-pot solder composition should be periodically monitored for gold content.

3 Considerations for Leadless Ceramic Chip Carrier Packages

The critical items for board-level solder process for a Leadless Ceramic Chip Carrier (LCCC) package are solder paste thickness and depth of package insertion into the paste during pick and place.

- If the paste under the package is too thin, this results in a poor solder joint.
- Too much solder paste can cause excess solder on the sides of the package.
- If the package is placed too far into the paste (too close to the board) it can cause excess solder on the sides of the package.
- The solder must adhere to the pads on the package backside and flow up the castellation.
- The package must be parallel to the board (no tilt).
- The package must be aligned to the pads.
- The circuit board pads must be sized to fit the pads on the underside of the package and allow for a fillet on the sides.
- Placement depth must be consistent.
- With mixed package types on the board the actual reflow temperature of the LCCC component must be measured (thermocouple on package via thermally conductive epoxy).

4 Lead Forming

Hermetic surface mount packages are typically sold non-formed as most customers have a preferred final form factor which can vary from customer to customer. Texas Instruments does provide example PCB footprints for ceramic packages via the device's product folder on [TI.com](http://www.ti.com). These PCB footprints have been used on ceramic based EVMs, note these PCB footprints are provided by TI are for reference only. Third party service providers such as Spirit Electronics can provide a lead-forming service. General information can be found at [Lead Trim & Form](#). TI does not endorse or recommend these companies, but only mentions them as example service providers.

For more information, contact TI Support at www.ti.com/support.

5 Ceramic Packaging

The following table is a snapshot for reference purposes and may not be current. For package specific information and application notes, see <http://www.ti.com/support-packaging/packaging-information.html>.

Package Group	Description	Designator
CBGA	Ceramic Ball Grid Array	GJN,GLE,GLG,GLK,GNM
CCGA	Ceramic Column Grid Array	NAA,NWE
CDBGGA	Ceramic Dimpled Ball Grid Array	GFP,GGP,GGR,GGZ,GHF,GHM,GJM,GKG,ZGR,ZHM
CDIP	Ceramic Dual Inline Package	J,JG,JL,JNA,JNC,JND,JT,JTA,JTB,JTC,NAB,NAY,NAZ,NFE
CDIP-BB	Ceramic Dual Inline Package – Bottom Braze	JDE,JDG
CDIP-SB	Ceramic Dual Inline Package – Side Braze	JC,JD,JDC,JDD,JDJ,JDK,JDM,JDN,JN,JVA,JVB,JVD,JVE,JVF,NAK
CFCBGA	Ceramic Flip Chip Ball Grid Array	AAD,CDZ,CMA,CME,CMQ,CTF,CTJ,CTK,CUB,CUD,CUM,CYC,GDZ,GLL,GLP,GMA,GME,GTF,GTH,GTJ,GTK,GTQ,GUD,GUE,GUF,GUM,ZDZ,ZUF
CFP	Ceramic Flat Pack	FAA,HAJ,HAY,HBC,HBD,HBE,HBU,HBY,HD,HE,HF,HFD,HFG,HFH,HFL,HFN,HFP,HFQ,HFR,HFS,HG,HGA,HGF,HH,HKB,HKC,HKD,HKE,HKH,HKJ,HKK,HKN,HKP,HKQ,HKR,HKS,HKT,HKU,HKV,HKW,HKX,HKY,HR,HT,HV,HY,HZ,NAD,PHF,PHG,U,W,WA,WD,WH,WJ,WN
CFP	Ceramic Flat Pack - Gullwing Formed Leads	NAC
CLGA	Ceramic Land Grid Array	FVA, NAF,ZMA,ZMX
CPGA	Ceramic Pin Grid Array	GA,GB,GC,GE,GF,GFA,NAQ,NAR,NAT
CQFP	Ceramic Quad Flat Pack	NAU,NBA,NBB,NBC
CTO-92	Ceramic Transistor Outline 92	HTA
CZIP	Ceramic Zig-Zag Inline Package	SV
JLCC	J Lead Ceramic Chip Carrier	FJ,FZ,HJ,HJA
LCCC	Leadless Ceramic Chip Carrier	FD,FE,FFA,FFC,FFD,FFE,FFF,FFH,FFJ,FFK,FK,FKH,FNC,FPH,FPM,FQ,HL,HM,NAJ
TO-CAN	Transistor Outline [Metal] Can	K,LMC,LMD,LME,LMF,LMG,NDS,NDT,NDU,NDV,NEP,NEQ,NER

6 References

- [MIL-PRF-38535 General Specification for Integrated Circuits \(Microcircuits\) Manufacturing](#)
- [MIL-STD-883 Test Methods and Procedures for Microcircuits](#)

7 Revision History

Changes from Revision * (May 2020) to Revision A (November 2025)	Page
• Removed the mention of Fancort & Corfin.....	4
• Added Spirit Electronics as an example of lead forming service.....	4

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025