

TPS22960EVM Dual Channel Load Switch IC

The TPS22960EVM evaluation module (EVM) allows the user to connect power to and control the 8pin μ QFN package load switch. Parameters such as On State resistance, Slew Rate and Discharge properties can be easily evaluated. [Table 1](#) lists a short description of the load switch performance specifications, refer to the data sheet [SLVS914](#) for more details.

Table 1. TPS22960 Slew Rate, Output Current Rating, Enable, and Output Discharge Options

EVM	Device	Slew Rate at 3.3V Typical	VIN (V)	Max. Continuous Current	Enable (ON Pin)	Quick Output Discharge
HVL059	TPS22960	75 μ s with SR = low 660 μ s with SR = high	3.3	500mA	Active High	Yes

Contents

1	Description	1
	1.1 Typical Applications	2
	1.2 Features	2
2	Electrical Performance	2
	2.1 Equipment	2
	2.2 Setup	2
3	Operation	3
4	Test Configurations	4
	4.1 On State Resistance (r_{ON}) Test Setup	4
	4.2 Slew Rate Test Setup	4
	4.3 VOUT Slew Rate Examples	5
	4.4 VOUT Slew Rate Examples	6
5	Layout	8
6	Schematic	11
7	Bill of Materials	12

List of Figures

1	r_{ON} Setup	4
2	Slew Rate Setup	5
3	TPS22960 SR=high TRISE Example	6
4	TPS22960 SR=low TRISE Example	7
5	Top Assembly	8
6	Top Side.....	9
7	Bottom Side	10

1 Description

The TPS22960 is a small low- r_{ON} dual load switch with controlled turn on. The devices contain two P-channel MOSFETs that can operate over an input voltage range of 1.62 V to 5.5 V. Each switch is controlled by an on/off input (ON1 and ON2), which is capable of interfacing directly with low-voltage control signals. The TPS22960 has an internal 85- Ω load resistor for output quick discharge when switch is turned Off.

1.1 Typical Applications

- Battery Powered Equipment
- Portable Industrial Equipment
- Portable Medical Equipment
- Portable Media Players
- Smart phones / Tablets
- Digital Cameras
- GPS Devices

1.2 Features

- EVM Allows Access to the Input, Output and Control Pins of the TPS22960 Dual Load Switch Device
- Adjustable Slew Rate Selection Made Through the SR pin of the Device Using an EVM jumper
- Output Loading Resistors, a 33 Ω , 1W and 1/8W 0805 Mounting Pads per Each Channel
- VIN Input Voltage Range: 1.62V to 5.5V
- 500mA Max Continuous Current Per Channel

2 Electrical Performance

Refer to the datasheet [SLVS194A](#) for detailed electrical characteristics.

Operation

2.1 Equipment

- **Voltage Sources:**
 - DC supply will be used.
 - DC Supply capable of 10V, 5A.
- **Multi Meters:**
 - Multi Meter for measuring voltage in the 100mV volt range.
- **Output Load:**
 - Variable load connected to VOUT, observe power rating.
- **Oscilloscope:**
 - 4 Channel 100 MHz.
- **Recommended Wire Gauge:** 18 AWG

2.2 Setup

This section describes the jumpers and connectors on the EVM as well as how to properly connect, set up, and use the EVM.

2.2.1 J1/J6/J8 – Input Connections

This is the connection for the leads from the input source. Connect the positive lead to VIN1 J1, and VIN2 J8, and the negative lead connection to GND J6.

2.2.2 J2/J5/J7 – Output Connections

This is the connection for the output of the EVM. Connect the positive connection of the load to VOUT1 J2, and VOUT2 J7, and the negative connection to GND J5.

2.2.3 JP1/JP6 – ON1 and ON2

This is the enable input for the device. A shorting jumper must be installed on JP1 and JP6 in either the High or Low Position. The TPS22960 is active High. ON must not be left floating. An external enable source can be applied to the EVM by removing the shunt and connecting a signal to TP1 and or TP2. Refer to the datasheet for proper ON and OFF voltage level settings. A switching signal may also be used and connected at these points.

2.2.4 J3/J10 – VIN1/VIN2 Sense, J4/J9 - VOUT1/VOUT2 Sense

These two connections are used when very accurate measurements of the input or output voltage are required. rON measurements should be made using these sense connections when measuring the voltage drop from VIN to VOUT and then calculating the resistance.

2.2.5 JP5/JP14 –JP4/JP13 Input Capacitors

During normal operation a shorting jumper is placed on JP5 and JP14 this connects C4 and C8 capacitors from the input of the device to ground. JP4 and C3, JP13 and C7 may be used to connect a user selected capacitor value from the input of the device to ground. Refer to the Applications Section of the Datasheet for additional information on selecting the input capacitors.

2.2.6 JP2/JP11– JP3/JP12 Output Capacitors

During normal operation a shorting jumper is placed on JP2 and JP11, this connects C1 and C5 capacitor from the output of the device to ground. JP3 and C2, JP12 and C6 may be used to connect a user selected capacitor value from the output of the device to ground. Refer to the Applications Section of the Datasheet for additional information on selecting the output capacitors.

2.2.7 JP7/JP15 – JP8/JP16 Output Resistors

During normal operation no shorting jumper is placed on JP7, JP15, JP8, or JP16. A shorting jumper may be used on JP7 to connect R1, and JP15 to connect R3 a 33 Ω load resistor from the outputs of the device to ground. JP7 and JP14 may be used to connect R2 and R4 load resistors from the outputs to ground. R1 and R3 are sized for 2512 1W power rated resistors, ROUT4 and ROUT7 are sized for 0805 1/8W power rated resistors.

2.2.8 JP10 – SR

This is the slew rate control for the device. A shorting jumper installed on JP10 in the High position translates into a 660 μ S rise time on the output of VOUT1 and VOUT2. Placing the shorting jumper into the Low position translates into a 75 μ S rise time on the outputs.

2.2.9 JP9 – SR Power Source

This jumper selects the power source for SR input. Place a shorting jumper in the desired position for power to come from VIN1 or VIN2.

3 Operation

Connect the positive input of the power supply to VIN1 at J1 and VIN2 at J8; connect the negative lead of the power supply to GND at J6. The input voltage range of the TPS22960EVM is 1.62V to 5.5V.

External output loads can be applied to each switch by connecting between J2 VOUT1 and J5 GND, and J7 VOUT2 and J5 GND. The TPS22960EVM is rated for a maximum continuous current of 500mA. Configure JP1 and JP6 as required. JP1 and JP6 must be installed for proper operation. When the ON pin is asserted the TPS22960 device will control the slew rate of VOUT1 and VOUT2. The slew rate of the device is selected by the state of the SR device pin using JP10.

4 Test Configurations

4.1 On State Resistance (r_{ON}) Test Setup

Figure 1 shows a typical setup for measuring On State Resistance. The voltage drop across the switch is measured using the sense connections then divided by the current into the load yielding the r_{ON} resistance.

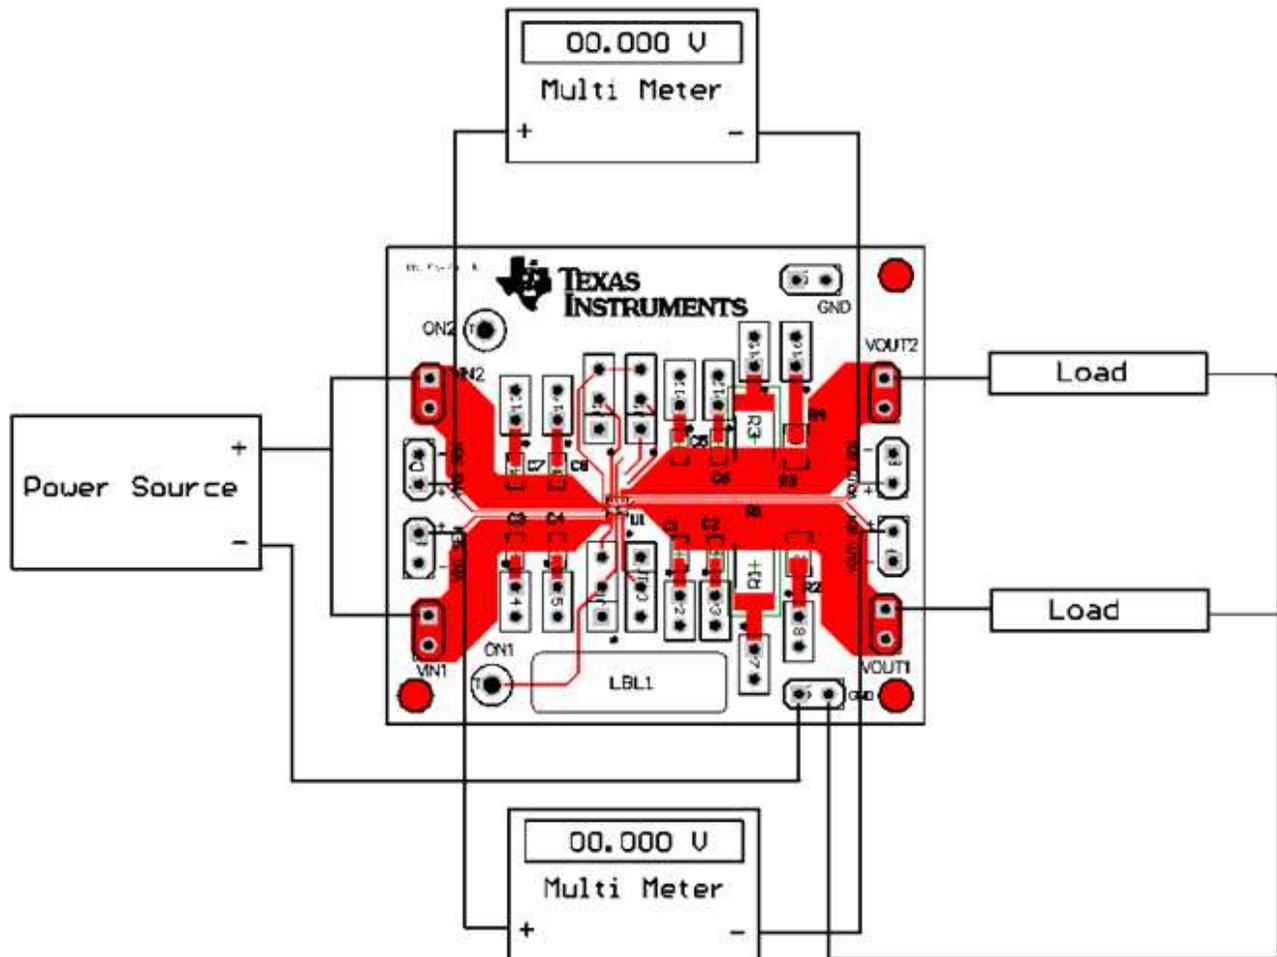


Figure 1. r_{ON} Setup

4.2 Slew Rate Test Setup

Figure 2 shows a test setup for measuring the Slew Rate of the Load Switch. Controlling the ON pins of the switch with a signal source and then measuring the outputs with a scope shows the switches ability to avoid inrush current.

4.3 VOUT Slew Rate Examples

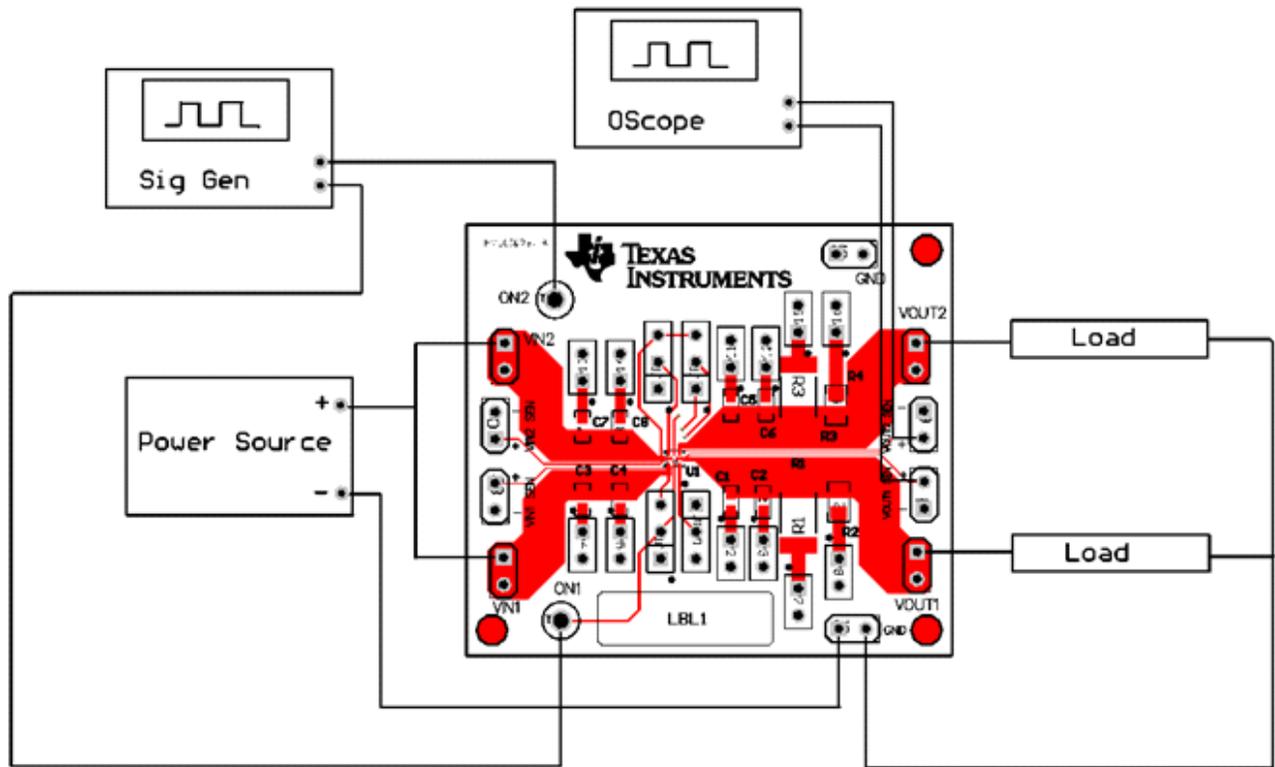


Figure 2. Slew Rate Setup

4.4 VOUT Slew Rate Examples

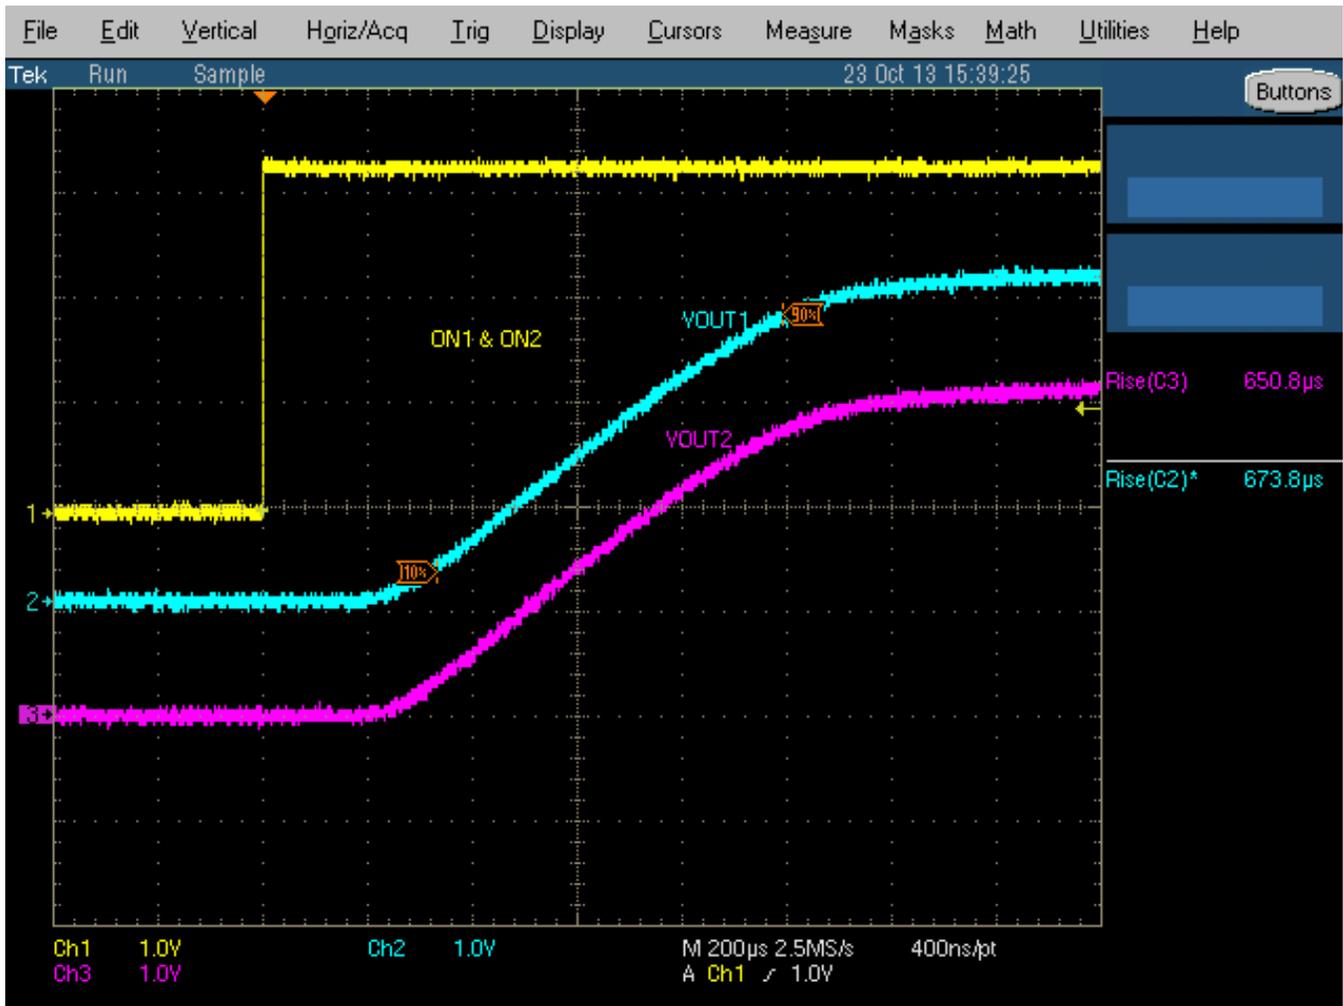


Figure 3. TPS22960 SR=high TRISE Example

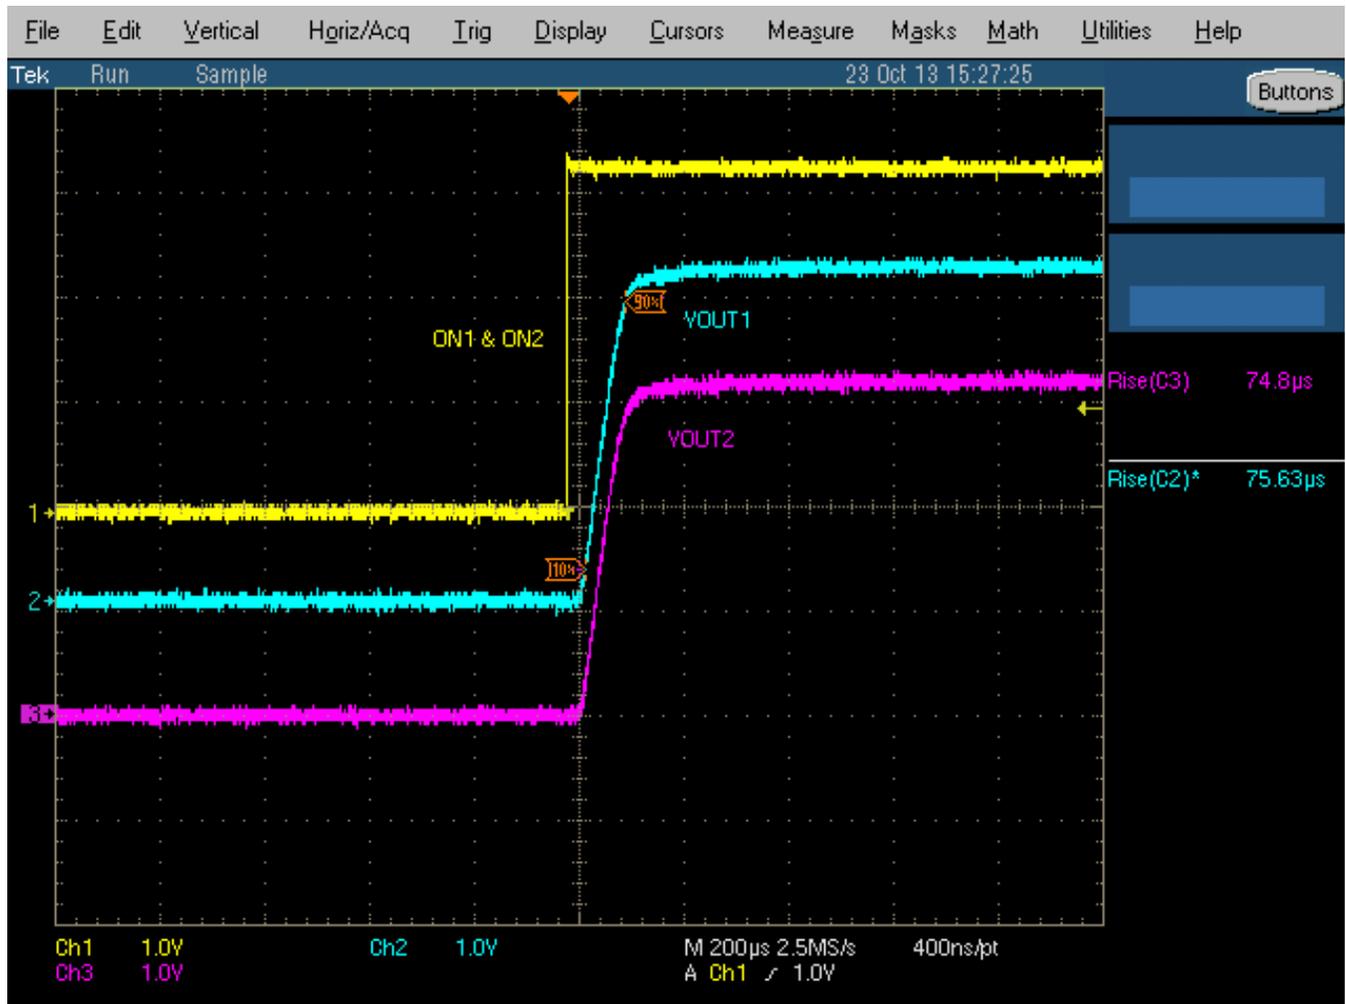


Figure 4. TPS22960 SR=low TRISE Example

5 Layout

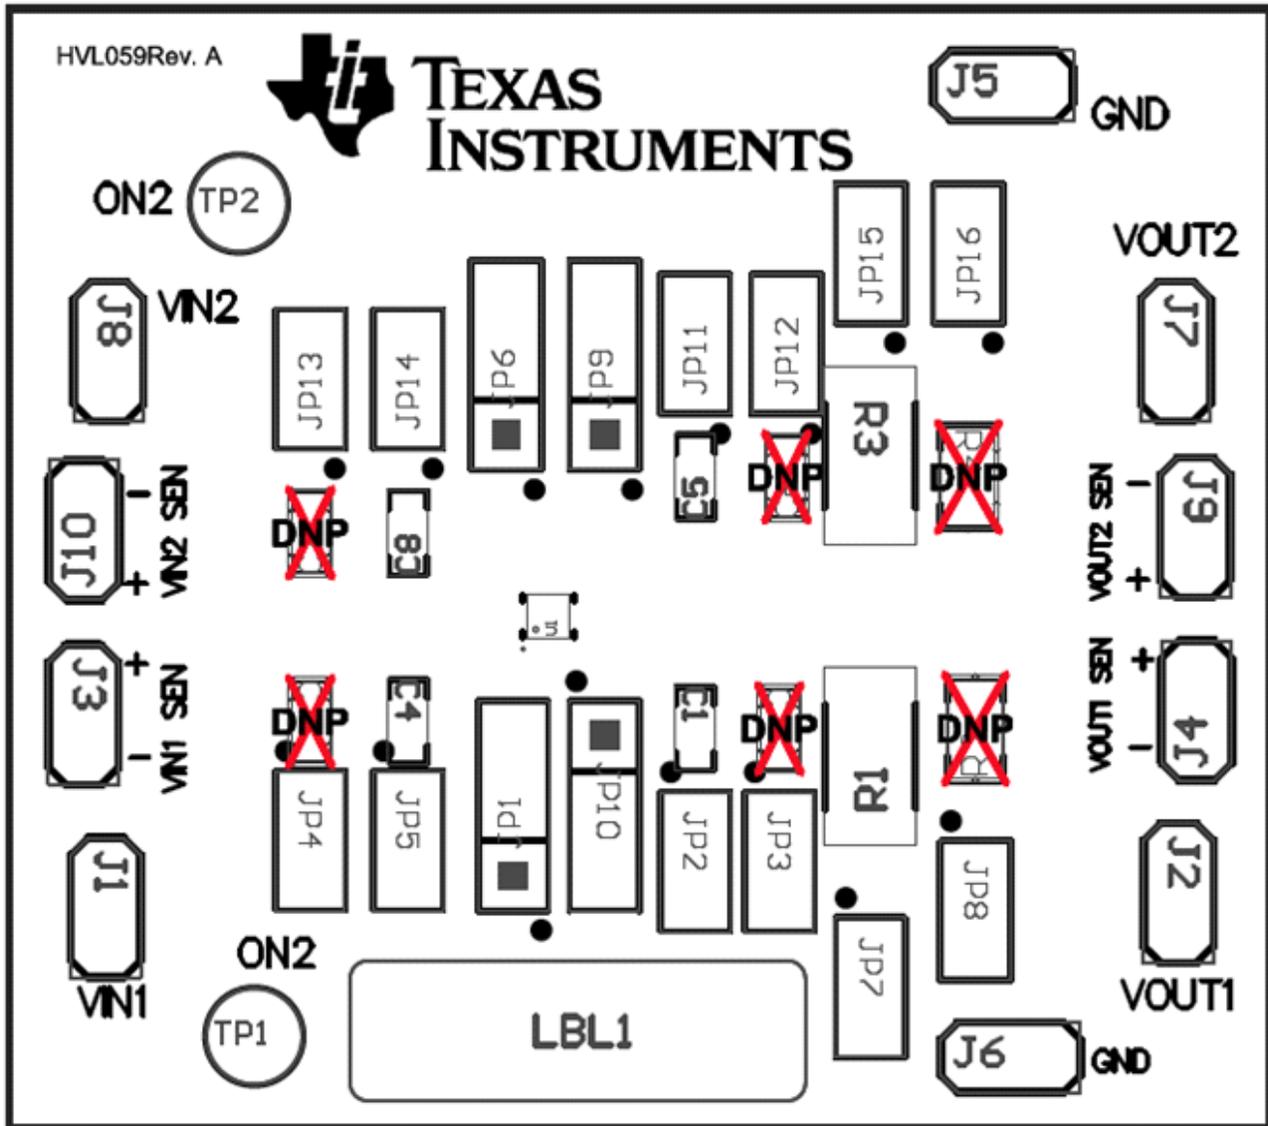


Figure 5. Top Assembly

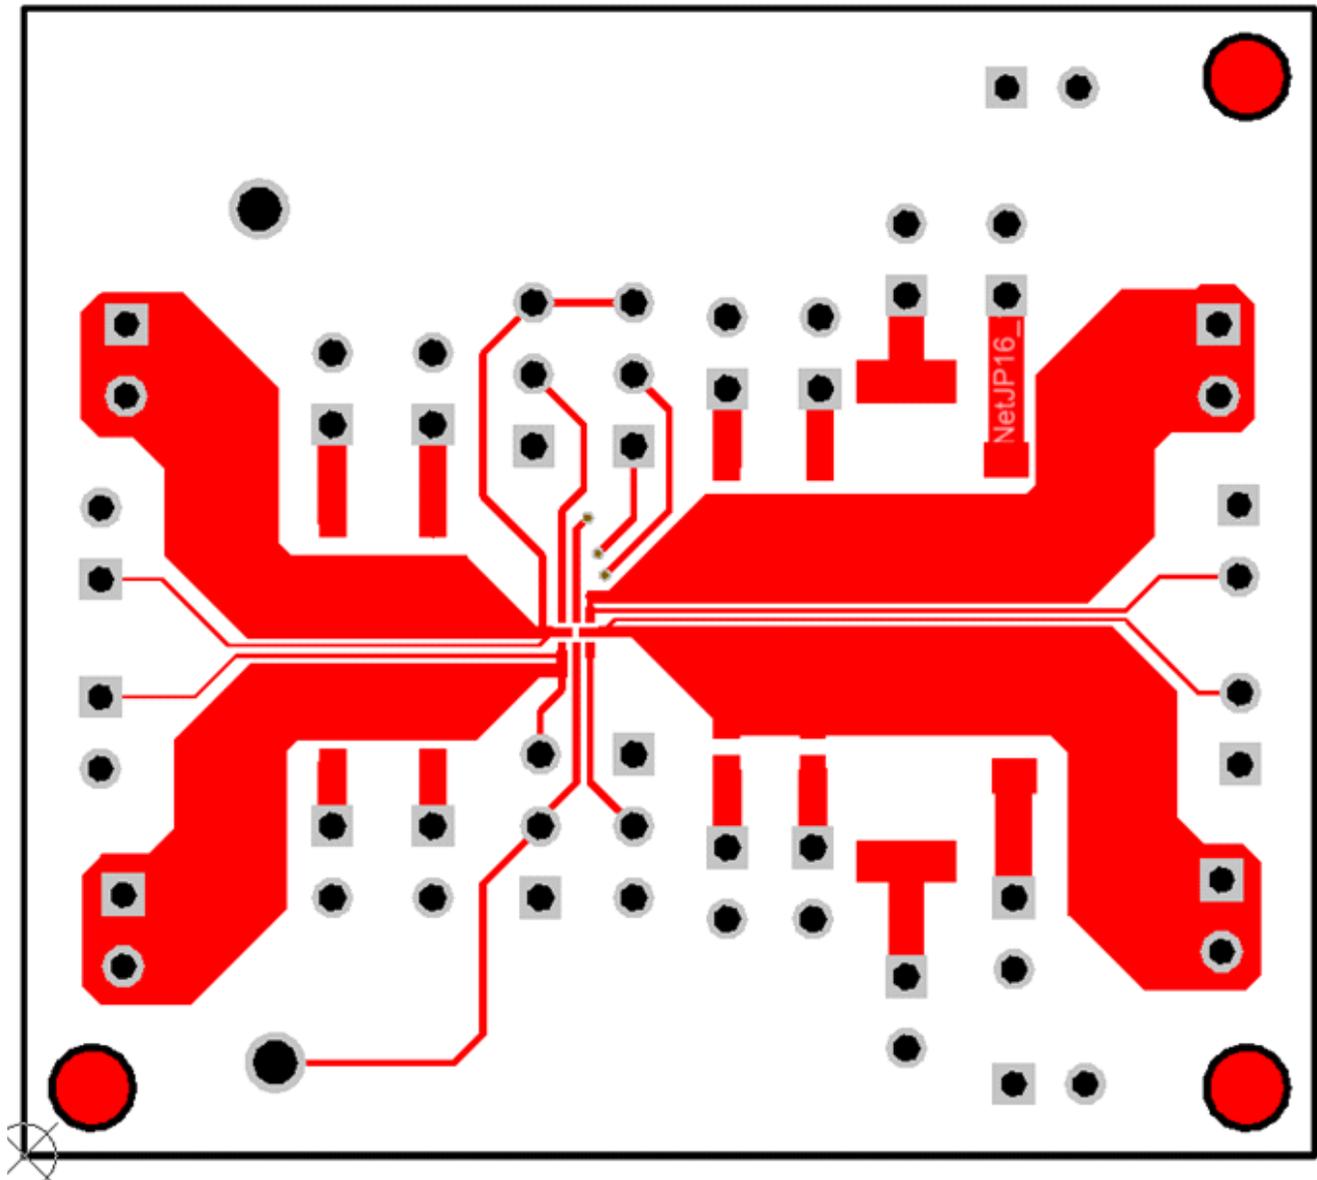


Figure 6. Top Side


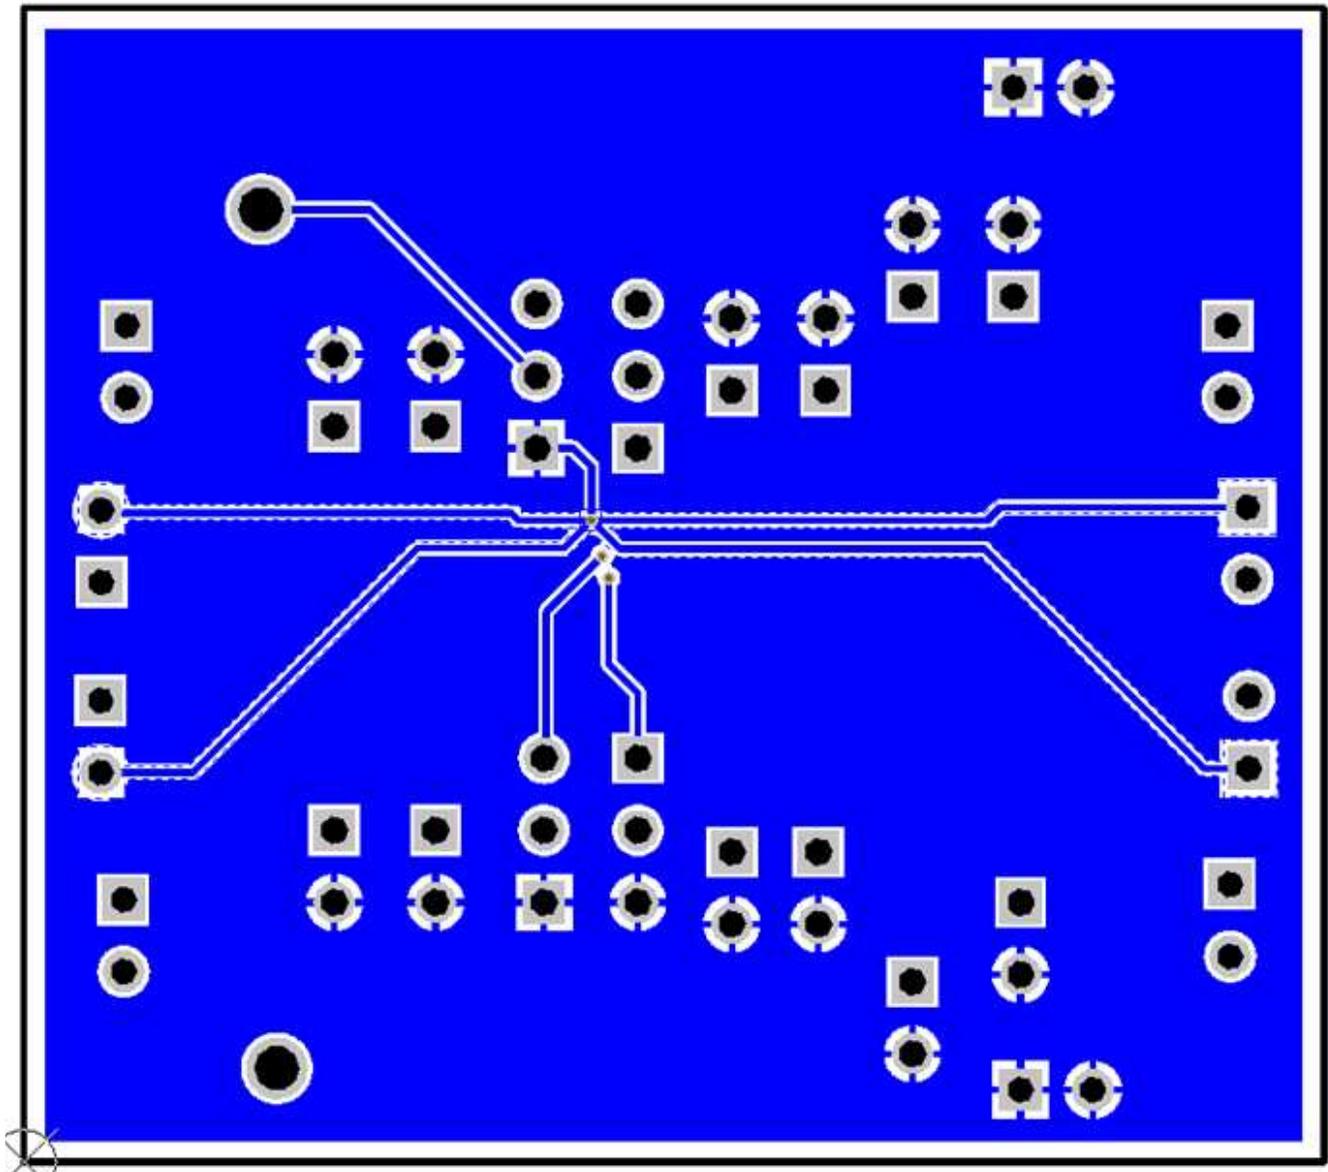


Figure 7. Bottom Side

6 Schematic

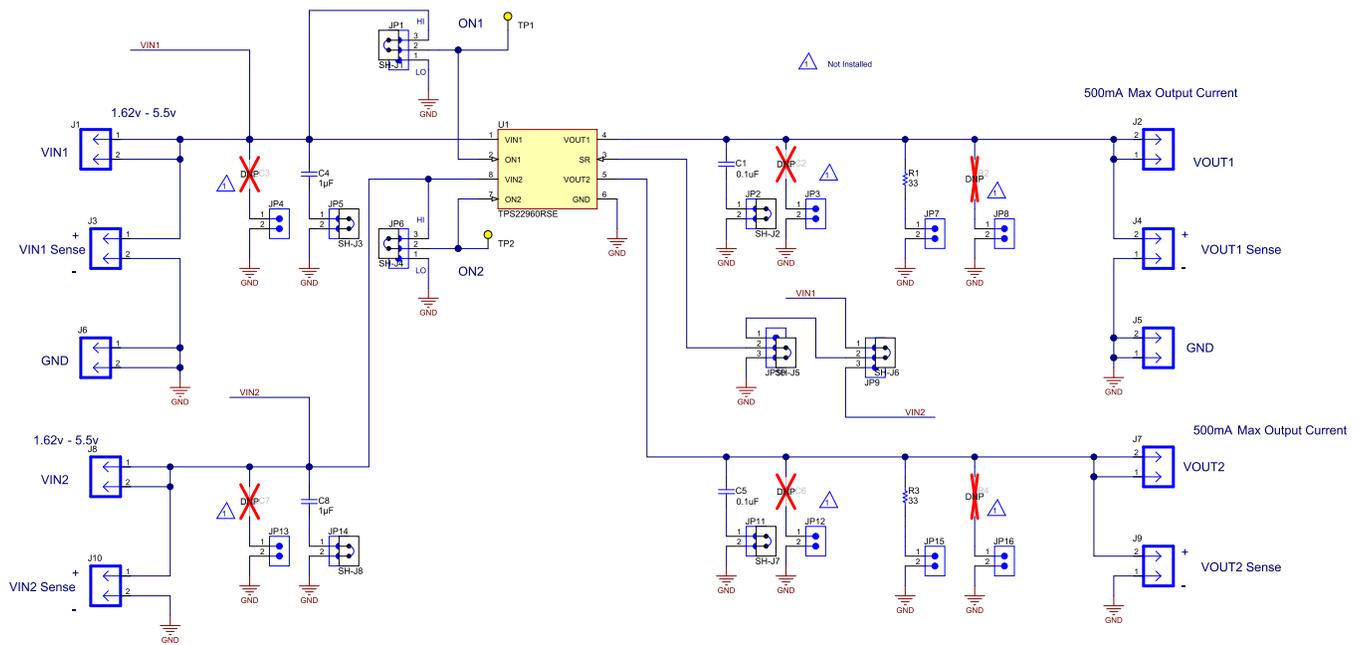

7 Bill of Materials

Designator	Quantity	Description	Manufacturer	PartNumber
C1, C5	2	CAP, CERM, 0.1uF, 100V, +/-10%, X7R, 0603	MuRata	GRM188R72A104KA35D
C2, C3, C6, C7	4	Capacitor, Ceramic, Low Inductance, vvV, [temp], [tol]	MuRata	GRM188R72A104KA35D
C4, C8	2	CAP, CERM, 1uF, 25V, +/-10%, X7R, 0603	MuRata	GRM188R71E105KA12D
J1, J2, J3, J4, J5, J6, J7, J8, J9, J10	10	Header, Male 2-pin, 100mil spacing,	Sullins	PEC02SAAN
JP1, JP6, JP9, JP10	4	Header, 100mil, 3x1, Tin plated, TH	Sullins Connector Solutions	PEC03SAAN
JP2, JP3, JP4, JP5, JP7, JP8, JP11, JP12, JP13, JP14, JP15, JP16	12	Header, 100mil, 2x1, Tin plated, TH	Sullins Connector Solutions	PEC02SAAN
R1, R3	2	RES, 33 ohm, 5%, 1W, 2512	Panasonic	ERJ-1TYJ102U
R2, R4	2	RES, 0805, RES, 0805	Vishay-Dale	CRCW08051K00FKEA
SH-J1, SH-J2, SH-J3, SH-J4, SH-J5, SH-J6, SH-J7, SH-J8	8	Shunt, 100mil, Gold plated, Black	3M	969102-0000-DA
TP1, TP2	2	Test Point, Multipurpose, Yellow, TH	Keystone	5014
U1	1	LOW INPUT VOLTAGE, DUAL LOAD SWITCH WITH CONTROLLED TURN-ON, RSE0008A	Texas Instruments	TPS22960RSE

Revision History

Changes from Original (November 2013) to A Revision	Page
--	-------------

- Updated EVM part number. 1
-

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com