

Product Change Notification Form

PCN#: LMI-PCN-0800032 **PCN Revision: A** **Issue Date: 13-May-2008**

Type of Change: Level 3 **Effective Date: N/A**

Reason(s) for Change:

These changes are necessary for compatibility with future device revisions.

Detailed Description of Changes:

Luminary Micro recommends that customer designs do not supply VDD25 inputs from an external voltage regulator. Instead, use only the LDO output as the source of VDD25 input. Future releases of product documentation will not include the option of providing VDD25 power from external sources.

Stellaris® devices incorporating an Ethernet controller should have a 12.4-kΩ resistor connected between pin 41 (for LQFP devices) or ball K3 (for BGA devices), and GND for compatibility with future device revisions.

In future revisions, pin 41 and ball K3 will be renamed from GNDPHY to ERBIAS.

Customers should include this resistor in all new designs. Existing designs should be modified to include this change during the next board design cycle.


The 12.4-kΩ resistor should have a 1% tolerance and should be located in close proximity to pin 41 or ball K3. Power dissipation in the resistor is low, so a chip resistor of any geometry may be used.

Three of the nine Ethernet LED configuration options will not be supported in future revisions of Ethernet-enabled Stellaris® controllers and should not be used. The three options are TX Activity (0x2), RX Activity (0x3), and Collision (0x4). Future releases of the product documentation will list these options as reserved.

Register 27: Ethernet PHY Management Register 23 – LED Configuration (MR23), address 0x17

Ethernet PHY Management Register 23 – LED Configuration (MR23)

Base 0x4004.8000
 Address 0x17
 Type R/W, reset 0x0010

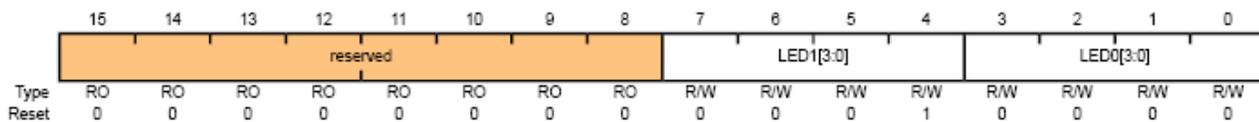

| Bit/Field | Name | Type | Reset | Description | | | | | | | | | | | | | | | | | | | | |
|-----------|-----------------------------------|------|-------|--|-------|-------------|-----|---------|-----|----------------------------------|-----|----------|-----|----------|-----|----------|-----|-----------------|-----|---------------|-----|-------------|-----|-----------------------------------|
| 15:8 | reserved | RO | 0x0 | Software should not rely on the value of a reserved bit. To provide compatibility with future products, the value of a reserved bit should be preserved across a read-modify-write operation. | | | | | | | | | | | | | | | | | | | | |
| 7:4 | LED1[3:0] | R/W | 1 | LED1 Source The LED1 field selects the source that toggles the LED1 signal. <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>0x0</td><td>Link OK</td></tr> <tr><td>0x1</td><td>RX or TX Activity (Default LED1)</td></tr> <tr><td>0x2</td><td>Reserved</td></tr> <tr><td>0x3</td><td>Reserved</td></tr> <tr><td>0x4</td><td>Reserved</td></tr> <tr><td>0x5</td><td>100BASE-TX mode</td></tr> <tr><td>0x6</td><td>10BASE-T mode</td></tr> <tr><td>0x7</td><td>Full-Duplex</td></tr> <tr><td>0x8</td><td>Link OK & Blink=RX or TX Activity</td></tr> </tbody> </table> | Value | Description | 0x0 | Link OK | 0x1 | RX or TX Activity (Default LED1) | 0x2 | Reserved | 0x3 | Reserved | 0x4 | Reserved | 0x5 | 100BASE-TX mode | 0x6 | 10BASE-T mode | 0x7 | Full-Duplex | 0x8 | Link OK & Blink=RX or TX Activity |
| Value | Description | | | | | | | | | | | | | | | | | | | | | | | |
| 0x0 | Link OK | | | | | | | | | | | | | | | | | | | | | | | |
| 0x1 | RX or TX Activity (Default LED1) | | | | | | | | | | | | | | | | | | | | | | | |
| 0x2 | Reserved | | | | | | | | | | | | | | | | | | | | | | | |
| 0x3 | Reserved | | | | | | | | | | | | | | | | | | | | | | | |
| 0x4 | Reserved | | | | | | | | | | | | | | | | | | | | | | | |
| 0x5 | 100BASE-TX mode | | | | | | | | | | | | | | | | | | | | | | | |
| 0x6 | 10BASE-T mode | | | | | | | | | | | | | | | | | | | | | | | |
| 0x7 | Full-Duplex | | | | | | | | | | | | | | | | | | | | | | | |
| 0x8 | Link OK & Blink=RX or TX Activity | | | | | | | | | | | | | | | | | | | | | | | |

3:0 LED0[3:0] R/W 0 LED0 Source

The LED0 field selects the source that toggles the LED0 signal.

| Value | Description |
|-------|-----------------------------------|
| 0x0 | Link OK (Default LED0) |
| 0x1 | RX or TX Activity |
| 0x2 | <i>Reserved</i> |
| 0x3 | <i>Reserved</i> |
| 0x4 | <i>Reserved</i> |
| 0x5 | 10BASE-TX mode |
| 0x6 | 10BASE-T mode |
| 0x7 | Full-Duplex |
| 0x8 | Link OK & Blink=RX or TX Activity |

Products Affected:

| Part Number | Description |
|----------------|-----------------|
| LM3S8938-IQC50 | Microcontroller |
| LM3S8938-EQC50 | Microcontroller |
| LM3S8938-IBZ50 | Microcontroller |

Forecasted Key Milestones: Not Applicable

| Milestone | Date |
|-----------|------|
| N/A | N/A |

Recommended Action:

Implement these changes during the next board design cycle to facilitate future design compatibility.

Reference Documents/Attachments: N/A

Should you have any issues with the timeline or content of this change, please contact the representative listed below within 90 days. No response will be deemed as customer's acceptance of the change and the change will be applicable as shown in the effective date set forth in this PCN.

For questions, concerns, or comments please direct all correspondence to: customer.service@luminarymicro.com

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated