


PMP5711RevC Test Results

1	Startup.....	2
2	Shutdown	2
3	Efficiency.....	3
4	Load Regulation	4
5	Line Regulation	4
6	Output Ripple Voltage.....	5
7	Input Ripple Voltage.....	5
8	Control Loop Frequency Response	7
9	Load Transients	8
10	Waveforms.....	9
10.1	Primary FET Vds.....	9
10.2	Active Clamp FET Vds.....	10
10.3	Freewheeling FET, secondary side.....	11
10.4	Synchronous Rectifier, secondary side.....	12
11	Thermal Image.....	13
11.1	25A load current, no air flow, convectional cooling:.....	13
11.2	35A with forced air flow 2m/s / 400lfm:	14
12	Miscellaneous Measurements	15
13	Summary & Pic	15


1 Startup

The startup waveform is shown in Figure 1. The input voltage was set to 48V, with 0A and 35A load current at the output. Startup at full load 35Amps needs 10ms.

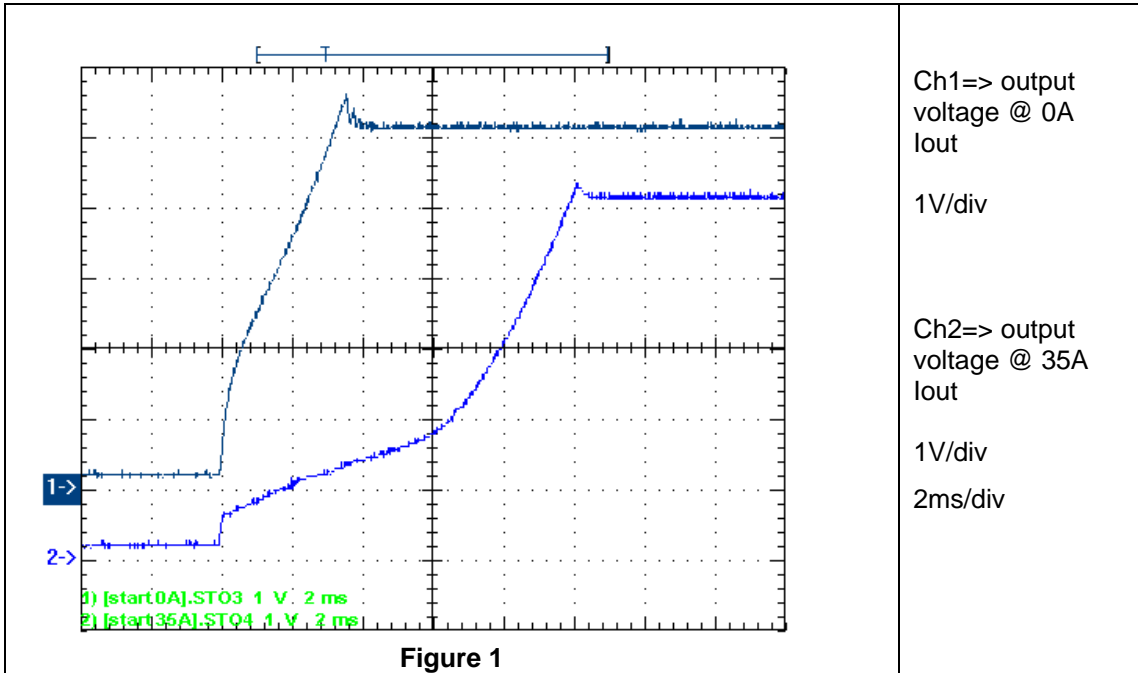

2 Shutdown

The shutdown waveform is shown in Figure 2. The input voltage was set at 48V, with 0A, and 35A load on the output.

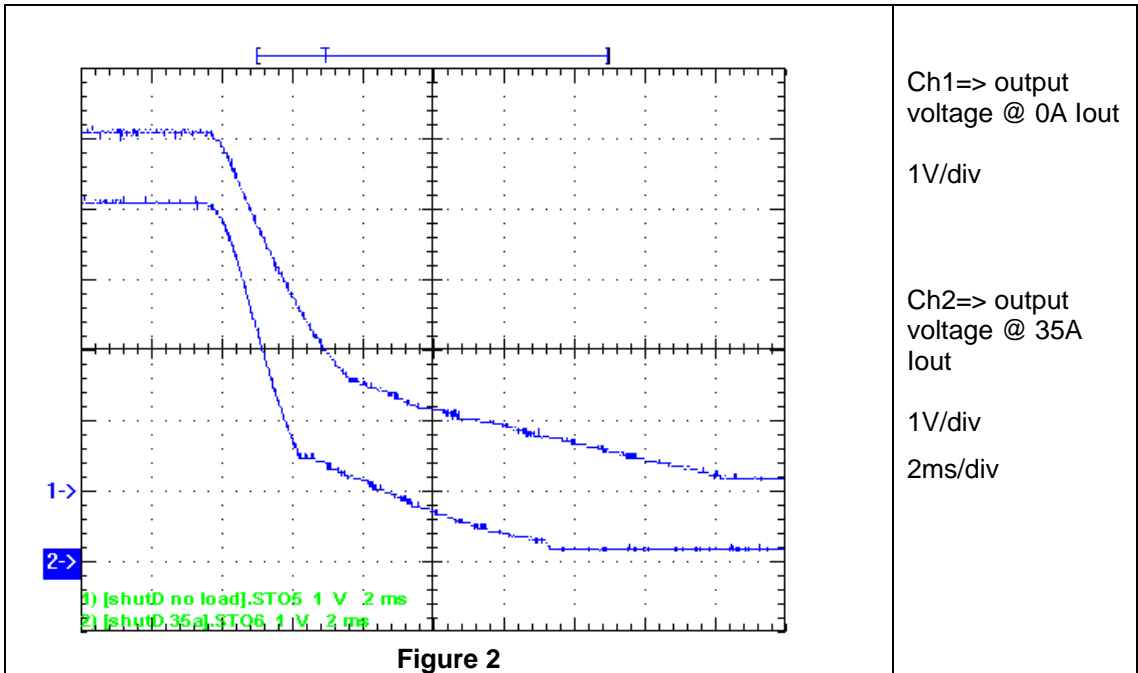

3 Efficiency

The efficiency is shown in Figure 3 below, evaluated at V_{min} 36V, V_{nom} 48V and V_{max} 72V; Both voltages are measured directly at input/output capacitors:

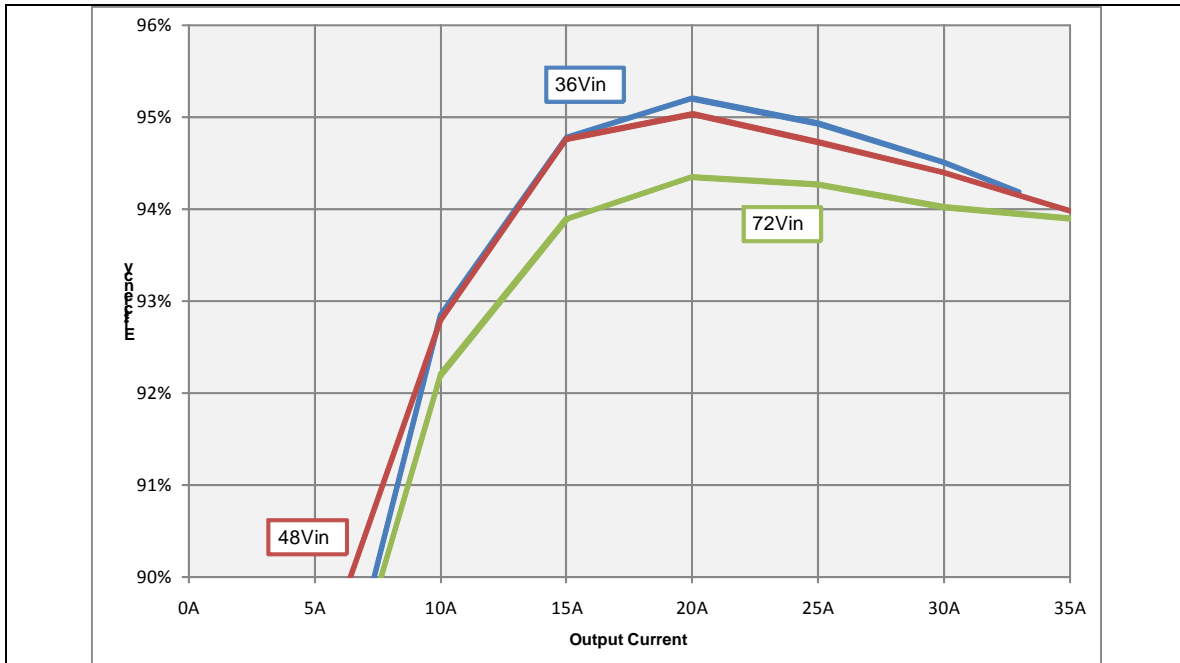


Figure 3

Table 1, V_{min} 36V:

VOUT	IOUT	VIN	IIN	POUT	PIN	Eff
5.00	5.04	36.25	0.80	25.2	28.8	87.5%
5.01	10.01	36.24	1.49	50.1	54.0	92.8%
5.01	15.02	36.22	2.19	75.2	79.4	94.8%
5.01	20.03	36.21	2.91	100.4	105.4	95.2%
5.01	25.00	36.19	3.65	125.3	131.9	94.9%
5.01	30.01	36.18	4.40	150.4	159.2	94.5%
5.01	32.99	36.17	4.86	165.4	175.6	94.2%

Table 2, V_{nom} 48V:

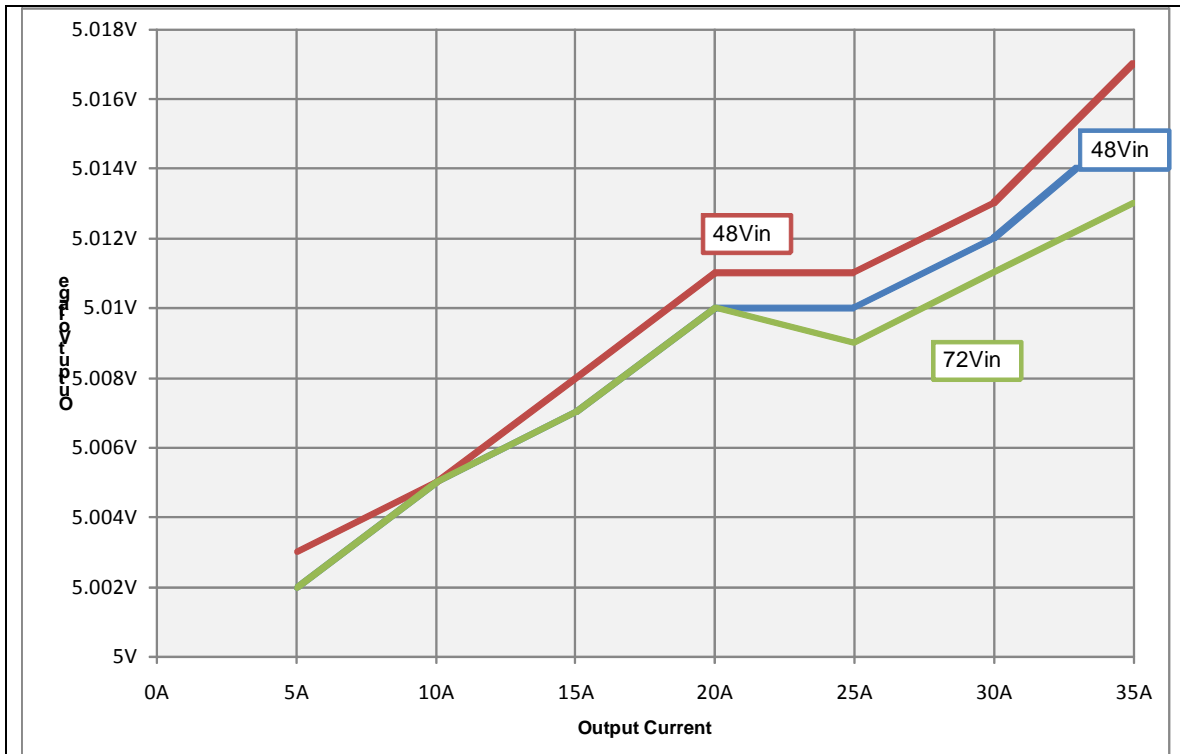
VOUT	IOUT	VIN	IIN	POUT	PIN	Eff
5.00	5.04	48.48	0.59	25.2	28.4	88.9%
5.01	10.01	48.47	1.11	50.1	54.0	92.8%
5.01	15.02	48.46	1.64	75.2	79.4	94.8%
5.01	20.03	48.45	2.18	100.4	105.6	95.0%
5.01	25.00	48.44	2.73	125.3	132.2	94.7%
5.01	30.01	48.43	3.29	150.4	159.4	94.4%
5.02	35.02	48.42	3.86	175.7	186.9	94.0%

Table 3, Vmax 72V:

VOUT	IOUT	VIN	IIN	POUT	PIN	Eff
5.00	5.04	71.80	0.40	25.2	28.8	87.6%
5.01	10.01	71.79	0.76	50.1	54.3	92.2%
5.01	15.02	71.78	1.12	75.2	80.1	93.9%
5.01	20.03	71.77	1.48	100.4	106.4	94.3%
5.01	25.00	71.77	1.85	125.2	132.8	94.3%
5.01	30.01	71.76	2.23	150.4	160.0	94.0%
5.01	35.00	71.57	2.61	175.5	186.9	93.9%

4 Load Regulation

The load regulation of the output is shown in the **Figure 4** below, precision is +14mV, so 0.28%.


**Figure 4**

5 Line Regulation

No influence of the output voltage to the input voltage (36V to 72V). The current was set to 20A, voltage stayed constant at 5.011V by covering total input voltage range.


6 Output Ripple Voltage


The output ripple voltage is shown in Figure 5. The image was taken with a 35 A load and 48V at the input. Voltage ripple du is 40mVpp, noise is 110mVp.

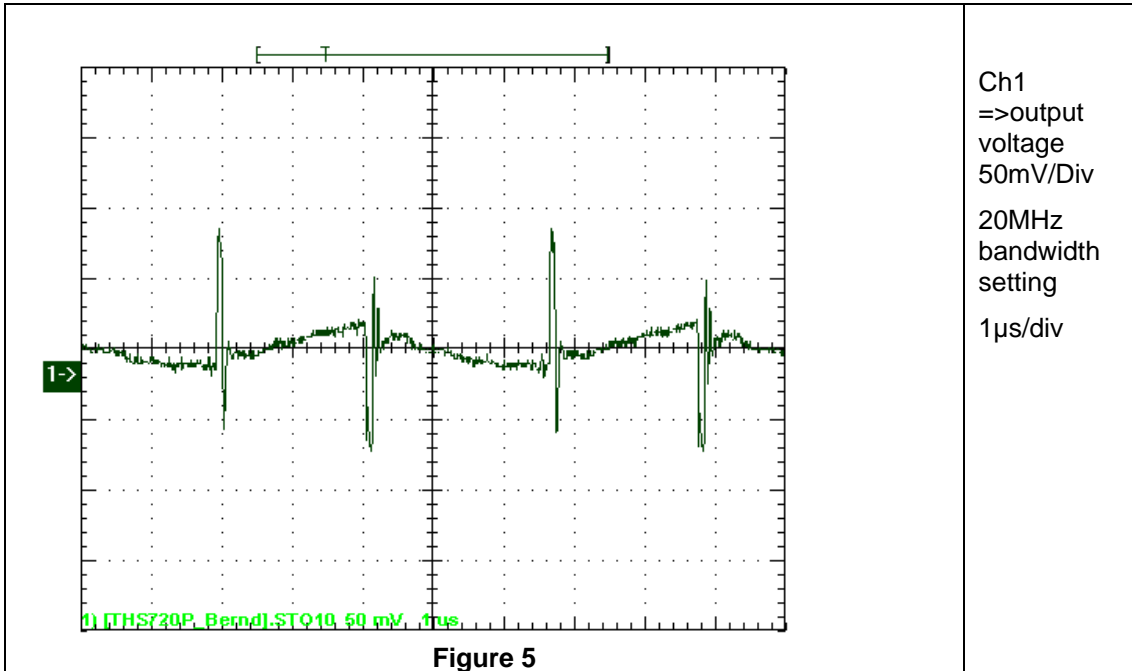

7 Input Ripple Voltage

The input ripple voltage is shown in Figure 6 and Figure 7. The input voltage was set to 48V with 20A output current.

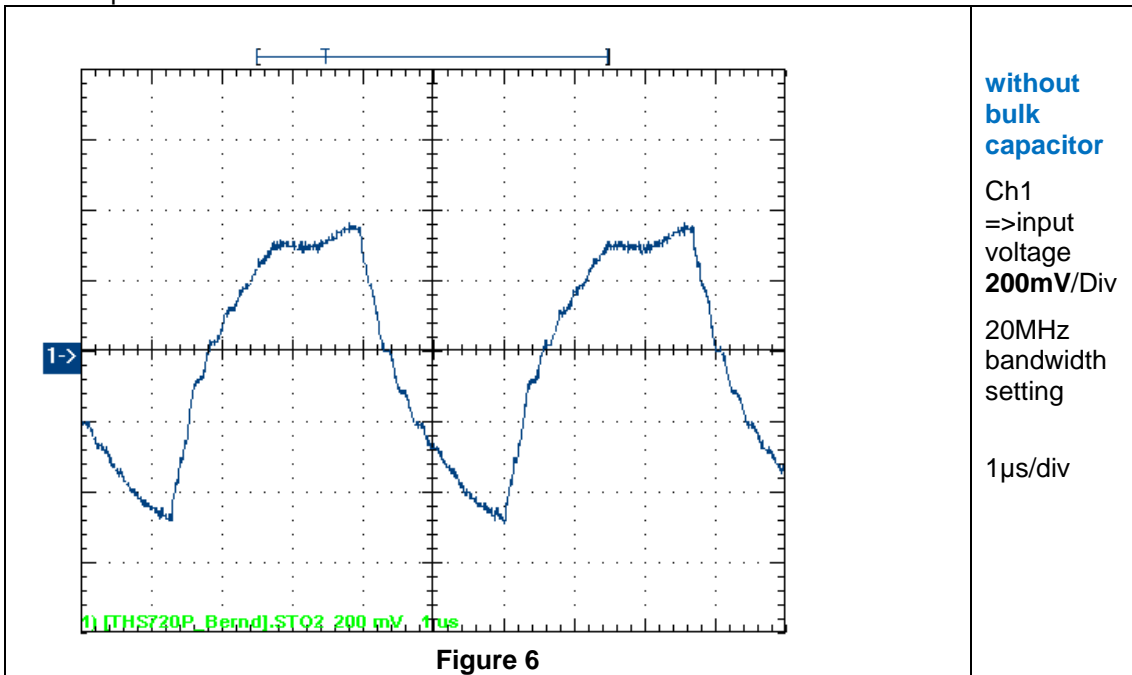

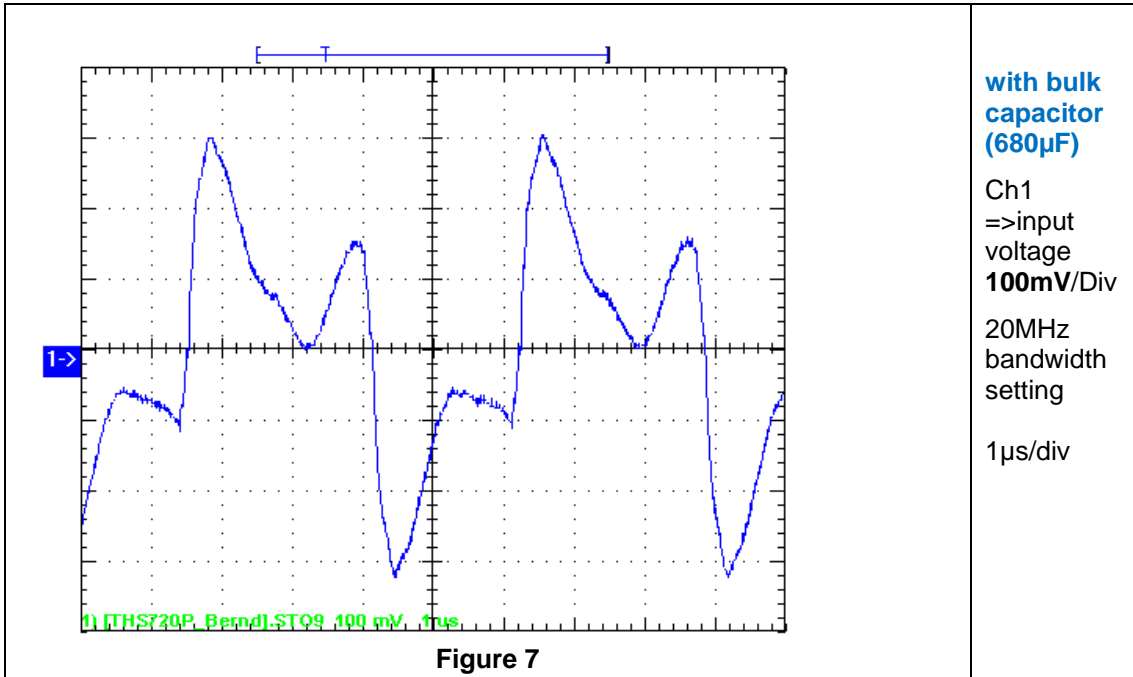

8 Control Loop Frequency Response

Figure 8 shows the loop @ 30A with input voltages V_{min} 36V / V_{nom} 48V / V_{max} 72V:

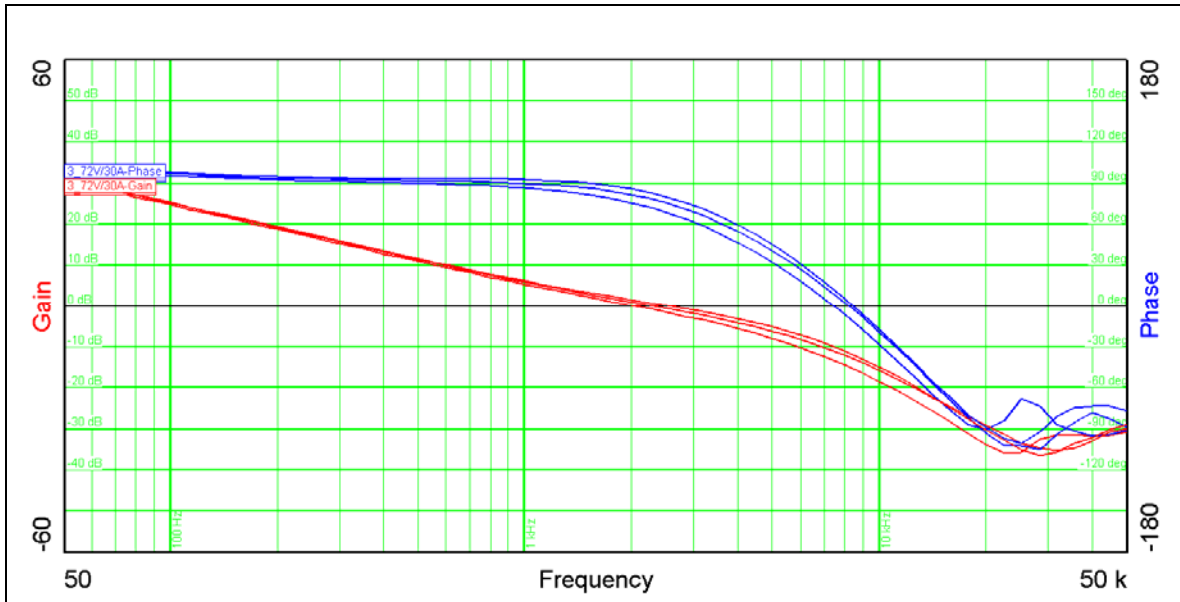


Figure 8


Table 4 summarizes the results from Figure 8

	36Vin	48Vin	72Vin
Bandwidth (kHz)	2.04	2.31	2.55
Phasemargin	75°	77.8°	79.5°
slope (20dB/decade)	-0.87	-0.80	-0.74
gain margin (dB)	-13.3	12.6	-11.9
slope (20dB/decade)	-1.79	-1.8	-1.9
freq (kHz)	7.45	8.23	8.45

Table 4

9 Load Transients

The Figure 9 shows the response to load transients. The load is switching from 15A to 30A. with 100Hz frequency. Input voltage was set to 48V.

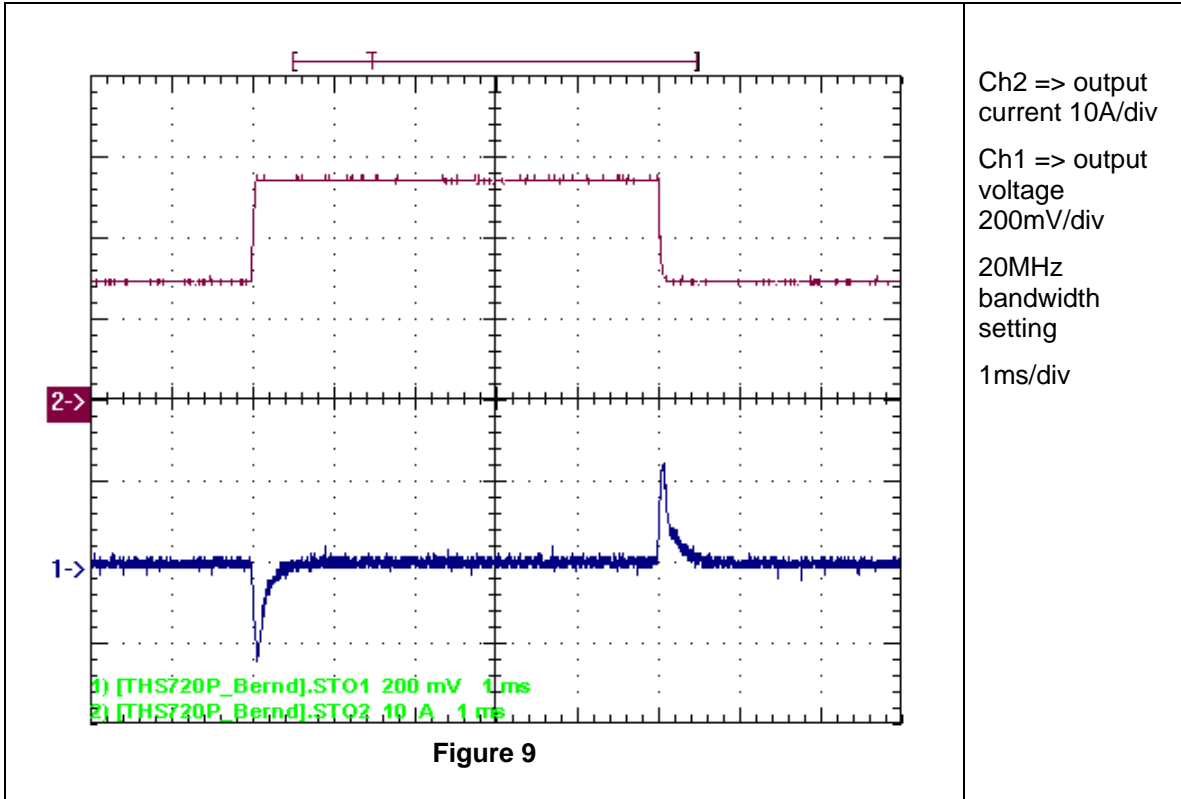

10 Waveforms

10.1 Primary FET Vds

With input voltage set to 48V results in the waveform shown in Figure 10; output current was set to 20A. *Keep in mind – NMOS conducts as gate is high, figures are not in phase:*


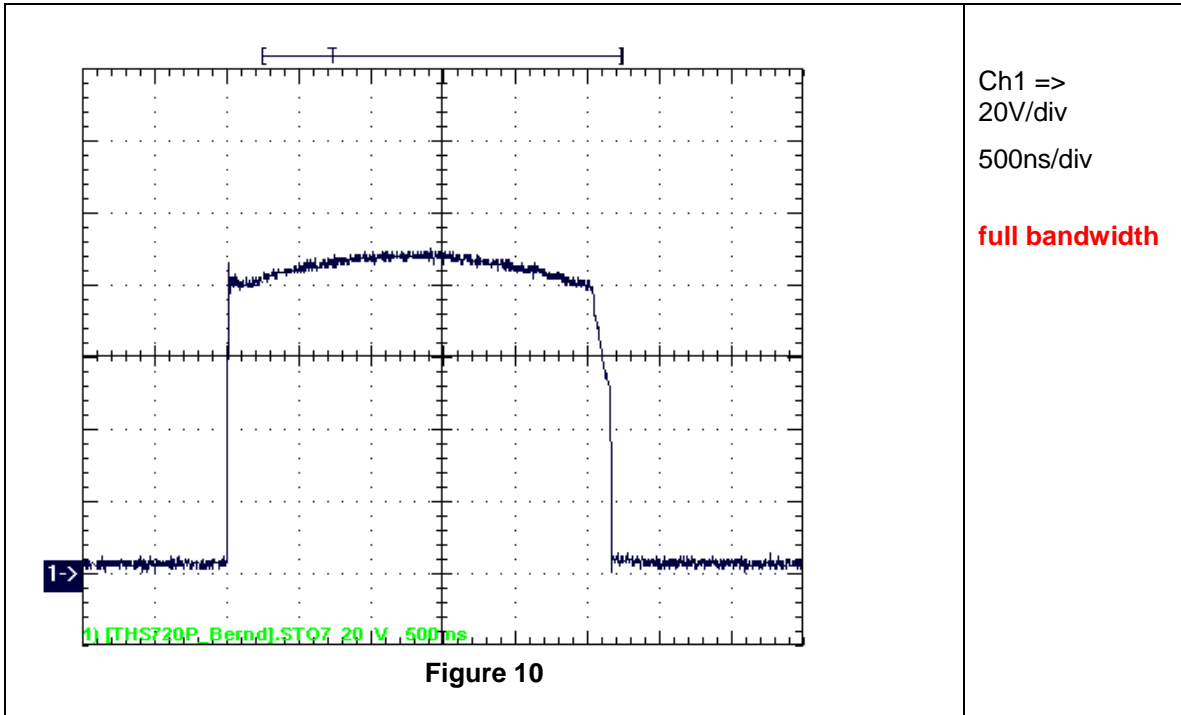


Figure 11 shows the Gate-Source voltage Vgs of the same FET

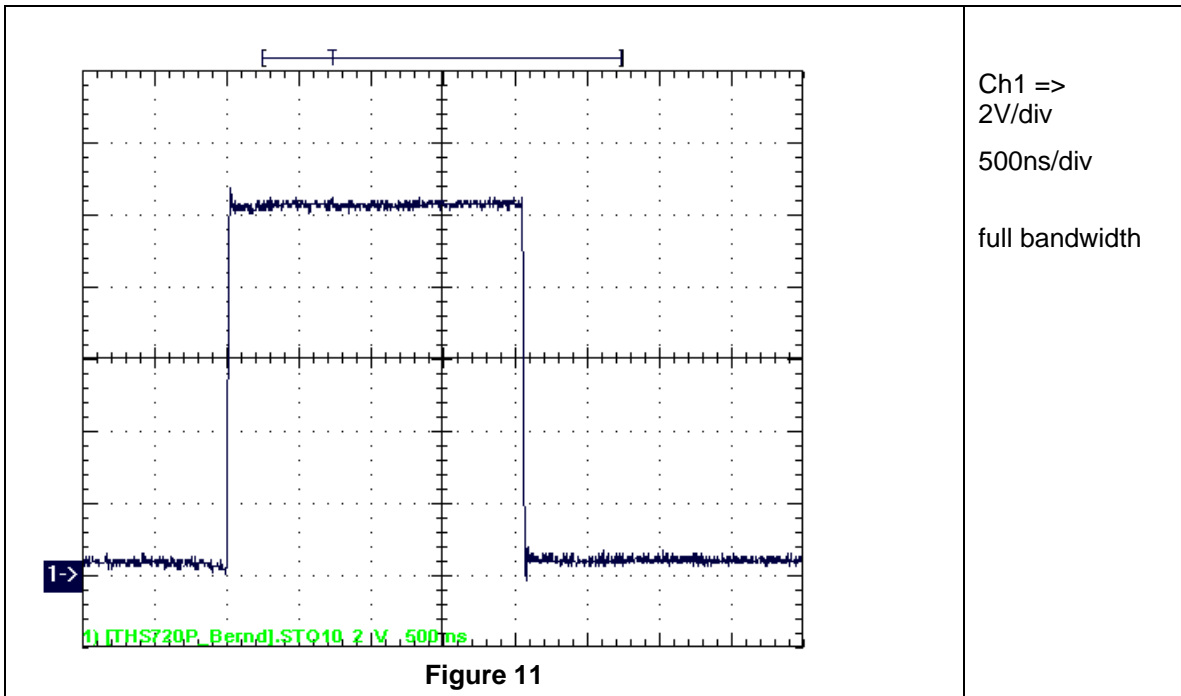

10.2 Active Clamp FET Vds

With input voltage set to 48V results in the waveform shown in Figure 12; output current was set to 20A.


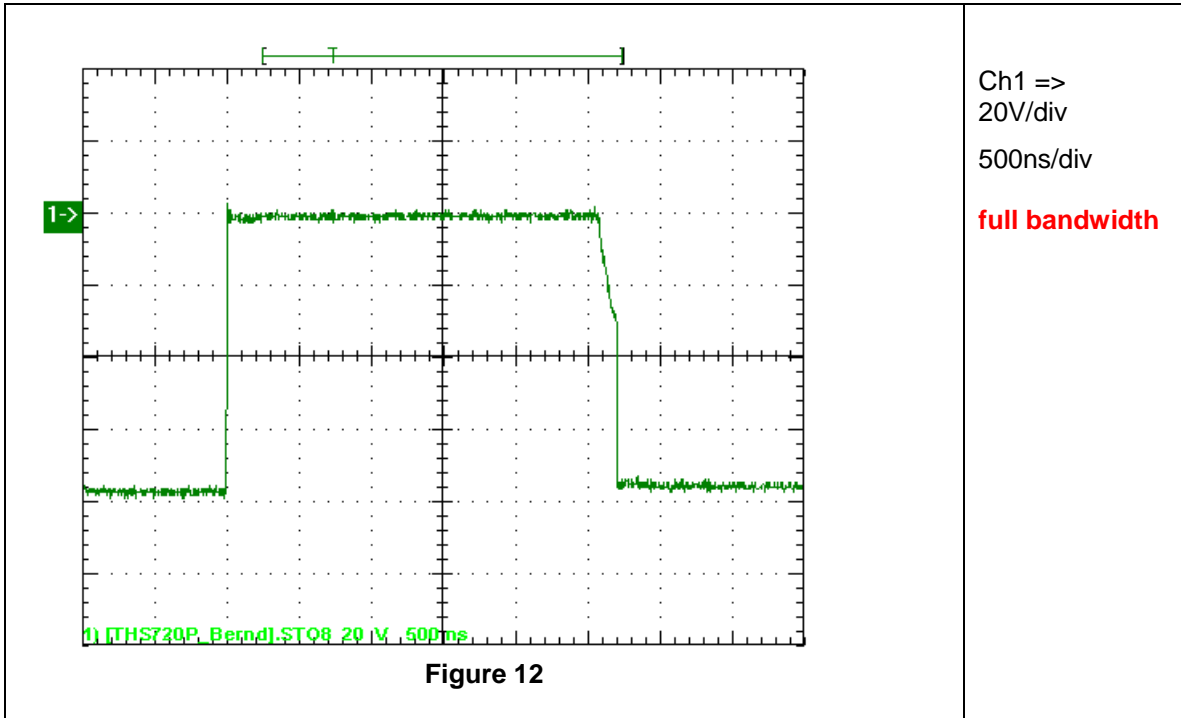


Figure 13 shows the Gate-Source voltage Vgs of the same FET

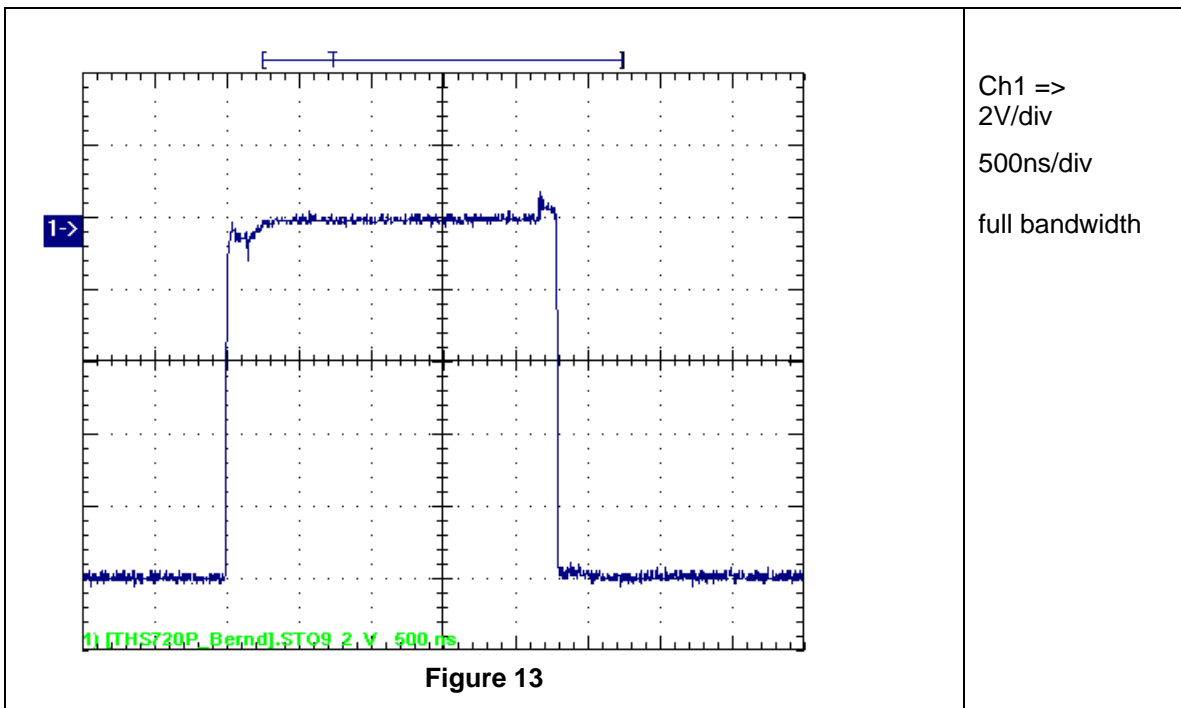

10.3 Freewheeling FET, secondary side

With input voltage set to 48V results in the waveform shown in Figure 14; output current was set to 20A.


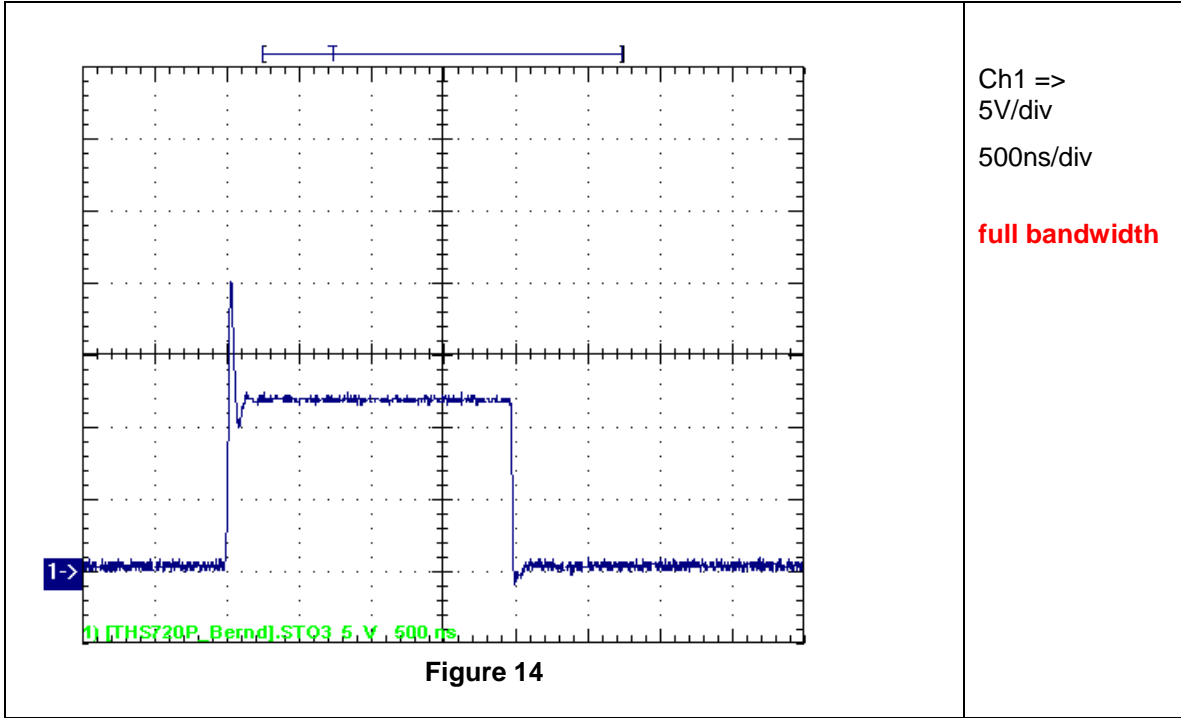


Figure 15 shows the Gate-Source voltage of the same FET

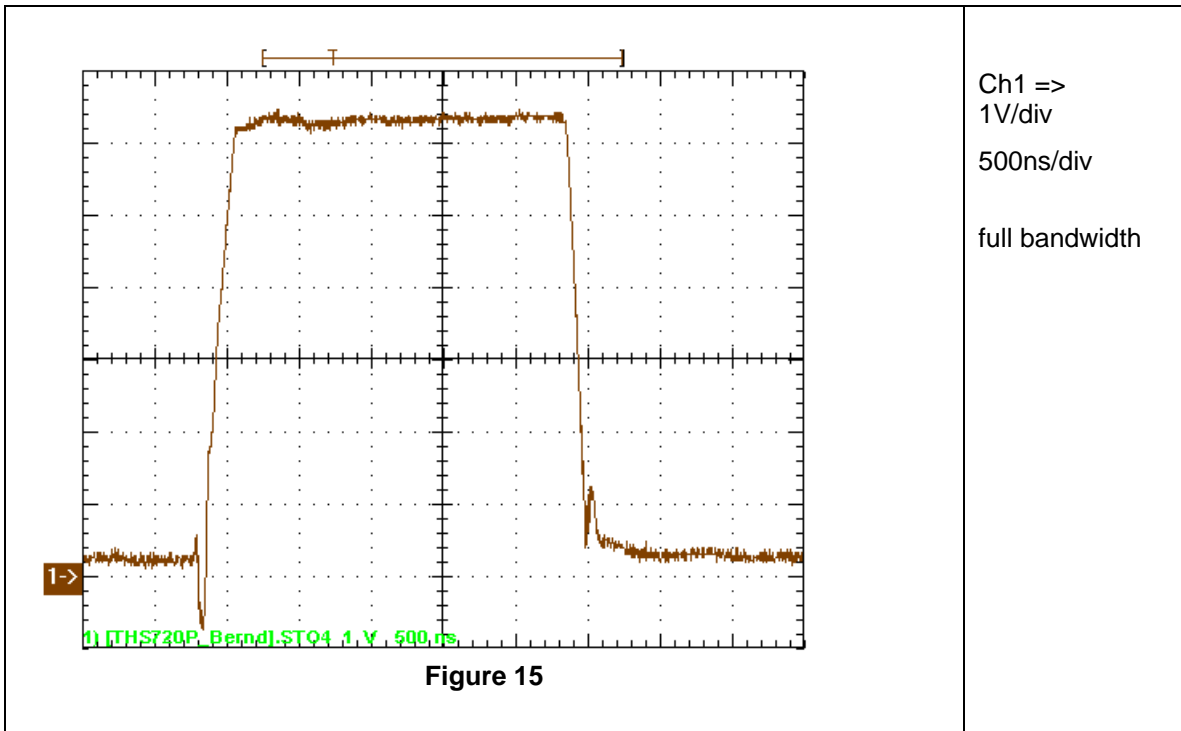

10.4 Synchronous Rectifier, secondary side

With input voltage set to 48V results in the waveform shown in Figure 16 Output current was set to 20A.


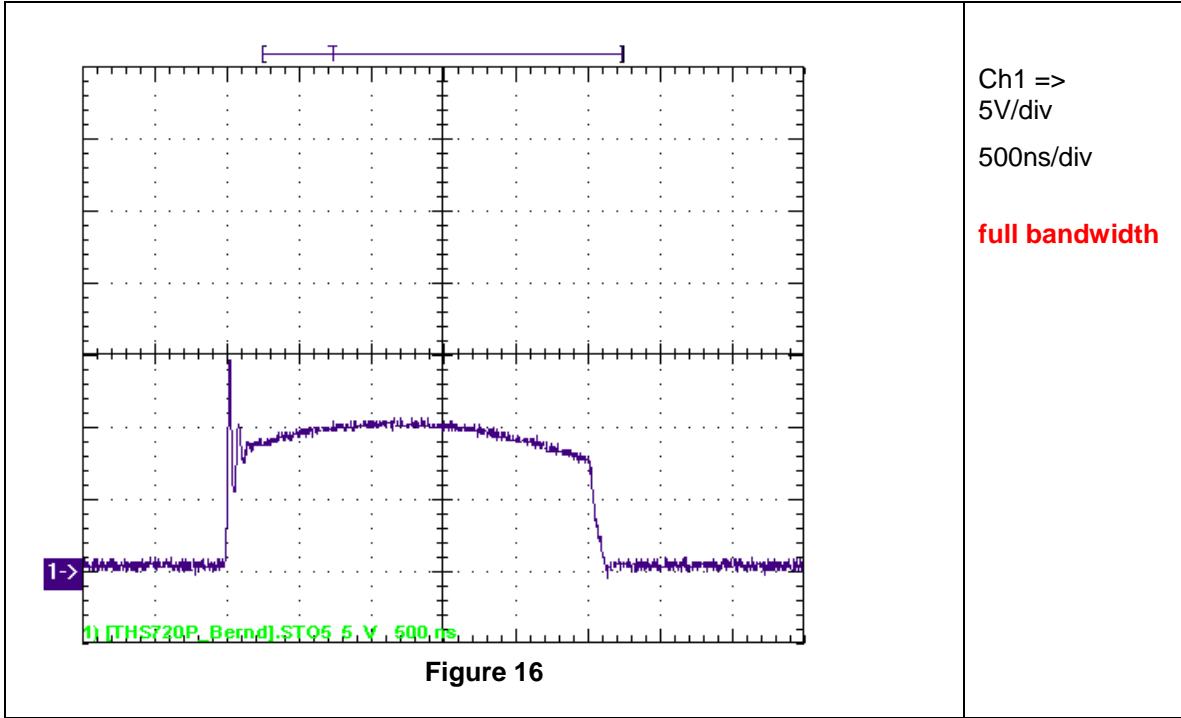


Figure 17 shows the Gate-Source voltage of the same FET

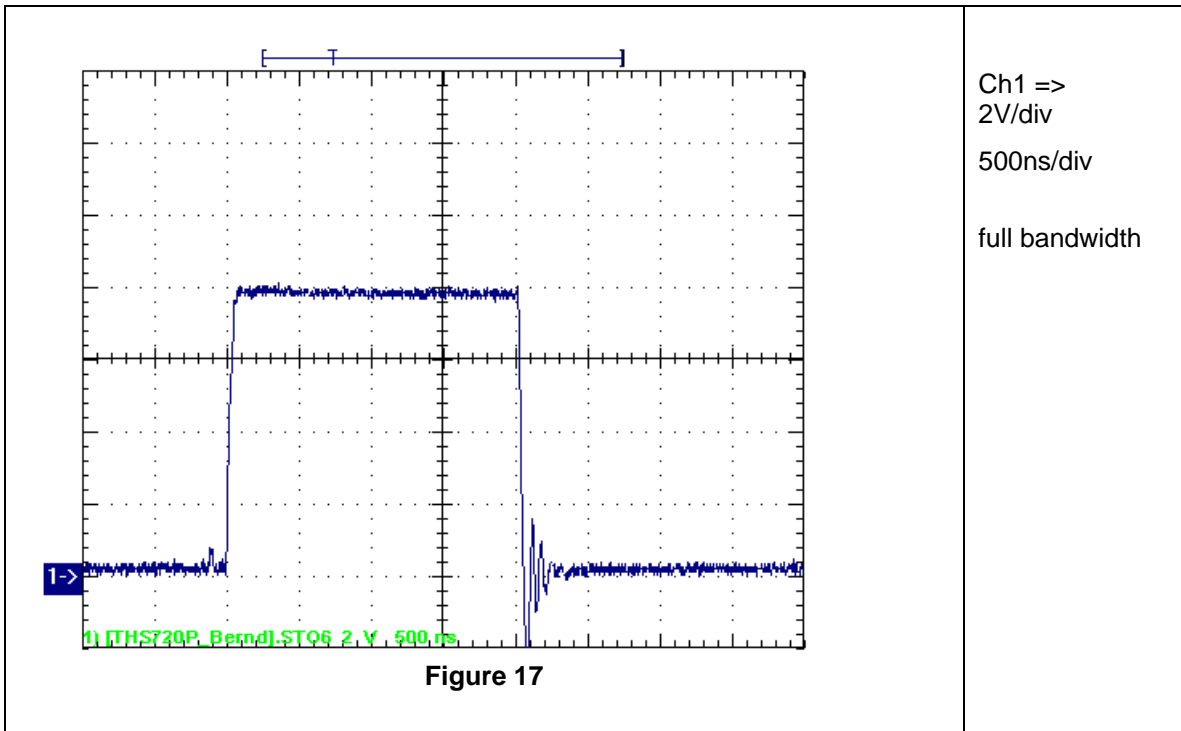

11 Thermal Image

11.1 25A load current, no air flow, convectional cooling:

Topside

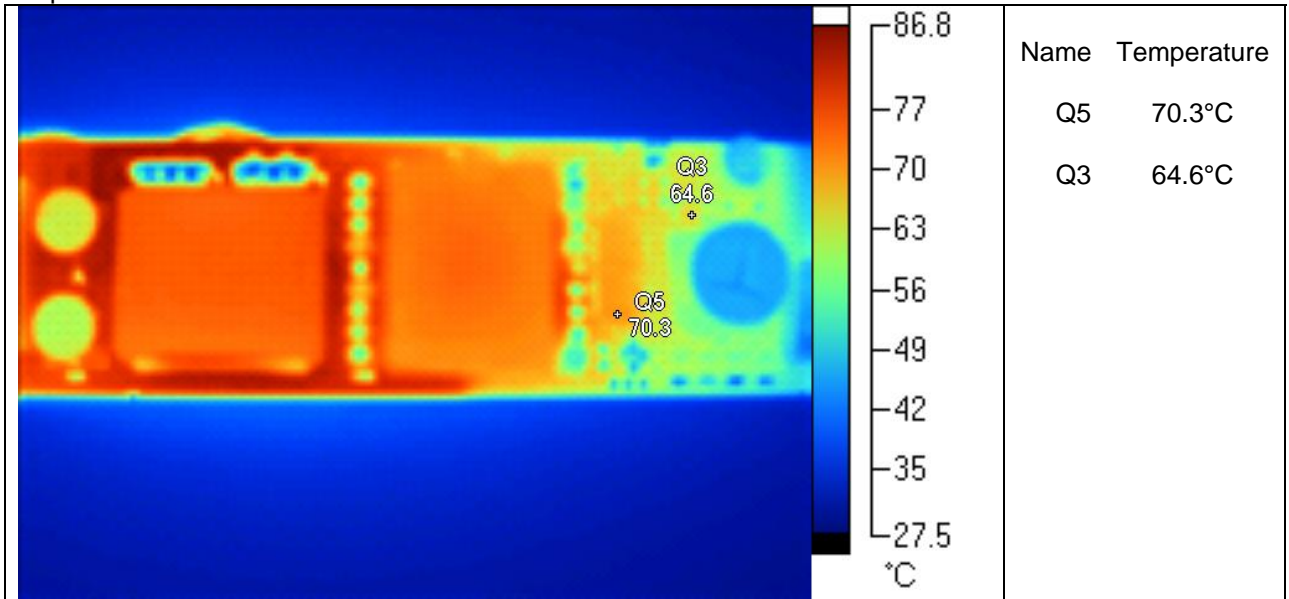


Figure 18

Bottomside

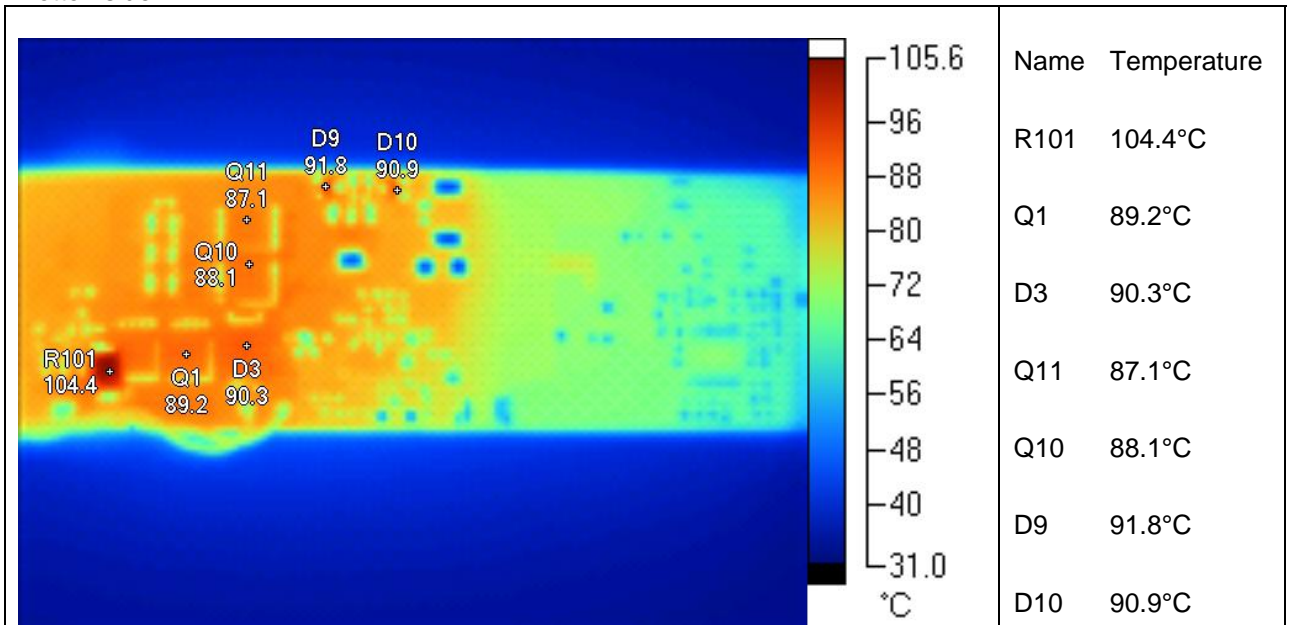


Figure 19

11.2 35A with forced air flow 2m/s / 400lfm:

Topside

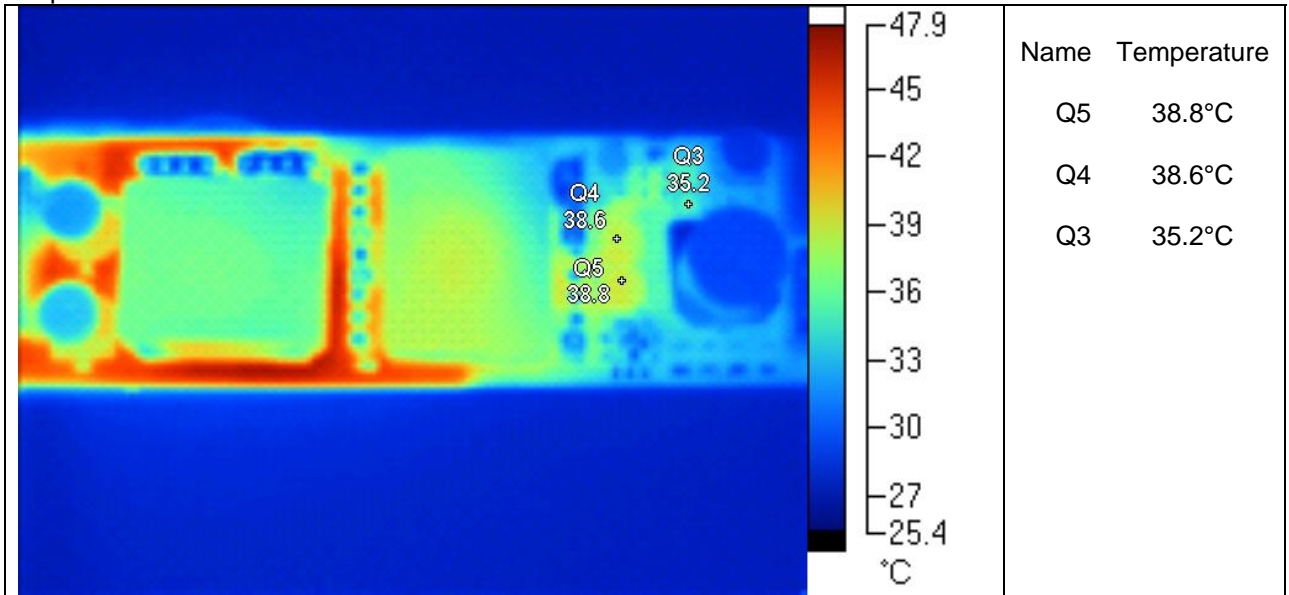


Figure 20

Bottomside

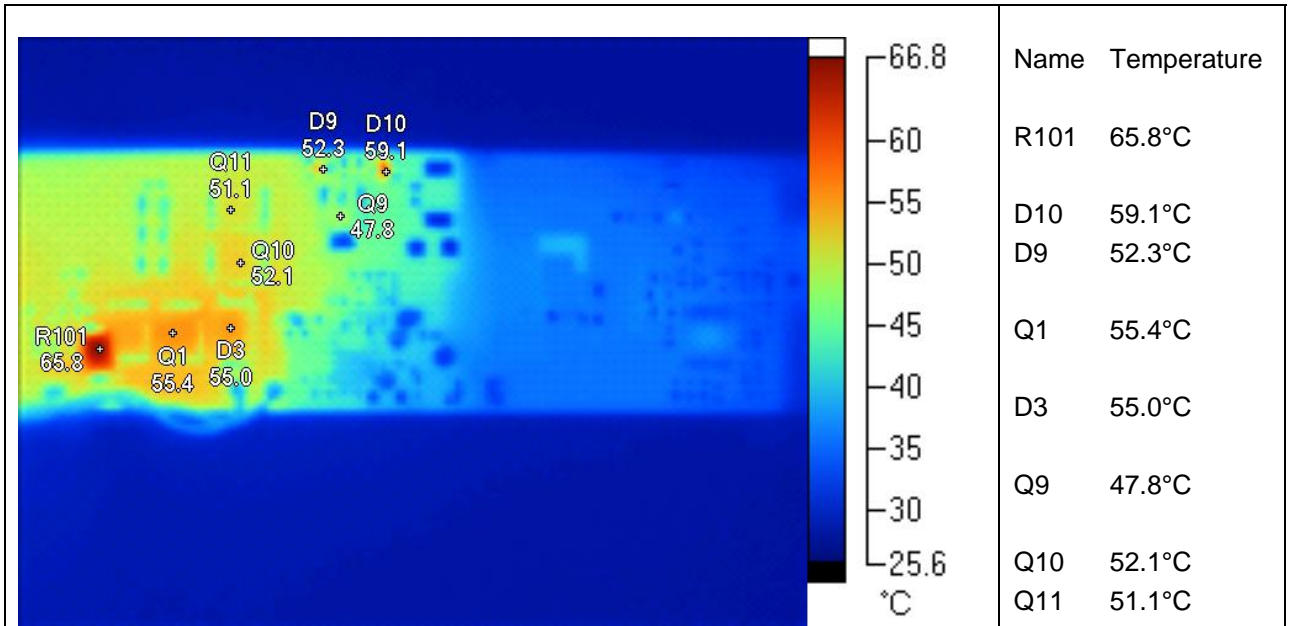


Figure 21

12 Miscellaneous Measurements

- Bias Voltage 10.36 at nominal input 48V / 20Amps output
total variation across line and load is:
9.15V (36Vin/0Aout) to 11.56V (72Vin/35Aout)
- UV ON 36.1V
- UV OFF 34.5V
- OV ON 71.5V
- OV OFF 72.1V
- Fsw 211kHz
- Rise of full load at 36Vin is limited to 33A due to CS limitation.


13 Summary & Pic

With an efficiency of >94% across 13Amps load to 35Amps full load and peak efficiency of 95% the results for a 5V forward converter are fine.

Due to space requirements the design is made as small as possible and is specified for forced cooling. Achieved size is L x W x H = 93mm x 31mm x 19mm.

If REMOTE SENSE isn't a must go for rugged TL431 as error amplifier. If dealing w/ TL103 select proper placement at secondary side and root shielding ground plane below this IC. So some caps could be removed and bandwidth could be doubled.

To reduce ringing on secondary side place RC snubber directly to Q1/Q2.

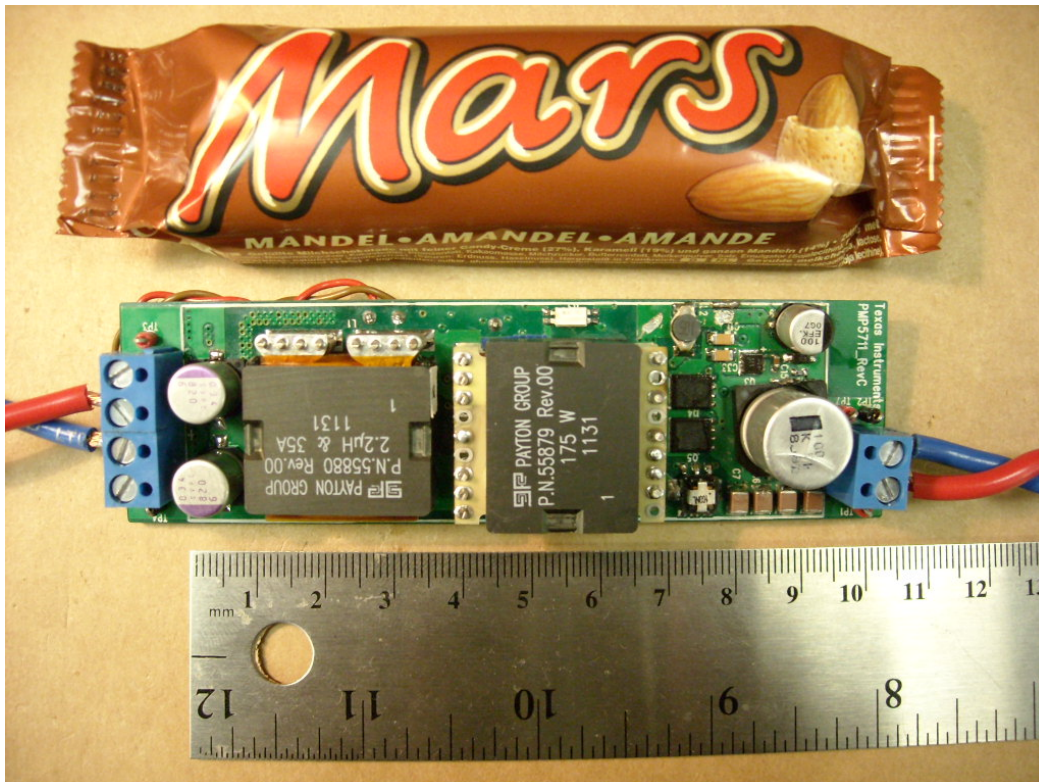

PMP5711RevC Test Results

For Feasibility Evaluation Only, in Laboratory/Development Environments. The reference design is not a complete product. It is intended solely for use for preliminary feasibility evaluation in laboratory / development environments by technically qualified electronics experts who are familiar with the dangers and application risks associated with handling electrical / mechanical components, systems and subsystems. It should not be used as all or part of a production unit.

Your Sole Responsibility and Risk. You acknowledge, represent and agree that:

1. You have unique knowledge concerning Federal, State and local regulatory requirements (including but not limited to Food and Drug Administration regulations, if applicable) which relate to your products and which relate to your use (and/or that of your employees, affiliates, contractors or designees) of the reference design for evaluation, testing and other purposes.
2. You have full and exclusive responsibility to assure the safety and compliance of your products with all such laws and other applicable regulatory requirements, and also to assure the safety of any activities to be conducted by you and/or your employees, affiliates, contractors or designees, using the reference design. Further, you are responsible to assure that any interfaces (electronic and/or mechanical) between the reference design and any human body are designed with suitable isolation and means to safely limit accessible leakage currents to minimize the risk of electrical shock hazard.
3. Since the REFERENCE DESIGN is not a completed product, it may not meet all applicable regulatory and safety compliance standards (such as UL, CSA, VDE, CE, RoHS and WEEE) which may normally be associated with similar items. You assume full responsibility to determine and/or assure compliance with any such standards and related certifications as may be applicable. You will employ reasonable safeguards to ensure that your use of the reference design will not result in any property damage, injury or death, even if the REFERENCE DESIGN should fail to perform as described or expected.

Certain Instructions. Exceeding the specified reference design ratings (including but not limited to input and output voltage, current, power, and environmental ranges) may cause property damage, personal injury or death. If there are questions concerning these ratings please contact a TI field representative prior to connecting interface electronics including input power and intended loads. Any loads applied outside of the specified output range may result in unintended and/or inaccurate operation and/or possible permanent damage to the reference design and/or interface electronics. Please consult the reference design User's Guide prior to connecting any load to the reference design output. If there is uncertainty as to the load specification, please contact a TI field representative. During normal operation, some circuit components may have case temperatures greater than 60°C as long as the input and output ranges are maintained at nominal ambient operating temperature. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors which can be identified using the reference design schematic. When placing measurement probes near these devices during normal operation, please be aware that these devices may be very warm to the touch.

Agreement to Defend, Indemnify and Hold Harmless. You agree to defend, indemnify and hold TI, its licensors and their representatives harmless from and against any and all claims, damages, losses, expenses, costs and liabilities (collectively, "Claims") arising out of or in connection with any use of the reference design that is not in accordance with the terms of this agreement. This obligation shall apply whether Claims arise under the law of tort or contract or any other legal theory, and even if the reference design fails to perform as described or expected.

Safety-Critical or Life-Critical Applications. If you intend to evaluate TI components for possible use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, such as devices which are classified as FDA Class III or similar classification, then you must specifically notify TI of such intent and enter into a separate Assurance and Indemnity Agreement.

IMPORTANT NOTICE FOR TI REFERENCE DESIGNS

Texas Instruments Incorporated ("TI") reference designs are solely intended to assist designers ("Buyers") who are developing systems that incorporate TI semiconductor products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products.

TI reference designs have been created using standard laboratory conditions and engineering practices. **TI has not conducted any testing other than that specifically described in the published documentation for a particular reference design.** TI may make corrections, enhancements, improvements and other changes to its reference designs.

Buyers are authorized to use TI reference designs with the TI component(s) identified in each particular reference design and to modify the reference design in the development of their end products. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI REFERENCE DESIGNS ARE PROVIDED "AS IS". TI MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE REFERENCE DESIGNS OR USE OF THE REFERENCE DESIGNS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. TI DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO TI REFERENCE DESIGNS OR USE THEREOF. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY BUYERS AGAINST ANY THIRD PARTY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON A COMBINATION OF COMPONENTS PROVIDED IN A TI REFERENCE DESIGN. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, SPECIAL, INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES, HOWEVER CAUSED, ON ANY THEORY OF LIABILITY AND WHETHER OR NOT TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, ARISING IN ANY WAY OUT OF TI REFERENCE DESIGNS OR BUYER'S USE OF TI REFERENCE DESIGNS.

TI reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques for TI components are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

Reproduction of significant portions of TI information in TI data books, data sheets or reference designs is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous failures, monitor failures and their consequences, lessen the likelihood of dangerous failures and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in Buyer's safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed an agreement specifically governing such use.

Only those TI components that TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components that have **not** been so designated is solely at Buyer's risk, and Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.