

DRV3233-Q1 Automotive 24/12V Battery 3-Phase Gate Driver Unit With Accurate Current Sensing and Enhanced Diagnostics

1 Features

- AEC-Q100 qualified for automotive applications - Temperature options:
 - DRV3233EPHP: -40°C to $+150^{\circ}\text{C}$, T_A
 - DRV3233QPHP: -40°C to $+125^{\circ}\text{C}$, T_A
- **Functional Safety-Compliant**
 - Developed for functional safety applications
 - Documentation to aid ISO 26262 system design available
 - Systematic capability up to ASIL D targeted
- Three phase half-bridge gate driver
 - Drives six N-channel MOSFETs (NMOS)
 - 4.5 to 60V wide operating voltage range
 - Bootstrap architecture for high-side gate driver
 - Charge pump for 50mA average gate current
 - 100% PWM duty cycle support
 - Overdrive supply of external switches
- Smart Gate Drive architecture
 - 45-level configurable peak gate drive current up to 1000 / 2000mA (source / sink)
 - Three-step dynamic drive current control
 - Soft shutdown for power stage protection
- Low-side Current Sense Amplifier
 - Sub-1mV low input offset across temperature
 - 9-level adjustable gain
- SPI-based detailed configuration and diagnostics
- DRVOFF pin to disable driver independently
- High voltage wake up pin (nSLEEP)
- Multiple PWM interface options available
 - 6x, 3x, 1x PWM Modes
 - PWM over SPI
- Supports 3.3V, and 5V Logic Inputs
- Optional programmable OTP for reset settings
- Advanced and configurable protection features
 - Battery and power supply voltage monitors
 - Phase feedback comparator
 - MOSFET V_{DS} and R_{sense} over current monitors
 - Analog Built-In-Self-Test, Clock monitors
 - Fault condition indicator pin

2 Applications

- 12V / 24V Automotive Motor-Control Applications
 - Electrical Power Steering and Steer-by-Wire
 - Electrical Mechanical Brake, Brake Boost Assist and Brake-by-Wire
 - Transmission and Shift-by-Wire
 - Automotive Pumps

3 Description

The DRV3233-Q1 is an integrated smart gate driver for 12V and 24V automotive three-phase BLDC applications. The device provides three half-bridge gate drivers, each capable of driving high-side and low-side N-channel power MOSFETs. The DRV3233-Q1 generates the correct gate drive voltages using an integrated bootstrap diode and a GVDD charge pump. The Smart Gate Drive architecture supports configurable peak gate drive current from 0.8mA up to 1A source and 2A sink. The DRV3233-Q1 can operate from a single power supply with a wide input range from 4.5 to 60V. A trickle charge pump enables 100% PWM duty cycle control, and provides overdrive supply voltage for external switches.

The DRV3233-Q1 provides low-side current sense amplifiers to support resistor based low-side current sensing. The low offset of the amplifiers enables the system to obtain precise motor current measurement.


A wide range of diagnostics and protection features integrated in the DRV3233-Q1 enable a robust motor drive system design and help eliminate the needs of external components. The highly configurable device response allows the device to be integrated seamlessly into a variety of system designs.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE (NOM) ⁽²⁾	BODY SIZE (NOM)
DRV3233-Q1	HTQFP (48)	9mm x 9mm	7mm x 7mm
	QFN (48)	7mm x 7mm	7mm x 7mm
	QFN (32) ⁽³⁾	6mm x 4mm	6mm x 4mm

- (1) For all available packages, see the orderable addendum at the end of the data sheet.
- (2) The package size (length x width) is a nominal value and includes pins, where applicable.
- (3) Product preview only. Contact TI for more information.



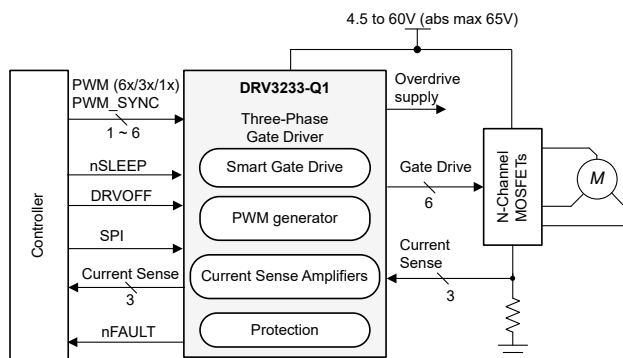

Simplified Schematic

Table of Contents

1 Features1 2 Applications1 3 Description1	4 Revision History3 5 Mechanical, Packaging, and Orderable Information ...4
---	--

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision C (July 2025) to Revision D (December 2025)	Page
• Updated Functional Safety Compliant status to reflect completion of Functional Safety Assessment.....1 • Added orderable part number for DRV3233QRGZ.1	

Changes from Revision B (March 2025) to Revision C (July 2025)	Page
• Updated the device status for DRV3233ERGZ to preview data.....4	

Changes from Revision A (August 2024) to Revision B (July 2025)	Page
• Updated the device status for DRV3233QPHP to production data.....4	

Changes from Revision * (September 2023) to Revision A (August 2024)	Page
• Updated the device status for DRV3233EPHP to production data.1	

5 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
DRV3233EPHPRQ1	Active	Production	HTQFP (PHP) 48	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 150	DRV3233E
DRV3233EPHPRQ1.A	Active	Production	HTQFP (PHP) 48	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 150	DRV3233E
DRV3233QPHPRQ1	Active	Production	HTQFP (PHP) 48	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	DRV3233Q
DRV3233QPHPRQ1.A	Active	Production	HTQFP (PHP) 48	1000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	DRV3233Q

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DRV3233EPHPRQ1	HTQFP	PHP	48	1000	330.0	16.4	9.6	9.6	1.5	12.0	16.0	Q2
DRV3233QPHPRQ1	HTQFP	PHP	48	1000	330.0	16.4	9.6	9.6	1.5	12.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DRV3233EPHPRQ1	HTQFP	PHP	48	1000	336.6	336.6	31.8
DRV3233QPHPRQ1	HTQFP	PHP	48	1000	336.6	336.6	31.8

GENERIC PACKAGE VIEW


PHP 48

TQFP - 1.2 mm max height

7 x 7, 0.5 mm pitch

QUAD FLATPACK

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

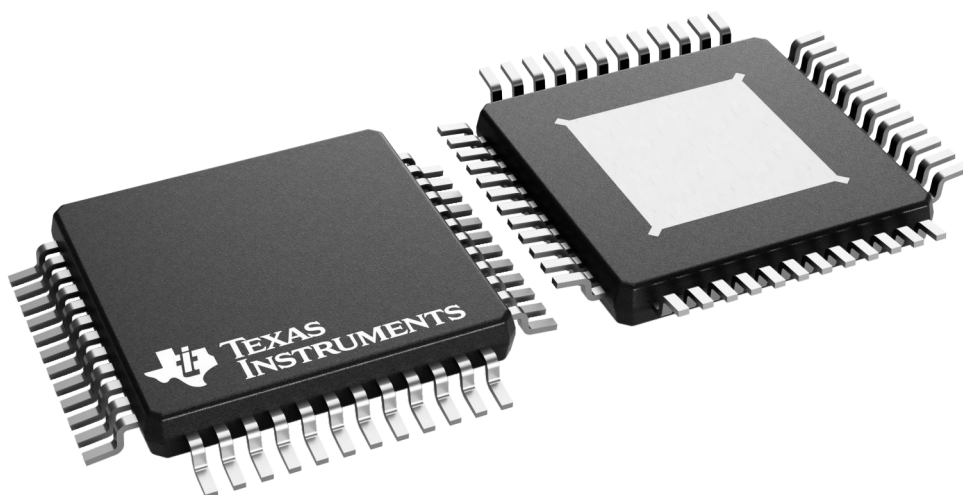


4226443/A

EXAMPLE BOARD LAYOUT


PHP0048P

PowerPAD™ HTQFP - 1.2 mm max height

PLASTIC QUAD FLATPACK

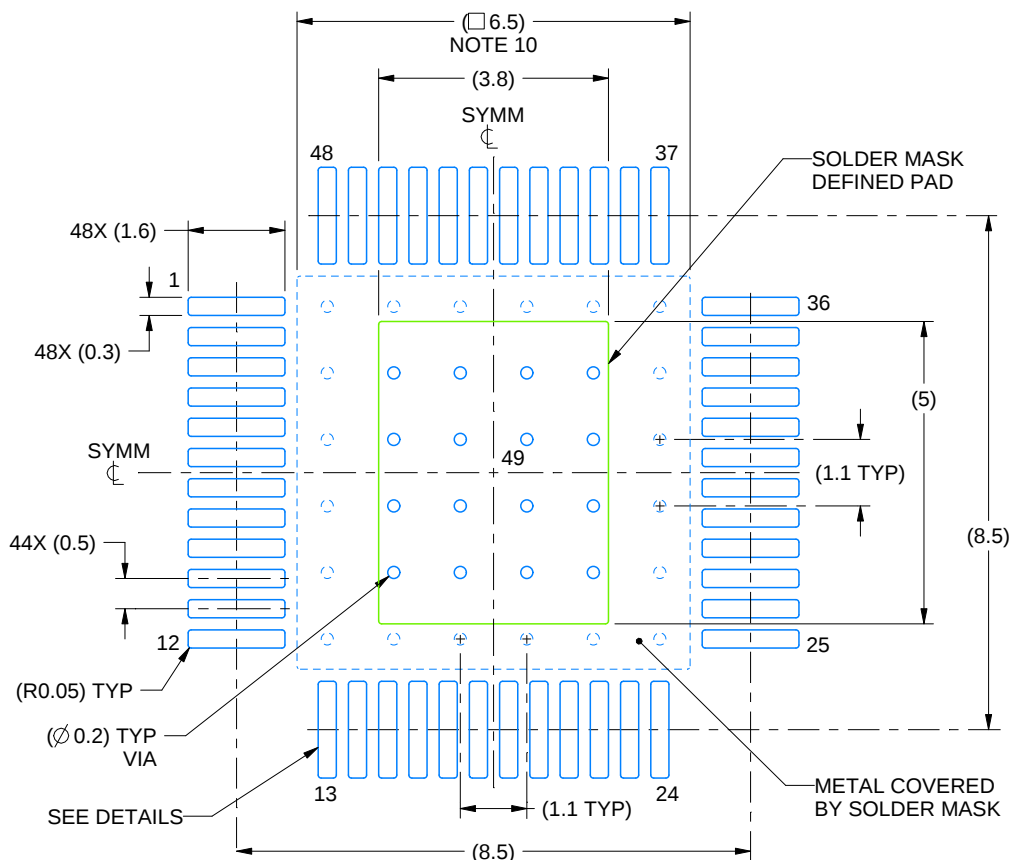

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

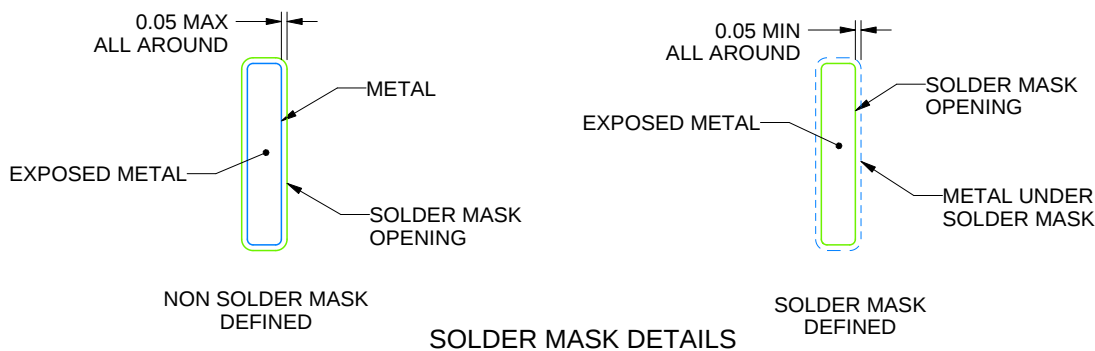

4229139/A 10/2022

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. See technical brief, Powerpad thermally enhanced package, Texas Instruments Literature No. SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
9. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.
10. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

PHP0048P

PowerPAD™ HTQFP - 1.2 mm max height

PLASTIC QUAD FLATPACK

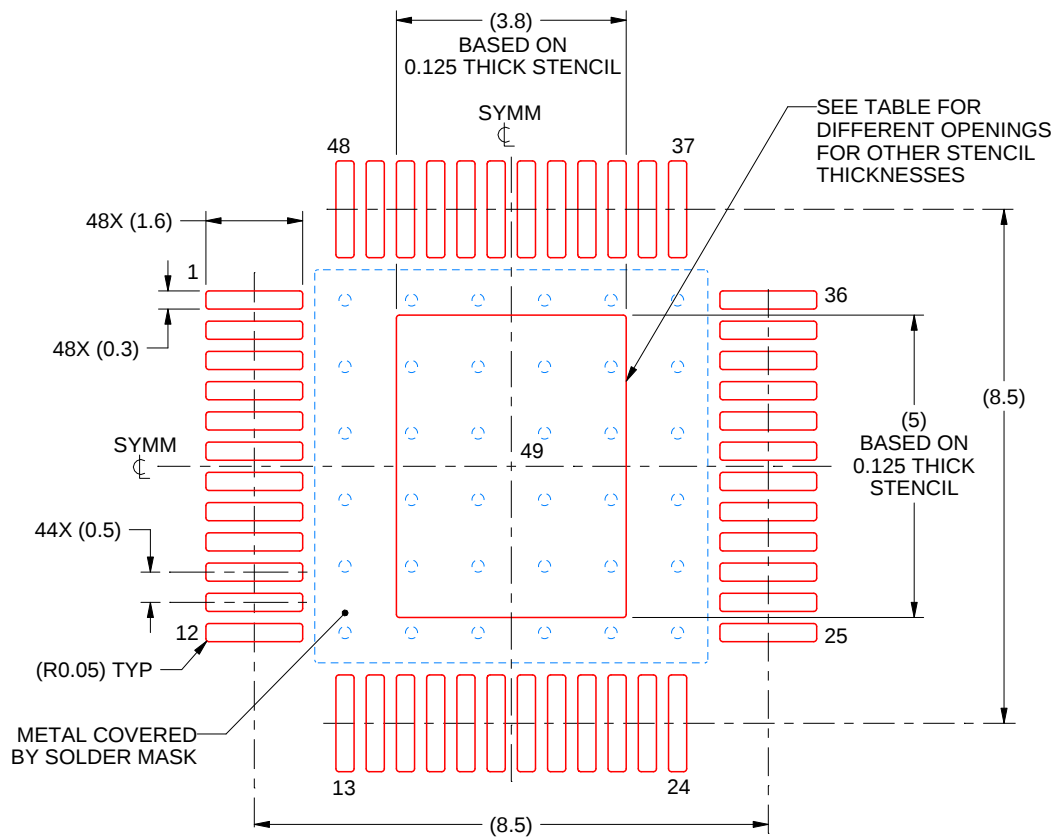

SOLDER PASTE EXAMPLE
EXPOSED PAD
100% PRINTED SOLDER COVERAGE BY AREA
SCALE:8X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	4.25 X 5.59
0.125	3.80 X 5.00 (SHOWN)
0.150	3.47 X 4.56
0.175	3.21 X 4.23

4229139/A 10/2022

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025