


Functional Safety FIT Rate, Failure Mode Distribution TPS6215xA-Q1

3-V to17-V 1 A Step-Down Converters with DCS-Control™

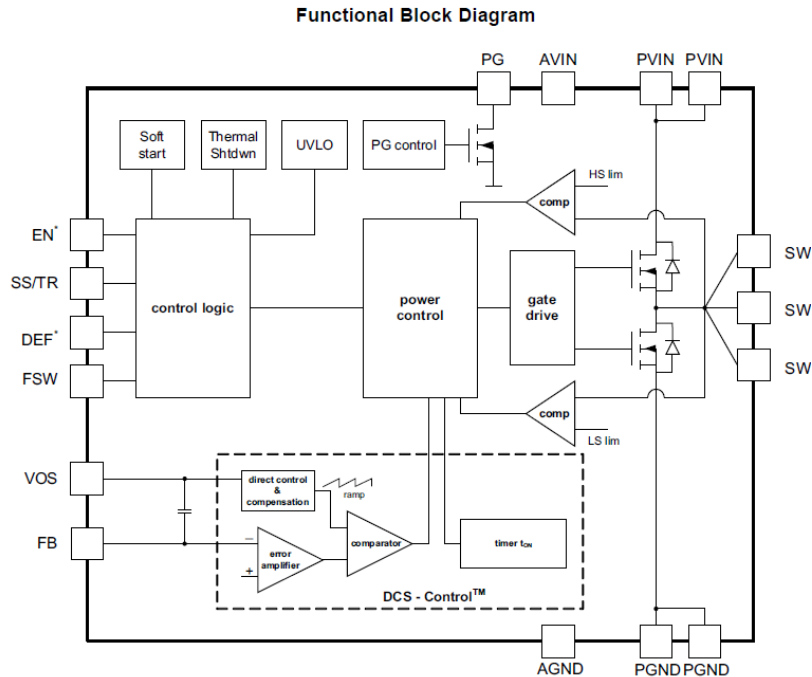

Failure Rate Mission Profile (1)	Per 10 ⁹ Hours (FIT)
Total FIT Rate	11
Die FIT Rate	4
Package FIT Rate	7

Failure Modes	Failure Mode Distribution (%)
SW no output	35%
SW output not in specification – voltage or timing	45%
SW power HS or LS FET stuck on	10%
PG false trip, fails to trip	5%
Short circuit any two pins	5%

(1) Failure Rate, Mission Profile and Failure Mode Distribution

The failure rate and mission profile information comes from the Reliability data handbook IEC TR 62380 using the reliability modeling for Integrated circuits.

Mission Profile Automotive Control IEC TR 62380

Power dissipation 400mW

Climate type: World-wide Table 8 IEC TR 62380

Package factor lambda 3 Table 17b IEC TR 62380

Substrate Material: FR4

EOS FIT rate assumed = 0

The failure mode distribution estimation comes from the combination of common failure modes listed in standards such as IEC 61508 and ISO 26262, the ratio of sub-circuit function size and complexity and from best engineering judgment. The failure rates listed reflect random failure events and do not include failures due to misuse or over stress.

TPS6215xA-Q1 are catalog product and not compliant to ISO-26262 standards.