

# 具有 AB 类输出的 LMT87 2.7V、SC70/TO-92/TO-92S 模拟温度传感器

## 1 特性

- LMT87LPG (TO-92S 封装) 具有快速热时间常量, 典型值为 10s (气流速度为 1.2m/s)
- 非常精确: 典型值  $\pm 0.4^{\circ}\text{C}$
- 2.7V 低压运行
- $-13.6\text{mV}/^{\circ}\text{C}$  的平均传感器增益
- $5.4\mu\text{A}$  低静态电流
- 宽温度范围:  $-50^{\circ}\text{C}$  至  $150^{\circ}\text{C}$
- 输出受到短路保护
- 具有  $\pm 50\mu\text{A}$  驱动能力的推挽输出
- 封装尺寸兼容符合行业标准的 LM20/19 和 LM35 温度传感器
- 具有成本优势的热敏电阻替代产品

## 2 应用

- 汽车
- 信息娱乐系统与仪表组
- 动力传动系统
- 烟雾和热量探测器
- 无人机
- 电器

## 3 说明

LMT87 器件是一款精密 CMOS 温度传感器, 其典型精度为  $\pm 0.4^{\circ}\text{C}$  (最大值为  $\pm 2.7^{\circ}\text{C}$ ), 且线性模拟输出电压与温度成反比关系。2.7V 工作电源电压、 $5.4\mu\text{A}$  静态电流和 0.7ms 开通时间可实现有效的功率循环架构, 以最大限度地降低无人机和传感器节点等电池供电应用的功耗。LMT87LPG 穿孔 TO-92S 封装快速热时间常量支持非板载时间温度敏感型应用, 例如烟雾和热量探测器。得益于宽工作范围内的精度和其他特性, 使得 LMT87 成为热敏电阻的优质替代产品。


对于具有不同平均传感器增益和类似精度的器件, 请参阅 [类似替代器件](#) 了解 LMT8x 系列中的替代器件。

器件信息<sup>(1)</sup>

| 器件型号  | 封装         | 封装尺寸 (标称值)      |
|-------|------------|-----------------|
| LMT87 | SOT (5)    | 2.00mm × 1.25mm |
|       | TO-92 (3)  | 4.30mm × 3.50mm |
|       | TO-92S (3) | 4.00mm × 3.15mm |


(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

热时间常量

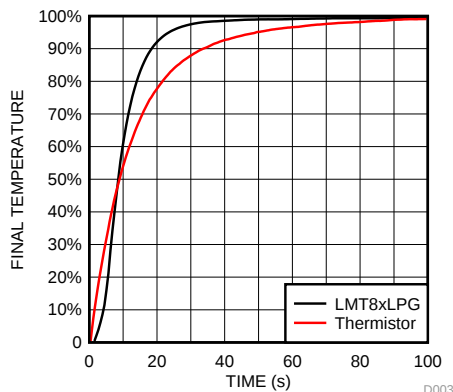

\* 快速热响应 NTC

输出电压与温度间的关系

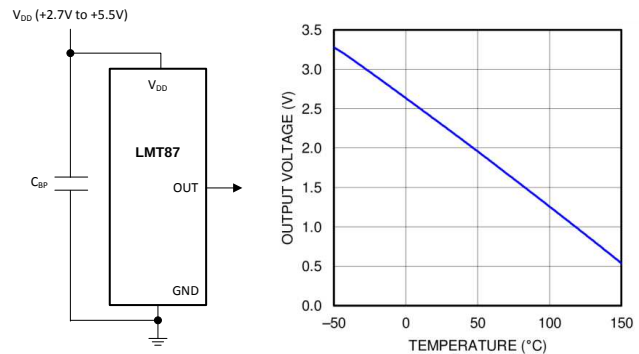

Copyright © 2016, Texas Instruments Incorporated



## 目录

|     |                                              |   |      |                                             |    |
|-----|----------------------------------------------|---|------|---------------------------------------------|----|
| 1   | 特性 .....                                     | 1 | 8.3  | Feature Description .....                   | 9  |
| 2   | 应用 .....                                     | 1 | 8.4  | Device Functional Modes .....               | 11 |
| 3   | 说明 .....                                     | 1 | 9    | <b>Application and Implementation</b> ..... | 13 |
| 4   | 修订历史记录 .....                                 | 2 | 9.1  | Application Information .....               | 13 |
| 5   | <b>Device Comparison Tables</b> .....        | 3 | 9.2  | Typical Applications .....                  | 13 |
| 6   | <b>Pin Configuration and Functions</b> ..... | 4 | 10   | <b>Power Supply Recommendations</b> .....   | 14 |
| 7   | <b>Specifications</b> .....                  | 5 | 11   | <b>Layout</b> .....                         | 15 |
| 7.1 | Absolute Maximum Ratings .....               | 5 | 11.1 | Layout Guidelines .....                     | 15 |
| 7.2 | ESD Ratings .....                            | 5 | 11.2 | Layout Example .....                        | 15 |
| 7.3 | Recommended Operating Conditions .....       | 5 | 12   | <b>器件和文档支持</b> .....                        | 16 |
| 7.4 | Thermal Information .....                    | 5 | 12.1 | 接收文档更新通知 .....                              | 16 |
| 7.5 | Accuracy Characteristics .....               | 6 | 12.2 | 社区资源 .....                                  | 16 |
| 7.6 | Electrical Characteristics .....             | 6 | 12.3 | 商标 .....                                    | 16 |
| 7.7 | Typical Characteristics .....                | 7 | 12.4 | 静电放电警告 .....                                | 16 |
| 8   | <b>Detailed Description</b> .....            | 9 | 12.5 | Glossary .....                              | 16 |
| 8.1 | Overview .....                               | 9 | 13   | <b>机械、封装和可订购信息</b> .....                    | 16 |
| 8.2 | Functional Block Diagram .....               | 9 |      |                                             |    |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| Changes from Revision D (June 2017) to Revision E              | Page |
|----------------------------------------------------------------|------|
| • 将汽车器件移到了单独的数据表 (SNIS202) .....                               | 1    |
| • Changed TO-92 GND pin number from: 1 to: 3 .....             | 4    |
| • Changed TO-92 V <sub>DD</sub> pin number from: 3 to: 1 ..... | 4    |

| Changes from Revision C (October 2015) to Revision D                      | Page |
|---------------------------------------------------------------------------|------|
| • 将数据表文本更新为最新的文档和翻译标准 .....                                               | 1    |
| • 将 AEC-Q100 汽车标准项目符号添加到了 特性 .....                                        | 1    |
| • 添加了时间常量图 .....                                                          | 1    |
| • 将磁盘驱动器、游戏、无线收发器和手机从“应用”中进行了删除 .....                                     | 1    |
| • Added LPG (TO-92S) package .....                                        | 4    |
| • Added <a href="#">Figure 10</a> to <i>Typical Characteristics</i> ..... | 7    |

| Changes from Revision B (May 2014) to Revision C                                                                | Page |
|-----------------------------------------------------------------------------------------------------------------|------|
| • 已删除 所有涉及 TO-126 封装的内容 .....                                                                                   | 1    |
| • Added TO-92 LPM pin configuration graphic .....                                                               | 4    |
| • Changed Handling Ratings to ESD Ratings and moved Storage Temperature to Absolute Maximum Ratings table ..... | 5    |
| • Changed KV to V .....                                                                                         | 5    |
| • Added layout recommendation for TO-92 LP and LPM packages .....                                               | 15   |

| Changes from Revision A (June 2013) to Revision B                                                     | Page |
|-------------------------------------------------------------------------------------------------------|------|
| • 已添加 数据表流程和布局，以符合 TI 新标准。添加了以下部分：应用和实施；电源建议；布局；器件和文档支持；机械、封装和可订购信息 .....                             | 1    |
| • 已添加 TO-92 和 TO-126 封装信息。 .....                                                                      | 1    |
| • Changed from 450°C/W to 275 °C/W. New specification is derived using TI 's latest methodology. .... | 5    |

- Deleted Note: The input current is leakage only and is highest at high temperature. It is typically only 0.001  $\mu\text{A}$ . The 1  $\mu\text{A}$  limit is solely based on a testing limitation and does not reflect the actual performance of the part..... 6

## 5 Device Comparison Tables

**Table 1. Available Device Packages**

| ORDER NUMBER <sup>(1)</sup> | PACKAGE                              | PIN | BODY SIZE (NOM)          | MOUNTING TYPE                |
|-----------------------------|--------------------------------------|-----|--------------------------|------------------------------|
| LMT87DCK                    | SOT (AKA <sup>(2)</sup> : SC70, DCK) | 5   | 2.00 mm $\times$ 1.25 mm | Surface Mount                |
| LMT87LP                     | TO-92 (AKA <sup>(2)</sup> : LP)      | 3   | 4.30 mm $\times$ 3.50 mm | Through-hole; straight leads |
| LMT87LPG                    | TO-92S (AKA <sup>(2)</sup> : LPG)    | 3   | 4.00 mm $\times$ 3.15 mm | Through-hole; straight leads |
| LMT87LPM                    | TO-92 (AKA <sup>(2)</sup> : LPM)     | 3   | 4.30 mm $\times$ 3.50 mm | Through-hole; formed leads   |
| LMT87DCK-Q1                 | SOT (AKA <sup>(2)</sup> : SC70, DCK) | 5   | 2.00 mm $\times$ 1.25 mm | Surface Mount                |

(1) For all available packages and complete order numbers, see the Package Option addendum at the end of the data sheet.

(2) AKA = Also Known As

**Table 2. Comparable Alternative Devices**


| DEVICE NAME | AVERAGE OUTPUT SENSOR GAIN   | POWER SUPPLY RANGE |
|-------------|------------------------------|--------------------|
| LMT84       | –5.5 mV/ $^{\circ}\text{C}$  | 1.5 V to 5.5 V     |
| LMT85       | –8.2 mV/ $^{\circ}\text{C}$  | 1.8 V to 5.5 V     |
| LMT86       | –10.9 mV/ $^{\circ}\text{C}$ | 2.2 V to 5.5 V     |
| LMT87       | –13.6 mV/ $^{\circ}\text{C}$ | 2.7 V to 5.5 V     |

# LMT87


ZHCSCH2E – JANUARY 2014 – REVISED OCTOBER 2017

www.ti.com.cn

## 6 Pin Configuration and Functions

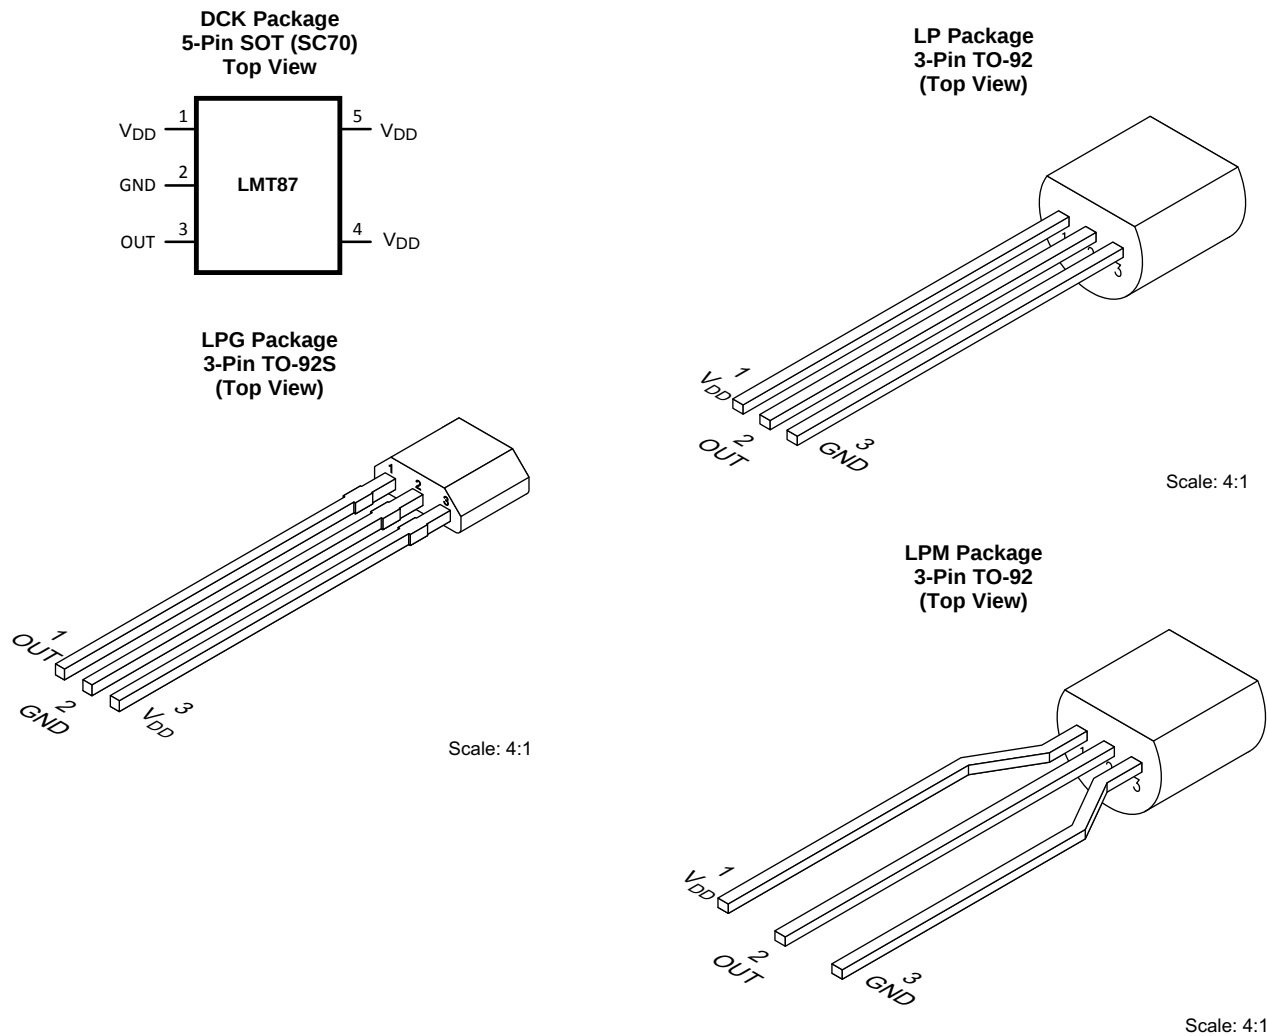

### Pin Functions

| NAME            | PIN              |       |        | TYPE          | DESCRIPTION                                                                          |                                                                 |
|-----------------|------------------|-------|--------|---------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------|
|                 | SOT (SC70)       | TO-92 | TO-92S |               | EQUIVALENT CIRCUIT                                                                   | FUNCTION                                                        |
| GND             | 2 <sup>(1)</sup> | 3     | 2      | Ground        | N/A                                                                                  | Power Supply Ground                                             |
| OUT             | 3                | 2     | 1      | Analog Output |  | Outputs a voltage that is inversely proportional to temperature |
| V <sub>DD</sub> | 1, 4, 5          | 1     | 3      | Power         | N/A                                                                                  | Positive Supply Voltage                                         |

(1) Direct connection to the back side of the die

## 7 Specifications

### 7.1 Absolute Maximum Ratings

See <sup>(1)(2)</sup>

|                                                   | MIN  | MAX                     | UNIT |
|---------------------------------------------------|------|-------------------------|------|
| Supply voltage                                    | −0.3 | 6                       | V    |
| Voltage at output pin                             | −0.3 | (V <sub>DD</sub> + 0.5) | V    |
| Output current                                    | −7   | 7                       | mA   |
| Input current at any pin <sup>(3)</sup>           | −5   | 5                       | mA   |
| Maximum junction temperature (T <sub>JMAX</sub> ) |      | 150                     | °C   |
| Storage temperature T <sub>stg</sub>              | −65  | 150                     | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) *Soldering process must comply with Reflow Temperature Profile specifications. Refer to [www.ti.com/packaging](http://www.ti.com/packaging).*
- (3) When the input voltage (V<sub>I</sub>) at any pin exceeds power supplies (V<sub>I</sub> < GND or V<sub>I</sub> > V), the current at that pin should be limited to 5 mA.

### 7.2 ESD Ratings

|                                            | VALUE                                                                          | UNIT  |
|--------------------------------------------|--------------------------------------------------------------------------------|-------|
| LMT87LP in TO-92 package                   |                                                                                |       |
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)(2)</sup>           | ±2500 |
|                                            | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(3)</sup> | ±1000 |
| LMT87DCK in SC70 package                   |                                                                                |       |
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per JESD22-A114 <sup>(2)</sup>                         | ±2500 |
|                                            | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(3)</sup> | ±1000 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) The human-body model is a 100-pF capacitor discharged through a 1.5-kΩ resistor into each pin.
- (3) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

|                                   | MIN                                                  | MAX | UNIT |
|-----------------------------------|------------------------------------------------------|-----|------|
| Specified temperature             | T <sub>MIN</sub> ≤ T <sub>A</sub> ≤ T <sub>MAX</sub> |     | °C   |
|                                   | −50 ≤ T <sub>A</sub> ≤ 150                           |     | °C   |
| Supply voltage (V <sub>DD</sub> ) | 2.7                                                  | 5.5 | V    |

### 7.4 Thermal Information<sup>(1)</sup>

| THERMAL METRIC <sup>(2)</sup> |                                                          | LMT87          | LMT87LP        | LMT87LPG     | UNIT |
|-------------------------------|----------------------------------------------------------|----------------|----------------|--------------|------|
|                               |                                                          | DCK (SOT/SC70) | LP/LPM (TO-92) | LPG (TO-92S) |      |
|                               |                                                          | 5 PINS         | 3 PINS         | 3 PINS       |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance <sup>(3)(4)</sup> | 275            | 167            | 130.4        | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance                | 84             | 90             | 64.2         | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance                     | 56             | 146            | 106.2        | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter               | 1.2            | 35             | 14.6         | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter             | 55             | 146            | 106.2        | °C/W |

- (1) For information on self-heating and thermal response time see section [Mounting and Thermal Conductivity](#).
- (2) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report.
- (3) The junction to ambient thermal resistance (R<sub>θJA</sub>) under natural convection is obtained in a simulation on a JEDEC-standard, High-K board as specified in JESD51-7, in an environment described in JESD51-2. Exposed pad packages assume that thermal vias are included in the PCB, per JESD 51-5.
- (4) Changes in output due to self-heating can be computed by multiplying the internal dissipation by the thermal resistance.

## 7.5 Accuracy Characteristics

These limits do not include DC load regulation. These stated accuracy limits are with reference to the values in [Table 3](#).

| PARAMETER                           | CONDITIONS                                             | MIN <sup>(1)</sup> | TYP  | MAX <sup>(1)</sup> | UNIT |
|-------------------------------------|--------------------------------------------------------|--------------------|------|--------------------|------|
| Temperature accuracy <sup>(2)</sup> | 70°C to 150°C; $V_{DD} = 3.0\text{ V to }5.5\text{ V}$ | –2.7               | ±0.4 | 2.7                | °C   |
|                                     | 20°C to 40°C; $V_{DD} = 2.7\text{ V to }5.5\text{ V}$  |                    | ±0.6 |                    | °C   |
|                                     | 20°C to 40°C; $V_{DD} = 3.4\text{ V to }5.5\text{ V}$  |                    | ±0.3 |                    | °C   |
|                                     | 0°C; $V_{DD} = 3.0\text{ V to }5.5\text{ V}$           | –2.7               | ±0.6 | 2.7                | °C   |
|                                     | 0°C; $V_{DD} = 3.6\text{ V to }5.5\text{ V}$           |                    | ±0.3 |                    | °C   |
|                                     | –50°C; $V_{DD} = 3.6\text{ V to }5.5\text{ V}$         | –2.7               | ±0.6 | 2.7                | °C   |
|                                     | –50°C; $V_{DD} = 4.2\text{ V to }5.5\text{ V}$         |                    | ±0.3 |                    | °C   |

(1) Limits are specific to TI's AOQL (Average Outgoing Quality Level).

(2) Accuracy is defined as the error between the measured and reference output voltages, tabulated in the Transfer Table at the specified conditions of supply gain setting, voltage, and temperature (expressed in °C). Accuracy limits include line regulation within the specified conditions. Accuracy limits do not include load regulation; they assume no DC load.

## 7.6 Electrical Characteristics

Unless otherwise noted, these specifications apply for  $+V_{DD} = 2.7\text{ V to }5.5\text{ V}$ . MIN and MAX limits apply for  $T_A = T_J = T_{MIN}$  to  $T_{MAX}$ ; typical limits apply for  $T_A = T_J = 25^\circ\text{C}$ .

| PARAMETER                                    | TEST CONDITIONS                                                                          | MIN <sup>(1)</sup> | TYP <sup>(2)</sup> | MAX <sup>(1)</sup> | UNIT            |
|----------------------------------------------|------------------------------------------------------------------------------------------|--------------------|--------------------|--------------------|-----------------|
| Sensor gain (output transfer function slope) |                                                                                          |                    | –13.6              |                    | mV/°C           |
| Load regulation <sup>(3)</sup>               | Source $\leq 50\text{ }\mu\text{A}$ , $(V_{DD} - V_{OUT}) \geq 200\text{ mV}$            | –1                 | –0.22              |                    | mV              |
|                                              | Sink $\leq 50\text{ }\mu\text{A}$ , $V_{OUT} \geq 200\text{ mV}$                         |                    | 0.26               | 1                  | mV              |
| Line regulation <sup>(4)</sup>               |                                                                                          |                    | 200                |                    | $\mu\text{V/V}$ |
| $I_S$ Supply current                         | $T_A = 30^\circ\text{C to }150^\circ\text{C}$ , $(V_{DD} - V_{OUT}) \geq 100\text{ mV}$  |                    | 5.4                | 8.1                | $\mu\text{A}$   |
|                                              | $T_A = -50^\circ\text{C to }150^\circ\text{C}$ , $(V_{DD} - V_{OUT}) \geq 100\text{ mV}$ |                    | 5.4                | 9                  | $\mu\text{A}$   |
| $C_L$ Output load capacitance                |                                                                                          |                    | 1100               |                    | pF              |
| Power-on time <sup>(5)</sup>                 | $C_L = 0\text{ pF to }1100\text{ pF}$                                                    |                    | 0.7                | 1.9                | ms              |
| Output drive                                 | $T_A = T_J = 25^\circ\text{C}$                                                           | –50                |                    | 50                 | $\mu\text{A}$   |

(1) Limits are specific to TI's AOQL (Average Outgoing Quality Level).

(2) Typical values are at  $T_J = T_A = 25^\circ\text{C}$  and represent most likely parametric norm.

(3) Source currents are flowing out of the LMT87. Sink currents are flowing into the LMT87.

(4) Line regulation (DC) is calculated by subtracting the output voltage at the highest supply voltage from the output voltage at the lowest supply voltage. The typical DC line regulation specification does not include the output voltage shift discussed in [Output Voltage Shift](#).

(5) Specified by design and characterization.

## 7.7 Typical Characteristics

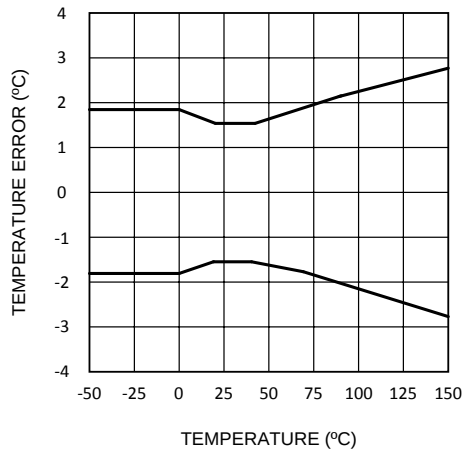


Figure 1. Temperature Error vs Temperature

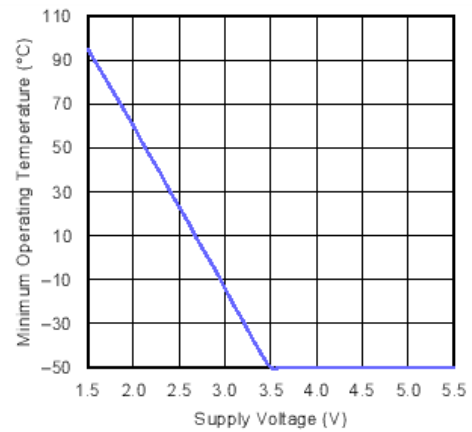


Figure 2. Minimum Operating Temperature vs Supply Voltage

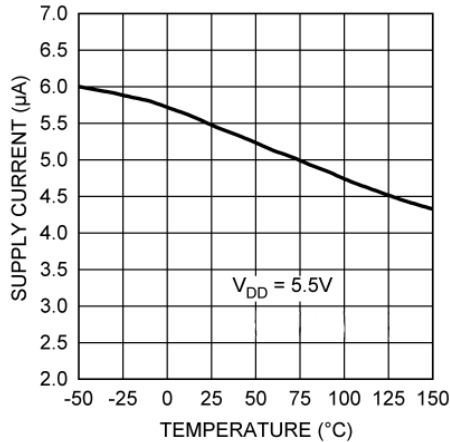


Figure 3. Supply Current vs Temperature

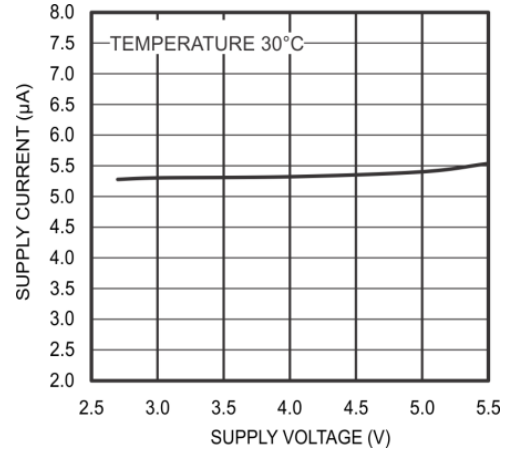


Figure 4. Supply Current vs Supply Voltage

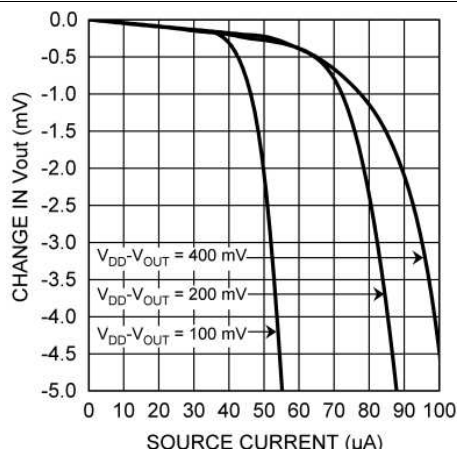


Figure 5. Load Regulation, Sourcing Current

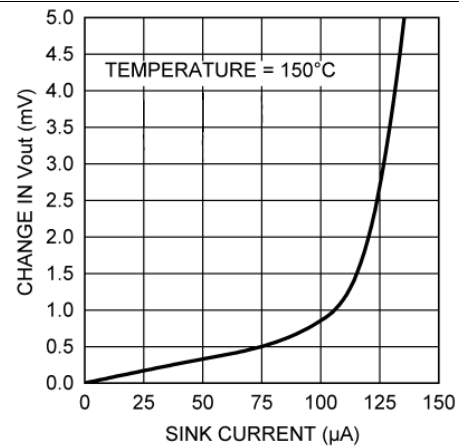


Figure 6. Load Regulation, Sinking Current

## Typical Characteristics (continued)

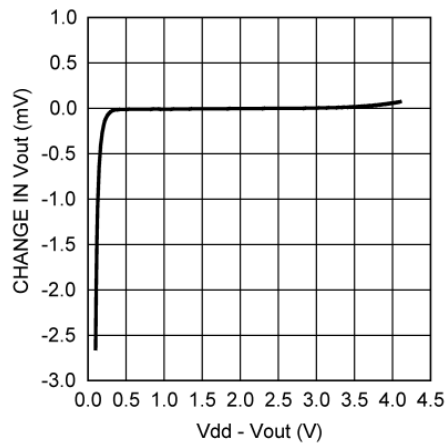


Figure 7. Change in  $V_{OUT}$  vs Overhead Voltage

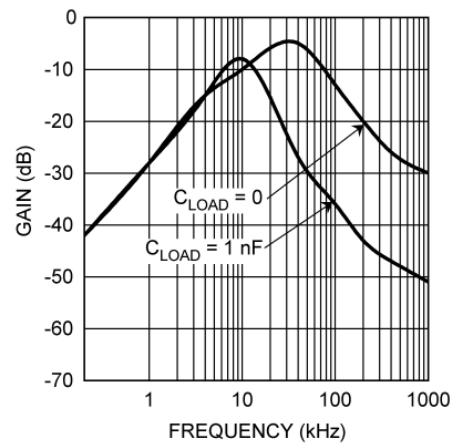


Figure 8. Supply-Noise Gain vs Frequency

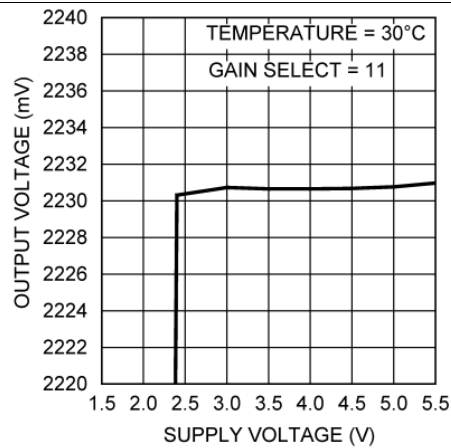


Figure 9. Output Voltage vs Supply Voltage

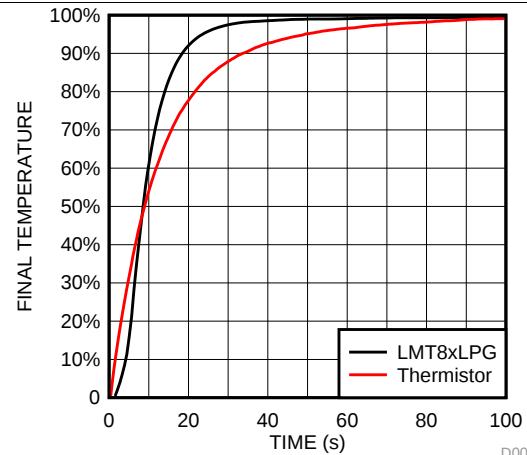


Figure 10. LMT87LPG Thermal Response vs Common Leaded Thermistor With 1.2-m/s Airflow


## 8 Detailed Description

### 8.1 Overview

The LMT87 is an analog output temperature sensor. The temperature-sensing element is comprised of a simple base emitter junction that is forward biased by a current source. The temperature-sensing element is then buffered by an amplifier and provided to the OUT pin. The amplifier has a simple push-pull output stage thus providing a low impedance output source.

### 8.2 Functional Block Diagram

Full-Range Celsius Temperature Sensor (–50°C to +150°C)

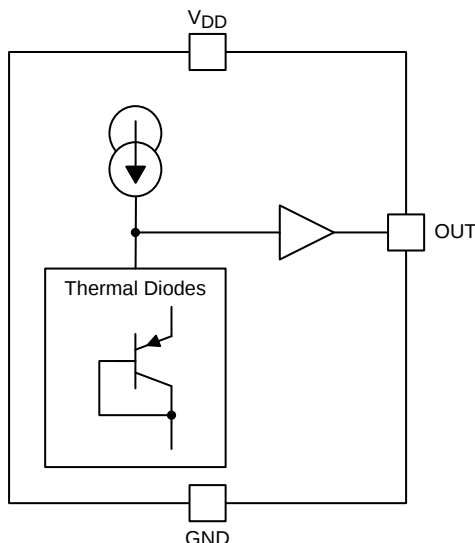

### 8.3 Feature Description

#### 8.3.1 LMT87 Transfer Function

The output voltage of the LMT87, across the complete operating temperature range, is shown in Table 3. This table is the reference from which the LMT87 accuracy specifications (listed in the [Accuracy Characteristics](#) section) are determined. This table can be used, for example, in a host processor look-up table. A file containing this data is available for download at the [LMT87](#) product folder under *Tools and Software Models*.

**Table 3. LMT87 Transfer Table**

| TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) |
|--------------|--------------------------|--------------|--------------------------|--------------|--------------------------|--------------|--------------------------|--------------|--------------------------|
| –50          | 3277                     | –10          | 2767                     | 30           | 2231                     | 70           | 1679                     | 110          | 1115                     |
| –49          | 3266                     | –9           | 2754                     | 31           | 2217                     | 71           | 1665                     | 111          | 1101                     |
| –48          | 3254                     | –8           | 2740                     | 32           | 2204                     | 72           | 1651                     | 112          | 1087                     |
| –47          | 3243                     | –7           | 2727                     | 33           | 2190                     | 73           | 1637                     | 113          | 1073                     |
| –46          | 3232                     | –6           | 2714                     | 34           | 2176                     | 74           | 1623                     | 114          | 1058                     |
| –45          | 3221                     | –5           | 2700                     | 35           | 2163                     | 75           | 1609                     | 115          | 1044                     |
| –44          | 3210                     | –4           | 2687                     | 36           | 2149                     | 76           | 1595                     | 116          | 1030                     |
| –43          | 3199                     | –3           | 2674                     | 37           | 2136                     | 77           | 1581                     | 117          | 1015                     |
| –42          | 3186                     | –2           | 2660                     | 38           | 2122                     | 78           | 1567                     | 118          | 1001                     |
| –41          | 3173                     | –1           | 2647                     | 39           | 2108                     | 79           | 1553                     | 119          | 987                      |
| –40          | 3160                     | 0            | 2633                     | 40           | 2095                     | 80           | 1539                     | 120          | 973                      |
| –39          | 3147                     | 1            | 2620                     | 41           | 2081                     | 81           | 1525                     | 121          | 958                      |
| –38          | 3134                     | 2            | 2607                     | 42           | 2067                     | 82           | 1511                     | 122          | 944                      |

**Feature Description (continued)**
**Table 3. LMT87 Transfer Table (continued)**

| TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) | TEMP<br>(°C) | V <sub>OUT</sub><br>(mV) |
|--------------|--------------------------|--------------|--------------------------|--------------|--------------------------|--------------|--------------------------|--------------|--------------------------|
| –37          | 3121                     | 3            | 2593                     | 43           | 2054                     | 83           | 1497                     | 123          | 929                      |
| –36          | 3108                     | 4            | 2580                     | 44           | 2040                     | 84           | 1483                     | 124          | 915                      |
| –35          | 3095                     | 5            | 2567                     | 45           | 2026                     | 85           | 1469                     | 125          | 901                      |
| –34          | 3082                     | 6            | 2553                     | 46           | 2012                     | 86           | 1455                     | 126          | 886                      |
| –33          | 3069                     | 7            | 2540                     | 47           | 1999                     | 87           | 1441                     | 127          | 872                      |
| –32          | 3056                     | 8            | 2527                     | 48           | 1985                     | 88           | 1427                     | 128          | 858                      |
| –31          | 3043                     | 9            | 2513                     | 49           | 1971                     | 89           | 1413                     | 129          | 843                      |
| –30          | 3030                     | 10           | 2500                     | 50           | 1958                     | 90           | 1399                     | 130          | 829                      |
| –29          | 3017                     | 11           | 2486                     | 51           | 1944                     | 91           | 1385                     | 131          | 814                      |
| –28          | 3004                     | 12           | 2473                     | 52           | 1930                     | 92           | 1371                     | 132          | 800                      |
| –27          | 2991                     | 13           | 2459                     | 53           | 1916                     | 93           | 1356                     | 133          | 786                      |
| –26          | 2978                     | 14           | 2446                     | 54           | 1902                     | 94           | 1342                     | 134          | 771                      |
| –25          | 2965                     | 15           | 2433                     | 55           | 1888                     | 95           | 1328                     | 135          | 757                      |
| –24          | 2952                     | 16           | 2419                     | 56           | 1875                     | 96           | 1314                     | 136          | 742                      |
| –23          | 2938                     | 17           | 2406                     | 57           | 1861                     | 97           | 1300                     | 137          | 728                      |
| –22          | 2925                     | 18           | 2392                     | 58           | 1847                     | 98           | 1286                     | 138          | 713                      |
| –21          | 2912                     | 19           | 2379                     | 59           | 1833                     | 99           | 1272                     | 139          | 699                      |
| –20          | 2899                     | 20           | 2365                     | 60           | 1819                     | 100          | 1257                     | 140          | 684                      |
| –19          | 2886                     | 21           | 2352                     | 61           | 1805                     | 101          | 1243                     | 141          | 670                      |
| –18          | 2873                     | 22           | 2338                     | 62           | 1791                     | 102          | 1229                     | 142          | 655                      |
| –17          | 2859                     | 23           | 2325                     | 63           | 1777                     | 103          | 1215                     | 143          | 640                      |
| –16          | 2846                     | 24           | 2311                     | 64           | 1763                     | 104          | 1201                     | 144          | 626                      |
| –15          | 2833                     | 25           | 2298                     | 65           | 1749                     | 105          | 1186                     | 145          | 611                      |
| –14          | 2820                     | 26           | 2285                     | 66           | 1735                     | 106          | 1172                     | 146          | 597                      |
| –13          | 2807                     | 27           | 2271                     | 67           | 1721                     | 107          | 1158                     | 147          | 582                      |
| –12          | 2793                     | 28           | 2258                     | 68           | 1707                     | 108          | 1144                     | 148          | 568                      |
| –11          | 2780                     | 29           | 2244                     | 69           | 1693                     | 109          | 1130                     | 149          | 553                      |
|              |                          |              |                          |              |                          |              |                          | 150          | 538                      |

Although the LMT87 is very linear, the response does have a slight umbrella parabolic shape. This shape is very accurately reflected in [Table 3](#). The transfer table can be calculated by using the parabolic equation ([Equation 1](#)).

$$V_{TEMP} (mV) = 2230.8mV - \left[ 13.582 \frac{mV}{^{\circ}C} (T - 30^{\circ}C) \right] - \left[ 0.00433 \frac{mV}{^{\circ}C^2} (T - 30^{\circ}C)^2 \right] \quad (1)$$

The parabolic equation is an approximation of the transfer table and the accuracy of the equation degrades slightly at the temperature range extremes. [Equation 1](#) can be solved for T resulting in:

$$T = \frac{13.582 - \sqrt{(-13.582)^2 + 4 \times 0.00433 \times (2230.8 - V_{TEMP}(mV))}}{2 \times (-0.00433)} + 30 \quad (2)$$

For an even less accurate linear transfer function approximation, a line can easily be calculated over the desired temperature range from [Table 3](#) using the two-point equation ([Equation 3](#)):

$$V - V_1 = \left( \frac{V_2 - V_1}{T_2 - T_1} \right) \times (T - T_1)$$

where

- V is in mV,
- T is in °C,
- T<sub>1</sub> and V<sub>1</sub> are the coordinates of the lowest temperature,
- and T<sub>2</sub> and V<sub>2</sub> are the coordinates of the highest temperature.

(3)

For example, if the user wanted to resolve this equation, over a temperature range of 20°C to 50°C, they would proceed as follows:

$$V - 2365 \text{ mV} = \left( \frac{1958 \text{ mV} - 2365 \text{ mV}}{50^\circ\text{C} - 20^\circ\text{C}} \right) \times (T - 20^\circ\text{C}) \quad (4)$$

$$V - 2365 \text{ mV} = (-13.6 \text{ mV} / ^\circ\text{C}) \times (T - 20^\circ\text{C}) \quad (5)$$

$$V = (-13.6 \text{ mV} / ^\circ\text{C}) \times T + 2637 \text{ mV} \quad (6)$$

Using this method of linear approximation, the transfer function can be approximated for one or more temperature ranges of interest.

## 8.4 Device Functional Modes

### 8.4.1 Mounting and Thermal Conductivity

The LMT87 can be applied easily in the same way as other integrated-circuit temperature sensors. It can be glued or cemented to a surface.

To ensure good thermal conductivity, the backside of the LMT87 die is directly attached to the GND pin. The temperatures of the lands and traces to the other leads of the LMT87 will also affect the temperature reading.

Alternatively, the LMT87 can be mounted inside a sealed-end metal tube, and can then be dipped into a bath or screwed into a threaded hole in a tank. As with any IC, the LMT87 and accompanying wiring and circuits must be kept insulated and dry, to avoid leakage and corrosion. This is especially true if the circuit may operate at cold temperatures where condensation can occur. If moisture creates a short circuit from the output to ground or  $V_{DD}$ , the output from the LMT87 will not be correct. Printed-circuit coatings are often used to ensure that moisture cannot corrode the leads or circuit traces.

The thermal resistance junction to ambient ( $R_{\theta JA}$  or  $\theta_{JA}$ ) is the parameter used to calculate the rise of a device junction temperature due to its power dissipation. Use [Equation 7](#) to calculate the rise in the LMT87 die temperature:

$$T_J = T_A + \theta_{JA} [(V_{DD} I_S) + (V_{DD} - V_{OUT}) I_L]$$

where

- $T_A$  is the ambient temperature,
  - $I_S$  is the supply current,
  - $I_L$  is the load current on the output,
  - and  $V_O$  is the output voltage.
- (7)

For example, in an application where  $T_A = 30^\circ\text{C}$ ,  $V_{DD} = 5 \text{ V}$ ,  $I_S = 5.4 \mu\text{A}$ ,  $V_{OUT} = 2231 \text{ mV}$ , and  $I_L = 2 \mu\text{A}$ , the junction temperature would be  $30.014^\circ\text{C}$ , showing a self-heating error of only  $0.014^\circ\text{C}$ . Because the junction temperature of the LMT87 is the actual temperature being measured, take care to minimize the load current that the LMT87 is required to drive. [Thermal Information<sup>\(1\)</sup>](#) shows the thermal resistance of the LMT87.

### 8.4.2 Output Noise Considerations

A push-pull output gives the LMT87 the ability to sink and source significant current. This is beneficial when, for example, driving dynamic loads like an input stage on an analog-to-digital converter (ADC). In these applications the source current is required to quickly charge the input capacitor of the ADC. The LMT87 is ideal for this and other applications which require strong source or sink current.

The LMT87 supply-noise gain (the ratio of the AC signal on  $V_{OUT}$  to the AC signal on  $V_{DD}$ ) was measured during bench tests. The typical attenuation is shown in [Figure 8](#) found in the [Typical Characteristics](#) section. A load capacitor on the output can help to filter noise.


For operation in very noisy environments, some bypass capacitance should be present on the supply within approximately 5 centimeters of the LMT87.

(1) For information on self-heating and thermal response time see section [Mounting and Thermal Conductivity](#).


## Device Functional Modes (continued)

### 8.4.3 Capacitive Loads

The LMT87 handles capacitive loading well. In an extremely noisy environment, or when driving a switched sampling input on an ADC, it may be necessary to add some filtering to minimize noise coupling. Without any precautions, the LMT87 can drive a capacitive load less than or equal to 1100 pF, as shown in [Figure 11](#). For capacitive loads greater than 1100 pF, a series resistor may be required on the output, as shown in [Figure 12](#).

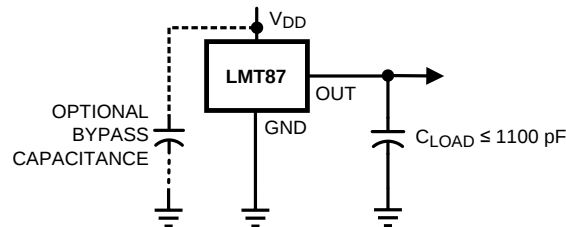

**Figure 11. LMT87 No Decoupling Required for Capacitive Loads Less Than 1100 pF**

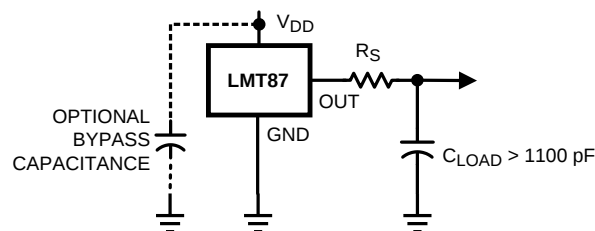

**Figure 12. LMT87 with Series Resistor for Capacitive Loading Greater Than 1100 pF**

**Table 4. Recommended Series Resistor Values**

| $C_{LOAD}$       | MINIMUM $R_S$  |
|------------------|----------------|
| 1.1 nF to 99 nF  | 3 k $\Omega$   |
| 100 nF to 999 nF | 1.5 k $\Omega$ |
| 1 $\mu$ F        | 800 $\Omega$   |

### 8.4.4 Output Voltage Shift

The LMT87 is very linear over temperature and supply voltage range. Due to the intrinsic behavior of an NMOS/PMOS rail-to-rail buffer, a slight shift in the output can occur when the supply voltage is ramped over the operating range of the device. The location of the shift is determined by the relative levels of  $V_{DD}$  and  $V_{OUT}$ . The shift typically occurs when  $V_{DD} - V_{OUT} = 1$  V.

This slight shift (a few millivolts) takes place over a wide change (approximately 200 mV) in  $V_{DD}$  or  $V_{OUT}$ . Because the shift takes place over a wide temperature change of 5°C to 20°C,  $V_{OUT}$  is always monotonic. The accuracy specifications in the [Accuracy Characteristics](#) table already include this possible shift.

## 9 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The LMT87 features make it suitable for many general temperature-sensing applications. It can operate down to 2.7-V supply with 5.4- $\mu$ A power consumption. Package options like the through-hole TO-92 package also allow the LMT87 to be mounted onboard, off-board, to a heat sink, or on multiple unique locations in the same application.

### 9.2 Typical Applications

#### 9.2.1 Connection to ADC

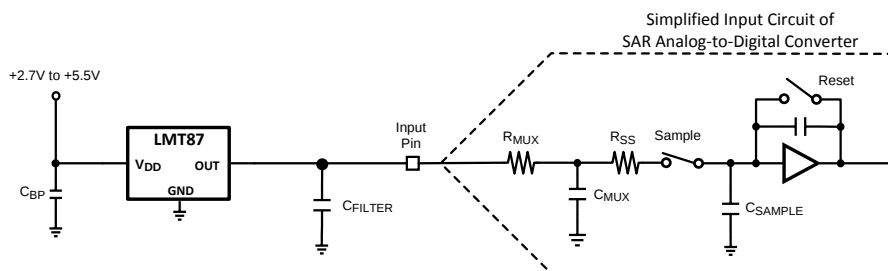

**Figure 13. Suggested Connection to a Sampling Analog-to-Digital Converter Input Stage**


##### 9.2.1.1 Design Requirements

Most CMOS ADCs found in microcontrollers and ASICs have a sampled data comparator input structure. When the ADC charges the sampling cap, it requires instantaneous charge from the output of the analog source such as the LMT87 temperature sensor and many op amps. This requirement is easily accommodated by the addition of a capacitor ( $C_{\text{FILTER}}$ ).

##### 9.2.1.2 Detailed Design Procedure

The size of  $C_{\text{FILTER}}$  depends on the size of the sampling capacitor and the sampling frequency. Because not all ADCs have identical input stages, the charge requirements will vary. This general ADC application is shown as an example only.


##### 9.2.1.3 Application Curve



**Figure 14. Analog Output Transfer Function**

## Typical Applications (continued)

### 9.2.2 Conserving Power Dissipation With Shutdown

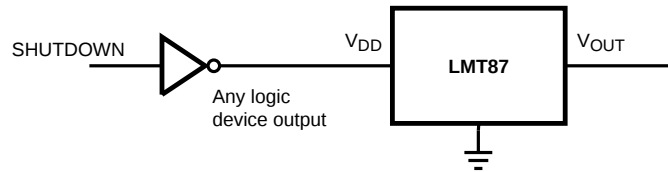

**Figure 15. Simple Shutdown Connection of the LMT87**


#### 9.2.2.1 Design Requirements

Because the power consumption of the LMT87 is less than 9  $\mu\text{A}$ , it can simply be powered directly from any logic gate output and therefore not require a specific shutdown pin. The device can even be powered directly from a microcontroller GPIO. In this way, it can easily be turned off for cases such as battery-powered systems where power savings are critical.

#### 9.2.2.2 Detailed Design Procedure

Simply connect the  $V_{DD}$  pin of the LMT87 directly to the logic shutdown signal from a microcontroller.

#### 9.2.2.3 Application Curves

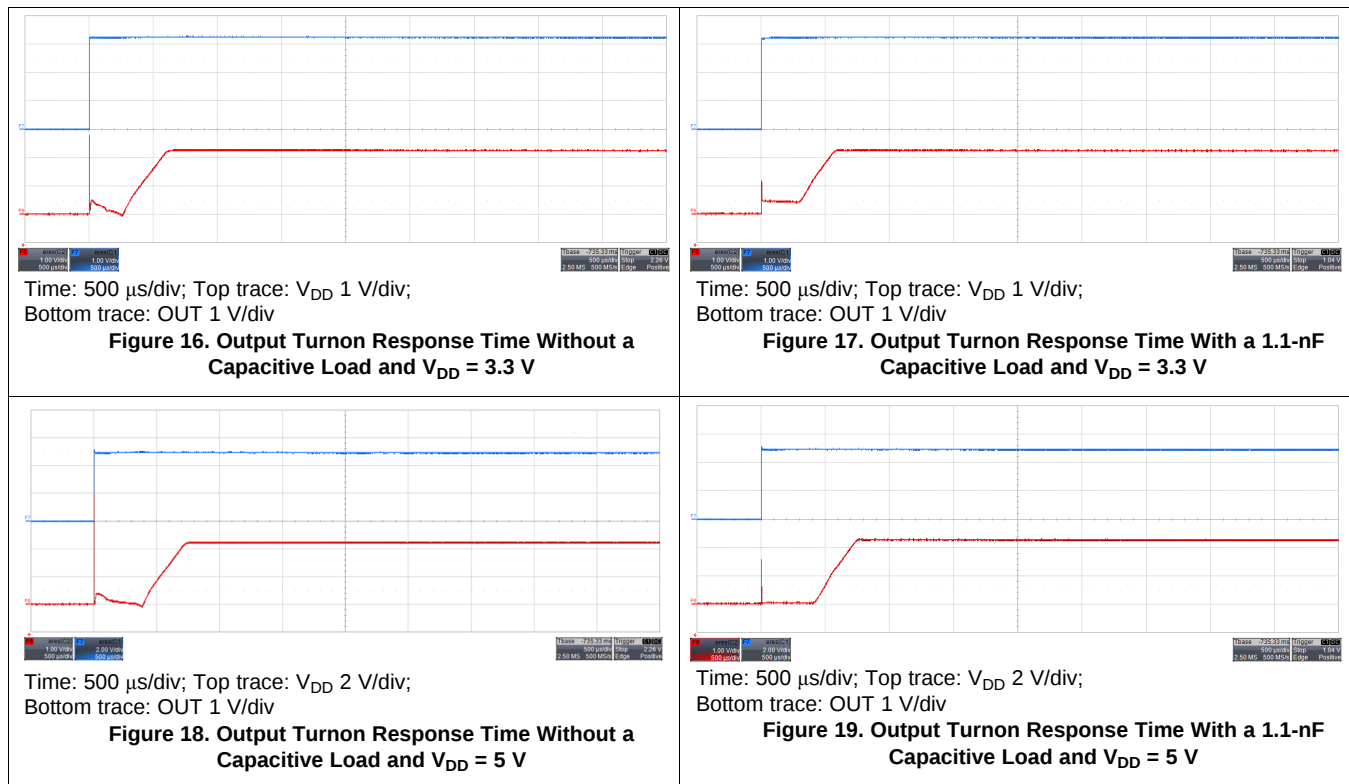

## 10 Power Supply Recommendations

The low supply current and supply range (2.7 V to 5.5 V) of the LMT87 allow the device to easily be powered from many sources. Power supply bypassing is optional and is mainly dependent on the noise on the power supply used. In noisy systems it may be necessary to add bypass capacitors to lower the noise that is coupled to the output of the LMT87.


## 11 Layout

### 11.1 Layout Guidelines


The LMT87 is extremely simple to layout. If a power-supply bypass capacitor is used, it should be connected as shown in the [Layout Example](#).

### 11.2 Layout Example


-  VIA to ground plane
-  VIA to power plane

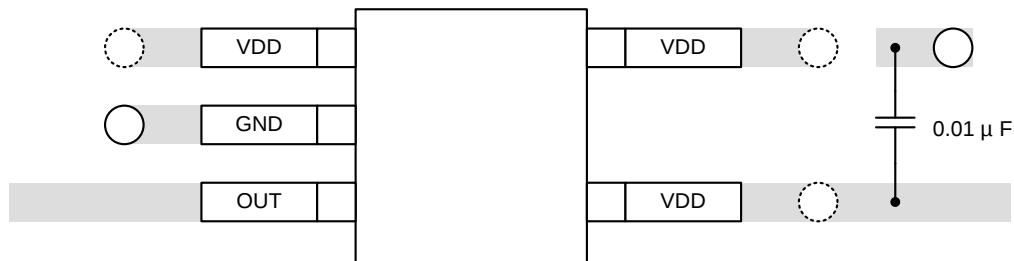

**Figure 20. SC70 Package Recommended Layout**



**Figure 21. TO-92 LP Package Recommended Layout**

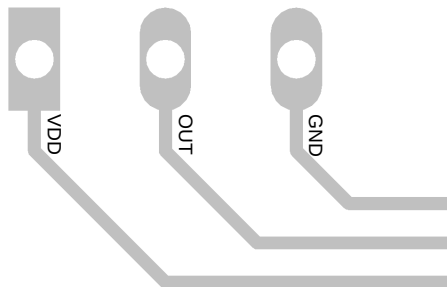

**Figure 22. TO-92 LPM Package Recommended Layout**

## 12 器件和文档支持

### 12.1 接收文档更新通知

要接收文档更新通知，请导航至 TI.com 上的器件产品文件夹。单击右上角的 [通知我](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.2 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [《使用条款》](#)。

**TI E2E™ 在线社区** [TI 的工程师对工程师 \(E2E\) 社区](#)。此社区的创建目的在于促进工程师之间的协作。在 e2e.ti.com 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

**设计支持** [TI 参考设计支持](#) 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

### 12.3 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 12.4 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 12.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。这些数据如有变更，恕不另行通知和修订此文档。如欲获取此数据表的浏览器版本，请参阅左侧的导航。

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| LMT87DCKR        | ACTIVE        | SC70         | DCK                | 5    | 3000           | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -50 to 150   | BUA                     | <a href="#">Samples</a> |
| LMT87LP          | ACTIVE        | TO-92        | LP                 | 3    | 1800           | RoHS & Green    | SN                                   | N / A for Pkg Type   | -50 to 150   | LMT87                   | <a href="#">Samples</a> |
| LMT87LPG         | ACTIVE        | TO-92        | LPG                | 3    | 1000           | RoHS & Green    | SN                                   | N / A for Pkg Type   | -50 to 150   | LMT87                   | <a href="#">Samples</a> |
| LMT87LPGM        | ACTIVE        | TO-92        | LPG                | 3    | 3000           | RoHS & Green    | SN                                   | N / A for Pkg Type   | -50 to 150   | LMT87                   | <a href="#">Samples</a> |
| LMT87LPM         | ACTIVE        | TO-92        | LP                 | 3    | 2000           | RoHS & Green    | SN                                   | N / A for Pkg Type   | -50 to 150   | LMT87                   | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF LMT87 :**

- Automotive : [LMT87-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LMT87DCKR | SC70         | DCK             | 5    | 3000 | 178.0              | 8.4                | 2.25    | 2.45    | 1.2     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| LMT87DCKR | SC70         | DCK             | 5    | 3000 | 208.0       | 191.0      | 35.0        |


LPG0003A



# PACKAGE OUTLINE

TO-92 - 5.05 mm max height

TRANSISTOR OUTLINE

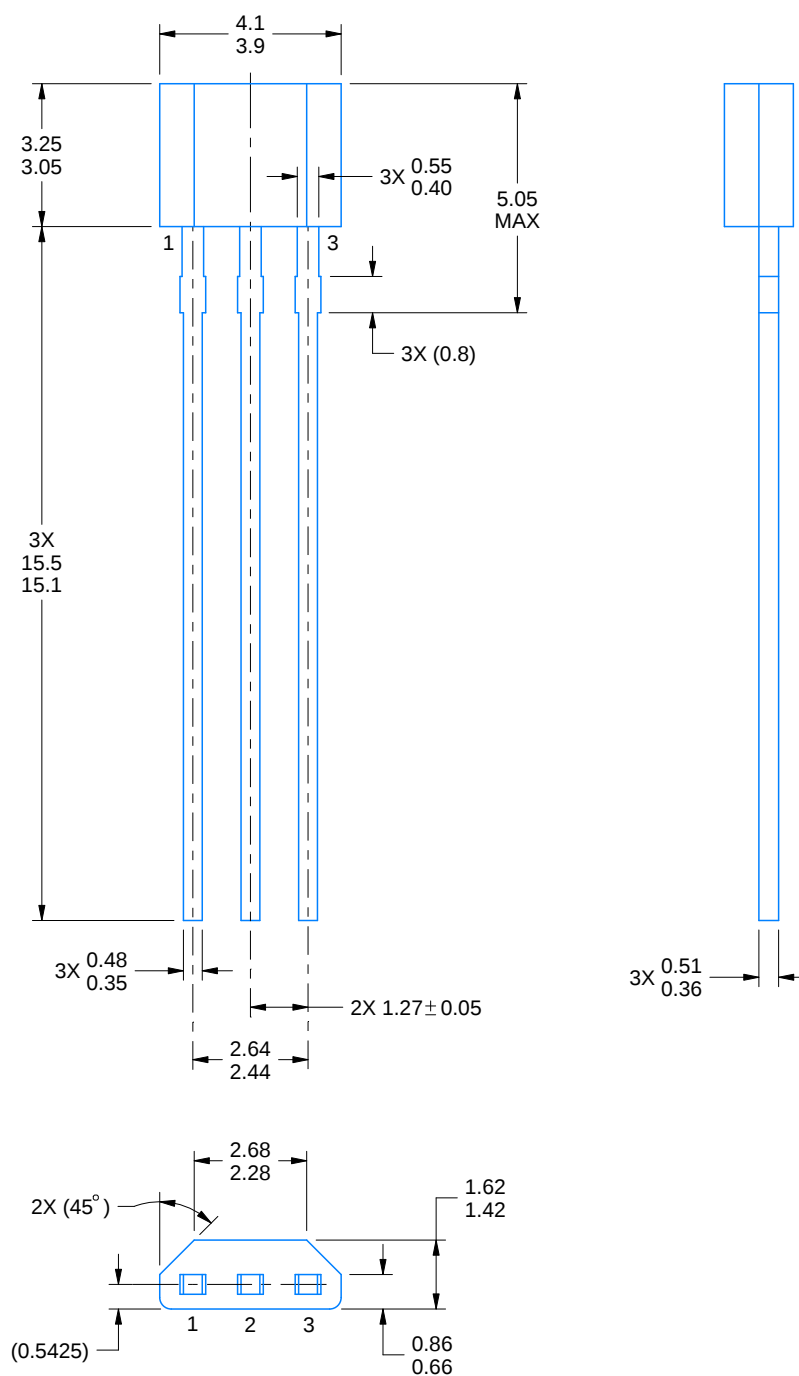

4221343/C 01/2018

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT

LPG0003A

TO-92 - 5.05 mm max height

TRANSISTOR OUTLINE

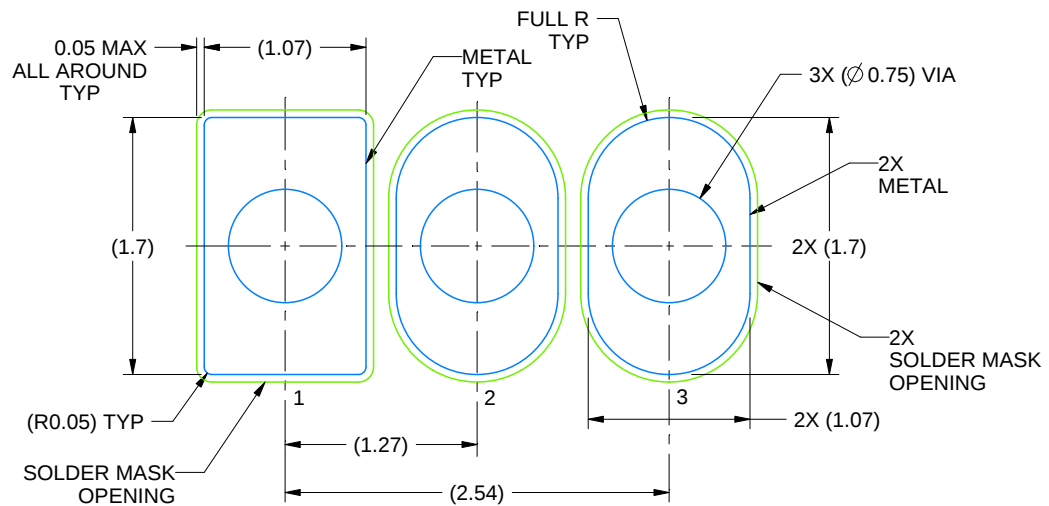

LAND PATTERN EXAMPLE  
NON-SOLDER MASK DEFINED  
SCALE:20X


4221343/C 01/2018

# TAPE SPECIFICATIONS

LPG0003A

TO-92 - 5.05 mm max height

TRANSISTOR OUTLINE

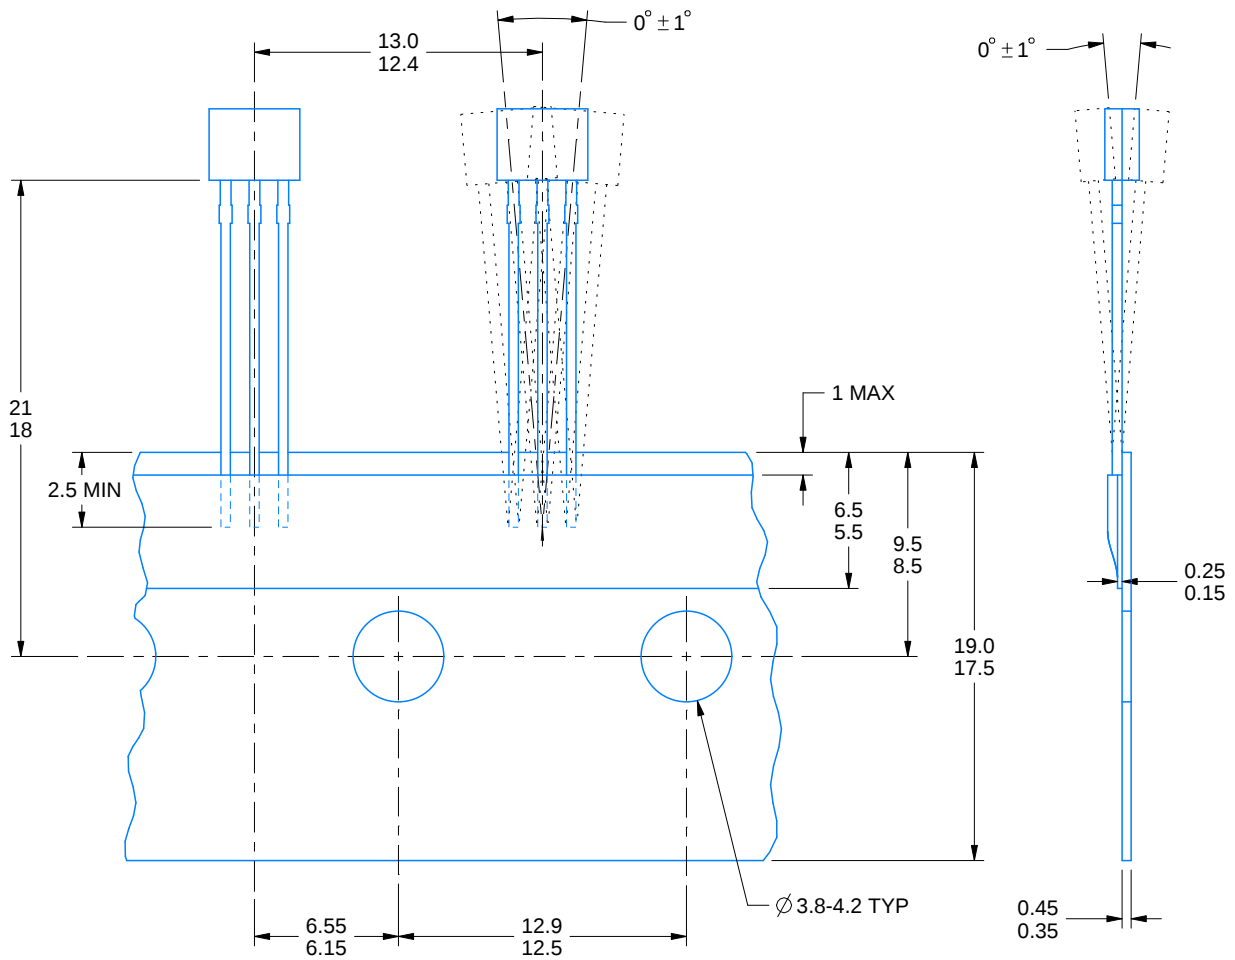


4221343/C 01/2018

**DCK0005A**

## PACKAGE OUTLINE

### SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

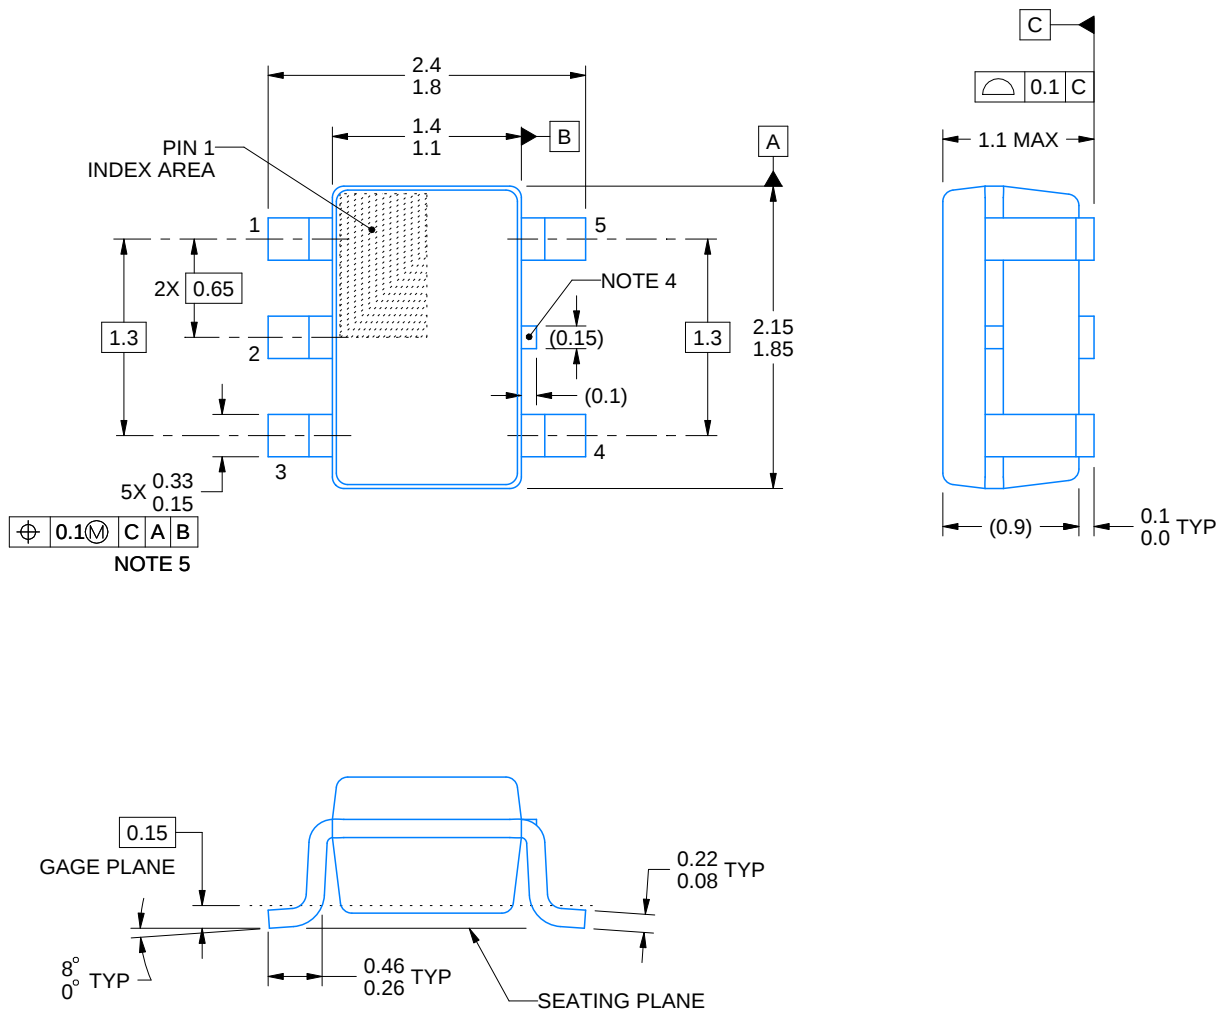

4214834/D 07/2023

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-203.
4. Support pin may differ or may not be present.
5. Lead width does not comply with JEDEC.

# EXAMPLE BOARD LAYOUT


DCK0005A

SOT - 1.1 max height

SMALL OUTLINE TRANSISTOR

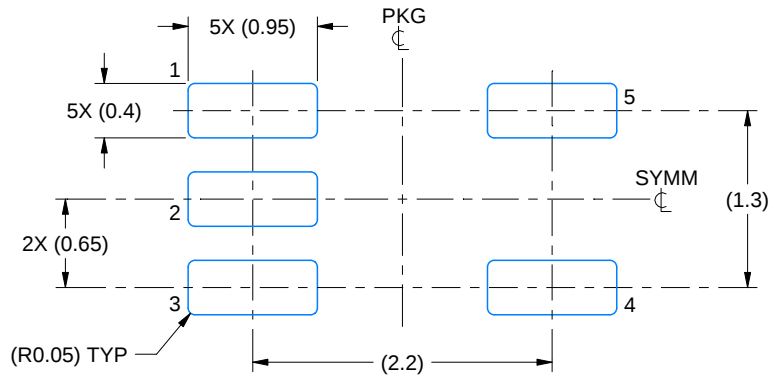

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:18X

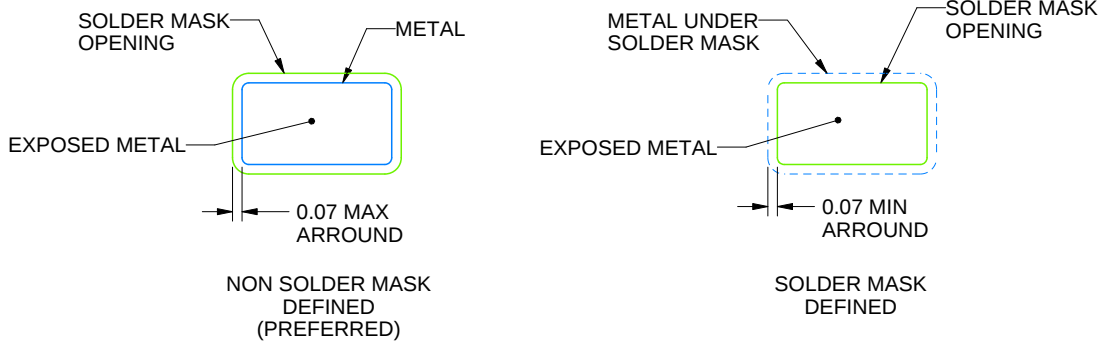


SOLDER MASK DETAILS

4214834/D 07/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

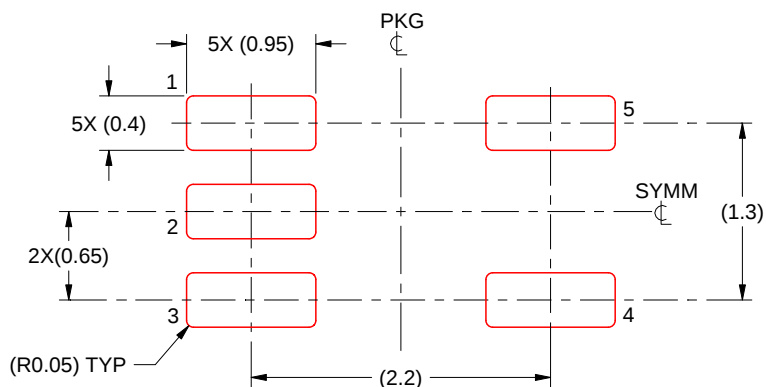

SOLDER PASTE EXAMPLE  
 BASED ON 0.125 THICK STENCIL  
 SCALE:18X

4214834/D 07/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.


LP0003A



# PACKAGE OUTLINE

TO-92 - 5.34 mm max height

TO-92

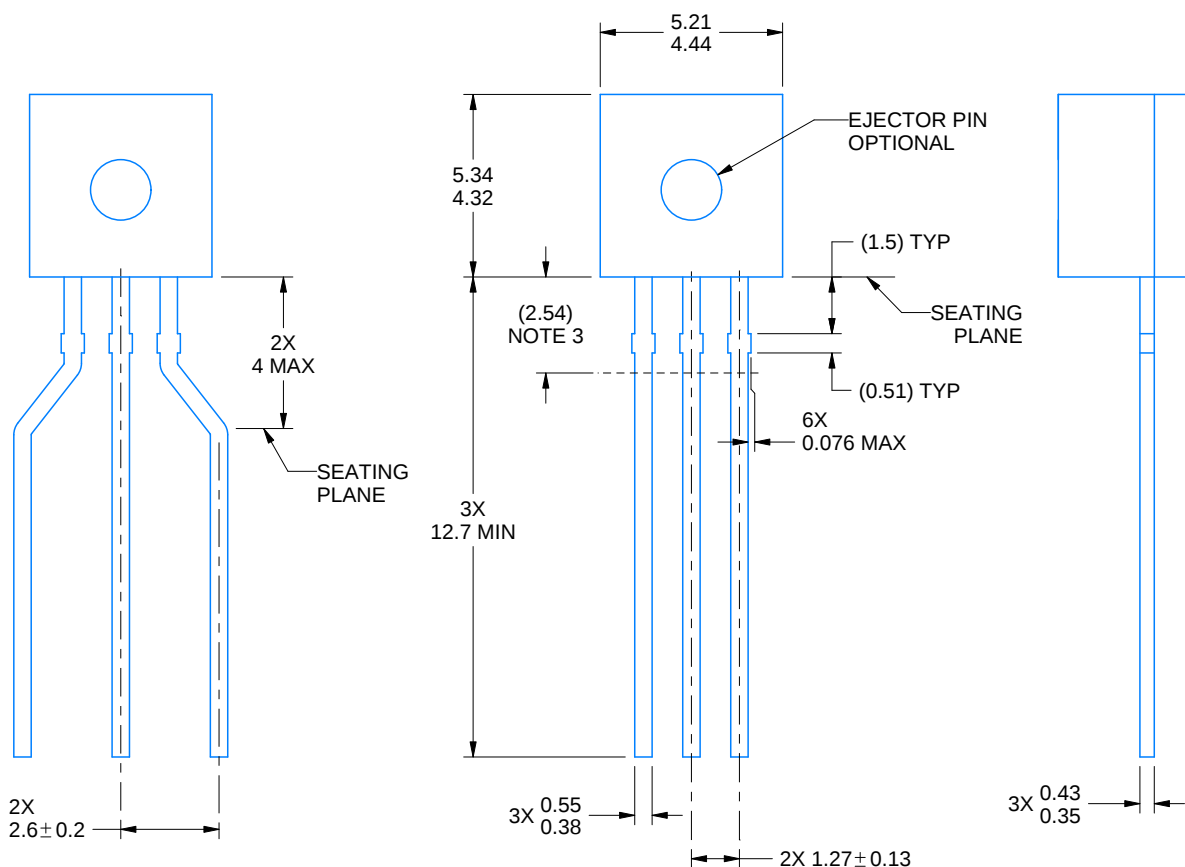

4215214/B 04/2017

## NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Lead dimensions are not controlled within this area.
4. Reference JEDEC TO-226, variation AA.
5. Shipping method:
  - a. Straight lead option available in bulk pack only.
  - b. Formed lead option available in tape and reel or ammo pack.
  - c. Specific products can be offered in limited combinations of shipping medium and lead options.
  - d. Consult product folder for more information on available options.

# EXAMPLE BOARD LAYOUT


LP0003A

TO-92 - 5.34 mm max height

TO-92

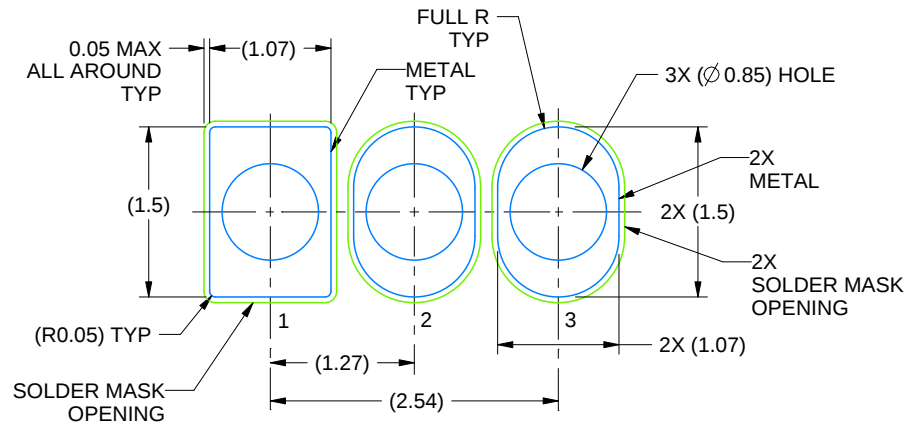

LAND PATTERN EXAMPLE  
STRAIGHT LEAD OPTION  
NON-SOLDER MASK DEFINED  
SCALE:15X

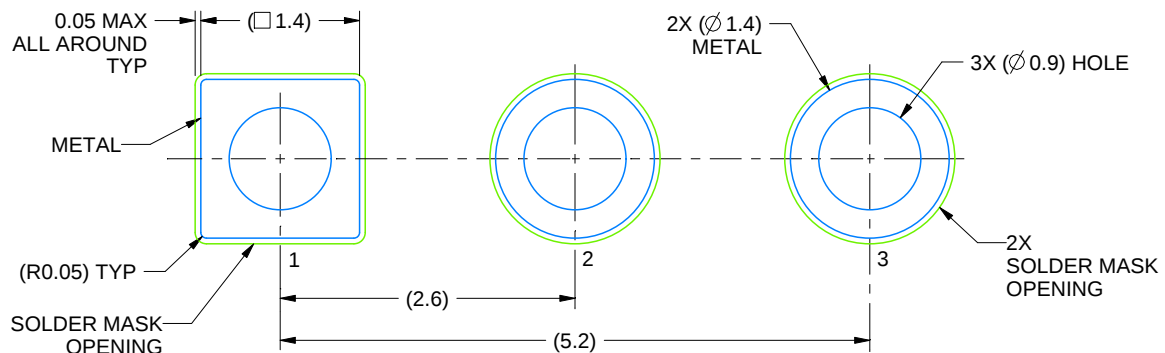


LAND PATTERN EXAMPLE  
FORMED LEAD OPTION  
NON-SOLDER MASK DEFINED  
SCALE:15X

4215214/B 04/2017

**LP0003A**

**TO-92 - 5.34 mm max height**

TO-92

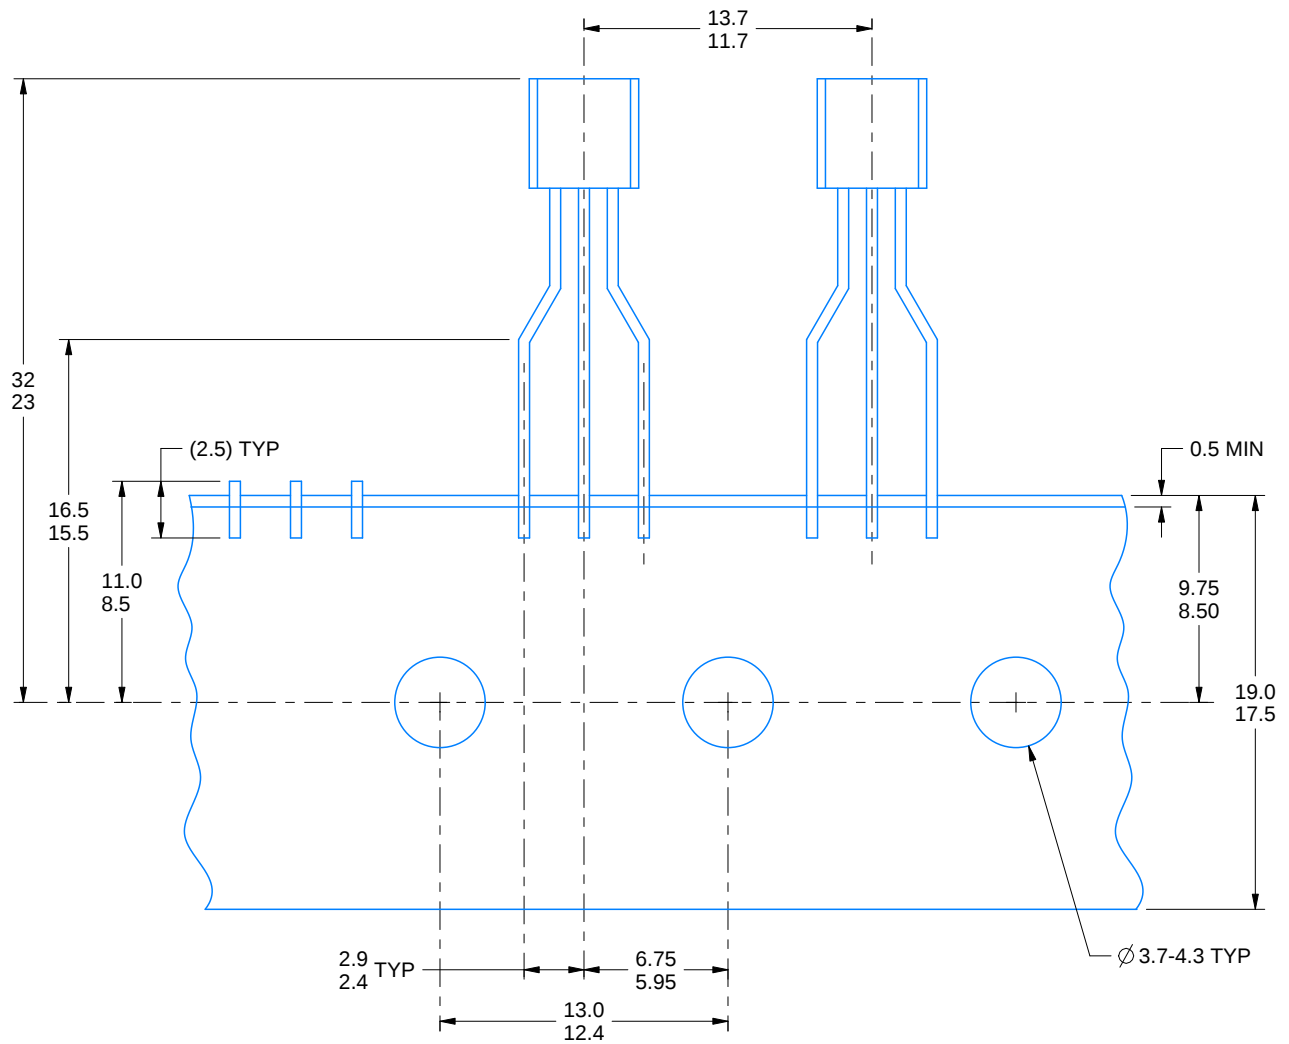

FOR FORMED LEAD OPTION PACKAGE

4215214/B 04/2017

## 重要声明和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2024，德州仪器 (TI) 公司