


## Data Sheet

# Tag-it™ HF Transponder Inlay Rectangle - Miniature

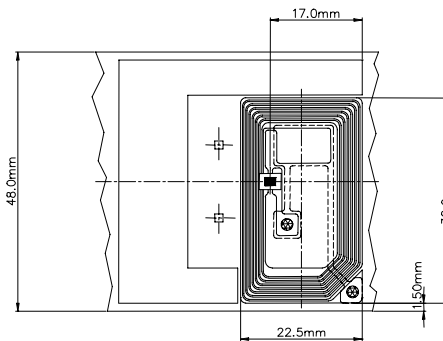

### Specifications:

Part Number	RI-I03-110A
Recommended Operating frequency	13.56 MHz
Passive Resonance Frequency (at +25°C)	14.26 MHz ± 400kHz (includes frequency offset to compensate further integration into PVC; drops down to operating frequency when exposed to activation field strength)
Typical activation field strength read (at +25°C)	112 dBμA/m (preliminary value)
Typical activation field strength write (at +25°C)	116 dBμA/m (preliminary value)
Factory programmed Read Only Number	32 bits
Memory (user programmable)	256 bits organized in 8 x 32-bit blocks
Typical programming cycles (at +25°C)	100,000
Data retention time (at +55°C)	> 10 years
Simultaneous Identification of Tags	Up to 50 tags per second (reader/antenna dependant)
Uplink / downlink data rates	26.7 kBd / 6.2 and 9 kBd
RX modulation	Pulse-width coded, AM 100% modulation
TX frequencies	Manchester encoded, A = $f_c \pm 423.75$ kHz, B = $f_c \pm 484.29$ kHz Low bit: transition A to B. High bit: transition B to A
Antenna size	22.5 mm x 38 mm (~0.89 x ~1.5 in)
Foil width	48 mm ± 0.5 mm (1.89 in ± 0.02 in)
Foil pitch	48 mm +0.1mm/-0.4mm (~1.89 in)
Thickness	Chip: 0.355mm (~0.014 in) Antenna: 0.085mm (~0.0033 in)
Base material	Substrate: PET (Polyethylenetherephtalate) Antenna: Aluminum
Smallest bending radius allowed	18 mm (~0.71 in)
Operating temperature	-25°C to +70°C
Storage temperature (single inlay)	-40°C to +85°C (warpage may occur with increasing temperature)
Storage temperature (on reel)	-40°C to +40°C
Delivery	Single row tape wound on cardboard reel with 500 mm diameter Reel width: approx. 60 mm (~2.36 in); inside 50 mm (~1.97 in) Hub diameter: 76.2 mm (3 in)
Typical quantity per reel	5,000

For more information, contact the sales office or distributor nearest you. This contact information can be found on our web site at: <http://www.ti-rfid.com>

*Texas Instruments reserves the right to change its products and services at any time without notice. TI provides customer assistance in various technical areas, but does not have full access to data concerning the uses and applications of customers products. Therefore, TI assumes no responsibility for customer product design or for infringement of patents and/or the rights of third parties, which may result from assistance provided by TI.*