

Quad Sine-Wave Clock Buffer With LDO

Check for Samples: [CDC3S04](#)

FEATURES

- 1:4 Low-Jitter Clock Buffer
- Single-Ended Sine-Wave Clock Input and Outputs
- Ultralow Phase Noise and Standby Current
- Individual Clock Request Inputs for Each Output
- On-Chip Low-Dropout Output (LDO) for Low-Noise TCXO Supply
- Serial I²C Interface (Compatible With High-Speed Mode, 3.4 Mbit/s)
- 1.8-V Device Power Supply
- Wide Temperature Range, –40°C to 85°C
- ESD Protection: 2 KV HBM, 750 V CDM, and 100 V MM
- Small 20-Pin Chip-Scale Package: 0.4-mm Pitch WCSP (1.6 mm × 2 mm)

APPLICATIONS

- Cellular Phones
- Smart Phones
- Mobile Handsets
- Portable Systems
- Wireless Modems Including GPS, WLAN, W-BT, D-TV, DVB-H, FM Radio, WiMAX, and System Clock

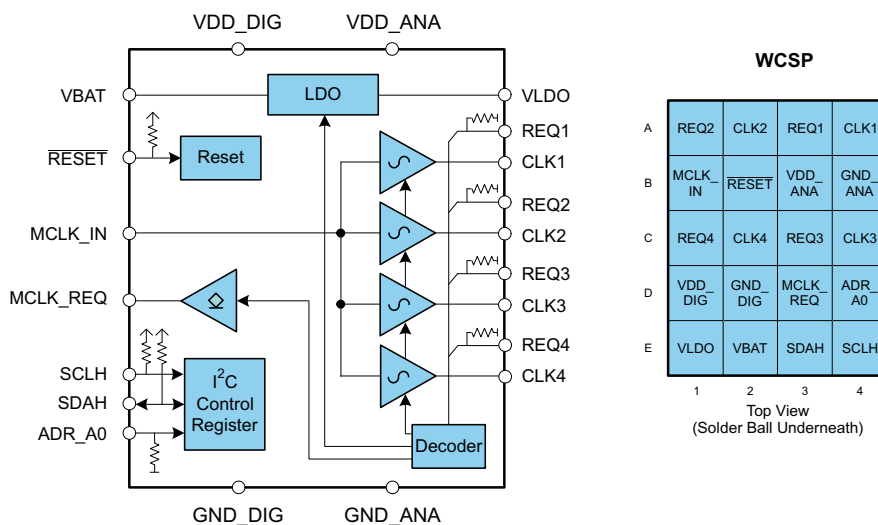
DESCRIPTION

The CDC3S04 is a four-channel low-power low-jitter sine-wave clock buffer. It can be used to buffer a single master clock to multiple peripherals. The four sine-wave outputs (CLK1–CLK4) are designed for minimal channel-to-channel skew and ultralow additive output jitter.

Each output has its own clock request inputs which enables the dedicated clock output. These clock requests are active-high (can also be changed to be active-low via I²C), and an output signal is generated that can be sent back to the master clock to request the clock (MCLK_REQ). MCLK_REQ is an open-source output and supports the wired-OR function (default mode). It needs an external pulldown resistor. MCLK_REQ can be changed to wired-AND or push-pull functionality via I²C.

The CDC3S04 also provides an I²C interface (Hs-mode) that can be used to enable or disable the outputs, select the polarity of the REQ inputs, and allow control of internal decoding.

The CDC3S04 features an on-chip high-performance LDO that accepts voltages from 2.3 V to 5.5 V and outputs a 1.8-V supply. This 1.8-V supply can be used to power an external 1.8-V TCXO. It can be enabled or disabled for power saving at the TCXO.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

CDC3S04

SCAS883C –OCTOBER 2009–REVISED AUGUST 2012

www.ti.com


This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DESCRIPTION (CONTINUED)

A low signal at the **RESET** input switches the outputs CLK1 and CLK4 into the default state. In this configuration, CLK1 and CLK4 are ON (see [Table 1](#)); the remaining device function is not affected. Also, the **RESET** input provides a glitch filter which rejects spikes of typical 300 ns on the **RESET** line to preserve false reset. A complete device reset to the default condition can be initiated by a power-up cycle of V_{DD_DIG}.

The CDC3S04 operates from two 1.8-V supplies. There is a core supply (VDD_DIG/GND_DIG) for the core logic and a low-noise analog supply (VDD_ANA/GND_ANA) for the sine-wave outputs. The CDC3S04 is designed for sequence-less power up. Both supply voltages may be applied in any order.

The CDC3S04 is offered in a 0.4-mm pitch WCSP package (1.6 mm × 2 mm) and is optimized for low standby current (0.5 µA). It is characterized for operation from –40°C to 85°C.

DEVICE INFORMATION

PIN FUNCTIONS

| NAME | BALL NO. | TYPE | FUNCTION |
|--------------|----------|--------------|--|
| ADR_A0 | D4 | Input | Selectable address bit A0 of slave-address register; internal 500-kΩ pulldown resistor |
| CLK1 | A4 | Output | Clock output 1 |
| CLK2 | A2 | Output | Clock output 2 |
| CLK3 | C4 | Output | Clock output 3 |
| CLK4 | C2 | Output | Clock output 4 |
| GND_ANA | B4 | Ground | Ground for sine-wave buffer |
| GND_DIG | D2 | Ground | Ground for core logic |
| MCLK_IN | B1 | Input | Master clock input |
| MCLK_REQ | D3 | Output | Clock request to the master clock source; active-high; open-source output for wired-OR connection (default condition). Can be changed to push-pull output or wired-AND output via I ² C. |
| REQ1 | A3 | Input | Clock request from peripheral 1; internal 500-kΩ pulldown resistor |
| REQ2 | A1 | Input | Clock request from peripheral 2; internal 500-kΩ pulldown resistor |
| REQ3 | C3 | Input | Clock request from peripheral 3; internal 500-kΩ pulldown resistor |
| REQ4 | C1 | Input | Clock request from peripheral 4; internal 500-kΩ pulldown resistor |
| RESET | B2 | Input | Peripheral reset signal provided by application processor. The signal is active-low and switches CLK1 and CLK4 outputs to ON (see Table 1). On-chip LDO is enabled. Internal 1-MΩ pullup resistor and 300-ns (typ) glitch filter. |
| SCLH | E4 | Input | I ² C clock input – Hs-mode. Internal 1-MΩ pullup resistor |
| SDAH | E3 | Input/output | I ² C data input/output – Hs-mode. Internal 1-MΩ pullup resistor |
| VBAT | E2 | Power | Supply pin to internal LDO |
| VDD_ANA | B3 | Power | 1.8-V power supply for sine-wave buffer |
| VDD_DIG | D1 | Power | 1.8-V power supply for core logic. Power up of VDD_DIG resets the whole device to the default condition. |
| VLDO | E1 | Output | 1.8-V supply for external TCXO; LDO is enabled if RESET (default mode) or REQx is active. LDO is not enabled if only VBAT is on. |

FUNCTION SELECTION TABLES

Table 1. Reset and Request (REQx) Conditions for Clock Outputs⁽¹⁾

| RESET ⁽²⁾ | PRIORITY BIT ⁽³⁾ | CLK1 | CLK2 | CLK3 | CLK4 |
|----------------------|-----------------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| 0 | 0 | On | Controlled by REQ2 | Controlled by REQ3 | On |
| | 1 | | Controlled by REQ2INT | Controlled by REQ3INT | |
| 1 | 0 | Controlled by REQ1 | Controlled by REQ2 | Controlled by REQ3 | Controlled by REQ4 |
| | 1 | Controlled by REQ1INT | Controlled by REQ2INT | Controlled by REQ3INT | Controlled by REQ4INT |

- (1) Shaded cells show the default setting after power up.
(2) RESET resets REQ1PRIO/REQ4PRIO and REQ1INT/REQ4INT bits to their default values (CLK1/4 is ON) but does not change the remaining internal SW bits. During RESET, any I²C operation is blocked until RESET is deactivated. A minimum pulse duration of 500 ns must be applied to activate RESET (the internal glitch-filter suppresses spikes of typical 300 ns).
(3) Priority bit defines if the external control pins (HW controlled) or the SW bits (SW controlled) have priority. It can be set in the configuration register, Byte 2, Bits 0–3.

Table 2. Request Signal Condition for Clock Outputs⁽¹⁾

| REQ-Signals ⁽²⁾ | REQx (REQ1/2/3/4) | CLKx (CLK1/2/3/4) | MCLK_REQ | LDO ⁽³⁾ |
|----------------------------|----------------------|---------------------------------|----------------------------|----------------------------|
| Active-low | 0 | Clock | High | On |
| | 1 | Disabled to high | Low (if all REQx are high) | Off (if all REQx are high) |
| Active-high | 0 | Disabled to high ⁽⁴⁾ | Low (if all REQx are low) | Off (if all REQx are low) |
| | 1 | Clock ⁽⁴⁾ | High | On |

- (1) Shaded cells show the default setting after power up.
(2) Polarity of REQ1, REQ2, REQ3, and REQ4 are register-configurable via I²C (see Table 3, Byte 0, Bits 0–3). Default setting is active-high.
(3) The LDO is controlled by an on-chip decoder, but can also be SW controlled (see Table 3, Byte 2, Bits 4–5).
(4) CLK1 and CLK4 are ON after device power up (default condition). CLK2 and CLK3 are controlled by external REQ2 and REQ3, respectively.

POWER GROUPS

| NAME | DESCRIPTION |
|---------|--|
| VBAT | Supply pin for LDO provided by main battery. LDO is not working if only VBAT is on. |
| VLDO | 1.8-V low-drop output voltage for external TCXO. LDO is enabled if VBAT and VDD_DIG are on and REQx or RESET is active (see Table 2). |
| VDD_DIG | 1.8-V power supply for core logic and I ² C logic. VDD_DIG must be supplied for correct device operation. Power up of VDD_DIG resets the whole device to the default condition. |
| VDD_ANA | 1.8-V power supply for sine-wave buffers. For correct sine-wave buffer function, all three power supplies (VBAT, VDD_DIG and VDD_ANA) must be on. But, VDD_ANA can be switched on and off at any time. If off, the sine-wave outputs are switched to high-impedance. |

POWER-UP SEQUENCE

The CDC3S04 is designed for sequence-less power up. VBAT, VDD_DIG, and VDD_ANA may be applied in any order. Recommended power-on sequence is VBAT first, followed by VDD_DIG and VDD_ANA. Recommended power-off sequence is in reverse order.

CDC3S04

SCAS883C –OCTOBER 2009–REVISED AUGUST 2012

www.ti.com

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

| | | VALUE | UNIT |
|--|---|--------------------------------|------|
| V _{DD_ANA} V _{DD_DIG} | Supply voltage range | –0.5 to 2.5 | V |
| V _{BAT} | Battery supply voltage range | –0.5 to 6.5 | V |
| V _I | Input voltage range ⁽²⁾ ⁽³⁾ | –0.5 to V _{DD} + 0.5 | V |
| V _O | Output voltage range ⁽²⁾ ⁽³⁾ | –0.5 to V _{DD} + 0.5 | V |
| V _{LDO} | Output voltage range | –0.5 to V _{BAT} + 0.5 | V |
| | Input current (V _I < 0, V _I > V _{DD}) | ±20 | mA |
| I _O | Continuous output current | ±20 | mA |
| I _{LDO} | Continuous output current | ±20 | mA |
| T _{stg} | Storage temperature range | –65 to 150 | °C |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute–maximum–rated conditions for extended periods may affect device reliability.
- (2) The input and output negative voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- (3) The input V_I and output V_O positive voltages are limited to the absolute maximum rating for V_{DD} = 2.5 V.

THERMAL CHARACTERISTICS for 20-pin WCSP (YFF) ⁽¹⁾

| | PARAMETER | AIRFLOW (lfm) | 20-PIN WCSP | UNIT |
|-----------------|---|------------------|----------------|------|
| T _{JA} | Thermal resistance, junction-to-ambient | 0 | 71 | °C/W |
| | | 200 | 62 | |
| | | 400 | 59 | |
| T _{JC} | Thermal resistance, junction-to- case | – | 17.5 | °C/W |
| T _{JB} | Thermal resistance, junction-to-board | – | 20.5 | °C/W |
| T _J | Maximum junction temperature | – | 125 | °C |

- (1) The package thermal impedance is calculated in accordance with JESD 51 and JEDEC2S2P (high-k board).

RECOMMENDED OPERATING CONDITIONS

| | | MIN | NOM | MAX | UNIT |
|---------------------|--|--------------------------|-----|------|-----------------|
| V _{DD_ANA} | Device supply voltage | 1.65 | 1.8 | 1.95 | V |
| V _{DD_DIG} | Device supply voltage | 1.65 | 1.8 | 1.95 | V |
| V _{IH} | Input voltage ADR_A0, REQx, $\overline{\text{RESET}}$ | 0.65 V _{DD_DIG} | | | V |
| V _{IL} | | 0.35 V _{DD_DIG} | | | V |
| V _{IS} | Sine-wave input voltage – MCLK_IN; ac-coupled amplitude | 0.5 | | 1.2 | V _{PP} |
| C _L | Sine-wave output load ⁽¹⁾ | | 10 | 30 | pF |
| C _{OUT} | LDO output capacitance (stabilize the internal control loop) | 0.8 | 2.2 | | μF |
| T _A | Operating free-air temperature | –40 | | 85 | °C |

- (1) 10 pF is the typical load-driving capability. The drive capability can be optimized for 30 pF by the I²C register (Byte 3, Bits 7–4).

ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|-------------------------------|--|---|--------------|----------------------------|------|-----|------|
| OVERALL PARAMETER | | | | | | | |
| I _{DD_ANA} | Analog supply current ⁽¹⁾ (see Figure 8 through Figure 12) | V _{BAT} = 5.5 V; V _{DD_ANA} = 1.95 V; LDO is on; V _{IS} = 1 V _{PP} ; f _{MCLK_IN} = 38.4 MHz; R _L = 10 kΩ; C _L = 10 pF ⁽²⁾ | Off (no REQ) | 0.1 | 0.2 | mA | |
| | | | Per output | 2 | 2.6 | | |
| I _{DD_DIG} | Digital supply current (see Figure 8 through Figure 12) | V _{BAT} = 5.5 V; V _{DD_DIG} = 1.95 V; V _{DD_ANA} = off; LDO = off; V _{IS} = 1 V _{PP} ; f _{MCLK_IN} = 38.4 MHz; C _L = 10 pF; R _L = 10 kΩ | | | 0.1 | mA | |
| I _{SB} | Standby current | V _{BAT} = 5.5 V; V _{DD_DIG} /V _{DD_ANA} = 1.95 V; All outputs disabled (no input clock; LDO off; no REQ; RESET is inactive; I ² C is in idle mode); includes 1-MΩ pullup at I ² C and RESET | | | 0.5 | 10 | μA |
| f _{MCLK_IN} | Input frequency | Sine wave | | 0.01 | 38.4 | 52 | MHz |
| V _{OH} | MCLK_REQ high-level output voltage | Wired-OR output; I _{OH} = −2 mA; V _{DD_DIG} = 1.65 V (See Figure 3.) | | V _{DD_DIG} − 0.45 | | V | |
| | | Push-pull output; V _{DD_DIG} = 1.65 V, I _{OH} = −2 mA | | V _{DD_DIG} − 0.45 | | | |
| V _{OL} | MCLK_REQ low-level output voltage | Wired-AND output; I _{OL} = 2 mA V _{DD_DIG} = 1.65 V | | 0.45 | | V | |
| | | Push-pull output; V _{DD_DIG} = 1.65 V, I _{OL} = 2 mA | | 0.45 | | | |
| V _{IK} | LVC MOS input voltage | V _{DD_DIG} = 1.65 V; I _I = −18 mA | | −1.2 | | V | |
| I _{IH} | Input current ADR_A0, REQx (500-kΩ pulldown) | V _I = V _{DD_DIG} ; V _{DD_DIG} = 1.95 V | | 6 | | μA | |
| | Input current RESET (1-MΩ pullup) | | | 2 | | | |
| I _{IL} | Input current ADR_A0, REQx (500-kΩ pulldown) | V _I = 0 V; V _{DD_DIG} = 1.95 V | | −2 | | μA | |
| | Input current RESET (1-MΩ pullup) | | | −3 | | | |
| C _I | Input capacitance ADR_A0, REQx, RESET | V _I = 0 V or V _{DD_DIG} | | 3 | | pF | |
| SDAH/SCLH PARAMETER (Hs-Mode) | | | | | | | |
| V _{IK} | SCLH/SDAH input clamp voltage | V _{DD_DIG} = 1.65 V; I _I = −18 mA | | −1.2 | | V | |
| I _I | SCLH/SDAH input current | 0.1 V _{DD_DIG} < V _I < 0.9 V _{DD_DIG} | | 10 | | μA | |
| V _{IH} | SDA/SCL input high voltage | | | 0.7 V _{DD_DIG} | | V | |
| V _{IL} | SDAH/SCLH input low voltage | | | 0.3 V _{DD_DIG} | | V | |
| V _{hys} | Hysteresis of Schmitt-trigger inputs | | | 0.1 V _{DD_DIG} | | V | |
| V _{OL} | SDAH low-level output voltage | I _{OL} = 3 mA, V _{DD_DIG} = 1.65 V | | 0.2 V _{DD_DIG} | | V | |
| C _I | SCLH input capacitance | V _I = 0 V or V _I = V _{DD_DIG} ⁽³⁾ | | 3 | | pF | |
| | SDAH input capacitance | V _I = 0 V or V _I = V _{DD_DIG} ⁽³⁾ | | 8 | | | |

(1) The total current consumption when no output is active is calculated by $I_{DD_ANA}(\text{off}) + I_{DD_DIG}$.

(2) For $C_L = 30\text{ pF}$, the typical current for one output is 2.2 mA (see Figure 8).

(3) The I^2C standard specifies a maximum C_I of 10 pF.

CDC3S04

SCAS883C –OCTOBER 2009–REVISED AUGUST 2012

www.ti.com

ELECTRICAL CHARACTERISTICS (continued)

over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|--|--|---|---|------|------|------|-------------------|
| SINE-WAVE PARAMETER (MCLK_IN is sine-wave signal, C _L = 10 pF) | | | | | | | |
| f _{OUT} | Output frequency | | | | | 52 | MHz |
| V _{OS} | Output gain level (see Figure 17) | MCLK_IN-to-CLKx; 10 kΩ, 10 pF; ac-coupled; f _{MCLK_IN} > 1 MHz | 0.5 ≤ V _{IS} ≤ 1.2 V _{PP} | −1 | −0.3 | 0 | dB |
| | Output voltage | | V _{IS} = 0.5 V _{PP} | 445 | 490 | 500 | mV _{PP} |
| f _{jitadd(rms)} | Additive rms jitter ⁽⁴⁾ | 10 Hz to 10 MHz; f _{OUT} = 38.4 MHz | | | 0.3 | 0.6 | ps _{RMS} |
| | | 10 kHz to 10 MHz; f _{OUT} = 38.4 MHz | | | 0.1 | 0.2 | |
| p _n _{add} | Additive phase noise at f _{OUT} = 38.4 MHz ⁽⁵⁾ | At offset = 1 kHz | | | −142 | −135 | dBc/Hz |
| | | At offset = 10 kHz | | | −152 | −145 | |
| | | At offset = 100 kHz | | | −157 | −150 | |
| R _{IN} | Input resistance | At dc level | | 12 | 15 | | kΩ |
| C _{IN} | Input capacitance | f _{MCLK_IN} = 38.4 MHz | | | 5 | 7 | pF |
| ELECTRICAL CHARACTERISTIC of LDO (C _{OUT} = 0.8 to 2.7 μF) ⁽⁶⁾ | | | | | | | |
| V _{BAT} | Input voltage range | | | 2.3 | | 5.5 | V |
| V _{LDO} | LDO output voltage ⁽⁷⁾ | 2.3 V < V _{BAT} < 5.5 V, I _{LOAD} = 5 mA | | 1.72 | 1.8 | 1.9 | V |
| ΔV _{LDO} | Maximum line regulation | 2.3 V < V _{BAT} ≤ 5.5 V, I _{LOAD} = 5 mA | | | 0.5% | | |
| | Maximum load regulation | 0 < I _{LOAD} < 5 mA, V _{BAT} = 2.3 V or 5.5 V; T _J = 25°C | | | 0.5% | | |
| I _{LOAD} | Load current | C _{OUT} = 0.8 μF to 2.7 μF | | 0 | 5 | | mA |
| I _{LCL} | LDO output current limit | V _{LDO} = 0.9 × V _{LDO(TYP)} | | 10 | | 60 | mA |
| I _{LGND} | LDO ground pin current ⁽⁸⁾ | V _{BAT} = 3.6 V; 0 < I _{LOAD} < 5 mA | | | 50 | 150 | μA |
| I _{LSHDN} | LDO shutdown current | 2.3 V < V _{BAT} < 5.5 V | | | | 0.2 | μA |
| PSRR | Power-supply rejection ratio (ripple rejection) (see Figure 20) | V _{BAT} = 2.3 V (for min) V _{BAT} = 2.5 V (for typ) V _{LDO} = 1.8 V I _{LOAD} = 5 mA V _{ripple} = 0.1 V _{pp} | 100 Hz | 60 | 68 | | dB |
| | | | 1 kHz | 55 | 62 | | |
| | | | 10 kHz | 45 | 52 | | |
| | | | 100 kHz | 33 | 40 | | |
| | | | 1 MHz | 37 | 46 | | |
| | | | 10 MHz | 60 | 67 | | |
| V _N | Output noise voltage (see Figure 21) | BW = 10 Hz to 100 kHz; V _{LDO} = 1.8 V; I _{LOAD} = 5 mA | | | | 30 | μV _{RMS} |

(4) Additive rms jitter is the integrated rms jitter that the device adds to the signal chain. It is calculated by

$$t_{jitteradd(rms)} = \sqrt{(t_{jitterout(rms)}^2 - t_{jitterin(rms)}^2)} \quad \text{Specified with the supply ripple noise of 30 } \mu\text{V(rms) from 10 Hz to 100 kHz.}$$

(5) Additive phase noise is the amount of phase noise that the device adds to the signal chain. It is calculated by

$$L_{add} \text{ (dB)} = 10 \log (10^{0.1 L_{out}} - 10^{0.1 L_{in}}).$$

(6) Minimum C_{OUT} should be 100 nF to allow for stable LDO operation.

(7) LDO output voltage includes maximum line and load regulation.

(8) LDO ground pin current does not change over V_{BAT}.

TIMING REQUIREMENTS

over operating free-air temperature range (unless otherwise noted) $V_{LDO} = 1.8\text{ V}$; $C_L = 10\text{ pF}$; $R_L = 10\text{ k}\Omega$

| PARAMETER | | TEST CONDITIONS | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|------------------|---|--|-----|--------------------|-----|---------------|
| TIMING PARAMETER | | | | | | |
| t_{PD} | Propagation delay time | MCLK_IN-to-CLKx; $f_{MCLK_IN} = 38.4\text{ MHz}$ | | | 3 | ns |
| t_{LH} | Propagation delay time, low-to-high | REQx-to-MCLK_REQ (wired-OR, $C_L = 15\text{ pF}$, $R_L = 10\text{ k}\Omega$); | | | 15 | ns |
| $t_{CLK}^{(2)}$ | CLKx on-time – REQ-to-CLKx | $f_{MCLK_IN} = 38.4\text{ MHz}$; V_{DD_ANA} is on; $V_{IS} = 1\text{ V}$; $V_{OS} = -1\text{ dB}$ (see Figure 5 and Figure 6) | | 0.3 | 0.4 | μs |
| | CLKx on-time – RESET-to-CLKx ⁽³⁾ | | | 0.6 | 0.8 | μs |
| | CLKx off-time – REQ-to-CLKx | | | | 25 | ns |
| | CLKx on-time – V_{DD_ANA} to-CLKx | $f_{MCLK_IN} = 38.4\text{ MHz}$; $V_{IS} = 1\text{ V}$; $V_{OS} = -1\text{ dB}$; measurement starts when V_{DD_ANA} is 90% of 1.7 V (see Figure 7) | | 20 | 50 | μs |
| t_{SP} | Pulse duration of spikes that must be suppressed by the input filter for RESET ⁽³⁾ | | | | 100 | ns |
| $t_{sk(o)}$ | Output skew ⁽⁴⁾ | $f_{MCLK_IN} = 38.4\text{ MHz}$; CLK1-to-CLK4 | | 25 | 50 | ps |
| t_{LDO} | LDO on-time ⁽⁵⁾ – REQ-to-LDO; – RESET-to-LDO | $V_{LDO} = 1.7\text{ V}$, $I_{LDO} = 5\text{ mA}$, $2.3\text{ V} < V_{BAT} < 5.5\text{ V}$; $C_{OUT} = 2.7\text{ }\mu\text{F}$ | | 100 | 300 | μs |

(1) All typical values are at nominal V_{DD_ANA} and V_{DD_DIG} .

(2) CLK on-time is measured with valid input signal ($V_{IS} = 1\text{ Vpp}$). In case a TXCO is used, the LDO and TCXO are already on.

(3) Pulses above 500 ns are interpreted as a valid reset signal. Total time from RESET-to-CLKx is the sum of $t_{SP} + t_{CLK_RESET}$.





(4) Output skew is calculated as the greater of the difference between the fastest and the slowest t_{PLH} or the difference between the fastest and the slowest t_{PHL} .

(5) LDO off-time depends on the discharge time of the R-C components (see [Figure 4](#)).

| PARAMETER | | MIN | MAX | UNIT |
|--|--|------------------|-----|------|
| SDAH/SCLH TIMING REQUIREMENTS, Hs-Mode ($C_{BUS} = 100\text{ pF}$ for each I^2C line; see Figure 24 and Figure 25) | | | | |
| f_{SCLH} | SCLH clock frequency | 0 | 3.4 | MHz |
| $t_{su(START)}$ | START setup time (SCLH high before SDAH low) | 160 | | ns |
| $t_{h(START)}$ | START hold time (SCLH low after SDAH low) | 160 | | ns |
| t_{LOW} | Low period of the SCLH clock | 160 | | ns |
| t_{HIGH} | High period of the SCLH clock | 60 | | ns |
| $t_{h(SDAH)}$ | SDAH hold time (SDAH valid after SCLH low) | 0 ⁽¹⁾ | 70 | ns |
| $t_{su(SDAH)}$ | SDAH setup time | 10 | | ns |
| t_r | SCLH rise time | 10 | 40 | ns |
| | SDAH rise time | 10 | 80 | |
| t_f | SCLH fall time | 10 | 40 | ns |
| | SDAH fall time | 10 | 80 | |
| $t_{su(STOP)}$ | STOP setup time | 160 | | ns |
| t_{SP} | Pulse duration of spikes that must be suppressed by the input filter for SDAH and SCLH | 0 | 10 | ns |

(1) A device must internally provide a data hold time to bridge the undefined period between V_{IH} and V_{IL} of the falling edge of the SCLH signal. An input circuit with a threshold as low as possible for the falling edge of the SCLH signal minimizes this hold time.

PARAMETER MEASUREMENT INFORMATION

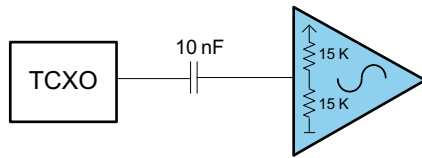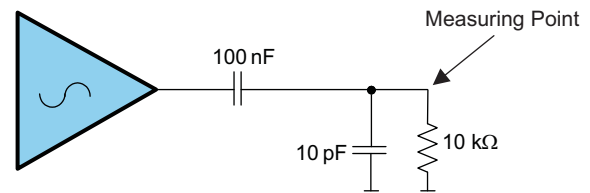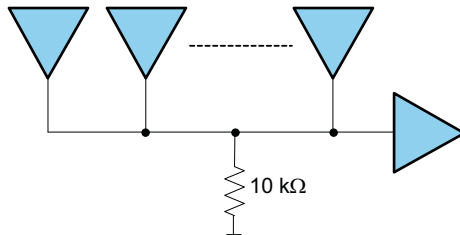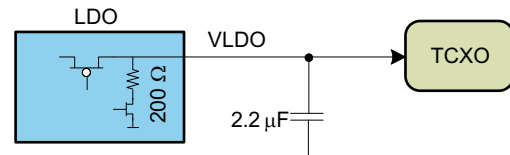
Figure 1. Input Circuit

Figure 2. Output Circuit

Figure 3. Wired OR


i.e. time constant(RxC) is 440 μs for 63% discharge.

Figure 4. LDO Output Circuit

TYPICAL CHARACTERISTICS

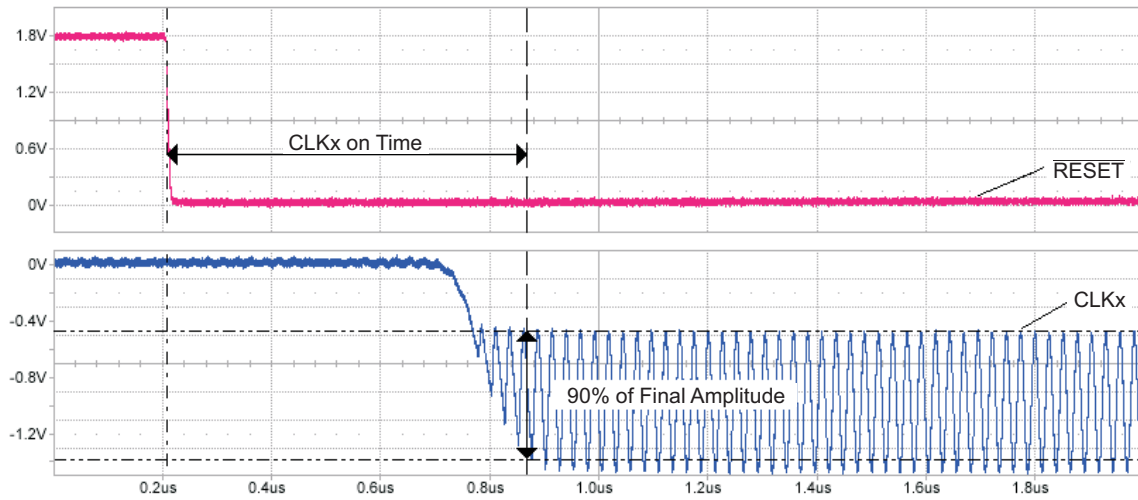


Figure 5. CLKx On-Time From $\overline{\text{RESET}}$ Off-to-On

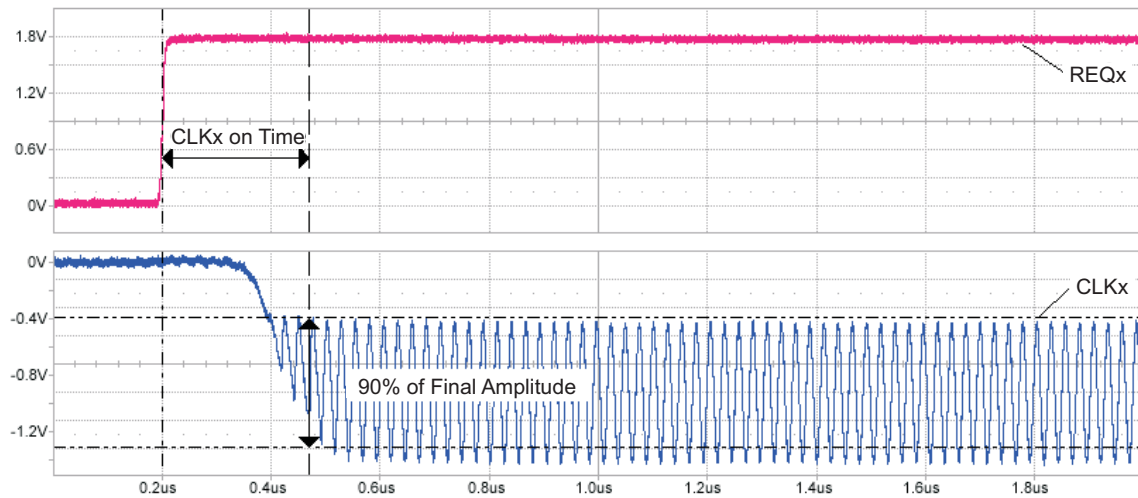


Figure 6. CLKx On-Time From REQ Off-to-On

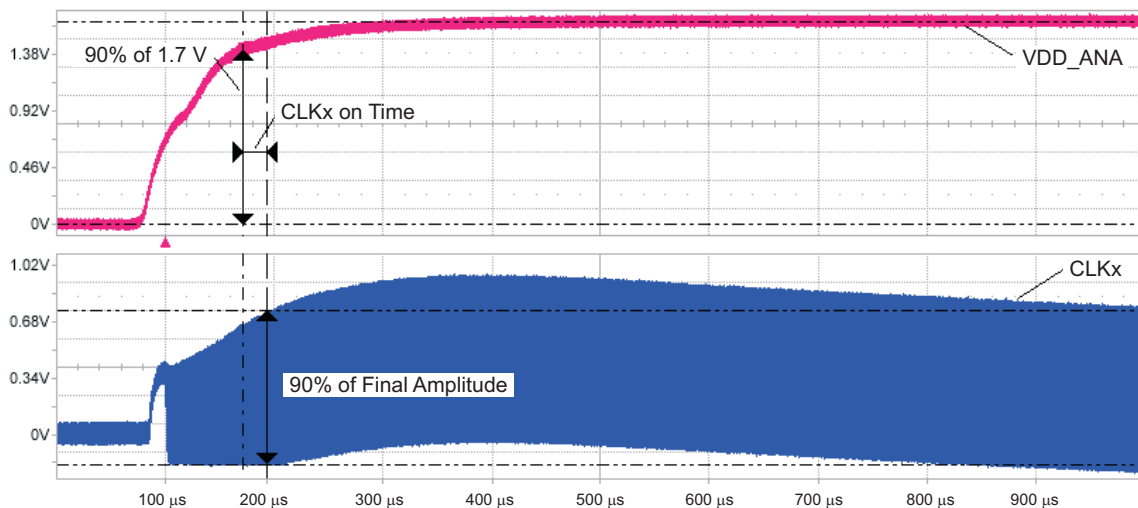


Figure 7. CLKx On-Time From $V_{\text{DD_ANA}}$ Off-to-On

TYPICAL CHARACTERISTICS (continued)

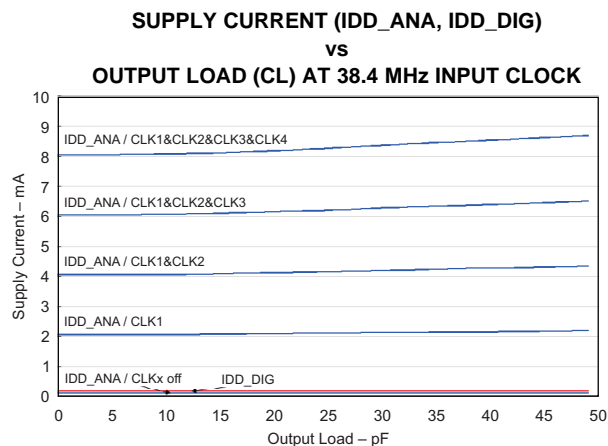


Figure 8.

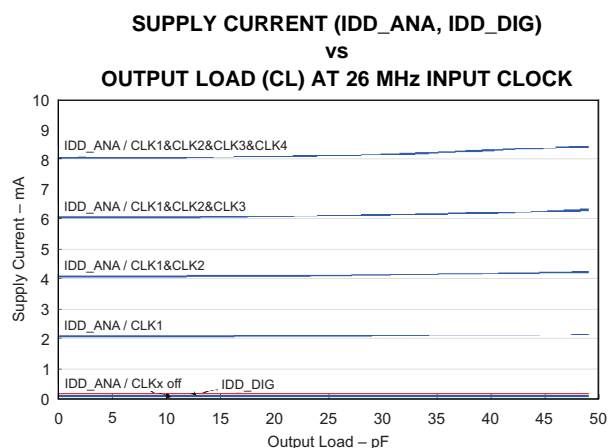


Figure 9.

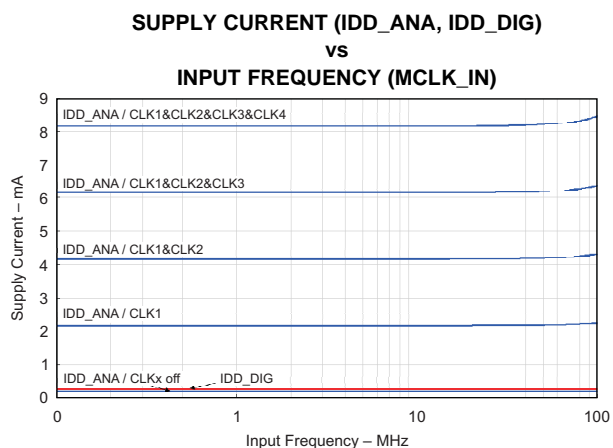


Figure 10.

INPUT VOLTAGE LEVEL AT 38.4 MHz INPUT CLOCK



INPUT VOLTAGE LEVEL AT 26 MHz INPUT CLOCK



OUTPUT CLOCK AT 38.4 MHz



TYPICAL CHARACTERISTICS (continued)

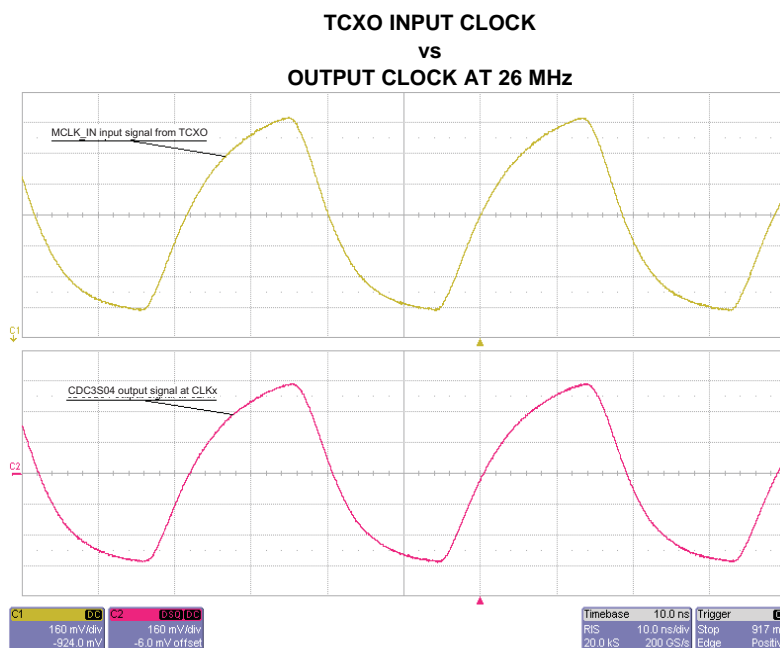


Figure 14.

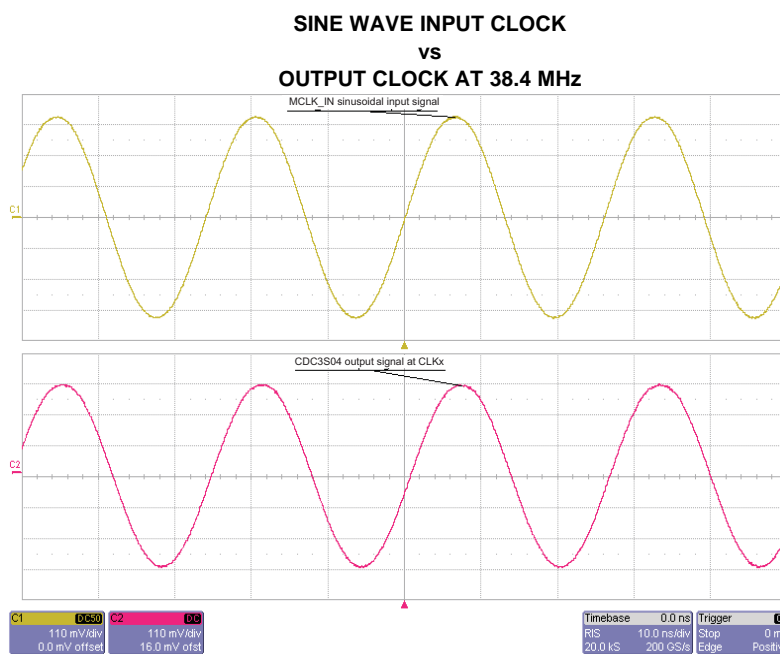


Figure 15.

TYPICAL CHARACTERISTICS (continued)

SINE WAVE INPUT CLOCK

vs

OUTPUT CLOCK AT 26 MHz

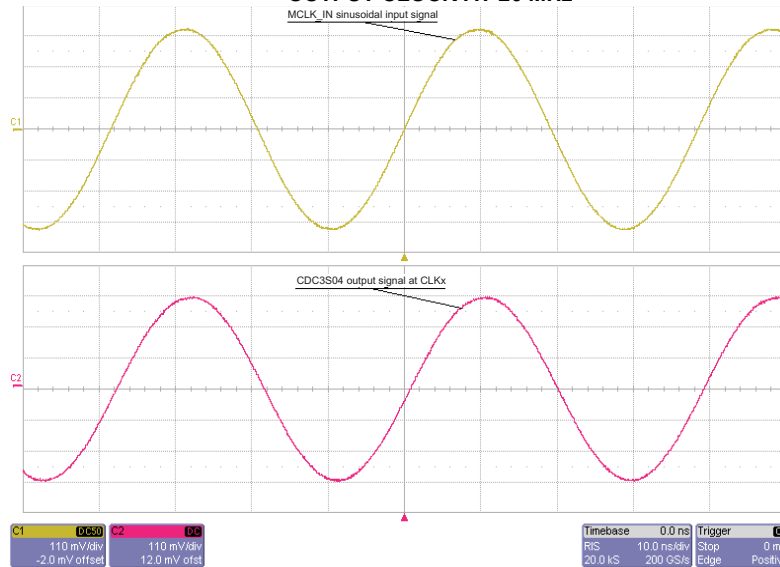


Figure 16.

OUTPUT GAIN

vs

INPUT FREQUENCY (MCLK_IN)

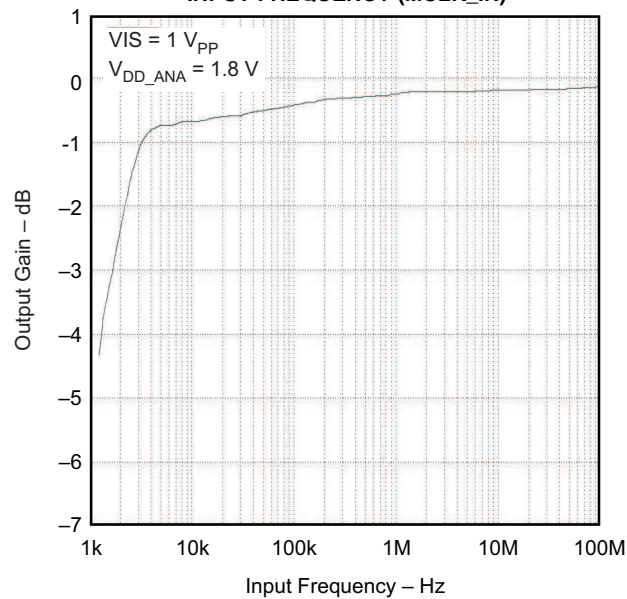


Figure 17.

TYPICAL CHARACTERISTICS (continued)

INPUT
vs
OUTPUT PHASE-NOISE PERFORMANCE WITH 38.4-MHz TCXO

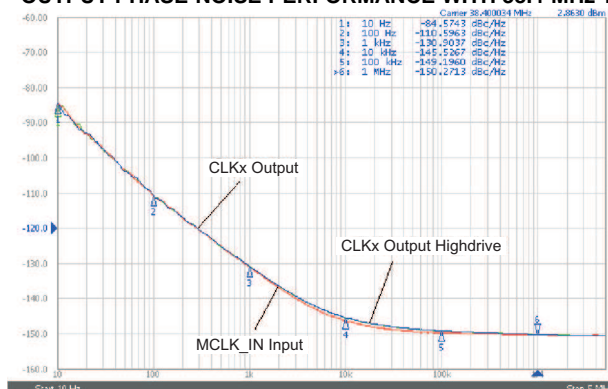


Figure 18.

INPUT
vs
OUTPUT PHASE-NOISE PERFORMANCE WITH 26-MHz TCXO

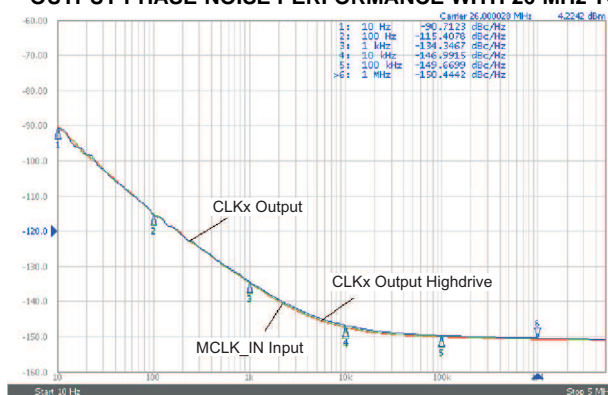


Figure 19.

LDO POWER SUPPLY REJECTION

vs
FREQUENCY (PSRR)

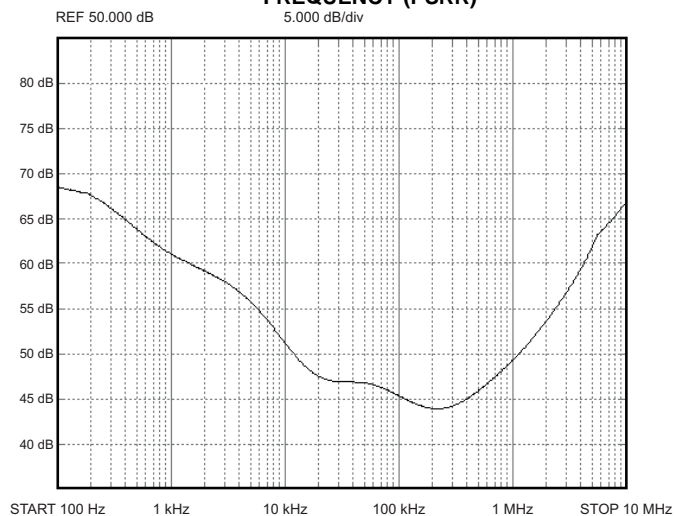


Figure 20.

TYPICAL CHARACTERISTICS (continued)

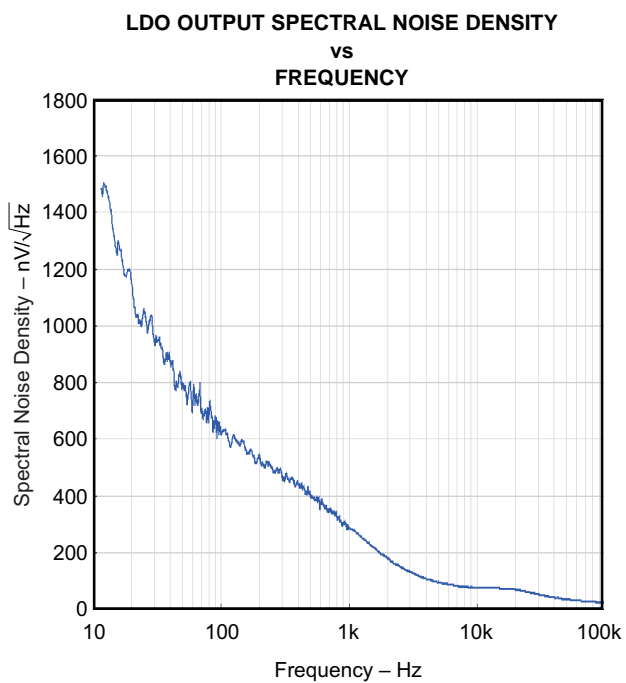


Figure 21.

DETAILED DESCRIPTION

SDAH/SCLH SERIAL INTERFACE (Hs-Mode)

This section describes the SDAH/SCLH interface of the CDC3S04 device. The CDC3S04 operates as a slave device of the two-wire serial SDAH/SCLH bus, compatible with the popular I²C specification (UM10204-I²C-bus specification and user manual Rev. 03–19 June 2007). It operates in the high-speed mode (up to 3.4 Mbit/s) and supports 7-bit addressing. The CDC3S04 is fully downward compatible with fast- and standard-mode (F/S) devices for bidirectional communication in a mixed-speed bus system.

Data Protocol

The device supports byte-write and byte-read operations only. There is no block-write or block-read operation supported; therefore, no command code byte is needed.

When a byte has been sent, it is written into the internal register and is immediately effective.

Slave Receiver Address (7 bits)

| Device | A6 | A5 | A4 | A3 | A2 | A1 | A0 ⁽¹⁾ | R/ \overline{W} |
|---------|----|----|----|----|----|----|-------------------|-------------------|
| CDC3S04 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1/0 |

(1) Address bit A0 is selectable by the ADR_A0 input (pin D1). This allows addressing of two devices connected to the same I²C bus. The default value is 0, set by an internal pulldown resistor.

Byte-Write Programming Sequence

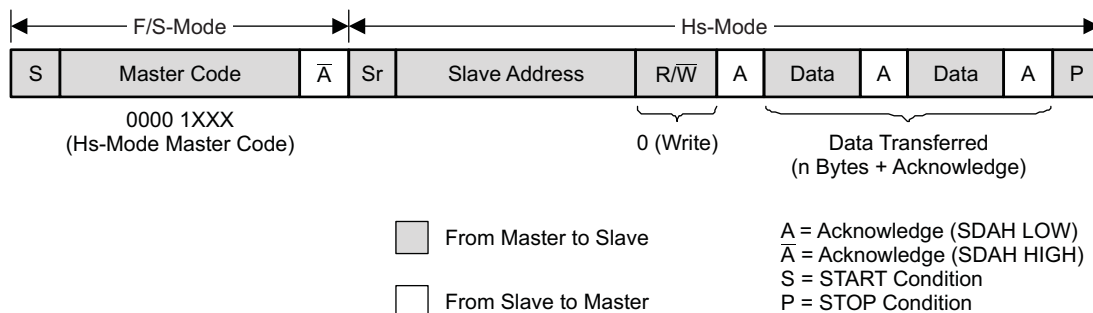


Figure 22. Byte-Write Protocol

Byte-Read Programming Sequence


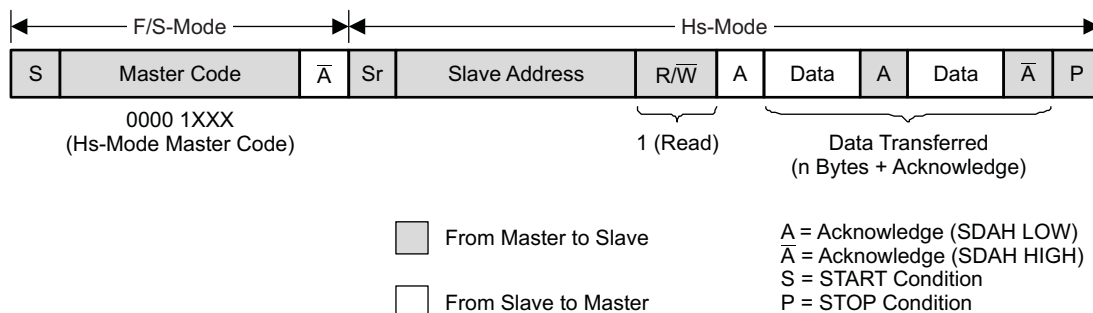


Figure 23. Byte-Read Protocol

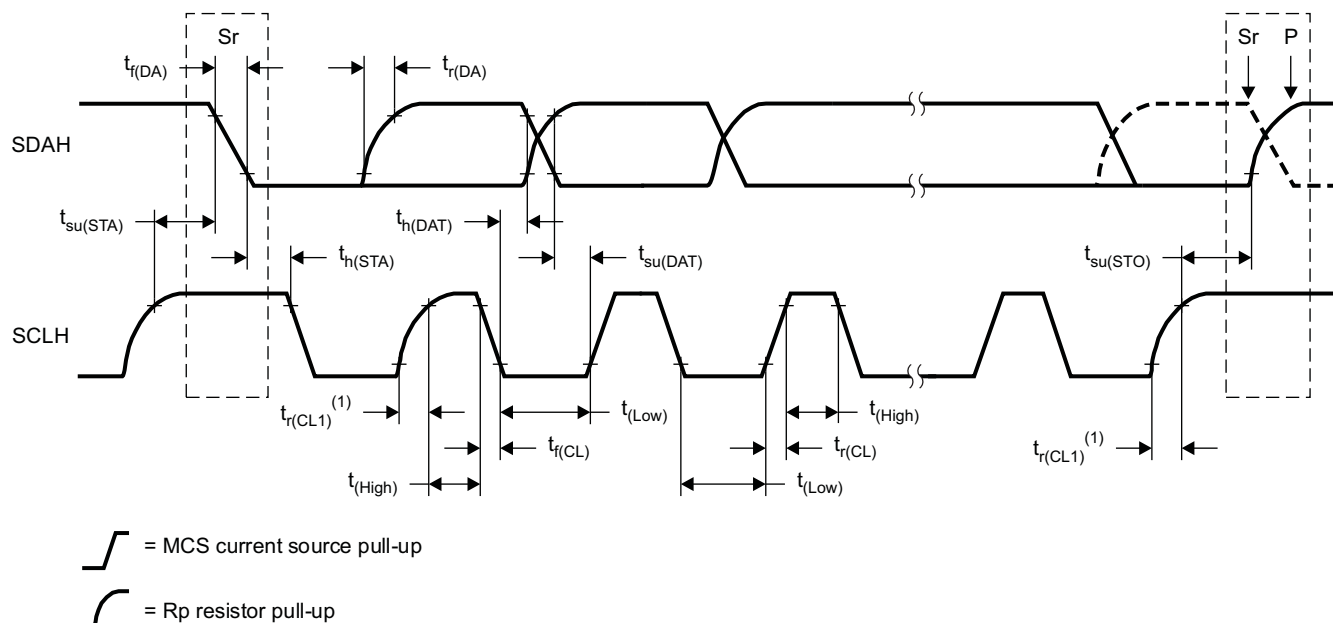

T0451-01

(1) First rising edge of the SCLH signal after Sr and after each acknowledge bit.

Figure 24. Definition of Timing for a Complete Hs-Mode Transfer

The following diagram shows how the CDC3S04 clock buffer is connected to the SDAH/SCLH serial interface bus. Multiple devices can be connected to the bus, but the speed may need to be reduced (3.4 MHz is the maximum) if many devices are connected.

Note that the pullup resistors (R_p) depend on the supply voltage, bus capacitance, and number of connected devices. For more details, see the I²C bus specification.

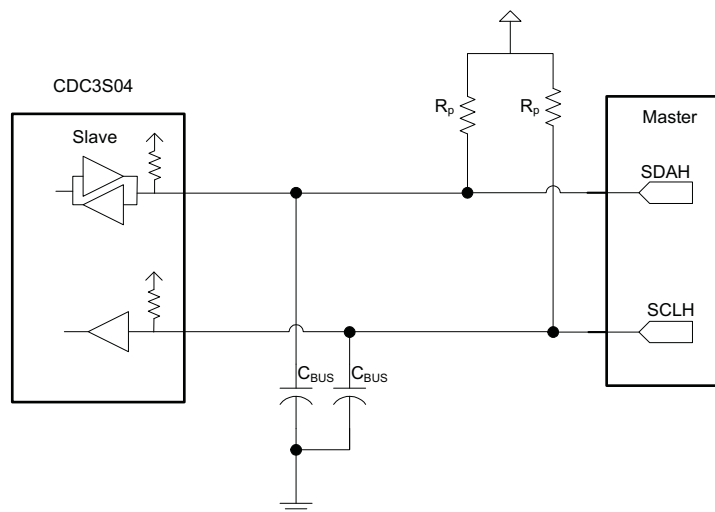


Figure 25. SDAH/SCLH Hardware Interface

SDAH/SCLH Configuration Registers

The output stages are user configurable. [Table 3](#) explains the programmable functions of the CDC3S04.

CDC3S04

SCAS883C –OCTOBER 2009–REVISED AUGUST 2012

www.ti.com
Table 3. Configuration Register (Shaded Cells Marks Power-Up/Default Setting)

| Offset | BIT ⁽¹⁾ | Acronym | Default ⁽²⁾ | RESET ⁽³⁾ | Description | 0 | 1 | Type |
|-----------------------|--------------------|------------|------------------------|----------------------|--|-----------------------|-------------------|------|
| 00h | 7 | REQ4INT | 1b | 1b | CLK4 off/on ⁽⁴⁾ | Off | On | R/W |
| | 6 | REQ3INT | 0b | – | CLK3 off/on ⁽⁴⁾ | Off | On | |
| | 5 | REQ2INT | 0b | – | CLK2 off/on ⁽⁴⁾ | Off | On | |
| | 4 | REQ1INT | 1b | 1b | CLK1 off/on ⁽⁴⁾ | Off | On | |
| | 3 | REQ4POL | 1b | – | Selects polarity of REQ4 | Active-low | Active-high | |
| | 2 | REQ3POL | 1b | – | Selects polarity of REQ3 | Active-low | Active-high | |
| | 1 | REQ2POL | 1b | – | Selects polarity of REQ2 | Active-low | Active-high | |
| | 0 | REQ1POL | 1b | – | Selects polarity of REQ1 | Active-low | Active-high | |
| 01h | 7 | MREQ4 | 1b | – | Defines if REQ4 is used to decode MCLK_REQ | Not used for decoding | Used for decoding | R/W |
| | 6 | MREQ3 | 1b | – | Defines if REQ3 is used to decode MCLK_REQ | | | |
| | 5 | MREQ2 | 1b | – | Defines if REQ2 is used to decode MCLK_REQ | | | |
| | 4 | MREQ1 | 1b | – | Defines if REQ1 is used to decode MCLK_REQ | | | |
| | 3 | MCLKOUT1 | 00b | – | Selects MCLK_REQ output type 00 = wired-OR (default setting) 01 = wired-AND 1x = push-pull | | | |
| | 2 | MCLKOUT0 | | | | | | |
| | 0–1 | – | 00b | – | Reserved | | | |
| 02h | 7 | MREQCTRL1 | 00b | – | MCLK_REQ generation (see Figure 27) 0x = decoder controlled (default setting) 10 = low 11 = high | | | R/W |
| | 6 | MREQCTRL0 | | | | | | |
| | 5 | LDOEN1 | 00b | – | Switches LDO on or off: 00 = LDO is on (default setting) 01 = LDO is off 1x = decoder controlled (see Figure 27) | | | |
| | 4 | LDOEN0 | | | | | | |
| | 3 | REQ4PRIO | 1b | 1b | Defines external vs internal REQ4 priority | REQ4 | REQ4INT | |
| | 2 | REQ3PRIO | 0b | – | Defines external vs internal REQ3 priority | REQ3 | REQ3INT | |
| | 1 | REQ2PRIO | 0b | – | Defines external vs internal REQ2 priority | REQ2 | REQ2INT | |
| | 0 | REQ1PRIO | 1b | 1b | Defines external vs internal REQ1 priority | REQ1 | REQ1INT | |
| 03h | 7 | HIGHDRIVE4 | 0b | – | Enables high-drive capability CLK4 | Typical | High | R/W |
| | 6 | HIGHDRIVE3 | 0b | – | Enables high-drive capability CLK3 | Typical | High | |
| | 5 | HIGHDRIVE2 | 0b | – | Enables high-drive capability CLK2 | Typical | High | |
| | 4 | HIGHDRIVE1 | 0b | – | Enables high-drive capability CLK1 | Typical | High | |
| | 0–3 | – | 0b | – | Reserved | | | |
| 04h–Bh ⁽⁵⁾ | | – | | – | Reserved | | | R/W |


(1) All data is transferred with the MSB first.

(2) A device reset to default condition is initiated by a V_{DD}DIG power-up sequence.


(3) "–" means that dedicated bits do not change at RESET.

(4) Inactive as long as the REQxPRIO bit is low, external REQx pins are valid (see [Figure 26](#))

(5) Writing data beyond 03h may affect device function.

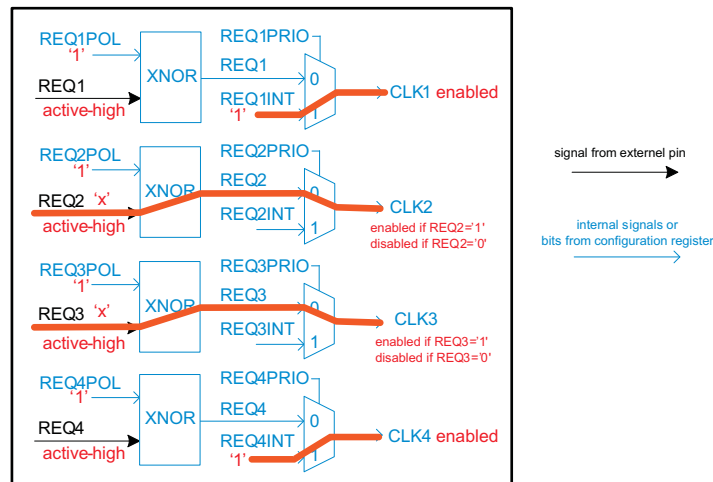

**Figure 26. Clock Output Enable Signal
(Shaded Line Marks Power-Up/Default Setting)**

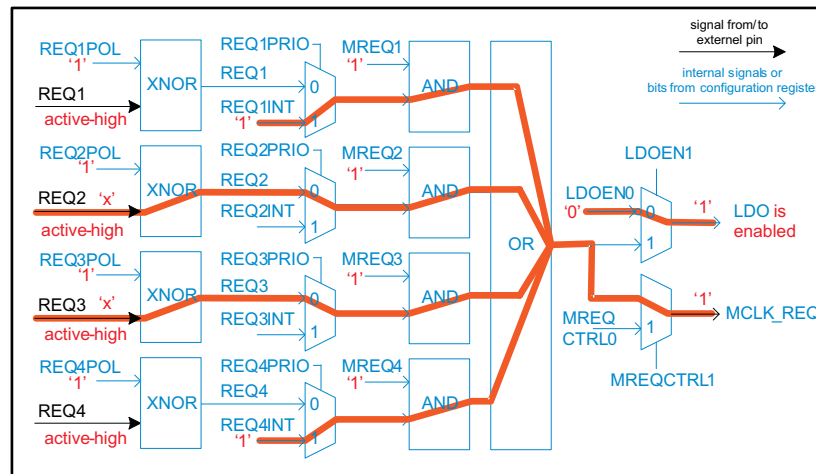

**Figure 27. Decoding Scheme for MCLK_REQ and LDOEN
(Shaded Line Marks Power-Up/Default Setting)**

APPLICATION INFORMATION

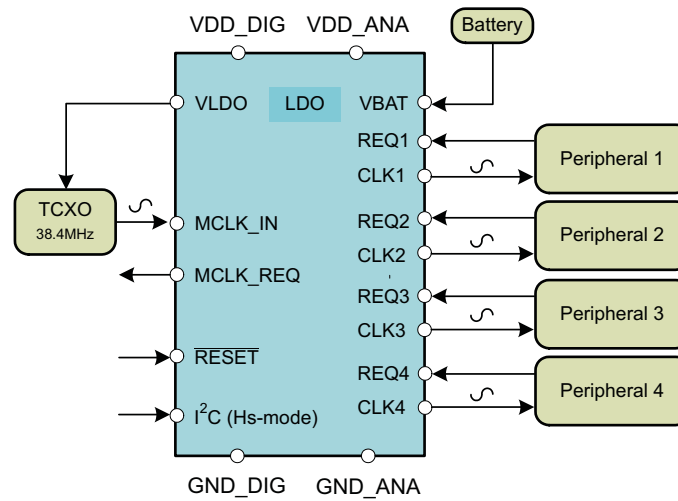


Figure 28. Clock Distribution Scheme

REVISION HISTORY

Changes from Original (October 2009) to Revision A Page

- Changed the format on page 1 (moved 2 paragraphs from page 2 to page 1) [1](#)
- Changed the X axis from 0.1us to 100us....900us [9](#)
- Changed Offset 00h Bit 4 Default value from 0h to 1b [18](#)

Changes from Revision A (July 2010) to Revision B Page

- Changed [Table 3](#) "Offset" values listed in "Default" and " $\overline{\text{RESET}}$ " columns from "h" to "b". [18](#)

Changes from Revision B (May 2011) to Revision C Page

- Changed from Rev B, 2011 to Rev C, 2012 [1](#)
- Changed the 8th Feature item from –30°C to –40°C [1](#)
- Changed in the last paragraph of description from –30°C to –40°C [2](#)
- Changed in the ROC table last row, from –30°C to –40°C [4](#)

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-----------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| CDC3S04YFFR | Active | Production | DSBGA (YFF) 20 | 3000 LARGE T&R | Yes | SNAGCU | Level-1-260C-UNLIM | -40 to 85 | CDC3S04 |
| CDC3S04YFFR.B | Active | Production | DSBGA (YFF) 20 | 3000 LARGE T&R | Yes | SNAGCU | Level-1-260C-UNLIM | -40 to 85 | CDC3S04 |

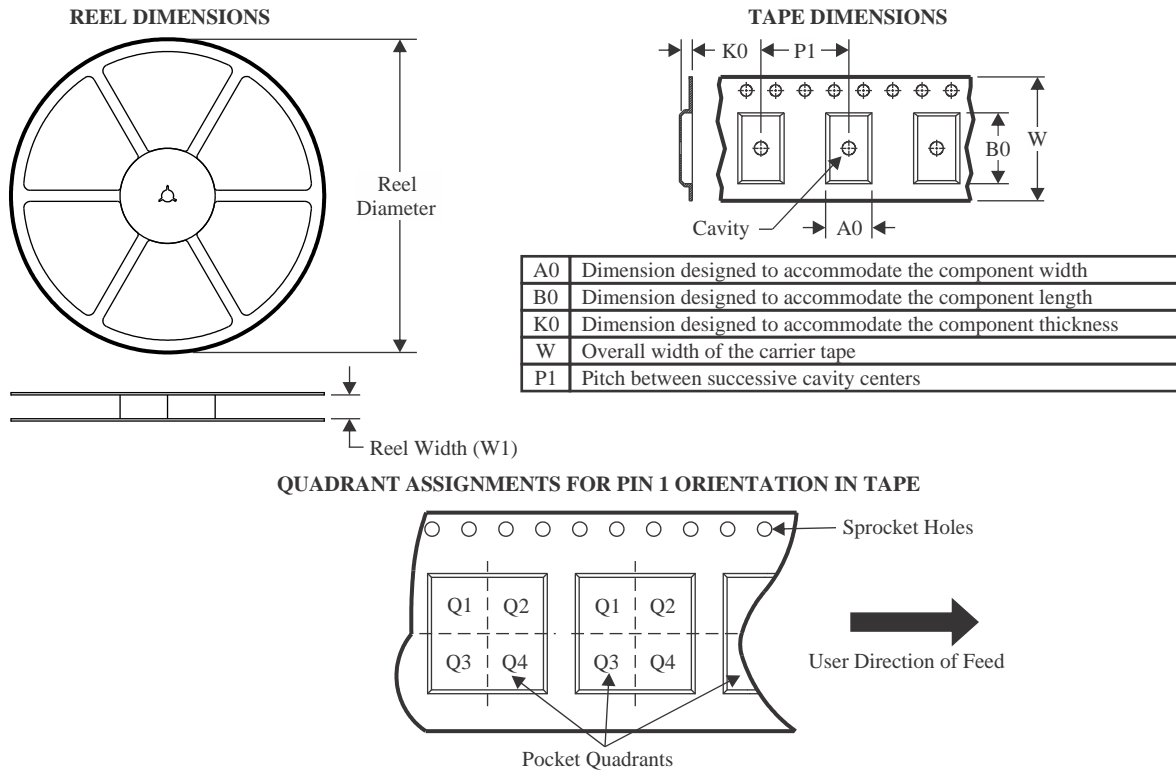
- (1) **Status:** For more details on status, see our [product life cycle](#).
- (2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- (3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- (4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| CDC3S04YFFR | DSBGA | YFF | 20 | 3000 | 180.0 | 8.4 | 1.63 | 2.08 | 0.69 | 4.0 | 8.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| CDC3S04YFFR | DSBGA | YFF | 20 | 3000 | 182.0 | 182.0 | 20.0 |

YFF (R-XBGA-N20)

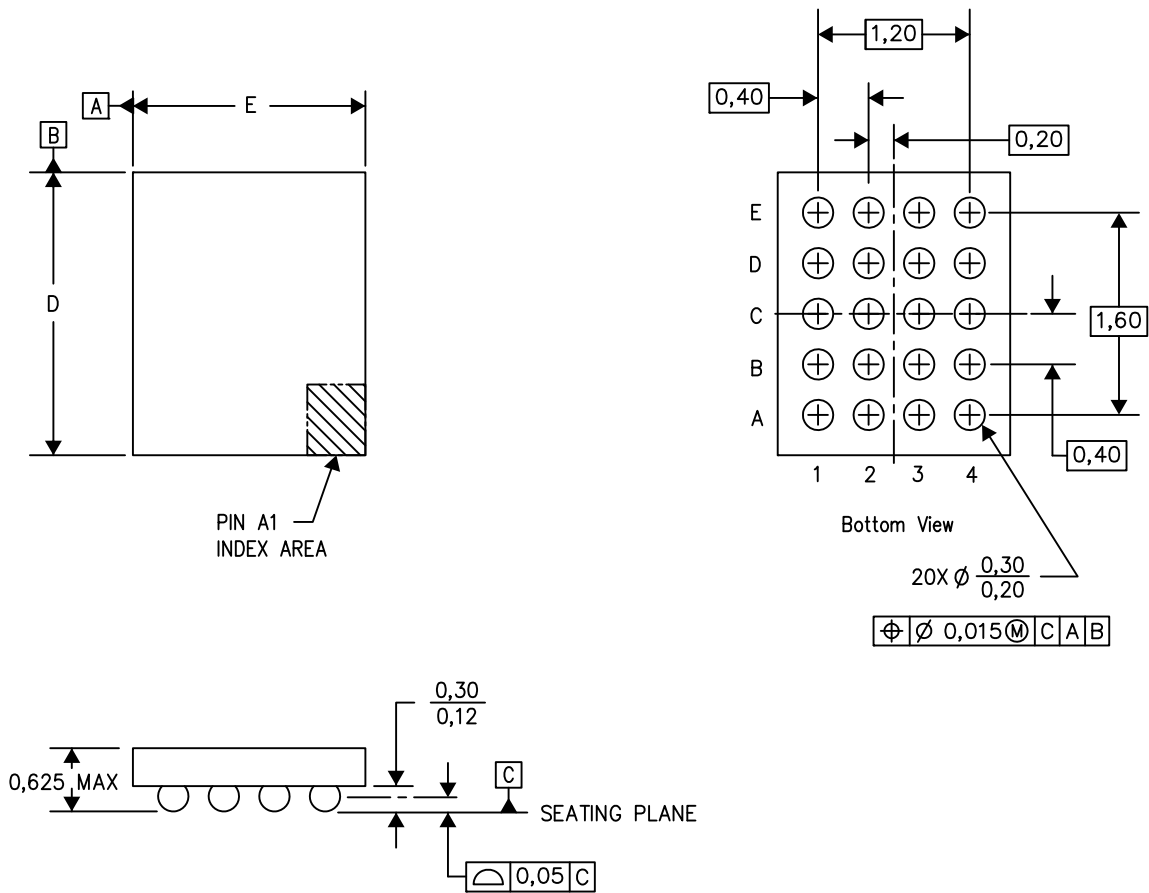DIE-SIZE BALL GRID ARRAY



D: Max = 1.99 mm, Min = 1.93 mm

E: Max = 1.59 mm, Min = 1.53 mm

4207625-9/A0 12/13

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. NanoFree™ package configuration.

NanoFree is a trademark of Texas Instruments.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025