- **Direct Upgrades for the TL06x Low-Power BiFETs**
- **Low Power Consumption . . . 6.5 mW/Channel Typ**
- **On-Chip Offset-Voltage Trimming for Improved DC Performance (1.5 mV, TL031A)**
- **Higher Slew Rate and Bandwidth Without Increased Power Consumption**
- **Available in TSSOP for Small Form-Factor Designs**

description

The TL03x series of JFET-input operational amplifiers offer improved dc and ac characteristics over the TL06x family of low-power BiFET operational amplifiers. On-chip zener trimming of offset voltage yields precision grades as low as 1.5 mV (TL031A) for greater accuracy in dc-coupled applications. The Texas Instruments improved BiFET process and optimized designs also yield improved bandwidths and slew rates without increased power consumption. The TL03x devices are pin-compatible with the TL06x and can be used to upgrade existing circuits or for optimal performance in new designs.

BiFET operational amplifiers offer the inherently higher input impedance of the JFET-input transistors without sacrificing the output drive associated with bipolar amplifiers. This higher input impedance makes the TL3x amplifiers better suited for interfacing with high-impedance sensors or very low-level ac signals. These devices also feature inherently better ac response than bipolar or CMOS devices having comparable power consumption.

The TL03x family has been optimized for micropower operation, while improving on the performance of the TL06x series. Designers requiring significantly faster ac response should consider the Excalibur™ TLE206x family of low-power BiFET operational amplifiers.

Because BiFET operational amplifiers are designed for use with dual power supplies, care must be taken to observe common-mode input-voltage limits and output swing when operating from a single supply. DC biasing of the input signal is required, and loads should be terminated to a virtual-ground node at midsupply. The TI TLE2426 integrated virtual-ground generator is useful when operating BiFET amplifiers from single supplies.

The TL03x devices are fully specified at ±15 V and ±5 V. For operation in low-voltage and/or single-supply systems, the TI LinCMOS families of operational amplifiers (TLC prefix) are recommended. When moving from BiFET to CMOS amplifiers, particular attention should be paid to slew rate, bandwidth requirements, and output loading.

The C-suffix devices are characterized for operation from 0°C to 70°C. The I-suffix devices are characterized for operation from –40°C to 85°C. The M-suffix devices are characterized for operation over the full military temperature range of –55°C to 125°C.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Excalibur is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2001, Texas Instruments Incorporated

TL031x, TL031Ax
D, JG, OR P PACKAGE
(TOP VIEW)

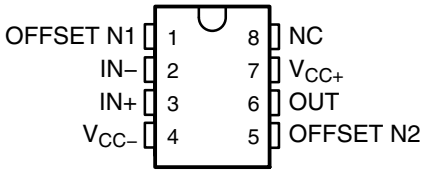

TL032x, TL032Ax
D, JG, OR P PACKAGE
(TOP VIEW)



TL034x, TL034Ax
D, J, N, OR PW PACKAGE
(TOP VIEW)



TL031M, TL031AM
FK PACKAGE
(TOP VIEW)

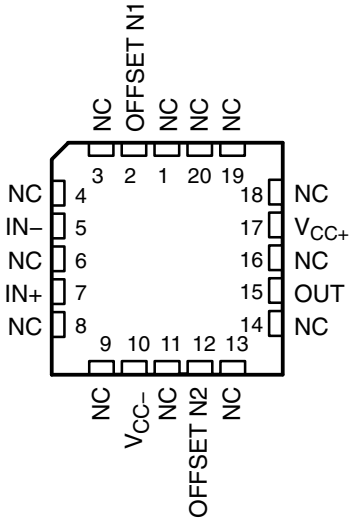

TL032M, TL032AM
FK PACKAGE
(TOP VIEW)

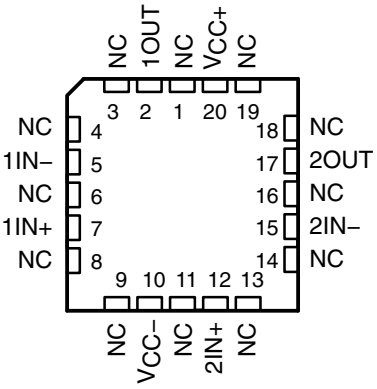

TL034M, TL034AM
FK PACKAGE
(TOP VIEW)

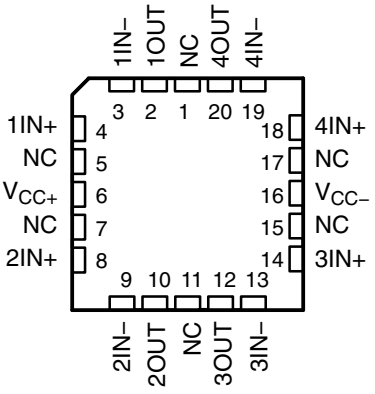

NC – No internal connection

AVAILABLE OPTIONS

T_A	V_{IO}MAX AT 25°C	PACKAGED DEVICES						
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (J)	CERAMIC DIP (JG)	PLASTIC DIP (N)	PLASTIC DIP (P)	TSSOP (PW)
0°C to 70°C	0.8 mV	TL031ACD TL032ACD	—	—	—	—	TL031ACP TL032ACP	—
	1.5 mV	TL031CD TL032CD TL034ACD	—	—	—	TL034ACN	TL031CP TL032CP	—
	4 mV	TL034CD	—	—	—	TL034CN	—	TL034CPW
–40°C to 85°C	0.8 mV	TL031AID TL032AID	—	—	—	—	TL031AIP TL032AIP	—
	1.5 mV	TL031ID TL032ID TL034AID	—	—	—	TL034AIN	TL031IP TL032IP	—
	4 mV	TL034ID	—	—	—	TL034IN	—	—
–55°C to 125°C	0.8 mV	TL031AMD TL032AMD	TL031AMFK TL032AMFK	—	TL031AMJG TL032AMJG	—	TL031AMP TL032AMP	—
	1.5 mV	TL031MD TL032MD TL034AMD	TL031MFK TL032MFK TL034AMFK	TL034AMJ	TL031MJG TL032MJG	TL034AMN	TL031MP TL032MP	—
	4 mV	TL034MD	TL034MFK	TL034MJ	—	TL034MN	—	—

The D and PW packages are available taped and reeled and are indicated by adding an R suffix to device type (e.g., TL034CDR or TL034CPWR).

symbol (each amplifier)



equivalent schematic (each amplifier)

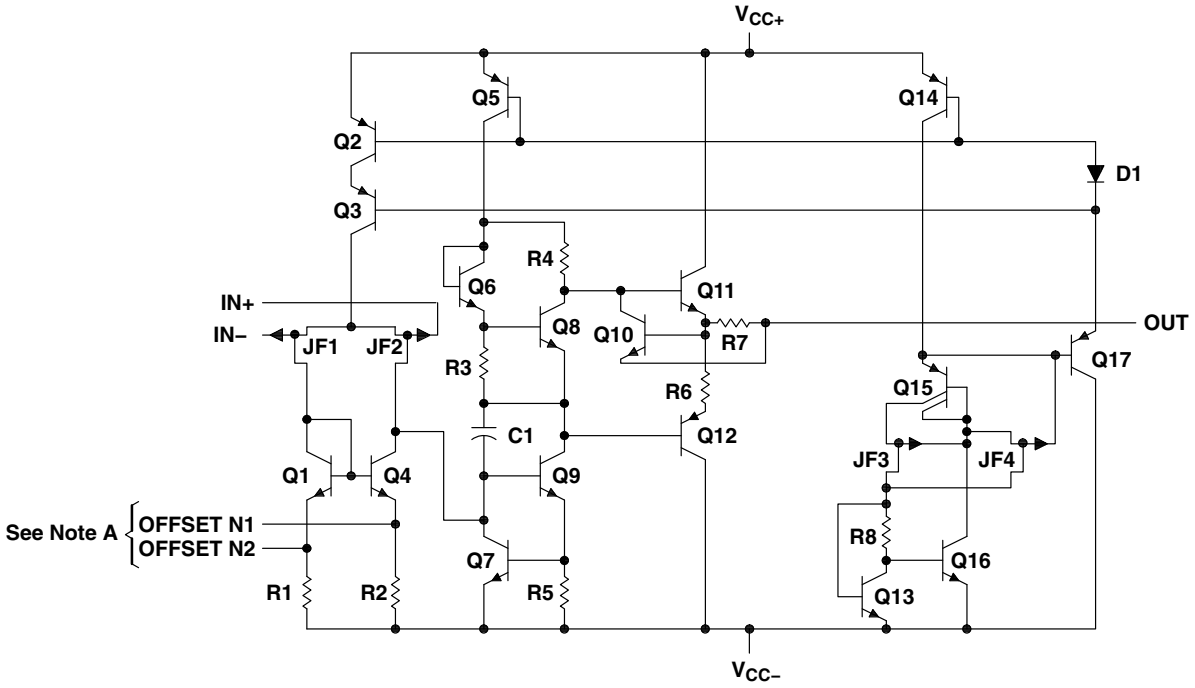

NOTE A: OFFSET N1 and OFFSET N2 are available only on the TL031, TL031A.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage (see Note 1): V_{CC+} . . . . . 18 V
V_{CC-} . . . . . –18 V
Differential input voltage, V_{ID} (see Note 2) . . . . . ±30 V
Input voltage, V_I (any input) (see Notes 1 and 3) . . . . . ±15 V
Input current, I_I (each input) . . . . . ±1 mA
Output current, I_O (each output) . . . . . ±40 mA
Total current into V_{CC+} . . . . . 160 mA
Total current out of V_{CC-} . . . . . 160 mA
Duration of short-circuit current at (or below) 25°C (see Note 4) . . . . . Unlimited
Continuous total power dissipation . . . . . See Dissipation Rating Table
Package thermal impedance, θ_{JA} (see Note 5): D package (8 pin) . . . . . 97°C/W
D package (14 pin) . . . . . 86°C/W
N package . . . . . 80°C/W
P package . . . . . 85°C/W
PW package . . . . . 113°C/W
Lead temperature 1,6 mm (1 /16 inch) from case for 10 seconds: D, N, P, or PW package . . . . . 260°C
Lead temperature 1,6 mm (1 /16 inch) from case for 60 seconds: J or JG package . . . . . 300°C
Case temperature for 60 seconds: FK package . . . . . 260°C
Storage temperature range, T_{stg} . . . . . –65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-}.
2. Differential voltages are at IN+ with respect to IN–.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
4. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.
5. The package thermal impedance is calculated in accordance with JESD 51-7.

DISSIPATION RATING TABLE

PACKAGE	$T_A \le 25°C$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25°C$	$T_A = 70°C$ POWER RATING	$T_A = 85°C$ POWER RATING	$T_A = 125°C$ POWER RATING
FK	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW
J	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW
JG	1050 mW	8.4 mW/°C	672 mW	546 mW	210 mW

recommended operating conditions

			C SUFFIX		I SUFFIX		M SUFFIX		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
$V_{CC\pm}$	Supply voltage		±5	±15	±5	±15	±5	±15	V
V_{IC}	Common-mode input voltage	$V_{CC\pm}$ = ±5 V	–1.5	4	–1.5	4	–1.5	4	V
		$V_{CC\pm}$ = ±15 V	–11.5	14	–11.5	14	–11.5	14	
T_A	Operating free-air temperature		0	70	–40	85	–55	125	°C

TL031C and TL031AC electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL031C, TL031AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL031C	25°C		0.54	3.5		0.5	1.5	mV
				Full range†			4.5			2.5	
			TL031AC	25°C		0.41	2.8		0.34	0.8	
				Full range†			3.8			1.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} =0, R_S = 50 Ω	TL031C	25°C to 70°C		7.1			5.9		µV/°C
			TL031AC	25°C to 70°C		7.1			5.9	25	
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} =0, R_S = 50 Ω		25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		1	100		1	100	pA
				70°C		9	200		12	200	
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		2	200		2	200	pA
				70°C		50	400		80	400	
V_{ICR}	Common-mode input voltage range			25°C	−1.5 to 4	−3.4 to 5.4		−11.5 to 14	−13.4 to 15.4		V
				Full range†	−1.5 to 4			−11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				0°C	3	4.2		13	14		
				70°C	3	4.3		13	14		
V_{OM-}	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	−3	−4.2		−12.5	−13.9		V
				0°C	−3	−4.1		−12.5	−13.9		
				70°C	−3	−4.2		−12.5	−14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		25°C	4	12		5	14.3		V/mV
				0°C	3	11.1		4	13.5		
				70°C	4	13.3		5	15.2		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			4		pF
CMRR	Common-mode rejection ratio	$V_{IC} = V_{ICR}$min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				0°C	70	87		75	94		
				70°C	70	87		75	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				0°C	75	96		75	96		
				70°C	75	96		75	96		

† Full range is 0°C to 70°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL031C and TL031AC electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL031C, TL031AC						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation	V_O = 0, No load	25°C		1.9	2.5		6.5	8.4	mW
			0°C		1.8	2.5		6.3	8.4	
			70°C		1.9	2.5		6.3	8.4	
I_{CC}	Supply current	V_O = 0, No load	25°C		192	250		217	280	µA
			0°C		184	250		211	280	
			70°C		189	250		210	280	

TL031C and TL031AC operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL031C, TL031AC						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		2		1.5	2.9		V/µs
					0°C		1.8		1	2.6		
					70°C		2.2		1.5	3.2		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		3.9		1.5	5.1		V/µs
					0°C		3.7		1.5	5		
					70°C		4		1.5	5		
t_r	Rise time		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					0°C		134			127		
					70°C		150			142		
t_f	Fall time		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		138			132		ns
					0°C		134			127		
					70°C		150			142		
	Overshoot factor		$V_{I(PP)}$ = ±10 mV, RL = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					0°C		10%			4%		
					70°C		12%			6%		
V_n	Equivalent input noise voltage	TL031C	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		61			61		nV/√Hz
				f = 1 kHz			41			41		
		TL031AC		f = 10 Hz	25°C		61			61		
				f = 1 kHz			41			41	60	
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B_1	Unity-gain bandwidth		V_I = 10 mV R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					0°C		1			1.1		
					70°C		1			1		
ϕ_m	Phase margin at unity gain		V_I = 10 mV R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					0°C		61°			65°		
					70°C		60°			64°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL031I and TL031AI electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL031I, TL031AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL031I	25°C		0.54	3.5		0.5	1.5	mV
				Full range†			5.3			3.3	
			TL031AI	25°C		0.41	2.8		0.34	0.8	
				Full range†			4.6			2.6	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL031I	25°C to 85°C		6.5			6.2		µV/°C
			TL031AI	25°C to 85°C		6.5			6.2	25	
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		1	100		1	100	pA
				85°C		0.02	0.45		0.02	0.45	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		2	200		2	200	pA
				85°C		0.2	0.9		0.2	0.9	nA
V_{ICR}	Common-mode input voltage range			25°C	−1.5 to 4	−3.4 to 5.4		−11.5 to 14	−13.4 to 15.4		V
				Full range†	−1.5 to 4			−11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				–40°C	3	4.1		13	14		
				85°C	3	4.4		13	14		
V_{OM-}	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–3	–4.2		–12.5	–13.9		V
				–40°C	–3	–4.1		–12.5	–13.8		
				85°C	–3	–4.2		–12.5	–14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		25°C	4	12		5	14.3		V/mV
				–40°C	3	8.4		4	11.6		
				85°C	4	13.5		5	15.3		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			4		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				–40°C	70	87		75	94		
				85°C	70	87		75	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				–40°C	75	96		75	96		
				85°C	75	96		75	96		

† Full range is –40°C to 85°C.
‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.
§ At $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL031I and TL031AI electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS		T_A	TL031I, TL031AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation	V_O = 0,	No load	25°C		1.9	2.5		6.5	8.4	mW
				–40°C		1.4	2.5		5.4	8.4	
				85°C		1.9	2.5		6.2	8.4	
I_{CC}	Supply current	V_O = 0,	No load	25°C		192	250		217	280	µA
				–40°C		144	250		181	280	
				85°C		189	250		207	280	

TL031I and TL031AI operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL031I, TL031AI						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		2		1.5	2.9		V/µs
					–40°C		1.6		1	2.1		
					85°C		2.3		1.5	3.3		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		3.9		1.5	5.1		V/µs
					–40°C		3.3		1.5	4.8		
					85°C		4.1		1.5	4.9		
t_r	Rise time		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					–40°C		132			123		
					85°C		154			146		
t_f	Fall time		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		138			132		ns
					–40°C		132			123		
					85°C		154			146		
	Overshoot factor		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					–40°C		12%			5%		
					85°C		13%			7%		
V_n	Equivalent input noise voltage	TL031I	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		61			61		nV/√Hz
				f = 1 kHz			41			41		
		TL031AI		f = 10 Hz	25°C		61			61		
				f = 1 kHz			41			41	60	
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B_1	Unity-gain bandwidth		V_I = 10 mV R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					–40°C		1			1.1		
					85°C		0.9			1		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					–40°C		60°			65°		
					85°C		60°			64°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL031M and TL031AM electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL031M, TL031AM						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL031M	25°C		0.54	3.5		0.5	1.5	mV
				Full range†			6.5			4.5	
			TL031AM	25°C		0.41	2.8		0.34	0.8	
				Full range†			5.8			3.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL031M	25°C to 125°C		5.1			4.3		µV/°C
			TL031AM	25°C to 125°C		5.1			4.3		
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		1	100		1	100	pA
				125°C		0.2	10		0.2	10	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		2	200		2	200	pA
				125°C		7	20		8	20	nA
V_{ICR}	Common-mode input voltage range			25°C	−1.5 to 4	−3.4 to 5.4		−11.5 to 14	−13.4 to 15.4		V
				Full range†	−1.5 to 4			−11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				−55°C	3	4.1		13	14		
				125°C	3	4.4		13	14		
V_{OM-}	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	−3	−4.2		−12.5	−13.9		V
				−55°C	−3	−4		−12.5	−13.8		
				125°C	−3	−4.3		−12.5	−14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		25°C	4	12		5	14.3		V/mV
				−55°C	3	7.1		4	10.4		
				125°C	3	12.9		4	15		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			4		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				−55°C	70	87		70	94		
				125°C	70	87		70	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				−55°C	75	96		75	95		
				125°C	75	96		75	96		
P_D	Total power dissipation	V_O = 0, No load		25°C		1.9	2.5		6.5	8.4	mW
				−55°C		1.1	2.5		4.7	8.4	
				125°C		1.8	2.5		5.8	8.4	

† Full range is −55°C to 125°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL031M and TL031AM electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL031M, TL031AM						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
I_{CC}	Supply current	V_O = 0, No load	25°C		192	250		217	280	µA
			–55°C		114	250		156	280	
			125°C		178	250		197	280	

TL031M and TL031AM operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL031M, TL031AM						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		2		1.5	2.9		V/µs
					–55°C		1.4		1	1.9		
					125°C		2.4		1	3.5		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		3.9		1.5	5.1		V/µs
					–55°C		3.2		1	4.6		
					125°C		4.1		1	4.7		
t_r	Rise time		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					–55°C		142			123		
					125°C		166			158		
t_f	Fall time		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		138			132		ns
					–55°C		142			123		
					125°C		166			158		
	Overshoot factor		$V_{I(PP)}$ = ±10 mV, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					–55°C		16%			6%		
					125°C		14%			8%		
V_n	Equivalent input noise voltage	TL031M	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		61			61		nV/√Hz
				f = 1 kHz			41			41		
		TL031AM		f = 10 Hz	25°C		61			61		
				f = 1 kHz			41			41		
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B_1	Unity-gain bandwidth		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					–55°C		1			1.1		
					125°C		0.9			0.9		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					–55°C		57°			64°		
					125°C		59°			62°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL032C and TL032AC electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL032C, TL032AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL032C	25°C		0.69	3.5		0.57	1.5	mV
				Full range†			4.5			2.5	
			TL032AC	25°C		0.53	2.8		0.39	0.8	
				Full range†			3.8			1.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL032C	25°C to 70°C		11.5			10.8		µV/°C
			TL032AC	25°C to 70°C		11.5			10.8	25	
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, See Figure 5	V_{IC} = 0	25°C		1	100		1	100	pA
				70°C		9	200		12	200	
I_{IB}	Input bias current	V_O = 0, See Figure 5	V_{IC} = 0	25°C		2	200		2	200	pA
				70°C		50	400		80	400	
V_{ICR}	Common-mode input voltage range			25°C	–1.5 to 4	–3.4 to 5.4		–11.5 to 14	–13.4 to 15.4		V
				Full range†	–1.5 to 4			–11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				0°C	3	4.2		13	14		
				70°C	3	4.3		13	14		
V_{OM-}	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–3	–4.2		–12.5	–13.9		V
				0°C	–3	–4.1		–12.5	–13.9		
				70°C	–3	–4.2		–12.5	–14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		25°C	4	12		5	14.3		V/mV
				0°C	3	11.1		4	13.5		
				70°C	4	13.3		5	15.2		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			14		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				0°C	70	87		75	94		
				70°C	70	87		75	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm}$ = ±5 V to ±15 V, V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				0°C	75	96		75	96		
				70°C	75	96		75	96		

† Full range is 0°C to 70°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = 2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL032C and TL032AC electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL032C, TL032AC						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation (two amplifiers)	V_O = 0, No load	25°C		3.8	5		13	17	mW
			0°C		3.7	5		12.7	17	
			70°C		3.8	5		12.6	17	
I_{CC}	Supply current (two amplifiers)	V_O = 0, No load	0°C		368	500		422	560	µA
			70°C		378	500		420	560	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100 dB	25°C		120			120		dB

TL032C and TL032AC operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL032C, TL032AC						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		1.2		1.5	2.9		V/µs
					0°C		1.8		1	2.6		
					70°C		2.2		1.5	3.2		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		3.9		1.5	5.1		V/µs
					0°C		3.7		1.5	5		
					70°C		4		1.5	5		
t_r	Rise time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					0°C		134			127		
					70°C		150			142		
t_f	Fall time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					0°C		134			127		
					70°C		150			142		
	Overshoot factor		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					0°C		10%			4%		
					70°C		12%			6%		
V_n	Equivalent input noise voltage	TL032C	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		49			49		nV/√Hz
				f = 1 kHz			41			41		
		TL032AC		f = 10 Hz	25°C		49			49		
				f = 1 kHz			41			41	60	
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B_1	Unity-gain bandwidth		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					0°C		1			1.1		
					70°C		1			1		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					0°C		61°			65°		
					70°C		60°			64°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL032I and TL032AI electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL032I, TL032AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL032I	25°C		0.69	3.5		0.57	1.5	mV
				Full range†			5.3			3.3	
			TL032AI	25°C		0.53	2.8		0.39	0.8	
				Full range†			4.6			2.6	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL032I	25°C to 85°C		11.4			10.8		µV/°C
			TL032AI	25°C to 85°C		11.4			10.8	25	
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, See Figure 5	V_{IC} = 0	25°C		1	100		1	100	pA
				85°C		0.02	0.45		0.02	0.45	nA
I_{IB}	Input bias current	V_O = 0, See Figure 5	V_{IC} = 0	25°C		2	200		2	200	pA
				85°C		0.2	0.9		0.3	0.9	nA
V_{ICR}	Common-mode input voltage range			25°C	–1.5 to 4	–3.4 to 5.4		–11.5 to 14	–13.4 to 15.4		V
				Full range†	–1.5 to 4			–11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				–40°C	3	4.2		13	14		
				85°C	3	4.4		13	14		
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–3	–4.2		–12.5	–13.9		V
				–40°C	–3	–4.1		–12.5	–13.8		
				85°C	–3	–4.2		–12.5	–14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		–40°C	3	8.4		4	11.6		V/mV
				85°C	4	13.5		5	15.3		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			4		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				–40°C	70	87		75	94		
				85°C	70	87		75	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm}$ = ±5 V to ±15 V, V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				–40°C	75	96		75	96		
				85°C	75	96		75	96		

† Full range is –40°C to 85°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = 2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL032I and TL032AI electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL032I, TL032AI						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation (two amplifiers)	V_O = 0, No load	25°C		3.8	5		13	17	mW
			–40°C		2.9	5		10.9	17	
			85°C		3.7	5		12.4	17	
I_{CC}	Supply current (two amplifiers)	V_O = 0, No load	25°C		384	500		434	560	µA
			–40°C		288	500		362	560	
			85°C		372	500		414	560	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100 dB	25°C		120			120		dB

TL032I and TL032AI operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL032I, TL032AI						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF		25°C		2		1.5	2.9		V/µs
					–40°C		1.6		1	2.1		
					85°C		2.3		1.5	3.3		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF		25°C		3.9		1.5	5.1		V/µs
					–40°C		3.3		1.5	4.8		
					85°C		4.1		1.5	4.9		
t_r	Rise time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					–40°C		132			123		
					85°C		154			146		
t_f	Fall time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		138			132		ns
					–40°C		132			123		
					85°C		154			146		
	Overshoot factor		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					–40°C		12%			5%		
					85°C		13%			7%		
V_n	Equivalent input noise voltage	TL032I	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		49			49		nV/√Hz
				f = 1 kHz			41			41		
		TL032AI		f = 10 Hz	25°C		49			49		
				f = 1 kHz			41			41	60	
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B_1	Unity-gain bandwidth		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					–40°C		1			1.1		
					85°C		0.9			1		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					–40°C		61°			65°		
					85°C		60°			64°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL032M and TL032AM electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL032M, TL032AM						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL032M	25°C		0.69	3.5		0.57	1.5	mV
				Full range†			6.5			4.5	
			TL032AM	25°C		0.53	2.8		0.39	0.8	
				Full range†			5.8			3.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL032M	25°C to 125°C		9.7			9.7		µV/°C
			TL032AM	25°C to 125°C		9.7			9.7		
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, See Figure 5	V_{IC} = 0	25°C		1	100		1	100	pA
				125°C		0.2	10		0.2	10	nA
I_{IB}	Input bias current	V_O = 0, See Figure 5	V_{IC} = 0	25°C		2	200		2	200	pA
				125°C		7	20		8	20	nA
V_{ICR}	Common-mode input voltage range			25°C	–1.5 to 4	–3.4 to 5.4		–11.5 to 14	–13.4 to 15.4		V
				Full range†	–1.5 to 4			–11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				–55°C	3	4.1		13	14		
				125°C	3	4.4		13	14		
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–3	–4.2		–12.5	–13.9		V
				–55°C	–3	–4		–12.5	–13.8		
				125°C	–3	–4.3		–12.5	–14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		25°C	4	12		5	14.3		V/mV
				–55°C	3	7.1		4	10.4		
				125°C	3	12.9		4	15		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			4		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				–55°C	70	87		70	94		
				125°C	70	87		70	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm}$ = ±5 V to ±15 V, V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				–55°C	75	95		75	95		
				125°C	75	96		75	96		

† Full range is –55°C to 125°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = 2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL032M and TL032AM electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS		T_A	TL032M, TL032AM						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation (two amplifiers) V_O = 0,	V_O = 0,	No load	25°C		3.8	5		13	17	mW
				–55°C		2.3	5		9.4	17	
				125°C		3.6	5		11.8	17	
I_{CC}	Supply current (two amplifiers)	V_O = 0,	No load	25°C		384	500		434	560	µA
				–55°C		228	500		312	560	
				125°C		356	500		394	560	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100 dB		25°C		120			120		dB

TL032M and TL032AM operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL032M, TL032AM						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See and Figure 1		25°C		2		1.5	2.9		V/µs
					–55°C		1.4		1	1.9		
					125°C		2.4		1	3.5		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See and Figure 1		25°C		3.9		1.5	5.1		V/µs
					–55°C		3.2		1	4.6		
					125°C		4.1		1	4.7		
t_r	Rise time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					–55°C		142			123		
					125°C		166			58		
t_f	Fall time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		138			132		ns
					–55°C		142			123		
					125°C		166			158		
	Overshoot factor		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					–55°C		16%			6%		
					125°C		14%			8%		
V_n	Equivalent input noise voltage	TL032M	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		49			49		nV/√Hz
				f = 1 kHz			41			41		
		TL032AM		f = 10 Hz	25°C		49			49		
				f = 1 kHz			41			41		
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B1	Unity-gain bandwidth		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					–55°C		1			1.1		
					125°C		0.9			0.9		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					–55°C		57°			64°		
					125°C		59°			62°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL034C and TL034AC electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL034C, TL034AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL034C	25°C		0.91	6		0.79	4	mV
				Full range†			8.2			6.2	
			TL034AC	25°C		0.7	3.5		0.58	1.5	
				Full range†			5.7			3.7	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL034C	25°C to 70°C		11.6			12		μV/°C
			TL034AC	25°C to 70°C		11.6			12	25	
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		μV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		1	100		1	100	pA
				70°C		9	200		12	200	
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		2	200		2	200	pA
				70°C		50	400		80	400	
V_{ICR}	Common-mode input voltage range			25°C	–1.5 to 4	–3.4 to 5.4		–11.5 to 14	–13.4 to 15.4		V
				Full range†	–1.5 to 4			–11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				0°C	3	4.2		13	14		
				70°C	3	4.3		13	14		
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–3	–4.2		–12.5	–13.9		V
				0°C	–3	–4.1		–12.5	–13.9		
				70°C	–3	–4.2		–12.5	–14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		25°C	4	12		5	14.3		V/mV
				0°C	3	11.1		4	13.5		
				70°C	4	13.3		5	15.2		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			14		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				0°C	70	87		75	94		
				70°C	70	87		75	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				0°C	75	96		75	96		
				70°C	75	96		75	96		

† Full range is 0°C to 70°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL034C and TL034AC electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL034C, TL034AC						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation (two amplifiers)	V_O = 0, No load	25°C		7.7	10		26	34	mW
			0°C		7.4	10		25.3	34	
			70°C		7.6	10		25.2	34	
I_{CC}	Supply current (four amplifiers)	V_O = 0, No load	25°C		0.77	1		0.87	1.12	mA
			0°C		0.74	1		0.85	1.12	
			70°C		0.76	1		0.84	1.12	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100	25°C		120			120		dB

TL034C and TL034AC operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL034C, TL034AC						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		2		1.5	2.9		V/μs
					0°C		1.8		1	2.6		
					70°C		2.2		1.5	3.2		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		3.9		1.5	5.1		V/μs
					0°C		3.7		1.5	5		
					70°C		4		1.5	5		
t_r	Rise time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					0°C		134			127		
					70°C		150			142		
t_f	Fall time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		138			132		ns
					0°C		134			127		
					70°C		150			142		
	Overshoot factor		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					0°C		10%			4%		
					70°C		12%			6%		
V_n	Equivalent input noise voltage	TL034C	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		83			83		nV/√Hz
				f = 1 kHz			43			43		
		TL034AC		f = 10 Hz	25°C		83			83		
				f = 1 kHz			43			43	60	
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B_1	Unity-gain bandwidth		V_I = 10 mV R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					0°C		1			1.1		
					70°C		1			1		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					0°C		61°			65°		
					70°C		60°			64°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL034I and TL034AI electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL034I, TL034AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL034I	25°C		0.91	3.6		0.79	4	mV
				Full range†			9.3			7.3	
			TL034AI	25°C		0.7	3.5		0.58	1.5	
				Full range†			6.8			4.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL034I	25°C to 85°C		11.5			11.6		µV/°C
			TL034AI	25°C to 85°C		11.5			11.6	25	
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		1	100		1	100	pA
				85°C		0.02	0.45		0.02	0.45	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		2	200		2	200	pA
				85°C		0.2	0.9		0.3	0.9	nA
V_{ICR}	Common-mode input voltage range			25°C	–1.5 to 4	–3.4 to 5.4		–11.5 to 14	–13.4 to 15.4		V
				Full range†	–1.5 to 4			–11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				–40°C	3	4.1		13	14		
				85°C	3	4.4		13	14		
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–3	–4.2		–12.5	–13.9		V
				–40°C	–3	–4.1		–12.5	–13.8		
				85°C	–3	–4.2		–12.5	–14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		–40°C	4	12		5	14.3		V/mV
				85°C	3	8.4		4	11.6		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			4		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				–40°C	70	87		75	94		
				85°C	70	87		75	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}$/ ΔV_{IO})	V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				–40°C	75	96		75	96		
				85°C	75	96		75	96		

† Full range is –40°C to 85°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL034I and TL034AI electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL034I, TL034AI						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation (four amplifiers)	V_O = 0, No load	25°C		7.7	10		26	34	mW
			–40°C		5.8	10		21.7	34	
			85°C		7.4	10		24.8	34	
I_{CC}	Supply current (four amplifiers)	V_O = 0, No load	25°C		0.77	1		0.87	1.12	mA
			–40°C		0.58	1		0.72	1.12	
			85°C		0.74	1		0.83	1.12	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100	25°C		120			120		dB

TL034I and TL034AI operating characteristics

PARAMETER			TEST CONDITIONS		T_A	TL034I, TL034AI						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		2		1.5	2.9		V/μs
					–40°C		1.6		1	2.1		
					85°C		2.3		1.5	3.3		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		3.9		1.5	5.1		V/μs
					–40°C		3.3		1.5	4.8		
					85°C		4.1		1.5	4.9		
t_r	Rise time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					–40°C		132			123		
					85°C		154			146		
t_f	Fall time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					–40°C		132			123		
					85°C		154			146		
	Overshoot factor		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					–40°C		12%			5%		
					85°C		13%			7%		
V_n	Equivalent input noise voltage	TL034I	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		83			83		nV/√Hz
				f = 1 kHz			43			43		
		TL034AI		f = 10 Hz	25°C		83			83		
				f = 1 kHz			43			43	60	
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B_1	Unity-gain bandwidth		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					–40°C		1			1.1		
					85°C		0.9			1		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					–40°C		61°			65°		
					85°C		60°			64°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

TL034M and TL034AM electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A	TL034M, TL034AM						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL034M	25°C		0.91	3.6		0.78	4	mV
				Full range†			11			9	
			TL034AM	25°C		0.7	3.5		0.58	1.5	
				Full range†			8.5			6.5	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL034M	25°C to 125°C		10.6			10.9		μV/°C
			TL034AM	25°C to 125°C		10.6			10.9		
	Input offset voltage long-term drift‡	V_O = 0, V_{IC} = 0, R_S = 50 Ω		25°C		0.04			0.04		μV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		1	100		1	100	pA
				125°C		0.2	10		0.2	10	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0 See Figure 5		25°C		2	200		2	200	pA
				125°C		7	20		8	20	nA
V_{ICR}	Common-mode input voltage range			25°C	–1.5 to 4	–3.4 to 5.4		–11.5 to 14	–13.4 to 15.4		V
				Full range†	–1.5 to 4			–11.5 to 14			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.3		13	14		V
				–55°C	3	4.1		13	14		
				125°C	3	4.4		13	14		
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–3	–4.2		–12.5	–13.9		V
				–55°C	–3	–4		–12.5	–13.8		
				125°C	–3	–4.3		–12.5	–14		
A_{VD}	Large-signal differential voltage amplification§	R_L = 10 kΩ		25°C	4	12		5	14.3		V/mV
				–55°C	3	7.1		4	10.4		
				125°C	3	12.9		4	15		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		5			4		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	70	87		75	94		dB
				–55°C	70	87		70	94		
				125°C	70	87		70	94		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω		25°C	75	96		75	96		dB
				–55°C	75	95		75	95		
				125°C	75	96		75	96		

† Full range is –55°C to 125°C.

‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C extrapolated to T_A = 25°C using the Arrhenius equation and assuming an activation energy of 0.96 eV.

§ At $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V

TL034M and TL034AM electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL034M, TL034AM						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
P_D	Total power dissipation (two amplifiers)	V_O = 0, No load	25°C		7.7	10		26	34	mW
			–55°C		4.6	12		18.7	45	
			125°C		7.1	12		23.6	45	
I_{CC}	Supply current (two amplifiers)	V_O = 0, No load	25°C		0.77	1		0.87	1.12	mA
			–55°C		0.46	1.2		0.62	1.5	
			125°C		0.71	1.2		0.79	1.5	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100	25°C		120			120		dB

TL034M and TL034AM operating characteristics at specified free-air temperature

PARAMETER			TEST CONDITIONS		T_A	TL034M, TL034AM						UNIT
						$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
						MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		2		1.5	2.9		V/μs
					–55°C		1.4		1	1.9		
					125°C		2.4		1	3.5		
SR–	Negative slew rate at unity gain†		R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		3.9		1.5	5.1		V/μs
					–55°C		3.2		1	4.6		
					125°C		4.1		1	4.7		
t_r	Rise time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		138			132		ns
					–55°C		142			123		
					125°C		166			58		
t_f	Fall time		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figure 1		25°C		138			132		ns
					–55°C		142			123		
					125°C		166			158		
	Overshoot factor		$V_{I(PP)}$ = ±10 V, R_L = 10 kΩ, C_L = 100 pF See Figures 1 and 2		25°C		11%			5%		
					–55°C		16%			6%		
					125°C		14%			8%		
V_n	Equivalent input noise voltage	TL034M	R_S = 20 Ω See Figure 3	f = 10 Hz	25°C		83			83		nV/√Hz
				f = 1 kHz			43			43		
		TL034AM		f = 10 Hz	25°C		83			83		
				f = 1 kHz			43			43		
I_n	Equivalent input noise current		f = 1 kHz		25°C		0.003			0.003		pA/√Hz
B1	Unity-gain bandwidth		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		1			1.1		MHz
					–55°C		1			1.1		
					125°C		0.9			0.9		
ϕ_m	Phase margin at unity gain		V_I = 10 mV, R_L = 10 kΩ, C_L = 25 pF See Figure 4		25°C		61°			65°		
					–55°C		57°			64°		
					125°C		59°			62°		

† For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V

PARAMETER MEASUREMENT INFORMATION

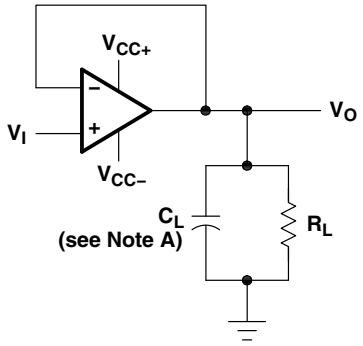

NOTE A: C_L includes fixture capacitance.

Figure 1. Slew-Rate and Overshoot Test Circuit

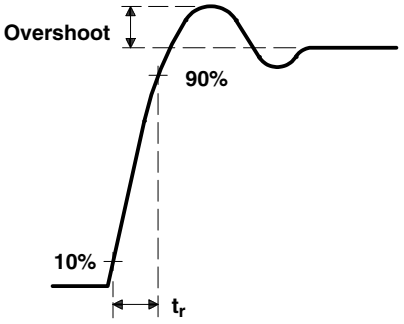

Figure 2. Rise Time and Overshoot Waveform

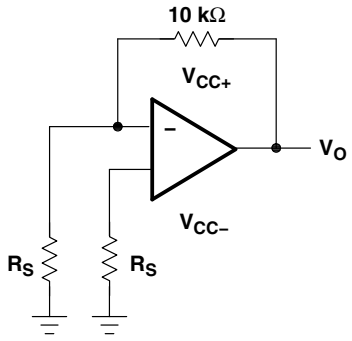

Figure 3. Noise-Voltage Test Circuit

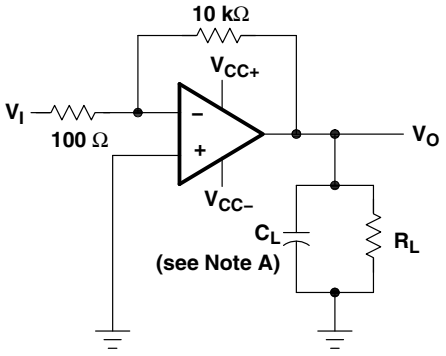

NOTE A: C_L includes fixture capacitance.

Figure 4. Unity-Gain Bandwidth and Phase-Margin Test Circuit

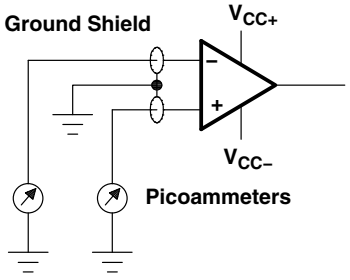

Figure 5. Input-Bias and Offset-Current Test Circuit

PARAMETER MEASUREMENT INFORMATION

typical values

Typical values presented in this data sheet represent the median (50% point) of device parametric performance.

input bias and offset current

At the picoampere bias current level typical of the TL03x and TL03xA, accurate measurement of the bias current becomes difficult. Not only does this measurement require a picoammeter, but test-socket leakages easily can exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied but with no device in the socket. The device is then inserted into the socket and a second test that measures both the socket leakage and the device input bias current is performed. The two measurements are then subtracted algebraically to determine the bias current of the device.

noise

With the increasing emphasis on low noise levels in many of today's applications, the input noise voltage density is performed at f = 1 kHz, unless otherwise noted.

TYPICAL CHARACTERISTICS

Table of Graphs

	FIGURE
Distribution of TL03x input offset voltage	6–11
Distribution of TL03x input offset-voltage temperature coefficient	12–14
Input bias current vs Common-mode input voltage	15
Input bias current and input offset current vs Free-air temperature	16
Common-mode input voltage vs Supply voltage	17
Common-mode input voltage vs Free-air temperature	18
Output voltage vs Differential input voltage	19, 20
Maximum peak output voltage vs Supply voltage	21
Maximum peak-to-peak output voltage vs Frequency	22
Maximum peak output voltage vs Output current	23, 24
Maximum peak output voltage vs Free-air temperature	25, 26
Large-signal differential voltage amplification vs Load resistance	27
Large-signal differential voltage amplification and Phase shift vs Frequency	28
Large-signal differential voltage amplification vs Free-air temperature	29
Output impedance vs Frequency	30
Common-mode rejection ratio vs Frequency	31, 32
Common-mode rejection ratio vs Free-air temperature	33
Supply-voltage rejection ratio vs Free-air temperature	34
Short-circuit output current vs Supply voltage	35
Short-circuit output current vs Time	36
Short-circuit output current vs Free-air temperature	37
Equivalent input noise voltage vs Frequency (TL031 and TL031A)	38
Equivalent input noise voltage vs Frequency (TL032 and TL032A)	39
Equivalent input noise voltage vs Frequency (TL034 and TL034A)	40
Supply current vs Supply voltage (TL031 and TL031A)	41
Supply current vs Supply voltage (TL032 and TL032A)	42
Supply current vs Supply voltage (TL034 and TL034A)	43
Supply current vs Free-air temperature (TL031 and TL031A)	44
Supply current vs Free-air temperature (TL032 and TL032A)	45
Supply current vs Free-air temperature (TL034 and TL034A)	46
Slew rate vs Load resistance	47, 48
Slew rate vs Free-air temperature	49, 50
Overshoot factor vs Load capacitance	51
Total harmonic distortion vs Frequency	52
Unity-gain bandwidth vs Supply voltage	53
Unity-gain bandwidth vs Free-air temperature	54
Phase margin vs Supply voltage	55
Phase margin vs Load capacitance	56
Phase margin vs Free-air temperature	57
Voltage-follower small-signal pulse response	58
Voltage-follower large-signal pulse response	59, 60

TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TL031
INPUT OFFSET VOLTAGE**

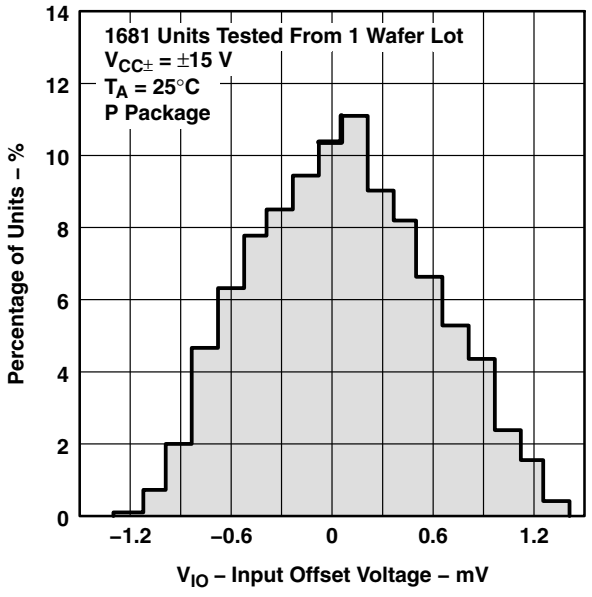

Figure 6

**DISTRIBUTION OF TL031A
INPUT OFFSET VOLTAGE**

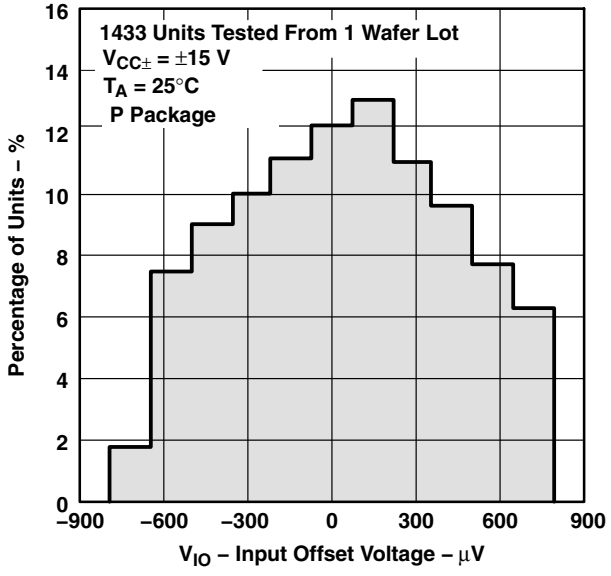

Figure 7

**DISTRIBUTION OF TL032
INPUT OFFSET VOLTAGE**

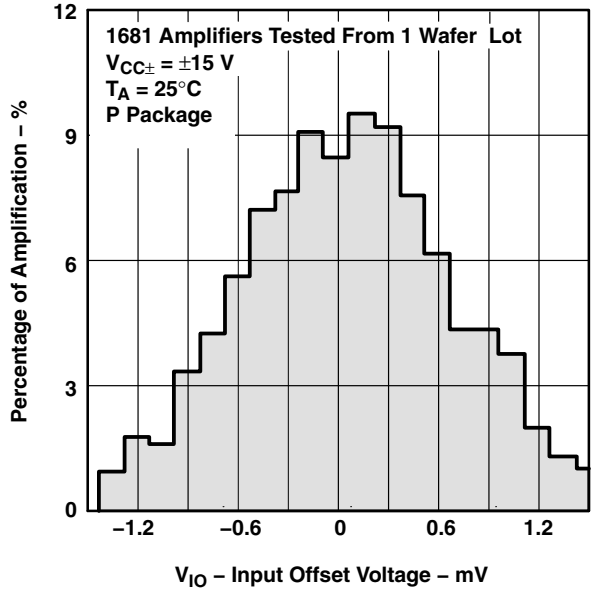

Figure 8

**DISTRIBUTION OF TL032A
INPUT OFFSET VOLTAGE**

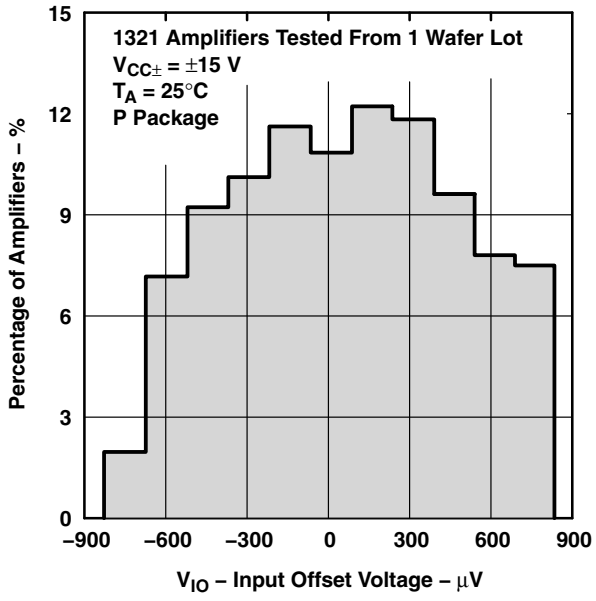

Figure 9

TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TL034
INPUT OFFSET VOLTAGE**

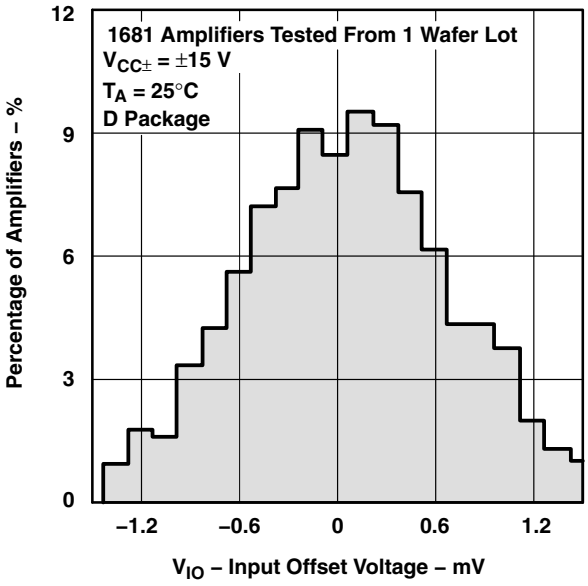

Figure 10

**DISTRIBUTION OF TL034A
INPUT OFFSET VOLTAGE**

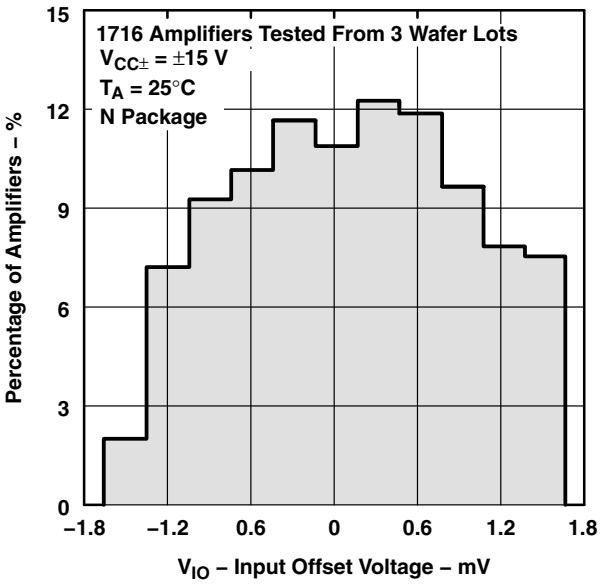

Figure 11

**DISTRIBUTION OF TL031
INPUT OFFSET-VOLTAGE
TEMPERATURE COEFFICIENT**

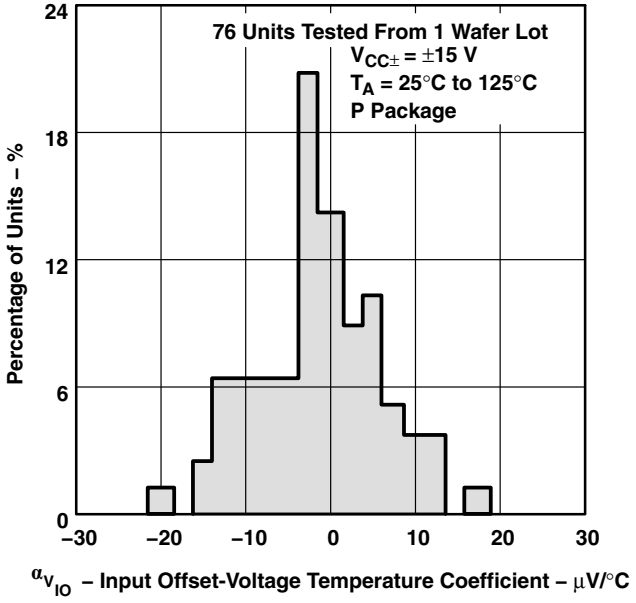

Figure 12

**DISTRIBUTION OF TL032
INPUT OFFSET-VOLTAGE
TEMPERATURE COEFFICIENT**

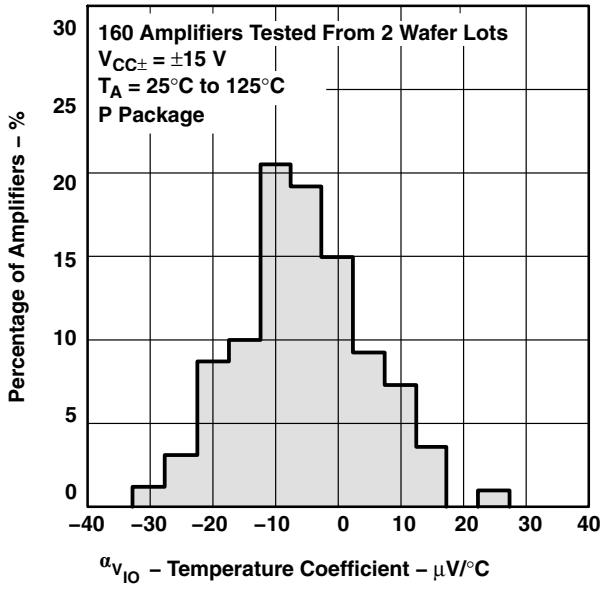

Figure 13

TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TL034
INPUT OFFSET-VOLTAGE
TEMPERATURE COEFFICIENT**

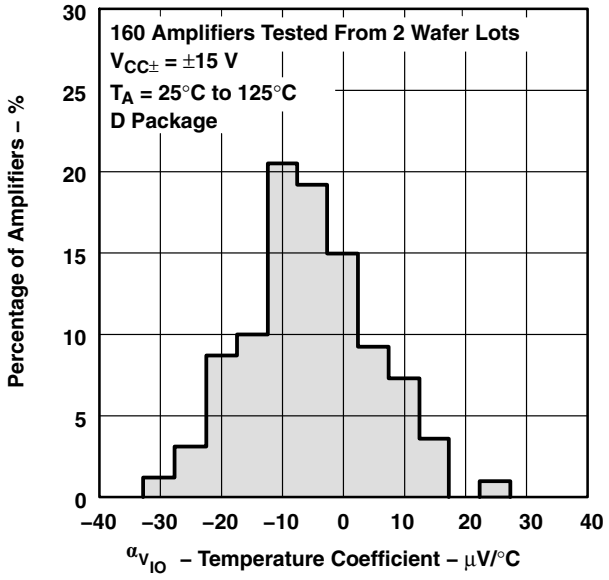

Figure 14

**INPUT BIAS CURRENT
vs
COMMON-MODE INPUT VOLTAGE**

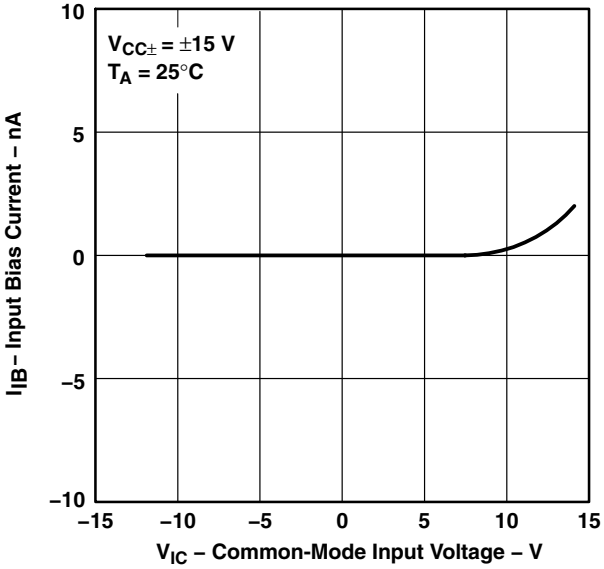

Figure 15

**INPUT BIAS CURRENT AND
INPUT OFFSET CURRENT†
vs
FREE-AIR TEMPERATURE**

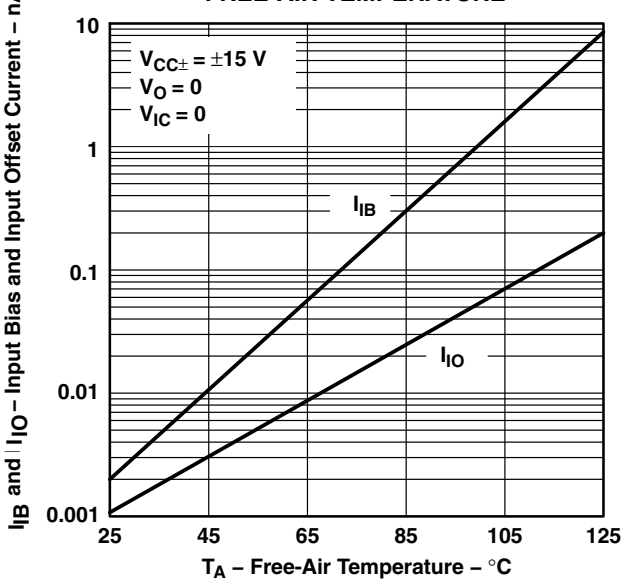

Figure 16

**COMMON-MODE INPUT VOLTAGE
vs
SUPPLY VOLTAGE**

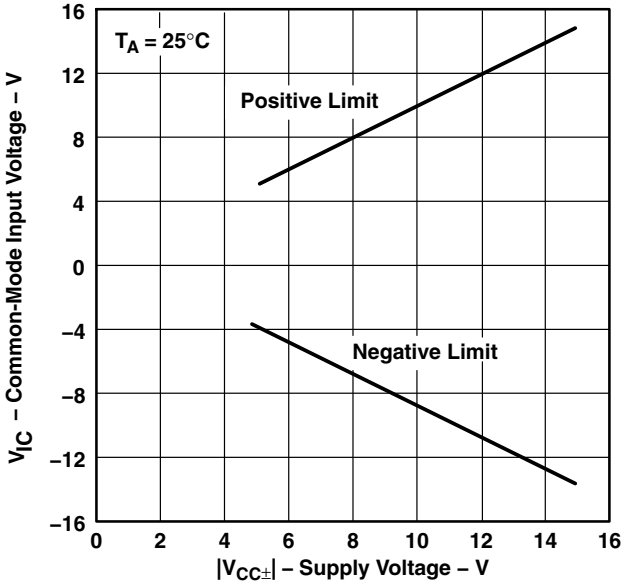

Figure 17

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

COMMON-MODE INPUT VOLTAGE† vs FREE-AIR TEMPERATURE

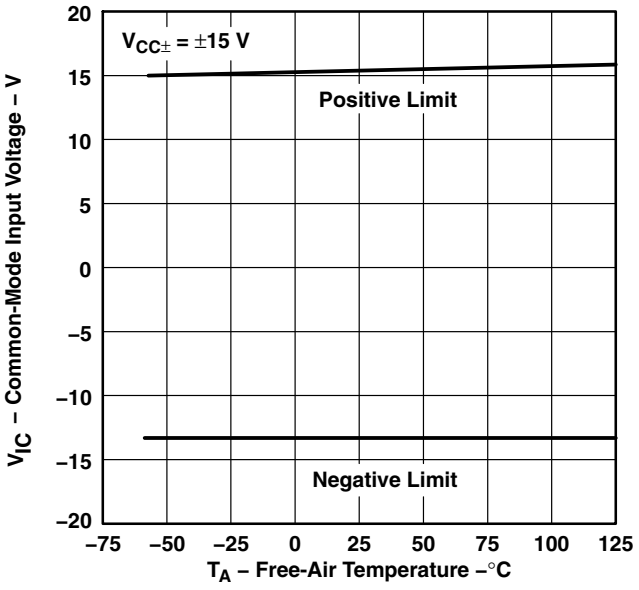

Figure 18

OUTPUT VOLTAGE vs DIFFERENTIAL INPUT VOLTAGE

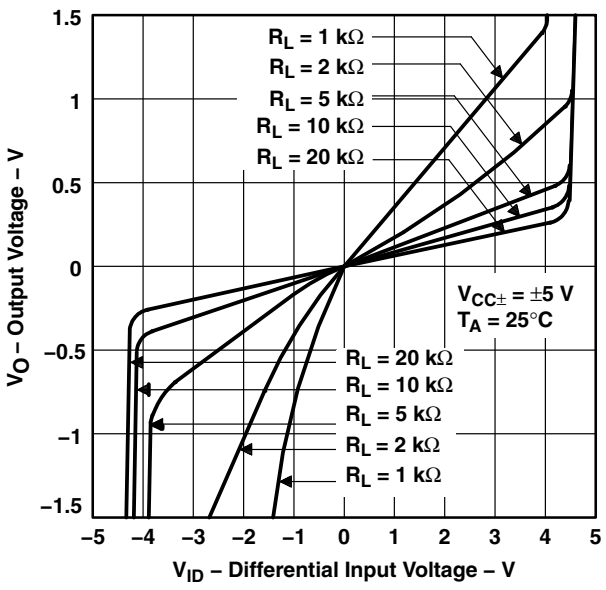

Figure 19

OUTPUT VOLTAGE vs DIFFERENTIAL INPUT VOLTAGE

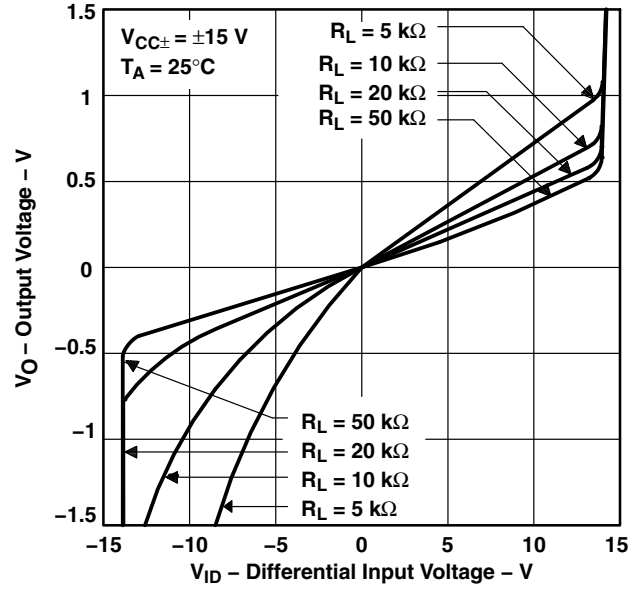

Figure 20

MAXIMUM PEAK OUTPUT VOLTAGE vs SUPPLY VOLTAGE

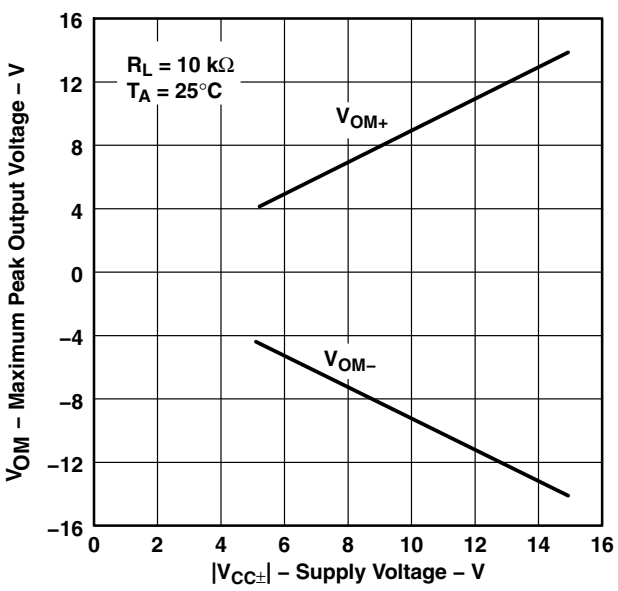

Figure 21

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE† vs FREQUENCY

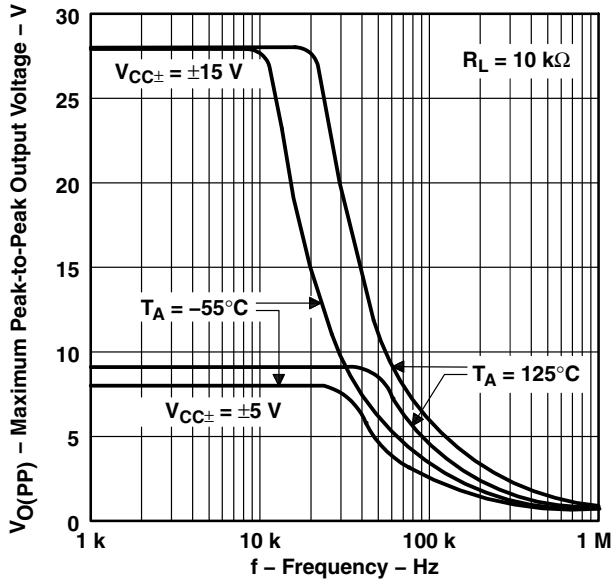

Figure 22

MAXIMUM PEAK OUTPUT VOLTAGE vs OUTPUT CURRENT

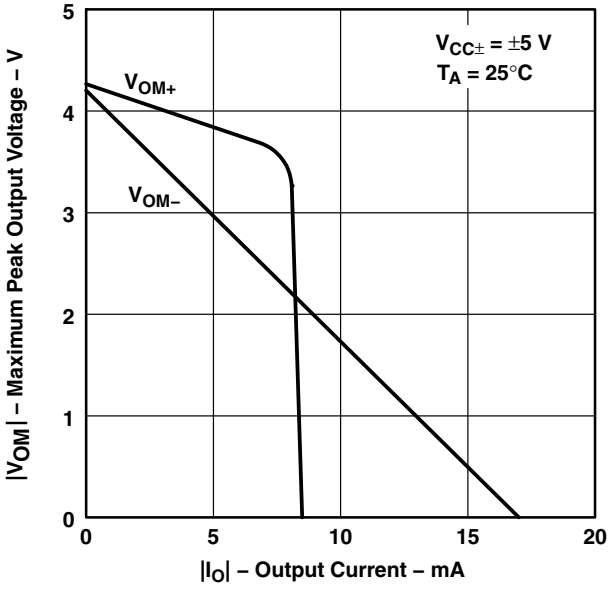

Figure 23

MAXIMUM PEAK OUTPUT VOLTAGE vs OUTPUT CURRENT

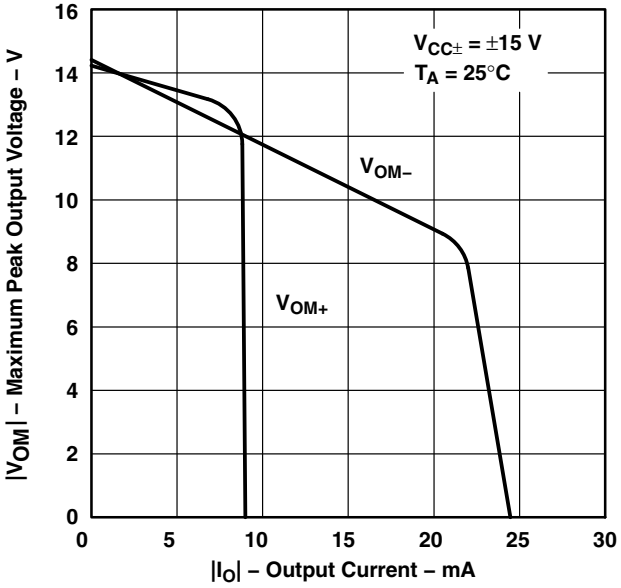

Figure 24

MAXIMUM PEAK OUTPUT VOLTAGE† vs FREE-AIR TEMPERATURE

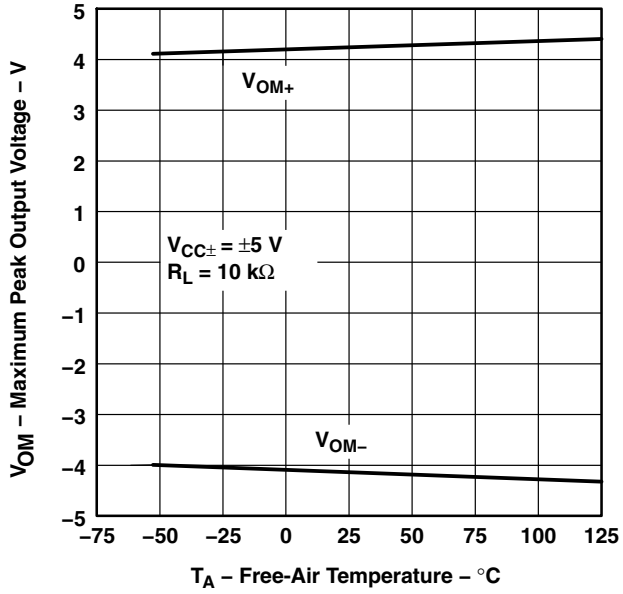

Figure 25

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

MAXIMUM PEAK OUTPUT VOLTAGE† vs FREE-AIR TEMPERATURE

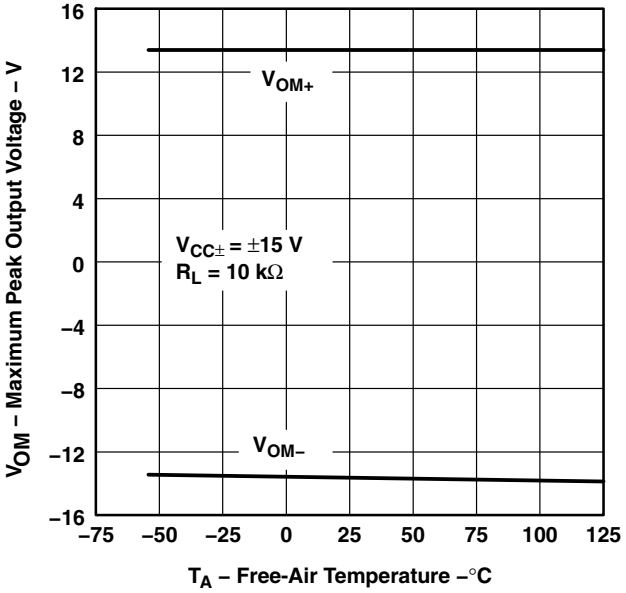

Figure 26

LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION vs LOAD RESISTANCE

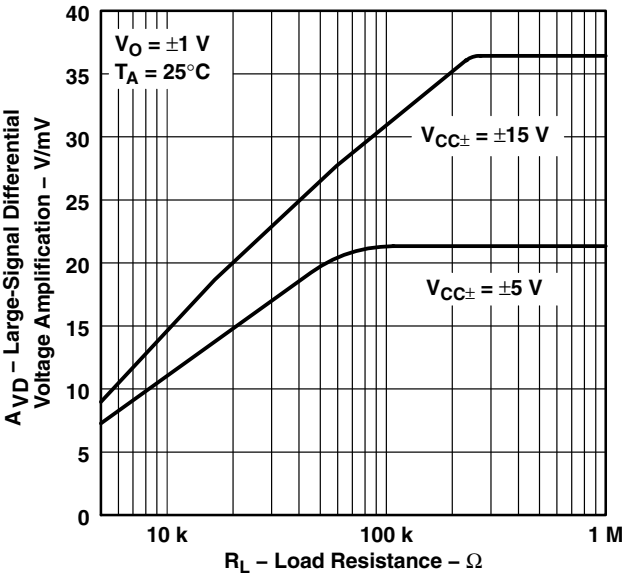

Figure 27

LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT vs FREQUENCY

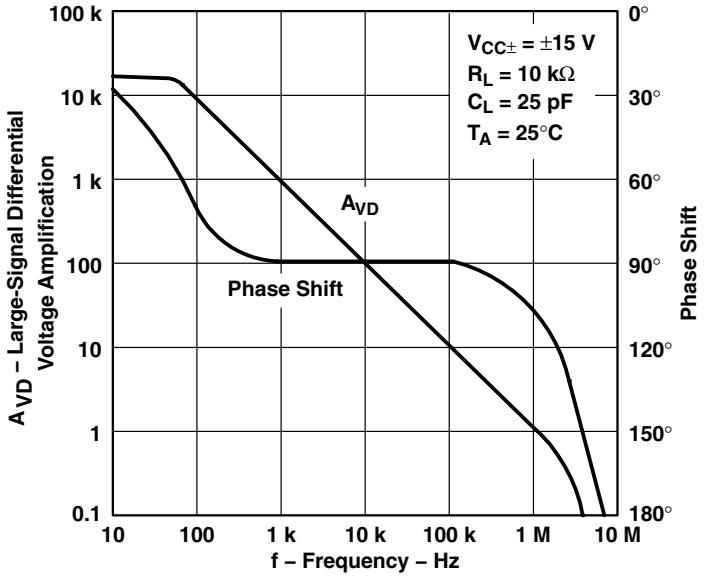

Figure 28

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION† vs FREE-AIR TEMPERATURE

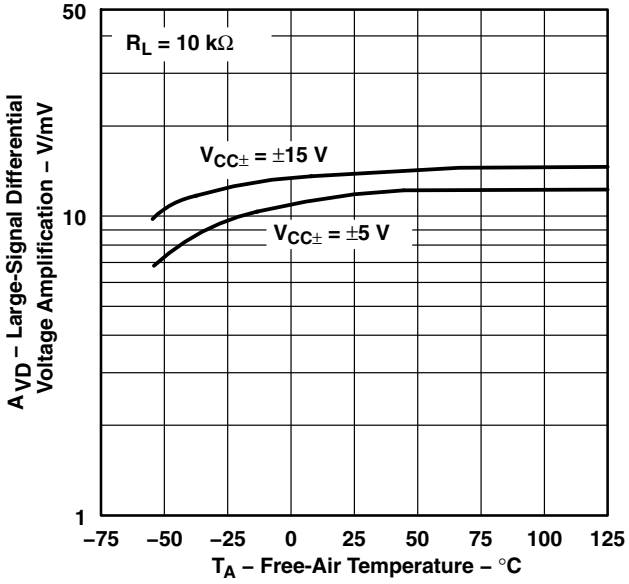

Figure 29

OUTPUT IMPEDANCE vs FREQUENCY

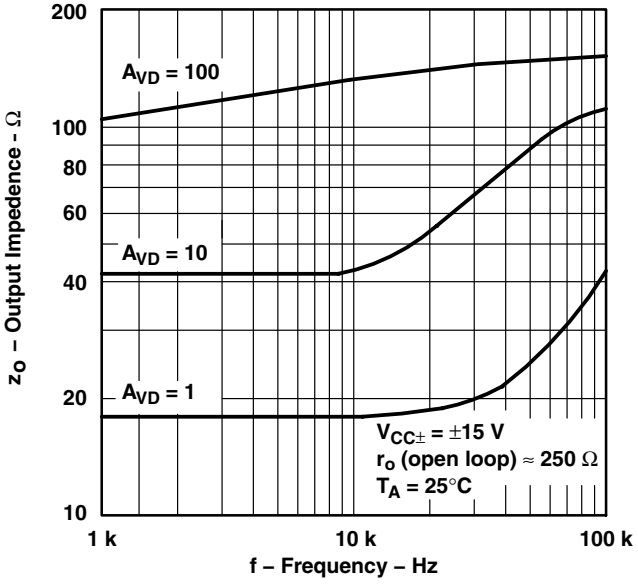

Figure 30

COMMON-MODE REJECTION RATIO vs FREQUENCY

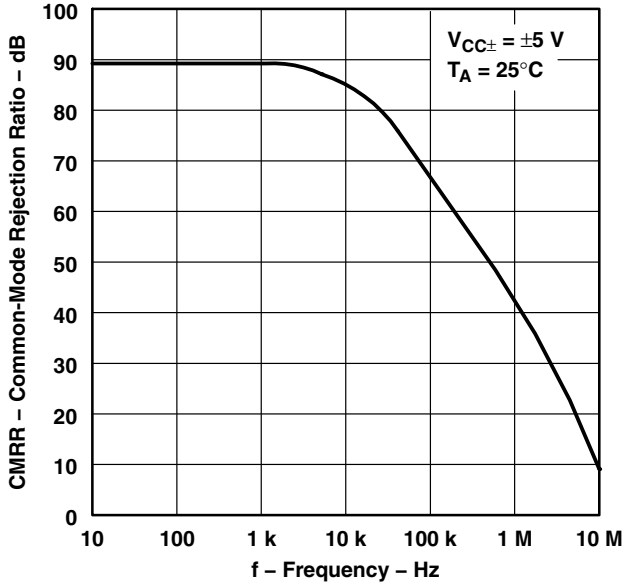

Figure 31

COMMON-MODE REJECTION RATIO vs FREQUENCY

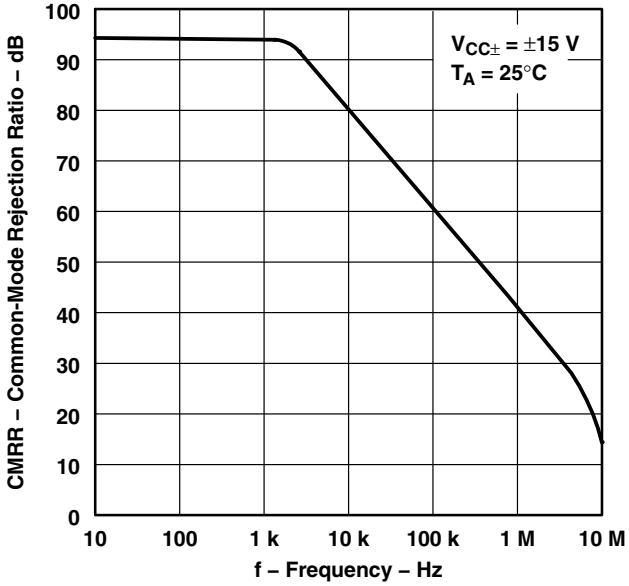

Figure 32

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

COMMON-MODE REJECTION RATIO† vs FREE-AIR TEMPERATURE

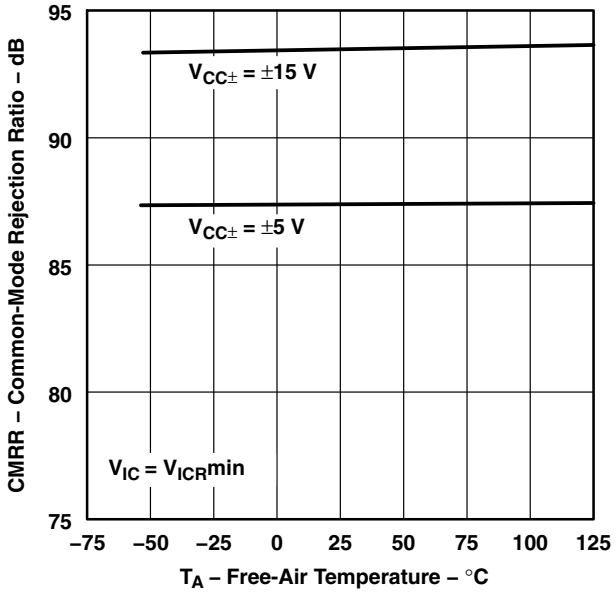

Figure 33

SUPPLY-VOLTAGE REJECTION RATIO† vs FREE-AIR TEMPERATURE

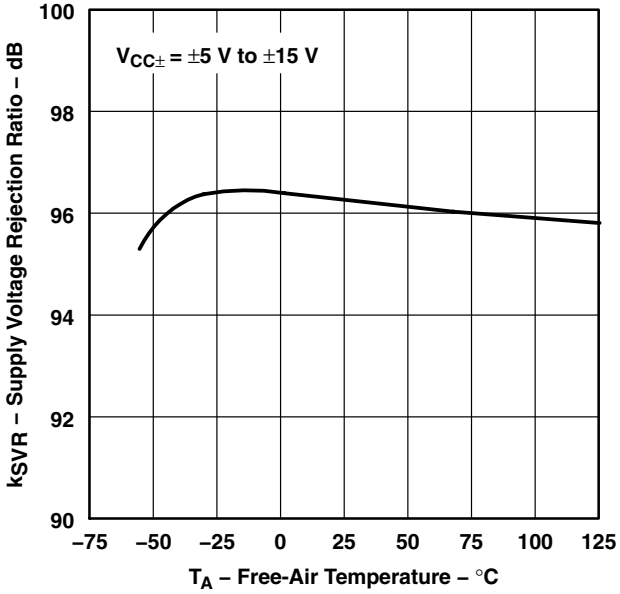

Figure 34

SHORT-CIRCUIT OUTPUT CURRENT vs SUPPLY VOLTAGE

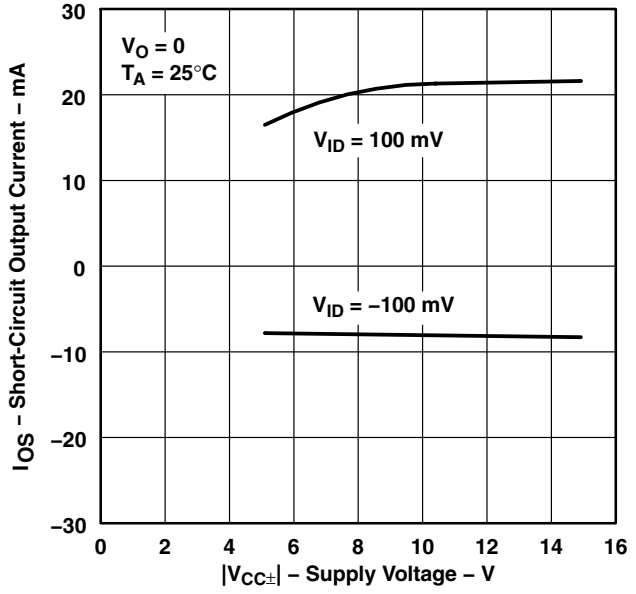

Figure 35

SHORT-CIRCUIT OUTPUT CURRENT vs TIME

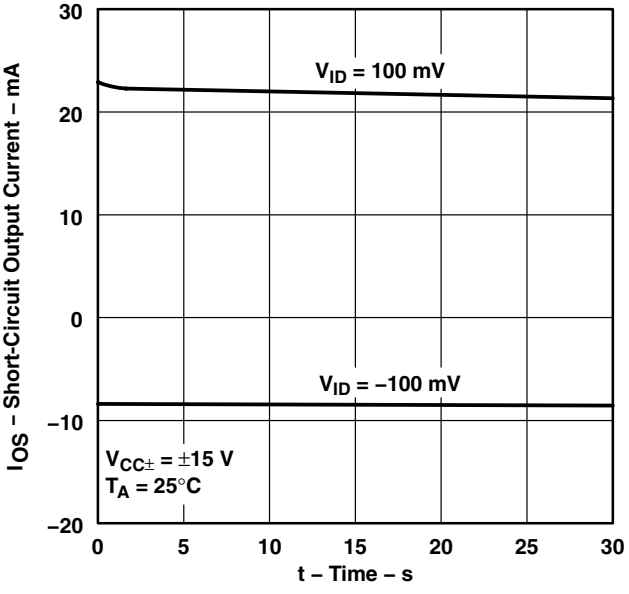

Figure 36

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

SHORT-CIRCUIT OUTPUT CURRENT† vs FREE-AIR TEMPERATURE

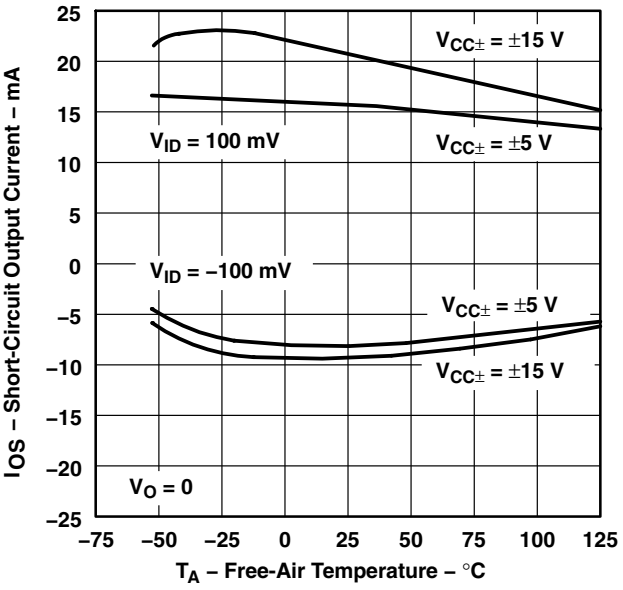

Figure 37

TL031 and TL031A EQUIVALENT INPUT NOISE VOLTAGE vs FREQUENCY

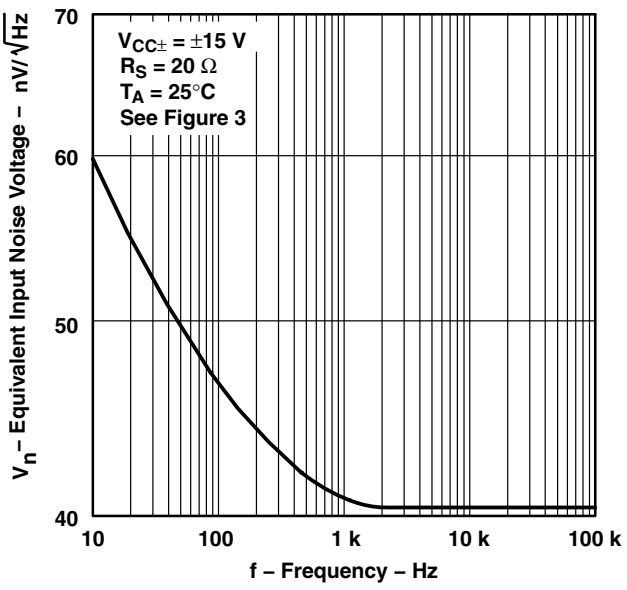

Figure 38

TL032 and TL032A EQUIVALENT INPUT NOISE VOLTAGE vs FREQUENCY

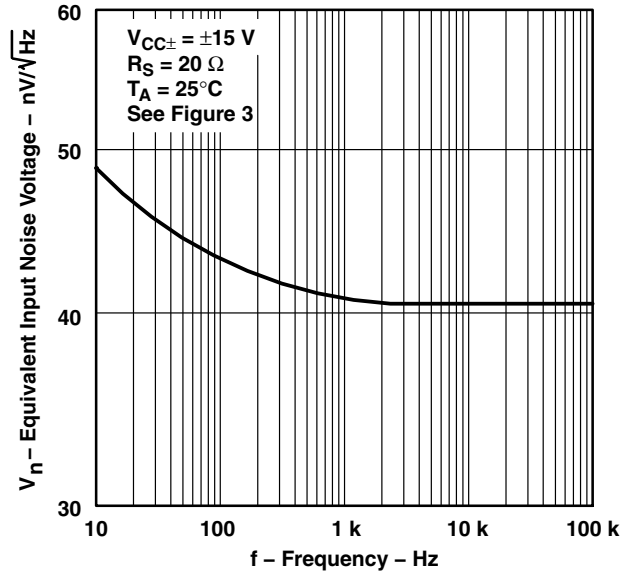

Figure 39

TL034 and TL034A EQUIVALENT INPUT NOISE VOLTAGE vs FREQUENCY

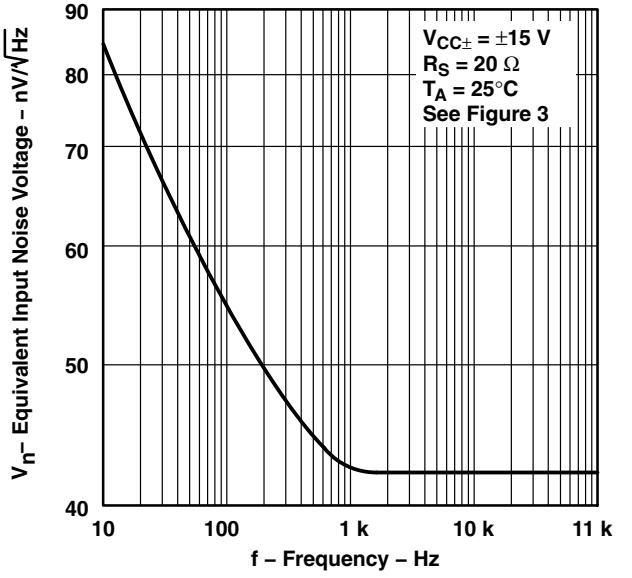

Figure 40

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

**TL031 and TL031A
SUPPLY CURRENT†
vs
SUPPLY VOLTAGE**

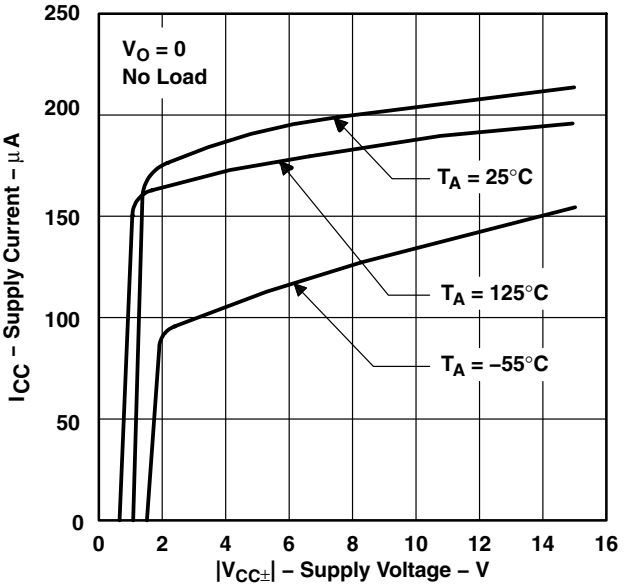

Figure 41

**TL032 and TL032A
SUPPLY CURRENT†
vs
SUPPLY VOLTAGE**

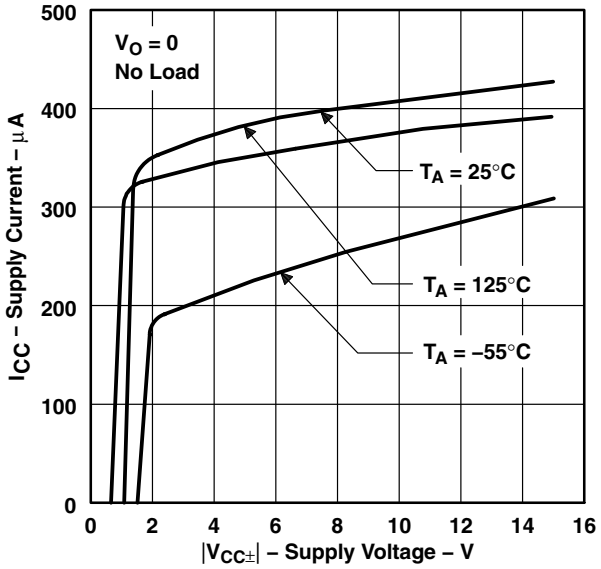

Figure 42

**TL034 and TL034A
SUPPLY CURRENT†
vs
SUPPLY VOLTAGE**

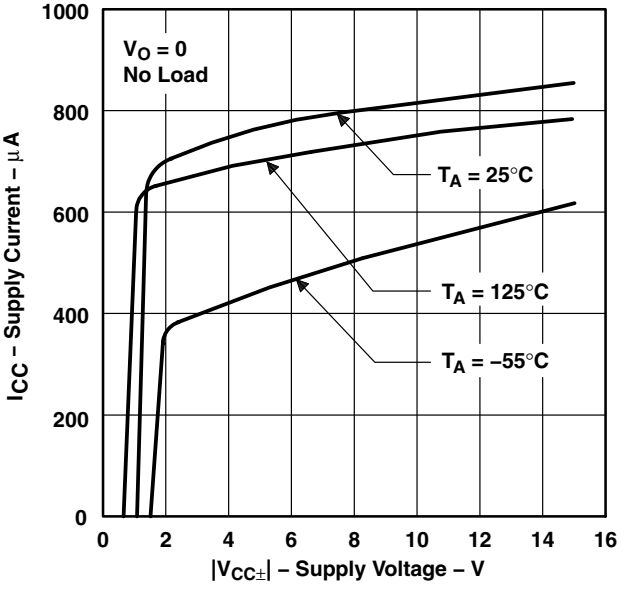

Figure 43

**TL031 and TL031A
SUPPLY CURRENT†
vs
FREE-AIR TEMPERATURE**

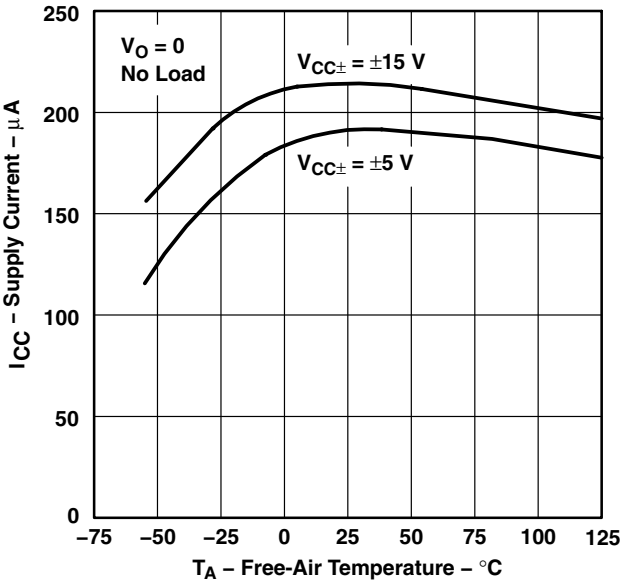

Figure 44

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

**TL032 and TL032A
SUPPLY CURRENT†
vs
FREE-AIR TEMPERATURE**

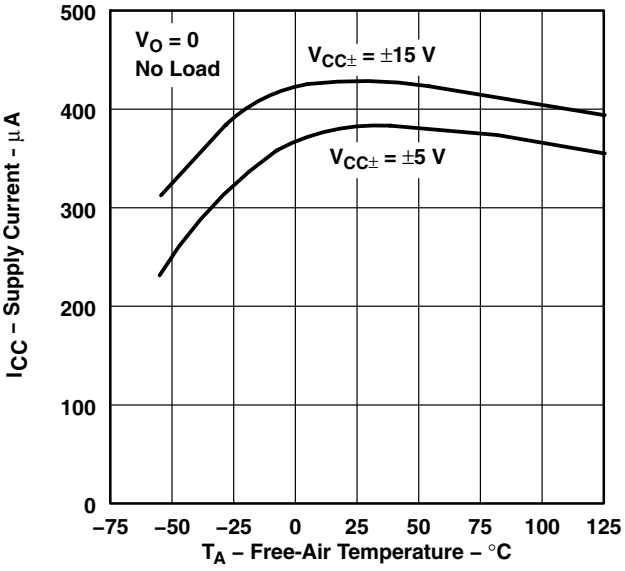

Figure 45

**TL034 and TL034A
SUPPLY CURRENT†
vs
FREE-AIR TEMPERATURE**

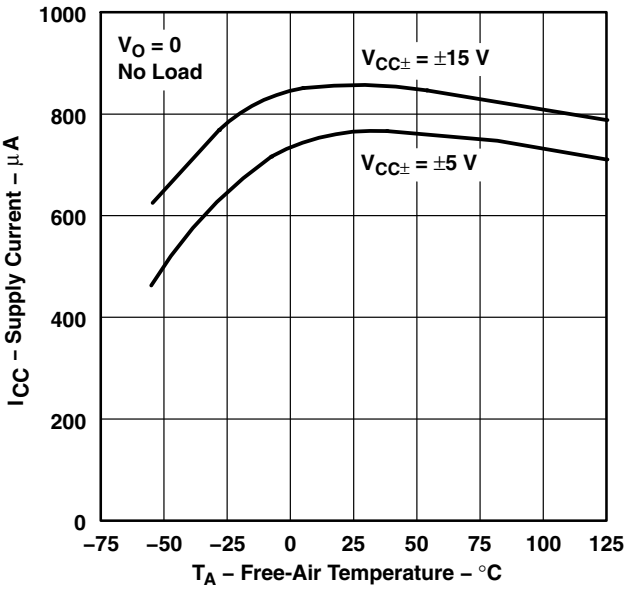

Figure 46

**SLEW RATE
vs
LOAD RESISTANCE**

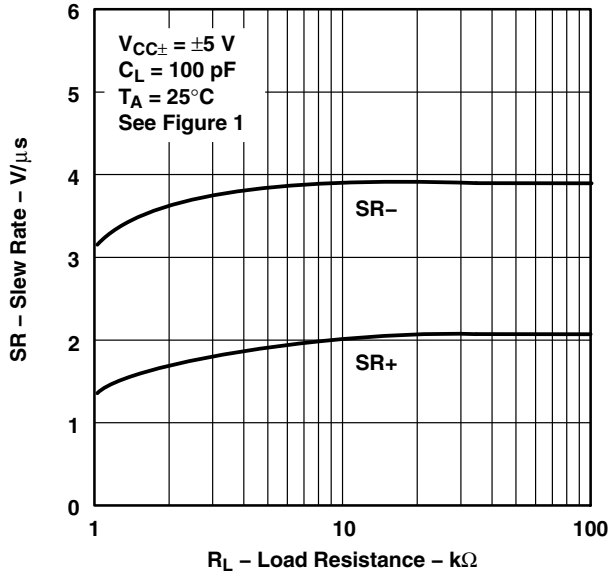

Figure 47

**SLEW RATE
vs
LOAD RESISTANCE**

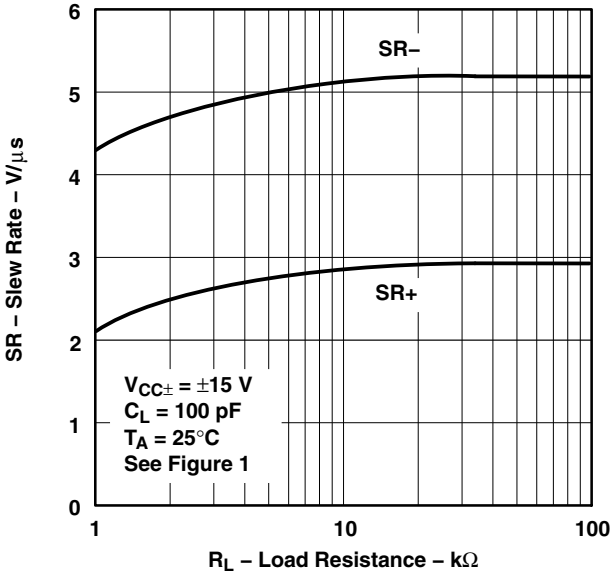

Figure 48

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

SLEW RATE† vs FREE-AIR TEMPERATURE

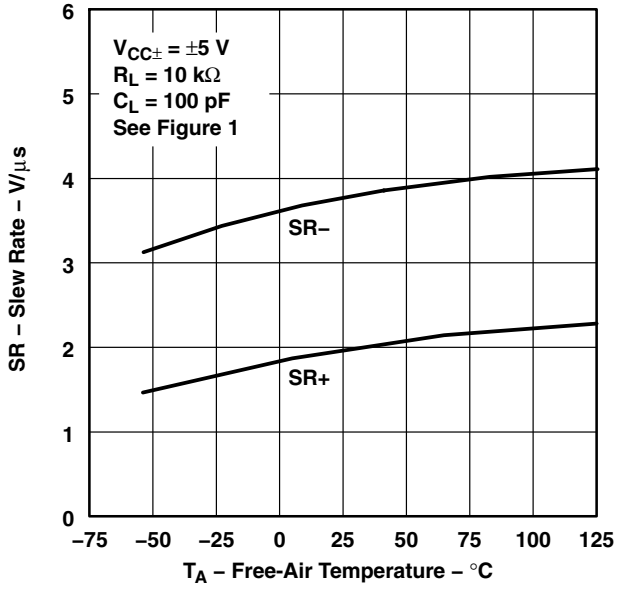

Figure 49

SLEW RATE† vs FREE-AIR TEMPERATURE

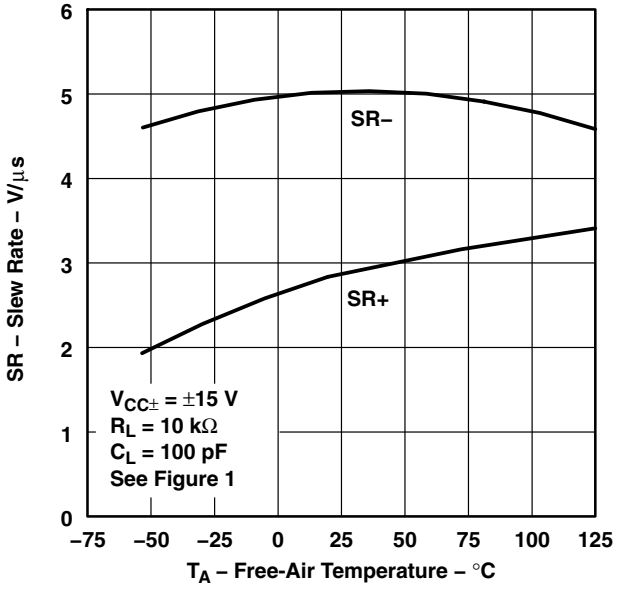

Figure 50

OVERSHOOT FACTOR vs LOAD CAPACITANCE

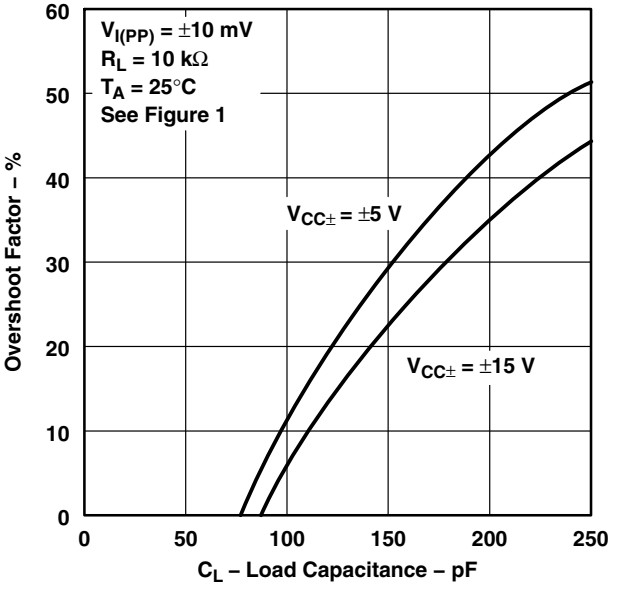

Figure 51

TOTAL HARMONIC DISTORTION vs FREQUENCY

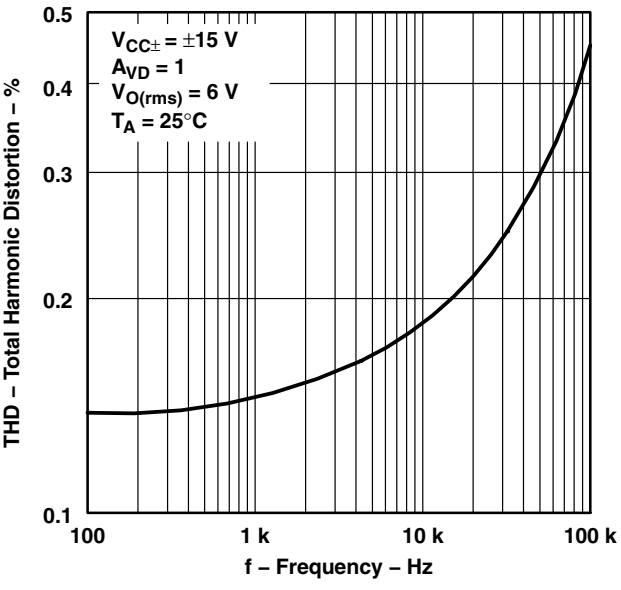

Figure 52

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

UNITY-GAIN BANDWIDTH vs SUPPLY VOLTAGE

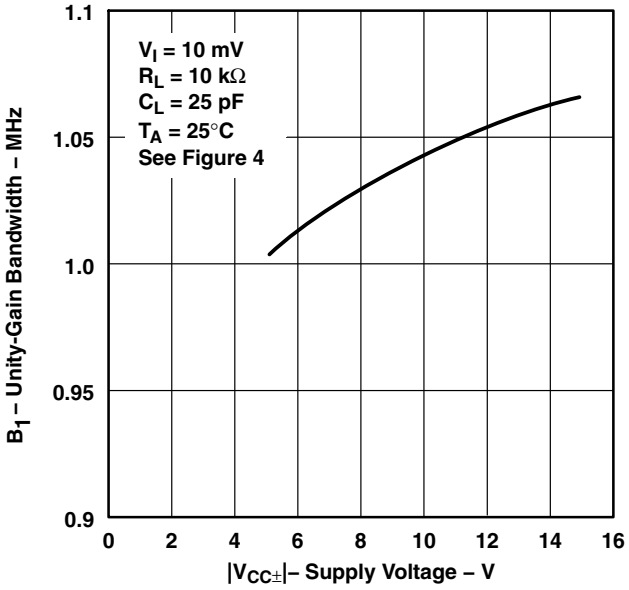

Figure 53

UNITY-GAIN BANDWIDTH† vs FREE-AIR TEMPERATURE

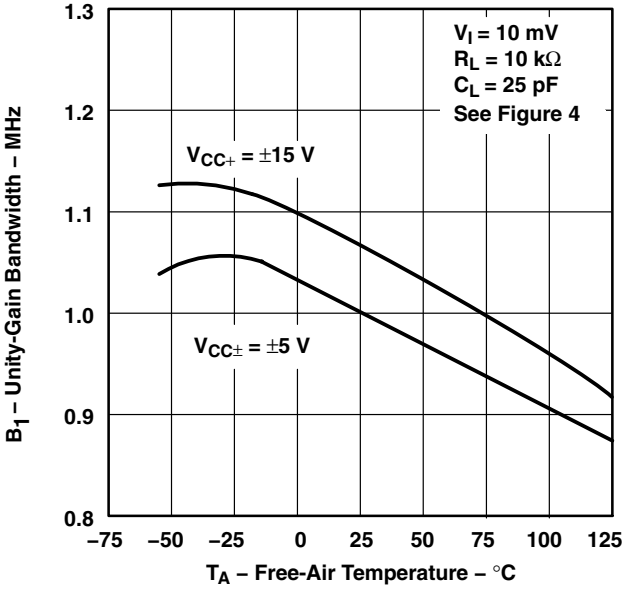

Figure 54

PHASE MARGIN vs SUPPLY VOLTAGE

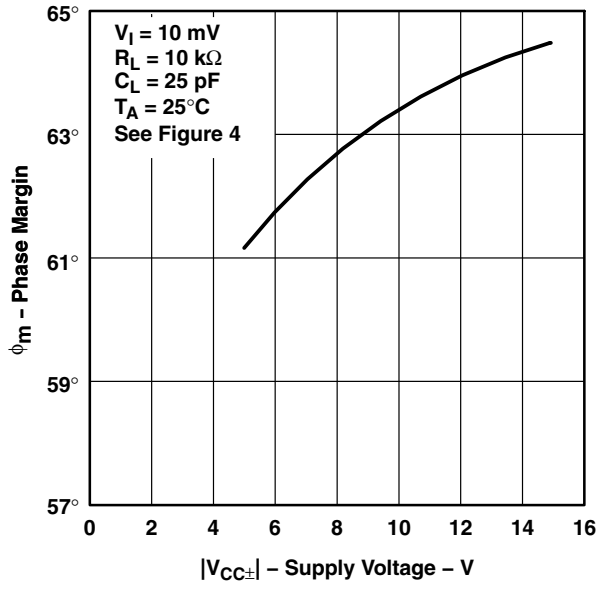

Figure 55

PHASE MARGIN vs LOAD CAPACITANCE

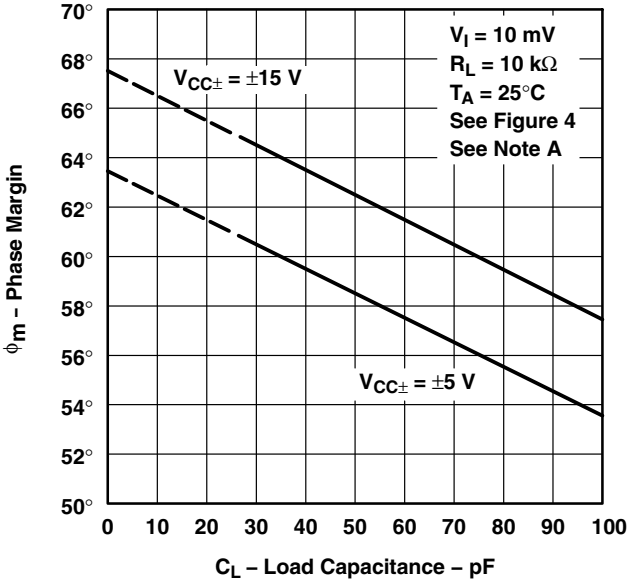

NOTE A: Values of phase margin below a load capacitance of 25 pF were estimated.

Figure 56

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

PHASE MARGIN† vs FREE-AIR TEMPERATURE

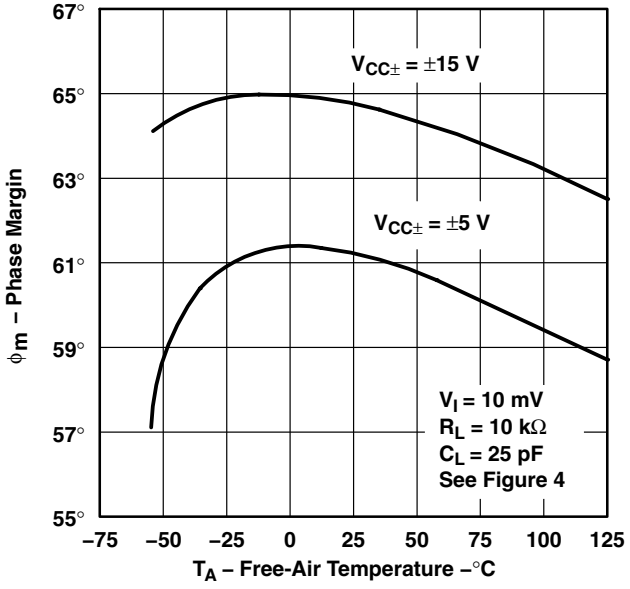

Figure 57

VOLTAGE-FOLLOWER SMALL-SIGNAL PULSE RESPONSE

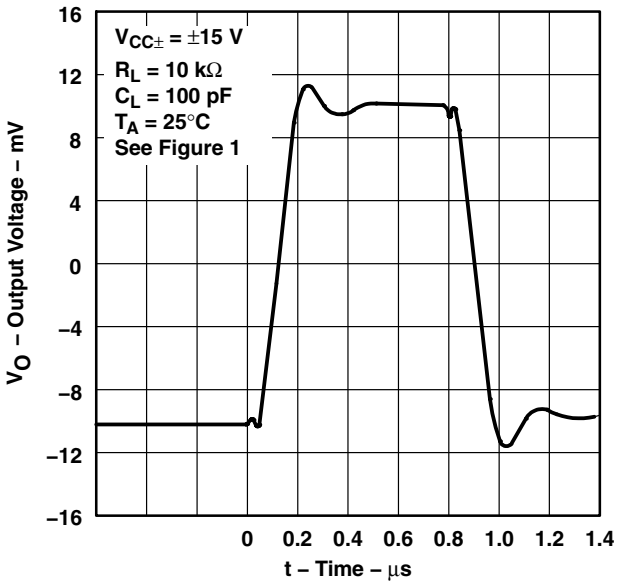

Figure 58

VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE

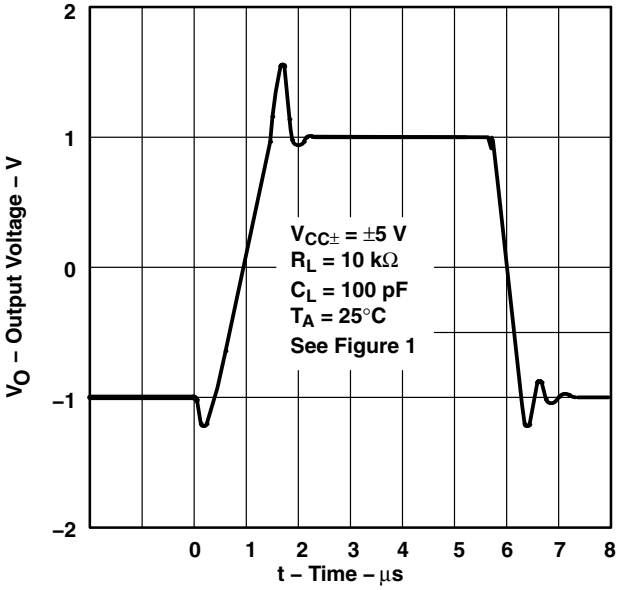

Figure 59

VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE

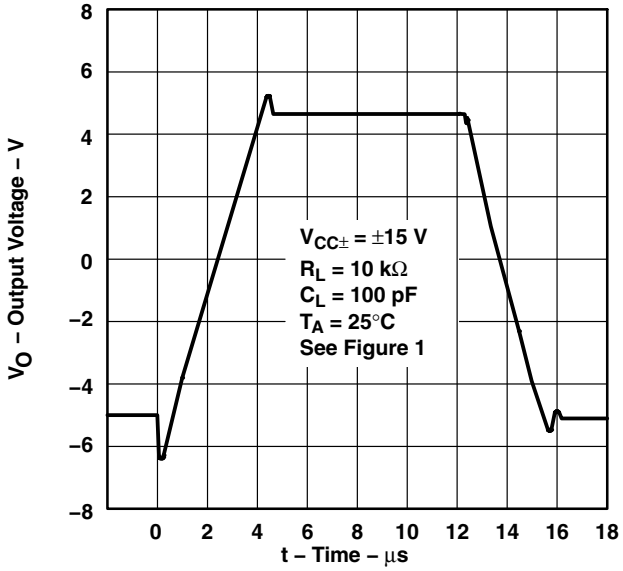

Figure 60

† Data at high and low temperatures are applicable only within the recommended operating free-air temperature ranges of the various devices.

APPLICATION INFORMATION

input characteristics

The TL03x and TL03xA are specified with a minimum and a maximum input voltage that, if exceeded at either input, could cause the device to malfunction.

Due to of the extremely high input impedance and resulting low bias-current requirements, the TL03x and TL03xA are well suited for low-level signal processing; however, leakage currents on printed circuit boards and sockets easily can exceed bias-current requirements and cause degradation in system performance. It is a good practice to include guard rings around inputs (see Figure 61). These guard rings should be driven from a low-impedance source at the same voltage level as the common-mode input.

Unused amplifiers should be connected as grounded unity-gain followers to avoid oscillation.

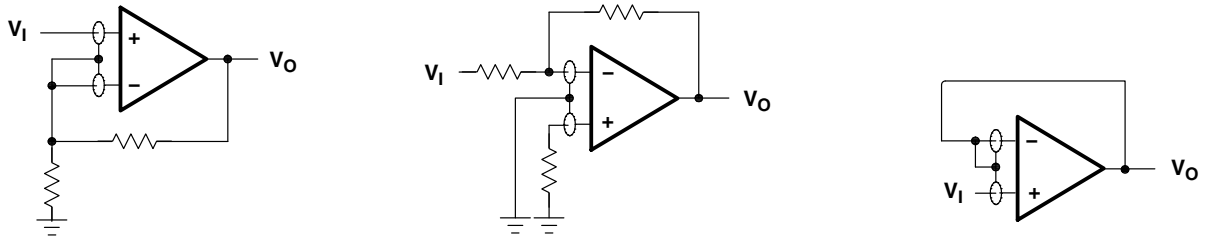

(a) NONINVERTING AMPLIFIER (b) INVERTING AMPLIFIER (c) UNITY-GAIN AMPLIFIER

Figure 61. Use of Guard Rings

APPLICATION INFORMATION

output characteristics

All operating characteristics (except bandwidth and phase margin) are specified with 100-pF load capacitance. The TL03x and TL03xA drive higher capacitive loads; however, as the load capacitance increases, the resulting response pole occurs at lower frequencies, thereby causing ringing, peaking, or even oscillation. The value of the load capacitance at which oscillation occurs varies with production lots. If an application appears to be sensitive to oscillation due to load capacitance, adding a small resistance in series with the load should alleviate the problem (see Figure 63). Capacitive loads of 1000 pF and larger can be driven if enough resistance is added in series with the output (see Figure 62).

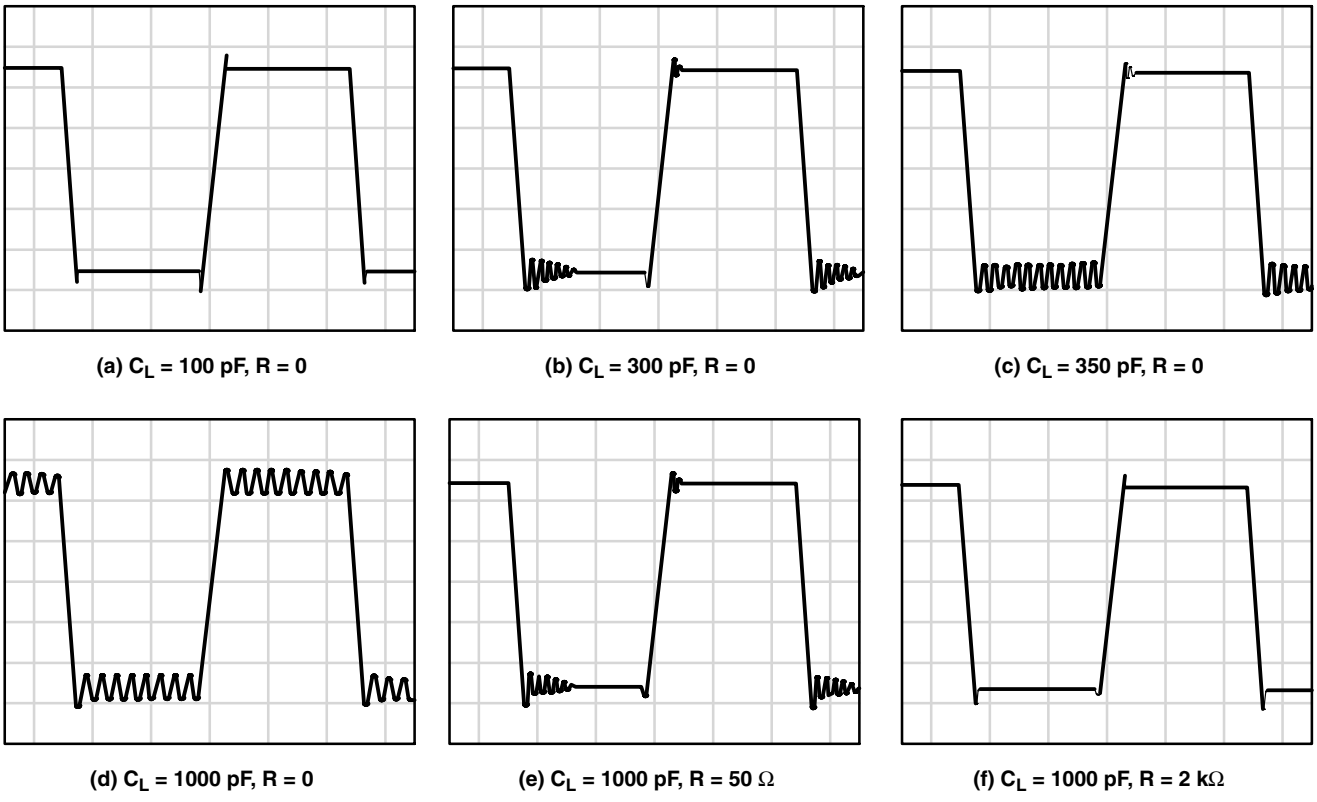

(a) C_L = 100 pF, R = 0 (b) C_L = 300 pF, R = 0 (c) C_L = 350 pF, R = 0

(d) C_L = 1000 pF, R = 0 (e) C_L = 1000 pF, R = 50 Ω (f) C_L = 1000 pF, R = 2 kΩ

Figure 62. Effect of Capacitive Loads

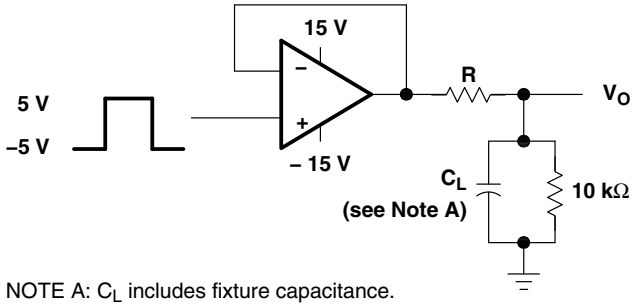

NOTE A: C_L includes fixture capacitance.

Figure 63. Test Circuit for Output Characteristics

APPLICATION INFORMATION

high-Q notch filter

In general, Texas Instruments enhanced-JFET operational amplifiers serve as excellent filters. The circuit in Figure 64 provides a narrow notch at a specific frequency. Notch filters are designed to eliminate frequencies that are interfering with the operation of an application. For this filter, the center frequency can be calculated as:

$$f_O = \frac{1}{2\pi \times R1 \times C1}$$

With the resistors and capacitors shown in Figure 64, the center frequency is 1 kHz. C1 = C3 = C2 + 2 and R1 = R3 = 2 × R2. The center frequency can be modified by varying these values. When adjusting the center frequency, ensure that the operational amplifier has sufficient gain at the frequency required.

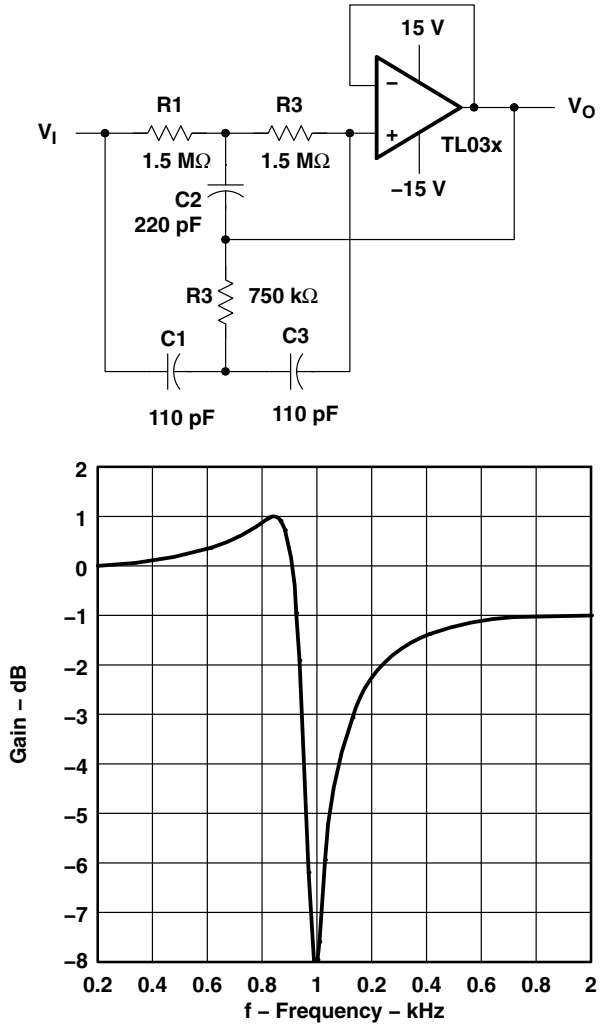

Figure 64. High-Q Notch Filter

APPLICATION INFORMATION

transimpedance amplifier

The low-power precision TL03x allows accurate measurement of low currents. The high input impedance and low offset voltage of the TL03xA greatly simplify the design of a transimpedance amplifier. At room temperature, this design achieves 10-bit accuracy with an error of less than 1/2 LSB.

Assuming that R2 is much less than R1 and ignoring error terms, the output voltage can be expressed as:

$$V_O = -I_{IN} \times R_F\left(\frac{R1 + R2}{R2}\right)$$

Using the resistor values shown in the schematic for a 1-nA input current, the output voltage equals –0.1 V. If the V_O limit for the TL03xA is measured at ±12 V, the maximum input current for these resistor values is ±120 nA. Similarly, one LSB on a 10-bit scale corresponds to 12 mV of output voltage, or 120 pA of input current.

The following equation shows the effect of input offset voltage and input bias current on the output voltage:

$$V_O = -\left[V_{IO} + R_F\left(I_{IO} + I_{IB}\right)\right]\left(\frac{R1 + R2}{R2}\right)$$

If the application requires input protection for the transimpedance amplifier, do not use standard PN diodes. Instead, use low-leakage Siliconix SN4117 JFETs (or equivalent) connected as diodes across the TL03xA inputs (see Figure 65).

As with all precision applications, special care must be taken to eliminate external sources of leakage and interference. Other precautions include using high-quality insulation, cleaning insulating surfaces to remove fluxes and other residue, and enclosing the application within a protective box.

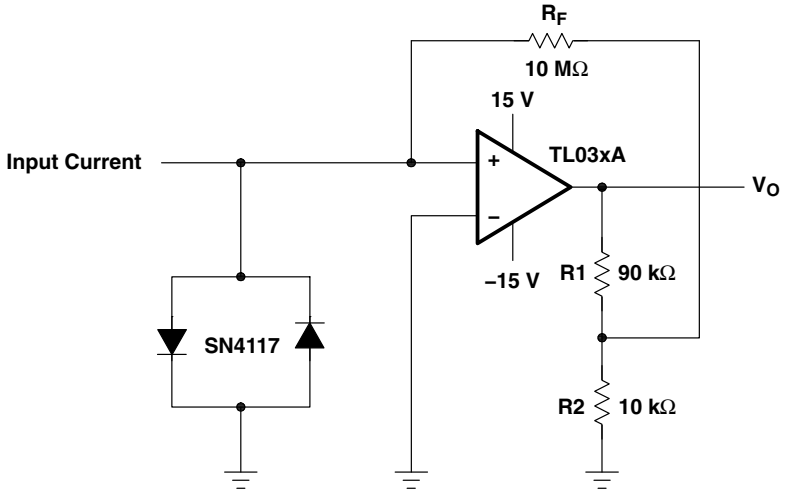

Figure 65. Transimpedance Amplifier

APPLICATION INFORMATION

4-mA to 20-mA current loops

Often, information from an analog sensor must be sent over a distance to the receiving circuitry. For many applications, the most feasible method involves converting voltage information to a current before transmission. The following circuits give two variations of low-power current loops. The circuit in Figure 66 requires three wires from the transmitting to receiving circuitry, while the second variation in Figure 67 requires only two wires, but includes an extra integrated circuit. Both circuits benefit from the high input impedance of the TL03xA because many inexpensive sensors do not have low output impedance.

Assuming that the voltage at the noninverting input of the TL03xA is zero, the following equation determines the output current:

$$I_O = V_I\left(\frac{R3}{R1 \times R_S}\right) + 5V\left(\frac{R3}{R2 \times R_S}\right) = 0.16 \times V_I + 4mA$$

The circuits presently provide 4-mA to 20-mA output current for an input voltage of 0 to 100 mV. By modifying R1, R2, and R3, the input voltage range or the output current range can be adjusted.

Including the offset voltage of the operational amplifier in the above equation clearly illustrates why the low offset TL03xA was chosen:

$$I_O = V_I\left(\frac{R3}{R1 \times R_S}\right) + 5V\left(\frac{R3}{R2 \times R_S}\right) - V_I\left(\frac{R3}{R1 \times R_S} + \frac{R3}{R2 \times R_S} + \frac{R1}{R_S}\right)$$
$$= 0.16 \times V_I + 4mA - 0.17 \times V_I$$

For example, an offset voltage of 1 mV decreases the output current by 0.17 mA.

Due to the low power consumption of the TL03xA, both circuits have at least 2 mA available to drive the actual sensor from the 5-V reference node.

APPLICATION INFORMATION

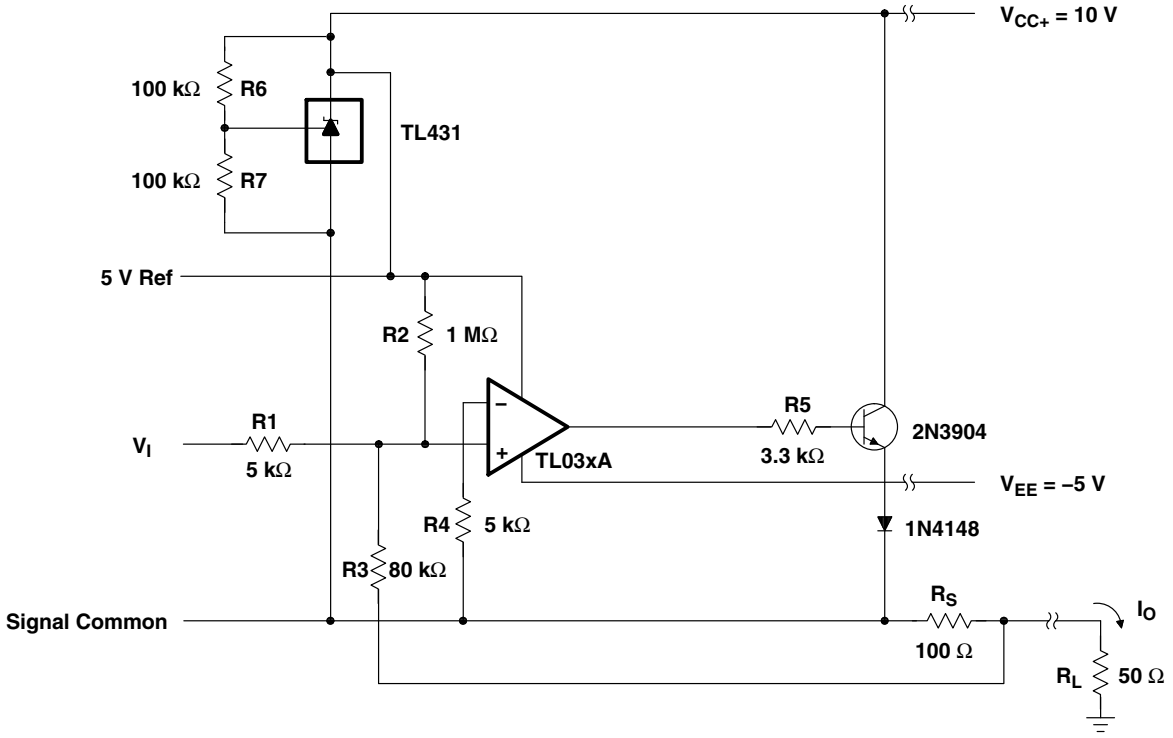

Figure 66. Three-Wire 4-mA to 20-mA Current Loop

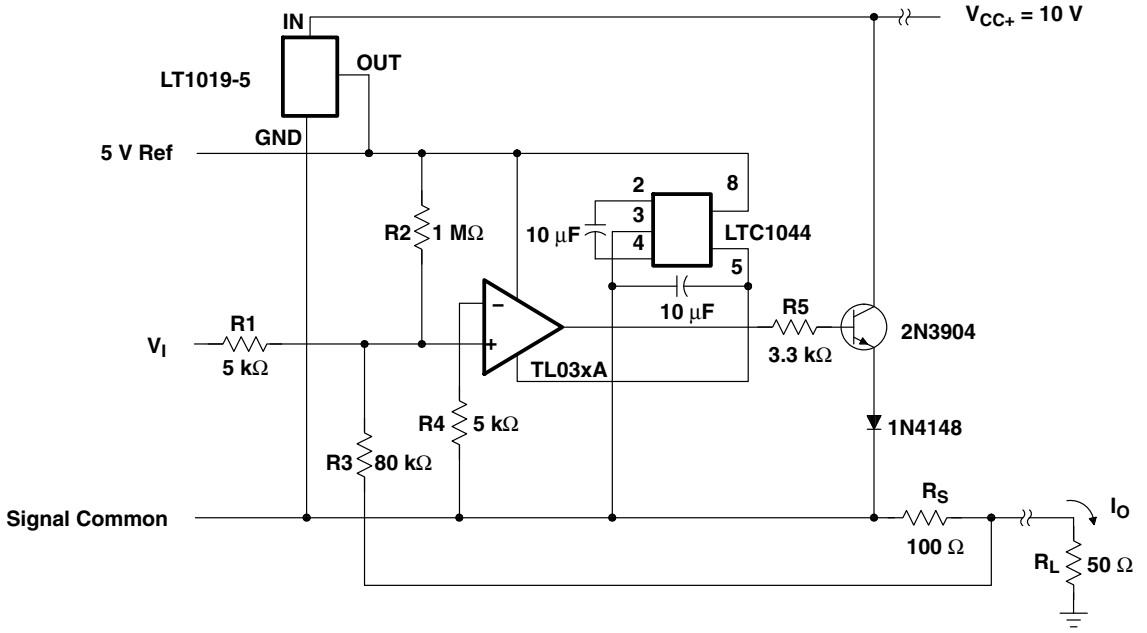

Figure 67. Two-Wire 4-mA to 20-mA Current Loop

APPLICATION INFORMATION

low-level light-detector preamplifier

Applications that need to detect small currents require high input-impedance operational amplifiers; otherwise, the bias currents of the operational amplifier camouflage the current being monitored. Phototransistors provide a current that is proportional to the light reaching the transistor. The TL03x allows even the small currents resulting from low-level light to be detected.

In Figure 68, if there is no light, the phototransistor is off and the output is high. As light is detected, the operational amplifier output begins pulling low. Adjusting R4 both compensates for offset voltage of the amplifier and adjusts the point of light detection by the amplifier.

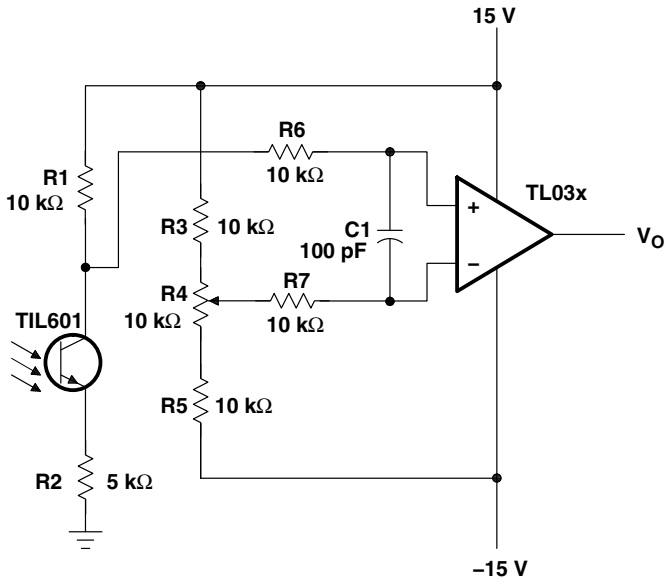

Figure 68. Low-Level Light-Detector Preamplifier

APPLICATION INFORMATION

audio-distribution amplifier

This audio-distribution amplifier (see Figure 69) feeds the input signal to three separate output channels. U1A amplifies the input signal with a gain of 10, while U1B, U1C, and U1D serve as buffers to the output channels. The gain response of this circuit is very flat from 20 Hz to 20 kHz. The TL03x allows quick response to the input signal while maintaining low power consumption.

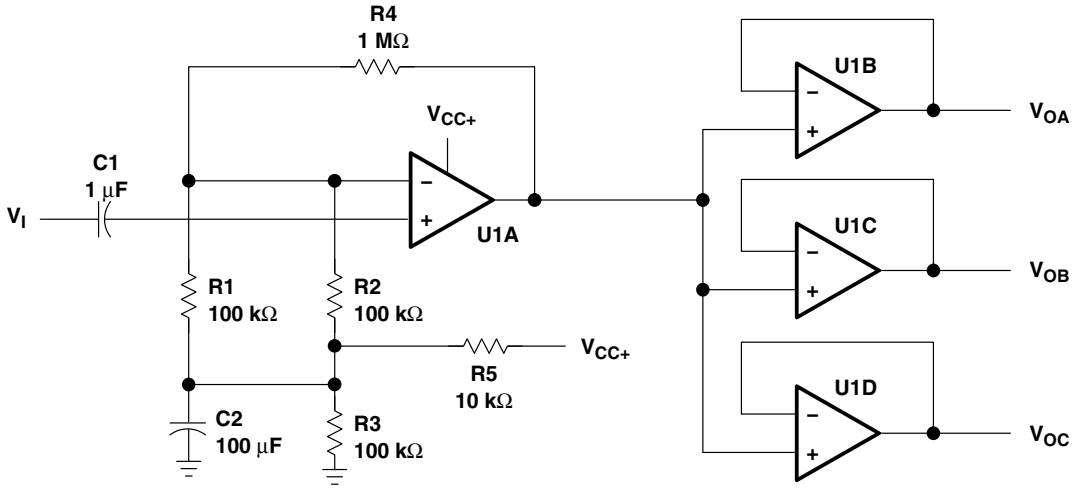

NOTE A: U1A through U1D = TL03x; V_{CC+} = 5 V

Figure 69. Audio-Distribution Amplifier Circuit

APPLICATION INFORMATION

instrumentation amplifier with linear gain adjust

The low offset voltage and low power consumption of the TL03x provide an accurate but inexpensive instrumentation amplifier (see Figure 70). This particular configuration offers the advantage that the gain can be linearly set by one resistor:

$$V_O = \frac{R6}{R5} \times (V_B - V_A)$$

Adjusting R6 varies the gain. The value of R6 always should be greater than, or equal to, the value of R5 to ensure stability. The disadvantage of this instrumentation amplifier topology is the high degree of CMRR degradation resulting from mismatches between R1, R2, R3, and R4. For this reason, these four resistors should be 0.1%-tolerance resistors.

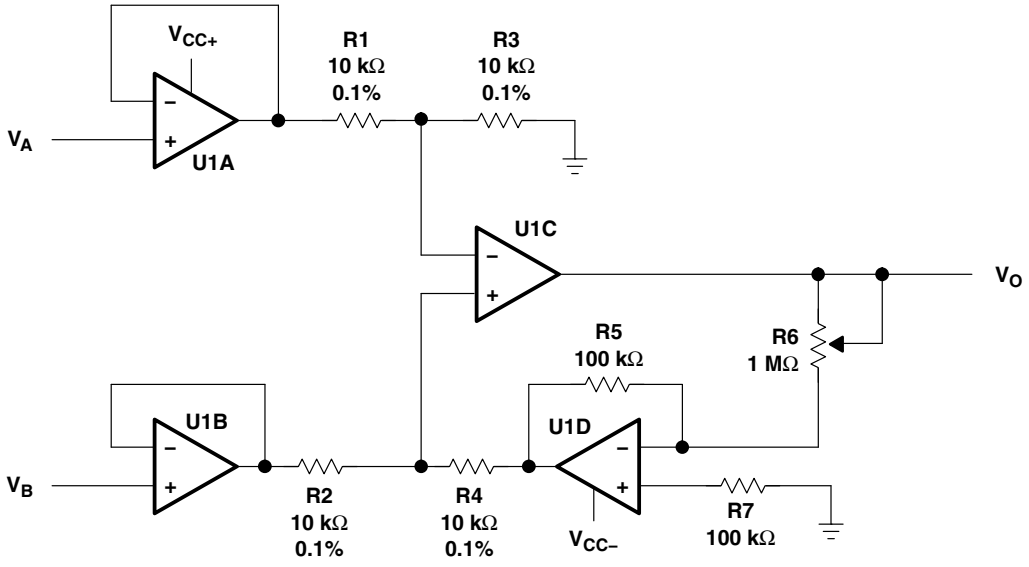

NOTE A: U1A through U1D = TL03x; $V_{CC\pm}$ = ±15 V

Figure 70. Instrumentation Amplifier With Linear Gain-Adjust Circuit

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TL031CD	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI	0 to 70	TL031C	
TL031CDR	ACTIVE	SOIC	D	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL031C	Samples
TL031CP	ACTIVE	PDIP	P	8	50	RoHS & Green	NIPDAU	N / A for Pkg Type	0 to 70	TL031CP	Samples
TL031ID	ACTIVE	SOIC	D	8	75	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL031I	Samples
TL031IDG4	ACTIVE	SOIC	D	8	75	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL031I	Samples
TL031IP	ACTIVE	PDIP	P	8	50	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	TL031IP	Samples
TL032ACD	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI	0 to 70	032AC	
TL032ACDR	ACTIVE	SOIC	D	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	032AC	Samples
TL032ACP	ACTIVE	PDIP	P	8	50	RoHS & Green	NIPDAU	N / A for Pkg Type	0 to 70	TL032ACP	Samples
TL032AID	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI	-40 to 85	032AI	
TL032AIDR	ACTIVE	SOIC	D	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	032AI	Samples
TL032AIP	ACTIVE	PDIP	P	8	50	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	TL032AIP	Samples
TL032CD	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI	0 to 70	TL032C	
TL032CDR	ACTIVE	SOIC	D	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL032C	Samples
TL032CP	ACTIVE	PDIP	P	8	50	RoHS & Green	NIPDAU	N / A for Pkg Type	0 to 70	TL032CP	Samples
TL032CPE4	ACTIVE	PDIP	P	8	50	TBD	Call TI	Call TI	0 to 70		Samples
TL032CPSR	ACTIVE	SO	PS	8	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	T032	Samples
TL032ID	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI	-40 to 85	TL032I	
TL032IDR	ACTIVE	SOIC	D	8	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL032I	Samples
TL032IDRG4	ACTIVE	SOIC	D	8	2500	TBD	Call TI	Call TI	-40 to 85		Samples
TL032IP	ACTIVE	PDIP	P	8	50	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	TL032IP	Samples
TL034ACD	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI	0 to 70	TL034AC	

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TL034ACDR	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL034AC	Samples
TL034ACN	ACTIVE	PDIP	N	14	25	RoHS & Green	NIPDAU	N / A for Pkg Type	0 to 70	TL034ACN	Samples
TL034AID	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI	-40 to 85	TL034AI	
TL034AIDR	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL034AI	Samples
TL034AIN	ACTIVE	PDIP	N	14	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	TL034AIN	Samples
TL034CD	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI	0 to 70	TL034C	
TL034CDR	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL034C	Samples
TL034CN	ACTIVE	PDIP	N	14	25	RoHS & Green	NIPDAU	N / A for Pkg Type	0 to 70	TL034CN	Samples
TL034CNSR	ACTIVE	SO	NS	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL034	Samples
TL034CPW	OBSOLETE	TSSOP	PW	14		TBD	Call TI	Call TI	0 to 70	T034	
TL034CPWR	ACTIVE	TSSOP	PW	14	2000	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	0 to 70	T034	Samples
TL034ID	OBSOLETE	SOIC	D	14		TBD	Call TI	Call TI	-40 to 85	TL034I	
TL034IDR	ACTIVE	SOIC	D	14	2500	RoHS & Green	NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL034I	Samples
TL034IDRG4	ACTIVE	SOIC	D	14	2500	TBD	Call TI	Call TI	-40 to 85		Samples
TL034IN	ACTIVE	PDIP	N	14	25	RoHS & Green	NIPDAU	N / A for Pkg Type	-40 to 85	TL034IN	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

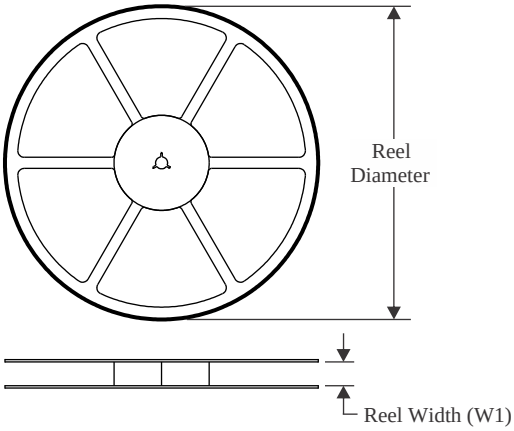

TAPE DIMENSIONS

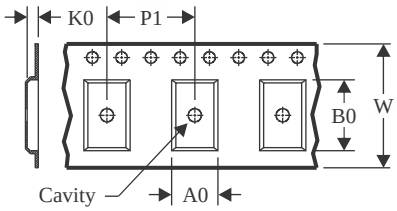

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

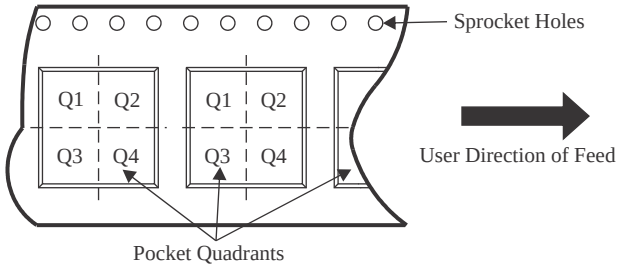

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TL031CDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL032ACDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL032AIDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL032CDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL032CPSR	SO	PS	8	2000	330.0	16.4	8.35	6.6	2.4	12.0	16.0	Q1
TL032IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL034ACDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL034ACDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL034AIDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL034CDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL034CDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL034CNSR	SO	NS	14	2000	330.0	16.4	8.2	10.5	2.5	12.0	16.0	Q1
TL034CPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL034CPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL034IDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL034IDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

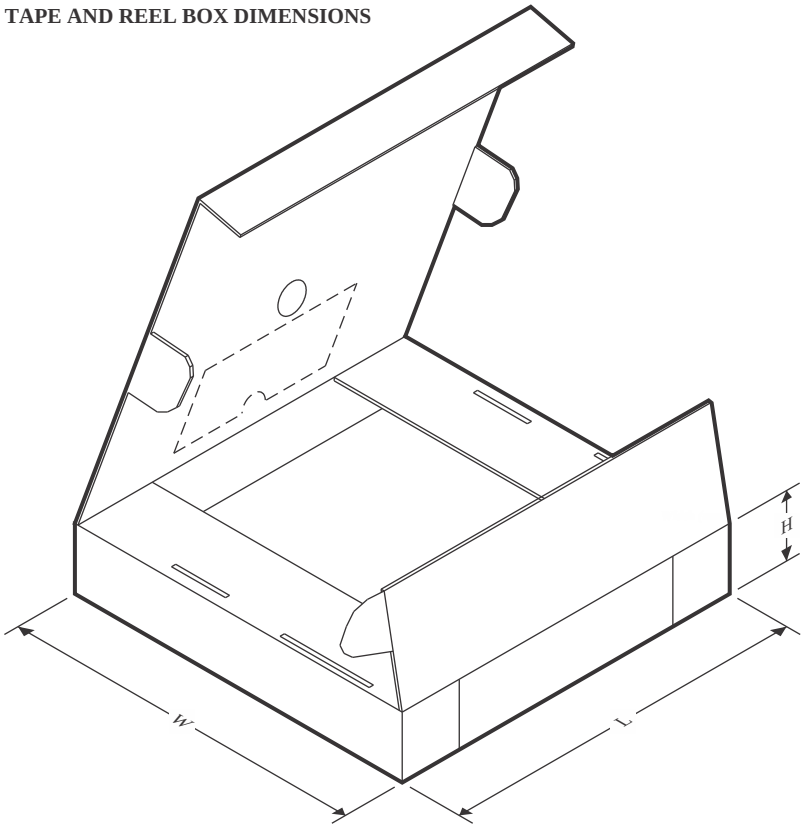

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TL031CDR	SOIC	D	8	2500	340.5	338.1	20.6
TL032ACDR	SOIC	D	8	2500	340.5	338.1	20.6
TL032AIDR	SOIC	D	8	2500	340.5	338.1	20.6
TL032CDR	SOIC	D	8	2500	340.5	338.1	20.6
TL032CPSR	SO	PS	8	2000	356.0	356.0	35.0
TL032IDR	SOIC	D	8	2500	340.5	338.1	20.6
TL034ACDR	SOIC	D	14	2500	353.0	353.0	32.0
TL034ACDR	SOIC	D	14	2500	356.0	356.0	35.0
TL034AIDR	SOIC	D	14	2500	356.0	356.0	35.0
TL034CDR	SOIC	D	14	2500	353.0	353.0	32.0
TL034CDR	SOIC	D	14	2500	356.0	356.0	35.0
TL034CNSR	SO	NS	14	2000	356.0	356.0	35.0
TL034CPWR	TSSOP	PW	14	2000	356.0	356.0	35.0
TL034CPWR	TSSOP	PW	14	2000	356.0	356.0	35.0
TL034IDR	SOIC	D	14	2500	356.0	356.0	35.0
TL034IDR	SOIC	D	14	2500	356.0	356.0	35.0

TUBE

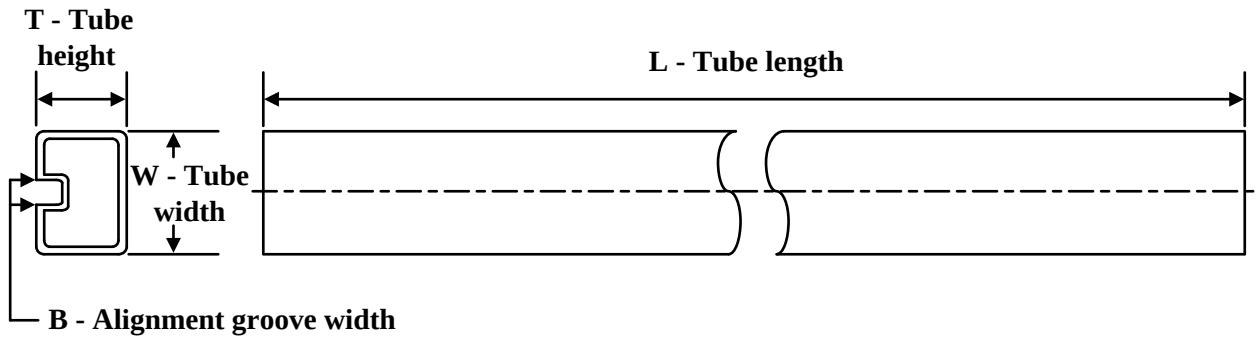

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
TL031CP	P	PDIP	8	50	506	13.97	11230	4.32
TL031ID	D	SOIC	8	75	507	8	3940	4.32
TL031IDG4	D	SOIC	8	75	507	8	3940	4.32
TL031IP	P	PDIP	8	50	506	13.97	11230	4.32
TL032ACP	P	PDIP	8	50	506	13.97	11230	4.32
TL032AIP	P	PDIP	8	50	506	13.97	11230	4.32
TL032CP	P	PDIP	8	50	506	13.97	11230	4.32
TL032IP	P	PDIP	8	50	506	13.97	11230	4.32
TL034ACN	N	PDIP	14	25	506	13.97	11230	4.32
TL034AIN	N	PDIP	14	25	506	13.97	11230	4.32
TL034CN	N	PDIP	14	25	506	13.97	11230	4.32
TL034IN	N	PDIP	14	25	506	13.97	11230	4.32

D (R–PDSO–G14) PLASTIC SMALL OUTLINE

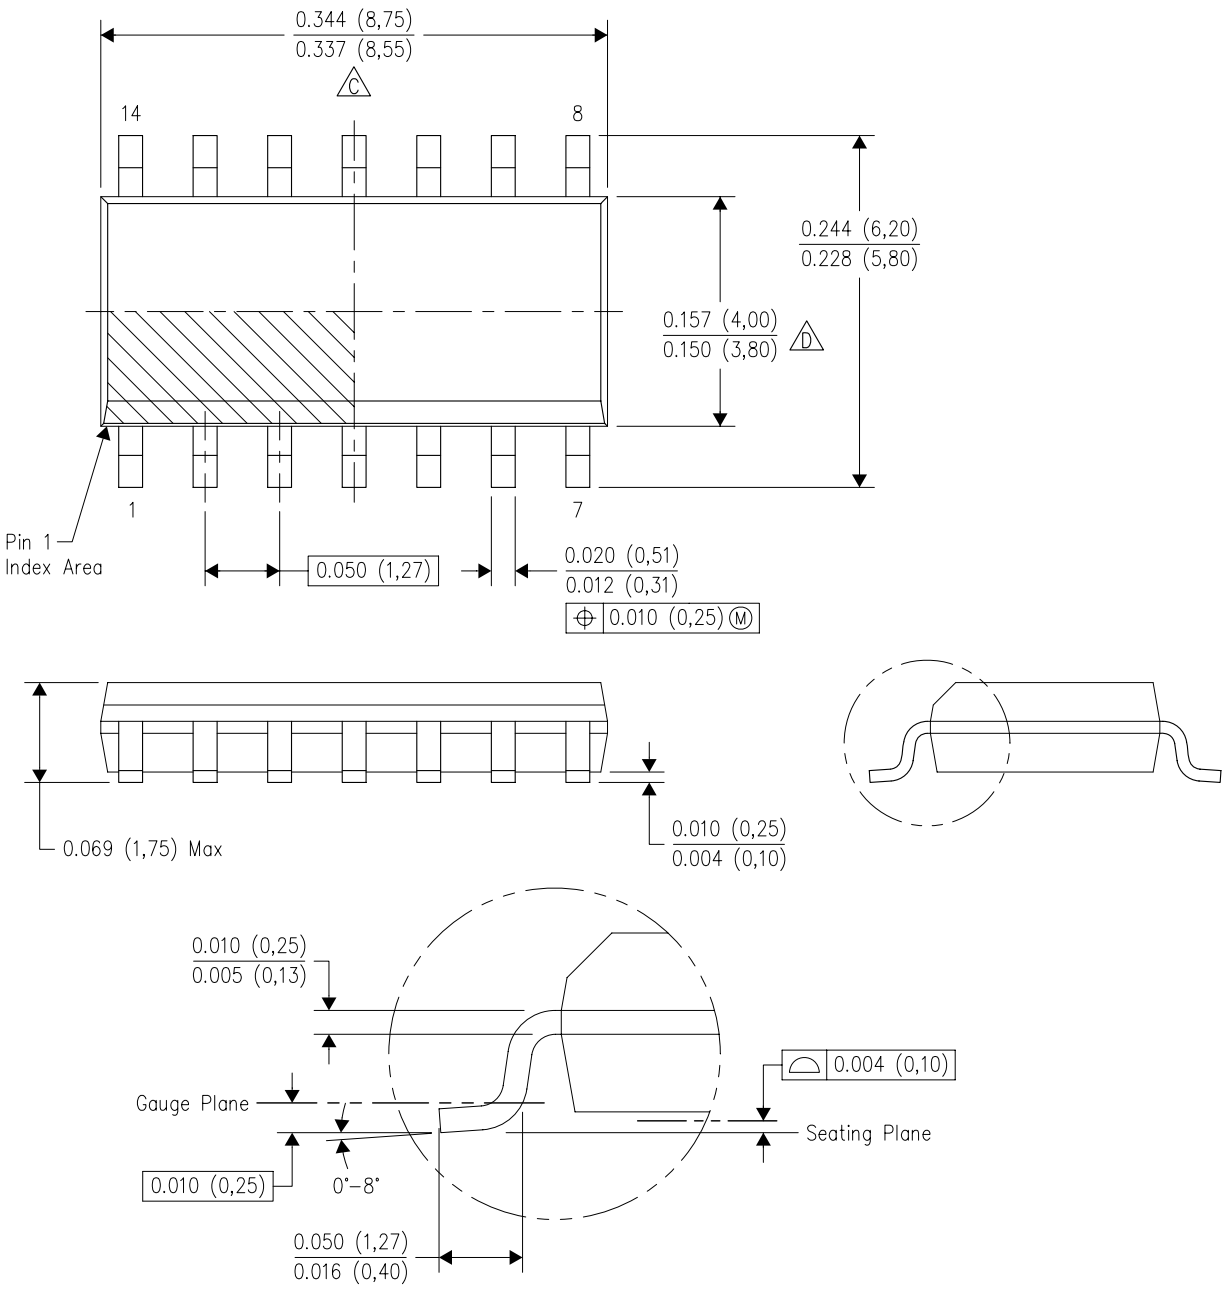

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AB.

D (R–PDSO–G14) PLASTIC SMALL OUTLINE

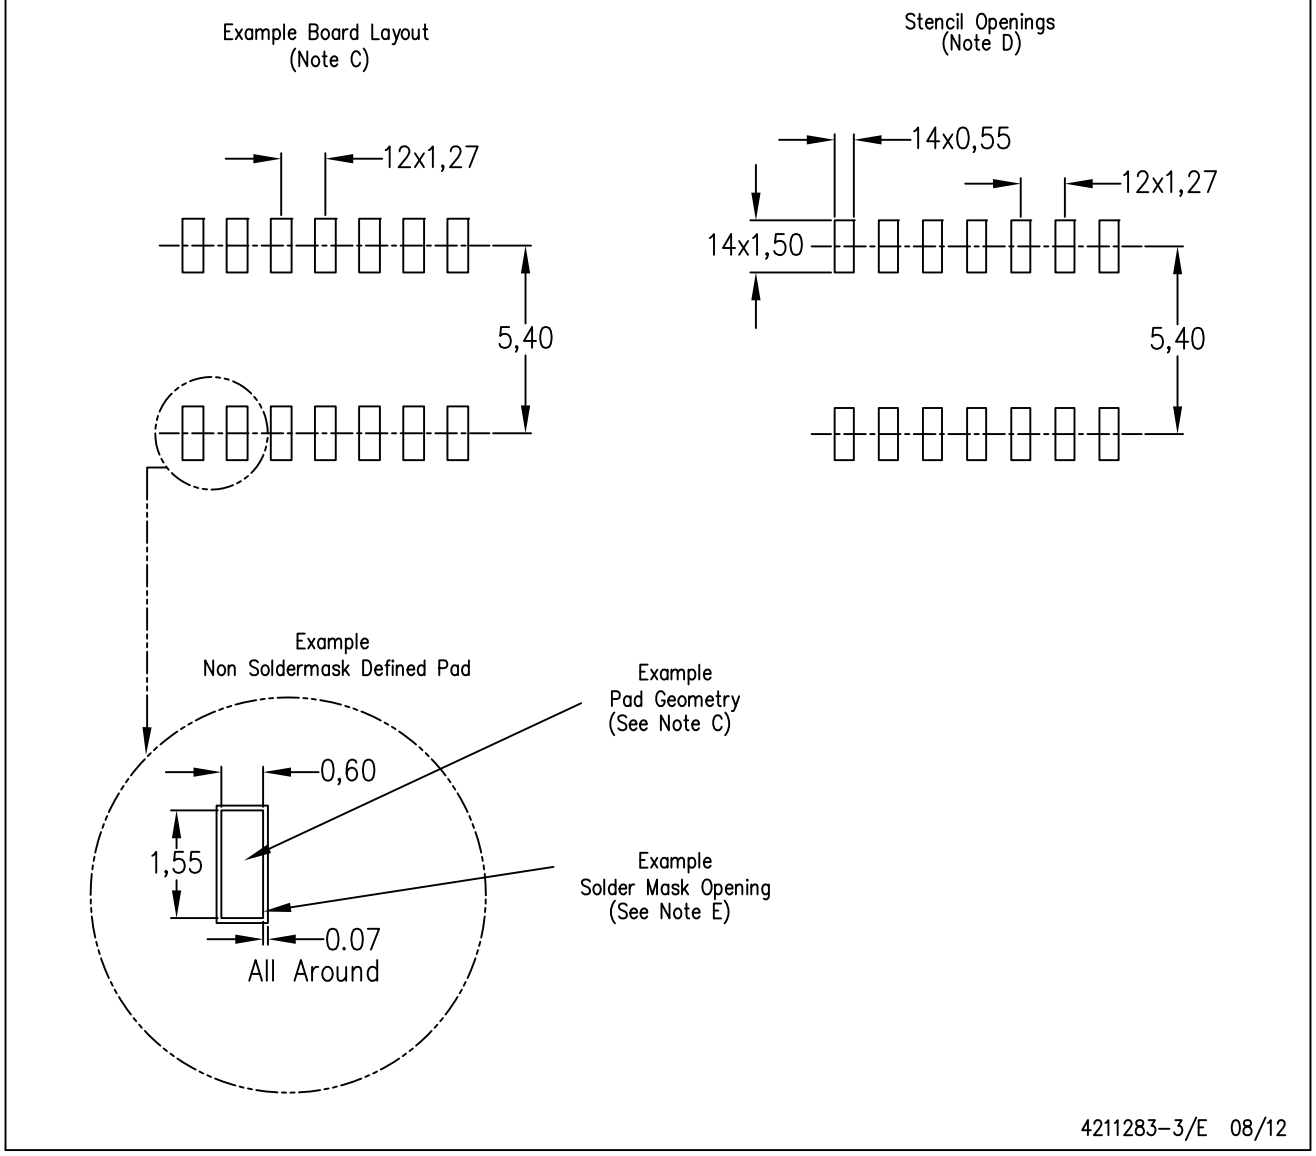

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R–PDSO–G14) PLASTIC SMALL OUTLINE

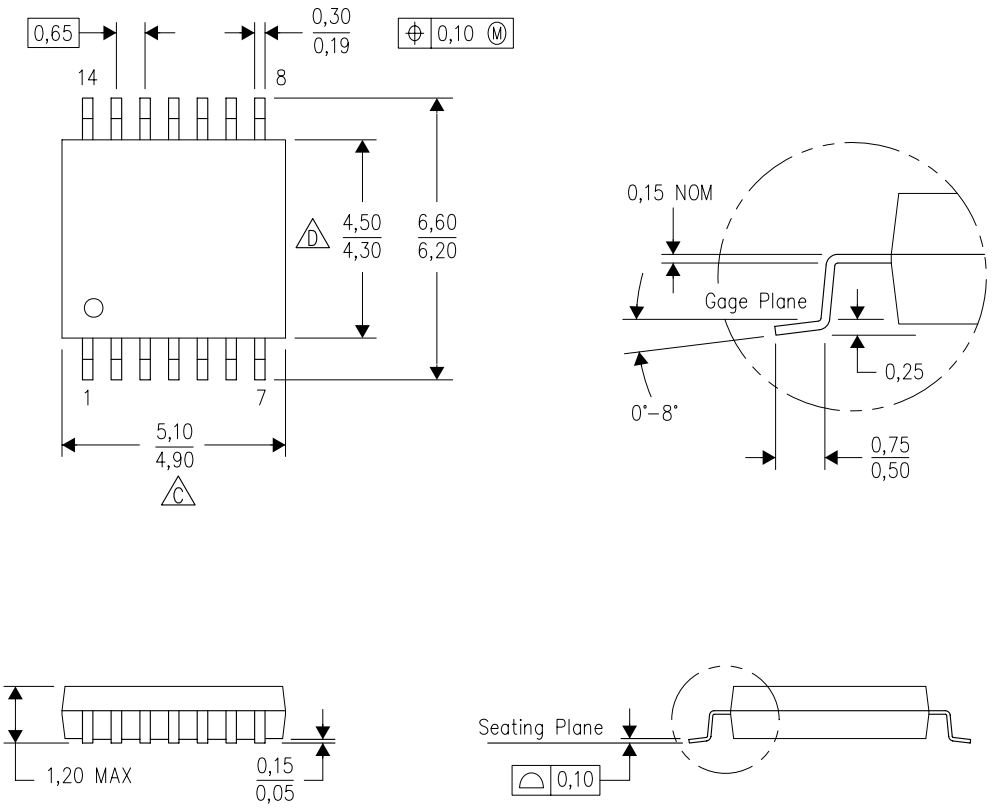

4040064–3/G 02/11

NOTES:
A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M–1994.
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
E. Falls within JEDEC MO–153



PACKAGE OUTLINE

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

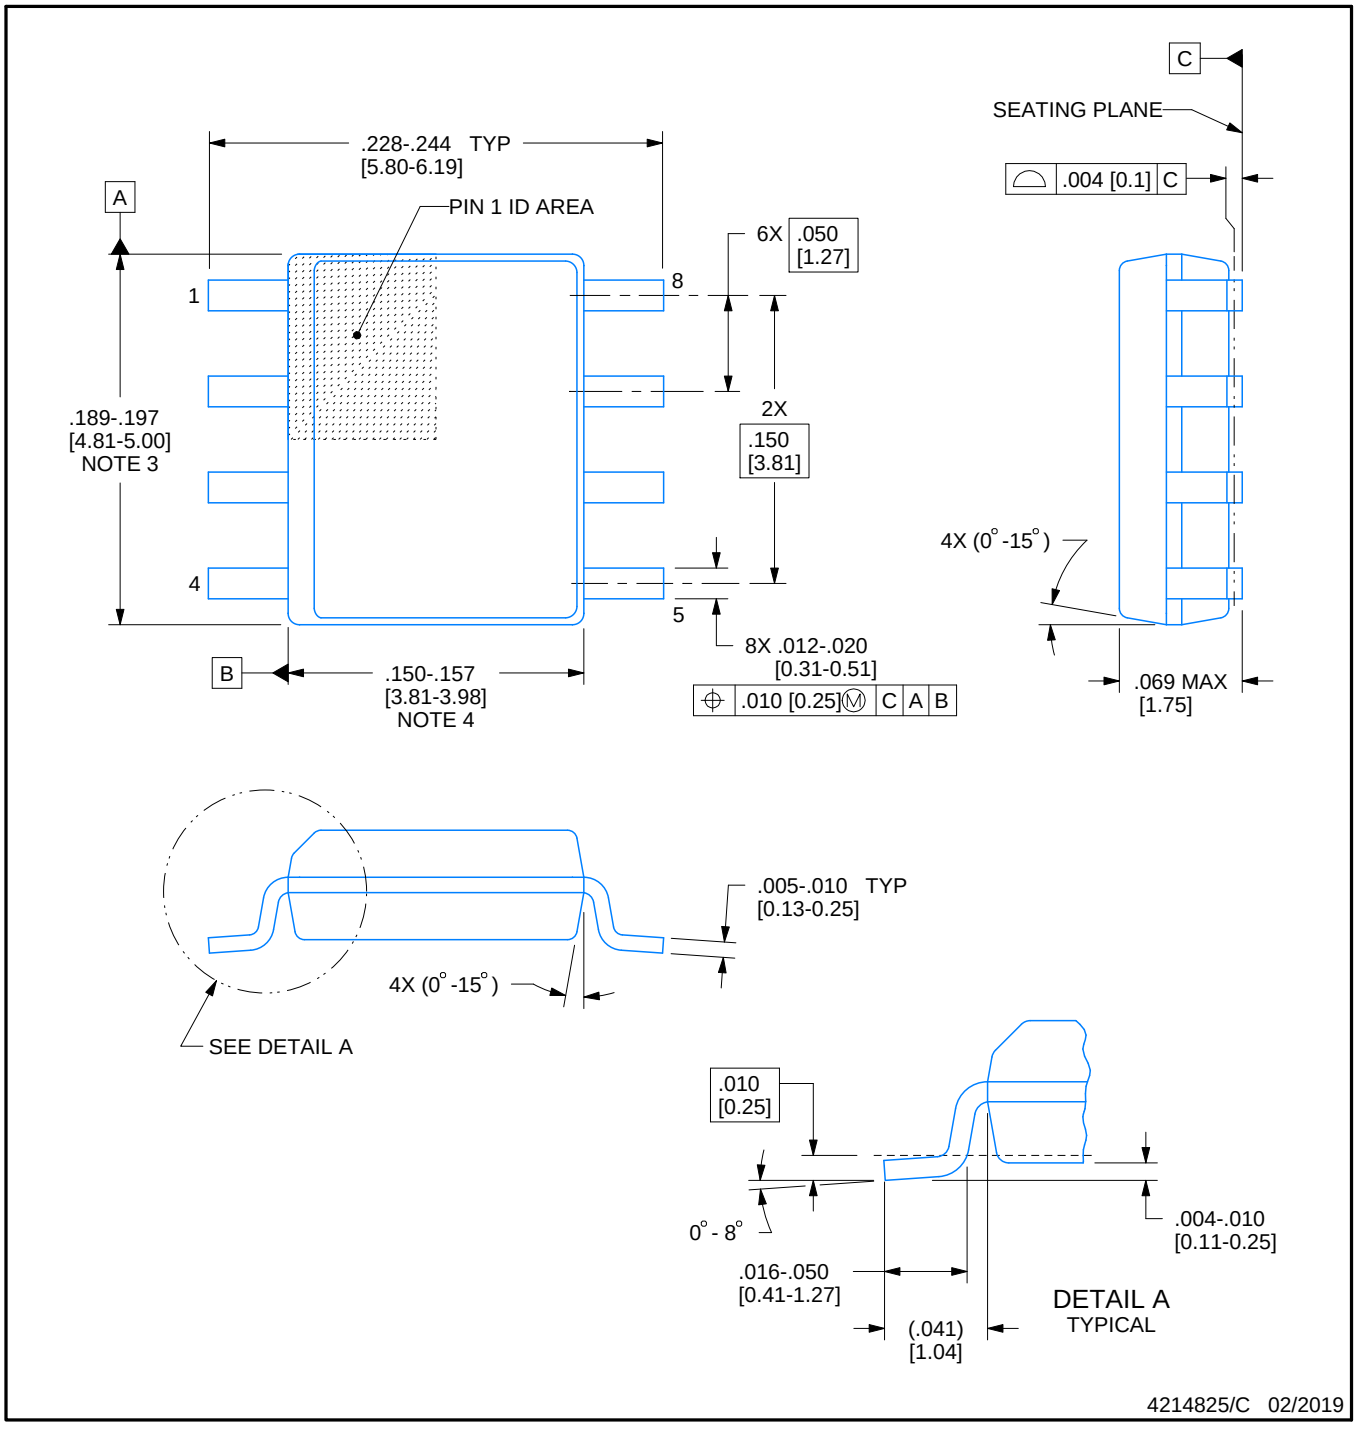

NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

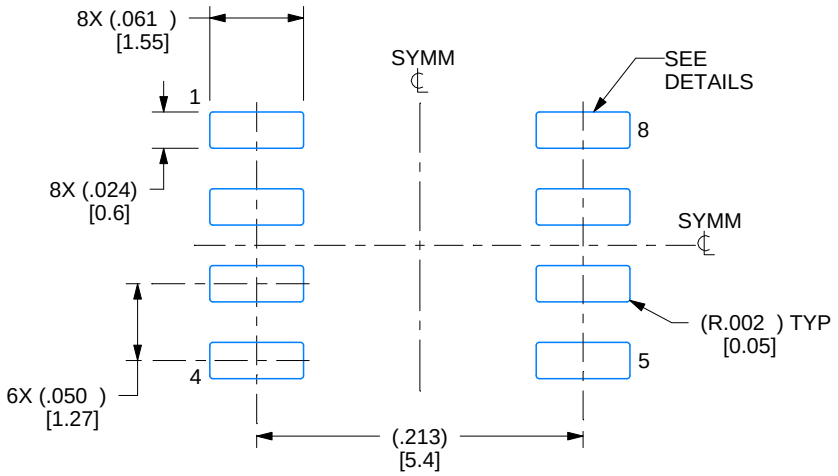

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

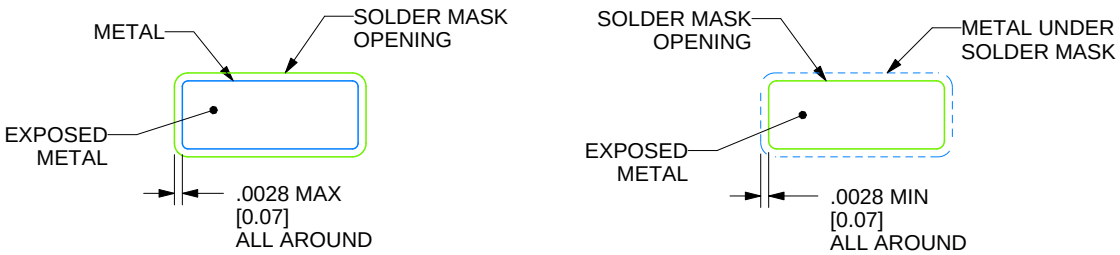

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

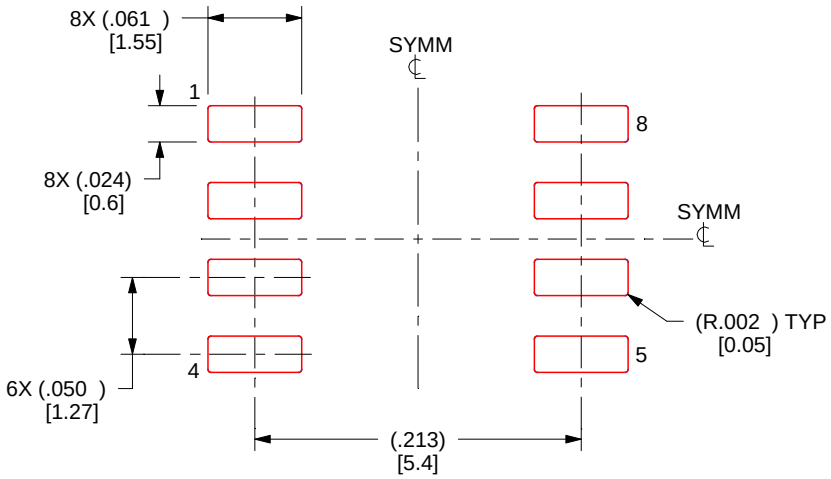

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

MECHANICAL DATA

PS (R-PDSO-G8) **PLASTIC SMALL-OUTLINE PACKAGE**

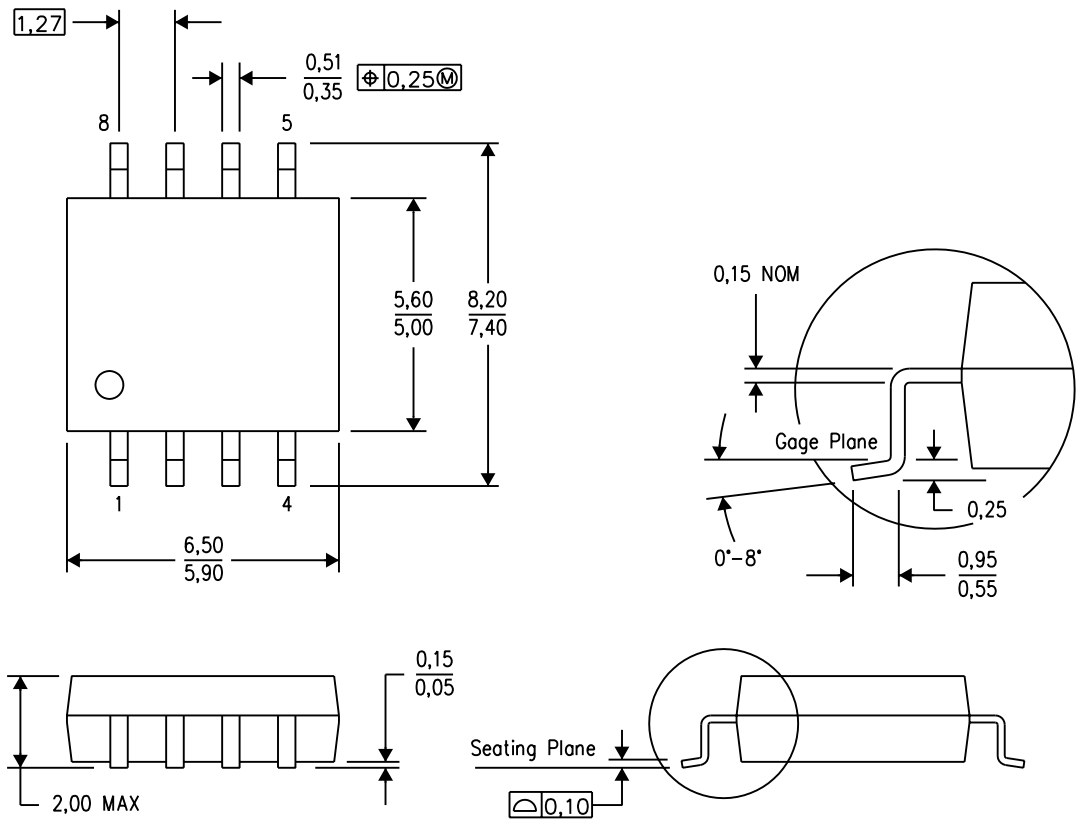

4040063/C 03/03

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

PS (R–PDSO–G8) PLASTIC SMALL OUTLINE

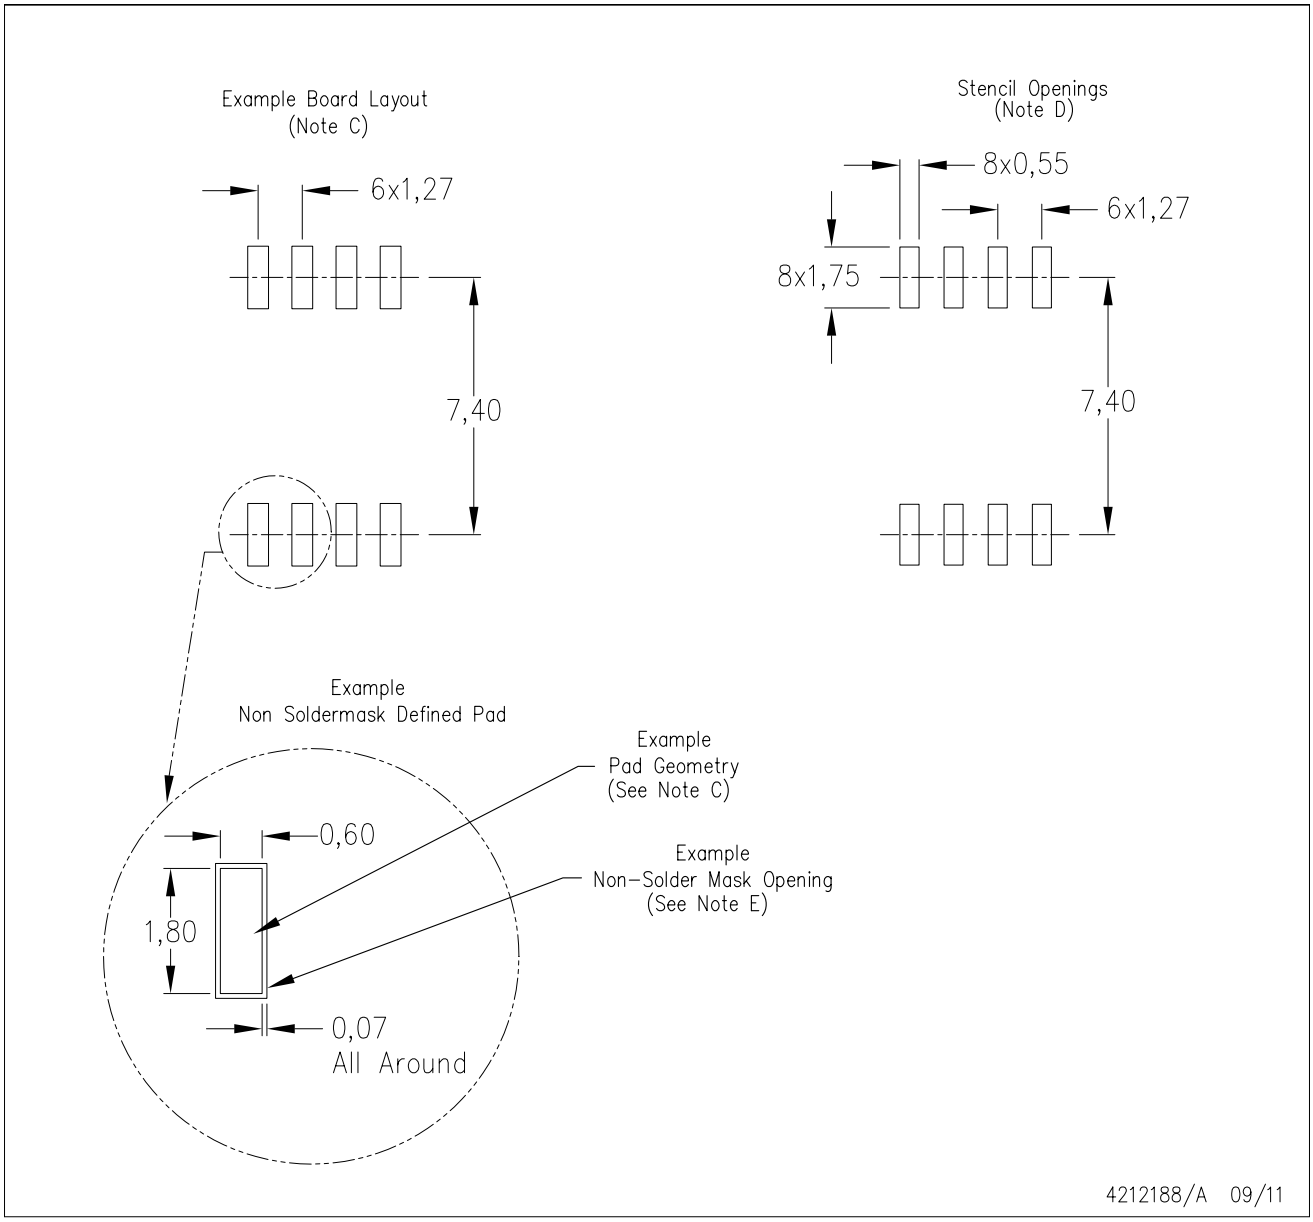

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

P (R–PDIP–T8) PLASTIC DUAL–IN–LINE PACKAGE

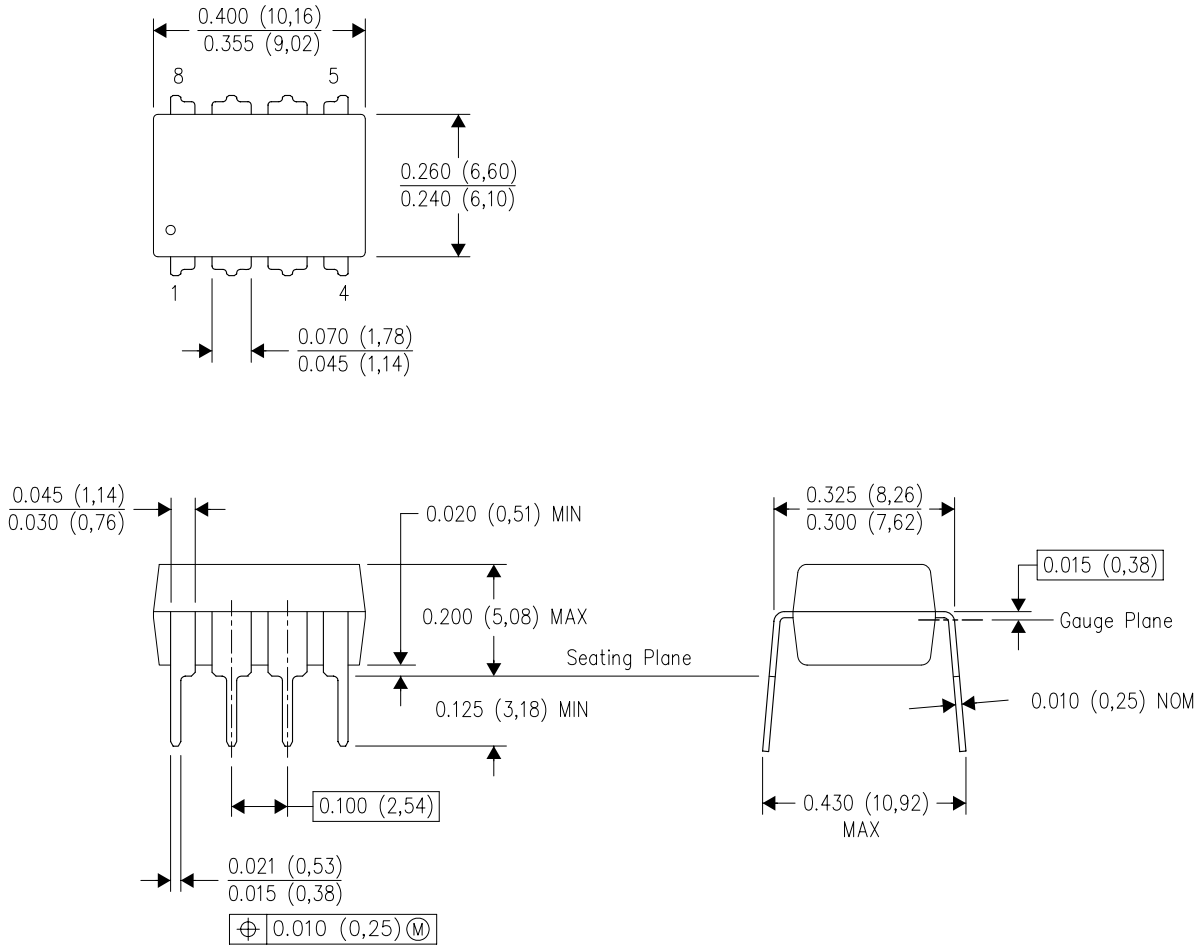

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS–001 variation BA.

N (R–PDIP–T**)

PLASTIC DUAL–IN–LINE PACKAGE

16 PINS SHOWN

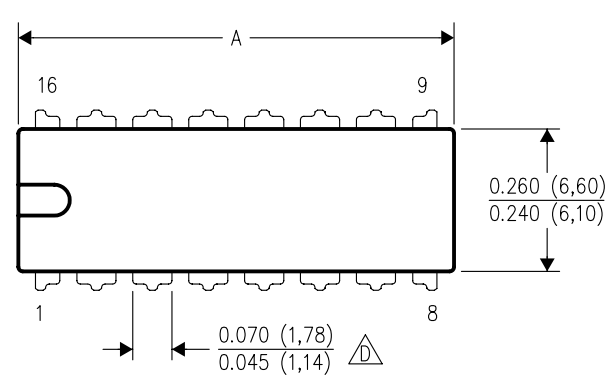

DIM \ PINS **	14	16	18	20
A MAX	0.775 (19,69)	0.775 (19,69)	0.920 (23,37)	1.060 (26,92)
A MIN	0.745 (18,92)	0.745 (18,92)	0.850 (21,59)	0.940 (23,88)
MS–001 VARIATION (C)	AA	BB	AC	AD

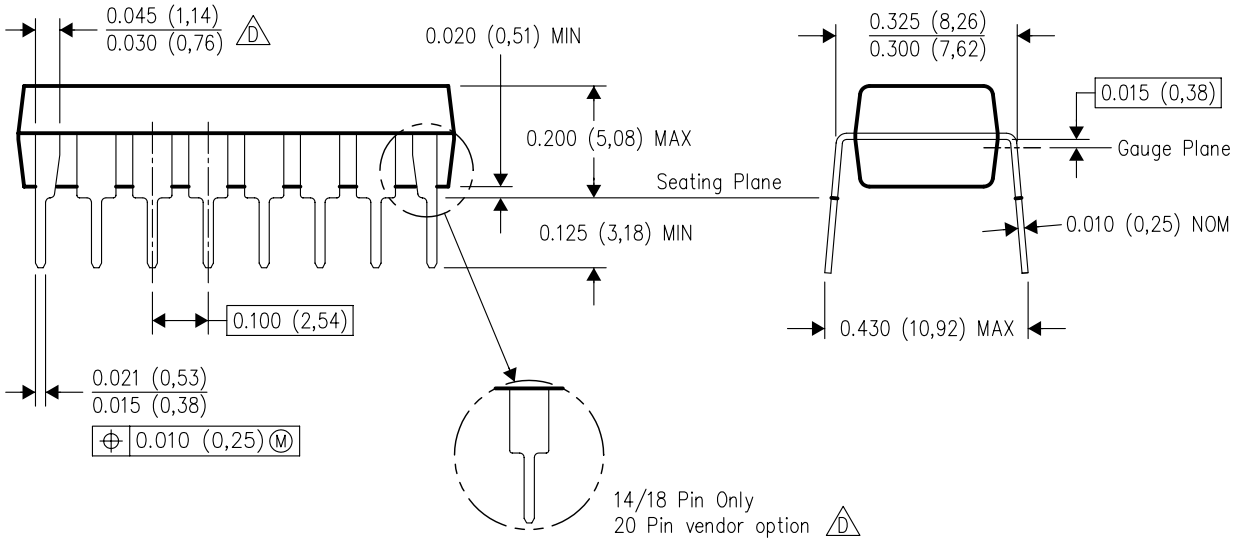

4040049/E 12/2002

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS–001, except 18 and 20 pin minimum body length (Dim A).
D. The 20 pin end lead shoulder width is a vendor option, either half or full width.

MECHANICAL DATA

NS (R-PDSO-G)** **PLASTIC SMALL-OUTLINE PACKAGE**

14-PINS SHOWN

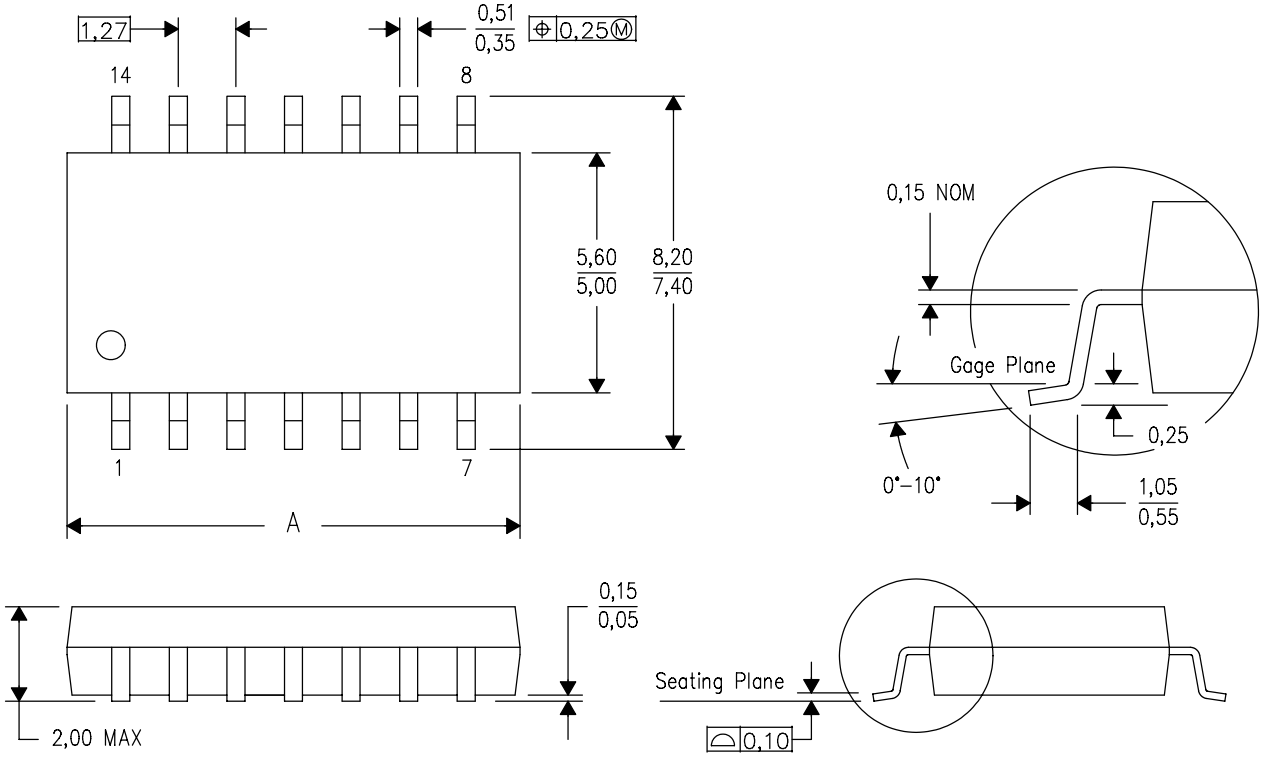

DIM \ PINS **	14	16	20	24
A MAX	10,50	10,50	12,90	15,30
A MIN	9,90	9,90	12,30	14,70

4040062/C 03/03

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated