TEXAS INSTRUMENTS
LSF0204-Q1
JAJSFL7B – JUNE 2018 – REVISED APRIL 2021

LSF0204-Q1 車載用認定済みの 4 ビット、自動双方向マルチ電圧レベル・トランスレータ

1 特長

- 車載アプリケーション向けに AEC-Q100 認証済み
  - 温度グレード 1：–40℃ ≤ T_A ≤ 125℃
  - デバイス HBM ESD 分類レベル 2
  - CDM ESD 分類レベル C6
- 方向ピンなしに、双方向の電圧変換を自動的に実行
- I^2C、I2S、SPI、UART、JTAG、MDIO、SDIO、GPIO など、オープン・ドレインまたはプッシュプルのアプリケーションをサポート
- 容量性負荷 30pF 以下で、100MHz までの昇圧変換と 100MHz を超える降圧変換をサポートし、容量性負荷 50pF で、40MHz までの昇圧または降圧変換をサポート
- I_{off}、部分電源オフ・モードをサポート (「*セクション 7.3*」を参照)
- 次の各電圧間で双方向電圧レベル変換が可能
  - 0.95V ↔ 1.8、2.5、3.3、5.5V
  - 1.2V ↔ 1.8、2.5、3.3、5.5V
  - 1.8V ↔ 2.5、3.3、5.5V
  - 2.5V ↔ 3.3、5.5V
  - 3.3V ↔ 5.5V
- 5V 許容の I/O ポート
- R_{on} が低いため、より優れた信号整合性を実現
- フロースルー・ピン配置により PCB 配線が簡素化
- JESD17 準拠で 100mA 超のラッチアップ性能

2 アプリケーション

- I2S、JTAG、SPI、SDIO、UART、I^2C、MDIO、PMBus、SMBus、その他のインターフェイス
- インフォテインメント用ヘッド・ユニット
- グラフィカル・クラスタ
- ADAS フュージョン
- ADAS フロント・カメラ
- HEV バッテリ管理システム

3 概要

LSF0204-Q1 は車載用認定済みの 4 チャネル自動双方向電圧トランスレータであり、0.8V～4.5V (Vref_A) および 1.8V～5.5V (Vref_B) で動作します。この範囲により、方向ピンを必要とせず、0.8V と 5.5V との間の双方向電圧変換が可能です。

An または Bn ポートが LOW のとき、スイッチはオン状態で、An および Bn ポートの間に抵抗の低い接続が存在します。スイッチの R_{on} が低いため、最小の伝播遅延と最小の信号歪みで接続を行えます。A または B 側の電圧は Vref_A に制限され、Vref_A と 5.5V との間で任意のレベルにプルアップできます。


各チャネルの電源電圧 (V_{PUn}) は、プルアップ抵抗により個別に設定可能です。たとえば、CH1 を昇圧変換モード (1.2V ↔ 3.3V) で、CH2 を降圧変換モード (2.5V ↔ 1.8V) で使用できます。

EN が HIGH のとき、トランスレータ・スイッチはオンで、An I/O が Bn I/O にそれぞれ接続され、ポート間の双方向データ・フローが可能になります。EN が LOW のとき、トランスレータ・スイッチはオフで、ポート間は高インピーダンスになります。EN 入力回路は、Vref_A により給電されるよう設計されています。電源オンまたは電源オフの間に高インピーダンス状態を保証するには、EN を LOW にする必要があります。

製品情報(1)

部品番号	パッケージ	本体サイズ (公称)
LSF0204QPWRQ1	TSSOP (14)	5.00mm × 4.40mm

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

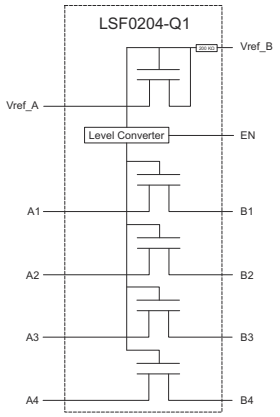

概略回路図

英語版の TI 製品についての情報を翻訳したこの資料は、製品の概要を確認する目的で便宜的に提供しているものです。該当する正式な英語版の最新情報は、www.ti.com で閲覧でき、その内容が常に優先されます。TI では翻訳の正確性および妥当性につきましては一切保証いたしません。実際の設計などの前には、必ず最新版の英語版をご参照くださいますようお願いいたします。

Table of Contents

1 特長 ... 1
2 アプリケーション ... 1
3 概要 ... 1
4 Revision History ... 2
5 Pin Configuration and Functions ... 3
6 Specifications ... 4
6.1 Absolute Maximum Ratings ... 4
6.2 ESD Ratings ... 4
6.3 Recommended Operating Conditions ... 4
6.4 Thermal Information ... 4
6.5 Electrical Characteristics ... 5
6.6 Switching Characteristics: AC Performance (Translating Down, 3.3 V to 1.8 V) ... 6
6.7 Switching Characteristics: AC Performance (Translating Down, 3.3 V to 1.2 V) ... 6
6.8 Switching Characteristics: AC Performance (Translating Up, 1.8 V to 3.3 V) ... 7
6.9 Switching Characteristics: AC Performance (Translating Up, 1.2 V to 1.8 V) ... 7
6.10 Typical Characteristics ... 8
7 Detailed Description ... 11
7.1 Overview ... 11
7.2 Functional Block Diagram ... 11
7.3 Feature Description ... 12
7.4 Device Functional Modes ... 12
8 Application and Implementation ... 13
8.1 Application Information ... 13
8.2 Typical Applications ... 13
9 Power Supply Recommendations ... 17
10 Layout ... 17
10.1 Layout Guidelines ... 17
10.2 Layout Example ... 17
11 Device and Documentation Support ... 18
11.1 Documentation Support ... 18
11.2 Receiving Notification of Documentation Updates ... 18
11.3 サポート・リソース ... 18
11.4 Trademarks ... 18
11.5 Electrostatic Discharge Caution ... 18
11.6 Glossary ... 18
12 Mechanical, Packaging, and Orderable Information ... 18

4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision A (September 2018) to Revision B (April 2021)	Page
• 文書全体にわたって表、図、相互参照の採番方法を更新	1
• Updated the *Bidirectional Translation* section to include inclusive terminology	14

Changes from Revision * (June 2018) to Revision A (September 2018)	Page
• 製品ステータスを事前情報から量産データに変更	1

Copyright © 2021 Texas Instruments Incorporated

5 Pin Configuration and Functions

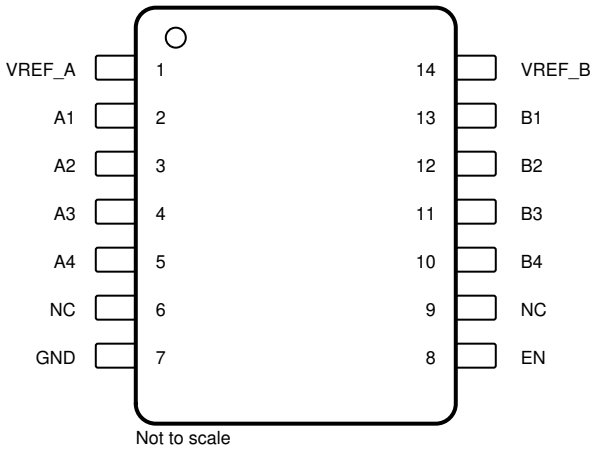


図 5-1. PW Package
14-Pin TSSOP
Top View

表 5-1. Pin Functions 2

PIN		I/O	DESCRIPTION
NAME	NO.		
VREF_A	1	—	Reference supply voltage; see セクション 8 section
A1	2	I/O	Input/output 1.
A2	3	I/O	Input/output 2.
A3	4	I/O	Input/output 3.
A4	5	I/O	Input/output 4.
NC	6	—	No connection. Not internally connected.
GND	7	—	Ground
EN	8	I	Translation enable input, EN is active-high
NC	9	—	No connection. Not internally connected.
B4	10	I/O	Input/output 4.
B3	11	I/O	Input/output 3.
B2	12	I/O	Input/output 2.
B1	13	I/O	Input/output 1.
VREF_B	14	—	Reference supply voltage; see セクション 8 section

Copyright © 2021 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
Input voltage, V_I (2)		–0.5	7	V
Input and output voltage, $V_{I/O}$ (2)		–0.5	7	V
Continuous channel current			128	mA
Input clamp current, I_{IK}	$V_I < 0$		–50	mA
Junction temperature, T_J			150	°C
Storage temperature, T_{stg}		–65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) The input and input/output negative-voltage ratings may be exceeded if the input and input/output clamp-current ratings are observed.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002(1)	±2000	V
		Charged-device model (CDM), per AEC Q100-001	±1000	

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
$V_{I/O}$	Input/output voltage	0	5.5	V
$V_{ref_A/B/EN}$	Reference voltage	0	5.5	V
I_{PASS}	Pass transistor current		64	mA
T_A	Operating free-air temperature	–40	125	°C

6.4 Thermal Information

THERMAL METRIC(1)		LSF0204-Q1 PW (TSSOP) 14 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	157.9	°C
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	82.3	°C
$R_{\theta JB}$	Junction-to-board thermal resistance	100.0	°C
ψ_{JT}	Junction-to-top characterization parameter	22.9	°C
ψ_{JB}	Junction-to-board characterization parameter	99.0	°C
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C

(1) For more information about traditional and new thermal metrics, refer to the *Semiconductor and IC Package Thermal Metrics* application report.

Copyright © 2021 Texas Instruments Incorporated

6.5 Electrical Characteristics

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP(1)	MAX	UNIT
V_{IK}	Input clamp voltage	I_I = -18 mA, V_{EN} = 0				–1.2	V
I_{IH}	I/O input high leakage	V_I = 5 V, V_{EN} = 0				5.0	µA
I_{CCBA}	Leakage from Vref_B to Vref_A	V_{ref_B} = 3.3 V, V_{ref_A} = 1.8 V, V_{EN} = V_{ref_A} I_O = 0, V_I = 3.3 V or GND				3.5	µA
I_{CCA} + I_{CCB} (3)	Total Current through GND	V_{ref_B} = 3.3 V, V_{ref_A} = 1.8 V, V_{EN} = V_{ref_A} I_O = 0, V_I = 3.3 V or GND			0.2		µA
I_{IN}	Control pin current	V_{ref_B} = 5.5 V, V_{ref_A} = 4.5 V, V_{EN} = 0 to V_{ref_A} I_O = 0				±1	µA
I_{off}	Power Off Leakage Current	V_{ref_B} = V_{ref_A} = 0 V, V_{EN} = GND I_O = 0, V_I = 5 V or GND				±1	µA
$C_{I(ref_A/B/EN)}$	Input capacitance	V_I = 3 V or 0			7		pF
$C_{io(off)}$	I/O pin off-state capacitance	V_O = 3 V or 0, VEN = 0			5.0	6.0	pF
$C_{io(on)}$	I/O pin on-state capacitance	V_O = 3 V or 0, VEN = Vref_A			10.5	13	pF
$V_{IH\ (EN\ pin)}$	High-level input voltage	V_{ref_A} = 1.5 V to 4.5 V		0.7×Vref_A			V
$V_{IL\ (EN\ pin)}$	Low-level input voltage	V_{ref_A} = 1.5 V to 4.5 V				0.3×Vref_A	V
$V_{IH\ (EN\ pin)}$	High-level input voltage	V_{ref_A}= 1.0 V to 1.5 V		0.8×Vref_A			V
$V_{IL\ (EN\ pin)}$	Low-level input voltage	V_{ref_A} = 1.0 V to 1.5 V				0.3×Vref_A	V
Δt/Δv (EN pin)	Input transition rise or fall rate for EN pin				10		ns/V
r_{on} (2)	On-state resistance	V_I = 0, I_O = 64 mA	V_{ref_A} = V_{EN} = 3.3 V; V_{ref_B} = 5 V		3		Ω
			V_{ref_A} = V_{EN} = 1.8 V; V_{ref_B} = 5 V		4		
		V_I = 0, I_O = 32 mA	V_{ref_A} = V_{EN} = 1.0 V; V_{ref_B} = 5 V		9		Ω
			V_{ref_A} = V_{EN} = 1.8 V; V_{ref_B} = 5 V		4		
		V_I = 0, I_O = 32 mA , V_{ref_A} = V_{EN} = 2.5 V; V_{ref_B} = 5 V			10		Ω
		V_I = 1.8 V, I_O = 15 mA, V_{ref_A} = V_{EN} = 3.3 V; V_{ref_B} = 5 V			5		Ω
		V_I = 1.0 V, I_O = 10 mA, V_{ref_A} = V_{EN} = 1.8 V; V_{ref_B} = 3.3 V			8		Ω
		V_I = 0 V, I_O = 10 mA, V_{ref_A} = V_{EN} = 1.0 V; V_{ref_B} = 3.3 V			6		Ω
		V_I = 0 V, I_O = 10 mA, V_{ref_A} = V_{EN} = 1.0 V; V_{ref_B} = 1.8 V			6		Ω

(1) All typical values are at T_A = 25°C.
(2) Measured by the voltage drop between the A and B terminals at the indicated current through the switch. On-state resistance is determined by the lowest voltage of the two (A or B) terminals.
(3) The actual supply current for LSF0204 is I_{CCA} + I_{CCB}; the leakage from Vref_B to Vref_A can be measured on Vref_A and Vref_B pin

Copyright © 2021 Texas Instruments Incorporated

6.6 Switching Characteristics: AC Performance (Translating Down, 3.3 V to 1.8 V)

over recommended operating free-air temperature range, V_{rev-A} = 1.8 V, V_{rev-B} = 3.3 V, V_{EN} = 1.8 V, Vpu_1 = 3.3 V, Vpu_2 = 1.8 V, R_L = NA, V_{IH} = 3.3 V, V_{IL} = 0 V_M = 1.15 V (unless otherwise noted)

PARAMETER		TEST CONDITION		MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time (low-to-high output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		0.7	5.49	ns
			C_L = 30 pF		0.5	5.29	
			C_L = 15 pF		0.3	5.19	
t_{PHL}	Propagation delay time (high-to-low output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		0.9	4.9	ns
			C_L = 30 pF		0.7	4.7	
			C_L = 15 pF		0.5	4.5	
t_{PLZ}	Disable time (from low level)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		13	18	ns
			C_L = 30 pF		12	16.5	
			C_L = 15 pF		11	15	
t_{PZL}	Disable time	(Input) A or B-to-B or A (Output)	C_L = 50 pF		33	45	ns
			C_L = 30 pF		30	40	
			C_L = 15 pF		23	37	
f_{MAX}	Maximum time	(Input) A or B-to-B or A (Output)	C_L = 50 pF		50		MHz
			C_L = 30 pF		100		
			C_L = 15 pF		100		

6.7 Switching Characteristics: AC Performance (Translating Down, 3.3 V to 1.2 V)

over recommended operating free-air temperature range V_{rev-A} = 1.2 V, V_{rev-B} = 3.3 V, V_{EN} = 1.2 V, Vpu_1 = 3.3 V, Vpu_2 = 1.2 V, R_L = NA, V_{IH} = 3.3V, V_{IL} = 0 V_M = 0.85 V (unless otherwise noted)

PARAMETER		TEST CONDITION		MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time (low-to-high output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		0.8	4.1	ns
			C_L = 30 pF		0.5	3.9	
			C_L = 15 pF		0.3	3.8	
t_{PHL}	Propagation delay time (high-to-low output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		0.9	4.7	ns
			C_L = 30 pF		0.7	4.5	
			C_L = 15 pF		0.6	4.3	
f_{MAX}	Maximum time	(Input) A or B-to-B or A (Output)	C_L = 50 pF		50		MHz
			C_L = 30 pF		100		
			C_L = 15 pF		100		

Copyright © 2021 Texas Instruments Incorporated

6.8 Switching Characteristics: AC Performance (Translating Up, 1.8 V to 3.3 V)

over recommended operating free-air temperature range V_{rev-A} = 1.8 V, V_{rev-B} = 3.3 V, V_{EN} = 1.8 V, Vpu_1 = 3.3 V, Vpu_2 = 1.8V, R_L = 500 Ω, V_{IH} = 1.8V,V_{IL} = 0 V_M = 0.9V (unless otherwise noted)

PARAMETER		TEST CONDITION		MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time (low-to-high output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		0.6	5.7	ns
			C_L = 30 pF		0.4	5.3	
			C_L = 15 pF		0.2	5.13	
t_{PHL}	Propagation delay time (high-to-low output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		1.3	6.7	ns
			C_L = 30 pF		1	6.4	
			C_L = 15 pF		0.7	5.3	
t_{PLZ}	Disable time (from low level)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		13	18	ns
			C_L = 30 pF		12	16.5	
			C_L = 15 pF		11	15	
t_{PZL}	Disable time	(Input) A or B-to-B or A (Output)	C_L = 50 pF		33	45	ns
			C_L = 30 pF		30	40	
			C_L = 15 pF		23	37	
f_{MAX}	Maximum time	(Input) A or B-to-B or A (Output)	C_L = 50 pF		50		MHz
			C_L = 30 pF		100		
			C_L = 15 pF		100		

6.9 Switching Characteristics: AC Performance (Translating Up, 1.2 V to 1.8 V)

over recommended operating free-air temperature range, V_{rev-A} = 1.2 V, V_{rev-B} = 1.8 V, V_{EN} = 1.2 V, Vpu_1 = 1.8 V, Vpu_2 = 1.2 V, R_L = 500 Ω, V_{IH} = 1.2V, V_{IL} = 0 V_M = 0.6 V (unless otherwise noted)

PARAMETER		TEST CONDITION		MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time (low-to-high output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		0.65	7.25	ns
			C_L = 30 pF		0.4	7.05	
			C_L = 15 pF		0.2	6.85	
t_{PHL}	Propagation delay time (high-to-low output)	(Input) A or B-to-B or A (Output)	C_L = 50 pF		1.6	7.03	ns
			C_L = 30 pF		1.3	6.5	
			C_L = 15 pF		1	5.4	
f_{MAX}	Maximum time	(Input) A or B-to-B or A (Output)	C_L = 50 pF		50		MHz
			C_L = 30 pF		100		
			C_L = 15 pF		100		

Copyright © 2021 Texas Instruments Incorporated

6.10 Typical Characteristics

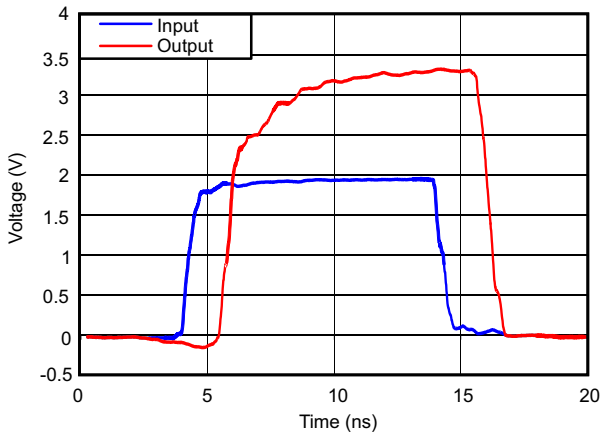



図 6-1. Signal Integrity (1.8 V to 3.3 V Translation Up at 50 MHz)

Copyright © 2021 Texas Instruments Incorporated

Parameter Measurement Information

The outputs are measured one at a time, with one transition per measurement. All input pulses are supplied by generators that have the following characteristics:

- PRR ≤ 10 MHz
- Z_O = 50 Ω
- T_r ≤ 2 ns
- T_f ≤ 2 ns



A. C_L includes probe and jig capacitance.

図 7-1. Load Circuit for Outputs

USAGE	SWITCH
Translating up	S1
Translating down	S2


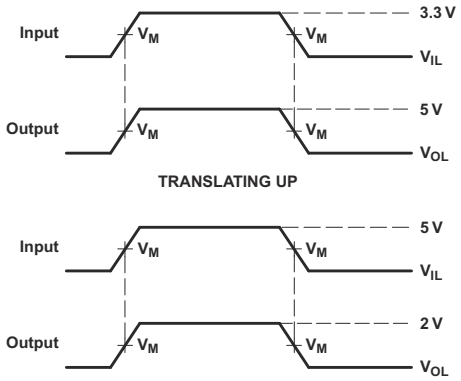


図 7-2. Translating Down

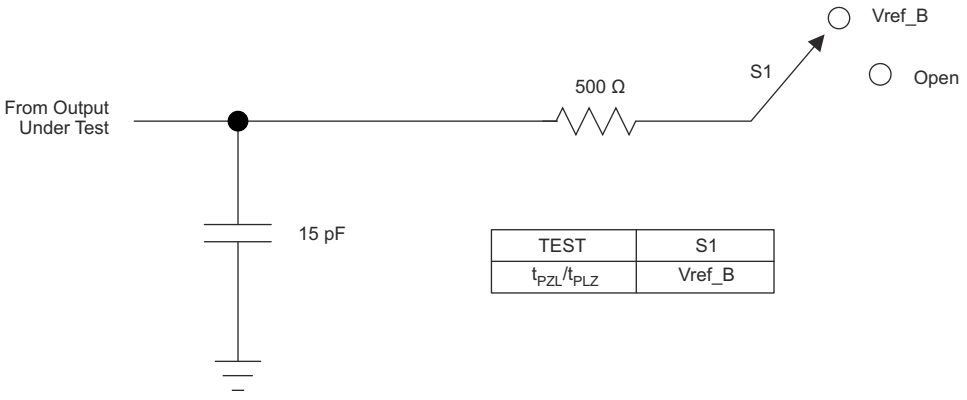

TEST	S1
t_{PZL}/t_{PLZ}	Vref_B

図 7-3. Load Circuit for Enable/Disable Time Measurement

Copyright © 2021 Texas Instruments Incorporated

7.1 Load Circuit AC Waveform for Outputs

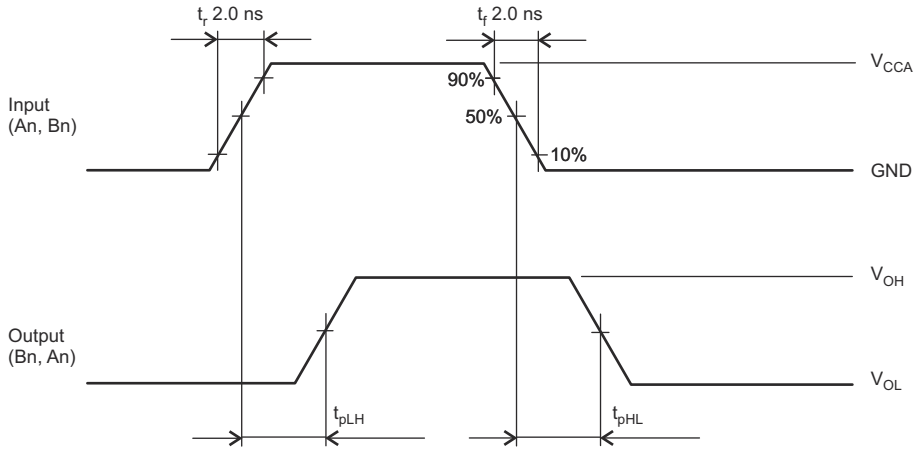


図 7-4. t_{PLH}, t_{PHL}

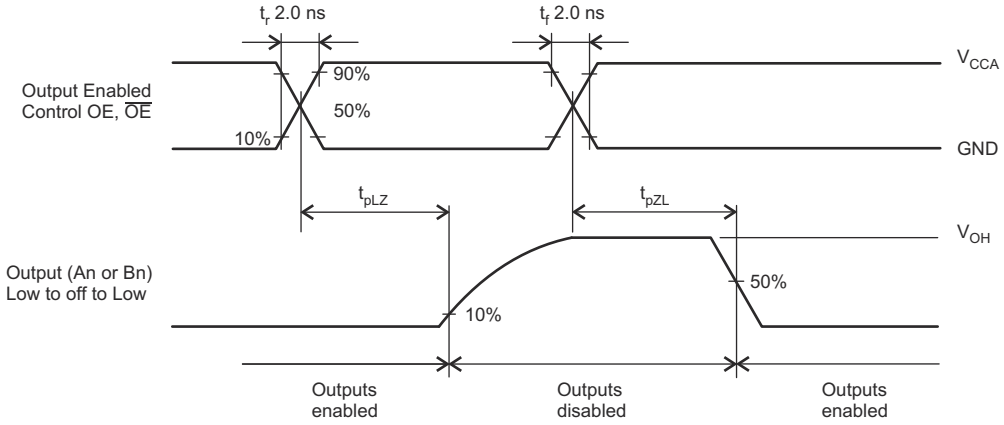


図 7-5. t_{PLZ}, t_{PZL}


Copyright © 2021 Texas Instruments Incorporated

7 Detailed Description

7.1 Overview

The LSF0204-Q1 may be used in level translation applications for interfacing devices or systems operating at different interface voltages. The LSF0204-Q1 is ideal for use in applications where an open-drain driver is connected to the data I/Os. LSF0204-Q1 can achieve 100 MHz data rate with the appropriate pull-up resistors and layout design. The LSF0204-Q1 can also be used in applications where a push-pull driver is connected to the data I/Os.

7.2 Functional Block Diagram

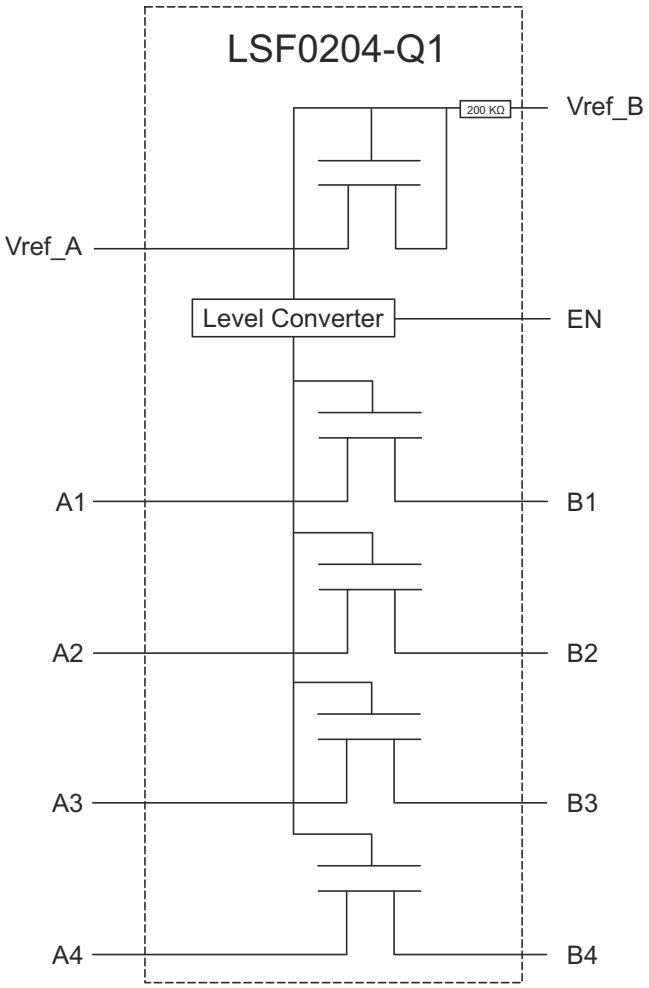

7.3 Feature Description

7.3.1 Auto-Bidirectional Voltage Translation Without DIR Pin Terminal

The LSF0204-Q1 device is an auto bidirectional voltage level translator that operates from 0.95 V to 4.5 V on Vref_A and 1.8 V to 5.5 V on Vref_B. This allows bidirectional voltage translation between 0.95 V and 5.5 V without the need for a direction pin in open-drain or push-pull applications.

7.3.2 Support Multiple High Speed Translation Interfaces

The LSF0204-Q1 device is able to perform voltage translation for open-drain interfaces such as I2C, MDIO, SMBUS, and PMBUS or push-pull interfaces such as I2S, SPI, UART, SDIO, and GPIO. The LSF0204-Q1 device supports level translation applications with transmission speeds greater than 100 MHz using a 200-Ω pullup resistor with a 15-pF capacitive load. See the *Down Translation with the LSF family* and *Up Translation with the LSF family* videos.

7.3.3 5-V Tolerance on IO Port and 125°C Support

The LSF0204-Q1, provides up to 5-V over-voltage tolerance on each of its IO channels. The device operating ambient temperature from –40°C to 125°C is critical in supporting automotive applications.

7.3.4 Channel Specific Translation

The LSF0204-Q1 can work as multi-voltage level translator using specific pullup voltage (Vpu) on each IO channel. Watch the *Multi-Voltage Translation with the LSF Family video*.

7.3.5 Ioff, Partial Power Down Mode

When V_{ref_A} or V_{ref_B} = 0, all the data IO pins are in high impedance.

EN logic circuit is referenced to V_{ref_A} supply. No power sequence is required to enable and operate LSF0204-Q1.

7.4 Device Functional Modes

表 7-1 lists the device functional modes of the LSF0204-Q1 device.

表 7-1. Function Table

INPUT EN(1) TERMINAL	FUNCTION
H	An = Bn
L	Hi-Z

(1) EN is controlled by V_{ref_A} logic levels.

Copyright © 2021 Texas Instruments Incorporated

8 Application and Implementation

Note

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

8.1 Application Information

LSF0204-Q1 performs voltage translation for open-drain or push-pull interface. 表 8-1 provides examples of interfaces as reference in regards to the different channel numbers that are supported by the LSF0204-Q1.

表 8-1. Voltage Translator by Interface

PART NAME	CHANNEL NUMBER	INTERFACE
LSF0204-Q1	4	Open Drain : I^2C, MDIO, SMBus, PMBus, GPIO
		Push Pull: GPIO, SPI, I2S, UART, JTAG, SD

8.2 Typical Applications

8.2.1 I^2C, PMBus, SMBus, GPIO Application

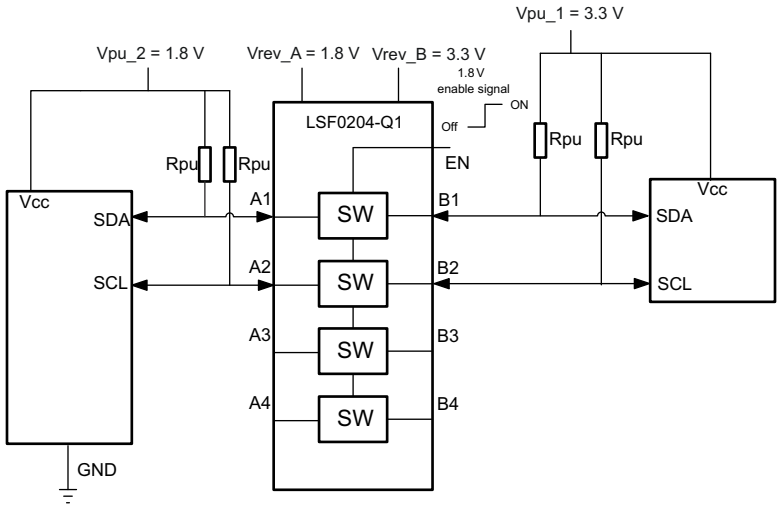


図 8-1. Bidirectional Translation to Multiple Voltage Levels

8.2.1.1 Design Requirements

8.2.1.1.1 Enable, Disable, and Reference Voltage Guidelines

The LSF0204-Q1 has an EN input that is used to disable the device by setting EN LOW, which places all I/Os in the high-impedance state. Since LSF0204-Q1 is switch-type voltage translator, the power consumption is very low. It is recommended to always enable LSF0204-Q1 for bidirectional application (I2C, SMBus, PMBus, or MDIO).

Copyright © 2021 Texas Instruments Incorporated

表 8-2. Application Operating Condition

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT
Vref_A	Reference voltage (A)	0.8		4.5	V
Vref_B	Reference voltage (B)	Vref_A + 0.8		5.5	V
$V_{I(EN)}$ (1)	Input voltage on EN terminal	0		Vref_A	V
Vpu	Pull-up supply voltage	0		Vref_B	V

(1) Refer V_{IH} and V_{IL} for $V_{I(EN)}$

Vref_B is recommended to be 1.0 V higher than Vref_A for best signal integrity.

The LSF0204-Q1 device enables multi-voltage translation by using the desired pull up voltage on each of the channels.

Note

Vref_A must be set as lowest voltage level while using the device in multi-voltage translation application.

8.2.1.2 Detailed Design Procedure

8.2.1.2.1 Bidirectional Translation

The controller output driver may be push-pull (pull-up resistors may be required) or open-drain (pull-up resistors required) and the peripheral device output can be push-pull or open-drain (pull-up resistors are required to pull the Bn outputs to Vpu).

Note

However, if either output is push-pull, data must be unidirectional or the outputs must be 3-state and be controlled by some direction-control mechanism to prevent HIGH-to-LOW contentions in either direction. If both outputs are open-drain, no direction control is needed.

In 図 8-1, the reference supply voltage (Vref_A) is connected to the processor core power supply voltage. When Vref_B is connected through to a 3.3 V Vpu power supply, and Vref_A is set 1.0 V. The output of A3 and B4 has a maximum output voltage equal to Vref_A, and the bidirectional interface (Ch1/2, MDIO) has a maximum output voltage equal to Vpu.

8.2.1.2.1.1 Pull-Up Resistor Sizing

The pull-up resistor value needs to limit the current through the pass transistor when it is in the ON state to about 15 mA. This ensures a pass voltage of 260 mV to 350 mV. If the current through the pass transistor is higher than 15 mA, the pass voltage also is higher in the ON state. To set the current through each pass transistor at 15 mA, to calculate the pull-up resistor value use 式 1.

$$Rpu = (Vpu – 0.35\ V) / 0.015\ A \quad (1)$$

表 8-3 summarizes resistor values, reference voltages, and currents at 15 mA, 10 mA, and 3 mA. The resistor value shown in the +10% column (or a larger value) should be used to ensure that the pass voltage of the transistor is 350 mV or less. The external driver must be able to sink the total current from the resistors on both sides of the LSF0204-Q1 device at 0.175 V, although the 15 mA applies only to current flowing through the LSF0204-Q1 device.

The LSF0204-Q1 does not provide any drive capability. Therefore higher frequency applications will require higher drive strength from the host side. No pullup resistor is needed on the host side (3.3 V) if the LSF0204-Q1 is being driven by standard CMOS totem pole output driver. Best practice is to minimize the trace length from the LSF0204-Q1 on the sink side (1.8 V) to minimize signal degradation.

Copyright © 2021 Texas Instruments Incorporated

表 8-3. Pull-Up Resistor Values

PULLUP RESISTOR VALUE (Ω)						
V_{DPU}	15 mA		10mA		3 mA	
	NOMINAL	+10%(1)	NOMINAL	+10%(1)	NOMINAL	+10%(1)
5 V	310	341	465	512	1550	1705
3.3 V	197	217	295	325	983	1082
2.5 V	143	158	215	237	717	788
1.8 V	97	106	145	160	483	532
1.5 V	77	85	115	127	383	422
1.2 V	57	63	85	94	283	312

(1) +10% to compensate for V_{DD} range and resistor tolerance.

8.2.1.3 Application Curve

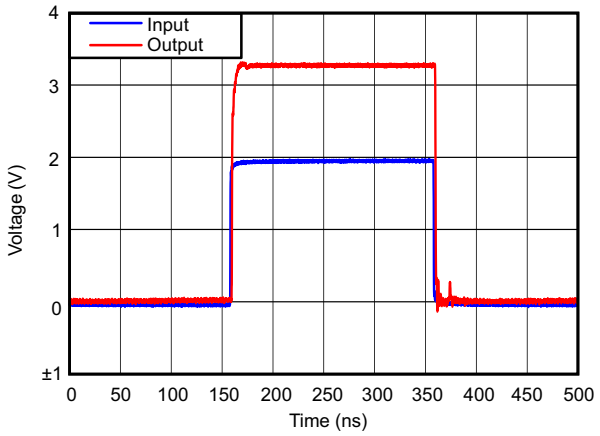


図 8-2. Captured Waveform From Above I²C Set-Up (1.8 V to 3.3 V at 2.5 MHz)

8.2.2 MDIO Application

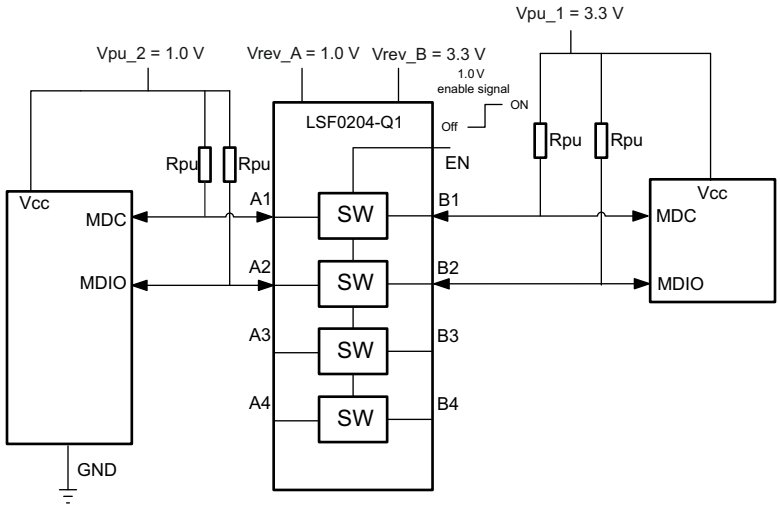


図 8-3. Typical Application Circuit (MDIO/Bidirectional Interface)

8.2.2.1 Design Requirements

See the *Design Requirements*.

8.2.2.2 Detailed Design Procedure

See the *Detailed Design Procedure*.

8.2.3 Multiple Voltage Translation in Single Device, Application

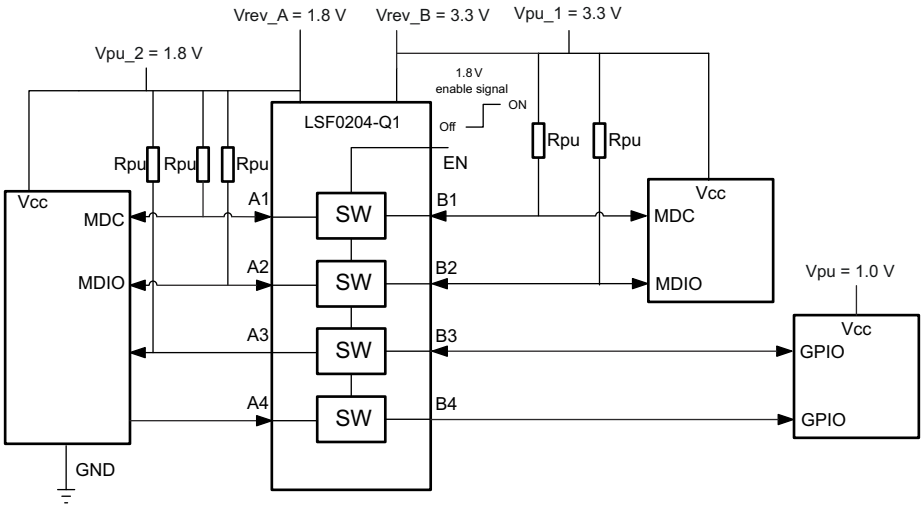


図 8-4. Bidirectional Translation to Multiple voltage levels

8.2.3.1 Design Requirements

See the *Design Requirements*.

8.2.3.2 Detailed Design Procedure

See the *Detailed Design Procedure*.

Copyright © 2021 Texas Instruments Incorporated

9 Power Supply Recommendations

There are no power sequence requirements for the LSF0204-Q1. See 表 8-2 for recommended operating voltages for all supply and input pins.

10 Layout

10.1 Layout Guidelines

The signal integrity of the switch-type based LSF0204-Q1 level translator is dependent on the pull-up resistor and the PCB board parasitic capacitance. Consider the following recommendations when designing with the LSF0204-Q1:

- Minimize the trace length to reduce the parasitic capacitance
- The trace length should be less than half the time of flight to reduce ringing and line reflections or non-monotonic behavior in the switching region
- Minimize stubs on the signal path
- Place the LSF0204-Q1 device near the high voltage side

10.2 Layout Example

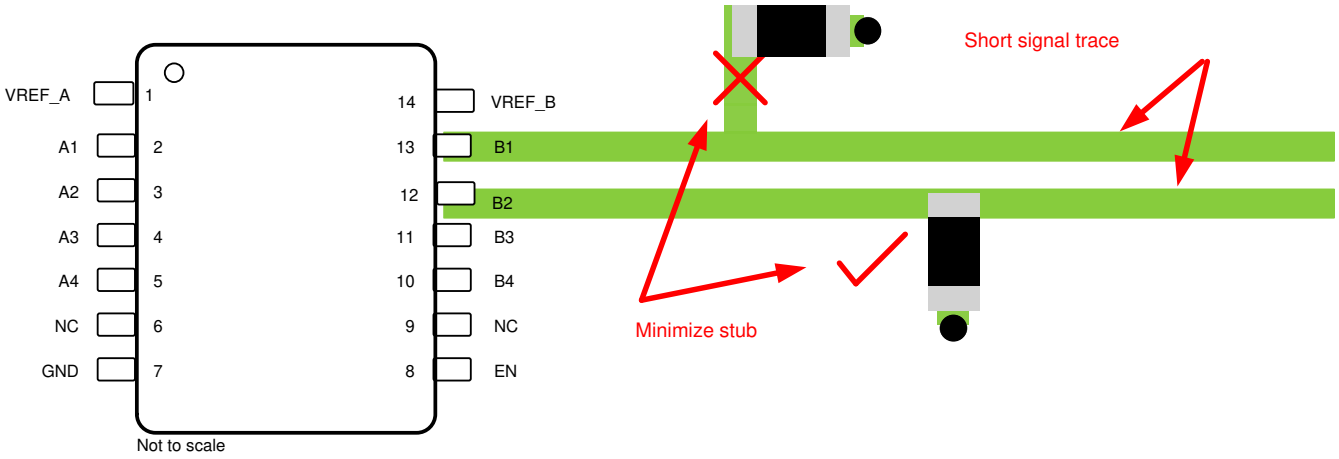


図 10-1. Short Trace Layout

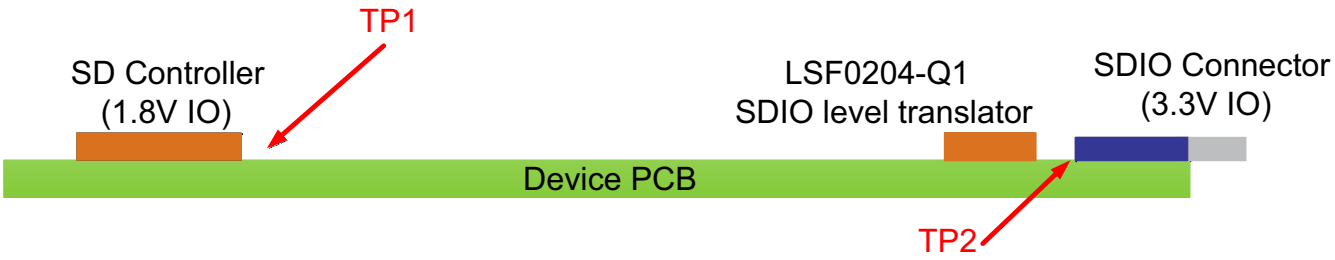


図 10-2. Device Placement

11 Device and Documentation Support

11.1 Documentation Support

11.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, TI Logic Minute: *Introduction – Voltage Level Translation with the LSF Family* video
- Texas Instruments, *Voltage-Level Translation with the LSF Family* application report
- Texas Instruments, *Biasing requirements for TXS, TXB, LSF Translators* application report
- Texas Instruments, *Factors affecting Vol for TXS and LSF translation devices* application report

11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.3 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の使用条件を参照してください。

11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
すべての商標は、それぞれの所有者に帰属します。

11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.6 Glossary

TI Glossary	This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2021 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LSF0204QPWRQ1	Active	Production	TSSOP (PW) | 14	2000 | LARGE T&R	Yes	NIPDAU | SN	Level-1-260C-UNLIM	-40 to 125	LSF204Q
LSF0204QPWRQ1.B	Active	Production	TSSOP (PW) | 14	2000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LSF204Q

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LSF0204-Q1 :


- Catalog : LSF0204

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

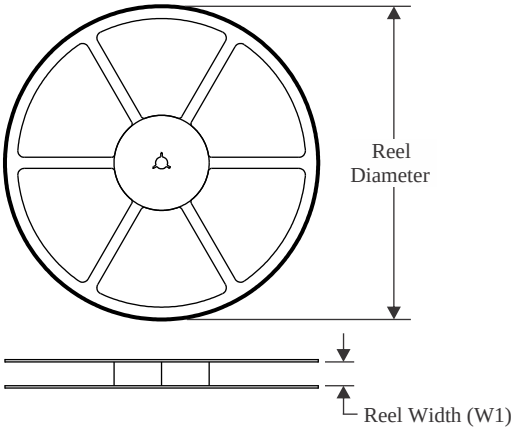


TAPE DIMENSIONS

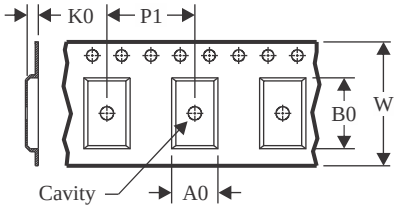

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

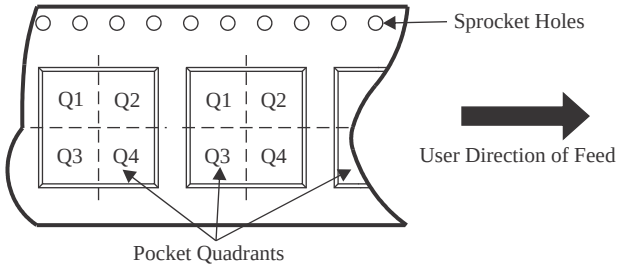

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LSF0204QPWRQ1	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

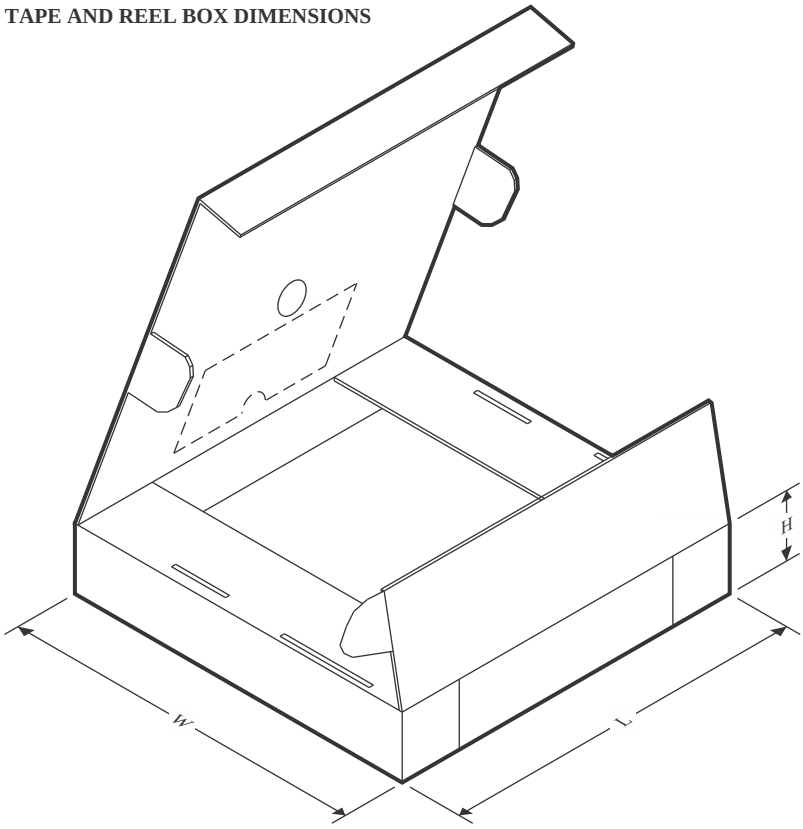

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LSF0204QPWRQ1	TSSOP	PW	14	2000	353.0	353.0	32.0

PACKAGE OUTLINE

PW0014A


TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

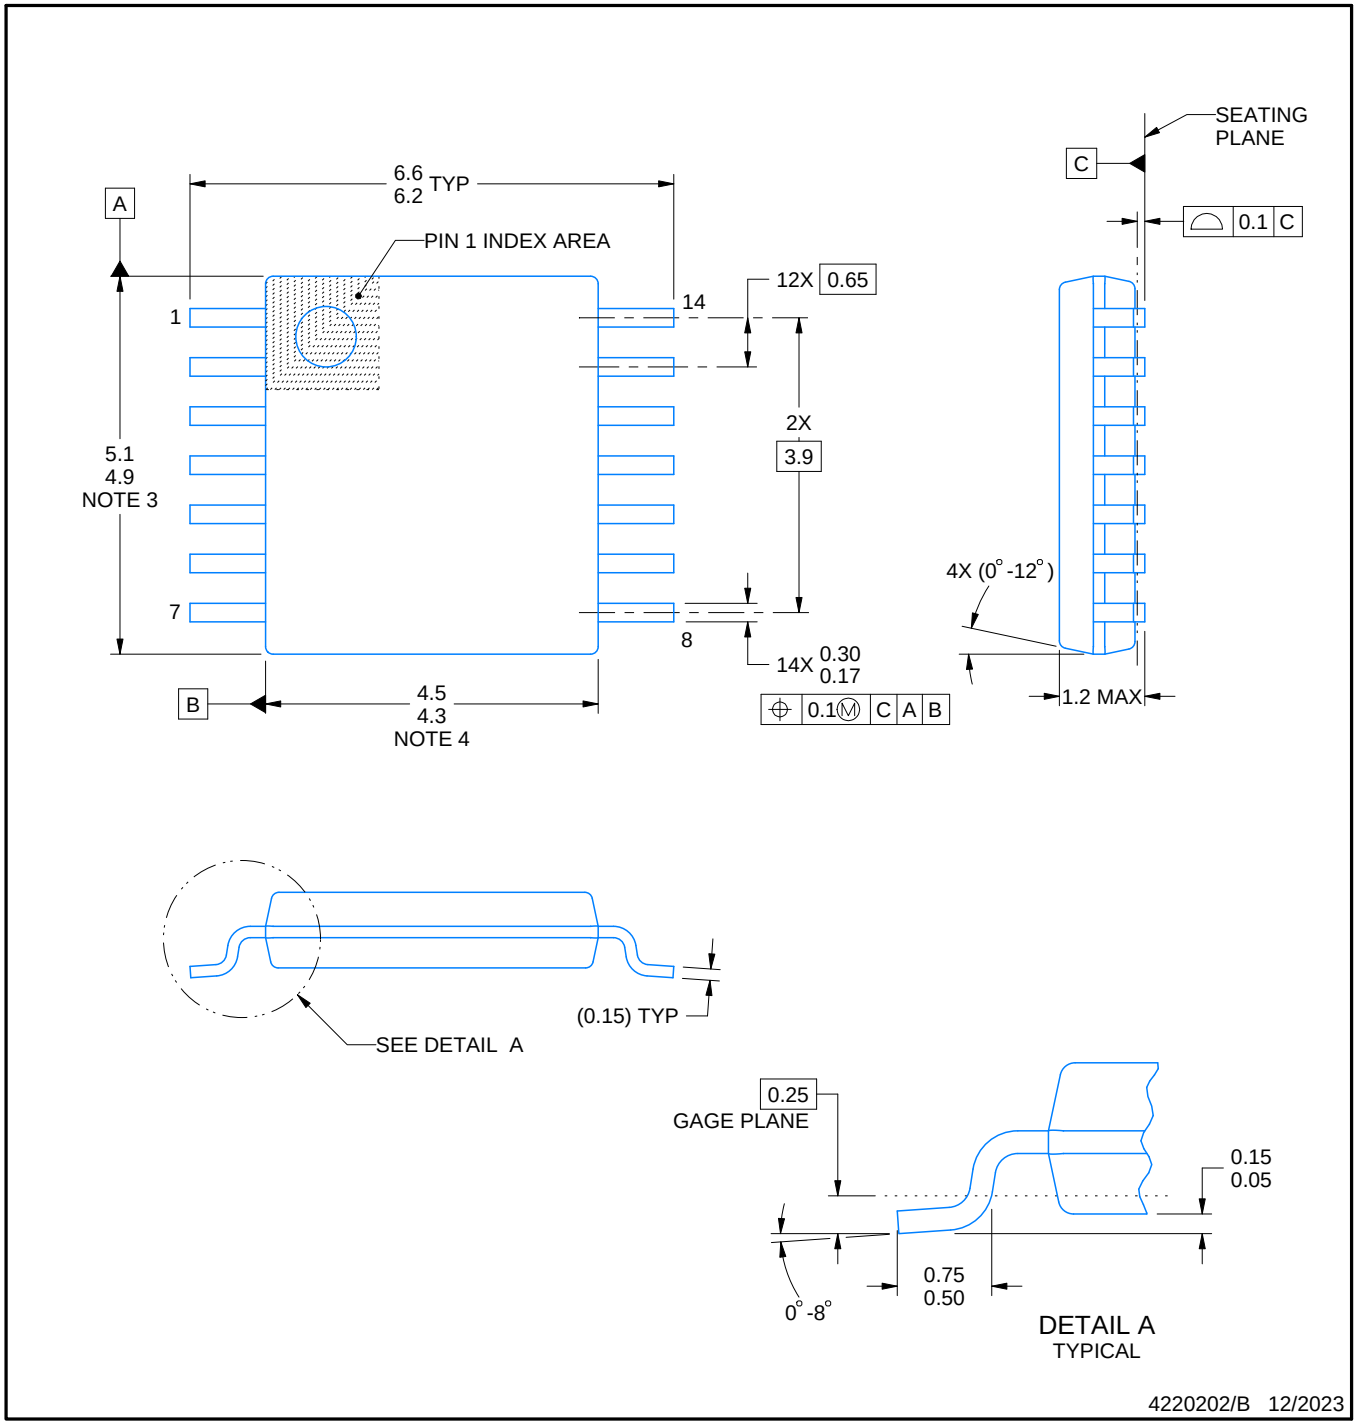


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

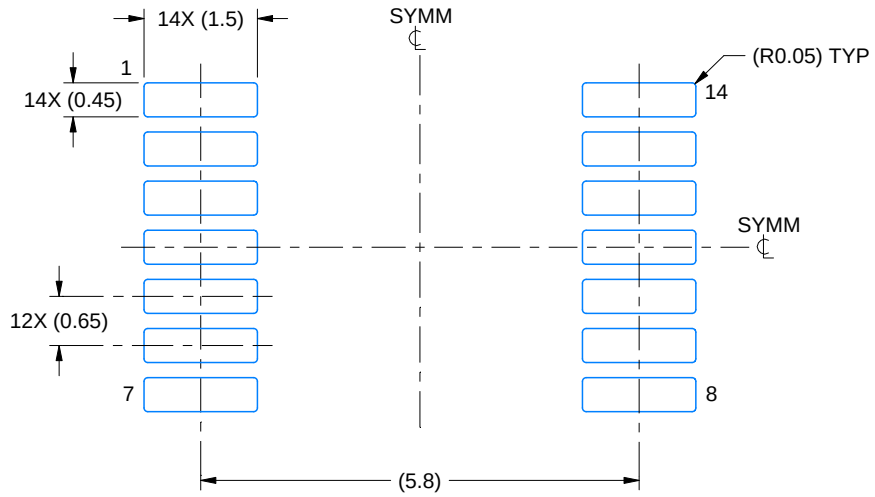

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

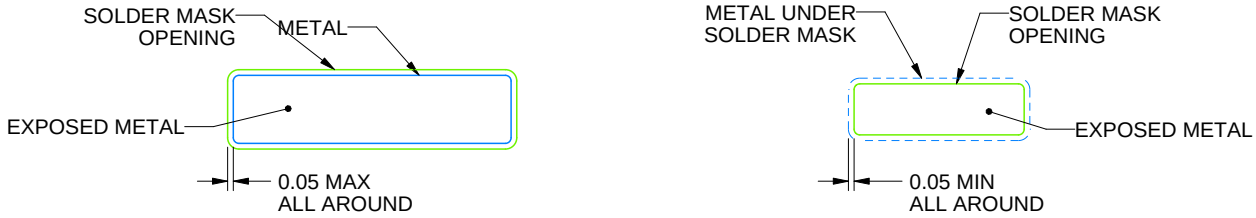


SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

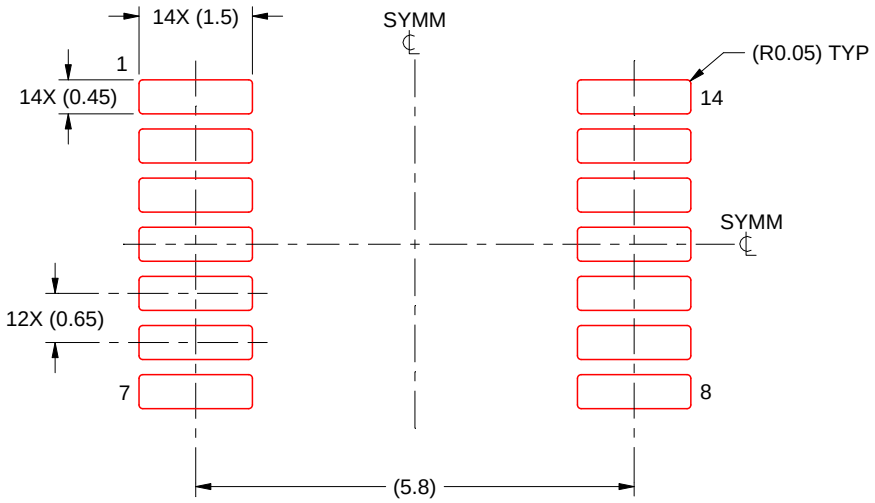

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、 TI の販売条件 、 TI の総合的な品質ガイドライン 、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月