



グローバル輝度制御とLEDの開放/短絡検出機能を搭載した 24チャンネル、定電流のLEDドライバ

1 特長

- ・ オン/オフ制御付きの24チャンネル定電流シンク出力
- ・ 電流出力能力
 - 16チャンネルで35mA
 - 8チャンネルで26.2mA
- ・ 各カラー・グループのグローバル輝度制御(BC): 7ビット(128ステップ)、3グループ
- ・ LEDの最大電源電圧: 15V
- ・ $V_{CC} = 3V \sim 5.5V$
- ・ 定電流精度
 - チャンネル間 $\pm 1\%$
 - デバイス間 $\pm 3\%$
- ・ CMOSロジック・レベルのI/O
- ・ データ転送速度: 35MHz
- ・ BLANKパルス期間: 15ns
- ・ 開放負荷、短絡負荷、過熱の検出
- ・ サーマル・シャットダウン(TSD)と自動再起動
- ・ スwitchングの遅延により突入電流を防止
- ・ 動作温度範囲: $-40^{\circ}C \sim 85^{\circ}C$
- ・ パッケージ: HTSSOP-32、QFN-32

2 アプリケーション

- ・ フルカラーLEDディスプレイ
- ・ LED掲示板

3 概要

TLC5952デバイスは、24チャンネルの定電流シンク・ドライバです。各チャンネルは、内部のレジスタのデータによりオン/オフできます。出力チャンネルは3つのグループに分類され、各グループに8つのチャンネルが属しています。各チャンネル・グループには128ステップのグローバル輝度制御(BC)機能があります。オン/オフのデータとBCはどちらも、シリアル・インターフェイスから書き込むことができます。24チャンネルすべての最大電流の値を1個の外付け抵抗で設定されます。


TLC5952デバイスには、LED開放検出(LOD)、LED短絡検出(LSD)、サーマル・エラー・フラグ(TEF)の3つのエラー検出回路があります。これらのエラー検出は、シリアル・インターフェイスから読み出されます。

製品情報⁽¹⁾

型番	パッケージ	本体サイズ(公称)
TLC5952	HTSSOP (32)	11.00mm×6.20mm

(1) 提供されているすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。

代表的なアプリケーション回路 (複数のTLC5952のデジー・チェーン接続)

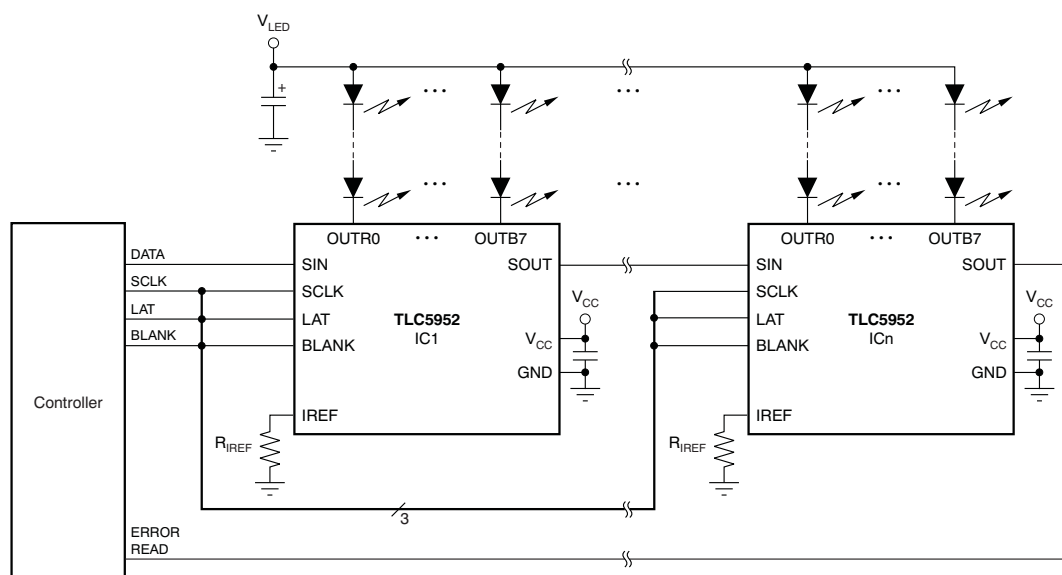

目次

1	特長	1	Diagrams	15
2	アプリケーション	1	7.2 Test Circuits	15
3	概要	1	8 Detailed Description	16
4	改訂履歴	2	8.1 Overview	16
5	Pin Configuration and Functions	3	8.2 Functional Block Diagram	16
6	Specifications	4	8.3 Feature Description	17
6.1	Absolute Maximum Ratings	4	8.4 Device Functional Modes	19
6.2	ESD Ratings	4	9 Power Supply Recommendations	25
6.3	Recommended Operating Conditions	5	10 デバイスおよびドキュメントのサポート	26
6.4	Thermal Information	5	10.1 ドキュメントの更新通知を受け取る方法	26
6.5	Electrical Characteristics	6	10.2 コミュニティ・リソース	26
6.6	Switching Characteristics	8	10.3 商標	26
6.7	Typical Characteristics	11	10.4 静電気放電に関する注意事項	26
7	Parameter Measurement Information	15	10.5 Glossary	26
7.1	Pin Equivalent Input and Output Schematic		11 メカニカル、パッケージ、および注文情報	26

4 改訂履歴


資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

2009年5月発行のものから更新

	Page
• 「パルス幅」を「パルス期間」に変更	1
• 「製品情報」表を追加	1
• Deleted pinout diagram for the RHB package	3
• Deleted the RHB column and corresponding table note from the <i>Pin Functions</i> table	3
• Changed "free-air" in the <i>Absolute Maximum Ratings</i> condition statement to "junction"	4
• Deleted ESD ratings from the Absolute Maximum Ratings table	4
• Deleted the <i>Dissipation Ratings</i> section	4
• Added the <i>ESD Ratings</i> section	4
• Changed T_{WH0} to t_{WH0} in the <i>Recommended Operating Conditions</i> table	5
• Added the <i>Thermal Information</i> table to the data sheet	5
• Changed Condition statement of Electrical Characteristics table from $T_A = -40^{\circ}\text{C}$ to 85°C to $T_J = -40^{\circ}\text{C}$ to 150°C	6
• Changed the <i>Electrical Characteristics</i> table to combine multiple symbols for the <i>Supply current</i> and <i>Constant-output current</i> parameters	6
• Changed MAX value of V_{IREEF} in <i>Electrical Characteristics</i> from 1.23 V to 1.25 V	7
• Changed T_{xx} to t_{xx} at multiple locations in Figure 1	8
• Changed T_{xx} to t_{xx} at multiple locations in Figure 3	10
• Changed Figure 6	11
• Added the <i>Overview</i> section	16
• Added the <i>Device Functional Modes</i> section	19
• 「デバイスおよびドキュメントのサポート」セクションと「メカニカル、パッケージ、および注文情報」セクションを追加	26

5 Pin Configuration and Functions

DAP PowerPAD™ Package
32-Pin HTSSOP With Exposed Thermal Pad
Top View

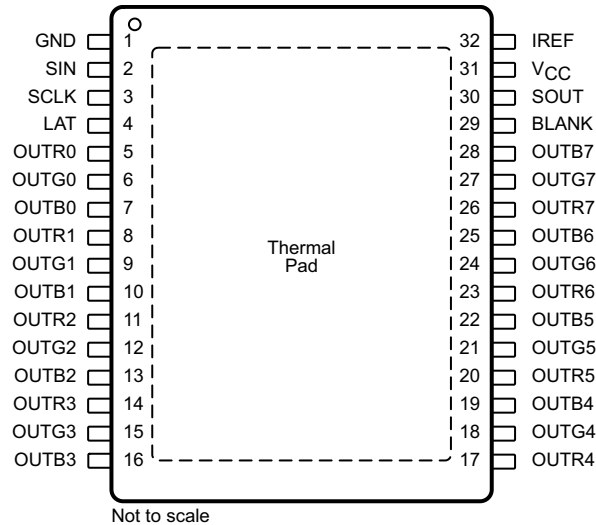

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
BLANK	29	I	All outputs are blank. When BLANK is high, all constant-current outputs (OUTR0–OUTR7, OUTG0–OUTG7, and OUTB0–OUTB7) are forced off. When BLANK is low, all constant current outputs are controlled by the on-off control data in the data latch.
GND	1	—	Power ground
IREF	32	I/O	Reference current terminal. The maximum current for the outputs OUTR0–OUTR7, OUTG0–OUTG7, and OUTB0–OUTB7 is set with a resistor from IREF to GND.
LAT	4	I	Edge-triggered latch. The rising edge of LAT latches the data from the common shift register into the output on-off data latch. See the Output On-Off Data Latch section for more details.
OUTB0–OUTB7	7, 10, 13, 16, 19, 22, 25, 28	O	Constant-current outputs for the BLUE LED group. Multiple outputs can be configured in parallel to increase the constant-current capability. Different voltages can be applied to each output. These outputs are turned on or off by the BLANK signal and the data in the output on-off control data latch.
OUTG0–OUTG7	6, 9, 12, 15, 18, 21, 24, 27	O	Constant-current outputs for the GREEN LED group. Multiple outputs can be configured in parallel to increase the constant-current capability. Different voltages can be applied to each output. These outputs are turned on or off by the BLANK signal and the data in the output on-off control data latch.
OUTR0–OUTR7	5, 8, 11, 14, 17, 20, 23, 26	O	Constant-current outputs for the RED LED group. Multiple outputs can be configured in parallel to increase the constant-current capability. Different voltages can be applied to each output. These outputs are turned on or off by the BLANK signal and the data in the output on-off control data latch.
SCLK	3	I	Serial data shift clock. Data present on SIN are shifted to the LSB of the common shift register with the rising edge of SCLK. Data in the shift register are shifted toward the MSB at each rising edge of SCLK. The MSB data of the common shift register appear on SOUT.
SIN	2	I	Serial data input for the 25-bit common shift register
SOUT	30	O	Serial data output. The MSB of the 25-bit common shift register is shifted out at the rising edge of SCLK.
V _{CC}	31	—	Power-supply voltage

6 Specifications

6.1 Absolute Maximum Ratings^{(1) (2)}

Over operating junction temperature range, unless otherwise noted.

PARAMETER			MIN	MAX	UNIT
V _{CC}	Supply voltage	V _{CC}	–0.3	6	V
I _{OUT}	Output current (dc)	OUTR0–OUTR7, OUTG0–OUTG7		45	mA
		OUTB0–OUTB7		35	
V _{IN}	Input voltage range	SIN, SCLK, LAT, BLANK, IREF	–0.3	V _{CC} + 0.3	V
V _{OUT}	Output voltage range	SOUT	–0.3	V _{CC} + 0.3	V
		OUTR0–OUTR7, OUTG0–OUTG7, OUTB0–OUTB7	–0.3	16	
T _{J(max)}	Operation junction temperature			150	°C
T _{stg}	Storage temperature range		–55	150	°C

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltage values are with respect to network ground terminal.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±500	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Pins listed as ±2000 V may actually have higher performance.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Pins listed as ±500 V may actually have higher performance.

6.3 Recommended Operating Conditions

At $T_A = -40^{\circ}\text{C}$ to 85°C , unless otherwise noted.

PARAMETER			MIN	NOM	MAX	UNIT
DC CHARACTERISTICS: $V_{CC} = 3\text{ V}$ to 5.5 V						
V_{CC}	Supply voltage		3		5.5	V
V_O	Voltage applied to output	OUTR0–OUTR7, OUTG0–OUTG7, OUTB0–OUTB7			15	V
V_{IH}	High-level input voltage	SIN, SCLK, LAT, BLANK	$0.7 \times V_{CC}$		V_{CC}	V
V_{IL}	Low-level input voltage	SIN, SCLK, LAT, BLANK	GND		$0.3 \times V_{CC}$	V
I_{OH}	High-level output current	SOUT			–1	mA
I_{OL}	Low-level output current	SOUT			1	mA
I_{OLC}	Constant-output sink current	OUTR0–OUTR7, OUTG0–OUTG7			35	mA
		OUTB0–OUTB7			26.2	
T_A	Operating ambient temperature		–40		85	$^{\circ}\text{C}$
T_J	Operating junction temperature		–40		125	$^{\circ}\text{C}$
AC CHARACTERISTICS, $V_{CC} = 3\text{ V}$ to 5.5 V						
f_{CLK} (SCLK)	Data shift clock frequency	SCLK			35	MHz
t_{WH0}	Pulse duration	SCLK	10			ns
t_{WL0}		SCLK	10			ns
t_{WH1}		LAT	15			ns
t_{WH2}		BLANK	15			ns
t_{WL2}		BLANK	15			ns
t_{SU0}	Setup time	SIN – SCLK $\uparrow$	4			ns
t_{SU1}		LAT $\uparrow$ – SCLK $\uparrow$	150			ns
t_{H0}	Hold time	SIN – SCLK $\uparrow$	3			ns
t_{H1}		LAT $\uparrow$ – SCLK $\uparrow$	10			ns

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TLC5952	UNIT
		DAP (TSSOP)	
		32 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	28.3	$^{\circ}\text{C/W}$
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	20.6	$^{\circ}\text{C/W}$
$R_{\theta JB}$	Junction-to-board thermal resistance	10.7	$^{\circ}\text{C/W}$
ψ_{JT}	Junction-to-top characterization parameter	0.3	$^{\circ}\text{C/W}$
ψ_{JB}	Junction-to-board characterization parameter	10.6	$^{\circ}\text{C/W}$
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	2.6	$^{\circ}\text{C/W}$

(1) For more information about traditional and new thermal metrics, see [Semiconductor and IC Package Thermal Metrics](#).

6.5 Electrical Characteristics

At $T_J = -40^\circ\text{C}$ to 150°C , $V_{CC} = 3\text{ V}$ to 5.5 V , and $V_{LED} = 5\text{ V}$, unless otherwise noted. Typical values are at $T_A = 25^\circ\text{C}$ and $V_{CC} = 3.3\text{ V}$.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{OH}	High-level output voltage	$I_{OH} = -1\text{ mA}$ at SOUT	$V_{CC} - 0.4$		V_{CC}	V
V_{OL}	Low-level output voltage	$I_{OL} = 1\text{ mA}$ at SOUT			0.4	V
I_{IN}	Input current	$V_I = V_{CC}$ or GND at SIN, SCLK, LAT, and BLANK	-1		1	μA
I_{CC}	Supply current	SIN, SCLK, LAT = low, BLANK = high, $V_{OUTRn, -Gn, -Bn} = 1\text{ V}$, BCR, -G, -B = 7Fh, $R_{IREF} = 24\text{ k}\Omega$ ($I_{OUTRn/Gn} = 2\text{ mA}$ target, $I_{OUTBn} = 1.5\text{ mA}$ target)		1	3	mA
		SIN, SCLK, LAT = low, BLANK = high, $V_{OUTRn, -Gn, -Bn} = 1\text{ V}$, BCR, -G, -B = 7Fh, $R_{IREF} = 2.4\text{ k}\Omega$ ($I_{OUTRn/Gn} = 20\text{ mA}$ target, $I_{OUTBn} = 15\text{ mA}$ target)		8	14	
		SIN, SCLK, LAT = low, BLANK = low, all $OUTRn, -Gn, -Bn$ = on, $V_{OUTRn, -Gn, -Bn} = 1\text{ V}$, BCR, -G, -B = 7Fh, $R_{IREF} = 2.4\text{ k}\Omega$ ($I_{OUTRn/Gn} = 20\text{ mA}$ target, $I_{OUTBn} = 15\text{ mA}$ target)		12	30	
		SIN, SCLK, LAT = low, BLANK = low, all $OUTRn, -Gn, -Bn$ = on, $V_{OUTRn, -Gn, -Bn} = 1\text{ V}$, BCR, -G, -B = 7Fh, $R_{IREF} = 1.5\text{ k}\Omega$ ($I_{OUTRn/Gn} = 32\text{ mA}$ target, $I_{OUTBn} = 24\text{ mA}$ target)		20	50	
I_{OLC}	Constant-output current	At $OUTR0$ – $OUTR7$ and $OUTG0$ – $OUTG7$, All $OUTRn, -Gn, -Bn$ = on, BCR, -G, -B = 7Fh, $V_{OUTRn, -Gn, -Bn} = V_{OUTfix} = 1\text{ V}$, $R_{IREF} = 1.5\text{ k}\Omega$ ($I_{OUTRn/Gn} = 32\text{ mA}$ target)	29	32	35	mA
		At $OUTB0$ – $OUTB7$, All $OUTRn, -Gn, -Bn$ = on, BCR, -G, -B = 7Fh, $V_{OUTRn, -Gn, -Bn} = V_{OUTfix} = 1\text{ V}$, $R_{IREF} = 1.5\text{ k}\Omega$ ($I_{OUTBn} = 24\text{ mA}$ target)	21.8	24	26.2	
I_{OLKG}	Leakage output current	At $OUTR0$ – $OUTR7$, $OUTG0$ – $OUTG7$, and $OUTB0$ – $OUTB7$, BLANK = high, $V_{OUTRn, -Gn, -Bn} = V_{OUTfix} = 15\text{ V}$, $R_{IREF} = 1.5\text{ k}\Omega$			0.1	μA
ΔI_{OLC}	Constant-current error ⁽¹⁾ (channel-to-channel in same color group)	At $OUTR0$ – $OUTR7$, $OUTG0$ – $OUTG7$, and $OUTB0$ – $OUTB7$, All $OUTRn, -Gn, -Bn$ = on, BCR, -G, -B = 7Fh, $V_{OUTRn, -Gn, -Bn} = V_{OUTfix} = 1\text{ V}$, $R_{IREF} = 1.5\text{ k}\Omega$ ($I_{OUTRn/Gn} = 32\text{ mA}$ target, $I_{OUTBn} = 24\text{ mA}$ target), at same color group output		$\pm 1\%$	$\pm 3\%$	
ΔI_{OLC1}	Constant current error ⁽²⁾ (device to device in same color group)	At $OUTR0$ – $OUTR7$, $OUTG0$ – $OUTG7$, and $OUTB0$ – $OUTB7$, All $OUTRn, -Gn, -Bn$ = on, BCR, -G, -B = 7Fh, $V_{OUTRn, -Gn, -Bn} = V_{OUTfix} = 1\text{ V}$, $R_{IREF} = 1.5\text{ k}\Omega$ ($I_{OUTRn/Gn} = 32\text{ mA}$ target, $I_{OUTBn} = 24\text{ mA}$ target), at same color group output		$\pm 3\%$	$\pm 6\%$	

- (1) The deviation of each output in the same color group from the average of the same color group ($OUTR0$ – $OUTR7$, $OUTG0$ – $OUTG7$, or $OUTB0$ – $OUTB7$) constant current. The deviation is calculated by the formula ($X = R, G, \text{ or } B$; $n = 0$ – 7):

$$\Delta(\%) = \left[\frac{I_{OUTXn}}{\frac{(I_{OUTX0} + I_{OUTX1} + \dots + I_{OUTX6} + I_{OUTX7})}{8}} - 1 \right] \times 100$$

- (2) The deviation of the constant-current average of each color group from the ideal constant-current value. The deviation is calculated by the formula ($X = R, G, \text{ or } B$):

$$\Delta(\%) = \left[\frac{\frac{(I_{OUTX0} + I_{OUTX1} + \dots + I_{OUTX7})}{8} - (\text{Ideal Output Current})}{\text{Ideal Output Current}} \right] \times 100$$

Ideal current is calculated by the following equation for $OUTR0$ – $OUTR7$ and $OUTG0$ – $OUTG7$ ($X = R, G, \text{ or } B$):

$$I_{OUTRn/Gn}(\text{IDEAL, mA}) = 40 \times \left[\frac{1.20}{R_{IREF}(\Omega)} \right]$$

Ideal current is calculated by the following equation for $OUTR0$ – $OUTR7$ and $OUTG0$ – $OUTG7$ ($X = R, G, \text{ or } B$):

$$I_{OUTBn}(\text{IDEAL, mA}) = 30 \times \left[\frac{1.20}{R_{IREF}(\Omega)} \right]$$

Electrical Characteristics (continued)

At $T_J = -40^{\circ}\text{C}$ to 150°C , $V_{CC} = 3\text{ V}$ to 5.5 V , and $V_{LED} = 5\text{ V}$, unless otherwise noted. Typical values are at $T_A = 25^{\circ}\text{C}$ and $V_{CC} = 3.3\text{ V}$.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
ΔI_{OLC2}	Line regulation ⁽³⁾	At OUTR0–OUTR7, OUTG0–OUTG7, and OUTB0–OUTB7, All OUTRn, -Gn, -Bn = on, BCR, -G, -B = 7Fh, $V_{OUTRn, -Gn, -Bn} = V_{OUTfix} = 1\text{ V}$, $R_{IREF} = 1.5\text{ k}\Omega$			
			$\pm 0.5\%$	$\pm 1\%$	
ΔI_{OLC3}	Load regulation ⁽⁴⁾	At OUTR0–OUTR7, OUTG0–OUTG7, and OUTB0–OUTB7, All OUTRn, -Gn, -Bn = on, BCR, -G, -B = 7Fh, $V_{OUTRn, -Gn, -Bn} = 1\text{ V}$ to 3 V , $V_{OUTfix} = 1\text{ V}$, $R_{IREF} = 1.5\text{ k}\Omega$			
			± 1	± 3	%/V
T_{TEF}	Thermal error flag threshold	Junction temperature ⁽⁵⁾			
		150	165	180	$^{\circ}\text{C}$
T_{HYS}	Thermal error flag hysteresis	Junction temperature ⁽⁵⁾			
		5	10	20	$^{\circ}\text{C}$
V_{LOD0}	LED open detection threshold	All OUTRn, -Gn, -Bn = on, detection voltage select code = 0h			V
V_{LOD1}		All OUTRn, -Gn, -Bn = on, detection voltage select code = 1h			V
V_{LOD2}		All OUTRn, -Gn, -Bn = on, detection voltage select code = 2h			V
V_{LOD3}		All OUTRn, -Gn, -Bn = on, detection voltage select code = 3h			V
V_{LSD0}	LED short detection threshold	All OUTRn, -Gn, -Bn = on, detection voltage select code = 4h			V
V_{LSD1}		All OUTRn, -Gn, -Bn = on, detection voltage select code = 5h			V
V_{LSD2}		All OUTRn, -Gn, -Bn = on, detection voltage select code = 6h			V
V_{LSD3}		All OUTRn, -Gn, -Bn = on, detection voltage select code = 7h			V
V_{IREF}	Reference voltage output	$R_{IREF} = 1.5\text{ k}\Omega$			V
		1.17	1.2	1.25	

(3) Line regulation is calculated by the following equation (X = R, G, or B; n = 0–7):

$$\Delta (\%/V) = \left[\frac{(I_{OUTXn} \text{ at } V_{CC} = 5.5\text{ V}) - (I_{OUTXn} \text{ at } V_{CC} = 3.0\text{ V})}{(I_{OUTXn} \text{ at } V_{CC} = 3.0\text{ V})} \right] \times \frac{100}{5.5\text{ V} - 3\text{ V}}$$

(4) Load regulation is calculated by the following equation (X = R, G, or B; n = 0–7):

$$\Delta (\%/V) = \left[\frac{(I_{OUTXn} \text{ at } V_{OUTXn} = 3\text{ V}) - (I_{OUTXn} \text{ at } V_{OUTXn} = 1\text{ V})}{(I_{OUTXn} \text{ at } V_{OUTXn} = 1\text{ V})} \right] \times \frac{100}{3\text{ V} - 1\text{ V}}$$


(5) Not tested; specified by design.

6.6 Switching Characteristics

At $T_A = -40^\circ\text{C}$ to 85°C , $V_{CC} = 3\text{ V}$ to 5.5 V , $C_L = 15\text{ pF}$, $R_L = 120\ \Omega$, $R_{REF} = 1.5\text{ k}\Omega$, and $V_{LED} = 5\text{ V}$, unless otherwise noted. Typical values are at $T_A = 25^\circ\text{C}$ and $V_{CC} = 3.3\text{ V}$.


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{R0}	Rise time	SOUT		6	15	ns
t_{R1}		OUTR0–OUTR7, OUTG0–OUTG7, OUTB0–OUTB7, BCR, -G, -B = 7Fh		10	30	ns
t_{F0}	Fall time	SOUT		6	15	ns
t_{F1}		OUTR0–OUTR7, OUTG0–OUTG7, OUTB0–OUTB7, BCR, -G, -B = 7Fh		10	30	ns
t_{D0}	Propagation delay time ⁽¹⁾	SCLK $\uparrow$ to SOUT		8	20	ns
t_{D1}		LAT $\uparrow$ to OUTR0 on-off, BCR, -G, -B = 7Fh		22	45	ns
t_{D2}		BLANK $\downarrow\uparrow$ to OUTR0 on-off, BCR, -G, -B = 7Fh		15	30	ns
t_{D3}		OUTRn on to OUTGn on, OUTGn on to OUTBn on, OUTBn on to OUTRn + 1 on, BCR, -G, -B = 7Fh		3	6	ns
t_{D4}		OUTRn off to OUTGn off, OUTGn off to OUTBn off, OUTBn off to OUTRn + 1 off, BCR, -G, -B = 7Fh		3	6	ns
t_{D5}		LAT $\uparrow$ to I_{OUTn} changing by global brightness control (BC data are 0Ch–72h or 72h–0Ch)		20	50	ns
t_{ON_ERR}	Output on-time error ⁽²⁾	On-off latched data = 1, BCR, -G, -B = 7Fh, 20 ns BLANK low level one-shot pulse input	-11		5	ns

- (1) Propagation delay, t_{D3} (OUTRn on to OUTGn on, OUTGn on to OUTBn on, OUTBn on to OUTRn + 1 on) is calculated by the formula:
 $t_{D3}(\text{ns}) = (\text{the propagation delay between OUTR0 to OUTB7 = on}) / 23$
 t_{D4} (OUTRn to OUTGn = off, OUTGn to OUTBn = off, OUTBn to OUTRn + 1 = off) is calculated by the formula:
 $t_{D4}(\text{ns}) = (\text{the propagation delay between OUTR0 to OUTB7 = off}) / 23$
- (2) Output on-time error is calculated by the formula: $t_{ON_ERR}(\text{ns}) = t_{OUT_ON} - \text{BLANK low-level pulse duration}$. t_{OUT_ON} is the actual on-time of the constant current output.

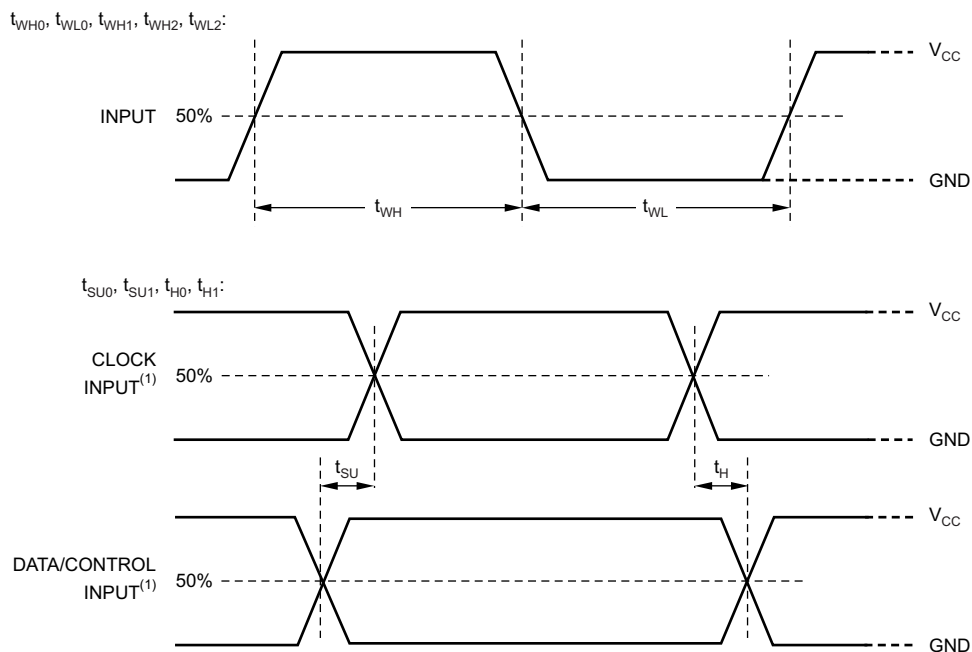

Input pulse rise and fall time is 1 ns to 3 ns.

Figure 1. Input Timing

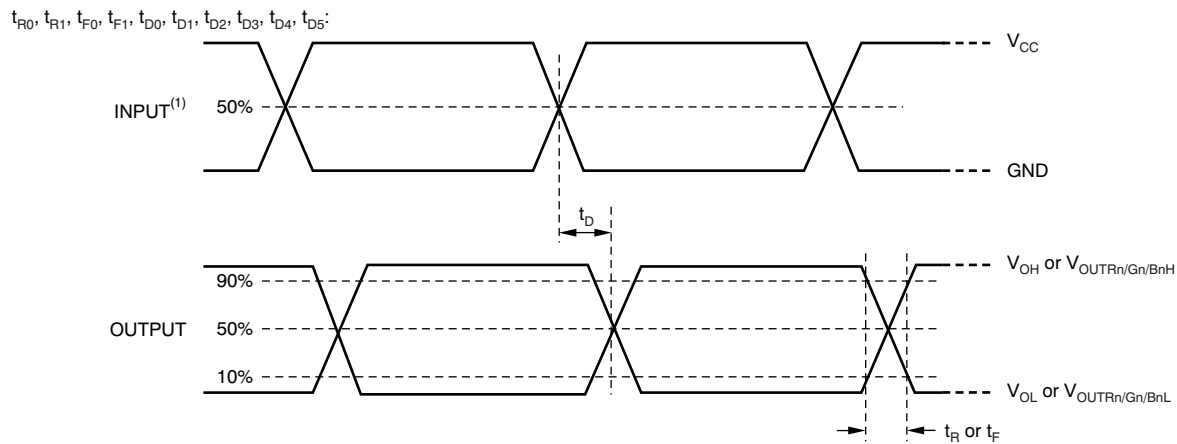

Input pulse rise and fall time is 1 ns to 3 ns.

Figure 2. Output Timing

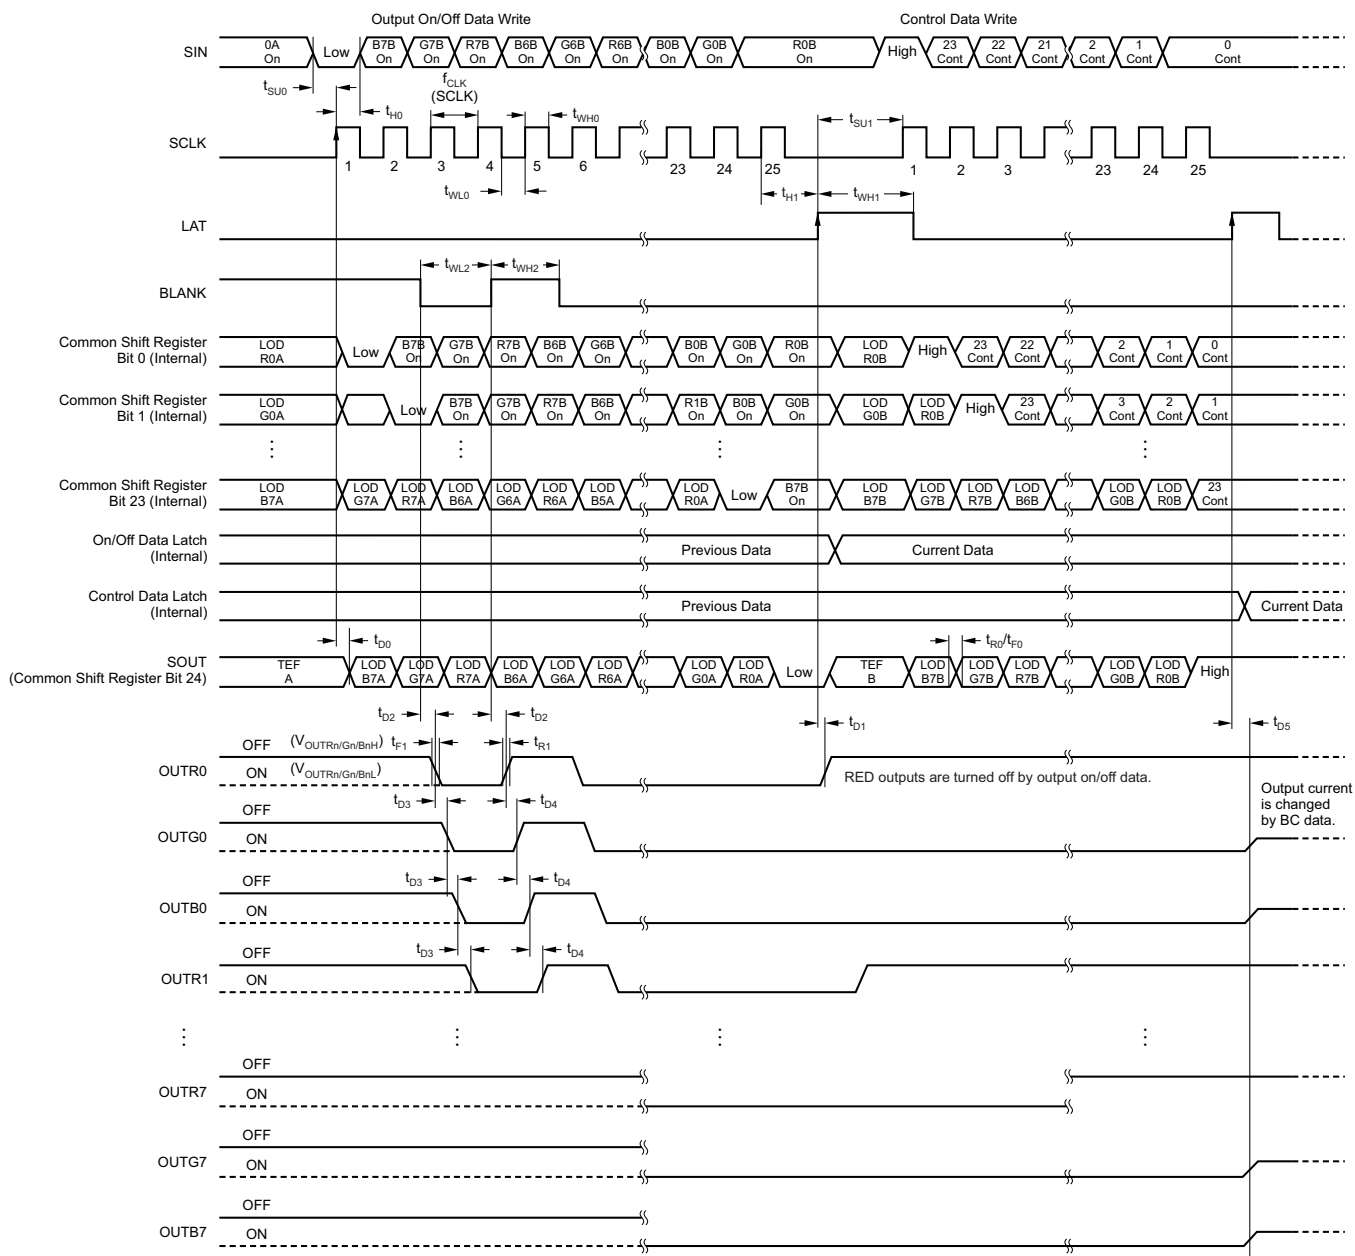


Figure 3. Timing Diagram

6.7 Typical Characteristics

At $T_A = 25^\circ\text{C}$ and $V_{CC} = 3.3\text{ V}$, unless otherwise noted.

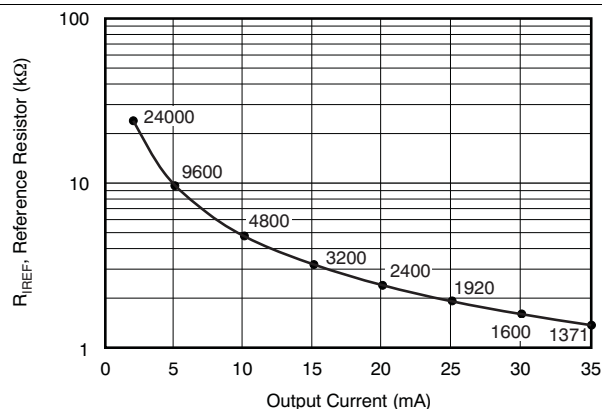


Figure 4. Reference Resistor vs Output Current (Red and Green Color Group)

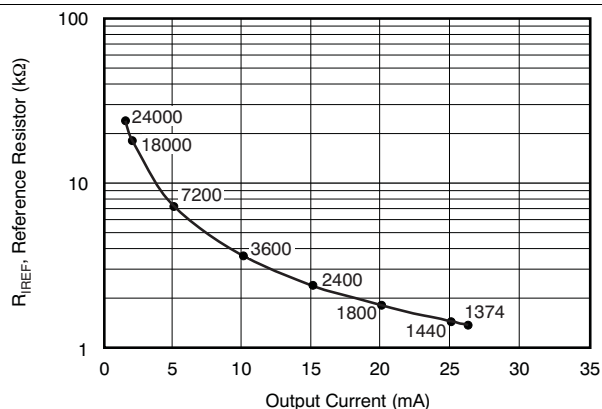


Figure 5. Reference Resistor vs Output Current (Blue Color Group)

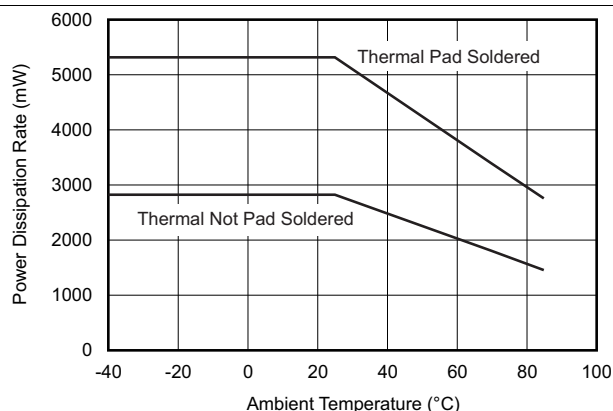


Figure 6. Power Dissipation Rate

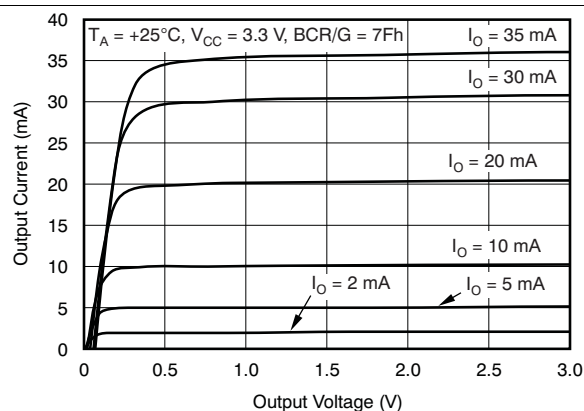


Figure 7. Output Current vs Output Voltage (Red and Green Color Group)

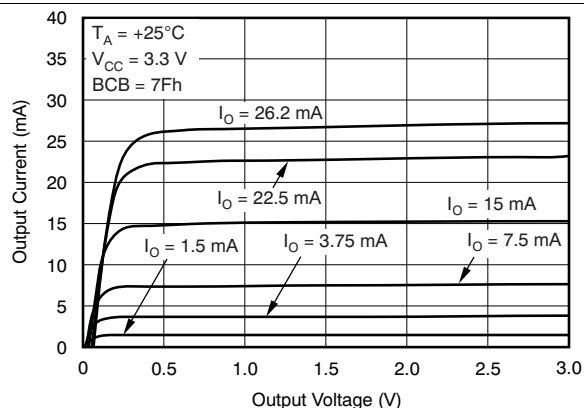


Figure 8. Output Current vs Output Voltage (Blue Color Group)

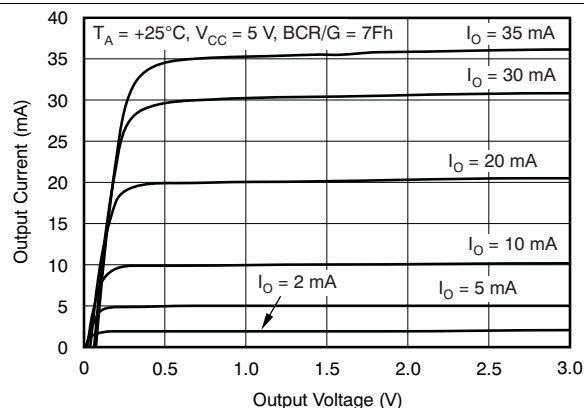


Figure 9. Output Current vs Output Voltage (Red and Green Color Group)

Typical Characteristics (continued)

At $T_A = 25^\circ\text{C}$ and $V_{CC} = 3.3\text{ V}$, unless otherwise noted.

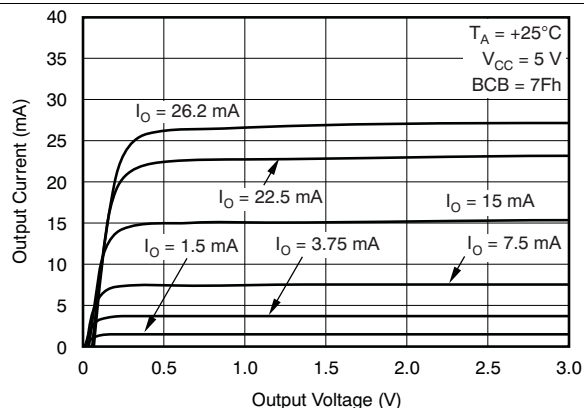


Figure 10. Output Current vs Output Voltage (Blue Color Group)

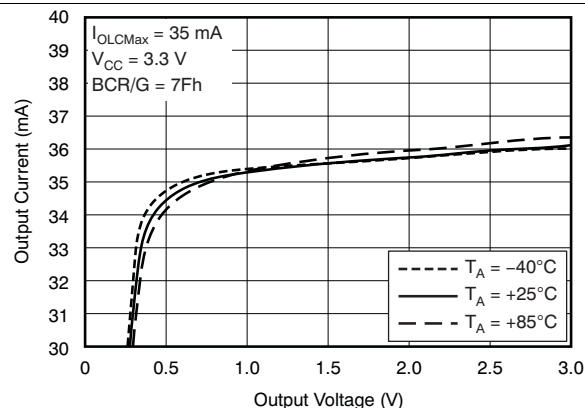


Figure 11. Output Current vs Output Voltage (Red and Green Color Group)

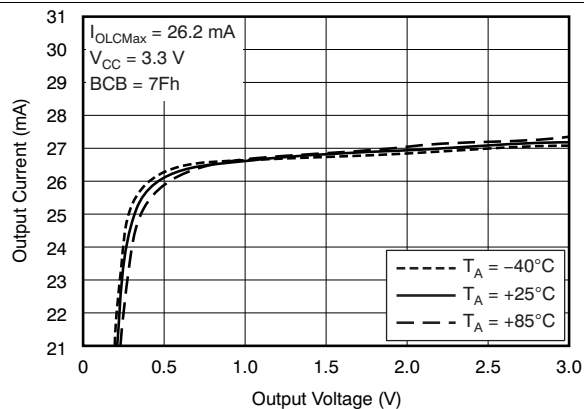


Figure 12. Output Current vs Output Voltage (Blue Color Group)

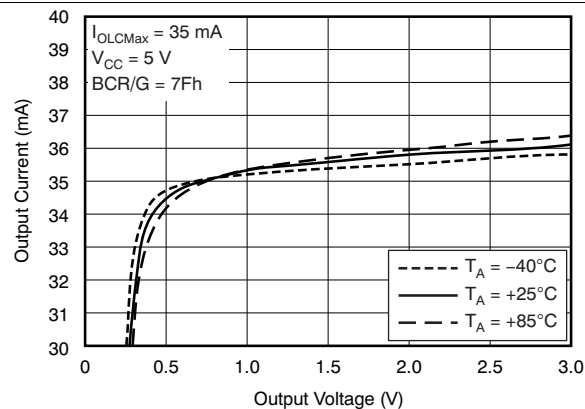


Figure 13. Output Current vs Output Voltage (Red and Green Color Group)

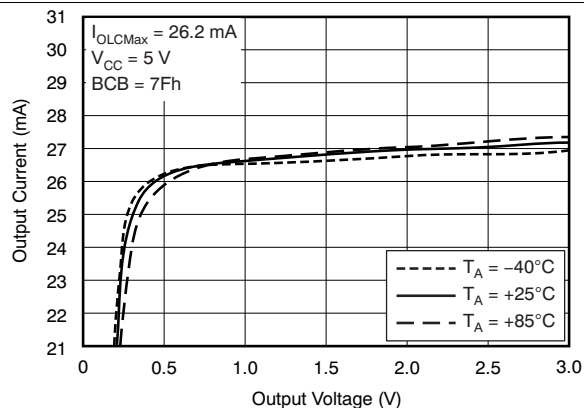


Figure 14. Output Current vs Output Voltage (Blue Color Group)

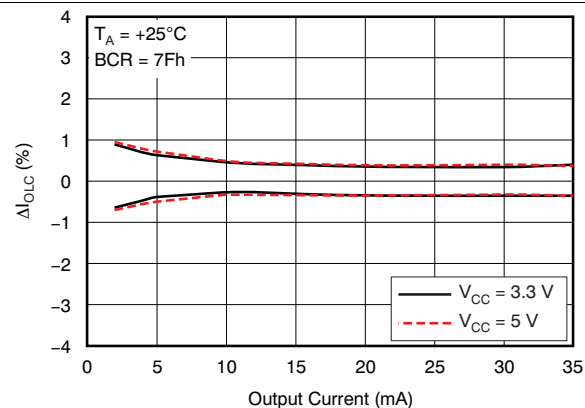


Figure 15. Constant-Current Error vs Output Current (Channel-to-Channel in Red Color Group)

Typical Characteristics (continued)

At $T_A = 25^\circ\text{C}$ and $V_{CC} = 3.3\text{ V}$, unless otherwise noted.

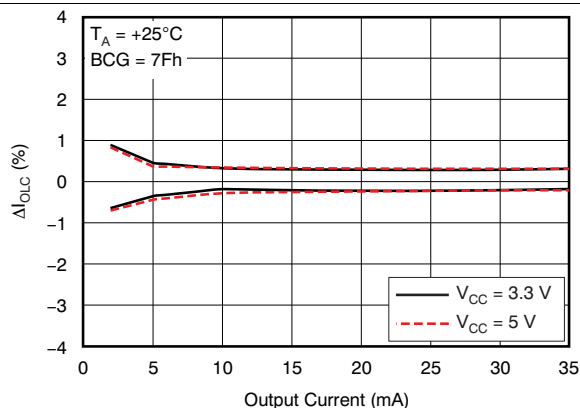


Figure 16. Constant-Current Error vs Output Current (Channel-to-Channel in Green Color Group)

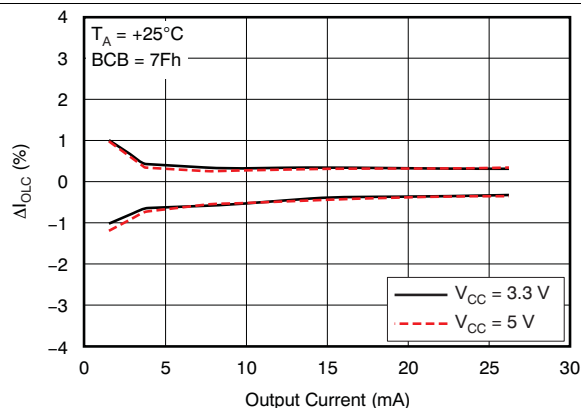


Figure 17. Constant-Current Error vs Output Current (Channel-to-Channel in Blue Color Group)

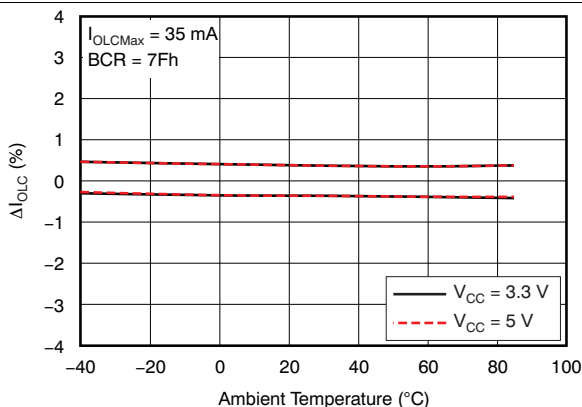


Figure 18. Constant-Current Error vs Ambient Temperature (Channel-to-Channel in Red Color Group)

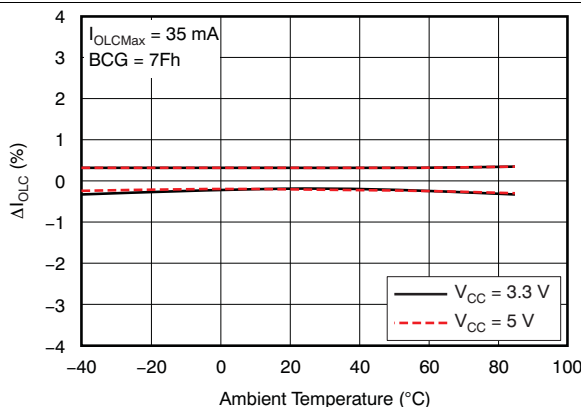


Figure 19. Constant-Current Error vs Ambient Temperature (Channel-to-Channel in Green Color Group)

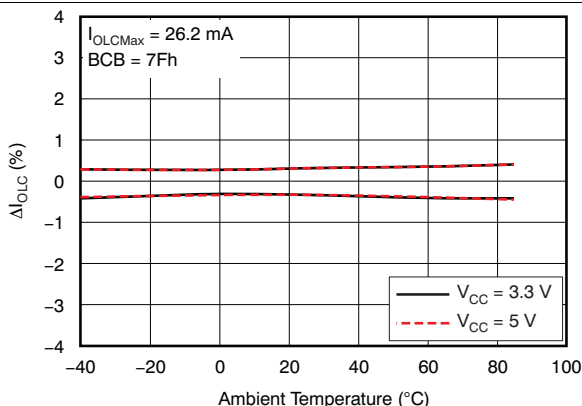


Figure 20. Constant-Current Error vs Ambient Temperature (Channel-to-Channel in Blue Color Group)

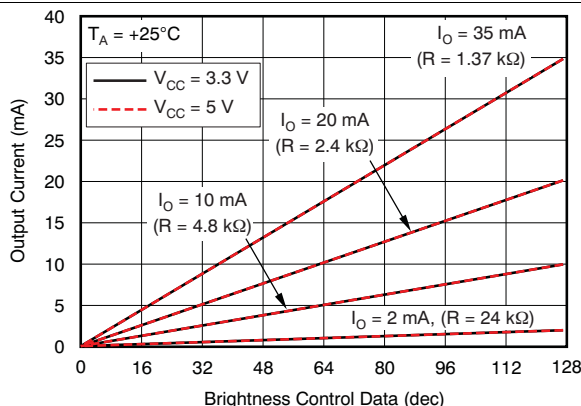


Figure 21. Global Brightness Control Linearity (Red and Green Color Group)

Typical Characteristics (continued)

At $T_A = 25^\circ\text{C}$ and $V_{CC} = 3.3\text{ V}$, unless otherwise noted.

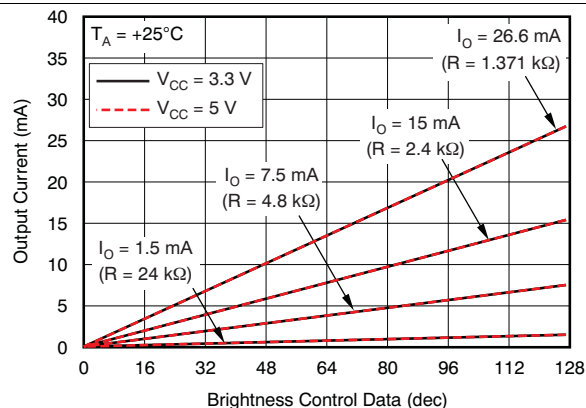


Figure 22. Global Brightness Control Linearity (Blue Color Group)

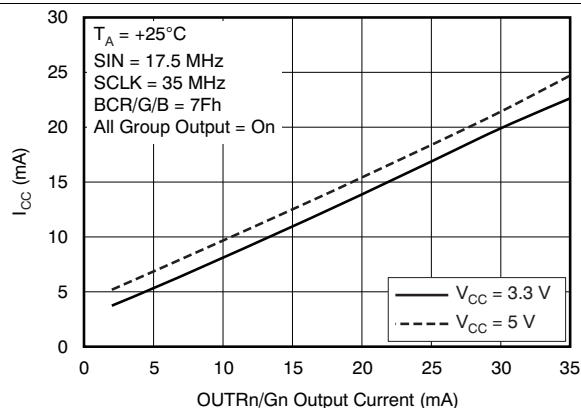


Figure 23. Supply Current vs Output Current (Red and Green Color Group)

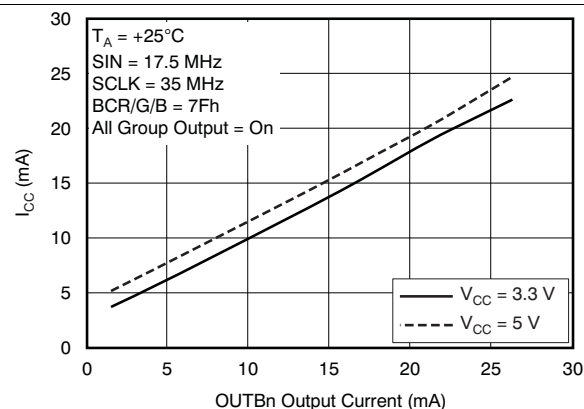


Figure 24. Supply Current vs Output Current (Blue Color Group)

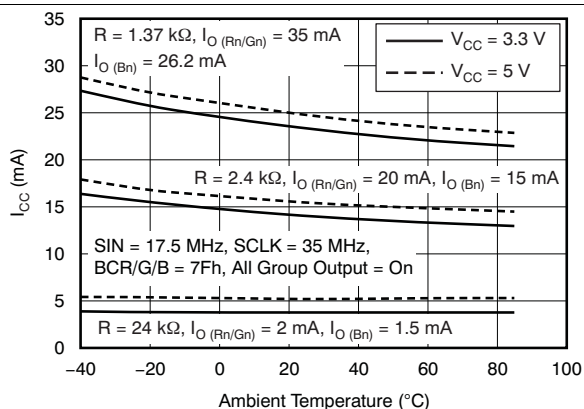


Figure 25. Supply Current vs Ambient Temperature


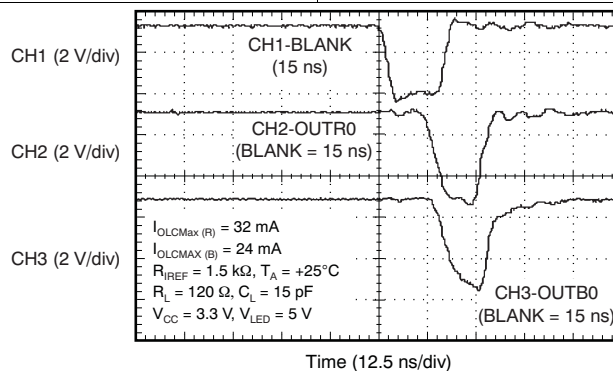



Figure 26. Constant-Current Output-Voltage Waveform

7 Parameter Measurement Information

7.1 Pin Equivalent Input and Output Schematic Diagrams

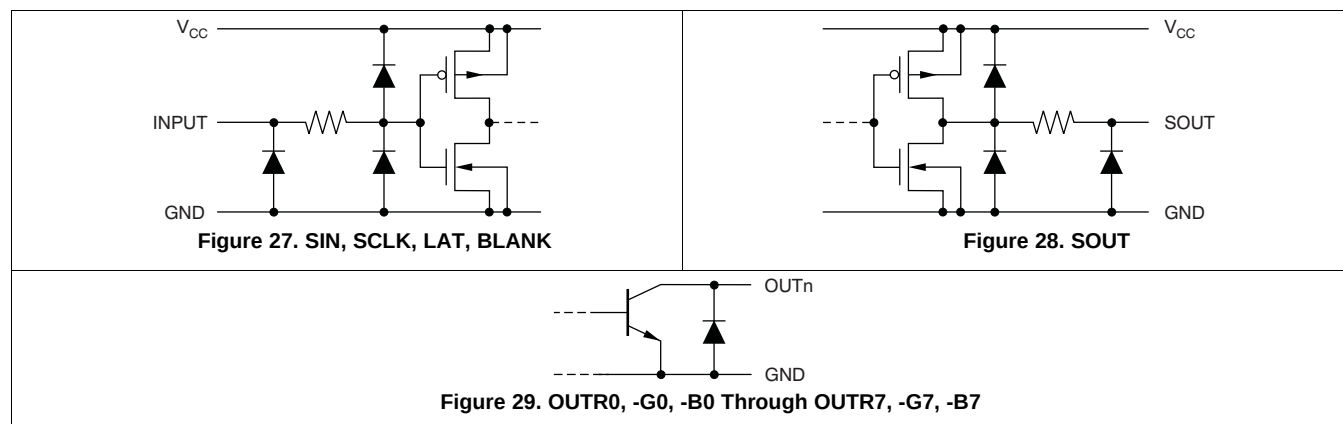

7.2 Test Circuits

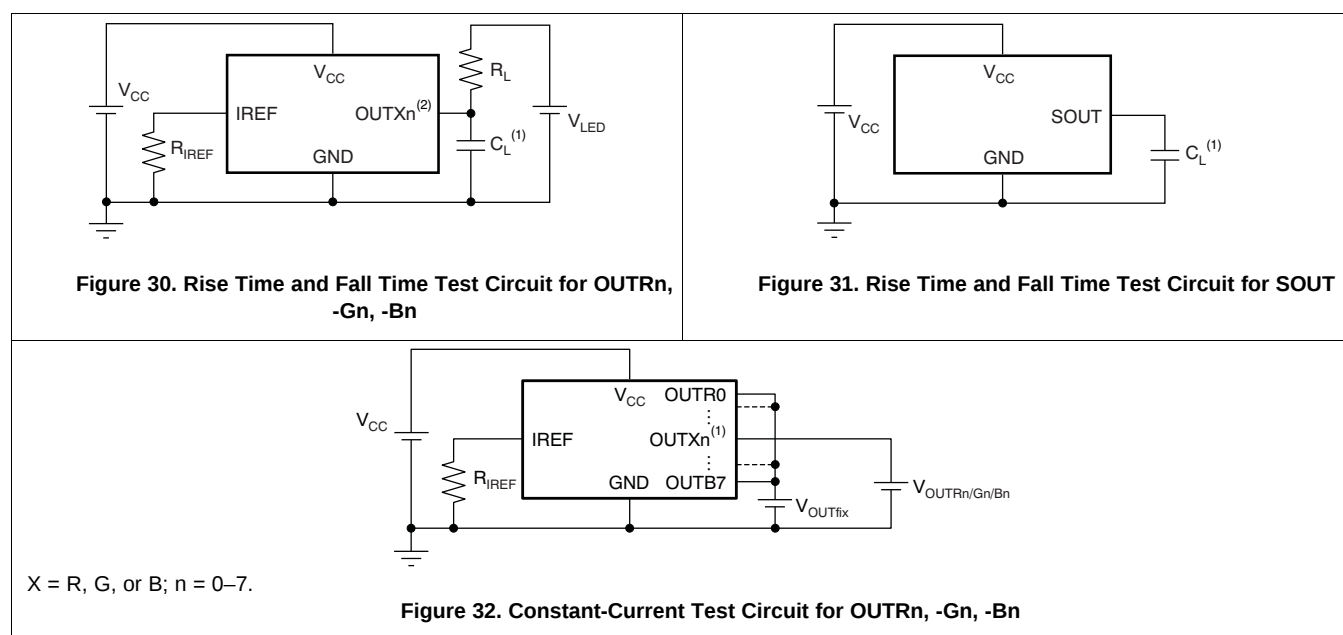


8 Detailed Description

8.1 Overview

The TLC5952 device is a 24-channel, constant-current sink driver. Each channel can be turned on or off with internal register data. The output channels are grouped into three groups of eight channels each. Each channel group has a 128-step global brightness control (BC) function. Both on-off data and BC are writable via a serial interface. The maximum current value of all 24 channels is set by a single external resistor.

8.2 Functional Block Diagram

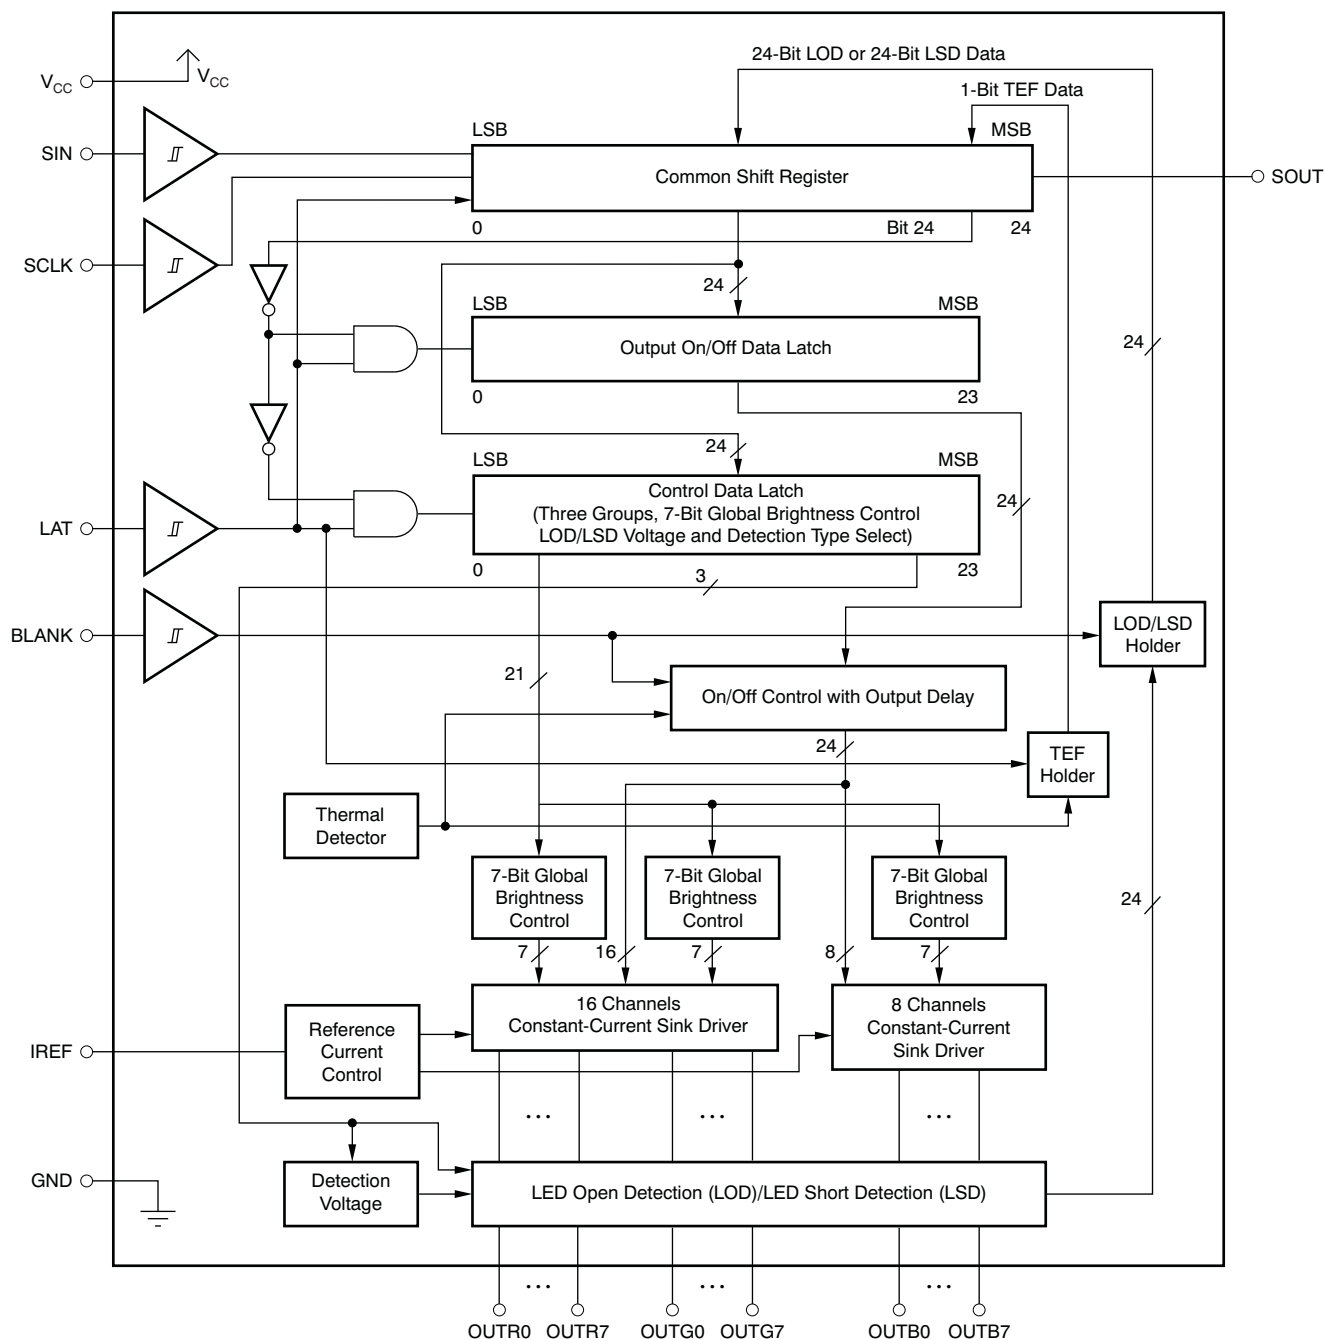

8.3 Feature Description

8.3.1 Maximum Constant-Sink-Current Value

The maximum output current per channel, $I_{OLCM_{max}}$, is programmed by a single resistor, R_{IREF} , which is placed between the IREF and GND pins. The voltage on IREF is set by an internal band-gap V_{IREF} , with a typical value of 1.20 V. The maximum channel current is equivalent to the current flowing through R_{IREF} multiplied by a factor of 40 for OUTRn, -Gn and 30 for OUTBn. The maximum output current per channel can be calculated by [Equation 1](#).

$$R_{IREF} (k\Omega) = \frac{V_{IREF} (V)}{I_{OLCM_{max}} (mA)} \times 40 \text{ (for OUTRn/Gn)}$$

$$= \frac{V_{IREF} (V)}{I_{OLCM_{max}} (mA)} \times 30 \text{ (for OUTBn)}$$

where:

- V_{IREF} = the internal reference voltage on IREF (1.20 V, typical)
- $I_{OLCM_{max}}$ = 2 mA to 35 mA at OUTRn, -Gn and 1.5 mA to 26.2 mA at OUTBn (1)

$I_{OLCM_{max}}$ is the largest current for each output. Each output sinks the $I_{OLCM_{max}}$ current when it is turned on and the global brightness control data are set to the maximum value of 7Fh (127d). Each output sink current can be reduced by lowering the output global brightness control (BC) value.

R_{IREF} must be between 1.37 k Ω and 24 k Ω to hold $I_{OLCM_{max}}$ between 35 mA (typ) and 2 mA (typ) for OUTRn, -Gn and between 26.2 mA (typ) and 1.5 mA (typ) for OUTBn. Otherwise, the output may be unstable. Output currents lower than 2 mA (or 1.5 mA for OUTBn) can be achieved by setting $I_{OLCM_{max}}$ to 2 mA or higher and then using global brightness control to lower the output current.

[Table 1](#) shows the characteristics of the constant-current sink versus the external resistor, R_{IREF} .

Table 1. Maximum Constant-Current Output Versus External Resistor Value

$I_{OLCM_{max}} (mA)$		$R_{IREF} (k\Omega)$
OUTRn, OUTGn	OUTBn	
35	26.28	1.37
30	22.5	1.6
25	18.75	1.92
20	15	2.4
15	11.25	3.2
10	7.5	4.8
5	3.75	9.6
2	1.5	24

8.3.2 Global Brightness Control (BC) Function: Sink-Current Control

The TLC5952 is able to adjust the output current of each of the three color groups OUTR0–OUTR7, OUTG0–OUTG7, and OUTB0–OUTB7. This function is called *global brightness control* (BC). The BC function allows users to adjust the global brightness of LEDs connected to the three output groups (OUTR0–OUTR7, OUTG0–OUTG7, and OUTB0–OUTB7). All color group output currents can be adjusted in 128 steps from 0% to 100% of the maximum output current, I_{OLCMax} . The brightness control data are entered into the TLC5952 via the serial interface. When the BC data change, the output current also changes immediately. When the device is powered on, the data in the common shift register and the control data latch are not set to any default values. Therefore, BC data must be written to the control data latch before turning on the constant-current output.

Equation 2 determines the output sink current for each color group. Table 2 summarizes the BC data versus current ratio and set current value.

$$I_{OUT} \text{ (mA)} = I_{OLCMax} \text{ (mA)} \times \left(\frac{BCR/G/B}{127d} \right)$$

where:

- I_{OLCMax} = the maximum channel current for each channel determined by R_{IREF}
- BCR, -G, -B = the global brightness control value in the control data latch for each output color group

(2)

Table 2. BC Data vs Current Ratio and Set-Current Value

BC DATA (Binary)	BC DATA (Decimal)	BC DATA (Hex)	RATIO OF OUTPUT CURRENT TO I_{OLCMax} (mA, Typical)	I_{OUT} , mA ($I_{OLCMax} = 35$ mA, Typical)	I_{OUT} , mA ($I_{OLCMax} = 2$ mA, Typical)
000 0000	0	00	0	0	0
000 0001	1	01	0.8	0.28	0.02
000 0010	2	02	1.6	0.55	0.03
...	...	...	...	...	...
111 1101	125	7D	98.4	34.45	1.97
111 1110	126	7E	99.2	34.72	1.98
111 1111	127	7F	100	35	2

8.3.3 Constant-Current Output On-Off Control

When BLANK is low, each output is controlled by the data in the output on-off data latch. When data corresponding to an output are equal to 1, the output turns on; when the data corresponding to an output are equal to 0, the output turns off. When BLANK is high, all outputs are forced off.

When the device is powered on, the data in the output on-off data latch are not set to any default values. Therefore, on-off data must be written to the output on-off data latch before turning on the constant-current output and pulling BLANK low.

If there are any OUTRn, -Gn, -Bn outputs not connected to an LED, including open for short-to-ground failures, the on-off data corresponding to the unconnected output should be set to 0 before the LED is turned on. Otherwise, the V_{CC} supply current (I_{CC}) increases while the LEDs are on. A truth table for the on-off control data is shown in Table 3.

Table 3. On-Off Control-Data Truth Table

ON-OFF CONTROL DATA	CONSTANT-CURRENT OUTPUT STATUS
0	Off
1	On

8.4 Device Functional Modes

8.4.1 LOD, LSD, and TEF Operation

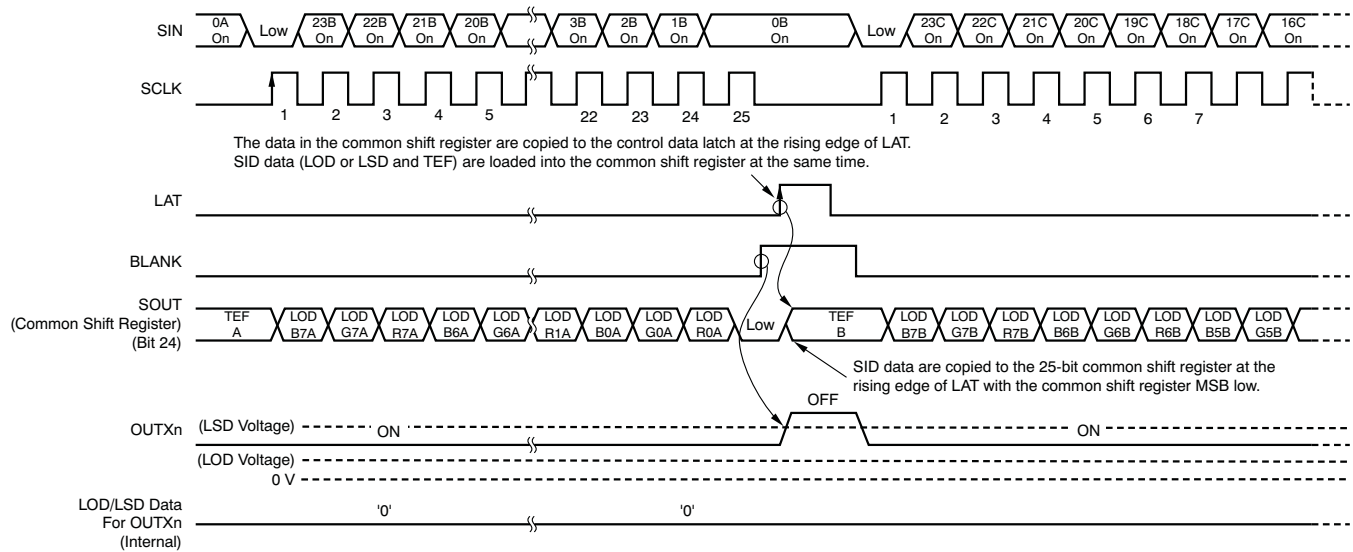


Figure 33. LOD, LSD, and TEF Operation (No LED Error)

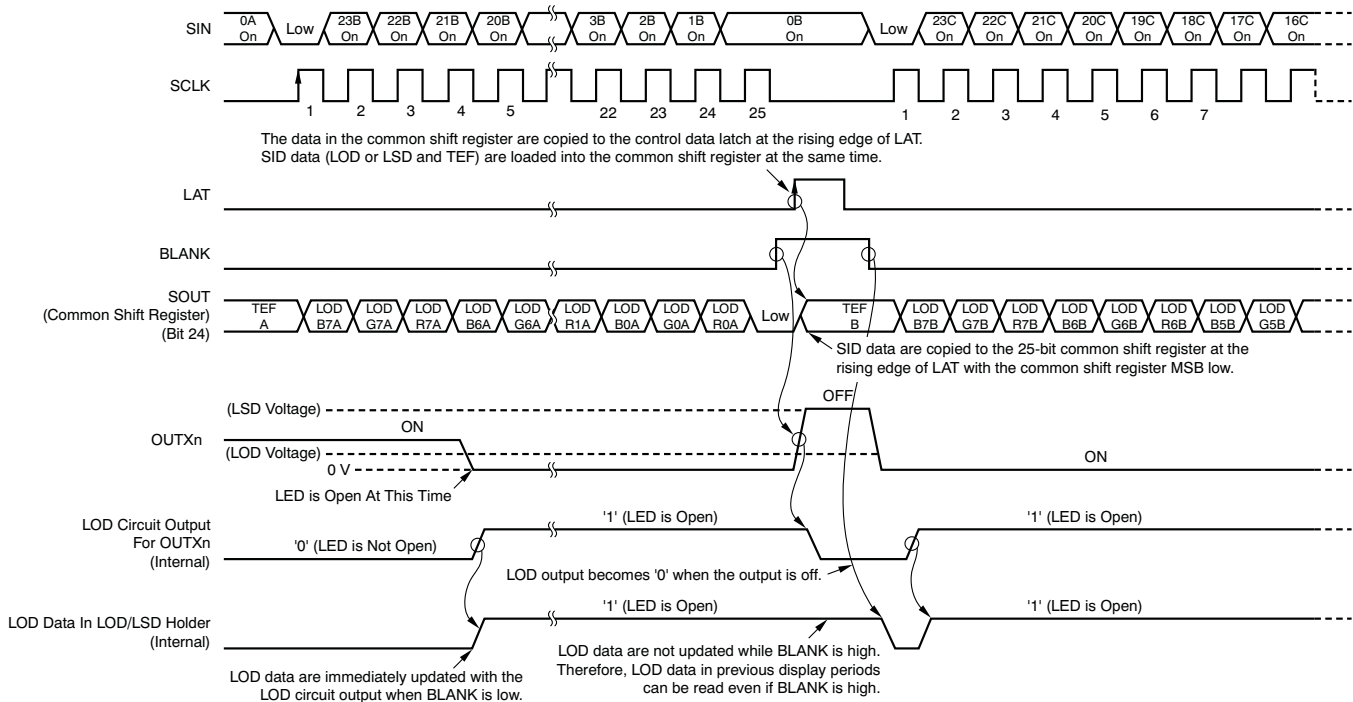


Figure 34. LOD, LSD, and TEF Operation (LED-Open Error)

Device Functional Modes (continued)

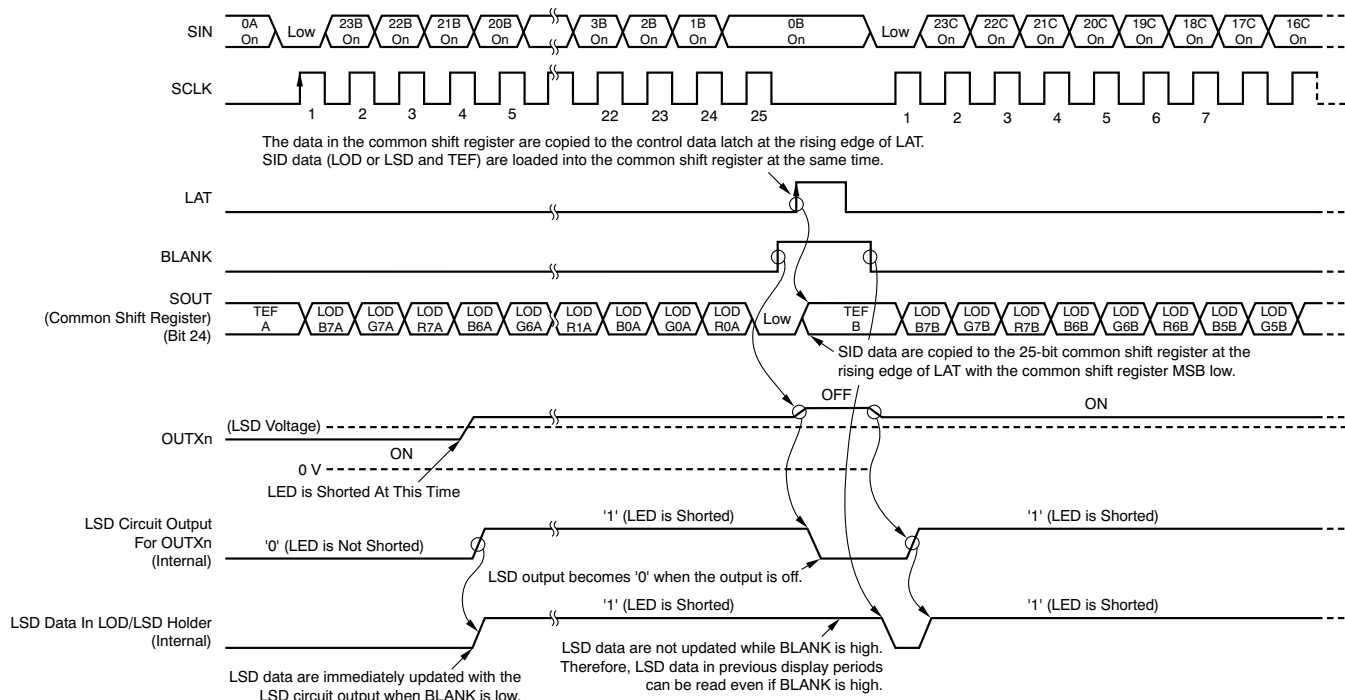


Figure 35. LOD, LSD, and TEF Operation (LED-Short Error)

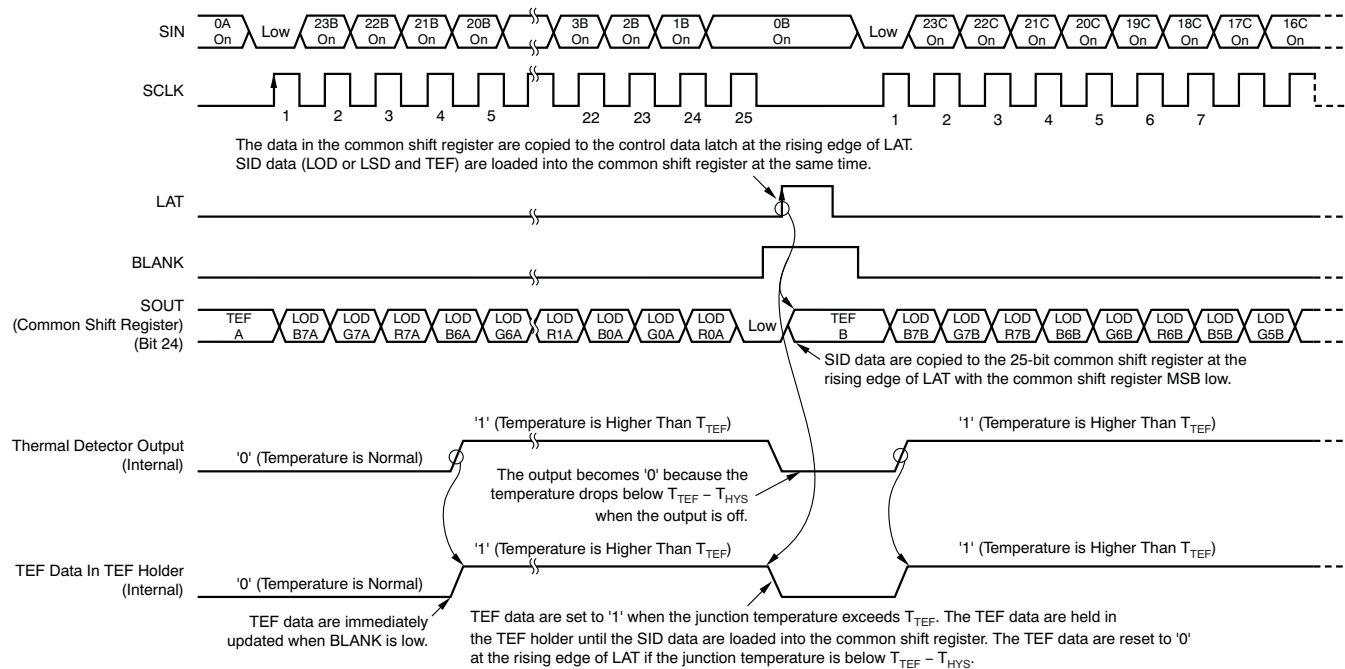


Figure 36. LOD, LSD, and TEF Operation (Thermal Error)

Device Functional Modes (continued)

8.4.2 Register and Data Latch Configuration

The TLC5952 device has two writable data latches: the output on-off data latch and the control data latch. Both data latches are 24 bits in length. If the common shift register MSB is 0, the least significant 24 bits of data from the 25-bit common shift register are latched into the output on-off data latch. If the MSB is 1, the data are latched into the control data latch. Figure 37 shows the common shift register and the control data latch configuration.

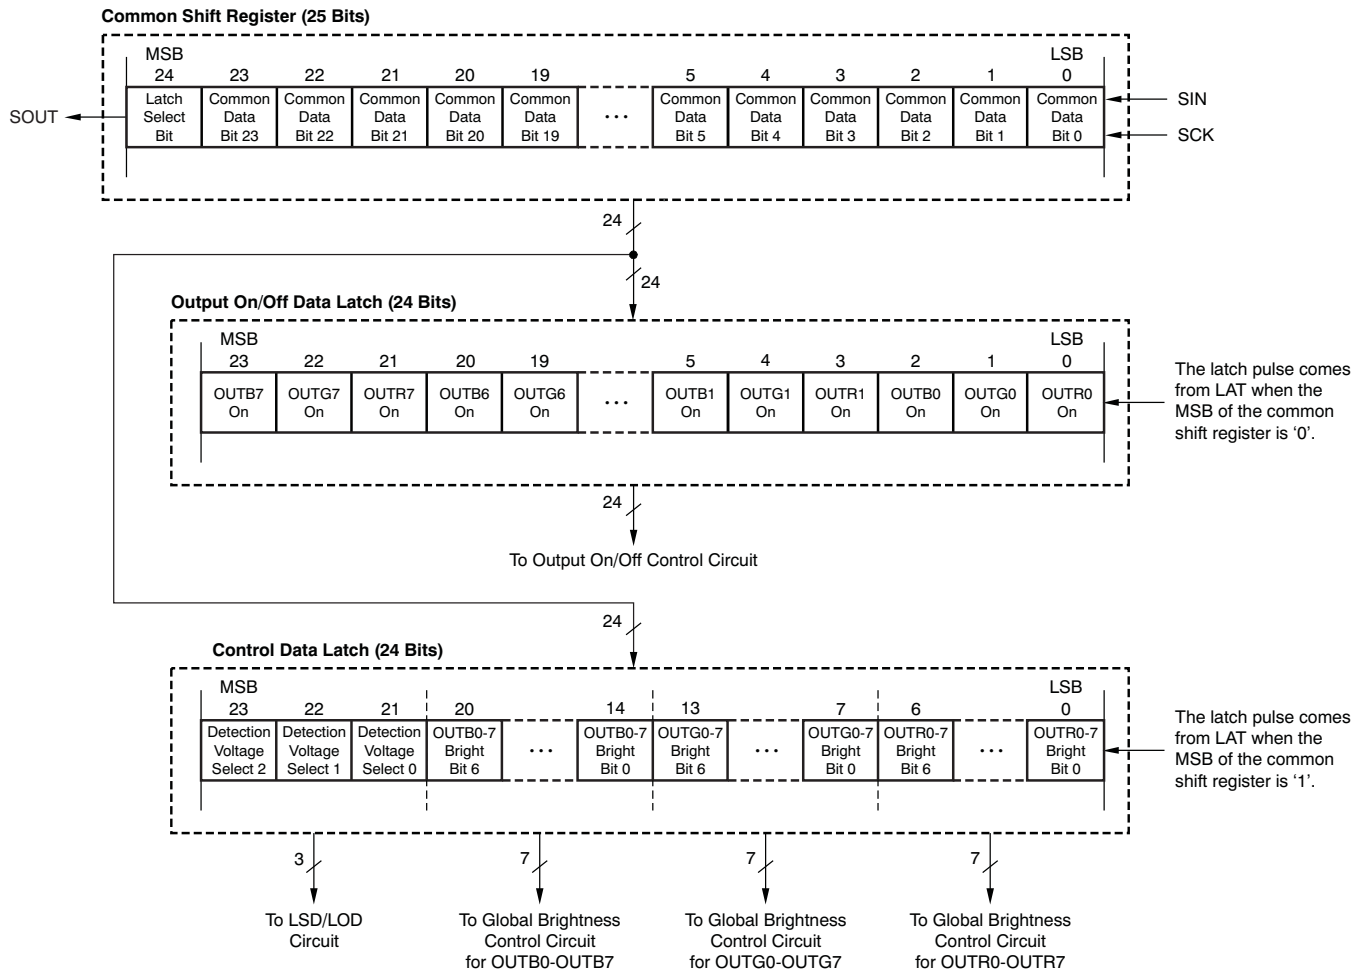


Figure 37. Grayscale Shift Register and Data-Latch Configuration

8.4.2.1 Output On-Off Data Latch

The output on-off data latch is 24 bits long. This latch is used to turn each output current sink (OUTRn, -Gn, -Bn) on or off. When the MSB of the common shift register is set to 0, the lower 24 bits are written to the output on-off data latch on the rising edge of LAT. If the output on-off data latch bit corresponding to an output is 0, the output is turned off; if the bit is a 1, the output is turned on.

When the device is powered on, the data in the output on-off data latch are not set to any default value. Therefore, the on-off control data should be written to the data latch before the constant-current outputs are turned on.

Device Functional Modes (continued)

8.4.2.2 Control-Data Latch

The control data latch is 24 bits long and is used to adjust the LED current for each color group (OUTR0-OUTR7, OUTG0-OUTG7, and OUTB0-OUTB7). The LED current for each group can be adjusted between 0% and 100% of I_{OLCMAX} in 128 steps (7-bit resolution). This data latch is also used to select the error detection type, LED open detection (LOD) or LED short detection (LSD), and the threshold voltage. When the MSB of the common shift register is set to 1, the lower 24 bits are written to the control data latch on the rising edge of LAT. [Table 4](#) shows the control data latch bit assignment.

When the device is powered on, the data in the control data latch are not set to a default value. Therefore, the control data latch data should be written to the latch before the constant-current outputs are turned on.

Table 4. Data Bit Assignment

BITS	DESCRIPTION
6–0	Global brightness control data for RED group (OUTR0-OUTR7, data = 00h to 7Fh)
13–7	Global brightness control data for GREEN group (OUTG0-OUTG7, data = 00h to 7Fh)
20–14	Global brightness control data for BLUE group (OUTB0-OUTB7, data = 00h to 7Fh)
23–21	Detection voltage and type select (data = 0h to 7h) 0 = LED open detection with 0.3 V (typ) threshold 1 = LED open detection with 0.6 V (typ) threshold 2 = LED open detection with 0.9 V (typ) threshold 3 = LED open detection with 1.2 V (typ) threshold 4 = LED short detection with $V_{CC} \times 60\%$ (typ) threshold 5 = LED short detection with $V_{CC} \times 70\%$ (typ) threshold 6 = LED short detection with $V_{CC} \times 80\%$ (typ) threshold 7 = LED short detection with $V_{CC} \times 90\%$ (typ) threshold

Figure 38 shows the operation to write data into the common shift register and control data latch.

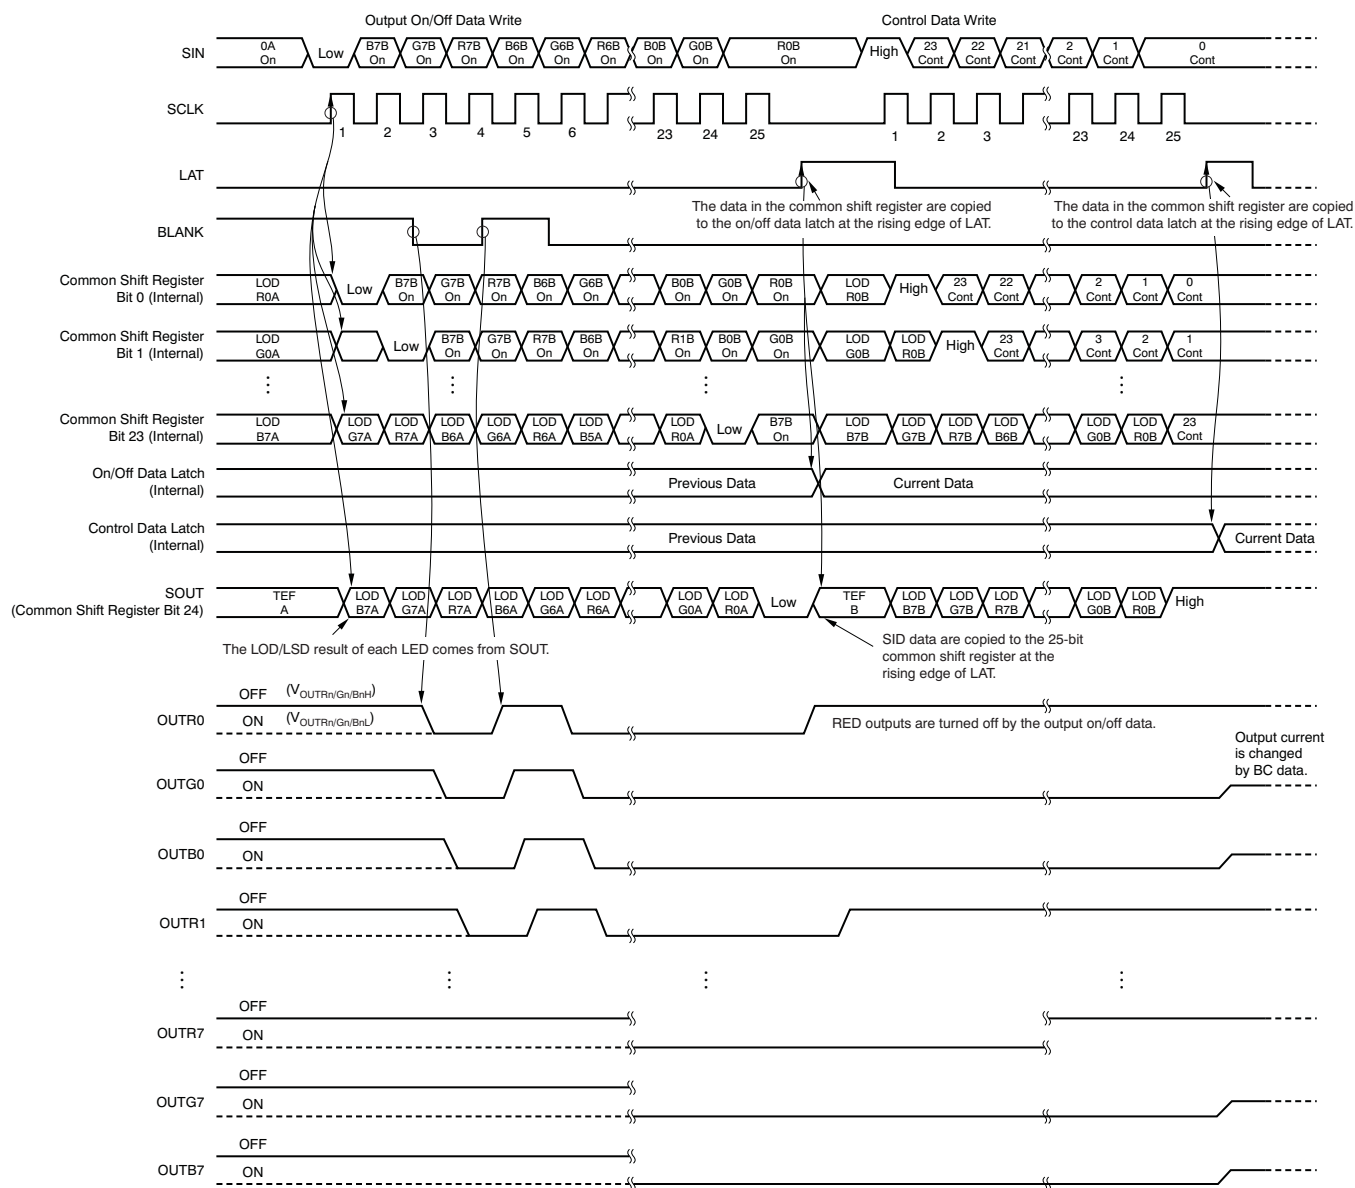


Figure 38. Data Write Operation

8.4.2.3 Status Information Data (SID)

The 25-bit word status information data (SID) contains the status of the LED open detection (LOD) or LED short detection (LSD), and thermal error flag (TEF). When the MSB of the common shift register is set to 0, the SID overwrites the common shift register data at the rising edge of LAT after the data in the common shift register are copied to the output on-off data latch. If the common shift register MSB is 1, the SID data are not copied to the common shift register.

After being copied into the common shift register, new SID data are not available until new data are written into the common shift register. If new data are not written, the LAT signal is ignored. To recheck SID data without changing the constant-current output on-off data, reprogram the common shift register with the same data that are currently programmed into the output on-off data latch. When LAT goes high, the output on-off data do not change, but new SID data are loaded into the common shift register. LOD, LSD, and TEF are shifted out of SOUT with each rising edge of SCLK.

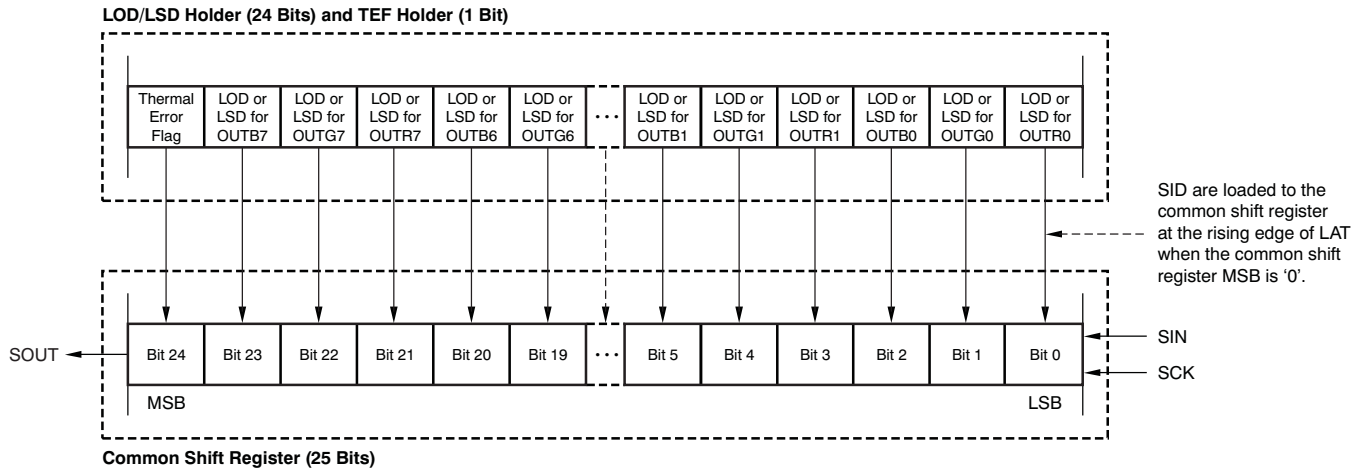


Figure 39. SID Load Assignment

8.4.2.4 LED-Open Detection (LOD), LED-Short Detection (LSD), And Thermal Error Flag (TEF)

LOD detects a fault caused by an LED open circuit or a short from OUTR_n, -G_n, -B_n to ground by comparing the OUTR_n, -G_n, -B_n voltage to the LOD detection threshold voltage level set in the control data latch (Table 4). If the OUTR_n, -G_n, -B_n voltage is lower than the programmed voltage, that output LOD bit is set to 1 to indicate an open LED. Otherwise, the LOD bit is set to 0. LOD data are only valid for outputs programmed to be on. LOD data for outputs programmed to be off are always 0.

LSD data detects a fault caused by a shorted LED by comparing the OUTR_n, -G_n, -B_n voltage to the LSD detection threshold voltage level set in the control data latch (Table 4). If the OUTR_n, -G_n, -B_n voltage is higher than the programmed voltage, that output LOD bit is set to 1 to indicate a shorted LED. Otherwise, the LSD bit is set to 0. LSD data are only valid for outputs programmed to be on. LSD data for outputs programmed to be off are always 0.

LOD and LSD data are not valid until 1 μ s after the falling edge of BLANK. Therefore, BLANK must be low for at least 1 μ s before going high. At the rising edge of BLANK, the LOD and LSD detection data are latched in the LOD-LSD holder. Changes in the LOD or LSD data while BLANK is low are directly connected to the output of the LOD-LSD holder, but are only valid 1 μ s after the change. The rising edge of LAT transfers the output data of the LOD-LSD holder to the common shift register.

As shown in Table 5, LOD and LSD data cannot be checked simultaneously. LOD and LSD data are not valid when TEF is active because all outputs are forced off.

The TEF bit indicates that the device junction temperature exceeds the temperature threshold ($T_{TEF} = 165^{\circ}\text{C}$, typ). The TEF bit also indicates that the device has turned off all drivers to avoid overheating. The device automatically turns the drivers back on when the device temperature decreases to less than $T_{TEF} - T_{HYS}$. The TEF data are held in the TEF holder latch until the TEF data are loaded into the common shift register by the rising edge of LAT. If the device temperature falls below $T_{TEF} - T_{HYS}$ when LAT goes high, the TEF data in the TEF holder become 0. If the device temperature is not below $T_{TEF} - T_{HYS}$ when LAT goes high, then the TEF data remain 1. Table 5 shows a truth table for LOD, LSD, and TEF. Figure 33 to Figure 36 show different examples of LOD, LSD, and TEF operation.

Table 5. LOD, LSD, and TEF Truth Table

SID DATA	CONDITION		
	LED OPEN DETECTION (LOD, Voltage Select Data = 0h to 3h)	LED SHORT DETECTION (LSD, Voltage Select Data = 4h to 7h)	THERMAL ERROR FLAG (TEF)
0	LED is not open or the output is off ($V_{OUTn/Gn/Bn}$ is greater than the voltage selected by the detection voltage select bit in the control data latch)	LED is not shorted or the output is off ($V_{OUTn/Gn/Bn}$ is less than or equal to the voltage selected by the detection voltage select bit in the control data latch)	Junction temperature is lower than the detect temperature (T_{TEF}) before TEF is undetected or the detect temperature ($T_{TEF} - T_{HYS}$) after TEF is detected
1	LED is open or shorted to GND ($V_{OUTn/Gn/Bn}$ is less than or equal to the voltage selected by the detection voltage select bit in the control data latch)	LED terminal is short or $OUTn$ is short to higher voltage (V_{OUTn} is greater than The selected voltage by detection voltage select bit in the control data latch)	Junction temperature is higher than the detect temperature (T_{TEF})

8.4.2.5 Thermal Shutdown (TSD)

The thermal shutdown (TSD) function turns off all constant-current outputs when the device junction temperature (T_J) exceeds the temperature threshold ($T_{TEF} = 165^{\circ}\text{C}$, typ). The outputs remain disabled as long as the overtemperature condition exists. The outputs are turned on again after the device junction temperature drops below ($T_{TEF} - T_{HYS}$).

8.4.2.6 Noise Reduction

Large surge currents may flow through the device and the board on which the device is mounted if all 24 LED channels turn on simultaneously when BLANK goes low. These large current surges could induce detrimental noise and electromagnetic interference (EMI) into other circuits. The TLC5952 turns the LED channels on in a series delay to provide a circuit soft-start feature.

A small delay circuit is implemented between each output. When all bits of the on-off data latch are set to 1, each constant-current output turns on in order ($OUTR0$, $OUTG0$, $OUTB0$, $OUTR1$, $OUTG1$, $OUTB1$, $OUTR2$ – $OUTB6$, $OUTR7$, $OUTG7$, and $OUTB7$) with a small delay between each output after BLANK goes low or LAT goes high; see [Figure 38](#). Both turnon and turnoff are delayed.

9 Power Supply Recommendations

Connect at least one 10-nF ceramic capacitor as close as possible between the V_{CC} pin and ground. Additional capacitors are needed on the LED power supply to reduce ripple on the LED power supply to a minimum.

10 デバイスおよびドキュメントのサポート

10.1 ドキュメントの更新通知を受け取る方法

ドキュメントの更新通知を受け取るには、ti.comのデバイスのプロダクト・フォルダにアクセスします。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

10.2 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ オンライン・コミュニティ TIのE2E (*Engineer-to-Engineer*) コミュニティ。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

設計サポート TIの設計サポート役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

10.3 商標

PowerPAD, E2E are trademarks of Texas Instruments.
All other trademarks are the property of their respective owners.

10.4 静電気放電に関する注意事項



すべての集積回路は、適切なESD保護方法を用いて、取扱いと保存を行うようにして下さい。

静電気放電はわずかな性能の低下から完全なデバイスの故障に至るまで、様々な損傷を与えます。高精度の集積回路は、損傷に対して敏感であり、極めてわずかなパラメータの変化により、デバイスに規定された仕様に適合しなくなる場合があります。

10.5 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

11 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TLC5952DAP	Active	Production	HTSSOP (DAP) 32	46 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAP.A	Active	Production	HTSSOP (DAP) 32	46 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAP.B	Active	Production	HTSSOP (DAP) 32	46 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAPG4	Active	Production	HTSSOP (DAP) 32	46 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAPG4.A	Active	Production	HTSSOP (DAP) 32	46 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAPG4.B	Active	Production	HTSSOP (DAP) 32	46 TUBE	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAPR	Active	Production	HTSSOP (DAP) 32	2000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAPR.A	Active	Production	HTSSOP (DAP) 32	2000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952
TLC5952DAPR.B	Active	Production	HTSSOP (DAP) 32	2000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 85	TLC5952

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TLC5952DAPR	HTSSOP	DAP	32	2000	330.0	24.4	8.6	11.5	1.6	12.0	24.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TLC5952DAPR	HTSSOP	DAP	32	2000	350.0	350.0	43.0

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
TLC5952DAP	DAP	HTSSOP	32	46	530	11.89	3600	4.9
TLC5952DAP.A	DAP	HTSSOP	32	46	530	11.89	3600	4.9
TLC5952DAP.B	DAP	HTSSOP	32	46	530	11.89	3600	4.9
TLC5952DAPG4	DAP	HTSSOP	32	46	530	11.89	3600	4.9
TLC5952DAPG4.A	DAP	HTSSOP	32	46	530	11.89	3600	4.9
TLC5952DAPG4.B	DAP	HTSSOP	32	46	530	11.89	3600	4.9

GENERIC PACKAGE VIEW


DAP 32

PowerPAD™ TSSOP - 1.2 mm max height

8.1 x 11, 0.65 mm pitch


PLASTIC SMALL OUTLINE

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

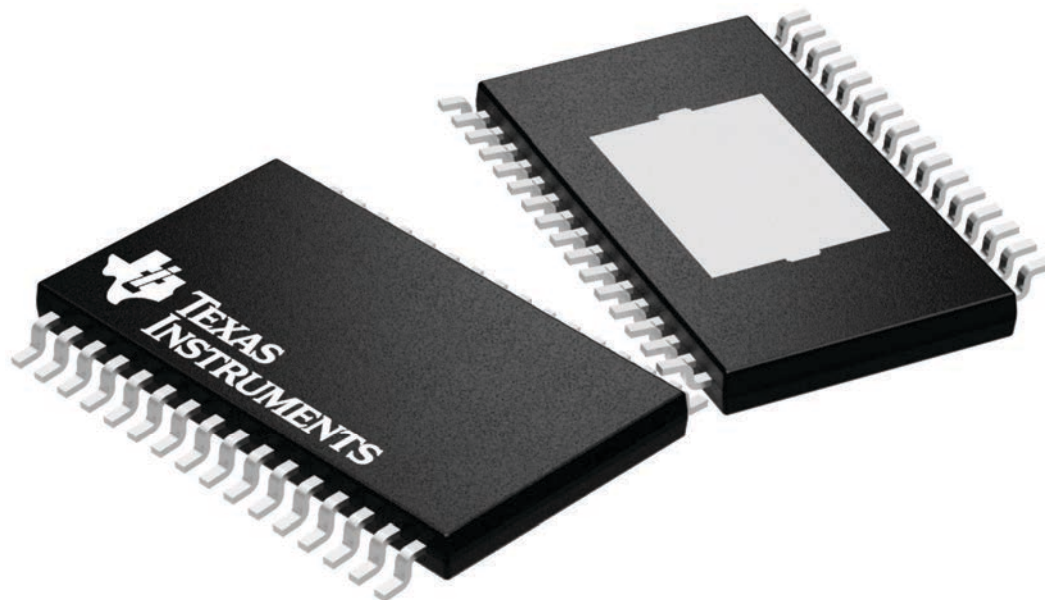

4225303/A

DAP (R-PDSO-G32) PowerPAD™ PLASTIC SMALL-OUTLINE PACKAGE

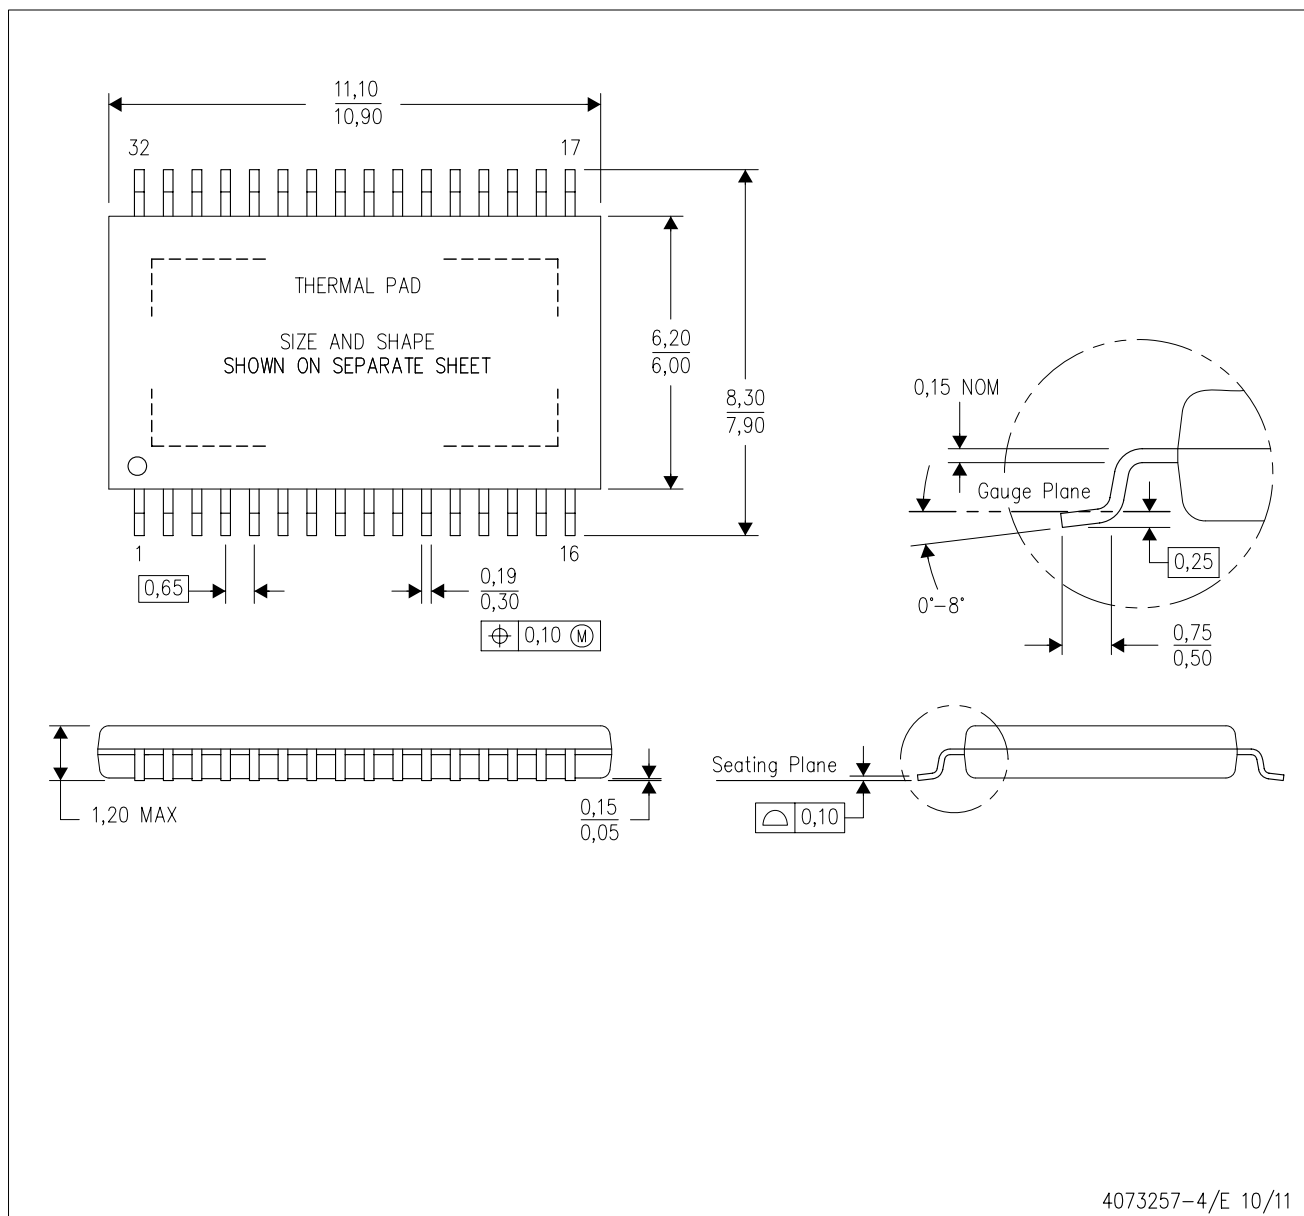

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
 - D. This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at www.ti.com <<http://www.ti.com>>.
-  Falls within JEDEC MO-153 Variation DCT.

DAP (R-PDSO-G32)


PowerPAD™ PLASTIC SMALL OUTLINE

THERMAL INFORMATION

This PowerPAD™ package incorporates an exposed thermal pad that is designed to be attached to a printed circuit board (PCB). The thermal pad must be soldered directly to the PCB. After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the PowerPAD package and how to take advantage of its heat dissipating abilities, refer to Technical Brief, PowerPAD Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 and Application Brief, PowerPAD Made Easy, Texas Instruments Literature No. SLMA004. Both documents are available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

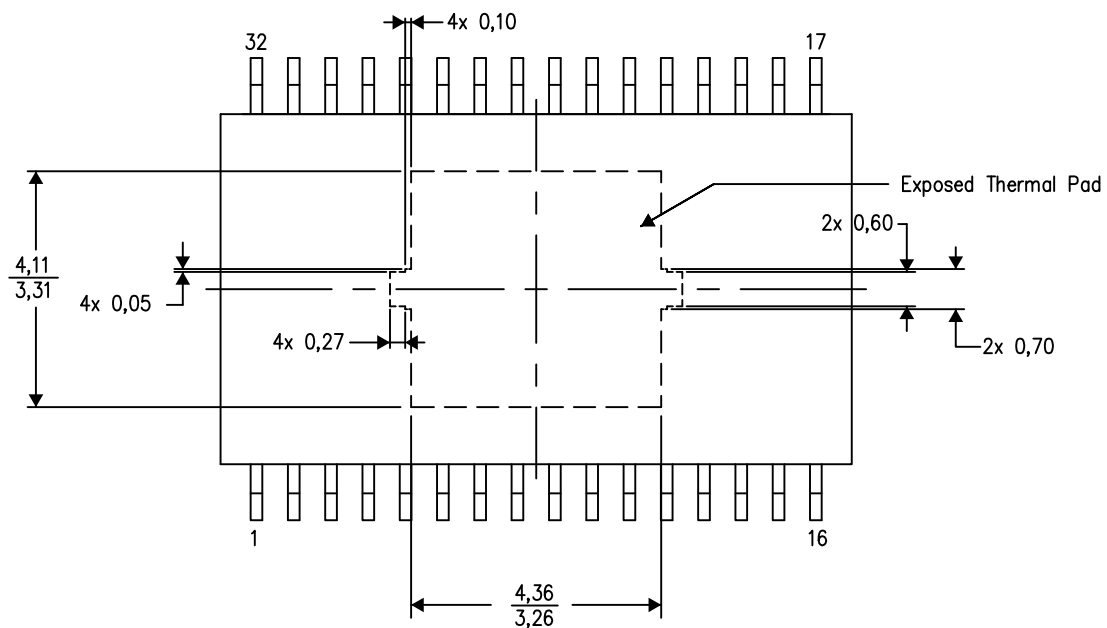

Top View
Exposed Thermal Pad Dimensions


4206319-3/M 09/13

NOTE: All linear dimensions are in millimeters

PowerPAD is a trademark of Texas Instruments.

LAND PATTERN DATA

DAP (R-PDSO-G32) PowerPAD™ PLASTIC SMALL OUTLINE PACKAGE

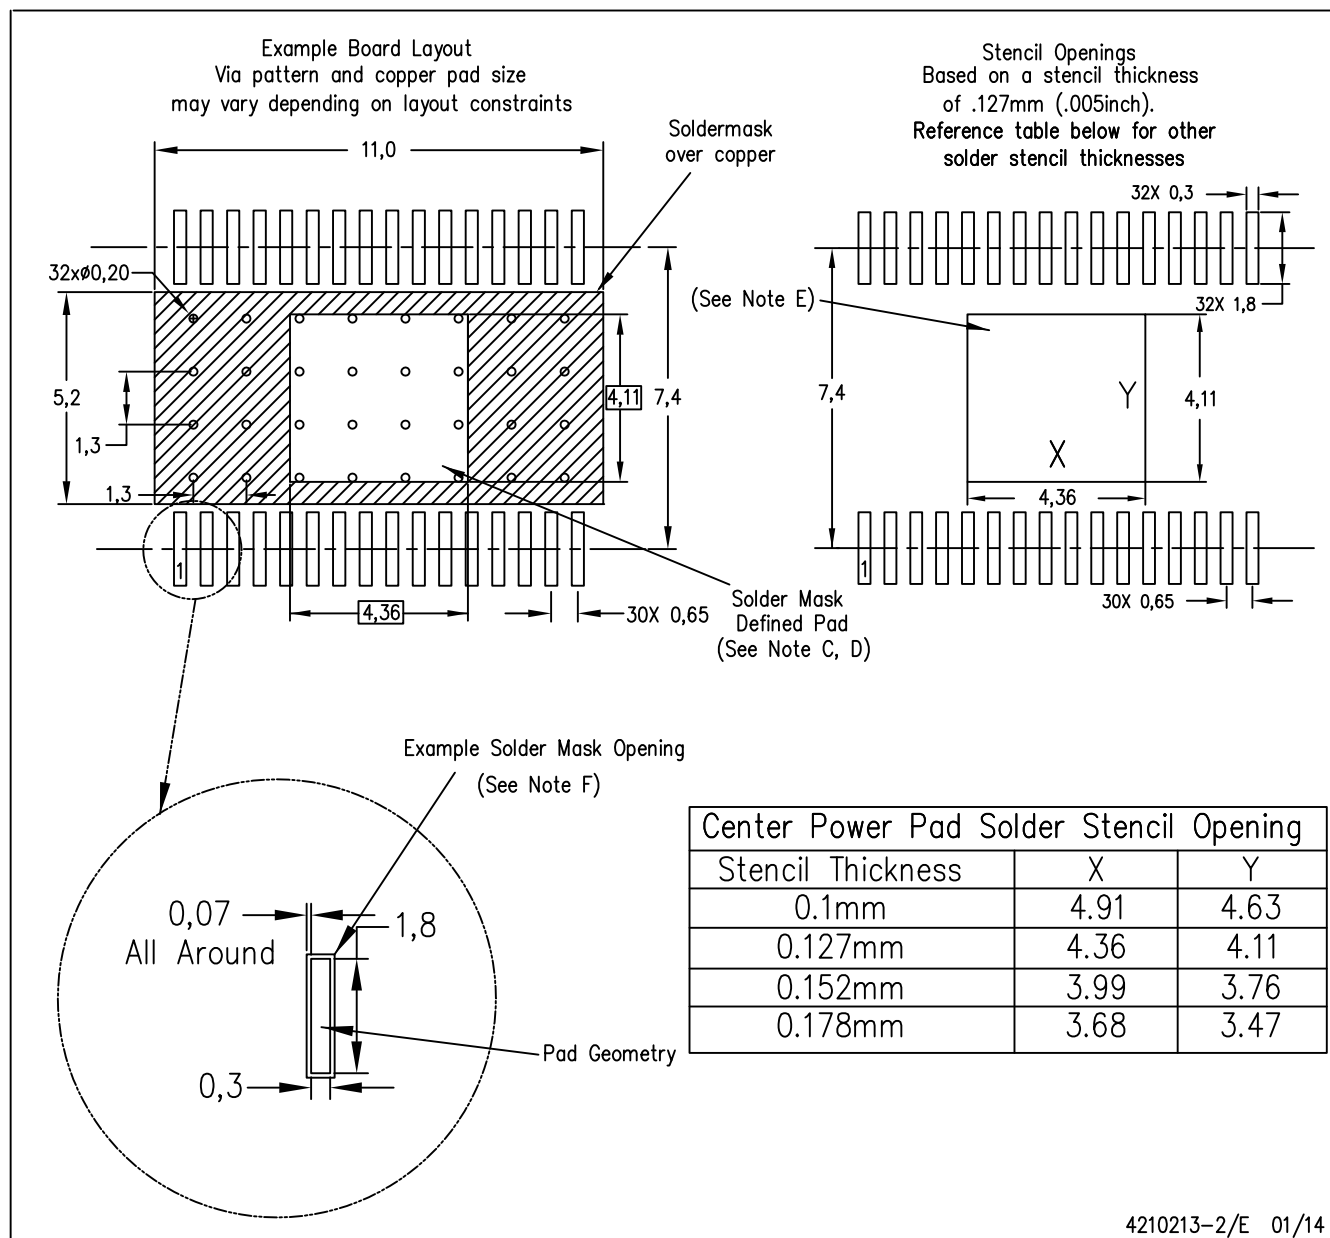

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
 - This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002, SLMA004, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>. Publication IPC-7351 is recommended for alternate designs.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
 - Contact the board fabrication site for recommended soldermask tolerances.

PowerPAD is a trademark of Texas Instruments



PowerPAD™ TSSOP - 1.2 mm max height

PLASTIC SMALL OUTLINE





PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-153.
5. Features may differ and may not be present.

DAP0032C

PowerPAD™ TSSOP - 1.2 mm max height

PLASTIC SMALL OUTLINE

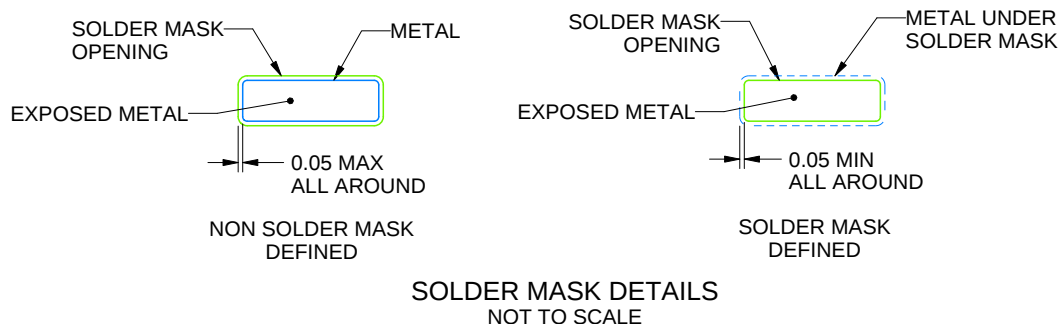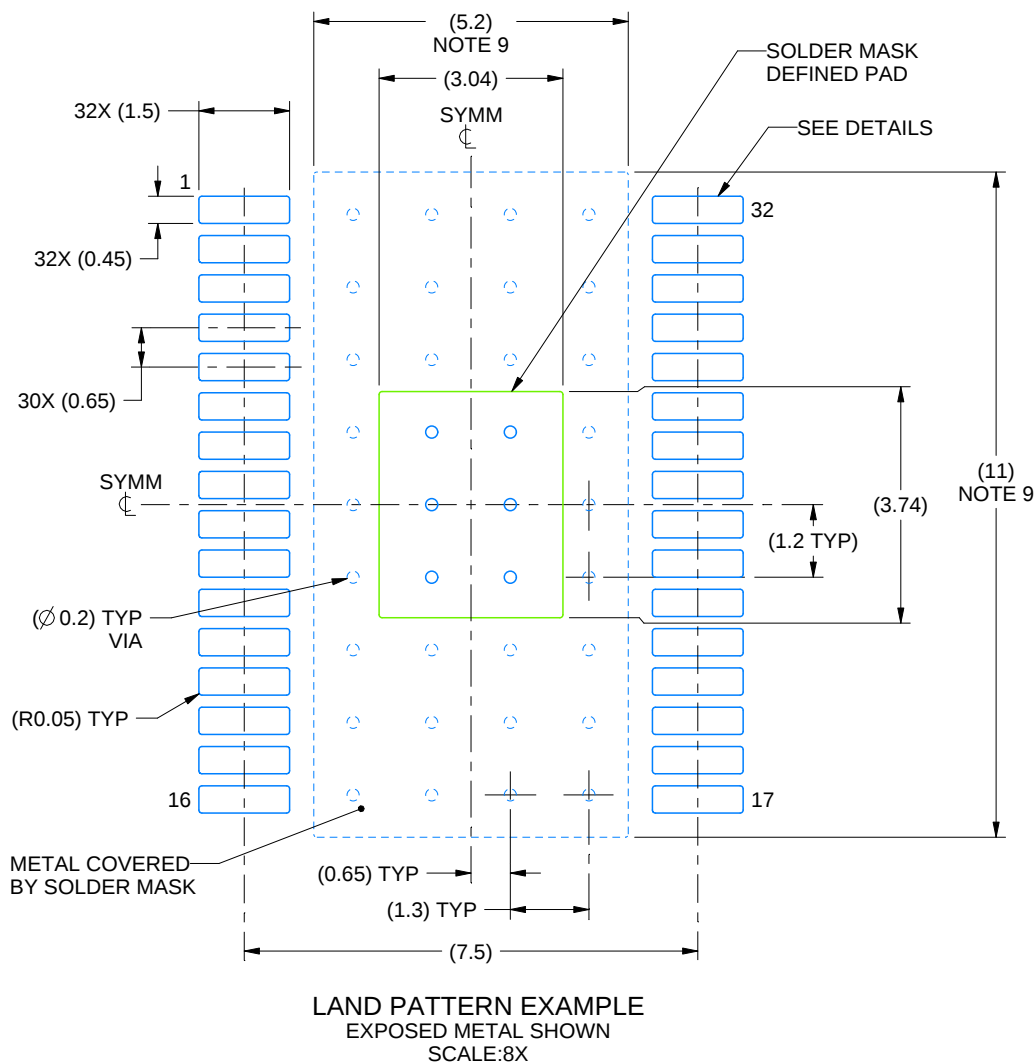

4223691/A 05/2017


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
9. Size of metal pad may vary due to creepage requirement.

DAP0032C

PowerPAD™ TSSOP - 1.2 mm max height

PLASTIC SMALL OUTLINE

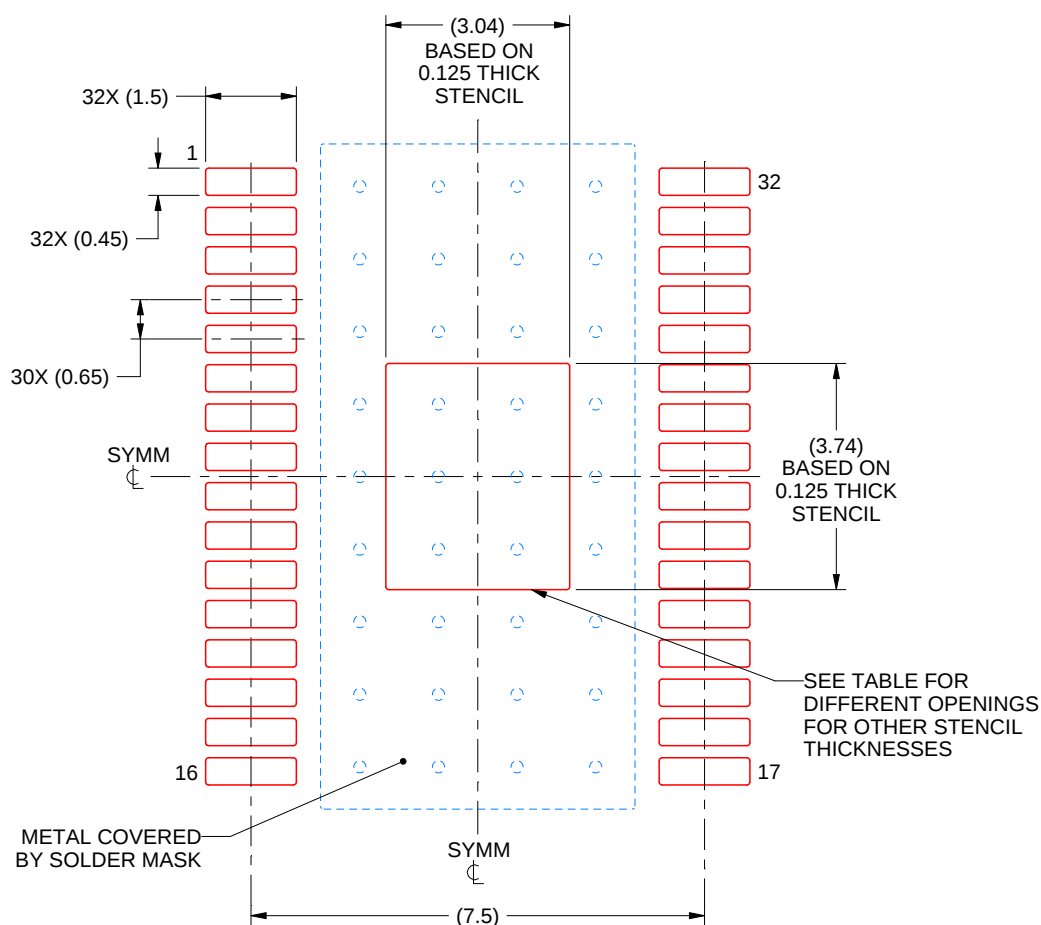

SOLDER PASTE EXAMPLE
EXPOSED PAD
100% PRINTED SOLDER COVERAGE BY AREA
SCALE:8X

STENCIL THICKNESS	SOLDER STENCIL OPENING
0.1	3.40 X 4.18
0.125	3.04 X 3.74 (SHOWN)
0.15	2.78 X 3.41
0.175	2.57 X 3.16

4223691/A 05/2017

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含みいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](https://www.ti.com) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2026, Texas Instruments Incorporated

最終更新日：2025 年 10 月